



Bluetooth Mode: XHDRPS2
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

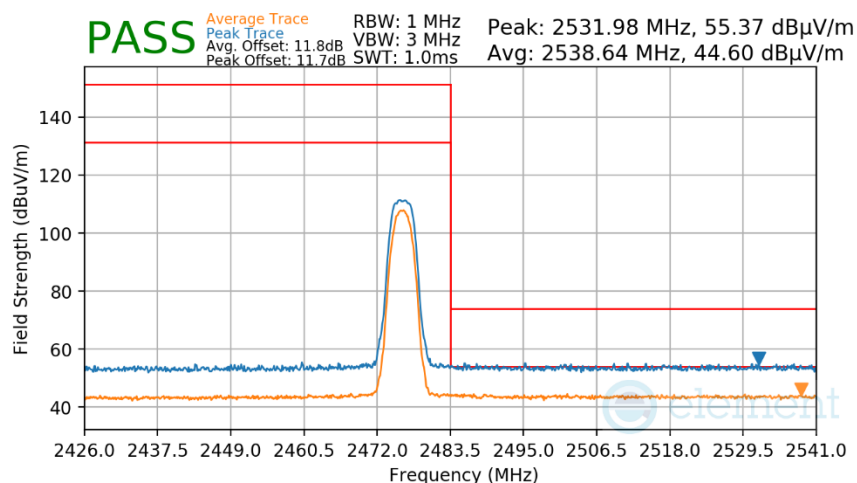

Plot 7-485. Radiated Restricted Upper Band Edge Measurement TxBF Primary


Bluetooth Mode: XHDRPM8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

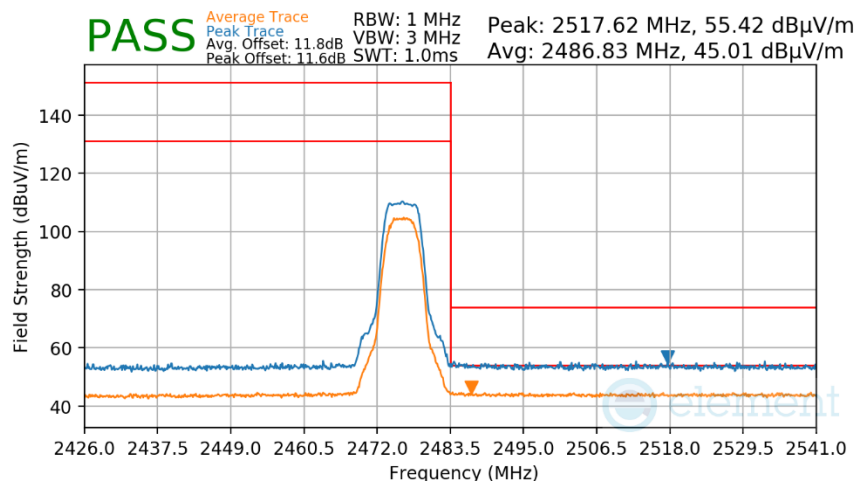

Plot 7-486. Radiated Restricted Upper Band Edge Measurement TxBF Primary


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 286 of 305

Bluetooth Mode: XHDRPM16
 Data Rate: 16Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

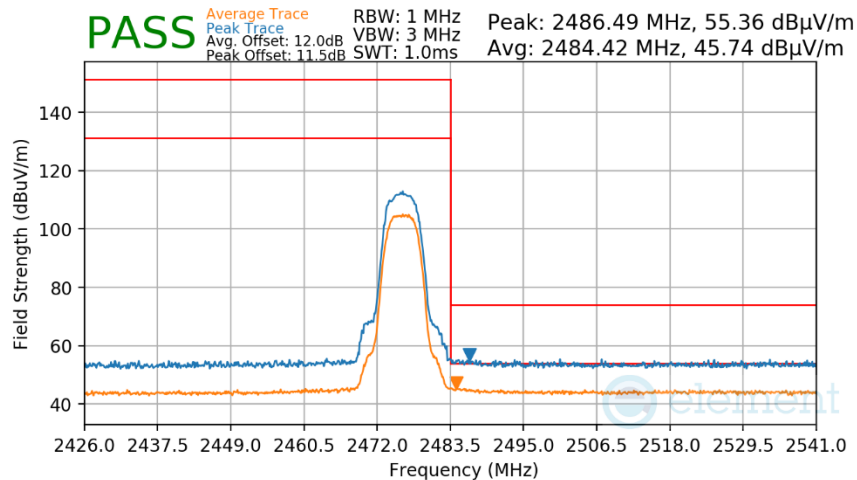

Plot 7-487. Radiated Restricted Upper Band Edge Measurement TxBF Primary

Bluetooth Mode: HDT8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

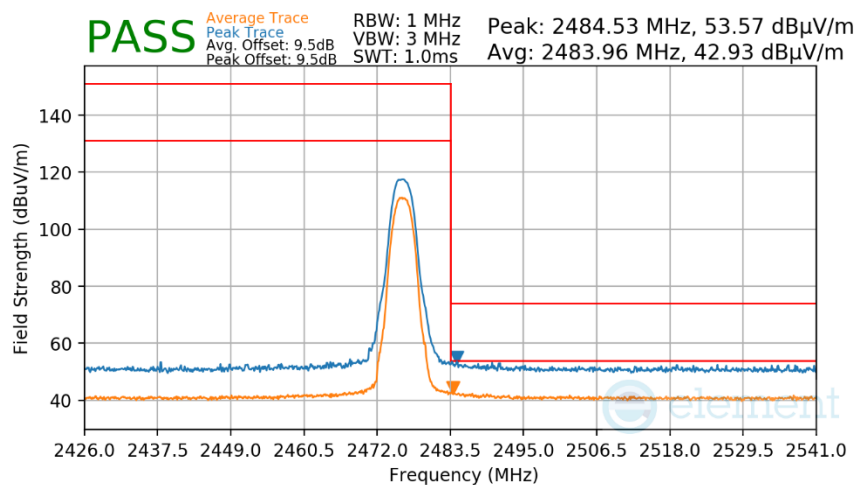


Plot 7-488. Radiated Restricted Upper Band Edge Measurement TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 287 of 305


7.7.7 TxBF Diversity Radiated Restricted Band Edge Measurements

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

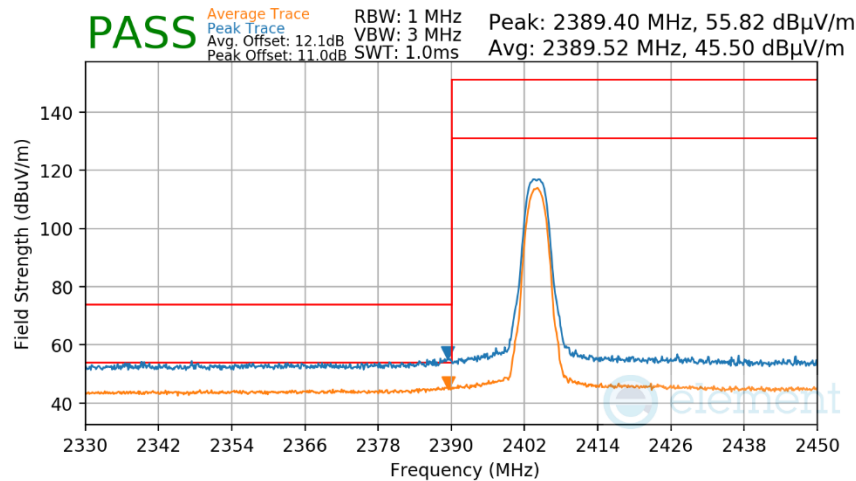

Plot 7-489. Radiated Restricted Lower Band Edge Measurement TxBF Diversity

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

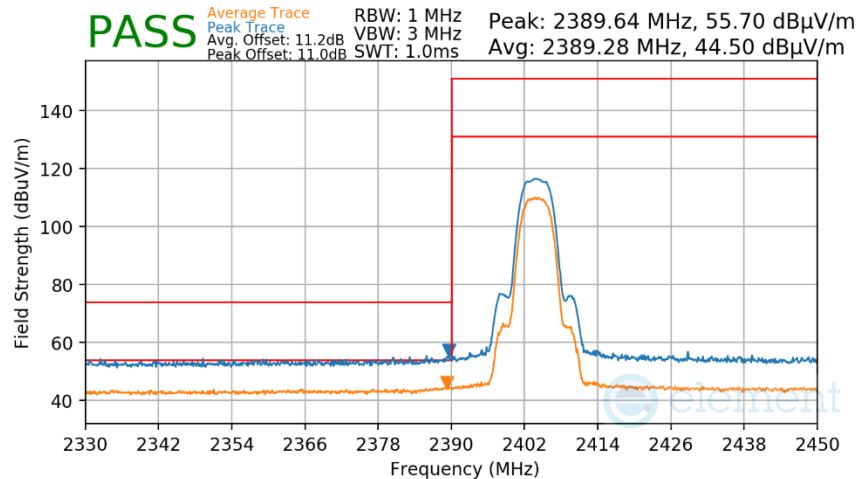


Plot 7-490. Radiated Restricted Lower Band Edge Measurement TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 288 of 305

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bluetooth Mode: XHDRPS2
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

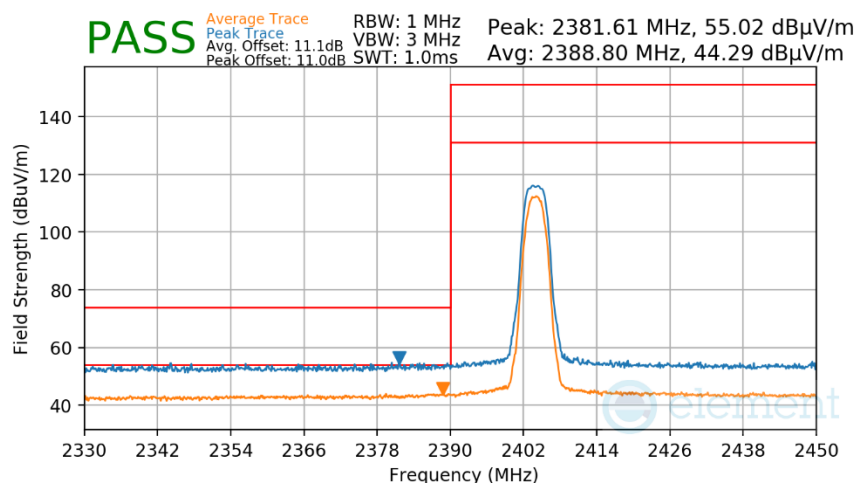

Plot 7-491. Radiated Restricted Lower Band Edge Measurement TxBF Diversity


Bluetooth Mode: XHDRPM8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

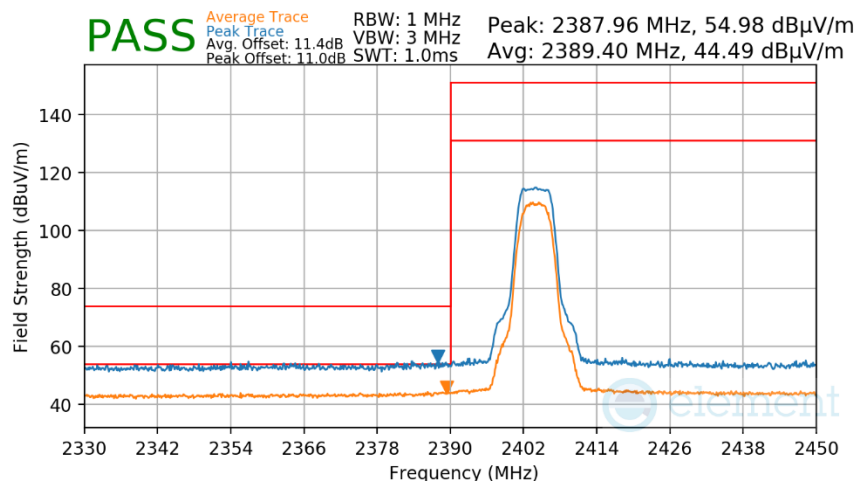

Plot 7-492. Radiated Restricted Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 289 of 305

Bluetooth Mode:	XHDRPM16
Data Rate:	16Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

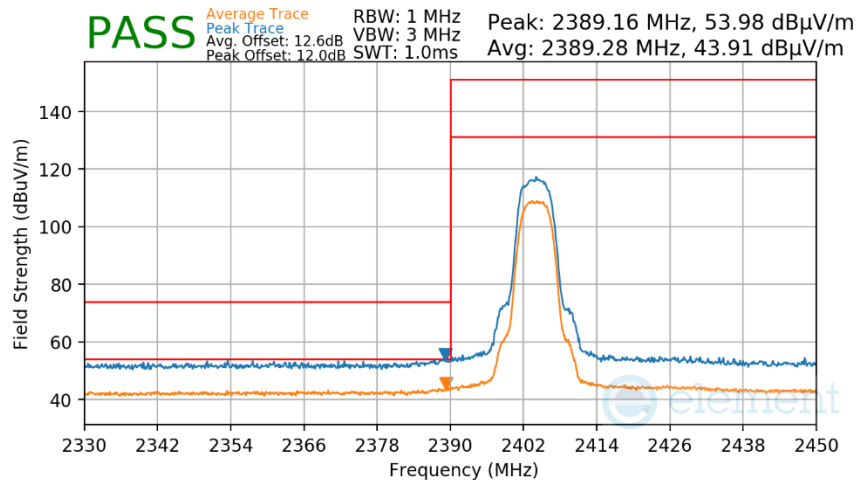

Plot 7-493. Radiated Restricted Lower Band Edge Measurement TxBF Diversity


Bluetooth Mode:	HDT8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

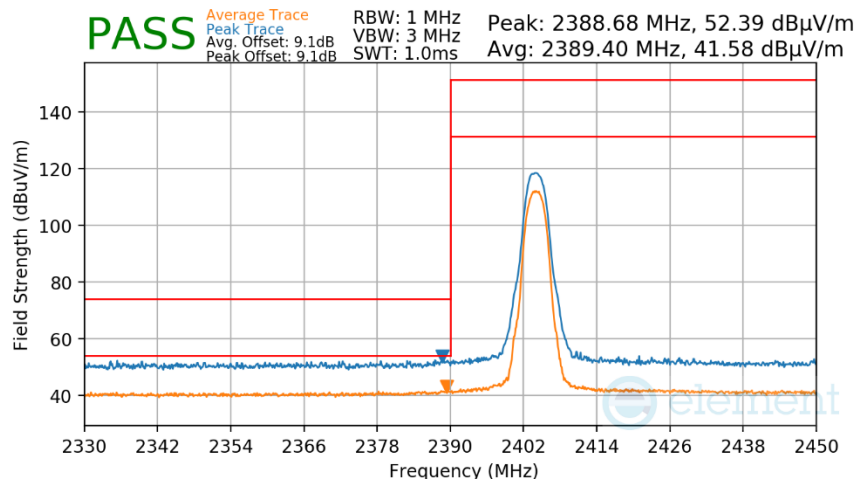

Plot 7-494. Radiated Restricted Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 290 of 305

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

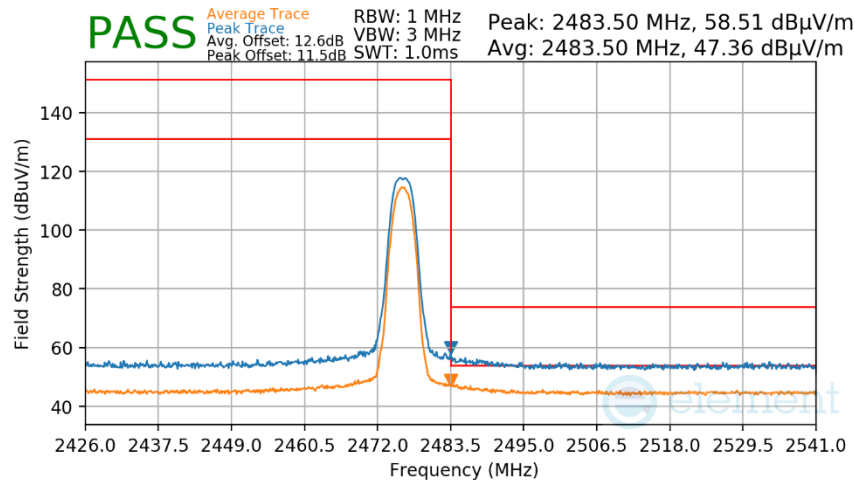

Plot 7-495. Radiated Restricted Upper Band Edge Measurement TxBF Diversity


Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

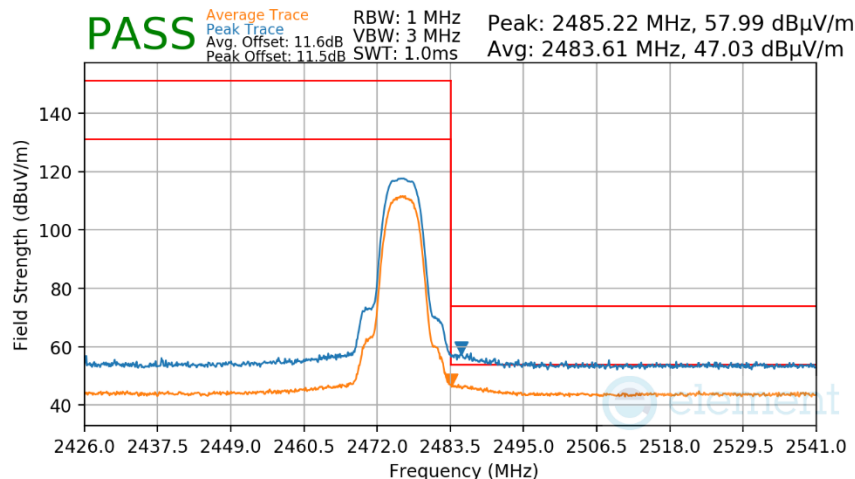

Plot 7-496. Radiated Restricted Upper Band Edge Measurement TxBF Diversity


FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 291 of 305

Bluetooth Mode:	XHDRPS2
Data Rate:	2Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

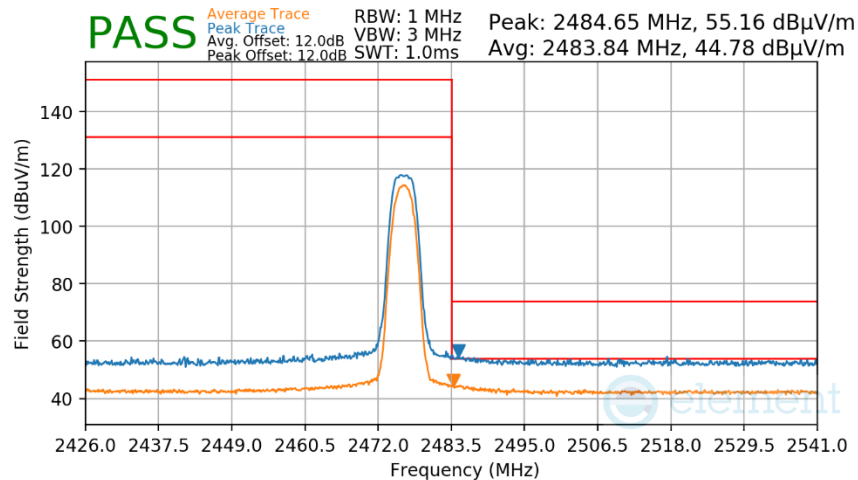

Plot 7-497. Radiated Restricted Upper Band Edge Measurement TxBF Diversity


Bluetooth Mode:	XHDRPM8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

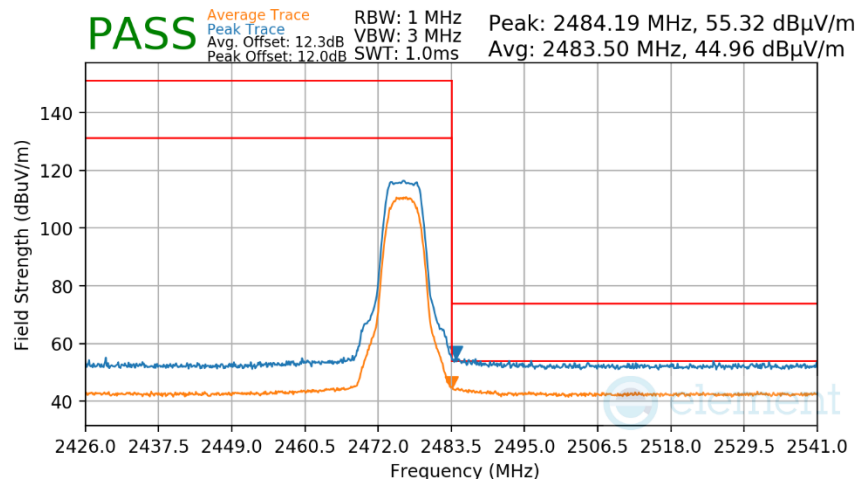

Plot 7-498. Radiated Restricted Upper Band Edge Measurement TxBF Diversity


FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 292 of 305

Bluetooth Mode: XHDRPM16
 Data Rate: 16Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

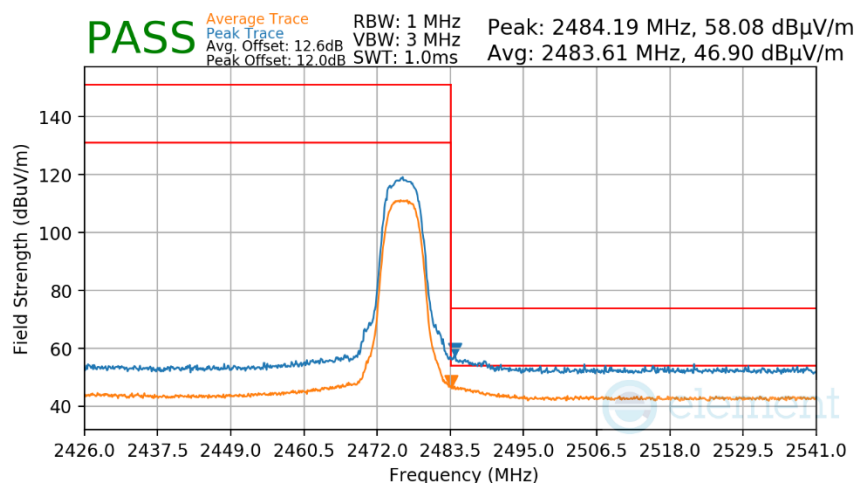

Plot 7-499. Radiated Restricted Upper Band Edge Measurement TxBF Diversity

Bluetooth Mode: HDT8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

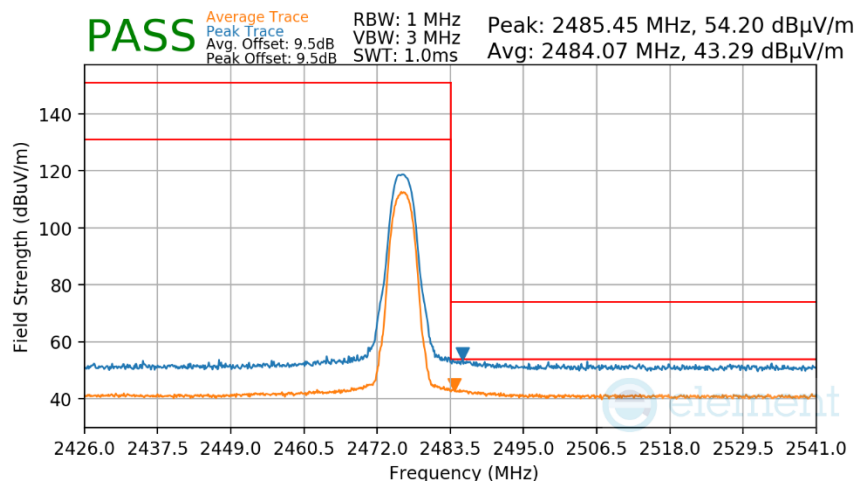

Plot 7-500. Radiated Restricted Upper Band Edge Measurement TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 293 of 305

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-27 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-27. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 294 of 305

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

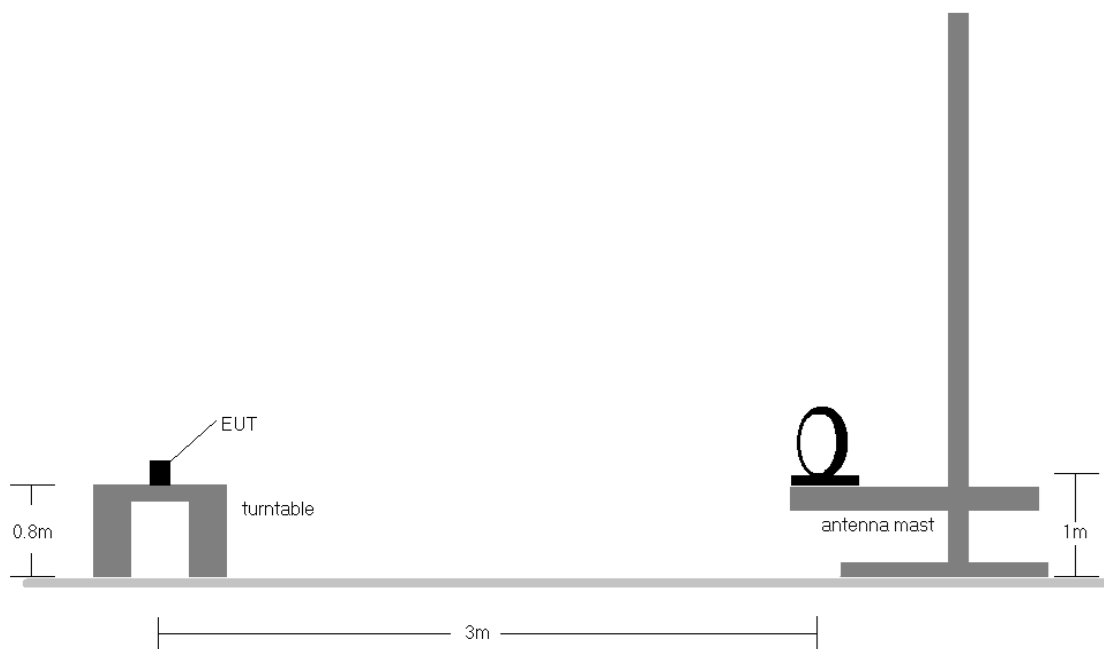


Figure 7-7. Radiated Test Setup < 30MHz

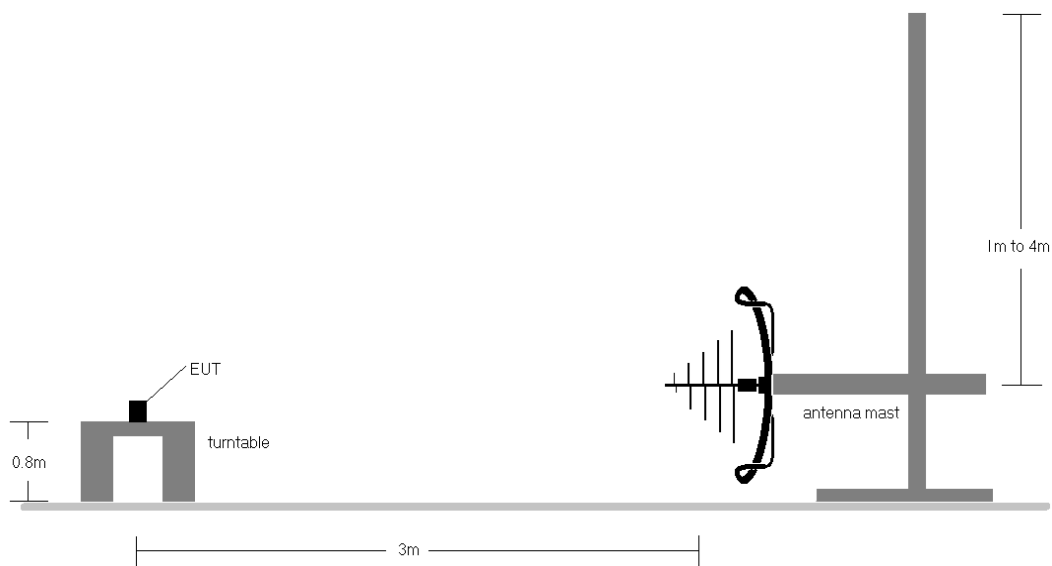


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 295 of 305

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-27.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamplifier Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$


FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 296 of 305

V 11.0 05/2025

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

TxBF Primary

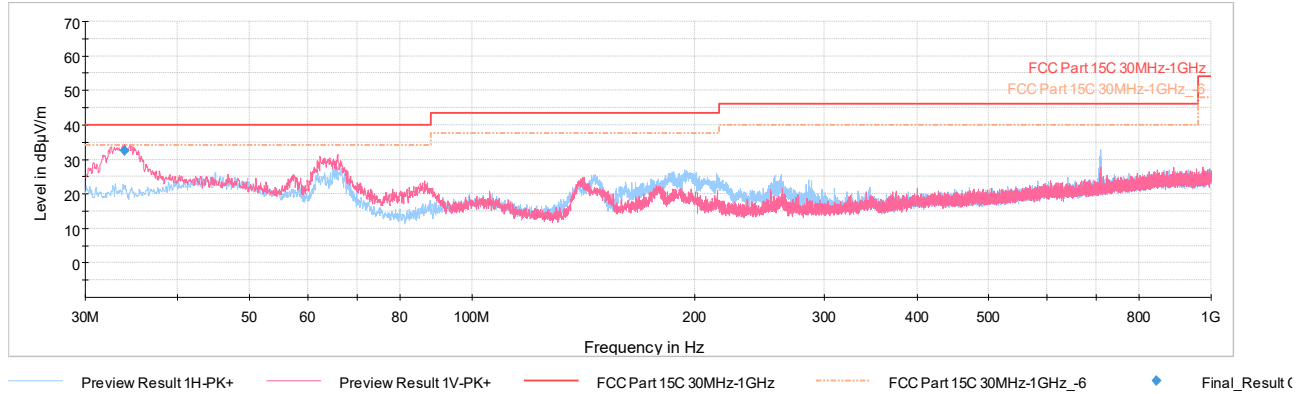

Plot 7-501. Radiated Spurious Emissions Below 1GHz TxBF Primary (HDR4, ePA – Ch.38 with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
33.88	QuasiPeak	V	100	335	-55.57	-18.90	32.53	40.00	-7.47
65.84	Max Peak	V	100	3	-56.70	-18.91	31.39	40.00	-8.61
105.76	Max Peak	V	300	46	-68.08	-18.19	20.73	43.52	-22.79
146.69	Max Peak	H	100	357	-60.03	-21.44	25.53	43.52	-17.99
261.93	Max Peak	H	100	134	-65.14	-16.24	25.62	46.02	-20.40
708.86	Max Peak	H	100	12	-66.74	-7.46	32.80	46.02	-13.22


Table 7-28. Radiated Spurious Emissions Below 1GHz TxBF Primary (HDR4, ePA – Ch.38 with AC/DC Adapter)

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 297 of 305

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

TxBF Diversity

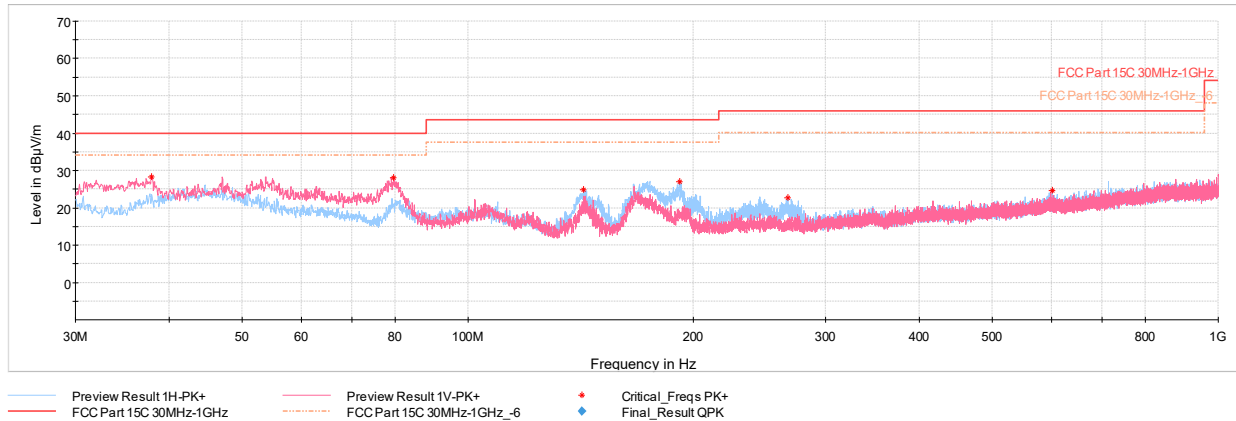

Plot 7-502. Radiated Spurious Emissions Below 1GHz TxBF Diversity (HDR4, ePA – Ch.38 with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
37.86	Max Peak	V	100	0	-61.57	-17.24	28.19	40.00	-11.81
79.66	Max Peak	V	100	326	-55.98	-22.89	28.13	40.00	-11.87
142.57	Max Peak	H	300	29	-60.59	-21.56	24.85	43.52	-18.67
191.36	Max Peak	H	100	228	-61.78	-18.32	26.90	43.52	-16.62
266.73	Max Peak	H	100	160	-67.93	-16.36	22.71	46.02	-23.31
601.19	Max Peak	H	100	0	-73.77	-8.69	24.54	46.02	-21.48

Table 7-29. Radiated Spurious Emissions Below 1GHz TxBF Diversity (HDR4, ePA – Ch.38 with AC/DC Adapter)

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 298 of 305

7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-30. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 299 of 305

V 11.0 05/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

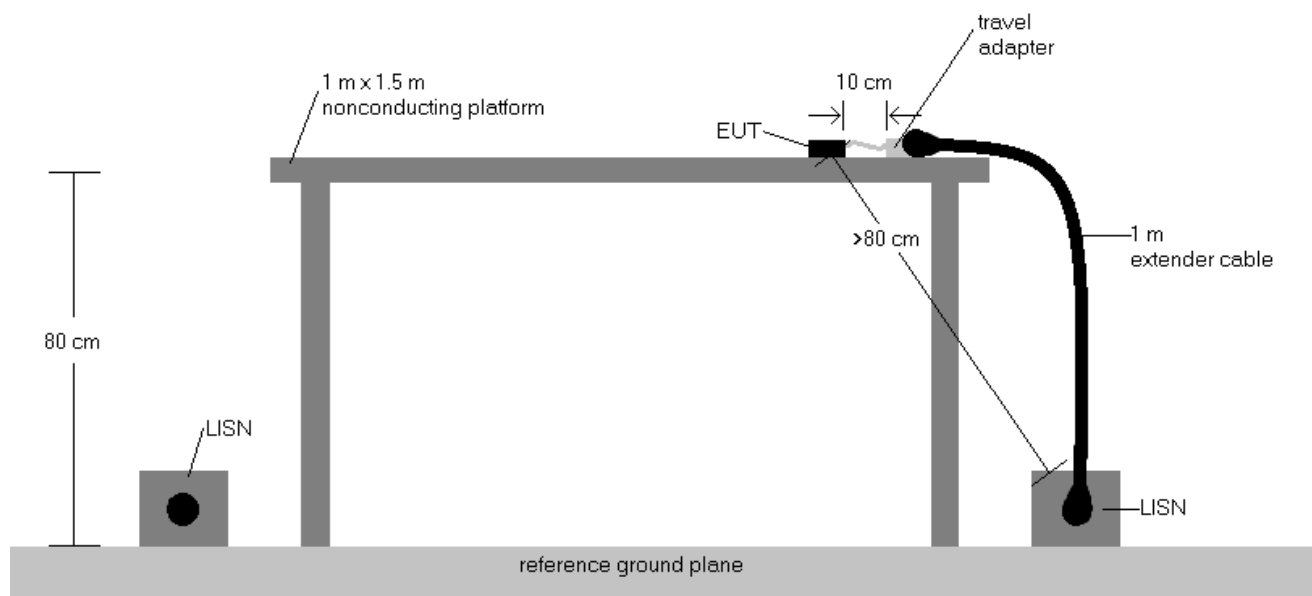


Figure 7-9. Test Instrument & Measurement Setup

Test Notes


1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 300 of 305

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

TxBF Primary

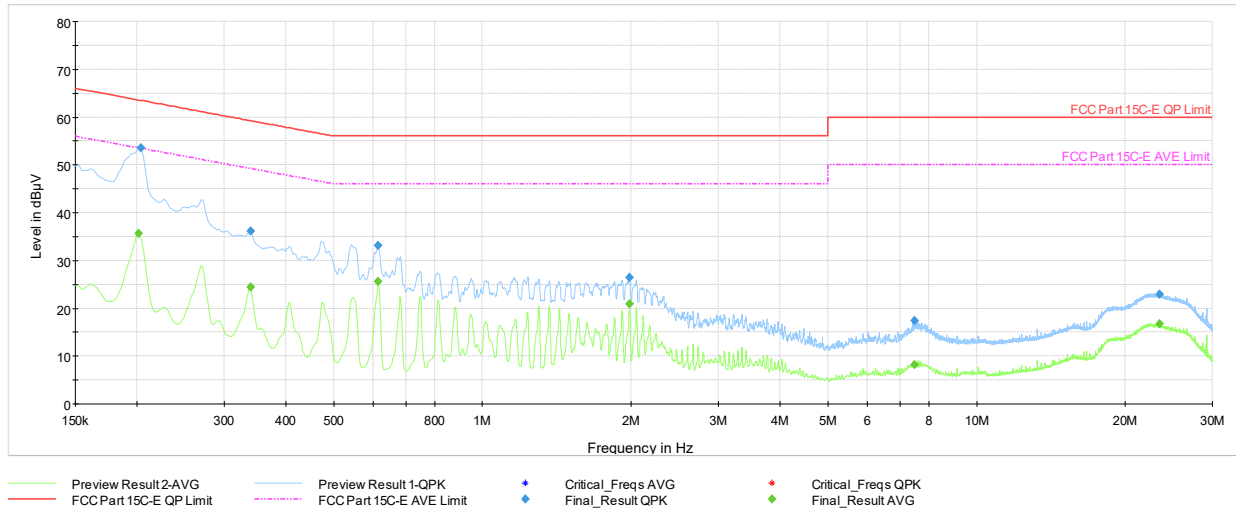

Plot 7-503. AC Line Conducted Plot with Bluetooth HDR Tx BF Primary (L1, HDR4 ePA - Ch.38 with AC/DC Adapter)


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.202	FINAL	---	35.60	53.54	-17.94	L1	GND
0.204	FINAL	53.49	---	63.45	-9.96	L1	GND
0.339	FINAL	---	24.47	49.23	-24.76	L1	GND
0.339	FINAL	36.20	---	59.23	-23.03	L1	GND
0.616	FINAL	---	25.62	46.00	-20.38	L1	GND
0.616	FINAL	33.09	---	56.00	-22.91	L1	GND
1.982	FINAL	26.50	---	56.00	-29.50	L1	GND
1.984	FINAL	---	20.87	46.00	-25.13	L1	GND
7.494	FINAL	---	8.19	50.00	-41.81	L1	GND
7.496	FINAL	17.44	---	60.00	-42.56	L1	GND
23.462	FINAL	22.92	---	60.00	-37.08	L1	GND
23.465	FINAL	---	16.70	50.00	-33.30	L1	GND

Table 7-31. AC Line Conducted Data with Bluetooth HDR Tx BF Primary (L1, HDR4 ePA - Ch.38 with AC/DC Adapter)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 301 of 305

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

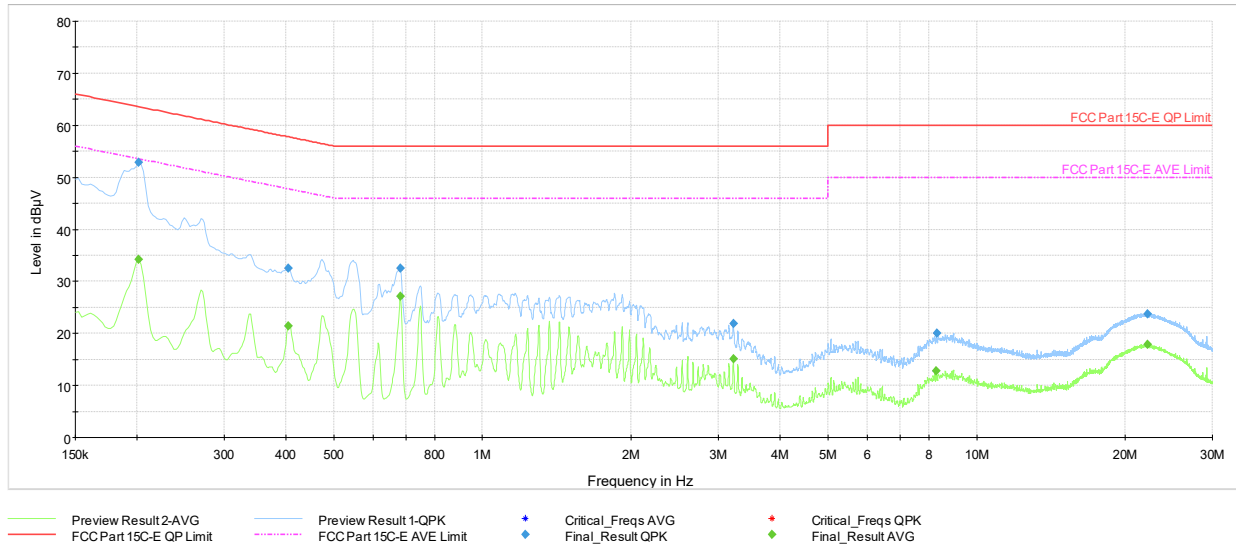


Plot 7-504. AC Line Conducted Plot with Bluetooth HDR TxBF Primary (N, HDR4 ePA - Ch.38 with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.202	FINAL	---	34.21	53.54	-19.33	N	GND
0.202	FINAL	52.84	---	63.54	-10.70	N	GND
0.404	FINAL	---	21.47	47.77	-26.30	N	GND
0.404	FINAL	32.48	---	57.77	-25.29	N	GND
0.683	FINAL	32.55	---	56.00	-23.45	N	GND
0.683	FINAL	---	27.19	46.00	-18.81	N	GND
3.219	FINAL	21.91	---	56.00	-34.09	N	GND
3.219	FINAL	---	15.08	46.00	-30.92	N	GND
8.295	FINAL	---	12.83	50.00	-37.17	N	GND
8.297	FINAL	19.99	---	60.00	-40.01	N	GND
22.151	FINAL	23.80	---	60.00	-36.20	N	GND
22.153	FINAL	---	17.81	50.00	-32.19	N	GND

Table 7-32. AC Line Conducted Data with Bluetooth HDR TxBF Primary (N, HDR4 ePA - Ch.38 with AC/DC Adapter)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 302 of 305

TxBF Diversity

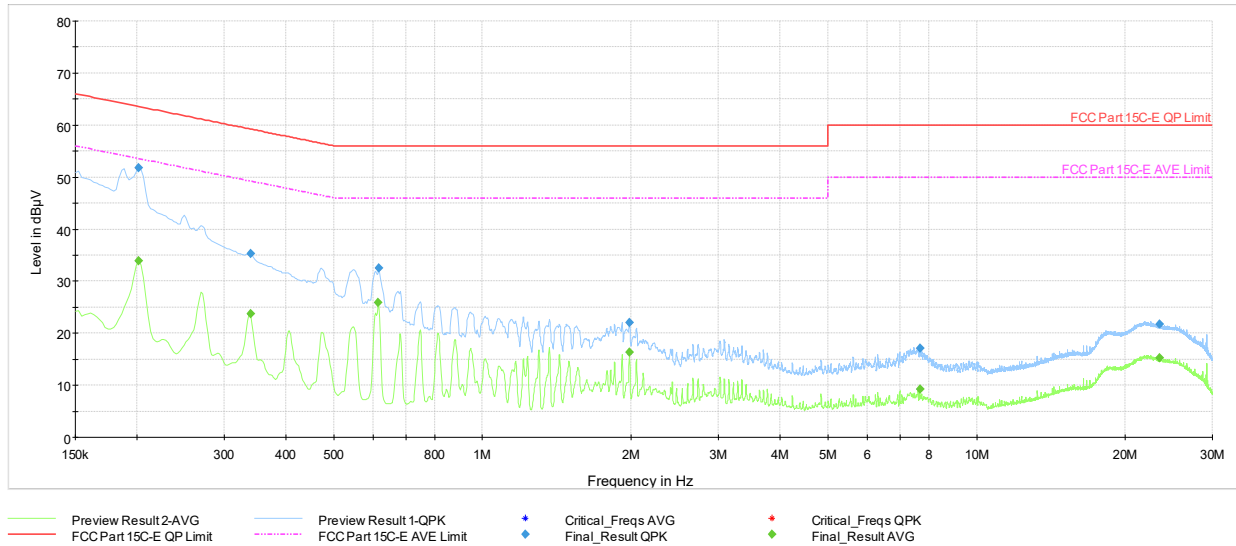

Plot 7-505. AC Line Conducted Plot with Bluetooth HDR TxBF Diversity (L1, HDR4 ePA - Ch.38 with AC/DC Adapter)


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.202	FINAL	---	33.90	53.54	-19.64	L1	GND
0.202	FINAL	51.83	---	63.54	-11.71	L1	GND
0.339	FINAL	---	23.71	49.23	-25.52	L1	GND
0.339	FINAL	35.29	---	59.23	-23.94	L1	GND
0.616	FINAL	---	25.89	46.00	-20.11	L1	GND
0.618	FINAL	32.57	---	56.00	-23.43	L1	GND
1.984	FINAL	22.08	---	56.00	-33.92	L1	GND
1.984	FINAL	---	16.29	46.00	-29.71	L1	GND
7.674	FINAL	17.04	---	60.00	-42.96	L1	GND
7.676	FINAL	---	9.20	50.00	-40.80	L1	GND
23.469	FINAL	---	15.26	50.00	-34.74	L1	GND
23.471	FINAL	21.74	---	60.00	-38.26	L1	GND

Table 7-33. AC Line Conducted Data with Bluetooth HDR TxBF Diversity (L1, HDR4 ePA - Ch.38 with AC/DC Adapter)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 303 of 305

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

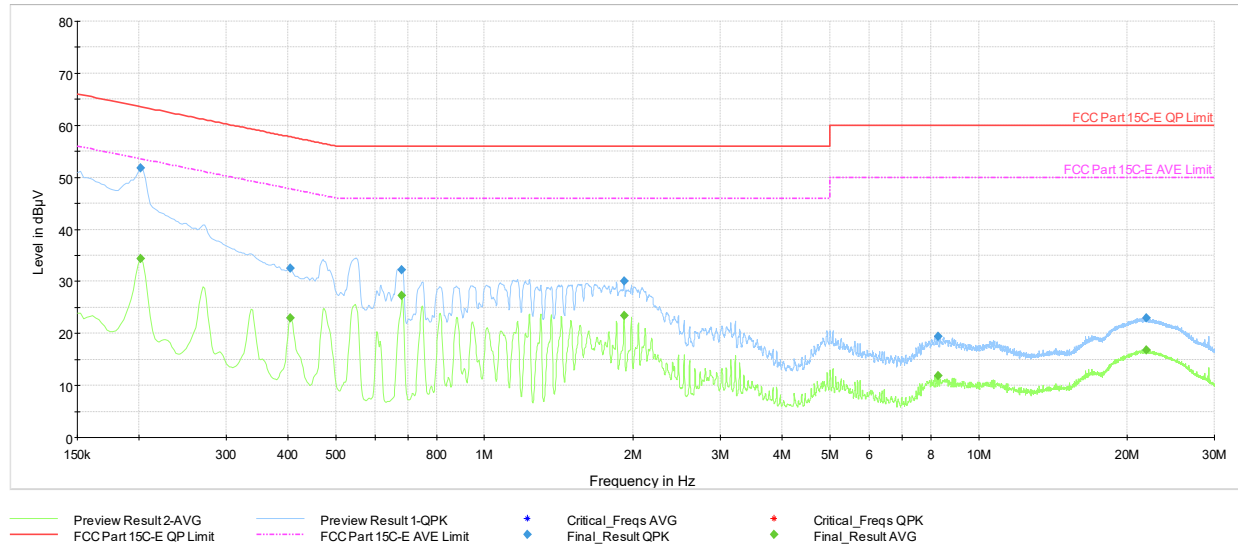

Plot 7-506. AC Line Conducted Plot with Bluetooth HDR Tx BF Diversity (N, HDR4 ePA - Ch.38 with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.202	FINAL	---	34.34	53.54	-19.20	N	GND
0.202	FINAL	51.74	---	63.54	-11.80	N	GND
0.404	FINAL	---	22.98	47.77	-24.79	N	GND
0.404	FINAL	32.52	---	57.77	-25.25	N	GND
0.679	FINAL	32.20	---	56.00	-23.80	N	GND
0.681	FINAL	---	27.31	46.00	-18.69	N	GND
1.919	FINAL	30.01	---	56.00	-25.99	N	GND
1.919	FINAL	---	23.42	46.00	-22.58	N	GND
8.291	FINAL	19.37	---	60.00	-40.63	N	GND
8.291	FINAL	---	11.88	50.00	-38.12	N	GND
21.811	FINAL	22.91	---	60.00	-37.09	N	GND
21.813	FINAL	---	16.82	50.00	-33.18	N	GND

Table 7-34. AC Line Conducted Data with Bluetooth HDR Tx BF Diversity (N, HDR4 ePA - Ch.38 with AC/DC Adapter)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 304 of 305

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3357 and IC: 579C-A3357** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-07-R2.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 305 of 305

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.