



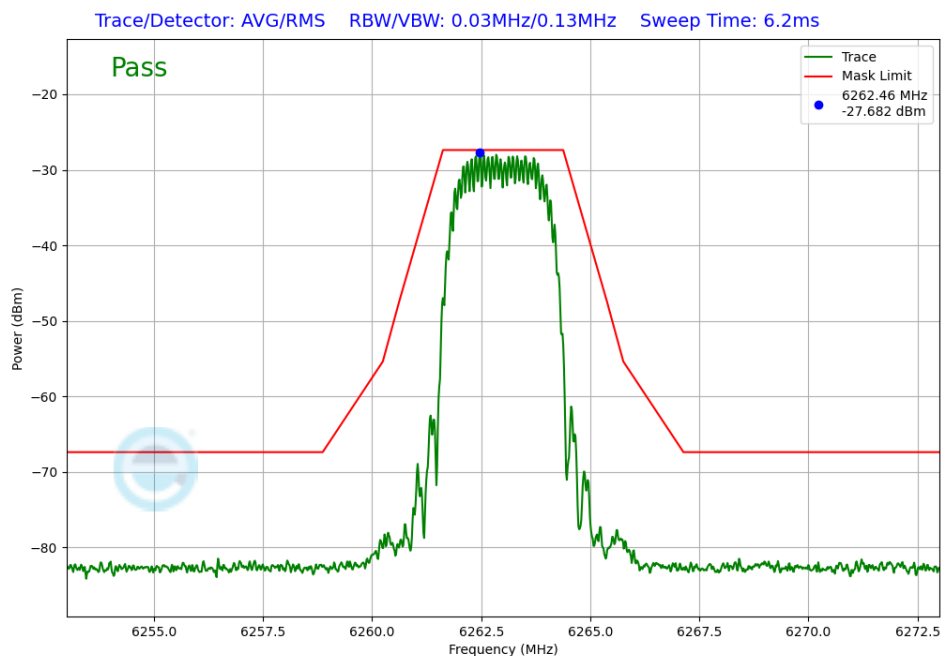

Plot 7-394. In-Band Emission TxBF Diversity Antenna WF8 (NB UNII HDT2, iPA – 6263MHz)

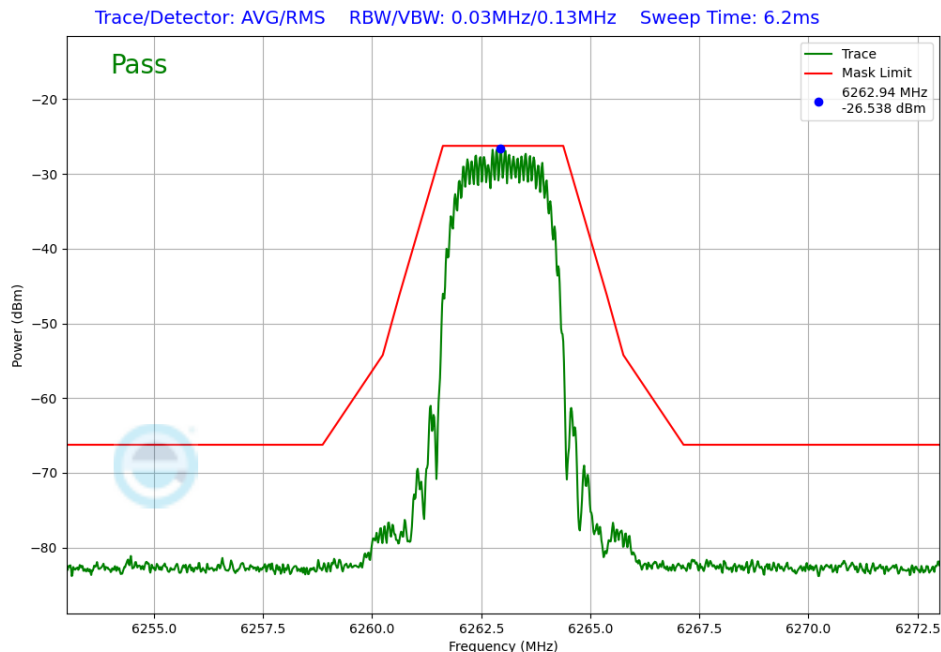


Plot 7-395. In-Band Emission TxBF Diversity Antenna WF7 (NB UNII HDT2, iPA – 6263MHz)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 241 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

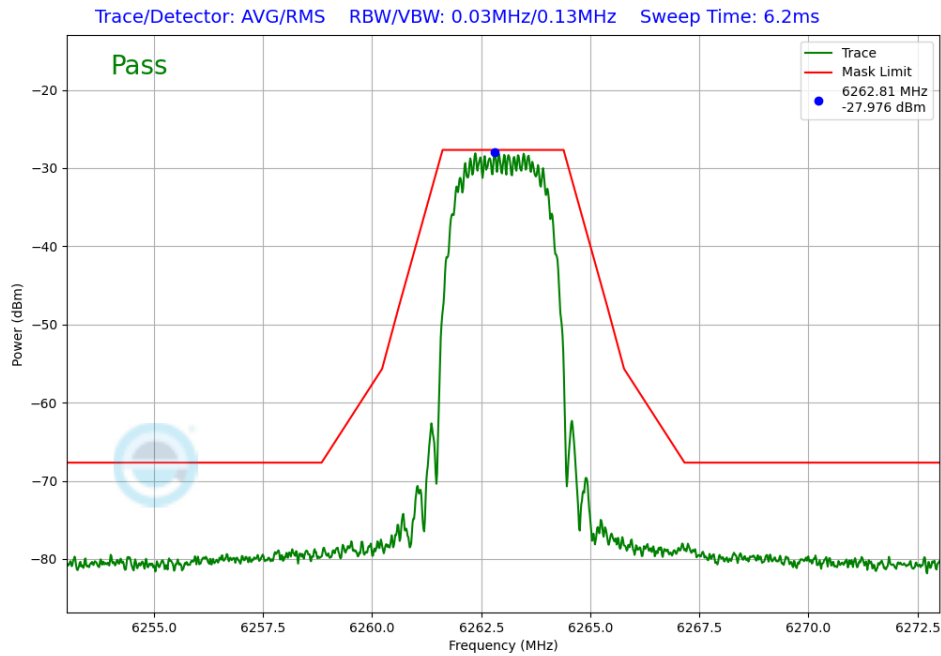

Plot 7-396. In-Band Emission TxBF Diversity Antenna WF8 (NB UNII HDT4, ePA – 6263MHz)

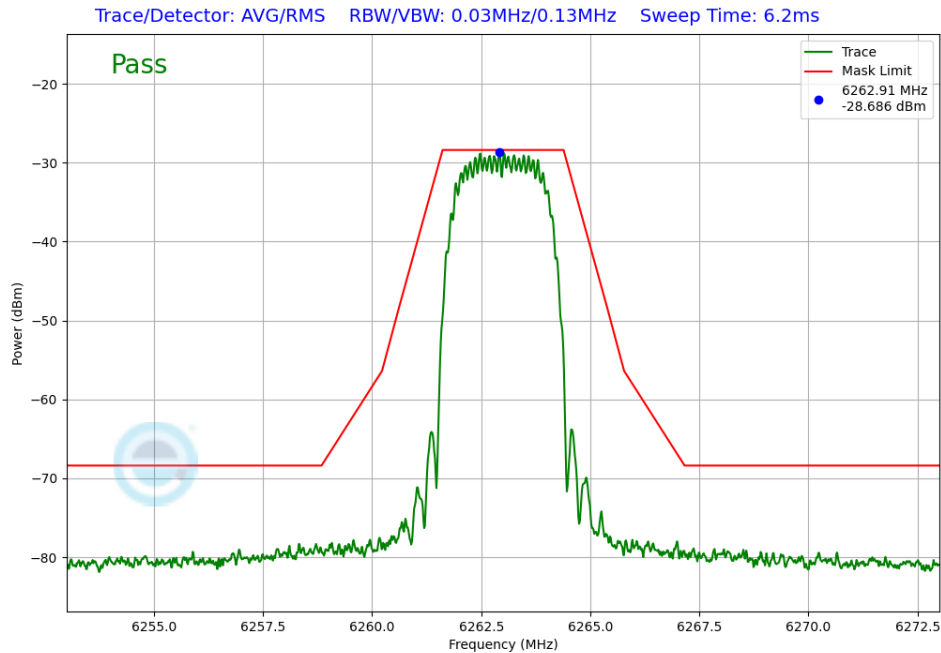


Plot 7-397. In-Band Emission TxBF Diversity Antenna WF7 (NB UNII HDT4, ePA – 6263MHz)


FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 242 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

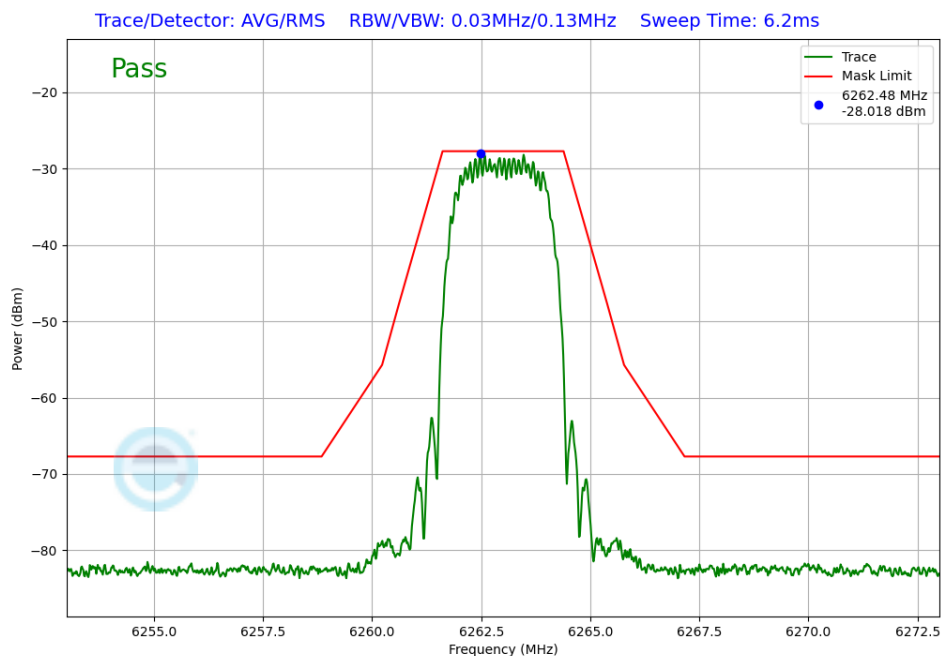

Plot 7-398. In-Band Emission TxBF Diversity Antenna WF8 (NB UNII HDT4, iPA – 6263MHz)

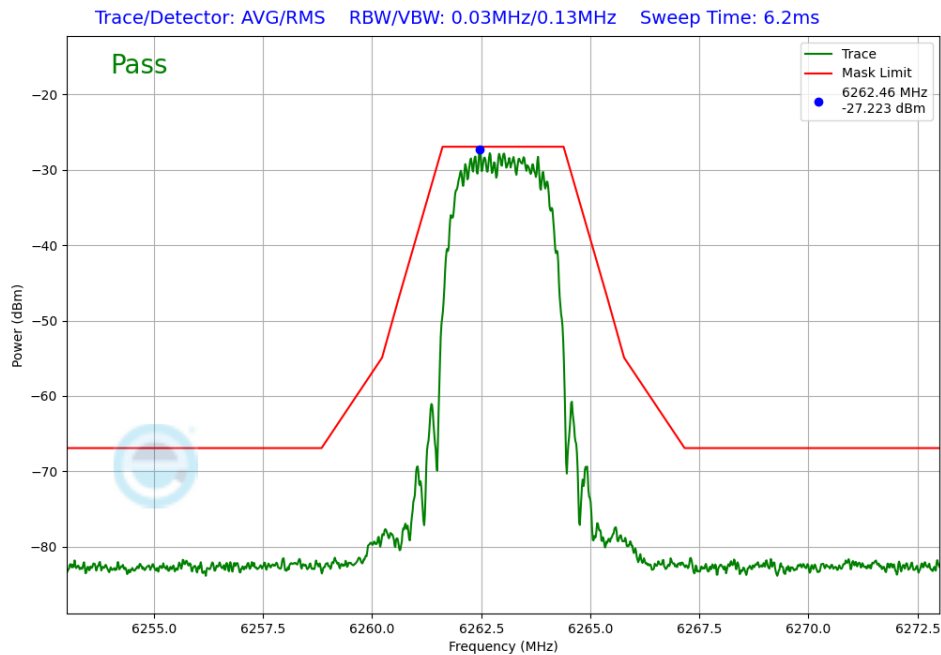


Plot 7-399. In-Band Emission TxBF Diversity Antenna WF7 (NB UNII HDT4, iPA – 6263MHz)


FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 243 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

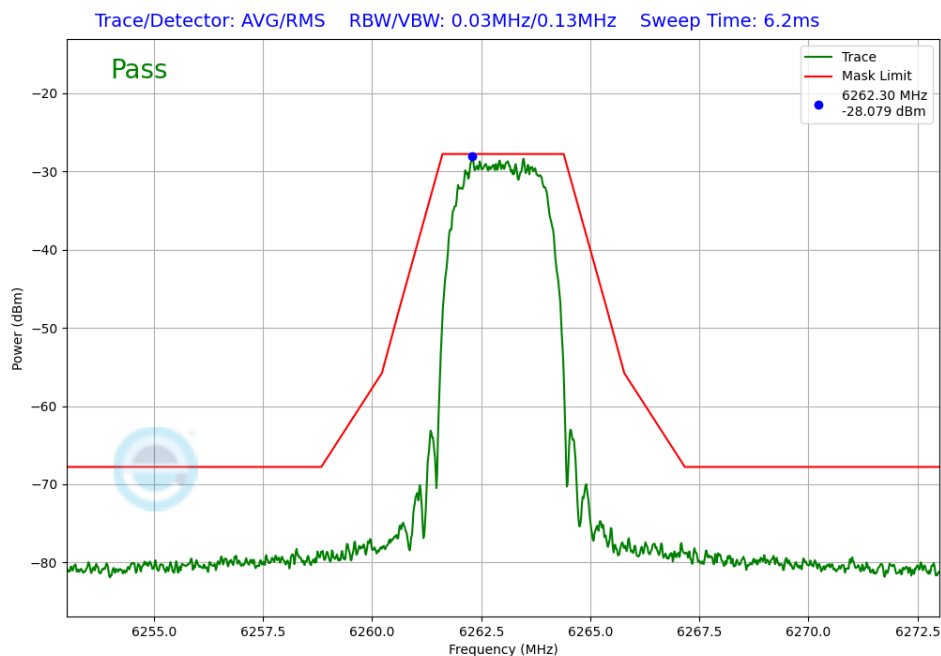

Plot 7-400. In-Band Emission TxBF Diversity Antenna WF8 (NB UNII HDT6, ePA – 6263MHz)

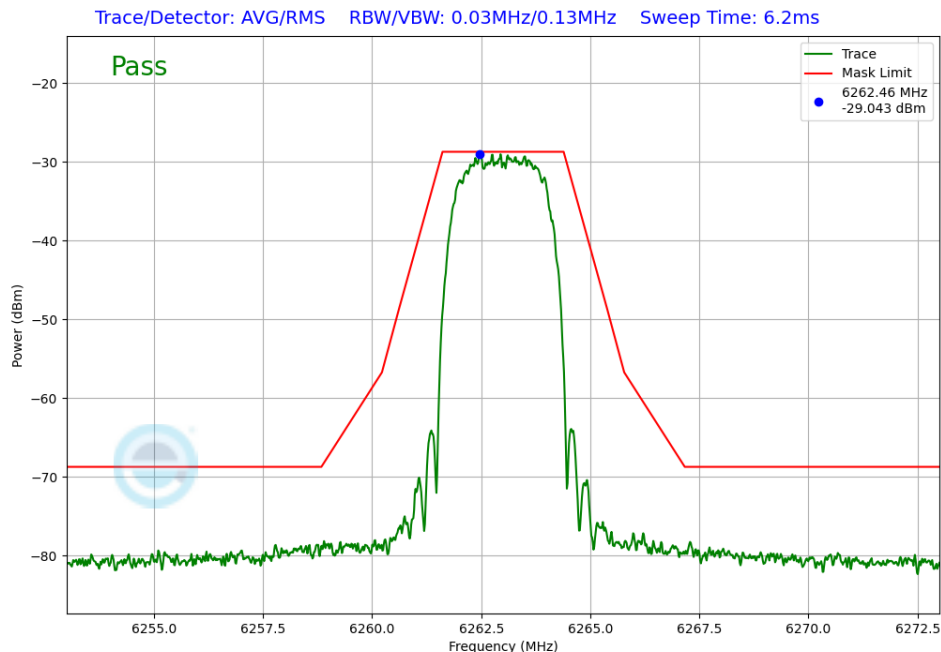


Plot 7-401. In-Band Emission TxBF Diversity Antenna WF7 (NB UNII HDT6, ePA – 6263MHz)


FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 244 of 330	

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

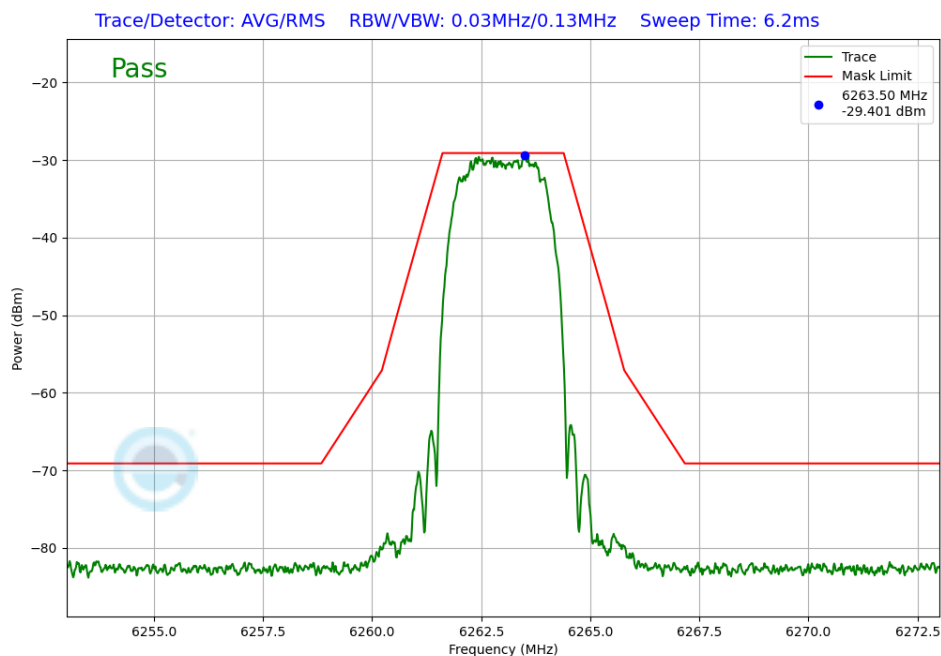

Plot 7-402. In-Band Emission TxBF Diversity Antenna WF8 (NB UNII HDT6, iPA – 6263MHz)

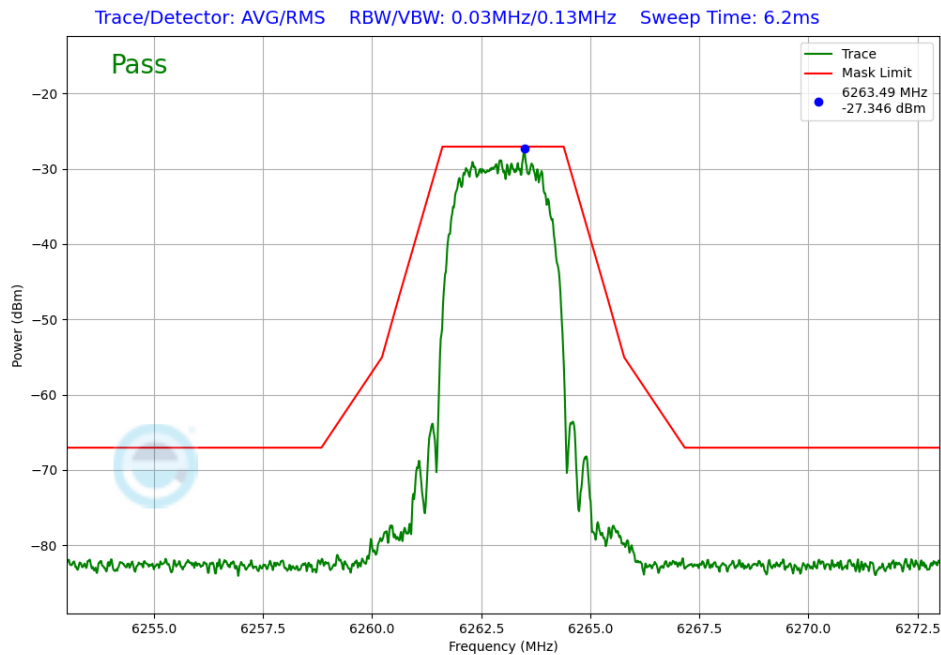

Plot 7-403. In-Band Emission TxBF Diversity Antenna WF7 (NB UNII HDT6, iPA – 6263MHz)

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 245 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6 Contention Based Protocol

§15.407(d)(6); RSS-248[4.7]

Test Overview and Limit

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices), while very low power devices operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power and very low power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor and very low power devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel.

Test Procedure Used

KDB 987594 D02 v03 – Section I

Test Settings

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
4. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
5. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
6. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
7. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
8. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
9. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
10. Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
11. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 246 of 330

V 11.0 06/2025

Test Setup

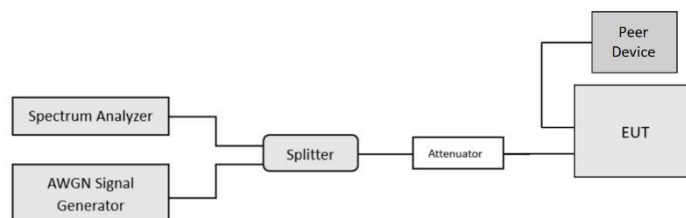


Figure 7-5. Contention-based protocol test setup, conducted method

Test Notes

1. Peer device used was the tablet device. (refer to Table 2-6).
2. Per guidance from KDB 987594 D02 v03, contention-based protocol was tested using an AWGN signal with a bandwidth of 10MHz. The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission, marker indicates the point at which the AWGN signal is introduced.
3. Per KDB 987594 D04 v03, contention-based protocol was tested with receiver with the lowest antenna gain.
4. 15 trials were ran in order to assure that at least 90% of certainty was met.

$$\text{Detection Level} = \text{Injected AWGN Power (dBm)} - \text{Antenna Gain (dBi)} + \text{Path Loss (dB)}$$

Equation 7-1. Incumbent Detection Level Calculation

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 247 of 330

V 11.0 06/2025

Band	Incumbent Frequency [MHz]	Injected (AWGN) [dBm]	Antenna Gain [dBi]	Adjusted Power Level [dBm]	Detection Limit [dBm]	Margin [dB]
UNII Band 5	6350	-69.50	-0.70	-68.80	-62.0	-6.80

Table 7-20. Contention Based Protocol – Incumbent Detection Results

Band	EUT Transmission Status		
	Adjusted AWGN Power (dBm)		
	Normal	Minimal	Ceased
UNII Band 5	-75.80	-70.80	-68.80

Table 7-21. Contention Based Protocol – Detection Results – All Tx Cases


CBP Detection (1 = Detection, Blank = No detection)																		
Band	Trials															Detection Rate [%]	Limit %	Pass / Fail
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15			
UNII Band 5	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100	90	Pass

Table 7-22. Contention Based Protocol – Incumbent Detection Trial Results

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 248 of 330

V 11.0 06/2025

AWGN Plots

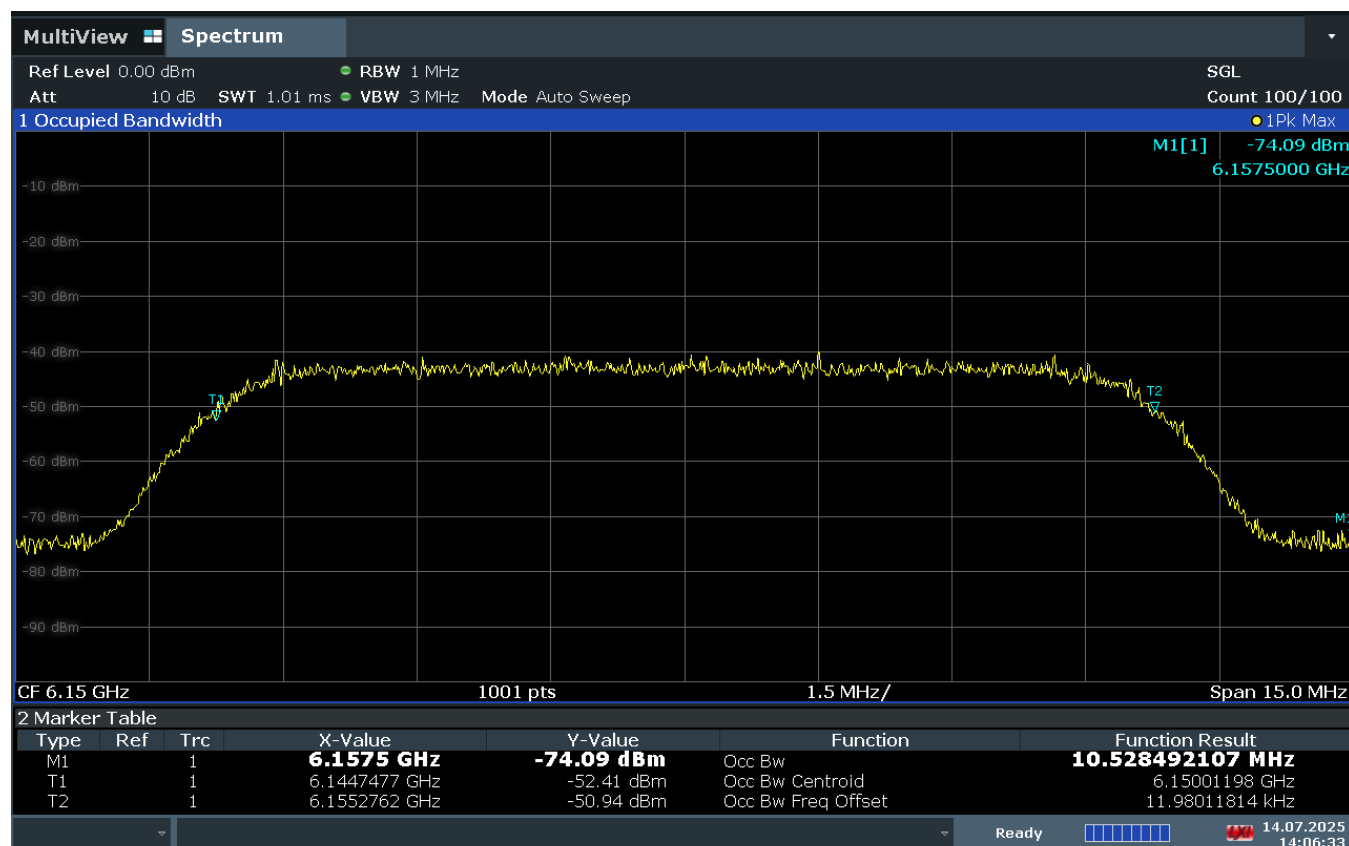

14:06:34 14.07.2025


Plot 7-404. AWGN Signal

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 249 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Contention-Based Protocol Timing Plots

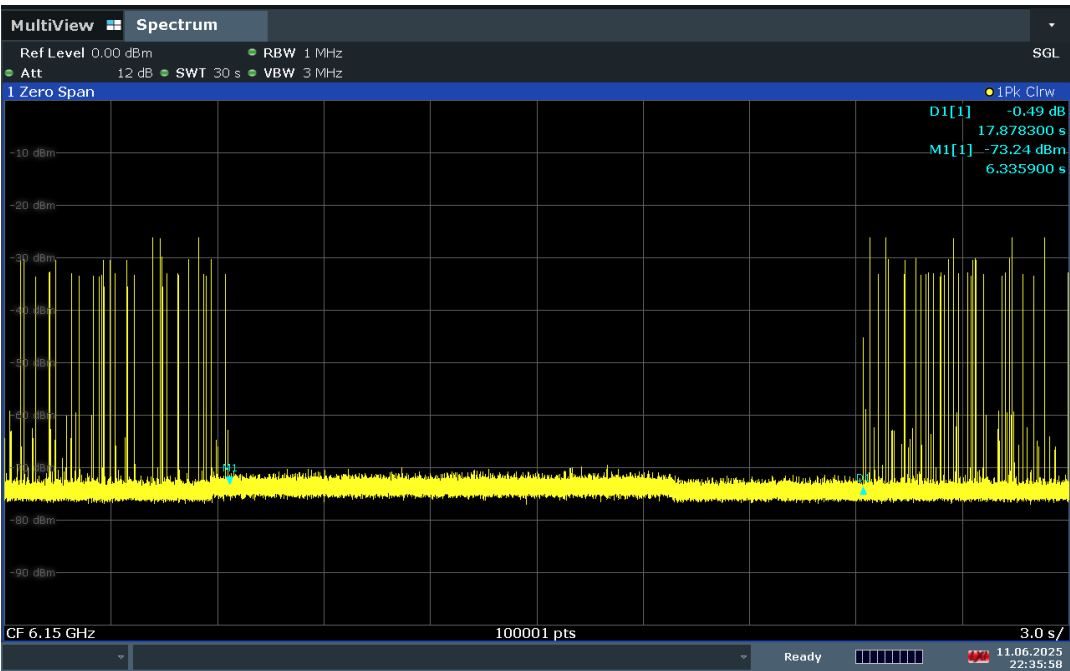

22:35:58 11.06.2025


Plot 7-405. Contention Based Protocol Timing Plot

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 250 of 330

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bandwidth Reduction Plots

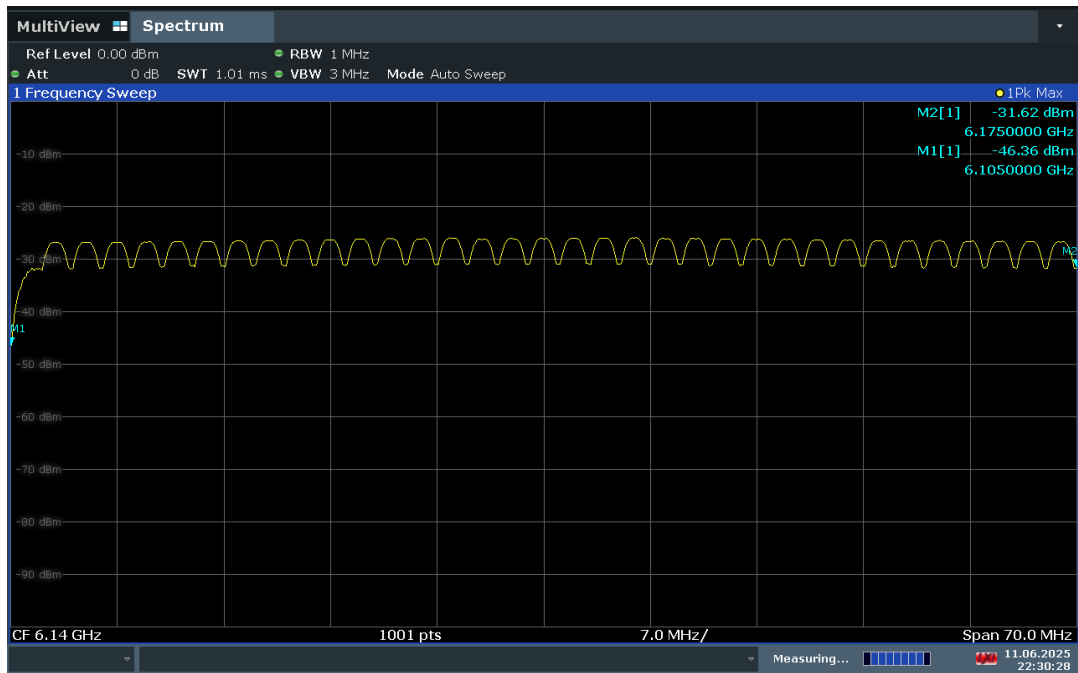

22:30:28 11.06.2025

Plot 7-406. Before AWGN Signal Injected

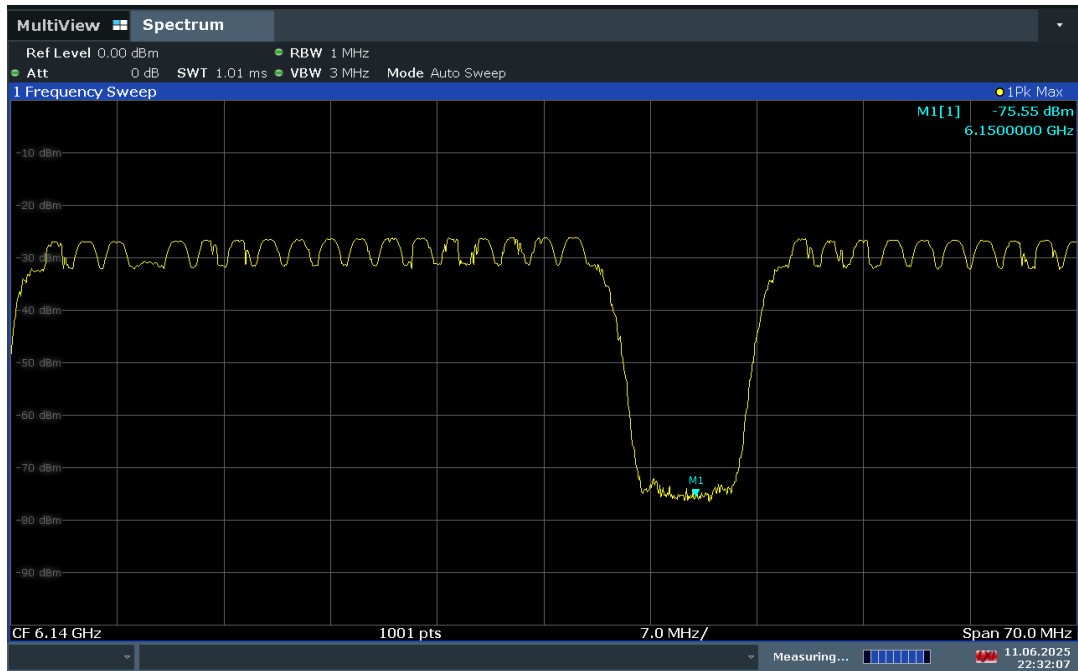

22:32:08 11.06.2025

Plot 7-407. After AWGN Signal Injected

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 251 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7 Transmit Power Control (TPC)

§15.407(d)(10); RSS-248[4.6]

Test Overview and Limit

Very low power devices operating in the 5.925-6.425 and 6.525-6.875 GHz bands shall employ a transmit power control (TPC) mechanism. A very low power device is required to have the capability to operate at least 6 dB below the maximum EIRP power spectral density (PSD) value of -5 dBm/MHz.

Test Procedure Used

ANSI C63.10-2020 – Section 12.4.2.6

KDB 789033 D02 v02r01 – Section F

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Set span to encompass the entire 99% OBW of the signal.
3. Set sweep trigger to “free run.”
4. Set RBW = 1 MHz
5. Set VBW $\geq$ 3 MHz
6. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
7. Sweep time $\leq (\text{number of points in sweep}) \times T$, where T is defined
8. Detector = power averaging (rms).
9. Trace mode = max hold.
10. Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

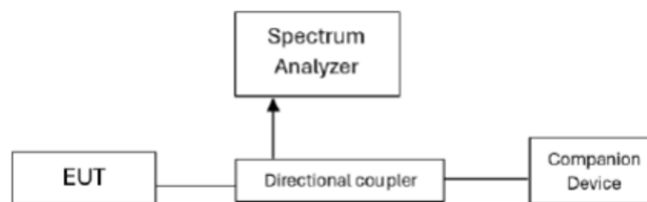


Figure 7-6. Test Instrument & Measurement Setup (No Attenuation)

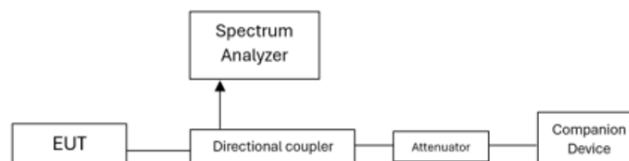


Figure 7-7. Test Instrument & Measurement Setup (With Attenuation)

FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		

V 11.0 06/2025

This test demonstrates the ability of the device to increase and decrease power by the required 6dB as the RSSI is decreased and increased.

1. Configure EUT and companion device for peer-to-peer communication as shown in Figure 7-6.
2. Set variable attenuator to 0dB (noise free spectral environment, high RSSI simulation)
3. Establish a link and start communication between EUT and companion device
4. Capture PSD on spectrum analyzer
5. Set attenuator to 20dB (noisy spectral environment, low RSSI simulation) as shown in Figure 7-7.
6. Capture PSD on spectrum analyzer
7. Compare the highest PSD captured in step 4 to the highest PSD on step 6 and determine the delta.

Test Notes

1. The companion device used was the developmentary board (refer to **Table 2-6**)
2. Per manufacturer's declaration, after establishing communication between the EUT and the companion device, 6GHz UNII signal was used to maintain communication and traffic.
3. TPC is triggered when a high RSSI is detected. As RSSI detected signal decreases, the transmitters output power will increase back to maximum allowed power.
4. TxBF is engaged only under low RSSI conditions to restore the signal-to-noise ratio through array gain. In this case, TxBF was not enabled as the RSSI was not sufficiently low.

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 253 of 330


V 11.0 06/2025

Frequency [MHz]	TxBF	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	e.i.r.p. Power Density Limit [dBm/MHz]
	Measured Power Density [dBm/MHz]			
	Antenna WF5B			
6115	-7.64	0.50	-7.14	-5.00
6252	-7.84	0.10	-7.74	-5.00
6377	-8.09	1.30	-6.79	-5.00

Table 7-23. PSD Measurements (No TPC)

Frequency [MHz]	TxBF	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	e.i.r.p. Power Density Limit [dBm/MHz]
	Measured Power Density [dBm/MHz]			
	Antenna WF5B			
6115	-15.95	0.50	-15.45	-11.00
6252	-15.86	0.10	-15.76	-11.00
6377	-19.13	1.30	-17.83	-11.00

Table 7-24. PSD Measurements (with TPC)

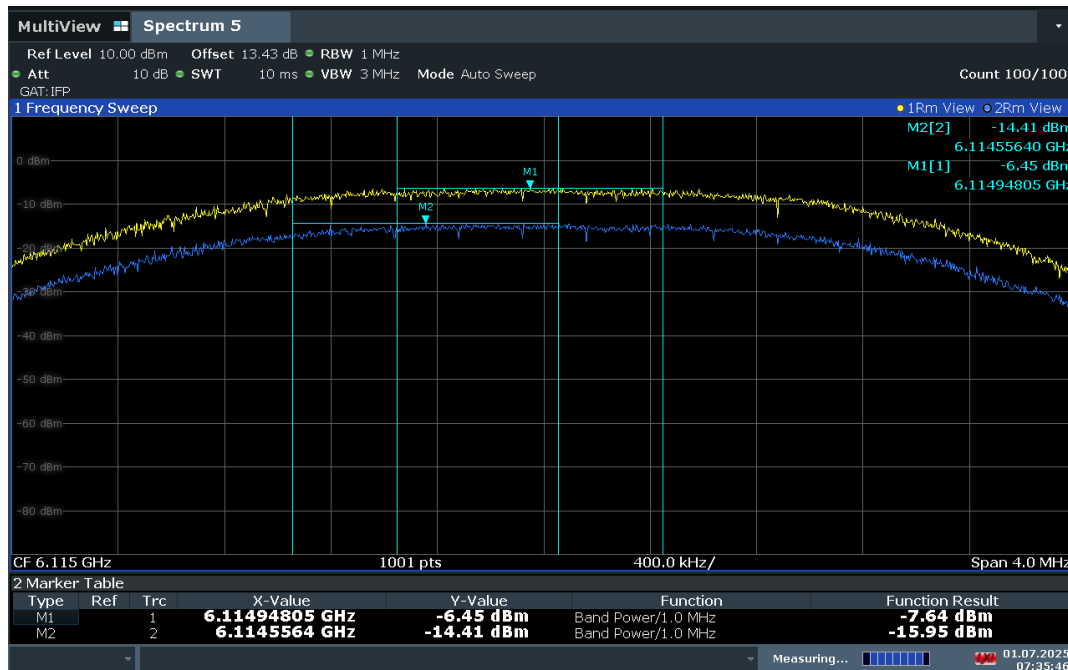


07:35:46 01.07.2025

Plot 7-408. Power Density Plot 6115MHz Antenna WF5B

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 254 of 330


V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

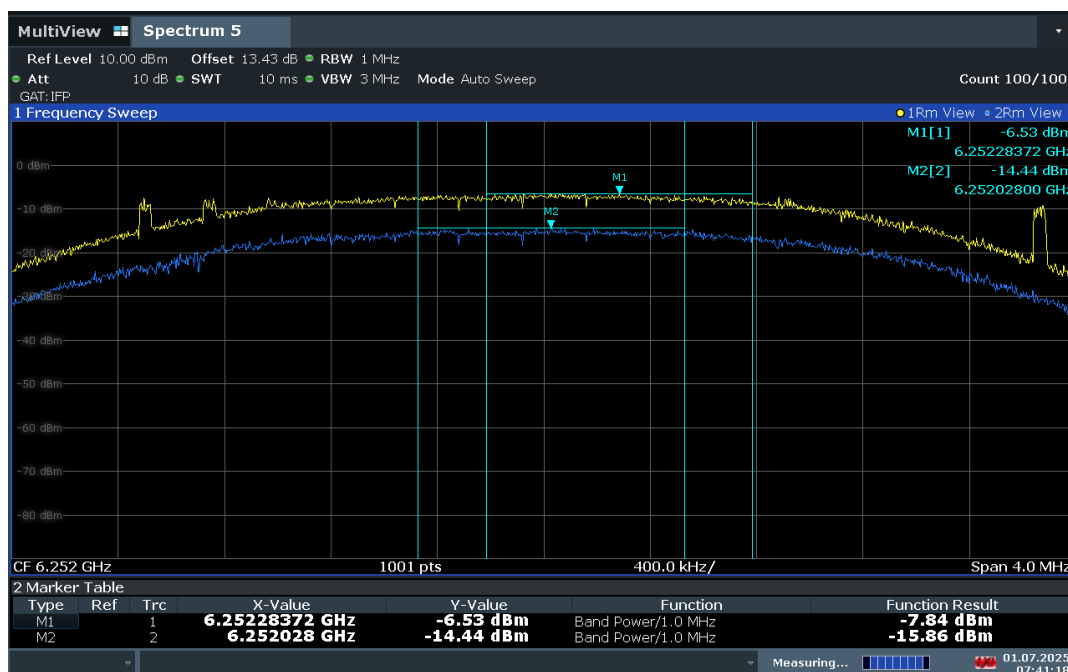

07:41:19 01.07.2025

Plot 7-409. Power Density Plot – 6252MHz Antenna WF5B

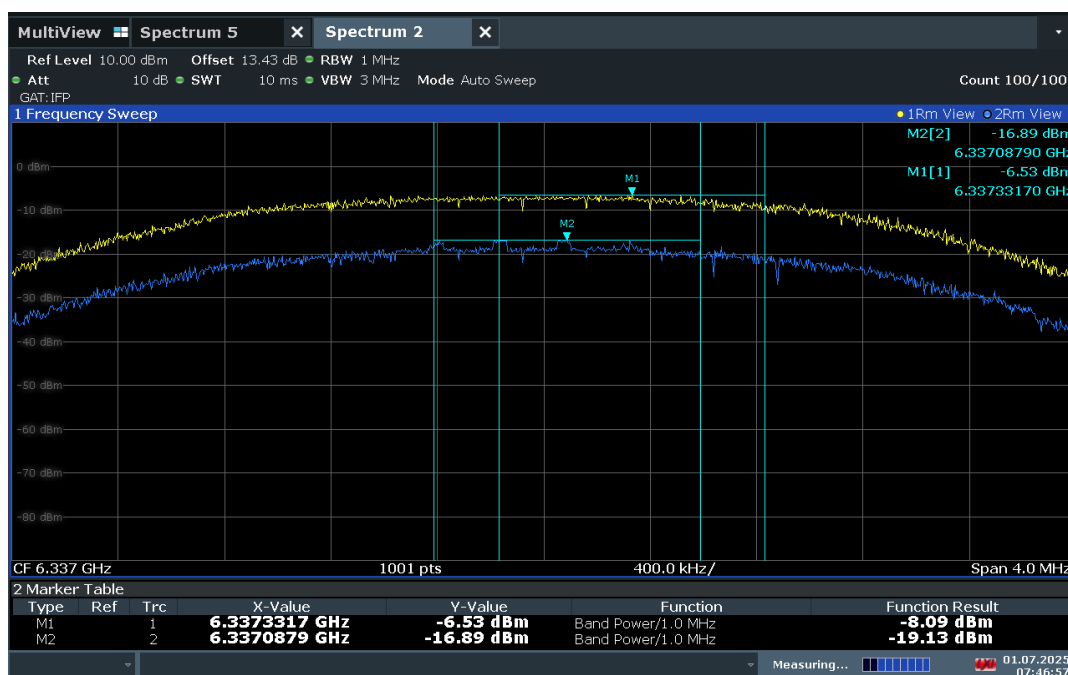

07:46:58 01.07.2025

Plot 7-410. Power Density Plot – 6377MHz Antenna WF5B

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 255 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.8 Radiated Spurious Emission – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.925-7.125 GHz band: All emissions outside of the 5.925-7.125 GHz band shall not exceed an EIRP of -27 dBm/MHz. Emissions found in a restricted band are subject to the limits of 15.209 and RSS-Gen (8.9) as shown in the table below.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-25. Radiated Limits

Test Procedures Used

ANSI C63.10-2020 – Subclauses 12.7.7, 12.7.6
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 256 of 330

V 11.0 06/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

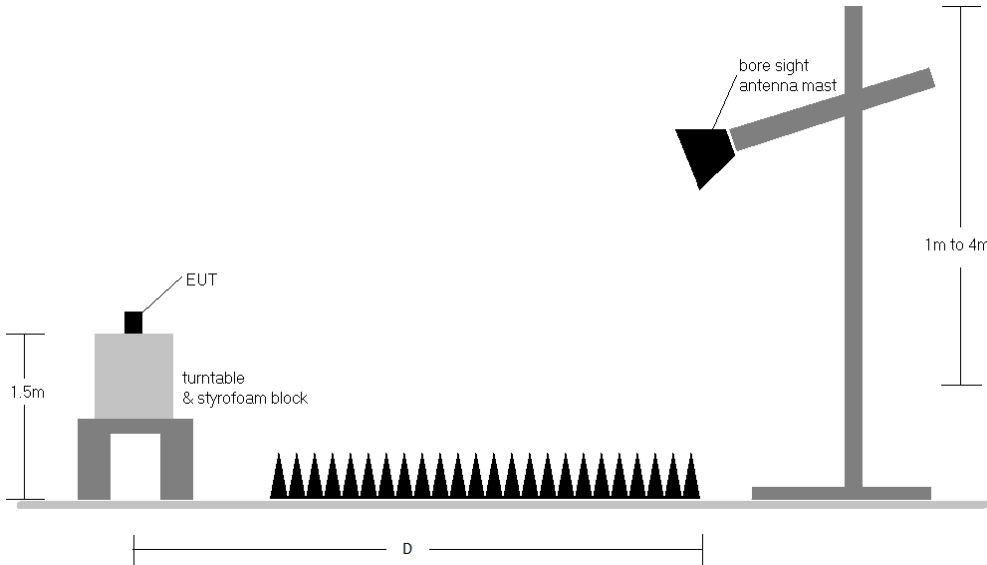


Figure 7-8. Test Instrument & Measurement Setup

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 257 of 330

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and section 8.10 of RSS-Gen are below the limit shown in Table 7-25.
2. All spurious emissions lying in restricted bands specified in §15.205 and section 8.10 of RSS-Gen are below the limit shown in Table 7-25. All spurious emissions that do not lie in a restricted band are subject to a limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. All data rates were investigated and only the worse case were reported
9. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
10. All supported modulation and power schemes have been tested on the unit and only worst case configuration is reported.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.8.2 to 7.8.7 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 258 of 330

V 11.0 06/2025

7.8.1 TxBF Primary Radiated Spurious Emission (Above 1GHz)

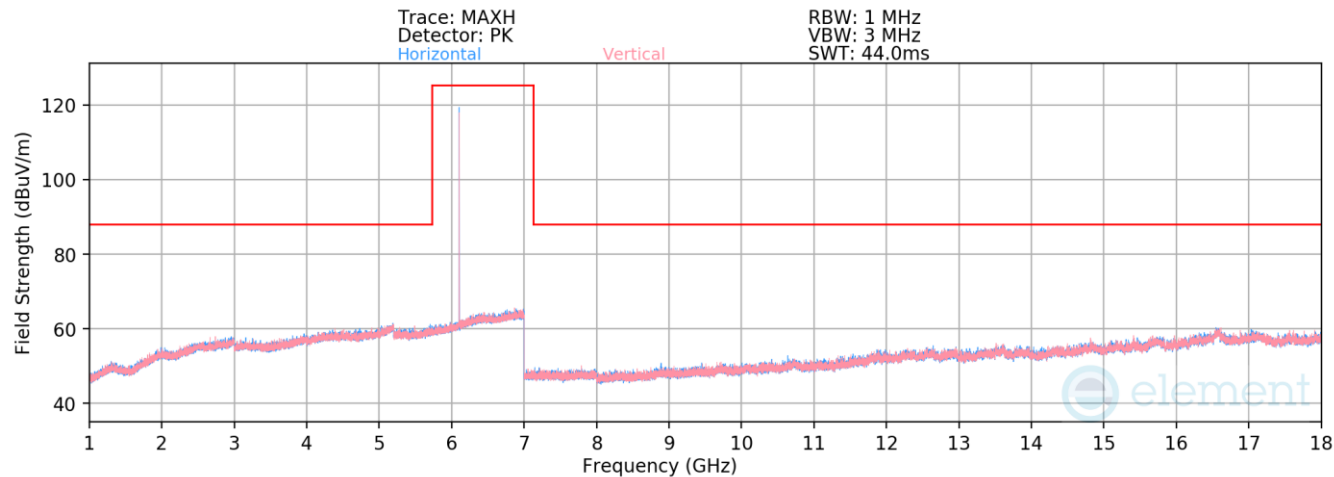

Plot 7-411. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 6106MHz)


Mode:	BDR
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	6106MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12212.00	Average	V	-	-	-82.73	19.00	43.27	53.98	-10.71
*	12212.00	Peak	V	-	-	-71.66	19.00	54.33	73.98	-19.65


Table 7-26. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 259 of 330

V 11.0 06/2025

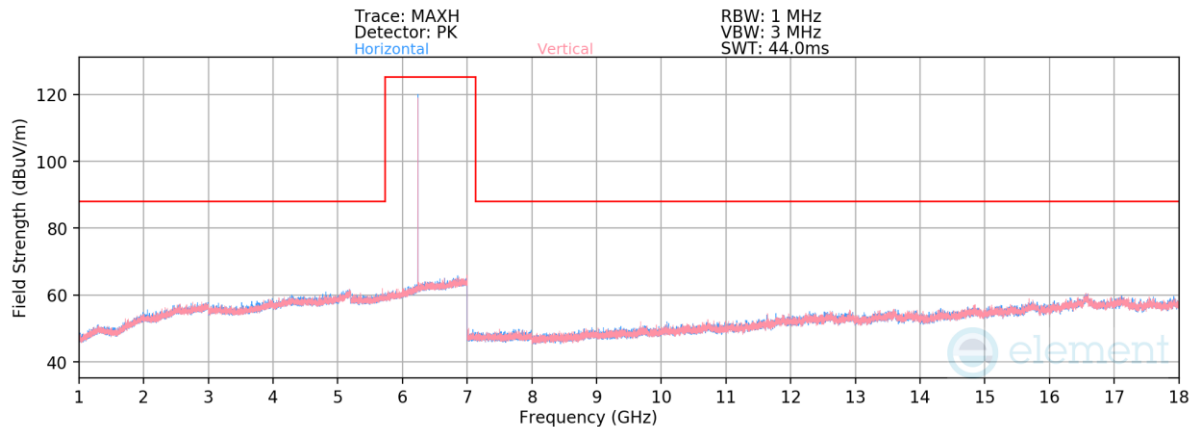

Plot 7-412. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 6263MHz)

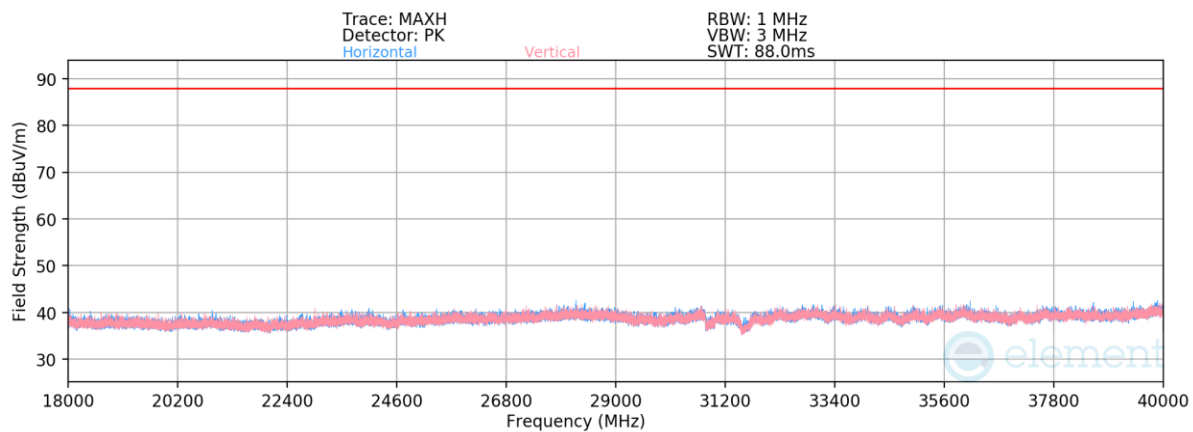

Plot 7-413. Radiated Spurious Emissions Above 18GHz TxBF Primary (BDR GFSK ePA – 6263MHz)

Mode:	BDR
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	6263MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12526.00	Average	V	-	-	-82.82	18.85	43.03	53.98	-10.95
*	12526.00	Peak	V	-	-	-71.67	18.85	54.18	73.98	-19.80
*	18789.00	Average	V	-	-	-72.00	-5.81	29.19	53.98	-24.79
*	18789.00	Peak	V	-	-	-60.46	-5.81	40.73	73.98	-33.25
	25052.00	Average	V	-	-	-70.92	-6.67	29.41	68.23	-38.82
	25052.00	Peak	V	-	-	-59.49	-6.67	40.84	88.23	-47.39

Table 7-27. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 260 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

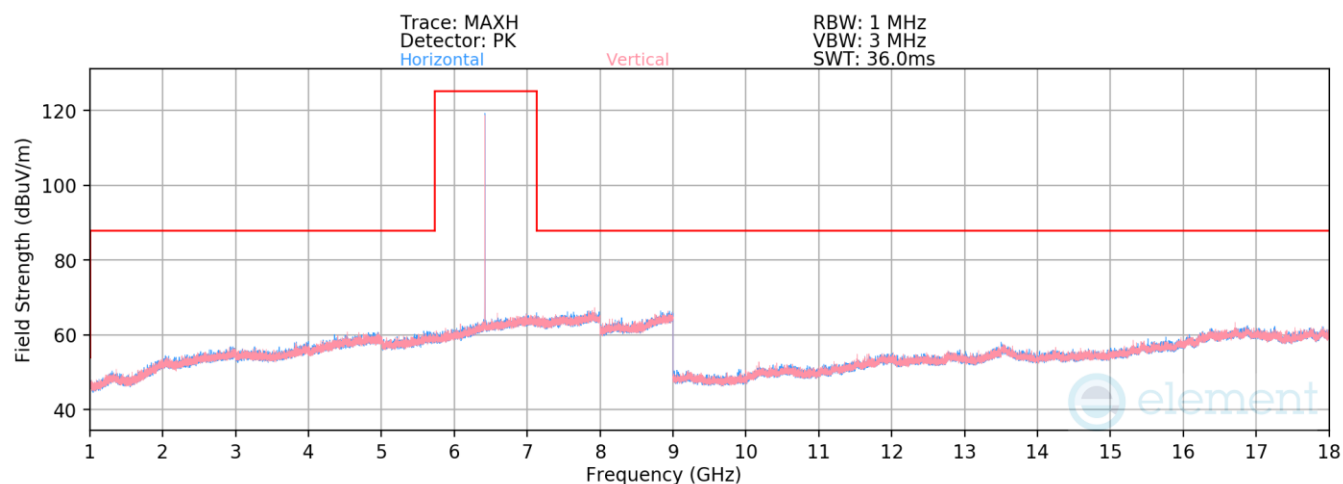

Plot 7-414. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 6420MHz)


Mode:	BDR
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	6420MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12840.00	Average	V	-	-	-84.99	21.67	43.68	68.23	-24.55
12840.00	Peak	V	-	-	-73.12	21.67	55.55	88.23	-32.68

Table 7-28. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 261 of 330

V 11.0 06/2025

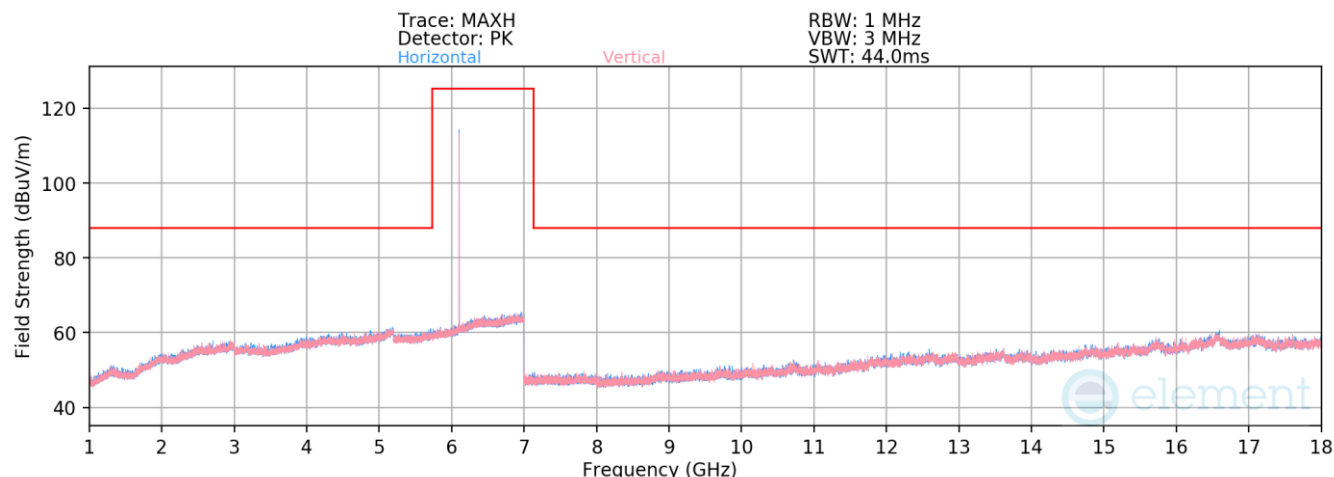

Plot 7-415. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR4 ePA – 6106MHz)


Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	6106MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12212.00	Average	H	-	-	-82.70	19.00	43.30	53.98	-10.68
*	12212.00	Peak	H	-	-	-70.36	19.00	55.64	73.98	-18.34


Table 7-29. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 262 of 330

V 11.0 06/2025

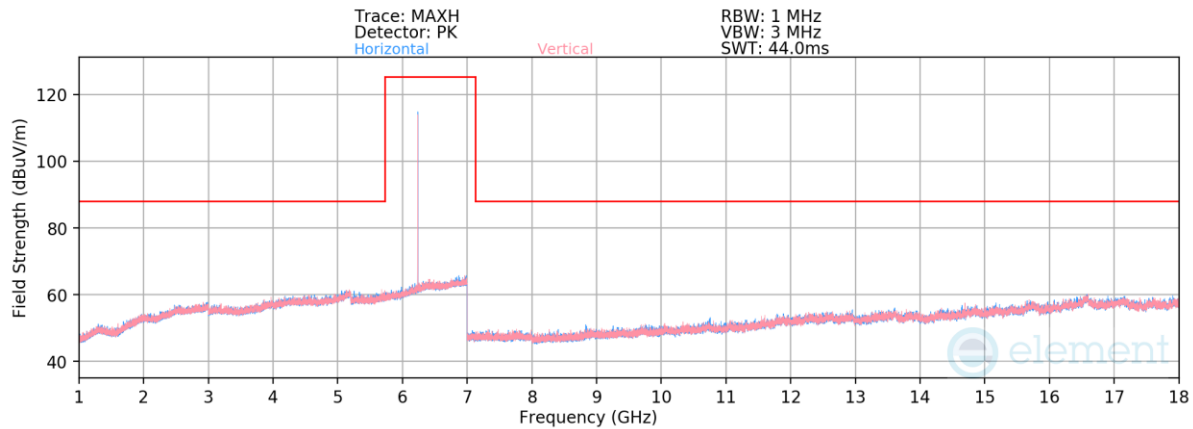

Plot 7-416. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR4 GFSK ePA – 6263MHz)

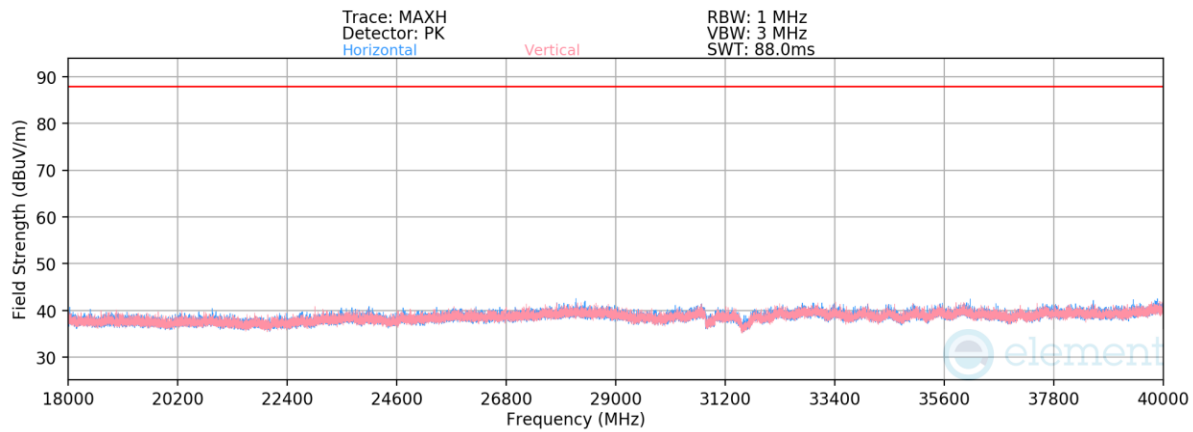

Plot 7-417. Radiated Spurious Emissions Above 18GHz TxBF Primary (HDR4 ePA – 6263MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 6263MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12526.00	Average	H	-	-	-82.92	18.85	42.93	53.98	-11.05
*	12526.00	Peak	H	-	-	-70.98	18.85	54.87	73.98	-19.11
*	18789.00	Average	V	-	-	-72.02	-5.81	29.17	53.98	-24.81
*	18789.00	Peak	V	-	-	-61.02	-5.81	40.17	73.98	-33.81
	25052.00	Average	H	-	-	-70.75	-6.64	29.61	68.23	-38.62
	25052.00	Peak	H	-	-	-59.51	-6.64	40.85	88.23	-47.38

Table 7-30. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 263 of 330

V 11.0 06/2025

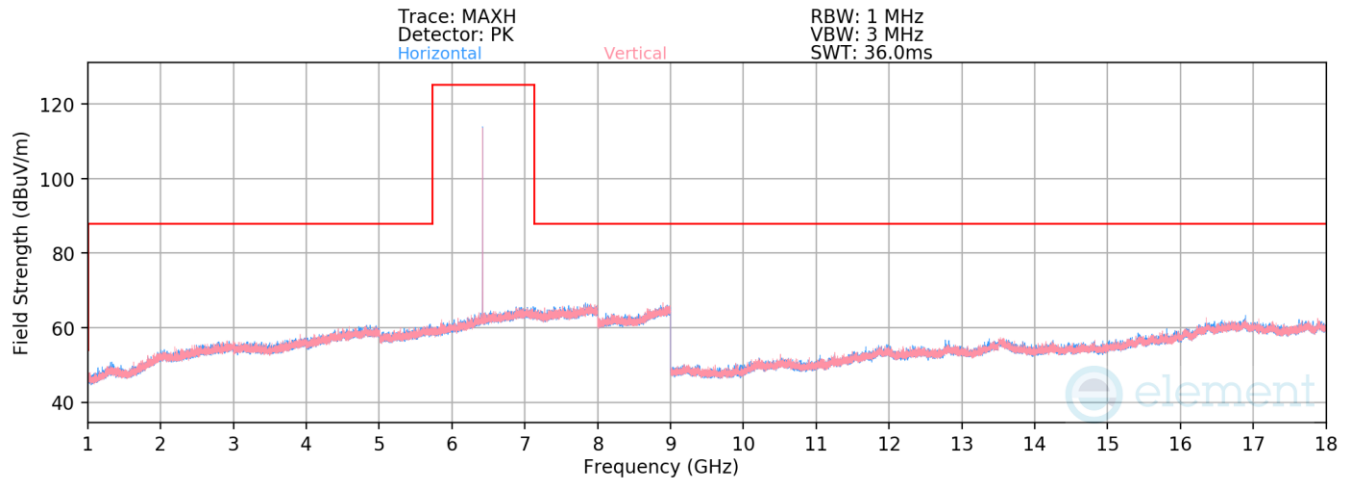

Plot 7-418. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR4 ePA – 6420MHz)


Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	6420MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12840.00	Average	V	-	-	-84.95	21.67	43.72	68.23	-24.51
12840.00	Peak	V	-	-	-73.20	21.67	55.47	88.23	-32.76

Table 7-31. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 264 of 330

V 11.0 06/2025

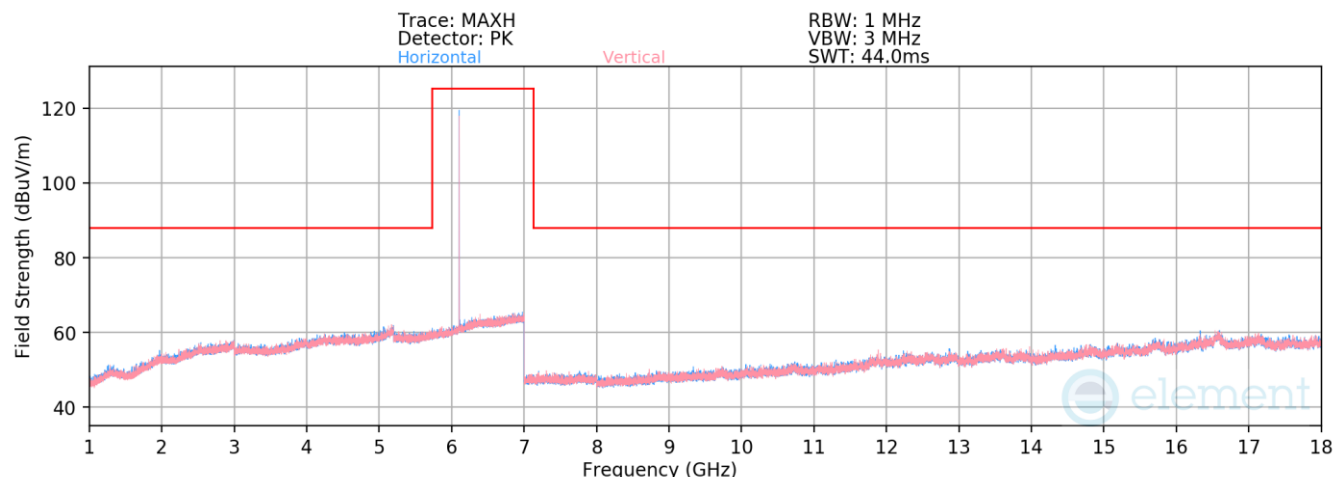

Plot 7-419. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 6106MHz)


Mode:	LE1M
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	6106MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12212.00	Average	H	-	-	-82.73	19.00	43.27	53.98	-10.71
*	12212.00	Peak	H	-	-	-70.34	19.00	55.66	73.98	-18.32


Table 7-32. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 265 of 330

V 11.0 06/2025

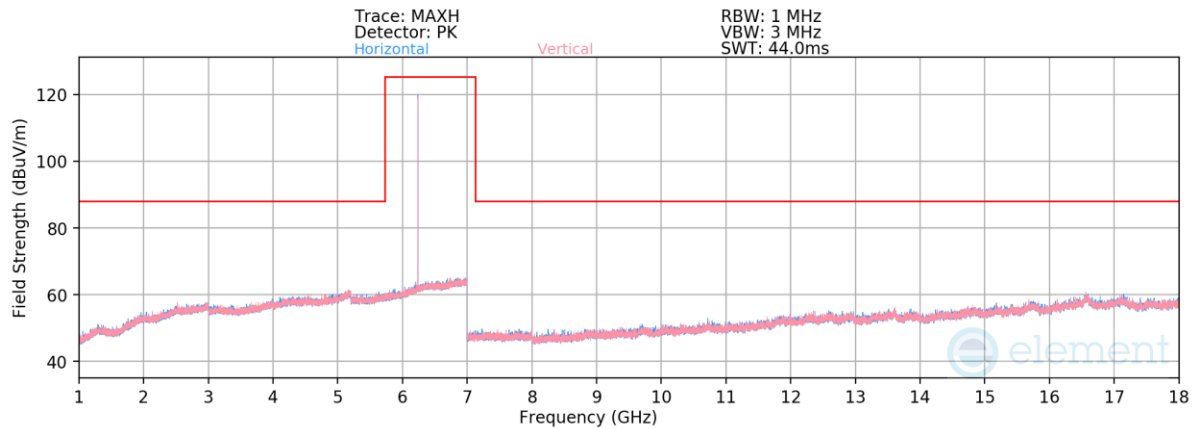

Plot 7-420. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M GFSK ePA – 6263MHz)

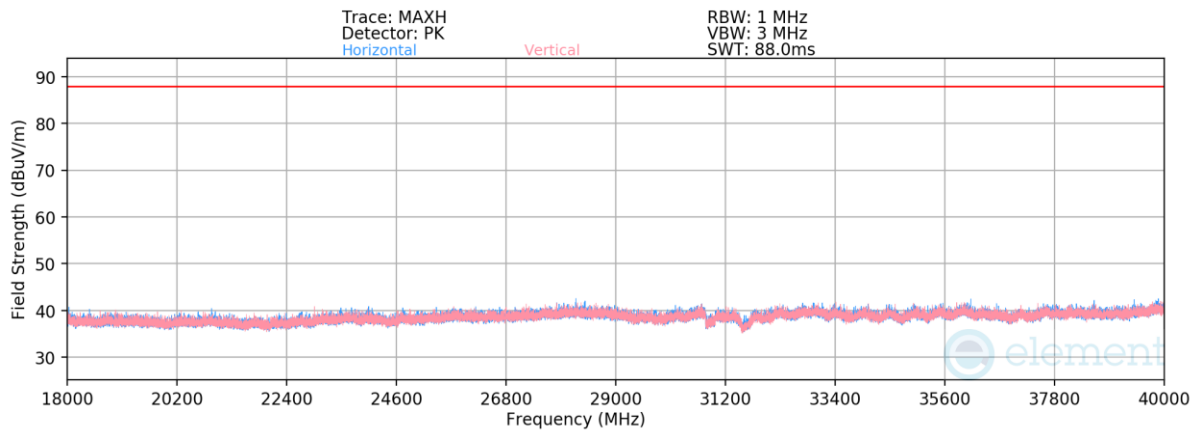

Plot 7-421. Radiated Spurious Emissions Above 18GHz TxBF Primary (LE1M ePA – 6263MHz)


Mode:	<u>LE1M</u>
Data Rate:	<u>1Mbps</u>
Power Scheme:	<u>ePA</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>6263MHz</u>

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12526.00	Average	V	-	-	-82.64	18.85	43.21	53.98	-10.77
*	12526.00	Peak	V	-	-	-71.06	18.85	54.79	73.98	-19.19
*	18789.00	Average	H	-	-	-72.21	-5.81	28.98	53.98	-25.00
*	18789.00	Peak	H	-	-	-60.95	-5.81	40.24	73.98	-33.74
	25052.00	Average	H	-	-	-71.14	-6.67	29.19	68.23	-39.04
	25052.00	Peak	H	-	-	-59.65	-6.67	40.68	88.23	-47.55

Table 7-33. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 266 of 330

V 11.0 06/2025

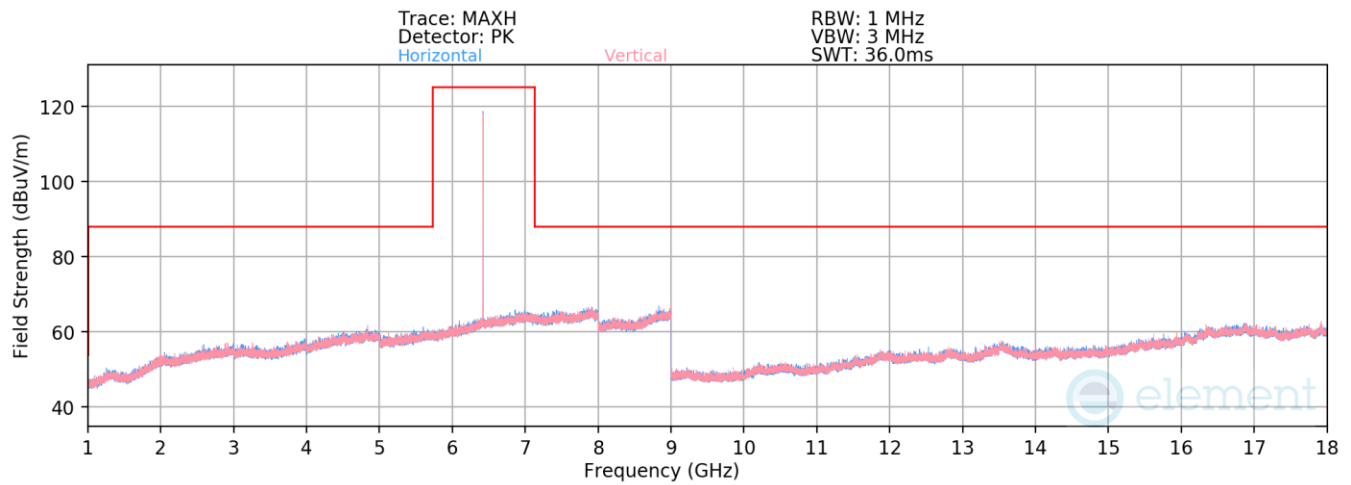

Plot 7-422. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 6420MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 6420MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12840.00	Average	H	-	-	-84.74	21.67	43.93	68.23	-24.30
12840.00	Peak	H	-	-	-73.14	21.67	55.53	88.23	-32.70

Table 7-34. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 267 of 330

V 11.0 06/2025

7.8.2 TxBF Diversity Radiated Spurious Emission (Above 1GHz)

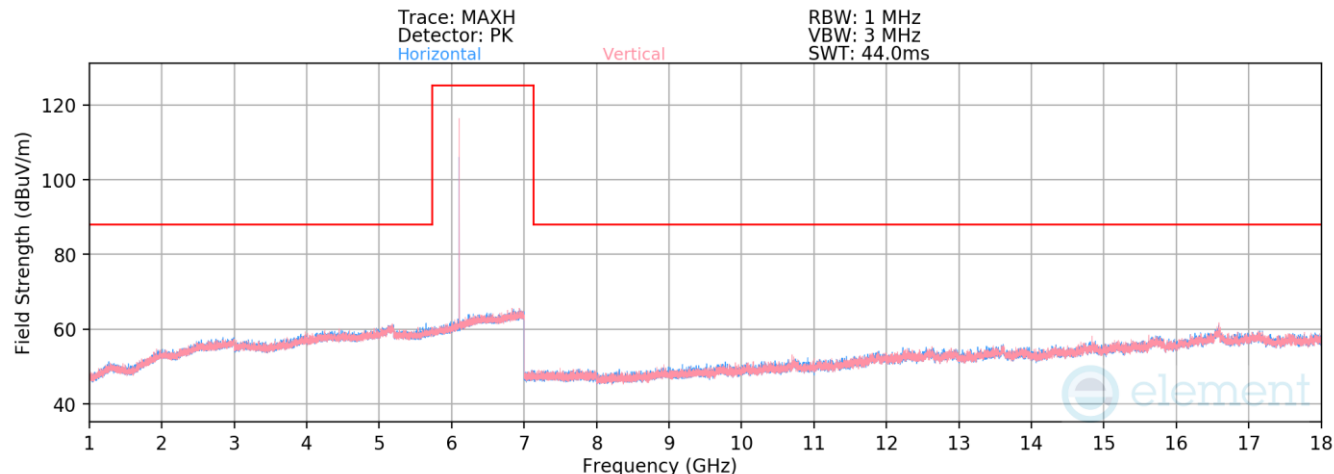

Plot 7-423. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 6106MHz)


Mode:	BDR
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	6106MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12212.00	Average	H	-	-	-82.62	19.00	43.37	53.98	-10.61
*	12212.00	Peak	H	-	-	-70.34	19.00	55.65	73.98	-18.33


Table 7-35. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 268 of 330

V 11.0 06/2025

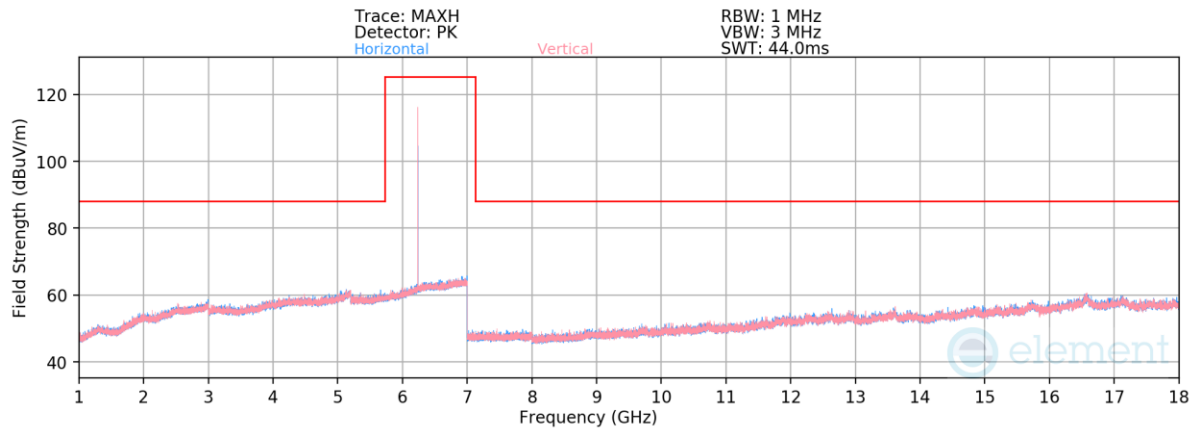

Plot 7-424. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 6263MHz)

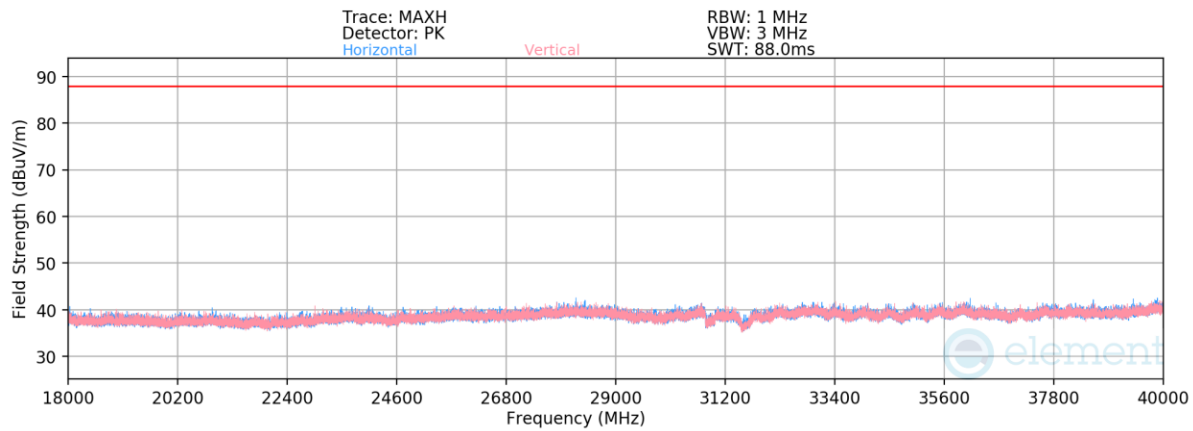

Plot 7-425. Radiated Spurious Emissions Above 18GHz TxBF Diversity (BDR GFSK ePA – 6263MHz)

Mode:	BDR
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	6263MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12526.00	Average	H	-	-	-82.76	18.85	43.09	53.98	-10.89
*	12526.00	Peak	H	-	-	-71.43	18.85	54.43	73.98	-19.55
*	18789.00	Average	V	-	-	-72.06	-5.82	29.12	53.98	-24.86
*	18789.00	Peak	V	-	-	-60.91	-5.82	40.27	73.98	-33.71
	25052.00	Average	H	-	-	-70.97	-6.64	29.39	68.23	-38.84
	25052.00	Peak	H	-	-	-59.80	-6.64	40.56	88.23	-47.67

Table 7-36. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 269 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

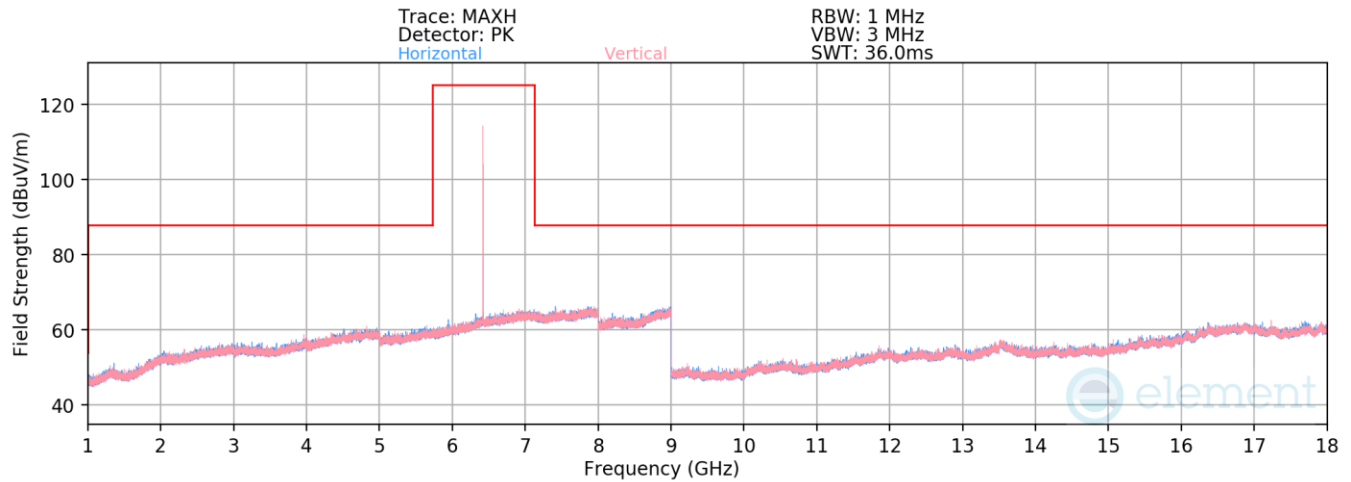

Plot 7-426. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 6420MHz)


Mode:	BDR
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	6420MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12840.00	Average	V	-	-	-84.72	21.67	43.95	68.23	-24.28
12840.00	Peak	V	-	-	-73.60	21.67	55.07	88.23	-33.16

Table 7-37. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 270 of 330

V 11.0 06/2025

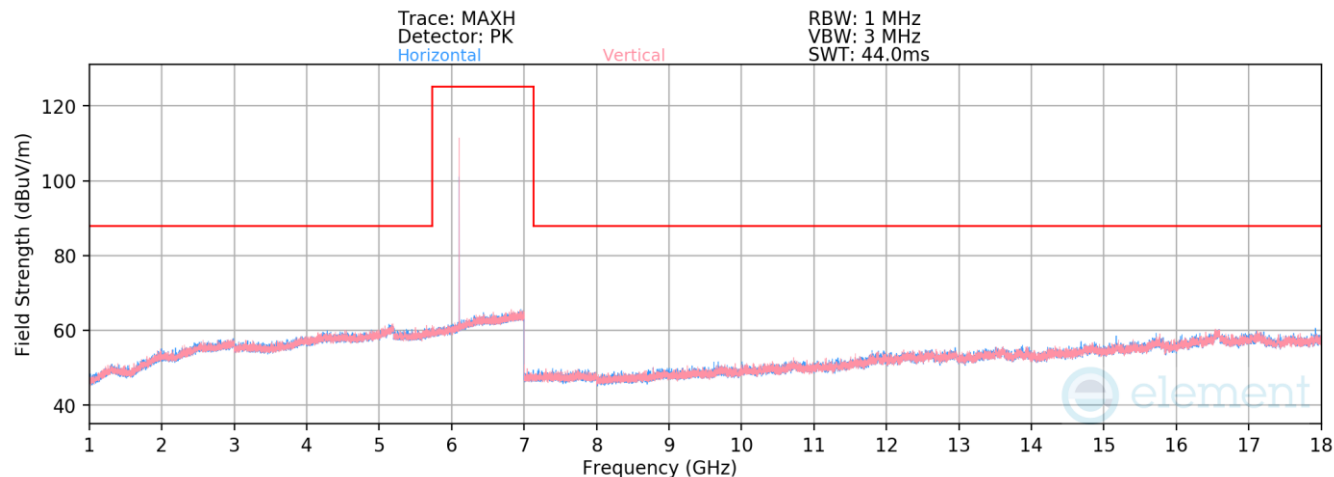

Plot 7-427. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR4 ePA – 6106MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 6106MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12212.00	Average	H	-	-	-82.68	19.00	43.31	53.98	-10.67
*	12212.00	Peak	H	-	-	-70.51	19.00	55.49	73.98	-18.49


Table 7-38. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 271 of 330

V 11.0 06/2025

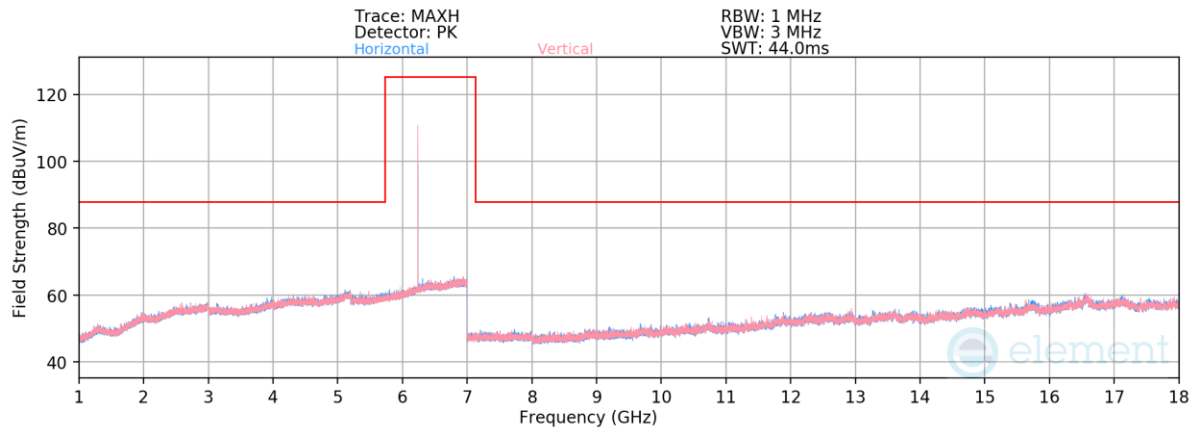

Plot 7-428. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR4 ePA – 6263MHz)

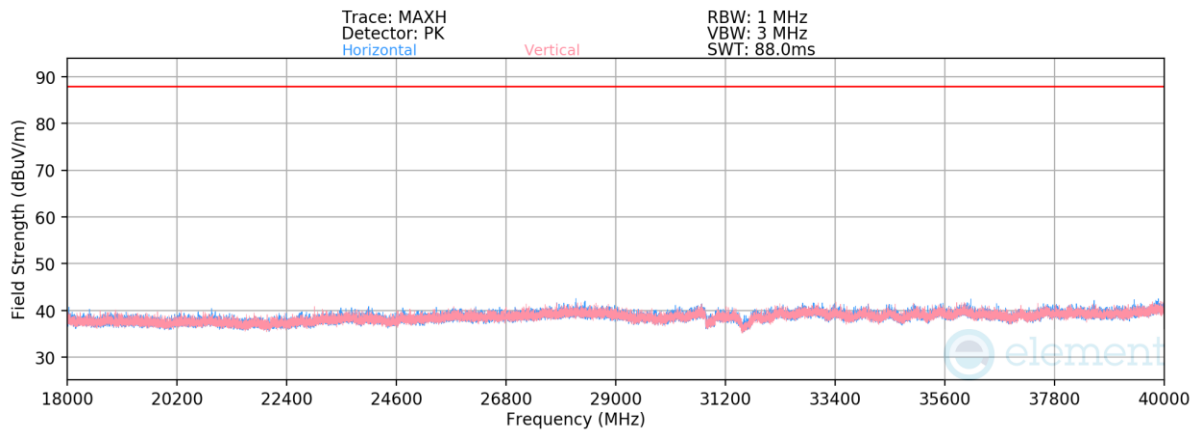

Plot 7-429. Radiated Spurious Emissions Above 18GHz TxBF Diversity (HDR4 ePA – 6263MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 6263MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12526.00	Average	V	-	-	-82.52	18.62	43.11	53.98	-10.87
*	12526.00	Peak	V	-	-	-71.13	18.62	54.49	73.98	-19.49
*	18789.00	Average	V	-	-	-72.03	-5.90	29.07	53.98	-24.91
*	18789.00	Peak	V	-	-	-60.66	-5.90	40.44	73.98	-33.54
	25052.00	Average	H	-	-	-71.02	-6.64	29.34	68.23	-38.89
	25052.00	Peak	H	-	-	-59.58	-6.64	40.78	88.23	-47.45

Table 7-39. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 272 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

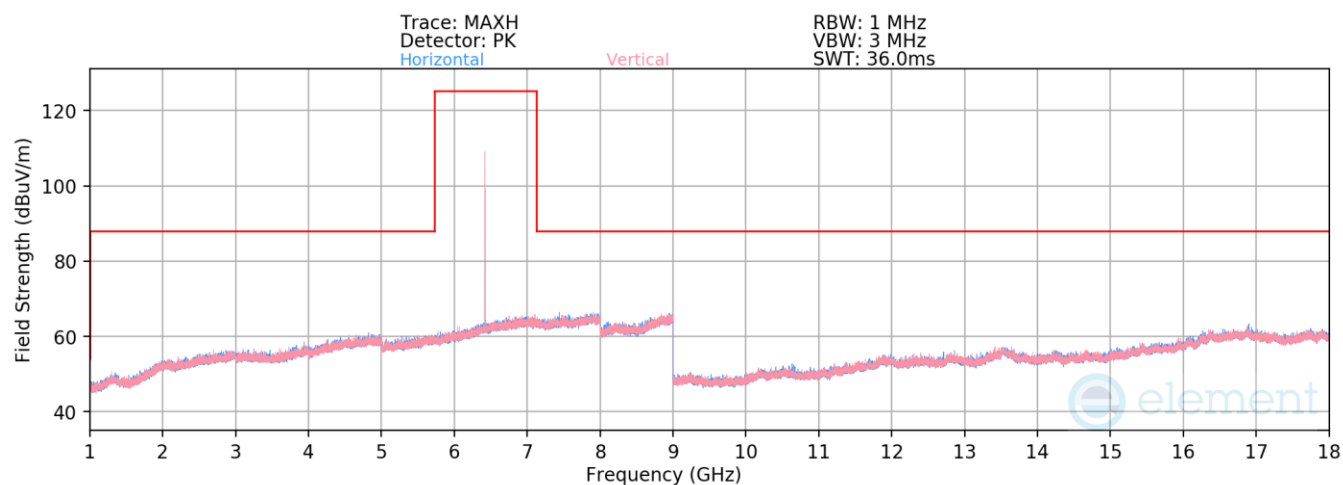

Plot 7-430. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR4 ePA – 6420MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 6420MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12840.00	Average	V	-	-	-84.81	21.67	43.86	68.23	-24.37
12840.00	Peak	V	-	-	-72.55	21.67	56.12	88.23	-32.11

Table 7-40. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 273 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

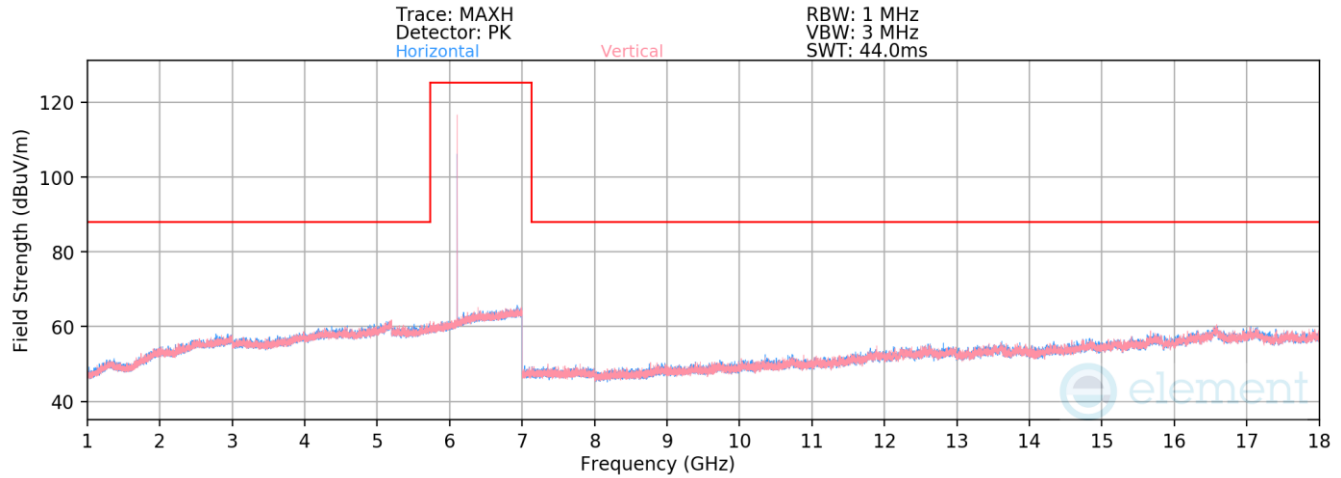

Plot 7-431. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 6106MHz)


Mode:	LE1M
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	6106MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12212.00	Average	V	-	-	-82.79	19.00	43.21	53.98	-10.77
*	12212.00	Peak	V	-	-	-71.18	19.00	54.82	73.98	-19.16


Table 7-41. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 274 of 330

V 11.0 06/2025

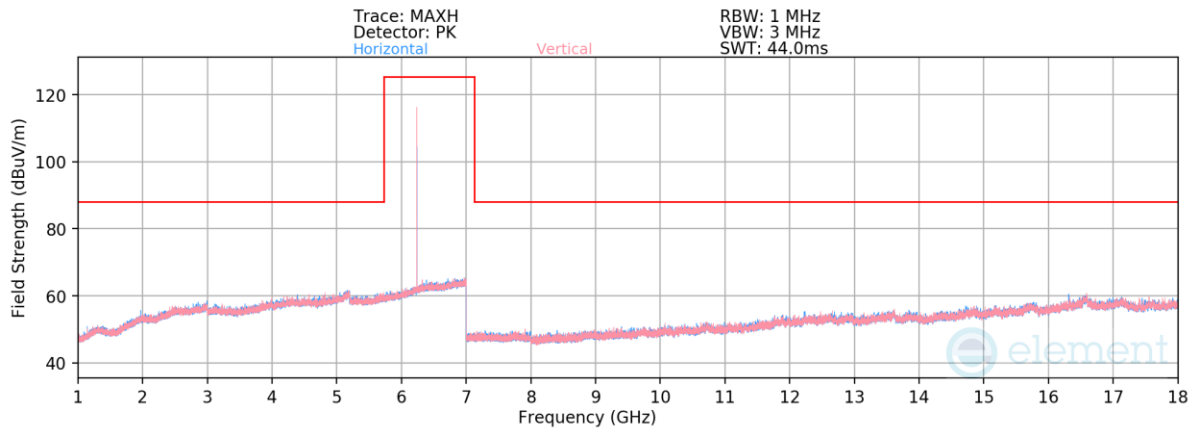

Plot 7-432. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 6263MHz)

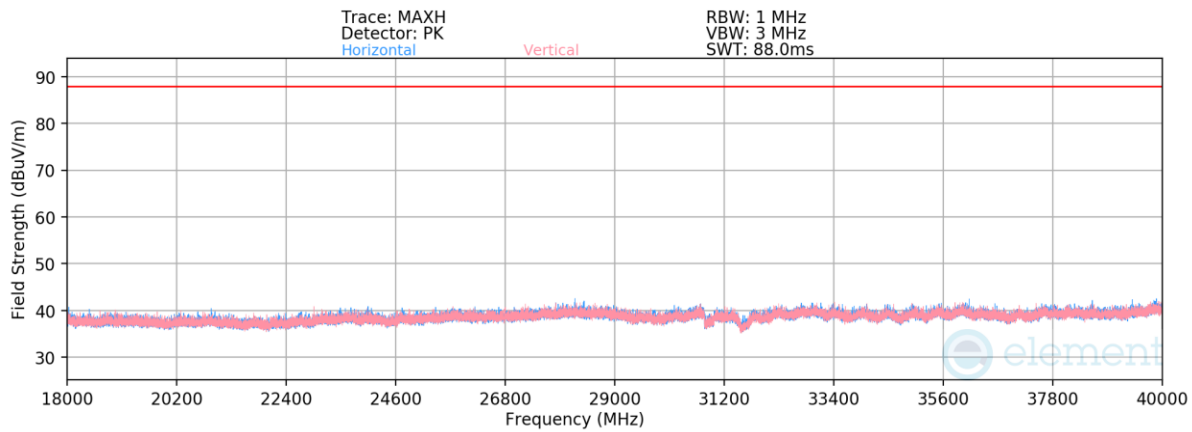

Plot 7-433. Radiated Spurious Emissions Above 18GHz TxBF Diversity (LE1M ePA – 6263MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 6263MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	12526.00	Average	V	-	-	-82.60	18.62	43.02	53.98	-10.96
*	12526.00	Peak	V	-	-	-71.16	18.62	54.46	73.98	-19.52
*	18789.00	Average	V	-	-	-72.22	-5.81	28.97	53.98	-25.01
*	18789.00	Peak	V	-	-	-60.15	-5.81	41.04	73.98	-32.94
	25052.00	Average	H	-	-	-70.83	-6.64	29.53	68.23	-38.70
	25052.00	Peak	H	-	-	-59.74	-6.64	40.62	88.23	-47.61

Table 7-42. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 275 of 330

V 11.0 06/2025

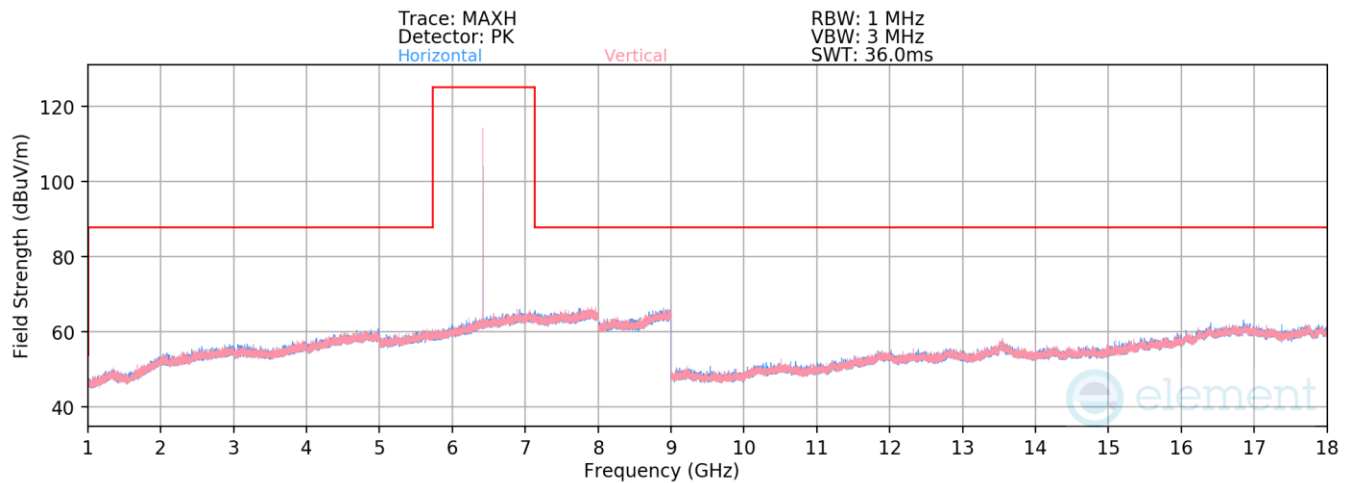

Plot 7-434. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 6420MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 6420MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12840.00	Average	V	-	-	-85.20	22.10	43.90	68.23	-24.33
12840.00	Peak	V	-	-	-73.55	22.10	55.55	88.23	-32.68


Table 7-43. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 276 of 330

V 11.0 06/2025


7.8.3 Antenna WF5B Radiated Band Edge Measurements

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106MHz

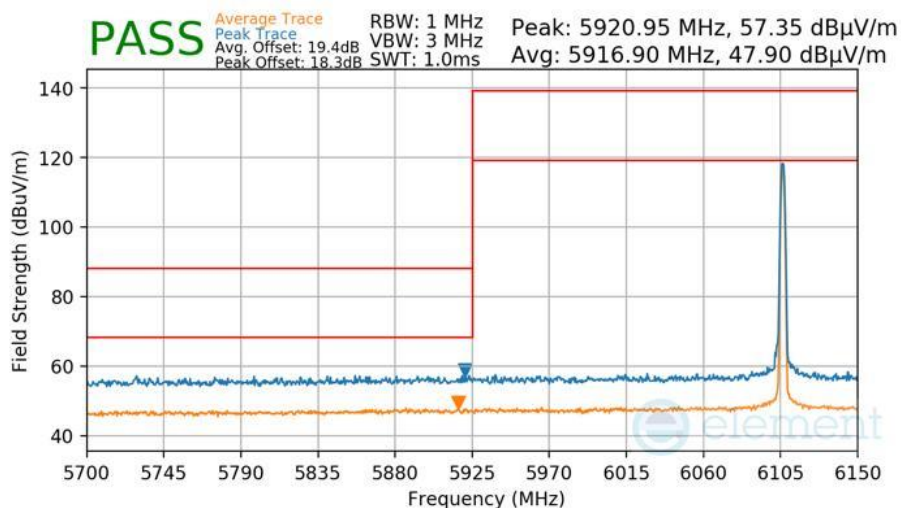

Plot 7-435 Radiated Lower Band Edge Measurement Antenna WF5B

Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106MHz

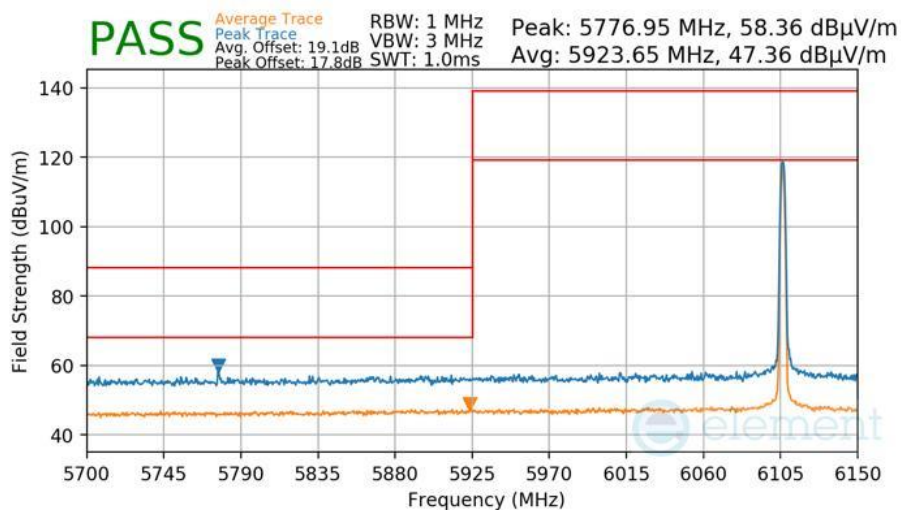


Plot 7-436 Radiated Lower Band Edge Measurement Antenna WF5B

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 277 of 330


V 11.0 06/2025

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

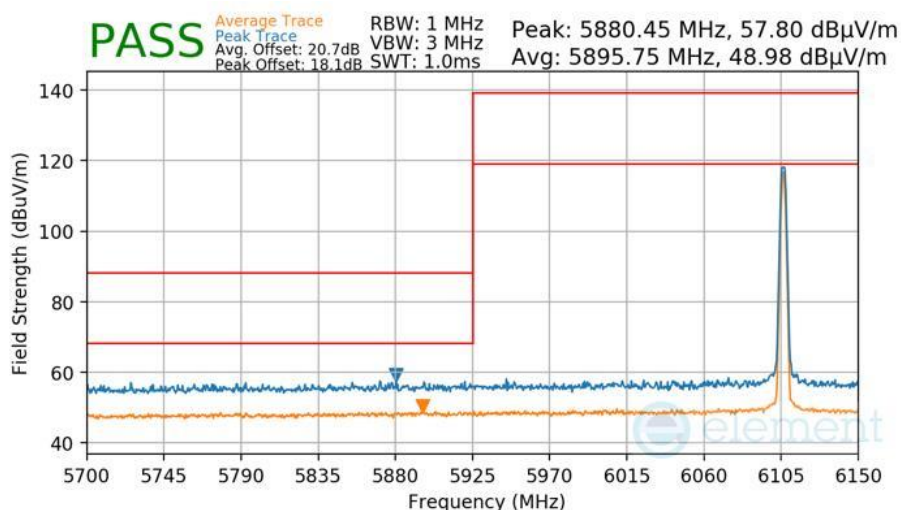

Plot 7-437 Radiated Lower Band Edge Measurement Antenna WF5B

Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

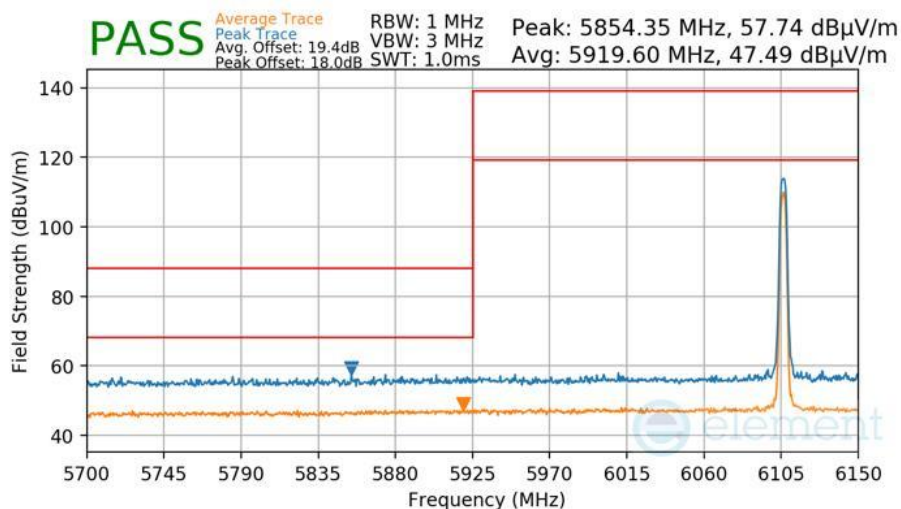


Plot 7-438 Radiated Lower Band Edge Measurement Antenna WF5B

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 278 of 330


V 11.0 06/2025

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

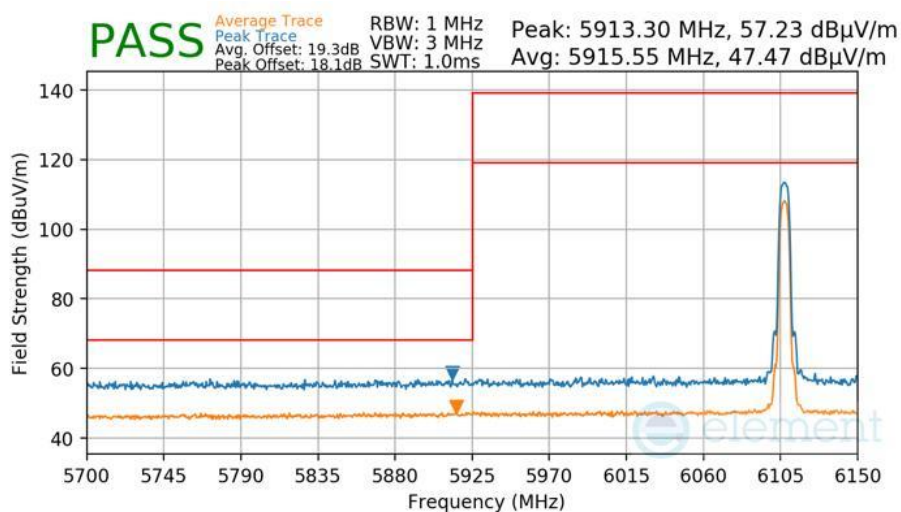

Plot 7-439 Radiated Lower Band Edge Measurement Antenna WF5B

Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

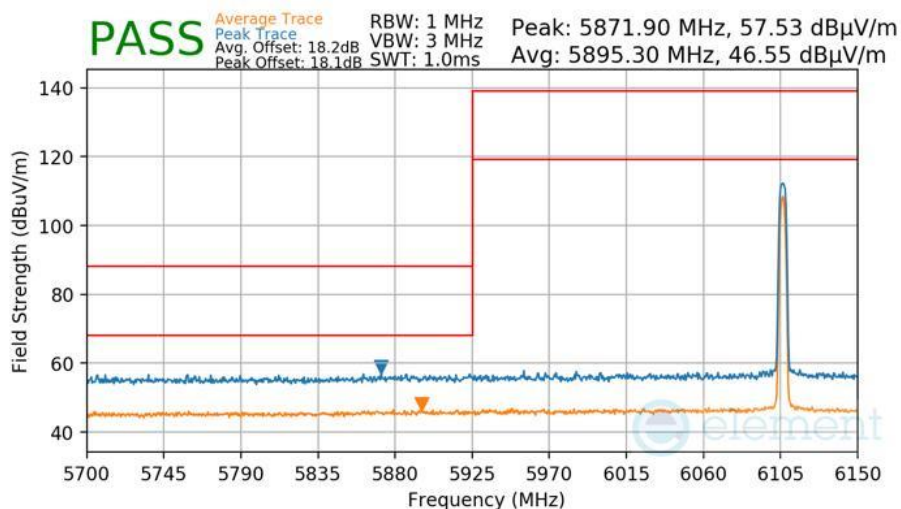


Plot 7-440 Radiated Lower Band Edge Measurement Antenna WF5B

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 279 of 330


V 11.0 06/2025

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

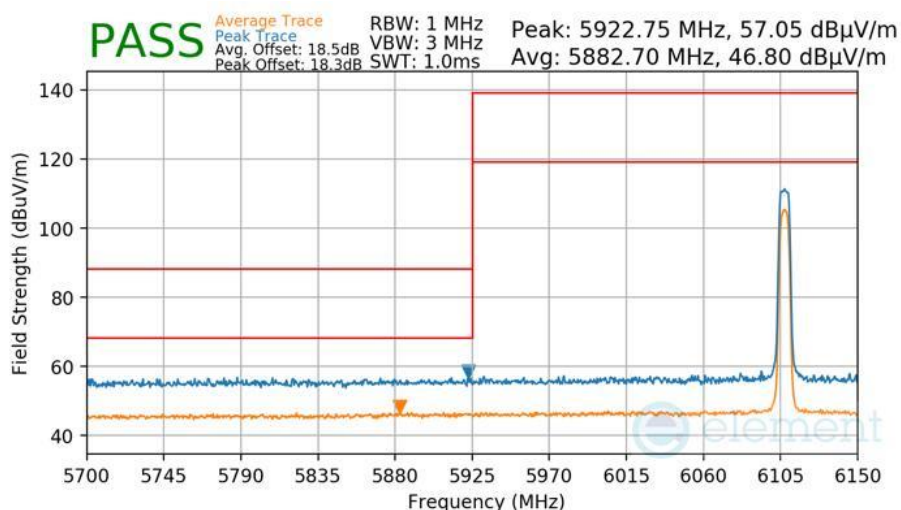

Plot 7-441 Radiated Lower Band Edge Measurement Antenna WF5B

Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

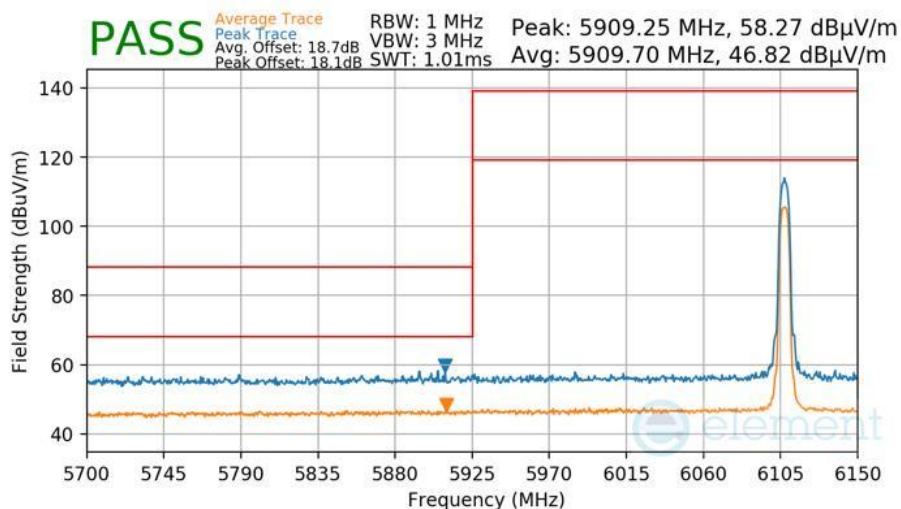


Plot 7-442 Radiated Lower Band Edge Measurement Antenna WF5B

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 280 of 330


V 11.0 06/2025

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109MHz

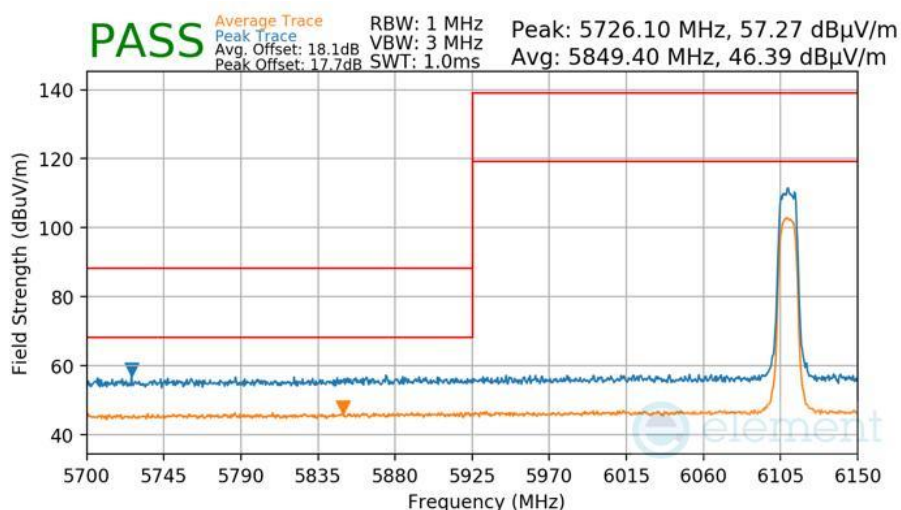

Plot 7-443 Radiated Lower Band Edge Measurement Antenna WF5B

Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109MHz

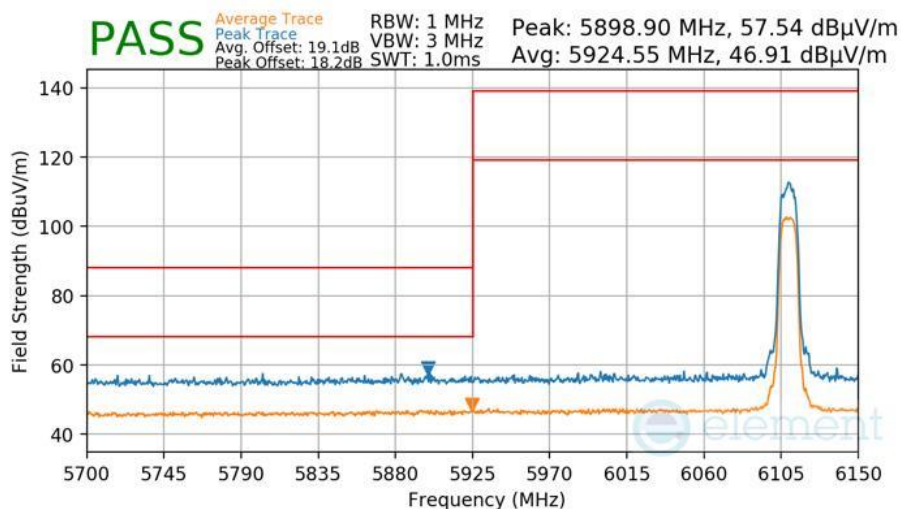


Plot 7-444 Radiated Lower Band Edge Measurement Antenna WF5B

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 281 of 330

V 11.0 06/2025

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

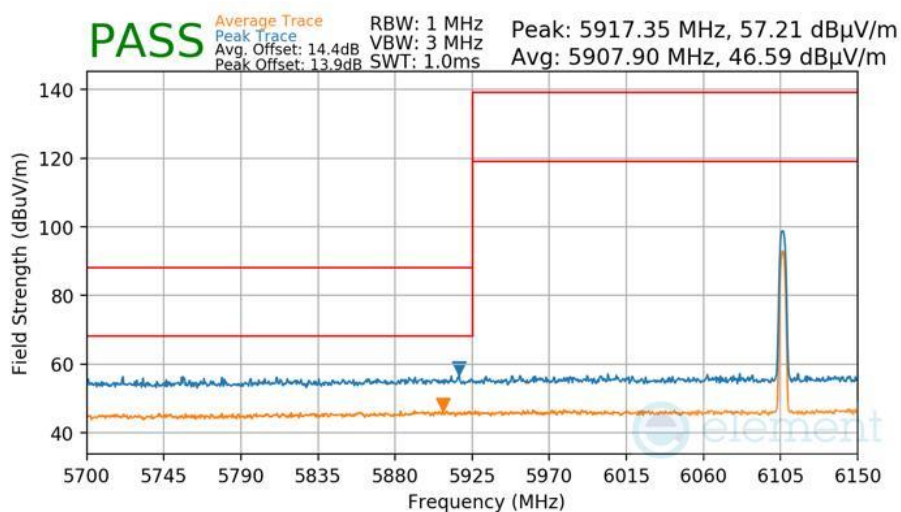

Plot 7-445 Radiated Lower Band Edge Measurement Antenna WF5B


FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device		Page 282 of 330

V 11.0 06/2025

7.8.4 Antenna WF8 Radiated Band Edge Measurements


§15.407(b.1)(b.2) §15.205 §15.209

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106MHz

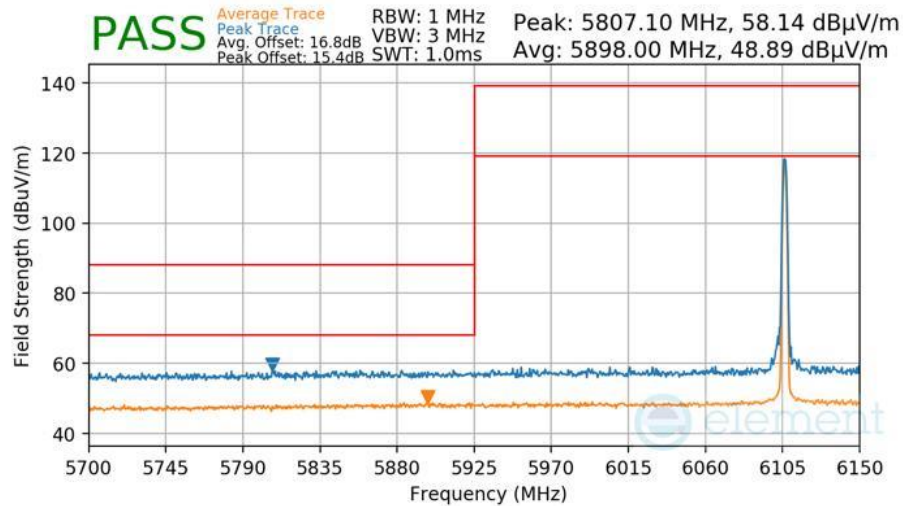

Plot 7-446 Radiated Lower Band Edge Measurement Antenna WF8

Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106MHz

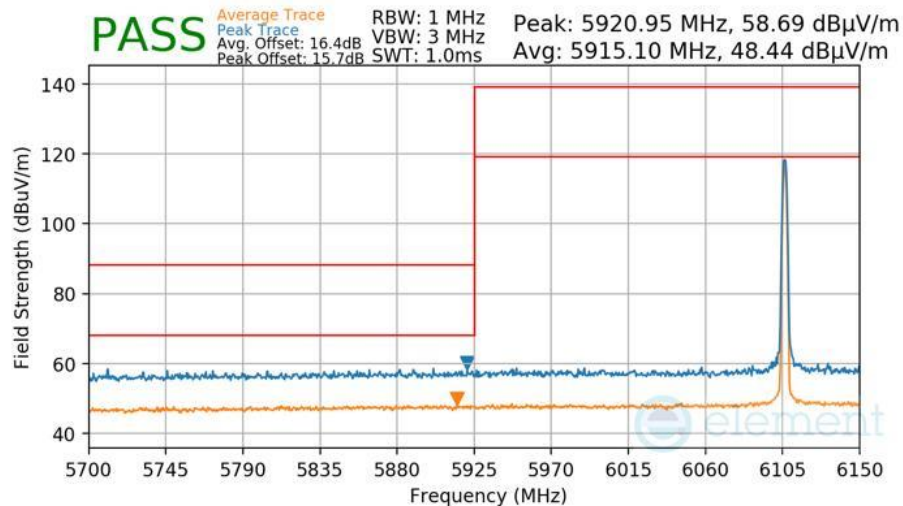


Plot 7-447 Radiated Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 283 of 330

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

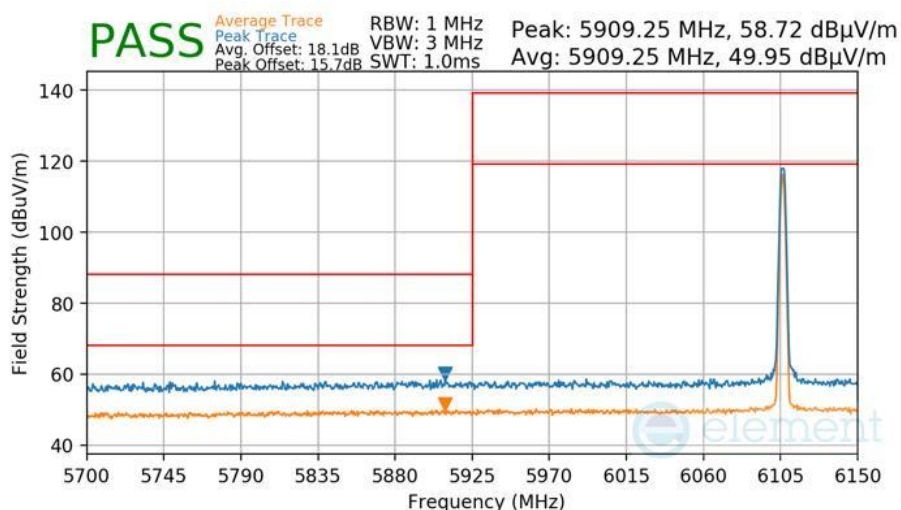

Plot 7-448 Radiated Lower Band Edge Measurement Antenna WF8

Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

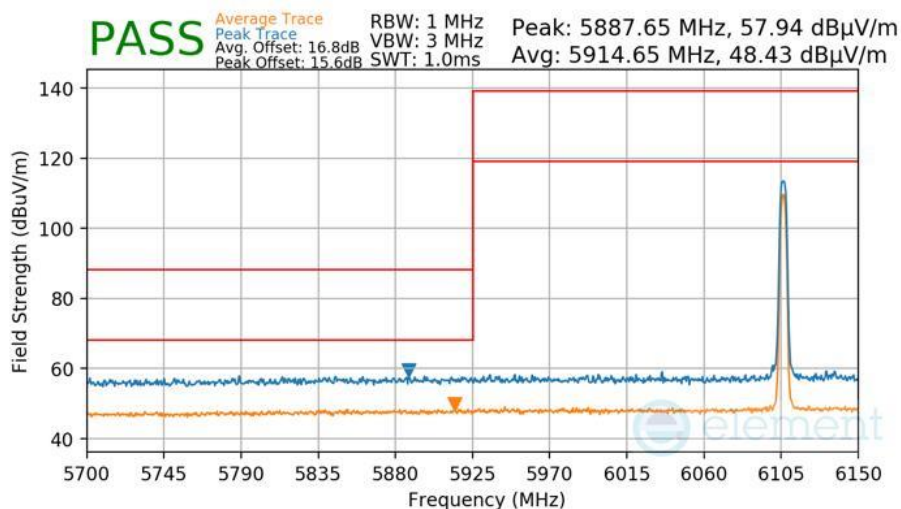


Plot 7-449 Radiated Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 284 of 330

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

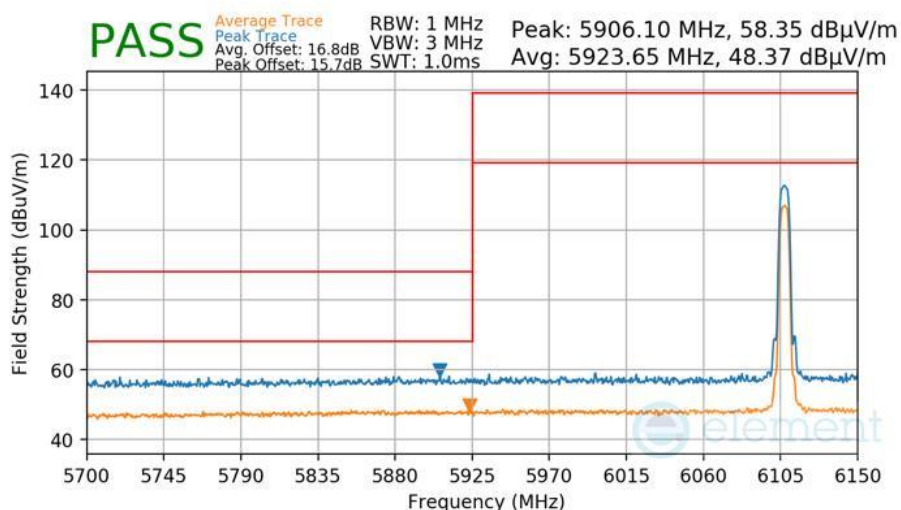

Plot 7-450 Radiated Lower Band Edge Measurement Antenna WF8

Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

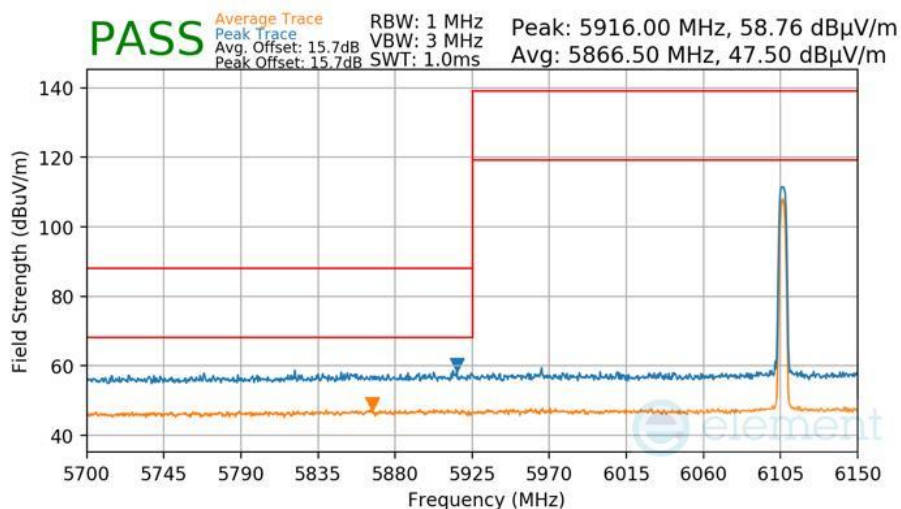


Plot 7-451 Radiated Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 285 of 330	


V 11.0 06/2025

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

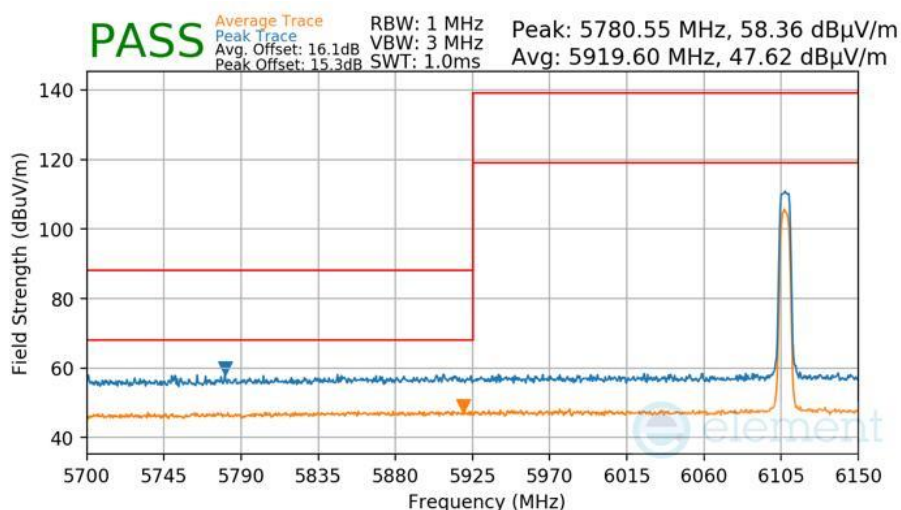

Plot 7-452 Radiated Lower Band Edge Measurement Antenna WF8

Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

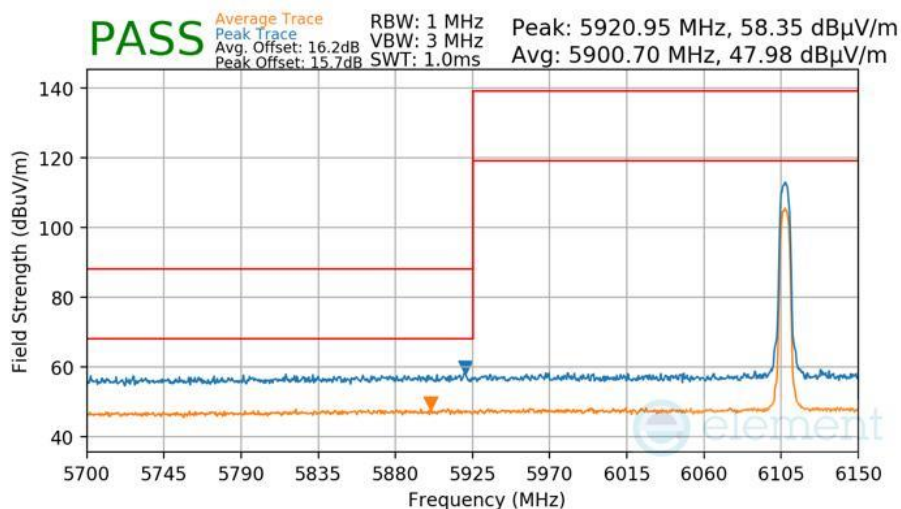


Plot 7-453 Radiated Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 286 of 330


V 11.0 06/2025

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109MHz

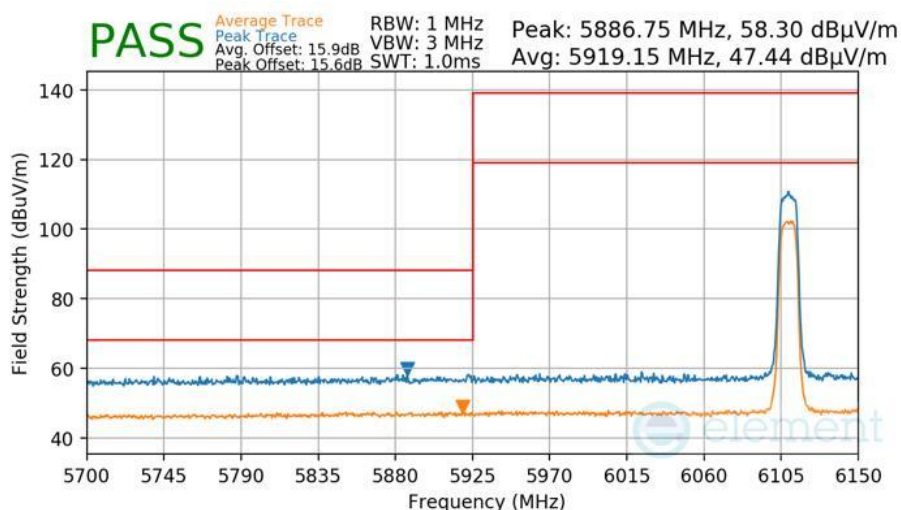

Plot 7-454 Radiated Lower Band Edge Measurement Antenna WF8

Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109MHz

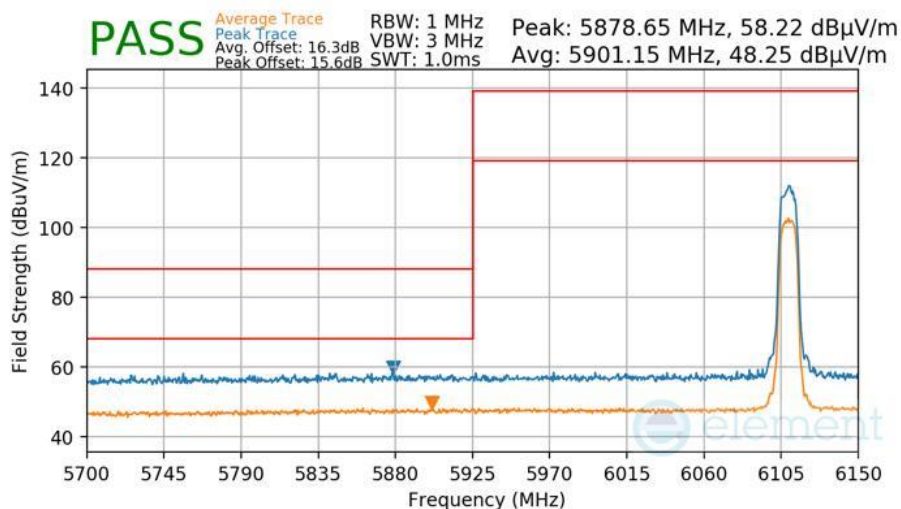


Plot 7-455 Radiated Lower Band Edge Measurement Antenna WF8

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 287 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

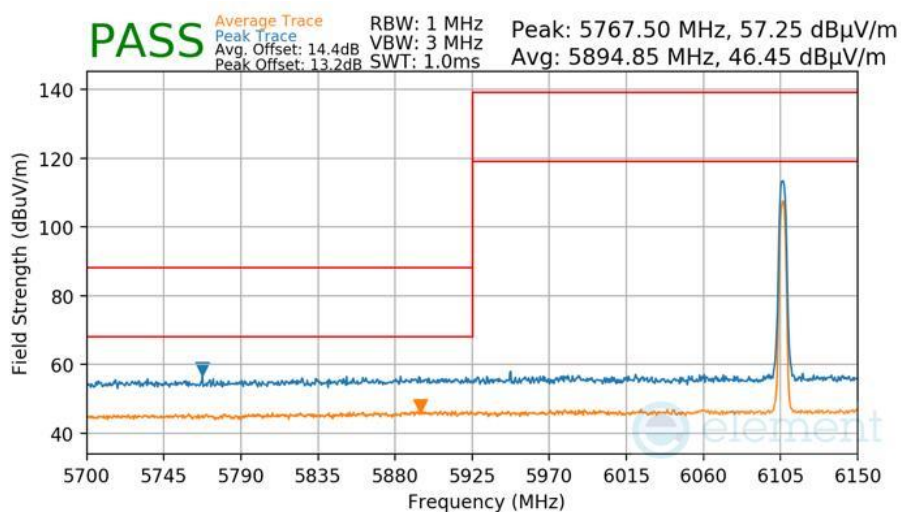

Plot 7-456 Radiated Lower Band Edge Measurement Antenna WF8


FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 288 of 330	

V 11.0 06/2025

7.8.5 Antenna WF7 Radiated Band Edge Measurements


§15.407(b.1)(b.2) §15.205 §15.209

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106MHz

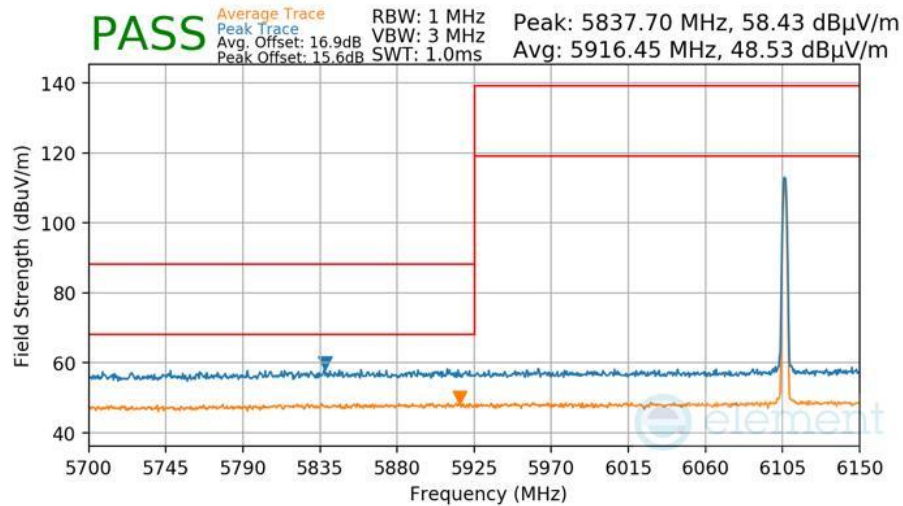

Plot 7-457 Radiated Lower Band Edge Measurement Antenna WF7

Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106MHz

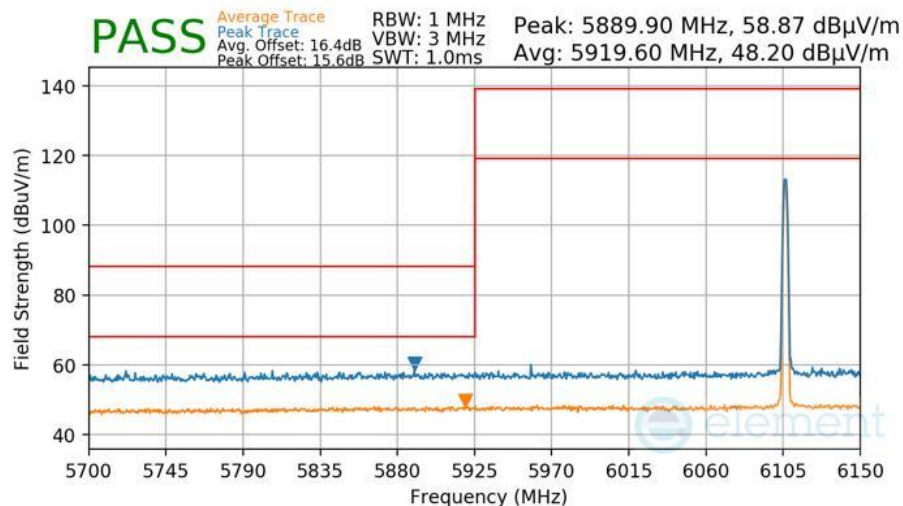


Plot 7-458 Radiated Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 289 of 330

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

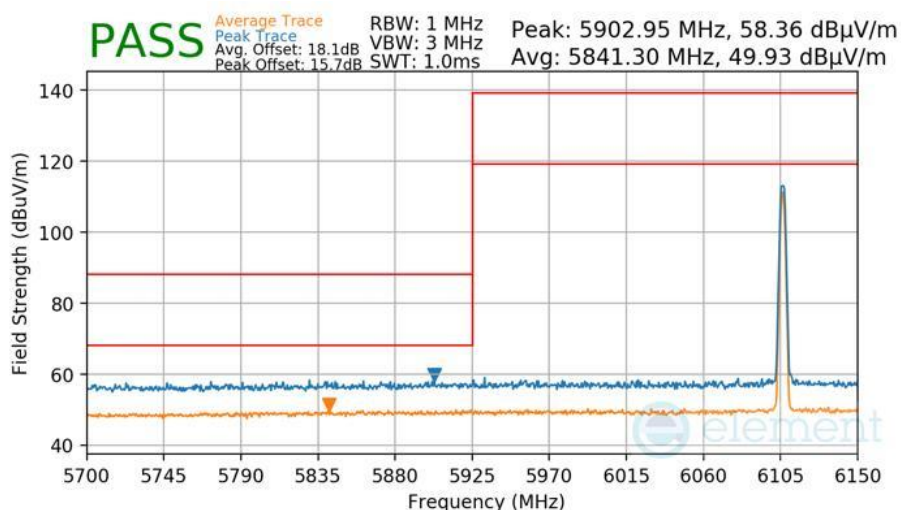

Plot 7-459 Radiated Lower Band Edge Measurement Antenna WF7

Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

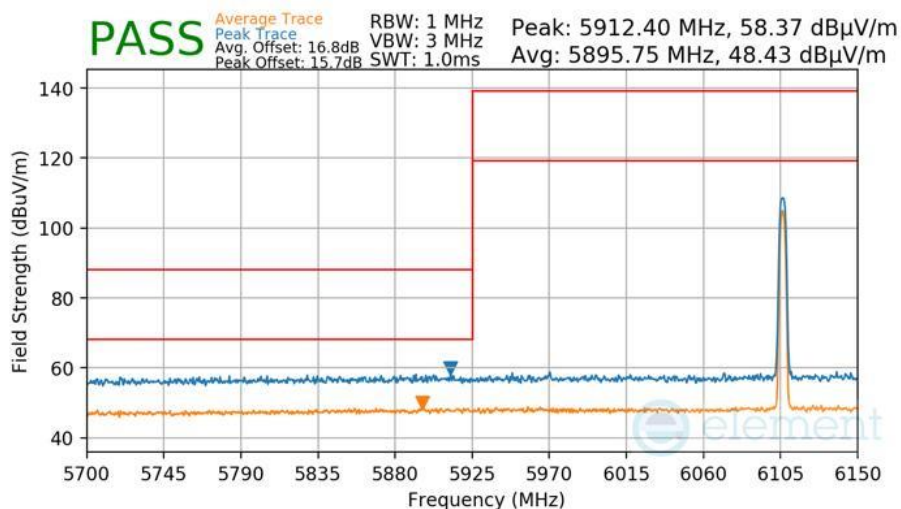


Plot 7-460 Radiated Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 290 of 330

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

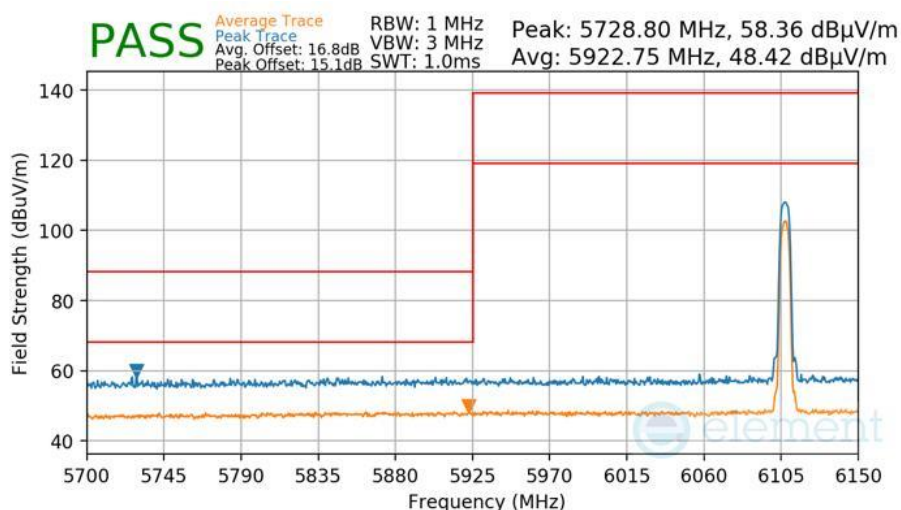

Plot 7-461 Radiated Lower Band Edge Measurement Antenna WF7

Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

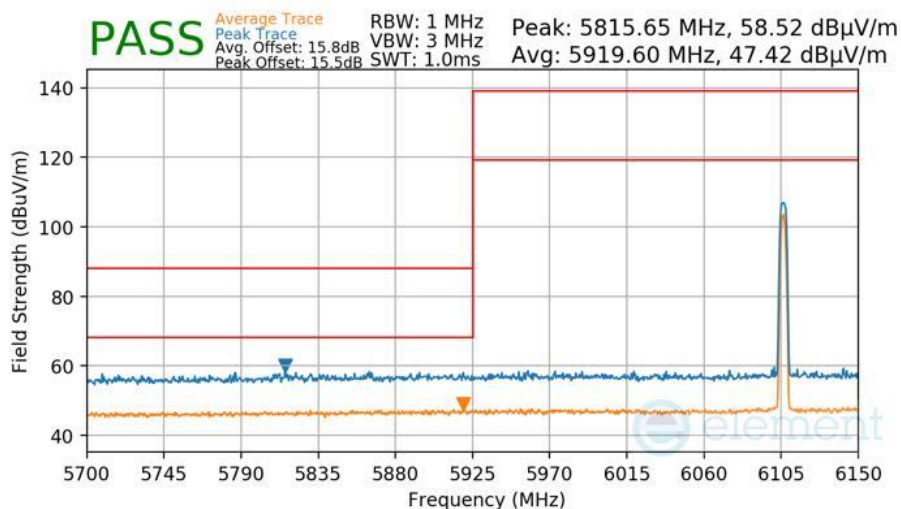


Plot 7-462 Radiated Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 291 of 330

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

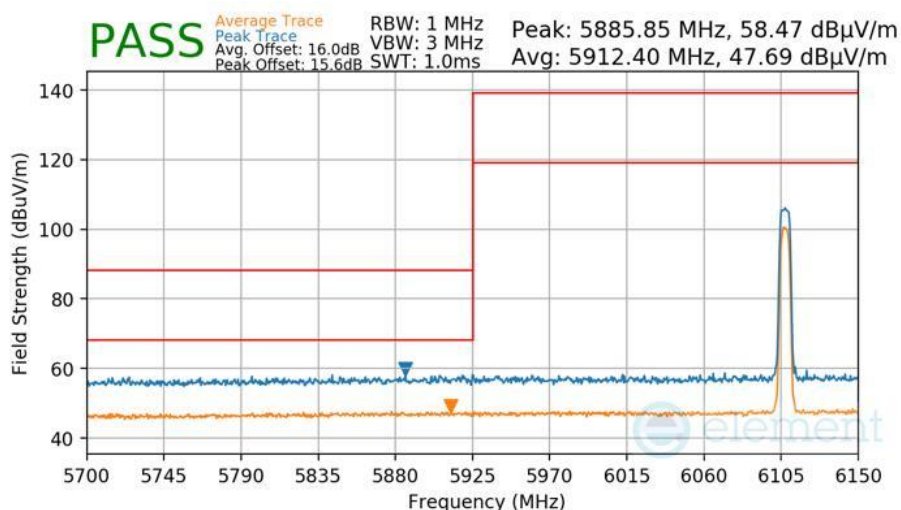

Plot 7-463 Radiated Lower Band Edge Measurement Antenna WF7

Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

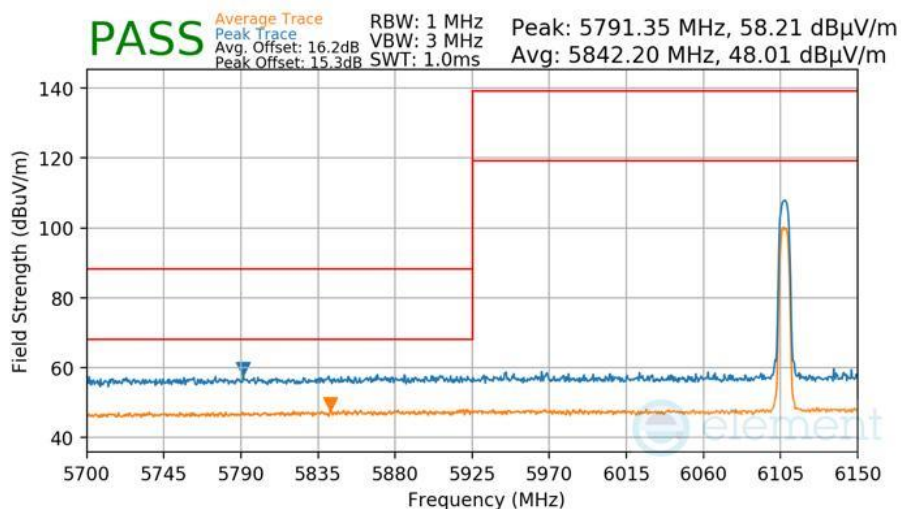


Plot 7-464 Radiated Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 292 of 330

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109MHz

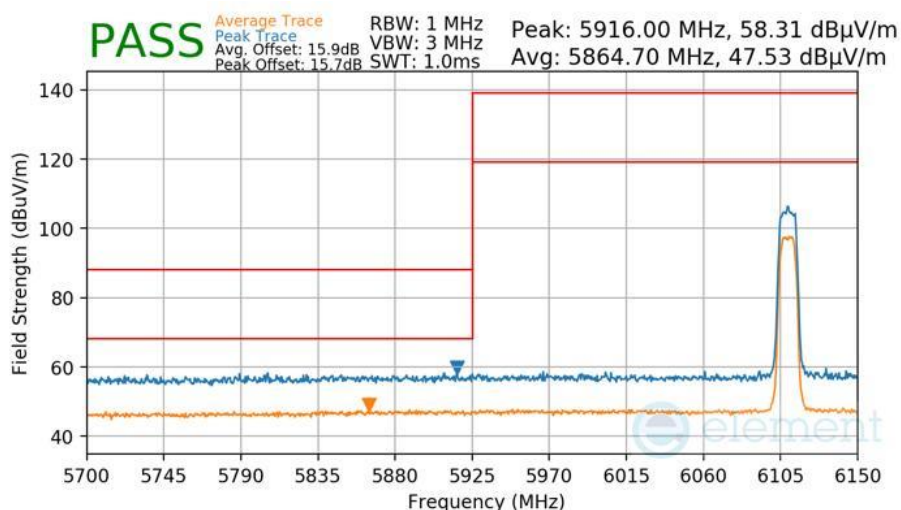

Plot 7-465 Radiated Lower Band Edge Measurement Antenna WF7

Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109MHz

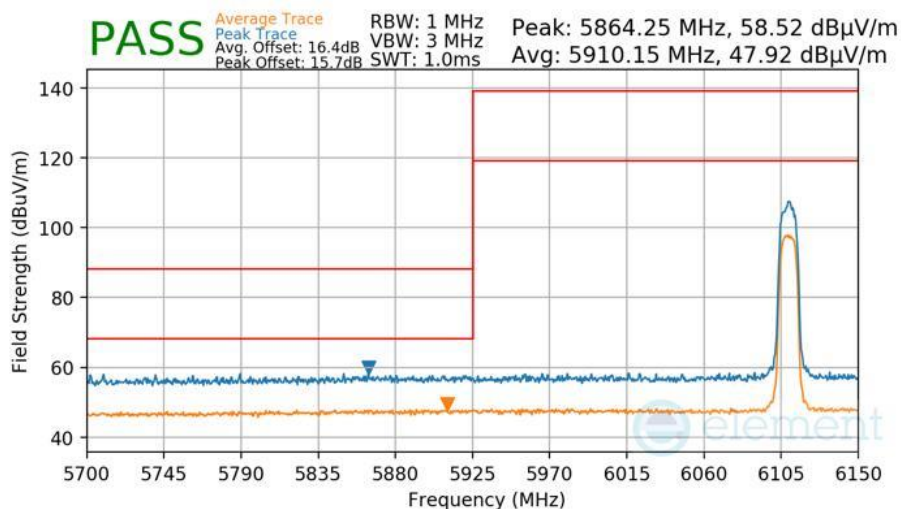


Plot 7-466 Radiated Lower Band Edge Measurement Antenna WF7

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 293 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

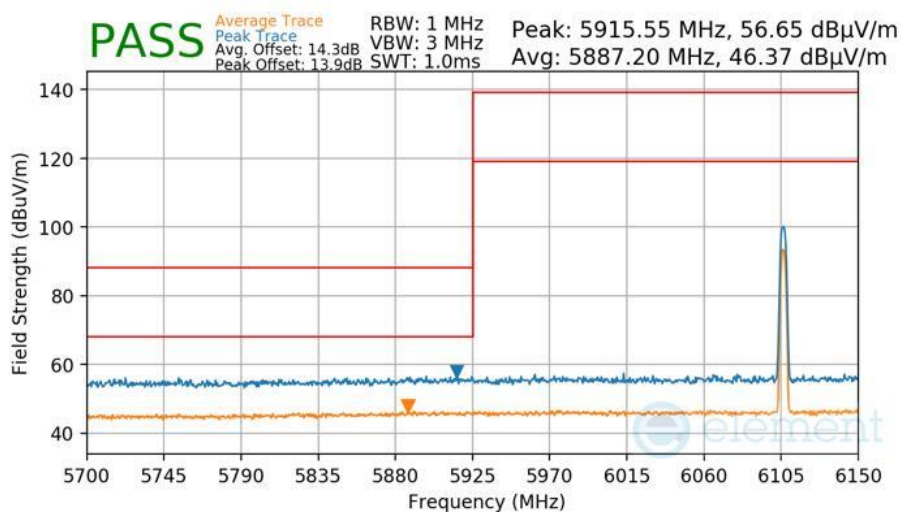

Plot 7-467 Radiated Lower Band Edge Measurement Antenna WF7


FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 294 of 330	

V 11.0 06/2025

7.8.6 TxBF Primary Radiated Band Edge Measurements


§15.407(b.1)(b.2) §15.205 §15.209

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106MHz

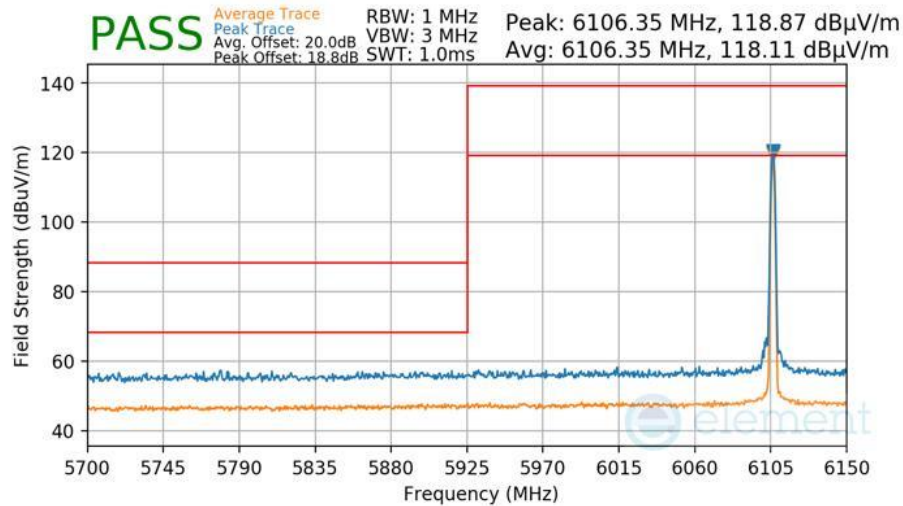

Plot 7-468 Radiated Lower Band Edge Measurement TxBF Primary

Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106MHz

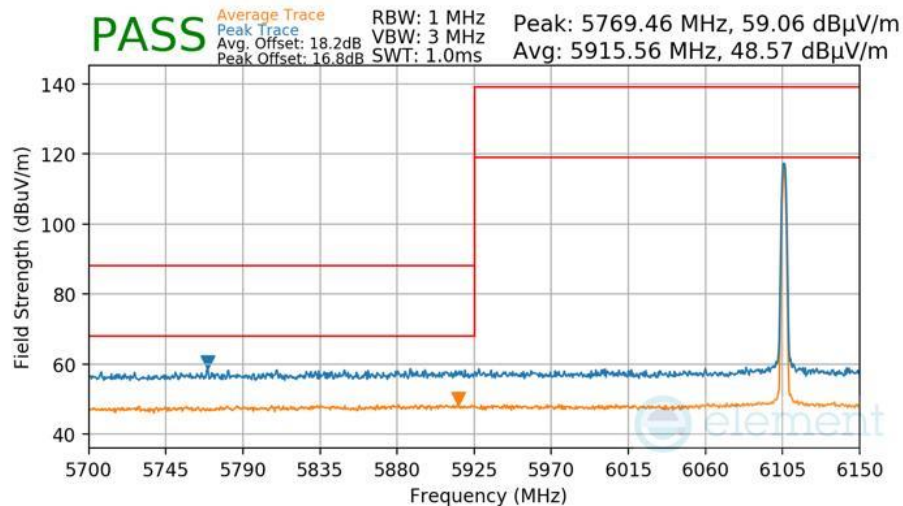


Plot 7-469 Radiated Lower Band Edge Measurement TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 295 of 330

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

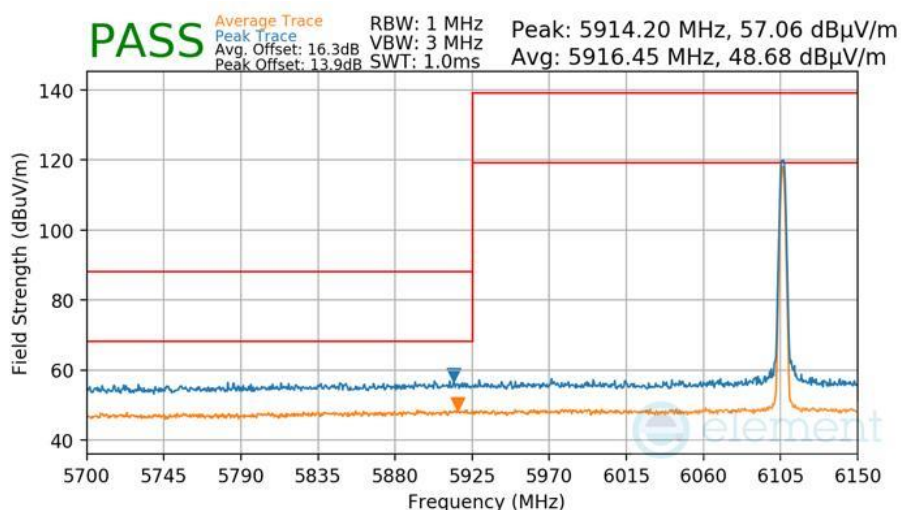

Plot 7-470 Radiated Lower Band Edge Measurement TxBF Primary

Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

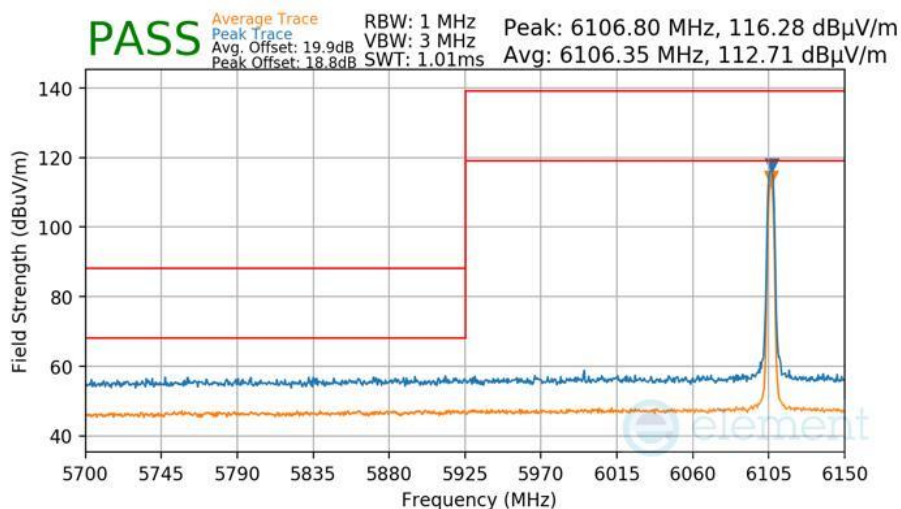


Plot 7-471 Radiated Lower Band Edge Measurement TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 296 of 330


V 11.0 06/2025

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

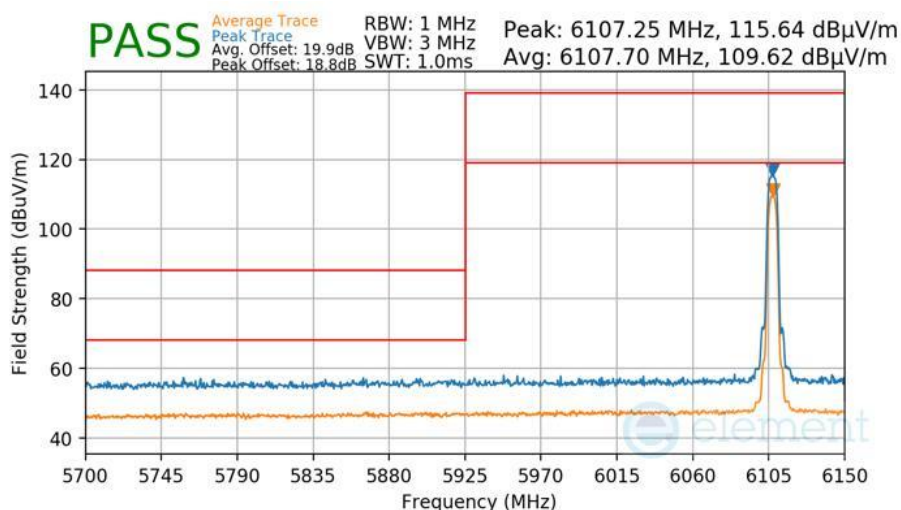

Plot 7-472 Radiated Lower Band Edge Measurement TxBF Primary

Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

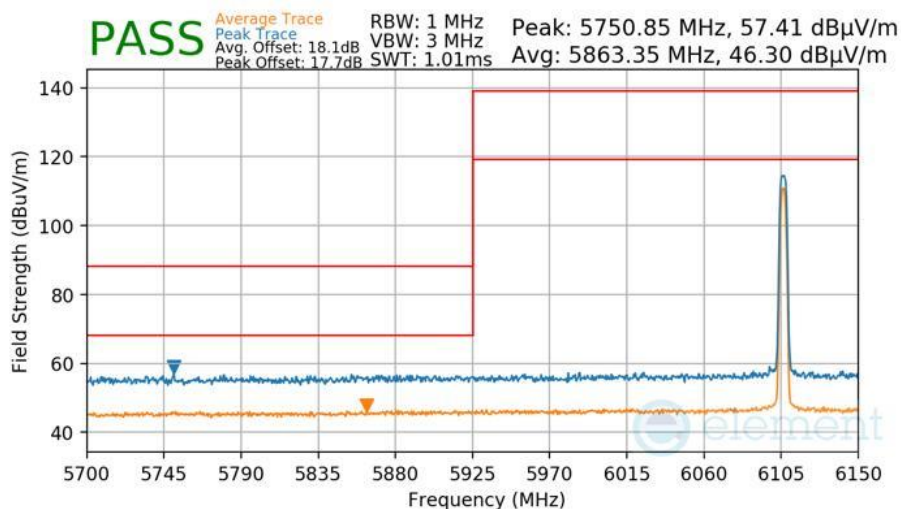


Plot 7-473 Radiated Lower Band Edge Measurement TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 297 of 330


V 11.0 06/2025

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

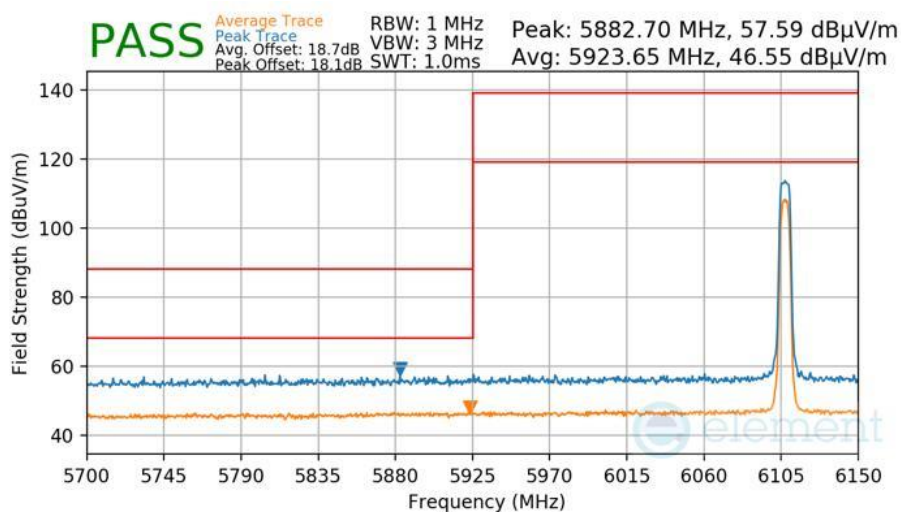

Plot 7-474 Radiated Lower Band Edge Measurement TxBF Primary

Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

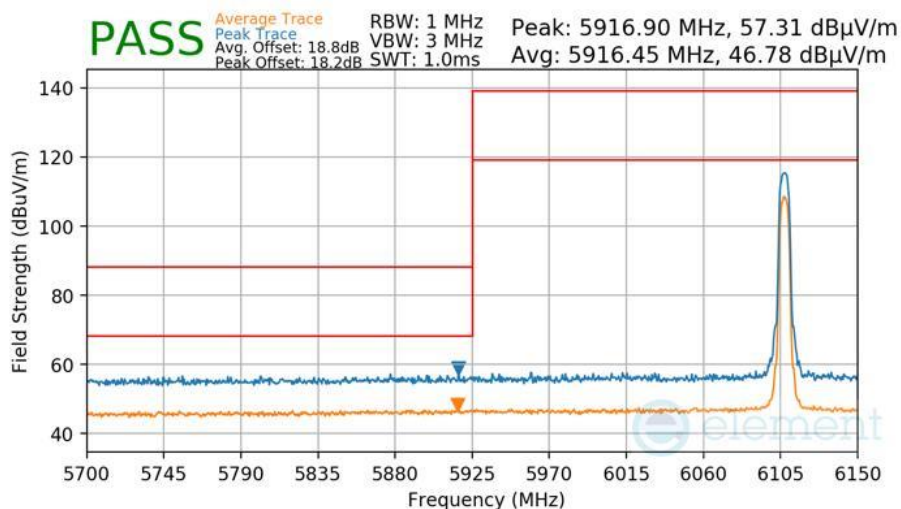


Plot 7-475 Radiated Lower Band Edge Measurement TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 298 of 330


V 11.0 06/2025

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109MHz

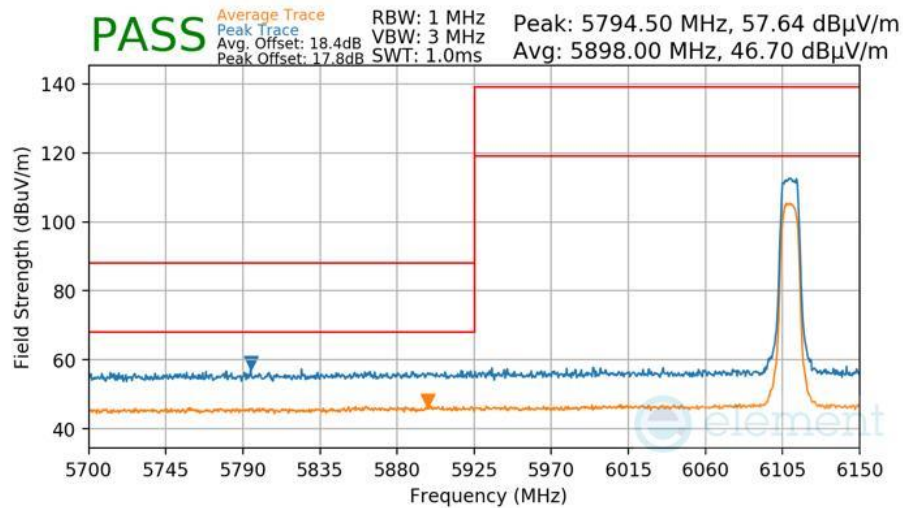

Plot 7-476 Radiated Lower Band Edge Measurement TxBF Primary

Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109MHz

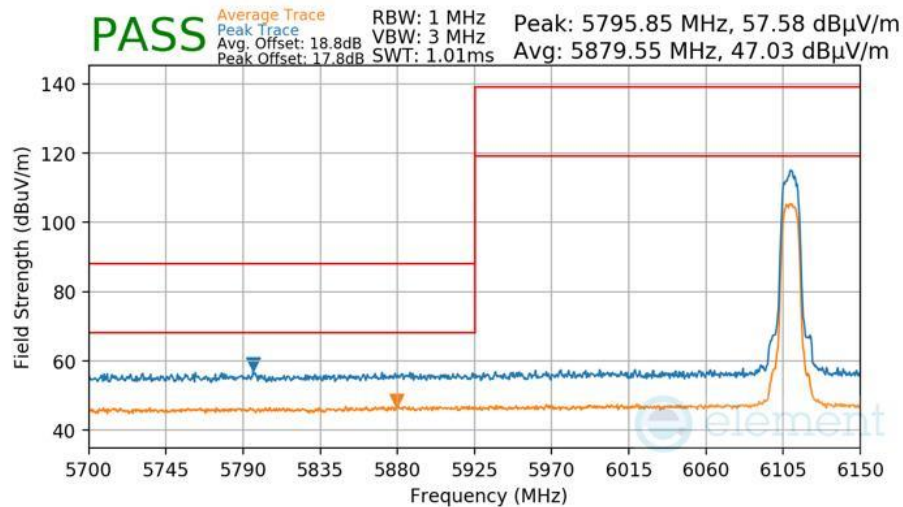


Plot 7-477 Radiated Lower Band Edge Measurement TxBF Primary

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 299 of 330

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

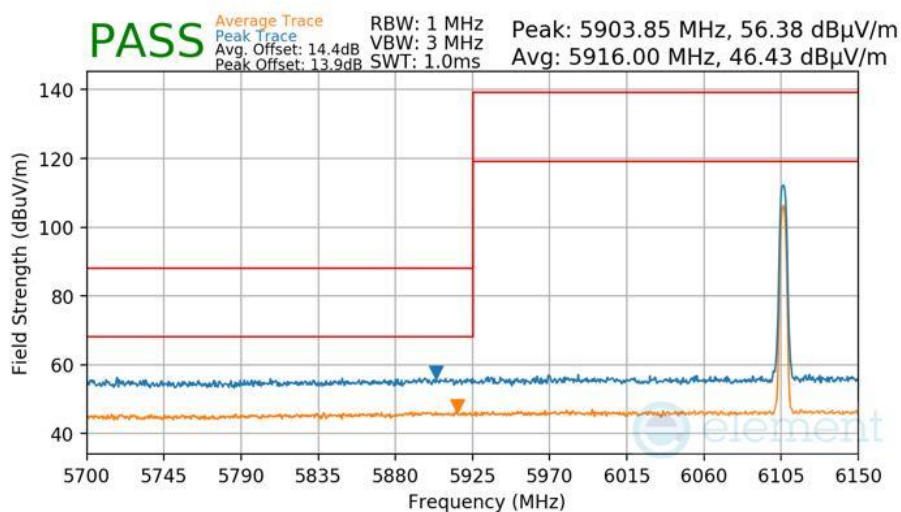

Plot 7-478 Radiated Lower Band Edge Measurement TxBF Primary


FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 300 of 330	

V 11.0 06/2025

7.8.7 TxBF Diversity Radiated Band Edge Measurements


§15.407(b.1)(b.2) §15.205 §15.209

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106MHz

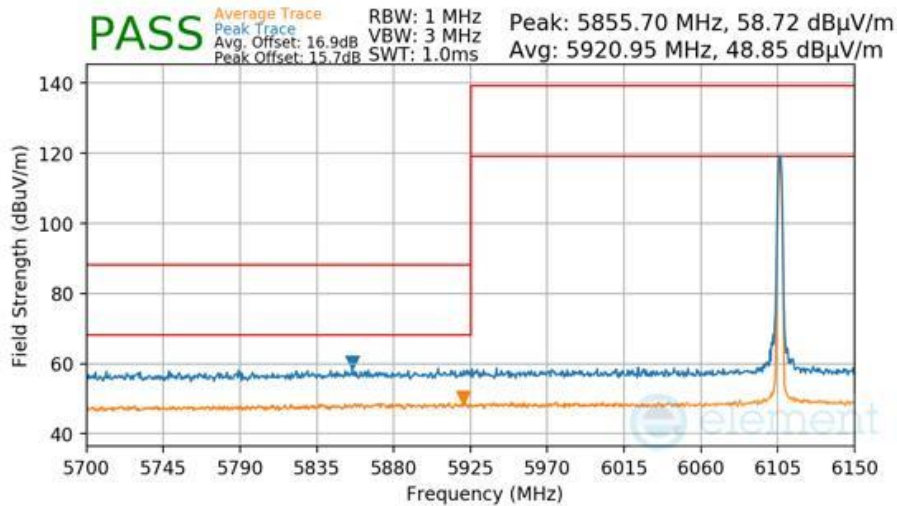

Plot 7-479 Radiated Lower Band Edge Measurement TxBF Diversity

Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	6106MHz

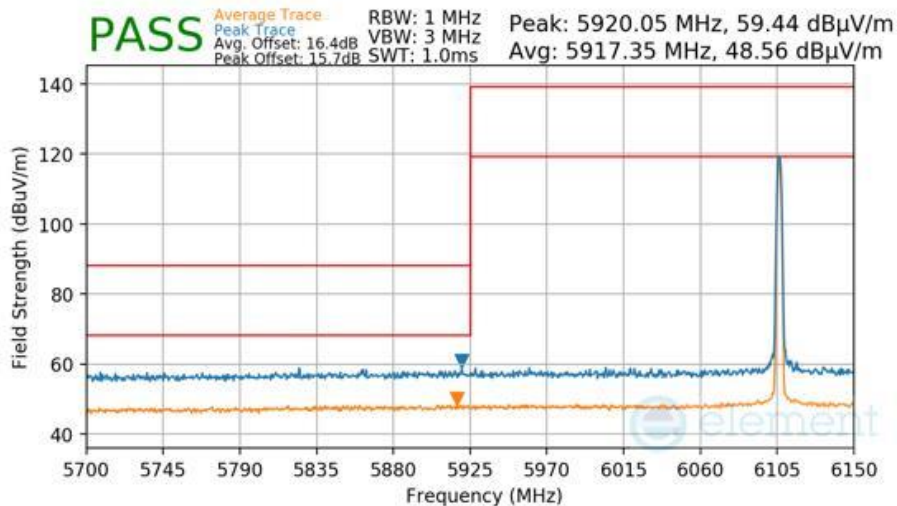


Plot 7-480 Radiated Lower Band Edge Measurement TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 301 of 330

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

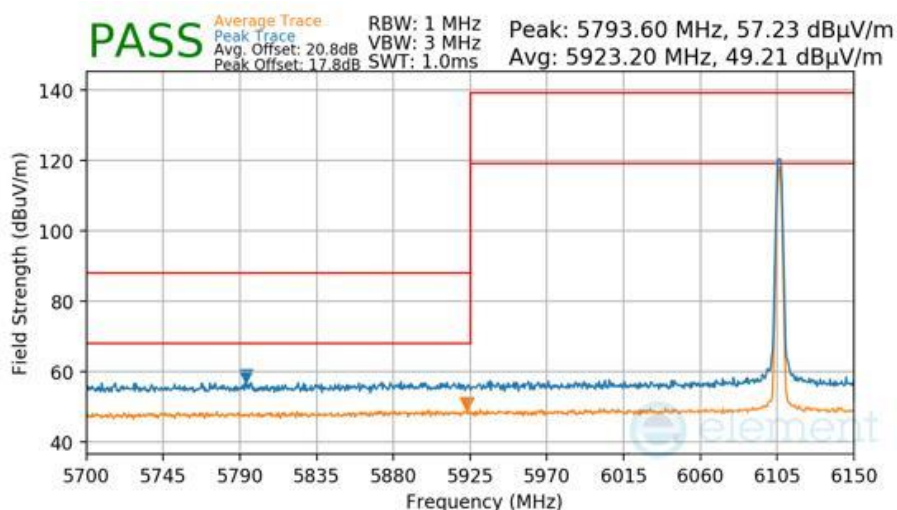

Plot 7-481 Radiated Lower Band Edge Measurement TxBF Diversity

Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

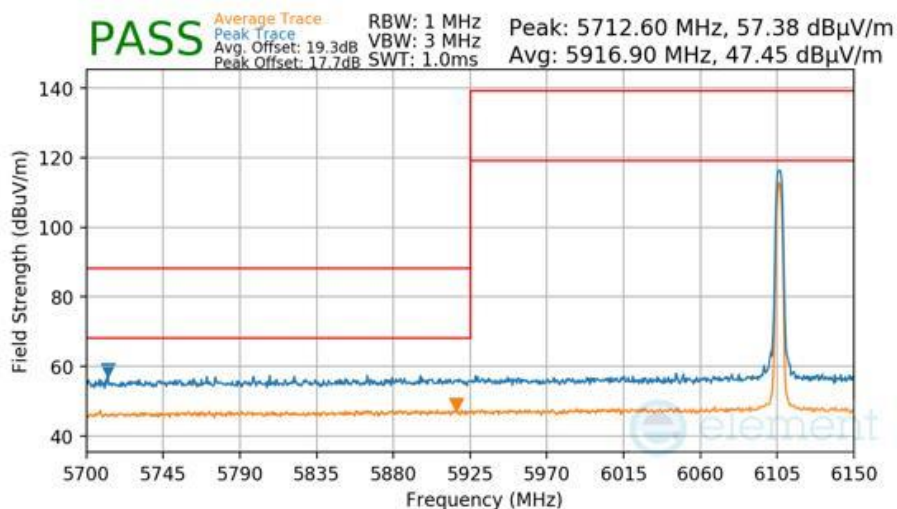


Plot 7-482 Radiated Lower Band Edge Measurement TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 302 of 330


V 11.0 06/2025

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

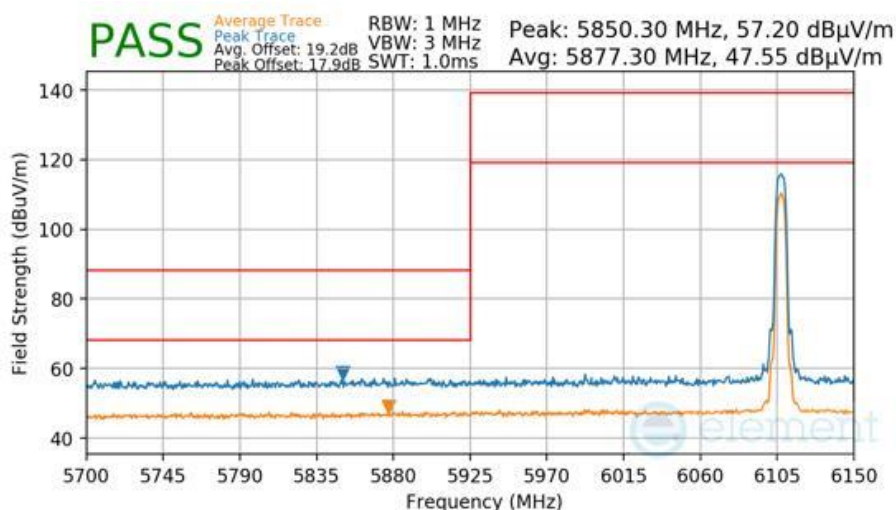

Plot 7-483 Radiated Lower Band Edge Measurement TxBF Diversity

Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

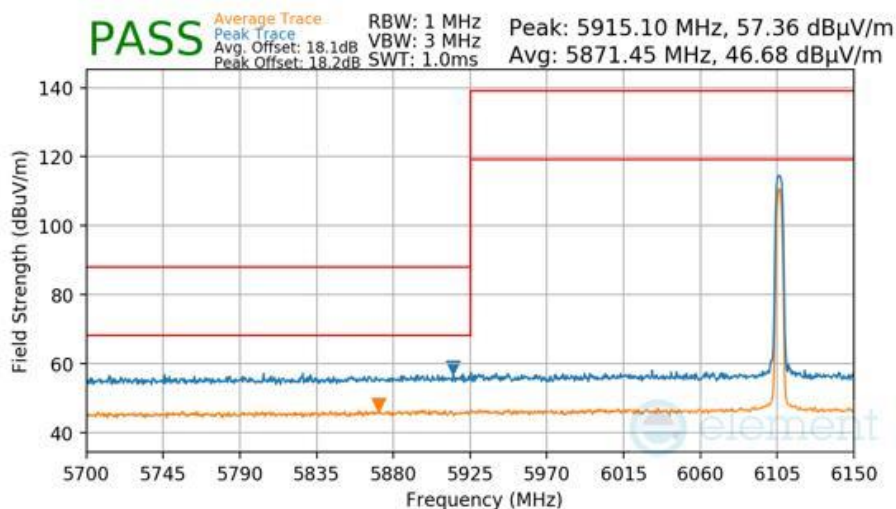

Plot 7-484 Radiated Lower Band Edge Measurement TxBF Diversity

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-11-R4.BCG	Test Dates: 05/12/2025 - 08/13/2025	EUT Type: Tablet Device	Page 303 of 330

V 11.0 06/2025