



ELEMENT MATERIALS TECHNOLOGY

(formerly PCTEST)

18855 Adams Court, Morgan Hill, CA 95037 USA

Tel. 408.538.5600

<http://www.element.com>

MEASUREMENT REPORT

FCC PART 15.407 / ISSED RSS-248 UNII 6GHz OFDM 802.11a/ax/be (OFDM)

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

5/12/2025 - 8/26/2025

Test Report Issue Date:

9/2/2025

Test Site/Location:

Element Materials Technology, Morgan Hill, CA, USA

Test Report Serial No.:

1C2504170038-15-R2.BCG

FCC ID:

BCGA3357

IC:

579C-A3357

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A3357

EUT Type:

Tablet Device

Frequency Range:

5955 – 7115MHz

Modulation Type:

OFDM

FCC Classification:

15E 6GHz Low Power Dual Client (6CD)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISSED Specification:

RSS-248 Issue 3

Test Procedure(s):

ANSI C63.10-2020, KDB 789033 D02 v02r01

KDB 662911 D01 v02r01, KDB 987594 D02 v03

KDB 987594 D03 v03r04, KDB 987594 D04 v03

KDB 987594 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2020 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2504170038-15-R2.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 1 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	Element Materials Technology Test Location	4
1.3	Test Facility / Accreditations	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities	5
2.3	Antenna Description	9
2.4	Test Support Equipment	10
2.5	Test Configuration	10
2.6	Software and Firmware	11
2.7	EMI Suppression Device(s)/Modifications	11
3.0	DESCRIPTION OF TESTS	12
3.1	Evaluation Procedure	12
3.2	AC Line Conducted Emissions	12
3.3	Radiated Emissions	13
3.4	Environmental Conditions	13
4.0	ANTENNA REQUIREMENTS	14
5.0	MEASUREMENT UNCERTAINTY	15
6.0	TEST EQUIPMENT CALIBRATION DATA	16
7.0	TEST RESULTS	17
7.1	Summary	17
7.2	26dB & 99% Bandwidth Measurement	18
7.3	Conducted Output Power and Max EIRP Measurement	46
7.4	Maximum Power Spectral Density	61
7.5	In-Band Emissions	108
7.6	Contention Based Protocol	146
7.7	Radiated Spurious Emissions – Above 1GHz	167
7.8	Radiated Spurious Emissions – Below 1GHz	228
7.9	AC Line-Conducted Emissions Measurement	233
8.0	CONCLUSION	239


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 2 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						Primary Summed		Diversity Summed	
				Antenna WF5B		Antenna WF8		Antenna WF7		Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)
				Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)				
5	20	802.11a/be	5955 - 6415	8.202	9.14	8.551	9.32	6.933	8.41	8.361	9.22	7.604	8.81
6		802.11a/be	6435 - 6515	6.013	7.79	8.486	9.29	8.291	9.19	6.808	8.33	7.977	9.02
7		802.11a/be	6535 - 6875	7.905	8.98	7.813	8.93	6.657	8.23	7.886	8.97	7.278	8.62
8		802.11a/be	6895 - 7115	8.304	9.19	8.119	9.10	4.536	6.57	8.228	9.15	5.853	7.67
5	40	802.11be	5965 - 6405	16.692	12.23	16.192	12.09	13.474	11.30	16.606	12.20	14.623	11.65
6		802.11be	6445 - 6525	15.230	11.83	16.485	12.17	15.566	11.92	15.734	11.97	15.376	11.87
7		802.11be	6565 - 6845	15.718	11.96	16.073	12.06	13.443	11.28	15.916	12.02	14.489	11.61
8		802.11be	6885 - 7085	15.542	11.92	16.410	12.15	8.714	9.40	15.679	11.95	11.440	10.58
5	80	802.11be	5985 - 6385	32.923	15.18	33.783	15.29	28.125	14.49	33.057	15.19	29.651	14.72
6		802.11be	6465	23.856	13.78	33.235	15.22	31.945	15.04	27.608	14.41	32.949	15.18
7		802.11be	6545 - 6865	33.037	15.19	32.764	15.15	27.977	14.47	31.034	14.92	28.578	14.56
8		802.11be	6945 - 7025	33.620	15.27	30.953	14.91	18.548	12.68	31.572	14.99	22.878	13.59
5	160	802.11be	6025 - 6345	62.893	17.99	63.343	18.02	50.722	17.05	62.843	17.98	54.996	17.40
6		802.11be	6505	39.391	15.95	50.107	17.00	56.040	17.49	43.554	16.39	51.862	17.15
7		802.11be	6665 - 6825	60.034	17.78	62.345	17.95	50.536	17.04	59.819	17.77	54.079	17.33
8		802.11be	6985	62.158	17.94	61.249	17.87	34.166	15.34	62.274	17.94	45.124	16.54

EUT Overview Low Power Indoor

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						Primary Summed		Diversity Summed	
				Antenna WF5B		Antenna WF8		Antenna WF7		Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)
				Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)				
5	20	802.11a/be	5955 - 6415	124.108	20.94	105.682	20.24	109.421	20.39	247.172	23.93	218.273	23.39
6		802.11a/be	6435 - 6515	52.408	17.19	64.670	18.11	71.614	18.55	104.472	20.19	137.404	21.38
7		802.11a/be	6535 - 6855	77.553	18.90	80.205	19.04	65.133	18.14	154.525	21.89	130.617	21.16
5	40	802.11be	5965 - 6405	121.395	20.84	109.144	20.38	109.069	20.38	240.436	23.81	215.278	23.33
6		802.11be	6445 - 6525	76.103	18.81	76.718	18.85	71.023	18.51	151.705	21.81	141.254	21.50
7		802.11be	6565 - 6845	76.613	18.84	78.832	18.97	65.796	18.18	152.757	21.84	129.122	21.11
5		802.11be	5985 - 6385	120.199	20.80	106.611	20.28	105.293	20.22	232.809	23.67	215.278	23.33
6	80	802.11be	6465	49.579	16.95	63.533	18.03	69.167	18.40	103.276	20.14	136.773	21.36
7		802.11be	6545 - 6755	77.037	18.87	78.055	18.92	64.417	18.09	150.661	21.78	127.644	21.06
5		802.11be	6025 - 6345	124.853	20.96	107.325	20.31	110.078	20.42	248.313	23.95	215.774	23.34
6	160	802.11be	6505	52.036	17.16	65.554	18.17	72.410	18.60	103.992	20.17	137.088	21.37
7		802.11be	6665	76.436	18.83	77.839	18.91	65.178	18.14	150.314	21.77	130.617	21.16

EUT Overview Standard Power

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 3 of 239

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 4 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA3357** and **IC: 579C-A3357**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter while operating in the 6GHz band.

Test Device Serial No.: RPWJKH9CYJ, GD61J47D62, G4574YVFP6, LK49HQNCQ5, H9HHG5000JS0000SDF

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), 802.15.4, Bluetooth (1x, EDR, LE), Narrowband (NB) UNII (5GHz and 6GHz), WPT

This device supports BT Beamforming.

This device supports channel puncturing and channel bandwidth reduction.

Standard Power (SP) mode is supported in U-NII Bands 5 and 7 for FCC and U-NII Bands 5, 6 and 7 for ISSED. Low Power Indoor (LPI) mode is supported in U-NII Bands 5, 6, 7, 8. Throughout report, data of Standard Power mode is denoted as SP while data of Low Power Indoor mode is denoted as LPI.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 5 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Band 5

Ch.	Frequency (MHz)
1	5955
:	:
45	6175
:	:
93	6415

Band 6

Ch.	Frequency (MHz)
97	6435
:	:
105	6475
:	:
113	6515

Band 7

Ch.	Frequency (MHz)
117	6535
:	:
149	6695
:	:
185	6875

Band 8

Ch.	Frequency (MHz)
189	6895
:	:
209	6995
:	:
233	7115

Table 2-1. 802.11a/ax/be (20MHz) Frequency / Channel Operations

Band 5

Ch.	Frequency (MHz)
3	5965
:	:
43	6165
:	:
91	6405

Band 6

Ch.	Frequency (MHz)
99	6445
:	:
107	6485
:	:
115	6525

Band 7

Ch.	Frequency (MHz)
123	6565
:	:
155	6725
:	:
179	6845

Band 8

Ch.	Frequency (MHz)
187	6885
:	:
211	7005
:	:
227	7085

Table 2-2. 802.11ax/be (40MHz BW) Frequency / Channel Operations

Band 5

Ch.	Frequency (MHz)
7	5985
:	:
39	6145
:	:
87	6385

Band 6

Ch.	Frequency (MHz)
103	6465

Band 7

Ch.	Frequency (MHz)
119	6545
:	:
151	6705
:	:
183	6865

Band 8

Ch.	Frequency (MHz)
199	6945
:	:
215	7025

Table 2-3. 802.11ax/be (80MHz BW) Frequency / Channel Operations

Band 5

Ch.	Frequency (MHz)
15	6025
:	:
47	6185
:	:
79	6345

Band 6

Ch.	Frequency (MHz)
111	6505

Band 7

Ch.	Frequency (MHz)
143	6665
:	:
175	6825

Band 8

Ch.	Frequency (MHz)
207	6985

Table 2-4. 802.11ax/be (160MHz BW) Frequency / Channel Operations

6GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) KDB 789033 D02 v02r01 and ANSI C63.10-2020. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band	Duty Cycle [%]									
	Antenna WF5B		Antenna WF8		Antenna WF7		CDD/SDM Primary		CDD/SDM Diversity	
	Duty Cycle [%]	DCCF [dB]	Duty Cycle [%]	DCCF [dB]	Duty Cycle [%]	DCCF [dB]	Duty Cycle [%]	DCCF [dB]	Duty Cycle [%]	DCCF [dB]
a (Low Data Rate)	98.40	0.07	98.56	0.06	98.11	0.08	98.20	0.08	98.72	0.06
a (Mid Data Rate)	96.07	0.17	96.23	0.17	96.14	0.17	96.23	0.17	96.07	0.17
a (High Data Rate)	93.41	0.30	93.30	0.30	93.20	0.31	93.00	0.32	93.00	0.32
be(SU)(EHT20) (Low Data Rate)	98.24	0.08	98.24	0.08	97.81	0.10	98.02	0.09	98.06	0.09
be(SU)(EHT20) (Mid Data Rate)	94.60	0.24	94.43	0.25	94.43	0.25	94.49	0.25	94.25	0.26
be(SU)(EHT20) (High Data Rate)	90.68	0.43	90.87	0.42	91.22	0.40	90.87	0.42	90.78	0.42
be(SU)(EHT40) (Low Data Rate)	97.07	0.13	96.49	0.16	96.67	0.15	96.94	0.14	96.67	0.15
be(SU)(EHT40) (Mid Data Rate)	90.87	0.42	90.87	0.42	90.97	0.41	91.08	0.41	90.95	0.41
be(SU)(EHT40) (High Data Rate)	86.74	0.62	86.52	0.63	86.74	0.62	86.74	0.62	86.52	0.63
be(SU)(EHT80) (Low Data Rate)	94.54	0.24	94.02	0.27	94.21	0.26	94.21	0.26	94.21	0.26
be(SU)(EHT80) (Mid Data Rate)	86.02	0.65	86.20	0.65	86.02	0.65	86.46	0.63	86.02	0.65
be(SU)(EHT80) (High Data Rate)	82.07	0.86	81.85	0.87	81.85	0.87	81.21	0.90	81.79	0.87
be(SU)(EHT160) (Low Data Rate)	90.45	0.44	90.84	0.42	90.45	0.44	90.57	0.43	90.45	0.44
be(SU)(EHT160) (Mid Data Rate)	81.26	0.90	81.26	0.90	81.79	0.87	81.21	0.90	81.21	0.90
be(SU)(EHT160) (High Data Rate)	78.31	1.06	77.89	1.09	78.31	1.06	78.23	1.07	78.31	1.06

Table 2-5. Measured Duty Cycles

CDD/SDM Primary = Antenna WF5B + Antenna WF8

CDD/SDM Diversity = Antenna WF8 + Antenna WF7

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 7 of 239

1. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO			CDD			SDM			STBC		
		Antenna WF5B	Antenna WF8	Antenna WF7	Antenna WF5B	Antenna WF8	Antenna WF7	Antenna WF5B	Antenna WF8	Antenna WF7	Antenna WF5B	Antenna WF8	Antenna WF7
6GHz	11a	✓	✓	✓	✓	✓	✓	✗	✗	✗	✗	✗	✗
	11ax/be(SU) (20MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax/be(SU) (40MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax/be(SU) (80MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax/be(SU) (160MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Table 2-6. WIFI Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

STBC = Space-Time Block Coding – 2Tx Function

2. The device supports the following data rates (shown in Mbps):

802.11a 20MHz	MCS Index		Spatial Stream	OFDM (802.11ax/be)												
				20MHz			40MHz			80MHz			160MHz			
	HE	EHT		0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	
6	0	0	1	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3	Low Rate
9	1	1	1	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5	
12	2	2	1	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.5	216.2	204.2	183.8	
18	3	3	1	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245	Mid Rate
24	4	4	1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5	
36	5	5	1	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490	
48	6	6	1	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3	High Rate
54	7	7	1	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5	
-	8	8	1	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735	
-	9	9	1	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	960.8	907.4	816.7	
-	10	10	1	129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.8	918.8	
-	11	11	1	143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8	
6	0	0	2	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5	Low Rate
9	1	1	2	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245	
12	2	2	2	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5	
18	3	3	2	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490	Mid Rate
24	4	4	2	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735	
36	5	5	2	137.6	130	117	275.3	260	234	576.5	544.4	490	1152.9	1089	980	
48	6	6	2	154.9	146.3	131.6	309.8	292.6	263.3	648.5	612.5	551.3	1296.9	1225	1102.5	High Rate
54	7	7	2	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225	
-	8	8	2	206.5	195	175.5	412.9	390	351	864.7	816.7	735	1729.4	1633.3	1470	
-	9	9	2	229.4	216.7	195	458.8	433	390	960.8	907.4	816.7	1921.6	1814.8	1633.3	
-	10	10	2	258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	2161.8	2041.7	1837.5	
-	11	11	2	286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	2402	2268.5	2041.7	

Table 2-7. Supported Data Rates

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 8 of 239

3. This device supports simultaneous transmission operations, which allows multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Bluetooth 2.4GHz	Thread	WLAN	NB UNII	WIFI 5GHz	WIFI 6GHz
		BDR, EDR, LE HDR, HDT	802.15.4	802.11 b/g/n/ax/be	BDR, EDR, LE HDR, HDT	802.11 a/n/ac/ax/be	802.11 a/ax/be
Ant WF7	Config 1	✓	✗	✗	✗	✓	✗
Ant WF7	Config 2	✓	✗	✗	✗	✗	✓
Ant WF7	Config 3	✗	✓	✗	✗	✓	✗
Ant WF7	Config 4	✗	✓	✗	✗	✗	✓
Ant WF7	Config 5	✗	✗	✓	✓	✗	✗
Ant WF7	Config 6	✗	✗	✓	✗	✓	✗
Ant WF7	Config 7	✗	✗	✓	✗	✗	✓
Ant WF8	Config 8	✓	✗	✗	✗	✓	✗
Ant WF8	Config 9	✓	✗	✗	✗	✗	✓
Ant WF8	Config 10	✗	✓	✗	✗	✓	✗
Ant WF8	Config 11	✗	✓	✗	✗	✗	✓
Ant WF8	Config 12	✗	✗	✓	✓	✗	✗
Ant WF8	Config 13	✗	✗	✓	✗	✓	✗
Ant WF8	Config 14	✗	✗	✓	✗	✗	✓

Table 2-8. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 1 and reported in RF Bluetooth and RF UNII 5GHz OFDM test reports.

2.3 Antenna Description

Following antenna gains provided by the manufacturer were used for the testing.

UNII Band	Frequency [GHz]	Highest Antenna Gain (dBi)			Lowest Antenna Gain (dBi)		
		Antenna WF5B	Antenna WF8	Antenna WF7	Antenna WF5B	Antenna WF8	Antenna WF7
5	5.925 – 6.105	2.0	-0.4	1.5	0.0	-0.5	-2.2
	6.105 – 6.265	0.5	0.4	-0.2	0.1	0.3	-0.7
	6.265 – 6.425	1.3	-0.5	0.4	1.3	-0.5	0.4
6	6.425 – 6.525	-0.3	-0.2	1.1	-0.3	-0.2	1.1
7	6.525 – 6.875	1.4	0.6	0.7	-0.3	-0.5	-0.4
8	6.875 – 7.125	1.9	0.0	-0.7	1.2	-1.8	-3.8

Table 2-9. Antenna Gains

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 9 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02H604EQ05D
	w/AC/DC Adapter	Model:	A2166	S/N:	C4H042705ZNPM0WA6
2	Apple USB-C Cable	Model:	Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable	Model:	A246C	S/N:	DWH80115BK826GV19
	w/ AC Adapter	Model:	A2305	S/N:	C4H95160004PF4F4V
4	Apple Pencil	Model:	A2538	S/N:	KJ26TCFXJW
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A
6	Netgear	Model:	RAXE500	S/N:	6JX215GA10A5

Table 2-10. Test Support Equipment List

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2020, KDB 789033 D02 v02r01 and KDB 987594 D02 v03. ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel were reported.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

802.11be-mode test data provided in this report covers 802.11ax as target powers are identical.

802.11ax/be HE20/40/80/160 2TX SDM mode test data provided in this report covers 802.11ax/be HE20/40/80/160 2TX STBC mode.

The data rates have been categorized into three groups: low, middle, and high data rates (see Table 2-7). All three groups have been investigated, and only the worst-case data rate has been reported.

For 802.11be-RU test results, see separate UNII 6GHz OFDMA report 1C2504170038-16.BCG.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 10 of 239

2.6 Software and Firmware

The test was conducted with firmware version 23A256 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 11 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2020) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 12 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 13 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 14 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	2.07
Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz - 1GHz)	4.85
Radiated Disturbance (1 - 18GHz)	5.08
Radiated Disturbance (>18GHz)	5.22

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 15 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance with the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Anritsu	ML2496A	Power Meter	2/10/2025	Annual	2/10/2026	1306009
Anritsu	MA2411B	Pulse Power Sensor	2/10/2025	Annual	2/10/2026	1315051
Anritsu	MA2411B	Pulse Power Sensor	2/10/2025	Annual	2/10/2026	1339027
ATM	180-442-KF	20dB Nominal Gain Horn Antenna	3/24/2025	Annual	3/24/2026	T058601-02
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	9/25/2024	Annual	9/25/2025	00240109
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz RF Cable/Attenuator *	6/10/2025	Annual	6/10/2026	-
Fairview Microwave	FM2CP1122-10	Directional Coupler *	6/10/2025	Annual	6/10/2026	1946
Keysight Technology	N9040B	UXA Signal Analyzer	9/5/2024	Annual	9/5/2025	MY61320121
Keysight Technology	N9030A	PXA Signal Analyzer	10/16/2024	Annual	10/16/2025	MY49430494
Mini-Circuits	ZN2PD-9G	Power Splitter*	8/16/2024	Annual	8/16/2025	SF456200530
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/14/2024	Annual	8/14/2025	101648
Rohde & Schwarz	FSW43	Spectrum Analyzer 2Hz to 43GHz	11/21/2024	Annual	11/21/2025	104093
Rohde & Schwarz	ESW44	EMI Test Receiver	10/17/2024	Annual	10/17/2025	101668
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	9/20/2024	Annual	9/20/2025	102327
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/3/2025	Annual	6/3/2026	100052
Rohde & Schwarz	HFH2-Z2	Loop Antenna	5/12/2025	Annual	5/12/2026	100546
Rohde & Schwarz	ENV216	Two-Line V-Network	4/24/2025	Annual	4/24/2026	101364
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/21/2024	Annual	10/21/2025	187423
Rohde & Schwarz	CMX500	Wideband Radio Communication Tester	6/21/2024	Annual	6/21/2025	101898
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	9/18/2024	Annual	9/18/2025	00358

Table 6-1. Test Equipment List

Note:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- * denotes passive equipment that have been internally verified/calibrated.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 16 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA3357
 IC: 579C-A3357
 FCC Classification: 15E 6GHz Low Power Dual Client (6CD)

FCC Part Section(s) / KDB Reference	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049, 15.407(a)(11)	RSS Gen [6.7], RSS-248 [4.4]	Occupied Bandwidth/ 26dB Bandwidth	99% of the occupied bandwidth of any channel must be contained within each of its respective U-NII sub bands < 320MHz (5.925 - 7.125GHz)	CONDUCTED	PASS	Section 7.2
15.407(a)(8)	RSS-248 [4.5.3]	Maximum Power Spectral Density	< -1dBm/MHz e.i.r.p. for Low Power Indoor		PASS	Section 7.4
15.407(a)(7)	RSS-248 [4.5.5]		< 17dBm/MHz e.i.r.p. for Standard Power		PASS	
15.407(a)(8)	RSS-248 [4.5.3]	Maximum EIRP	< 24dBm over the frequency band of operation		PASS	Section 7.3
15.407(a)(7)	RSS-248 [4.5.5]		< 30dBm over the frequency band of operation		PASS	
15.407(b)(7)	RSS-248 [4.6.2]	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(7) and RSS-248 [4.6.2] b)		PASS	Section 7.5
15.407(d)(6)	RSS-248 [4.7]	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty		PASS	Section 7.6
15.407(a)(7)	RSS-248 [4.5.5]	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	EUT maintains its power level at least 6 dB lower than that of the standard-power access point		PASS	See UNII 6GHz OFDMA Report 1C25041700 38-16.BCG
987594 D02 v03	987594 D02 v03	Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	EUT maximum power level shall not exceed 30dBm EIRP when connected to Standard Power AP, and 24dBm EIRP when connected to Low Power Indoor AP		PASS	
15.407(b)(6)	RSS-248 [4.6.2]	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band	RADIATED	PASS	Section 7.7
15.205, 15.209	RSS-248 [4.6.2] RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.7, 7.8
15.407(b)(9)	RSS-Gen [8.8]	AC Conducted Emissions (150kHz – 30MHz)	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Conducted Automation,” Version 1.4.0.
- 5) For radiated testing, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 3.4.2.
- 6) All radiated measurements were tested at the highest supported power setting per band.

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 17 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2 26dB & 99% Bandwidth Measurement

\$2.1049; \$15.407; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

Test Procedure Used

ANSI C63.10-2020 – Section 12.5.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = in the range of 1% to 5% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All data rates and antenna configurations were investigated, and tabular data has been reported. Only the worst-case plot per bandwidth was reported.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 18 of 239


V 11.0 5/2025

7.2.1 Antenna WF5B 26dB & 99% Bandwidth Measurements – SP


	Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	6Mbps	17.98	22.66	320	Pass
	6175	45	a	6Mbps	17.99	22.77	320	Pass
	6415	93	a	6Mbps	18.00	23.12	320	Pass
	5955	1	be (20MHz)	MCS0	19.12	23.13	320	Pass
	6175	45	be (20MHz)	MCS0	19.07	22.86	320	Pass
	6415	93	be (20MHz)	MCS0	19.05	23.00	320	Pass
	5965	3	be (40MHz)	MCS3	38.02	45.21	320	Pass
	6165	43	be (40MHz)	MCS3	38.07	44.59	320	Pass
	6405	91	be (40MHz)	MCS3	38.06	44.87	320	Pass
	5985	7	be (80MHz)	MCS0	77.70	82.59	320	Pass
	6145	39	be (80MHz)	MCS5	77.59	82.54	320	Pass
	6385	87	be (80MHz)	MCS5	77.66	82.59	320	Pass
	6025	15	be (160MHz)	MCS5	156.78	164.69	320	Pass
Band 6	6185	47	be (160MHz)	MCS0	156.75	165.38	320	Pass
	6345	79	be (160MHz)	MCS0	156.59	166.52	320	Pass
	6435	97	a	6Mbps	17.96	23.21	320	Pass
	6475	105	a	18Mbps	17.86	22.95	320	Pass
	6515	113	a	6Mbps	17.97	22.93	320	Pass
	6435	97	be (20MHz)	MCS0	19.07	22.80	320	Pass
	6475	105	be (20MHz)	MCS0	19.08	23.36	320	Pass
	6515	113	be (20MHz)	MCS0	19.07	22.93	320	Pass
	6445	99	be (40MHz)	MCS3	38.02	44.58	320	Pass
	6485	107	be (40MHz)	MCS3	38.02	44.97	320	Pass
Band 7	6525	115	be (40MHz)	MCS3	38.05	44.16	320	Pass
	6465	103	be (80MHz)	MCS5	77.43	82.64	320	Pass
	6505	111	be (160MHz)	MCS5	156.61	164.88	320	Pass
	6535	117	a	6Mbps	17.99	22.70	320	Pass
	6695	149	a	6Mbps	17.97	22.86	320	Pass
	6855	181	a	6Mbps	17.99	22.63	320	Pass
	6535	117	be (20MHz)	MCS0	19.10	23.27	320	Pass
	6695	149	be (20MHz)	MCS0	19.07	22.95	320	Pass
	6855	181	be (20MHz)	MCS0	19.11	22.98	320	Pass
	6565	123	be (40MHz)	MCS0	38.05	44.32	320	Pass
	6725	155	be (40MHz)	MCS0	38.08	44.74	320	Pass
	6845	179	be (40MHz)	MCS0	38.03	44.47	320	Pass
	6545	119	be (80MHz)	MCS5	77.53	82.80	320	Pass
	6705	151	be (80MHz)	MCS5	77.52	82.69	320	Pass
	6785	167	be (80MHz)	MCS5	77.63	82.55	320	Pass
	6665	143	be (160MHz)	MCS0	156.68	165.31	320	Pass

Table 7-2. Conducted Bandwidth Measurements Antenna WF5B


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 19 of 239

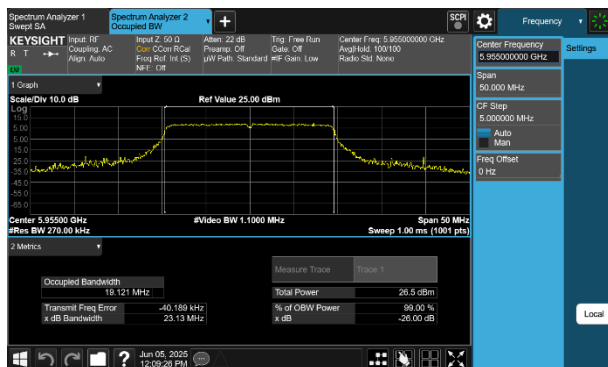


Plot 7-1 26dB BW & 99% OBW Antenna WF5B (20MHz BW 802.11be(SU) - Ch.1)

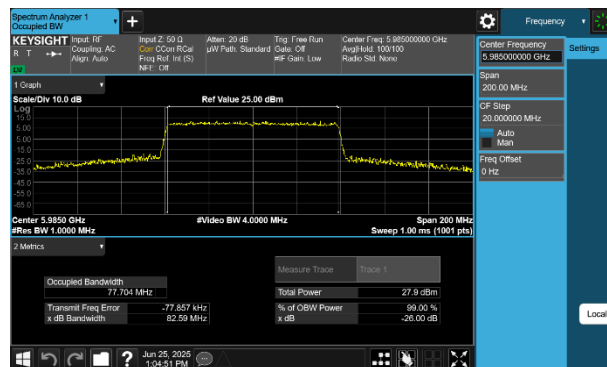

Plot 7-3 26dB BW & 99% OBW Antenna WF5B (80MHz BW 802.11be(SU) - Ch.7)

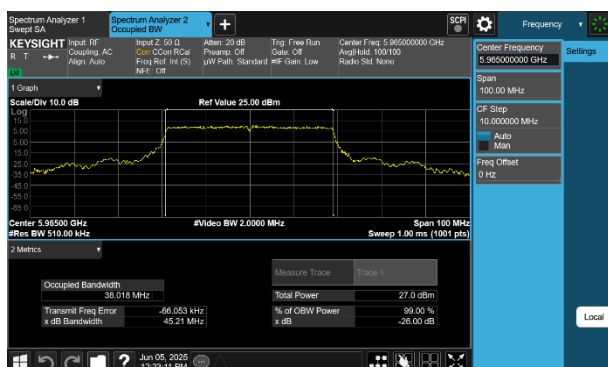


Plot 7-2 26dB BW & 99% OBW Antenna WF5B (40MHz BW 802.11be(SU) - Ch.3)

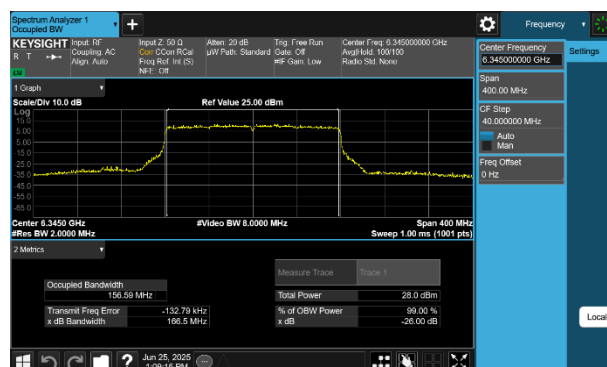


Plot 7-4 26dB BW & 99% OBW Antenna WF5B (160MHz BW 802.11be(SU) - Ch.79)


FCC ID: BCGA3357 IC: 579C-A3357	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 20 of 239

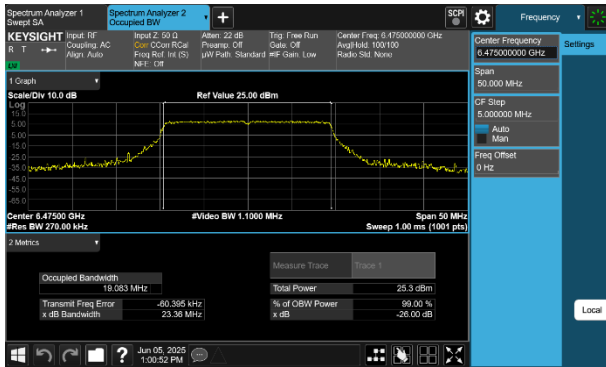


Plot 7-5 26dB BW & 99% OBW Antenna WF5B (20MHz BW 802.11be(SU) - Ch.105)

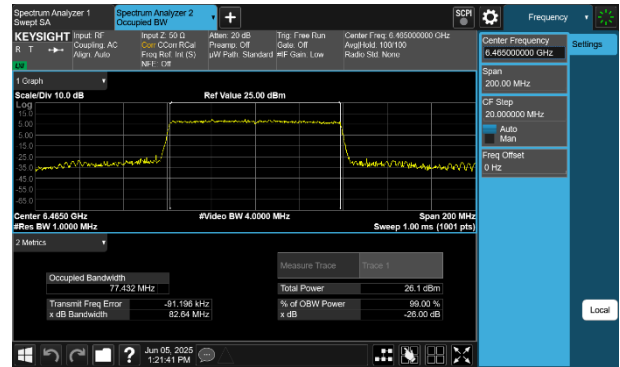

Plot 7-7 26dB BW & 99% OBW Antenna WF5B (80MHz BW 802.11be(SU) - Ch.103)




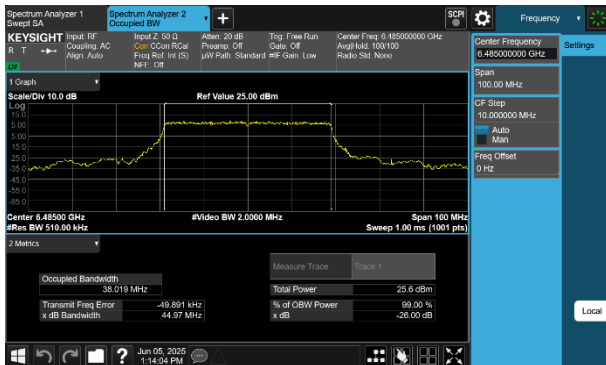


Plot 7-6 26dB BW & 99% OBW Antenna WF5B (40MHz BW 802.11be(SU) - Ch.107)

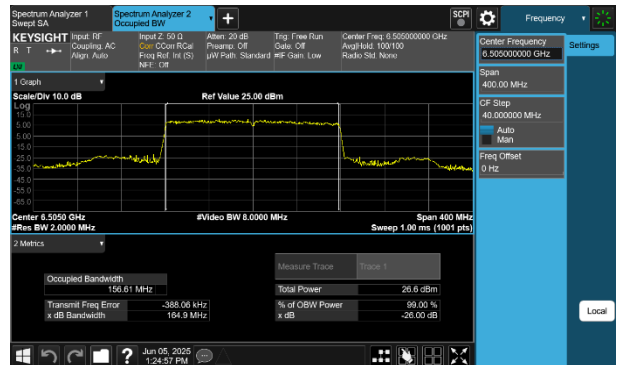

Plot 7-8 26dB BW & 99% OBW Antenna WF5B (160MHz BW 802.11be(SU) - Ch.111)

FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device		Page 21 of 239

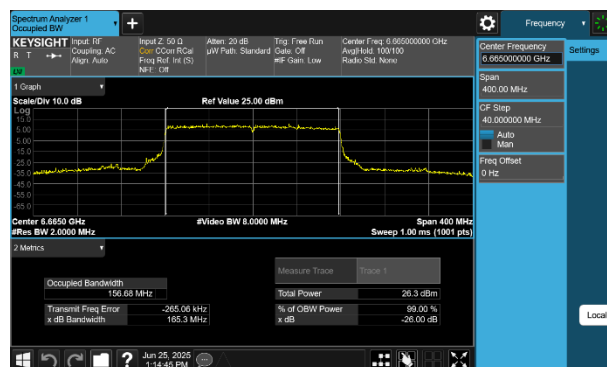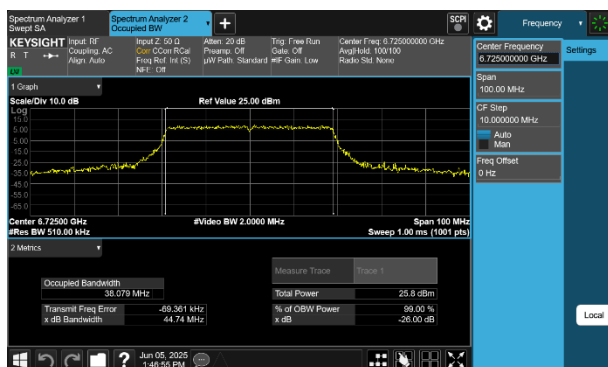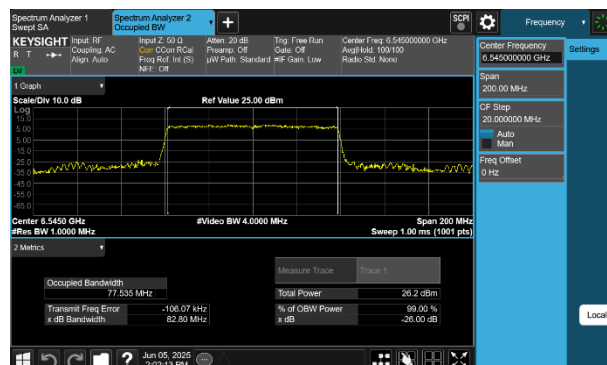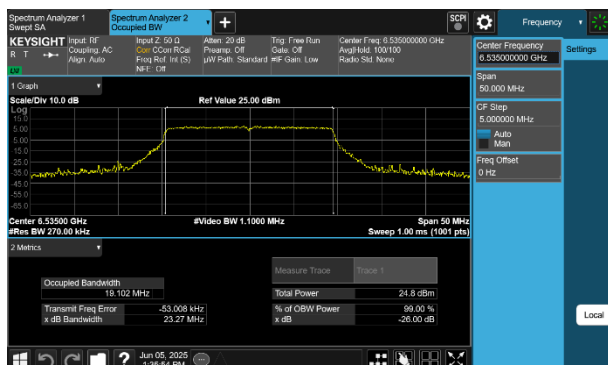




FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 22 of 239	

7.2.2 Antenna WF5B 26dB & 99% Bandwidth Measurements – LPI





	Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	6Mbps	17.94	22.37	320	Pass
	6175	45	a	6Mbps	17.94	22.74	320	Pass
	6415	93	a	6Mbps	17.99	22.67	320	Pass
	5955	1	be (20MHz)	MCS0	19.05	22.85	320	Pass
	6175	45	be (20MHz)	MCS0	19.08	22.77	320	Pass
	6415	93	be (20MHz)	MCS0	19.02	23.11	320	Pass
	5965	3	be (40MHz)	MCS5	38.02	44.08	320	Pass
	6165	43	be (40MHz)	MCS0	38.02	44.50	320	Pass
	6405	91	be (40MHz)	MCS0	38.04	44.31	320	Pass
	5985	7	be (80MHz)	MCS3	77.52	82.55	320	Pass
	6145	39	be (80MHz)	MCS5	77.52	82.55	320	Pass
	6385	87	be (80MHz)	MCS5	77.44	82.69	320	Pass
	6025	15	be (160MHz)	MCS5	156.16	170.20	320	Pass
	6185	47	be (160MHz)	MCS5	156.62	176.10	320	Pass
Band 6	6345	79	be (160MHz)	MCS5	156.28	175.76	320	Pass
	6435	97	a	6Mbps	17.96	22.95	320	Pass
	6475	105	a	6Mbps	18.02	22.71	320	Pass
	6515	113	a	6Mbps	17.96	22.74	320	Pass
	6435	97	be (20MHz)	MCS0	19.08	22.62	320	Pass
	6475	105	be (20MHz)	MCS0	19.02	22.55	320	Pass
	6515	113	be (20MHz)	MCS0	19.01	22.95	320	Pass
	6445	99	be (40MHz)	MCS3	38.01	44.10	320	Pass
	6485	107	be (40MHz)	MCS5	38.09	43.96	320	Pass
	6525	115	be (40MHz)	MCS0	38.03	44.15	320	Pass
Band 7	6465	103	be (80MHz)	MCS5	77.54	82.72	320	Pass
	6505	111	be (160MHz)	MCS5	156.55	172.12	320	Pass
	6535	117	a	6Mbps	17.94	22.71	320	Pass
	6695	149	a	6Mbps	17.97	22.84	320	Pass
	6875	185	a	6Mbps	17.99	22.71	320	Pass
	6535	117	be (20MHz)	MCS3	19.03	22.65	320	Pass
	6695	149	be (20MHz)	MCS0	19.04	22.88	320	Pass
	6875	185	be (20MHz)	MCS0	19.03	22.66	320	Pass
	6565	123	be (40MHz)	MCS0	38.00	44.38	320	Pass
	6725	155	be (40MHz)	MCS3	38.07	43.97	320	Pass
	6845	179	be (40MHz)	MCS0	38.00	44.36	320	Pass
	6545	119	be (80MHz)	MCS3	77.44	82.50	320	Pass
	6705	151	be (80MHz)	MCS3	77.56	82.79	320	Pass
	6865	183	be (80MHz)	MCS5	77.45	82.55	320	Pass
Band 8	6665	143	be (160MHz)	MCS5	156.43	168.88	320	Pass
	6825	175	be (160MHz)	MCS5	156.92	171.95	320	Pass
	6895	189	a	18Mbps	17.87	22.98	320	Pass
	6995	209	a	6Mbps	17.95	22.40	320	Pass
	7115	233	a	6Mbps	17.97	22.62	320	Pass
	6895	189	be (20MHz)	MCS0	19.02	22.99	320	Pass
	6995	209	be (20MHz)	MCS0	19.06	22.85	320	Pass
	7115	233	be (20MHz)	MCS0	19.03	22.80	320	Pass
	6885	187	be (40MHz)	MCS3	38.05	43.96	320	Pass
	7005	211	be (40MHz)	MCS3	38.03	44.11	320	Pass
	7085	227	be (40MHz)	MCS5	37.98	44.48	320	Pass
	6945	199	be (80MHz)	MCS0	77.46	82.50	320	Pass
	7025	215	be (80MHz)	MCS5	77.44	82.57	320	Pass
	6985	207	be (160MHz)	MCS5	156.51	168.47	320	Pass

Table 7-3. Conducted Bandwidth Measurements Antenna WF5B





FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 23 of 239

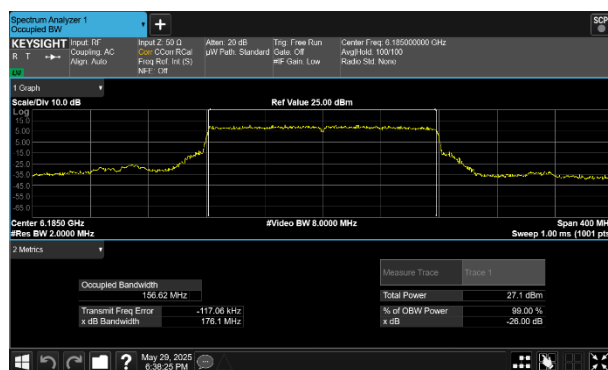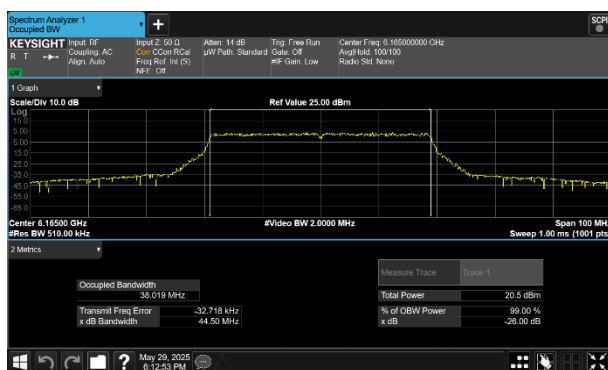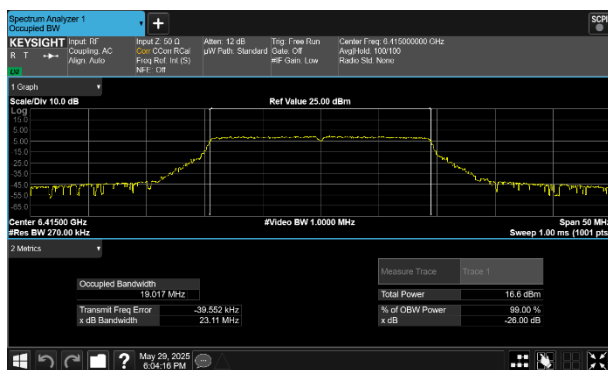


FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 24 of 239	

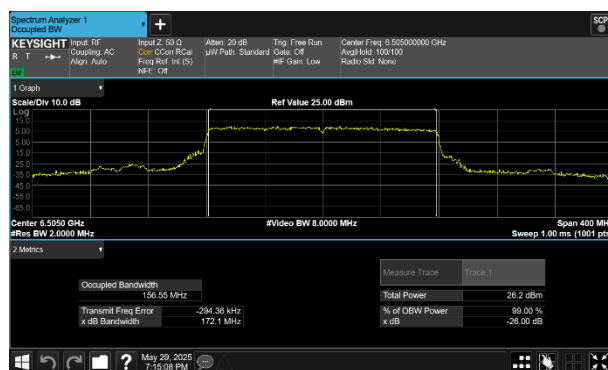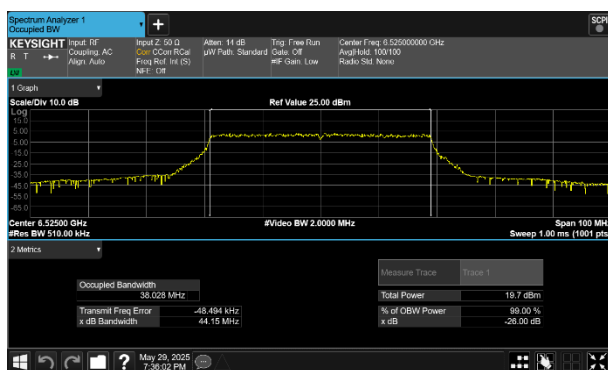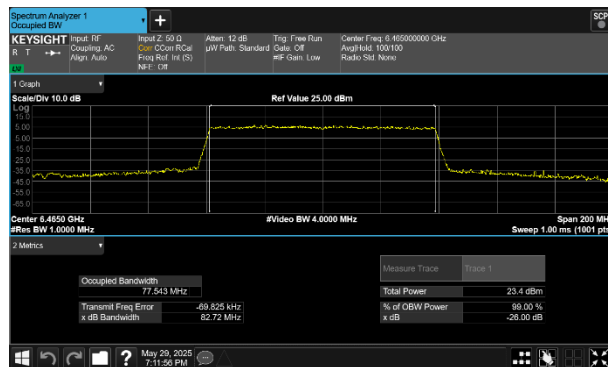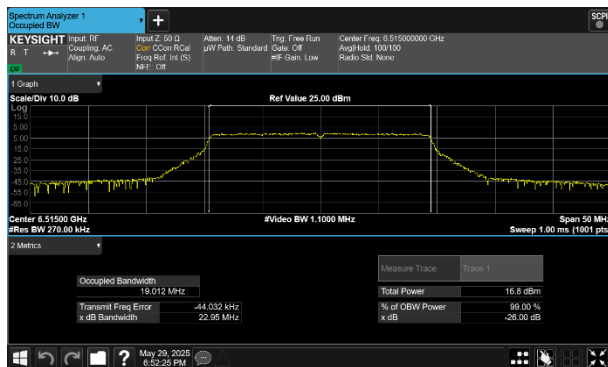


FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device		Page 25 of 239

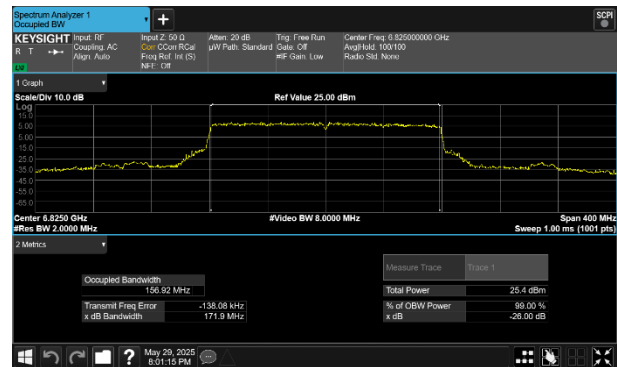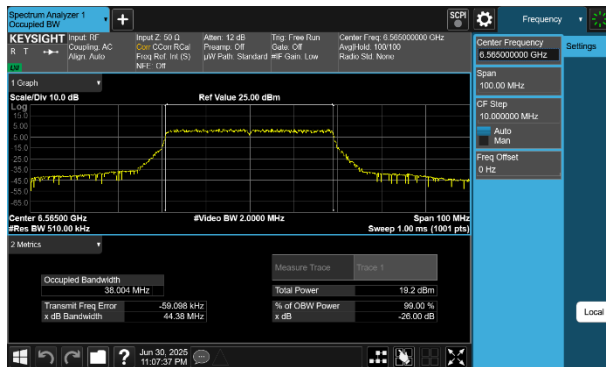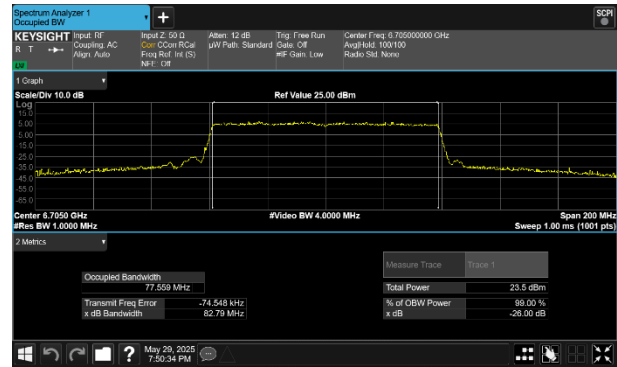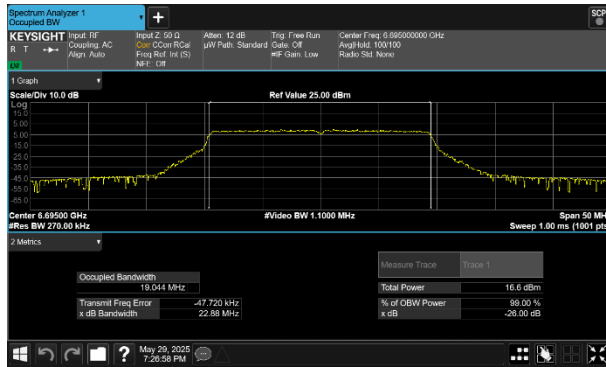


FCC ID: BCGA3357 IC: 579C-A3357	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 26 of 239

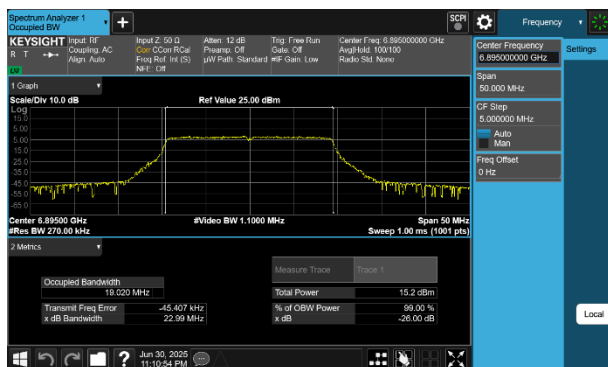


Plot 7-25 26dB BW & 99% OBW Antenna WF5B (20MHz BW
802.11be(SU) - Ch.189)

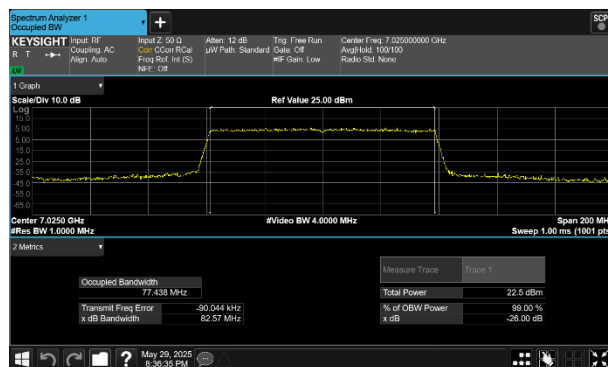

Plot 7-27 26dB BW & 99% OBW Antenna WF5B (80MHz BW
802.11be(SU) - Ch.215)

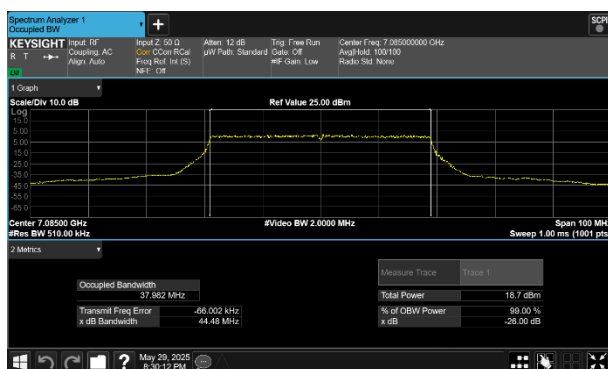

Plot 7-26 26dB BW & 99% OBW Antenna WF5B (40MHz BW
802.11be(SU) - Ch.227)

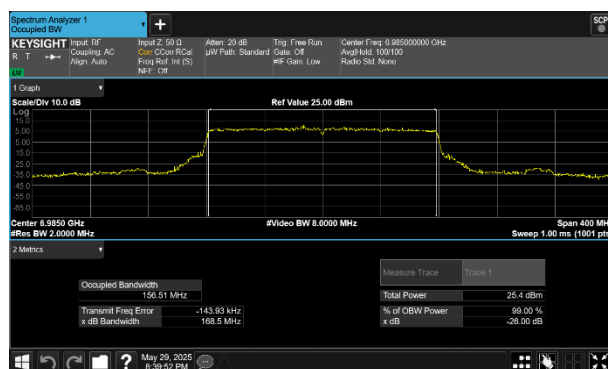

Plot 7-28 26dB BW & 99% OBW Antenna WF5B (160MHz BW
802.11be(SU) - Ch.207)




FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 27 of 239

7.2.3 Antenna WF8 26dB & 99% Bandwidth Measurements – SP


	Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	6Mbps	18.19	24.09	320	Pass
	6175	45	a	6Mbps	18.09	22.91	320	Pass
	6415	93	a	6Mbps	18.08	24.61	320	Pass
	5955	1	be (20MHz)	MCS0	19.12	23.26	320	Pass
	6175	45	be (20MHz)	MCS0	19.09	23.42	320	Pass
	6415	93	be (20MHz)	MCS0	19.11	23.73	320	Pass
	5965	3	be (40MHz)	MCS3	38.27	51.25	320	Pass
	6165	43	be (40MHz)	MCS0	38.18	46.78	320	Pass
	6405	91	be (40MHz)	MCS0	38.09	48.26	320	Pass
	5985	7	be (80MHz)	MCS5	77.66	82.61	320	Pass
	6145	39	be (80MHz)	MCS0	77.66	82.70	320	Pass
	6385	87	be (80MHz)	MCS0	77.62	82.45	320	Pass
	6025	15	be (160MHz)	MCS5	156.51	181.08	320	Pass
Band 6	6185	47	be (160MHz)	MCS5	156.69	178.85	320	Pass
	6345	79	be (160MHz)	MCS5	156.58	179.70	320	Pass
	6435	97	a	6Mbps	18.03	22.88	320	Pass
	6475	105	a	6Mbps	18.00	22.89	320	Pass
	6515	113	a	6Mbps	18.00	22.64	320	Pass
	6435	97	be (20MHz)	MCS0	19.06	23.12	320	Pass
	6475	105	be (20MHz)	MCS0	19.06	22.95	320	Pass
	6515	113	be (20MHz)	MCS0	19.06	23.36	320	Pass
	6445	99	be (40MHz)	MCS0	38.06	44.57	320	Pass
	6485	107	be (40MHz)	MCS3	38.06	44.73	320	Pass
Band 7	6525	115	be (40MHz)	MCS0	38.05	44.17	320	Pass
	6465	103	be (80MHz)	MCS0	77.64	82.45	320	Pass
	6505	111	be (160MHz)	MCS0	156.64	165.96	320	Pass
	6535	117	a	6Mbps	18.02	22.88	320	Pass
	6695	149	a	6Mbps	18.02	22.77	320	Pass
	6855	181	a	6Mbps	18.00	23.68	320	Pass
	6535	117	be (20MHz)	MCS0	19.05	22.88	320	Pass
	6695	149	be (20MHz)	MCS0	19.07	23.04	320	Pass
	6855	181	be (20MHz)	MCS0	19.09	22.98	320	Pass
	6565	123	be (40MHz)	MCS5	38.01	44.86	320	Pass
	6725	155	be (40MHz)	MCS3	38.05	44.72	320	Pass
	6845	179	be (40MHz)	MCS3	38.11	45.03	320	Pass
	6545	119	be (80MHz)	MCS5	77.66	82.75	320	Pass
	6705	151	be (80MHz)	MCS0	77.56	82.82	320	Pass
	6785	167	be (80MHz)	MCS5	77.52	82.72	320	Pass
	6665	143	be (160MHz)	MCS0	156.84	166.00	320	Pass

Table 7-4. Conducted Bandwidth Measurements Antenna WF8


FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 28 of 239

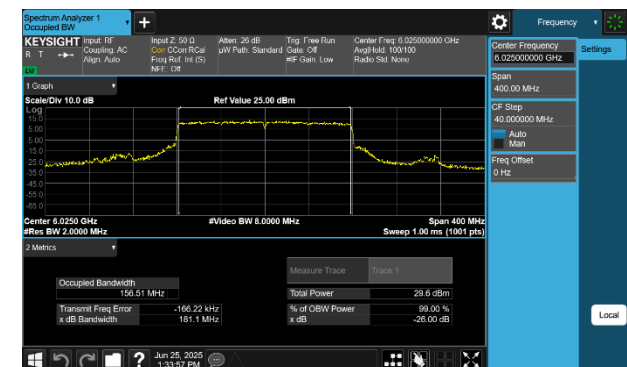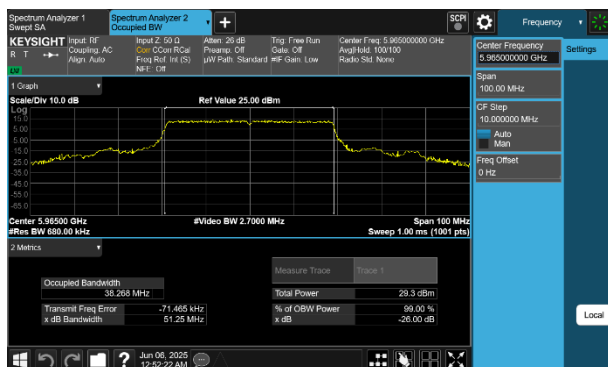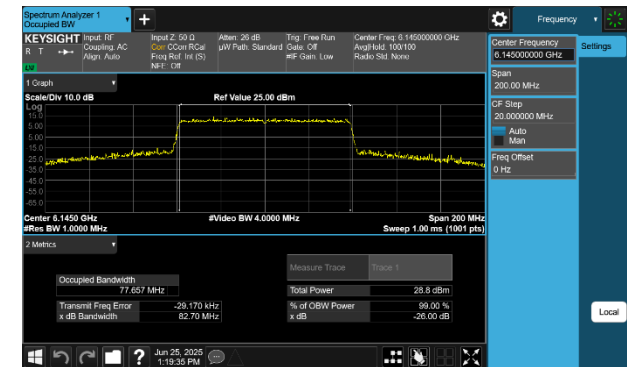


FCC ID: BCGA3357 IC: 579C-A3357	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 29 of 239

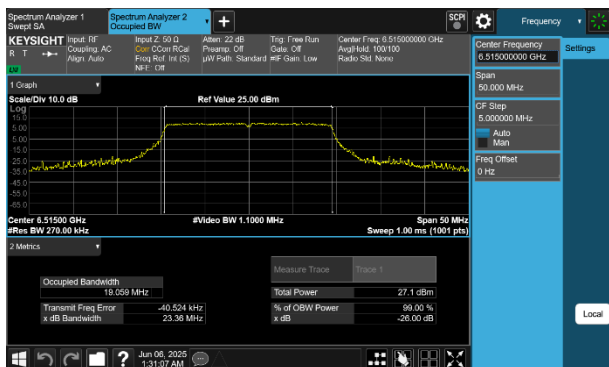


Plot 7-33 26dB BW & 99% OBW Antenna WF8 (20MHz BW 802.11be(SU) - Ch.113)

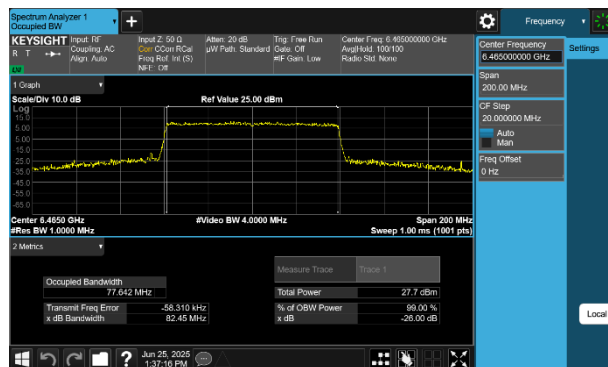

Plot 7-35 26dB BW & 99% OBW Antenna WF8 (80MHz BW 802.11be(SU) - Ch.103)

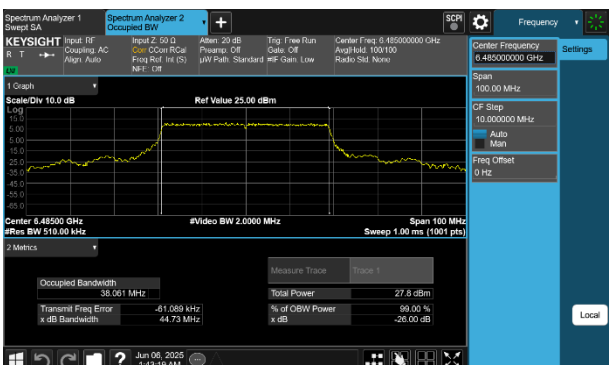


Plot 7-34 26dB BW & 99% OBW Antenna WF8 (40MHz BW 802.11be(SU) - Ch.107)

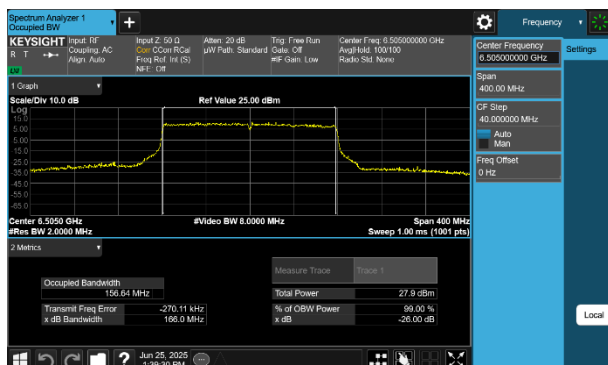

Plot 7-36 26dB BW & 99% OBW Antenna WF8 (160MHz BW 802.11be(SU) - Ch.111)


FCC ID: BCGA3357 IC: 579C-A3357	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 30 of 239

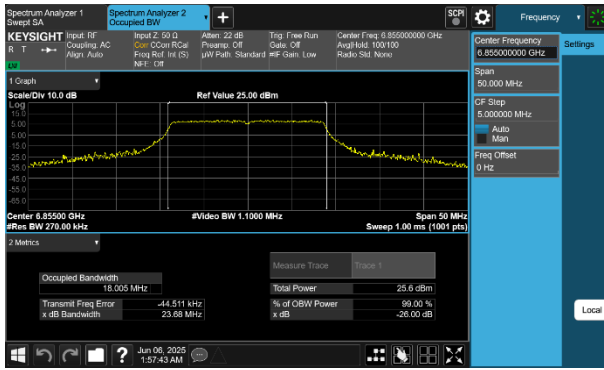


Plot 7-37 26dB BW & 99% OBW Antenna WF8 (20MHz BW 802.11a - Ch.181)



Plot 7-39 26dB BW & 99% OBW Antenna WF8 (80MHz BW 802.11be(SU) - Ch.151)

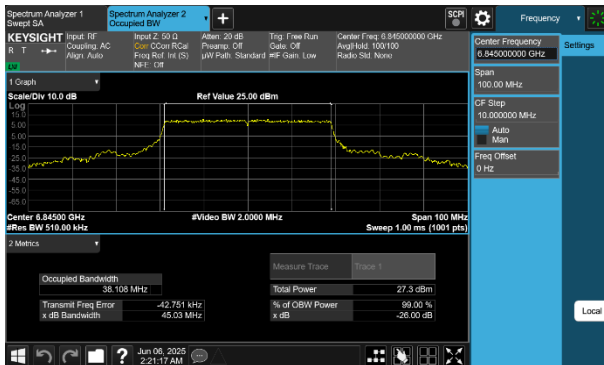

Plot 7-38 26dB BW & 99% OBW Antenna WF8 (40MHz BW 802.11be(SU) - Ch.179)

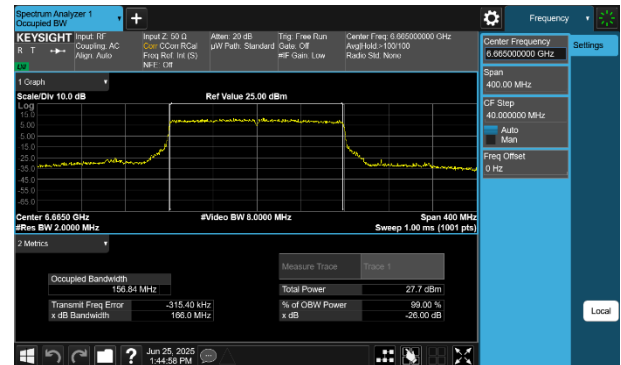

Plot 7-40 26dB BW & 99% OBW Antenna WF8 (160MHz BW 802.11be(SU) - Ch.143)




FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG		Page 31 of 239
Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	

7.2.4 Antenna WF8 26dB & 99% Bandwidth Measurements – LPI


	Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	36Mbps	17.83	22.27	320	Pass
	6175	45	a	6Mbps	17.97	22.63	320	Pass
	6415	93	a	6Mbps	17.96	22.82	320	Pass
	5955	1	be (20MHz)	MCS0	19.08	23.01	320	Pass
	6175	45	be (20MHz)	MCS0	19.03	22.64	320	Pass
	6415	93	be (20MHz)	MCS0	19.09	23.31	320	Pass
	5965	3	be (40MHz)	MCS5	37.98	44.45	320	Pass
	6165	43	be (40MHz)	MCS0	38.03	44.67	320	Pass
	6405	91	be (40MHz)	MCS3	37.99	44.48	320	Pass
	5985	7	be (80MHz)	MCS3	77.58	82.57	320	Pass
	6145	39	be (80MHz)	MCS5	77.44	82.75	320	Pass
	6385	87	be (80MHz)	MCS0	77.54	82.76	320	Pass
	6025	15	be (160MHz)	MCS5	156.34	174.50	320	Pass
	6185	47	be (160MHz)	MCS0	156.94	166.02	320	Pass
Band 6	6345	79	be (160MHz)	MCS5	156.68	171.84	320	Pass
	6435	97	a	6Mbps	18.02	22.95	320	Pass
	6475	105	a	6Mbps	17.95	22.27	320	Pass
	6515	113	a	6Mbps	17.99	22.72	320	Pass
	6435	97	be (20MHz)	MCS0	19.07	22.94	320	Pass
	6475	105	be (20MHz)	MCS0	19.10	23.13	320	Pass
	6515	113	be (20MHz)	MCS0	19.03	22.68	320	Pass
	6445	99	be (40MHz)	MCS0	38.02	44.10	320	Pass
	6485	107	be (40MHz)	MCS3	38.07	44.10	320	Pass
	6525	115	be (40MHz)	MCS0	38.01	45.03	320	Pass
Band 7	6465	103	be (80MHz)	MCS5	77.62	82.57	320	Pass
	6505	111	be (160MHz)	MCS5	156.61	171.84	320	Pass
	6535	117	a	6Mbps	17.96	22.53	320	Pass
	6695	149	a	6Mbps	17.97	22.70	320	Pass
	6875	185	a	6Mbps	17.96	22.76	320	Pass
	6535	117	be (20MHz)	MCS0	19.09	22.81	320	Pass
	6695	149	be (20MHz)	MCS0	19.05	23.13	320	Pass
	6875	185	be (20MHz)	MCS0	19.07	22.90	320	Pass
	6565	123	be (40MHz)	MCS0	38.08	44.58	320	Pass
	6725	155	be (40MHz)	MCS0	38.05	44.18	320	Pass
	6845	179	be (40MHz)	MCS0	38.04	44.14	320	Pass
	6545	119	be (80MHz)	MCS3	77.49	82.80	320	Pass
	6705	151	be (80MHz)	MCS3	77.55	82.43	320	Pass
	6865	183	be (80MHz)	MCS5	77.57	82.51	320	Pass
Band 8	6665	143	be (160MHz)	MCS5	156.32	173.93	320	Pass
	6825	175	be (160MHz)	MCS5	156.78	172.05	320	Pass
	6895	189	a	18Mbps	17.84	22.54	320	Pass
	6995	209	a	6Mbps	17.97	22.50	320	Pass
	7115	233	a	6Mbps	17.98	22.65	320	Pass
	6895	189	be (20MHz)	MCS0	19.03	23.38	320	Pass
	6995	209	be (20MHz)	MCS0	19.02	23.04	320	Pass
	7115	233	be (20MHz)	MCS5	19.03	22.81	320	Pass
	6885	187	be (40MHz)	MCS0	38.05	44.62	320	Pass
	7005	211	be (40MHz)	MCS5	38.02	44.34	320	Pass
	7085	227	be (40MHz)	MCS5	38.03	44.26	320	Pass
	6945	199	be (80MHz)	MCS5	77.53	82.49	320	Pass
	7025	215	be (80MHz)	MCS3	77.43	82.49	320	Pass
	6985	207	be (160MHz)	MCS5	156.22	174.45	320	Pass

Table 7-5. Conducted Bandwidth Measurements Antenna WF8


FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 32 of 239

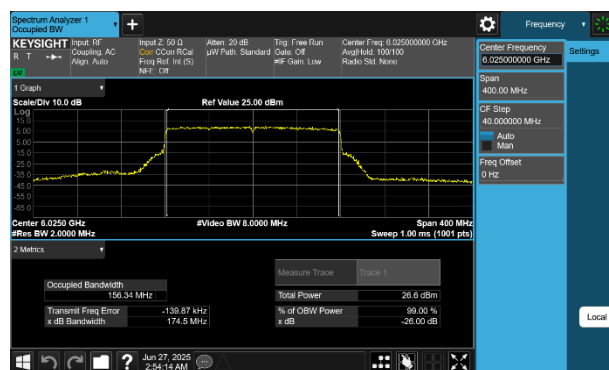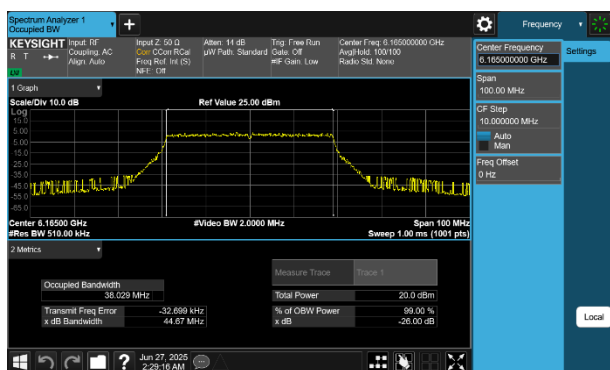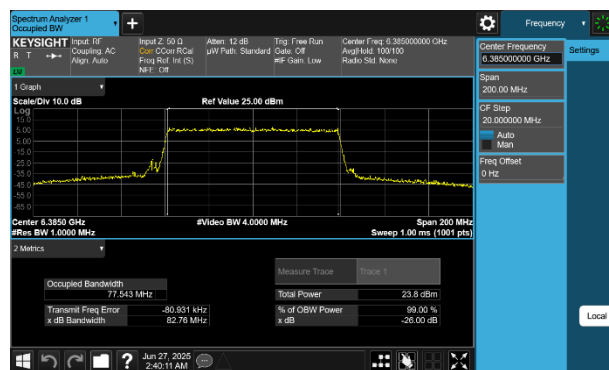


FCC ID: BCGA3357 IC: 579C-A3357	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 33 of 239

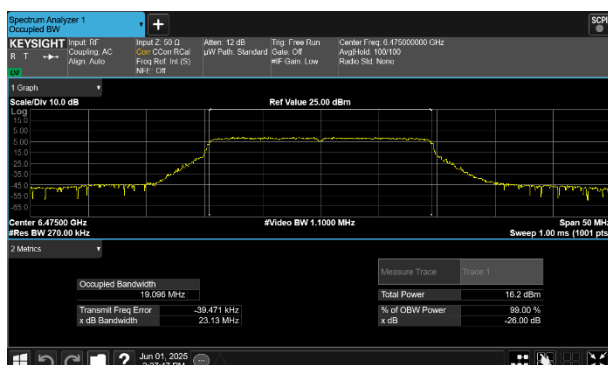


Plot 7-45 26dB BW & 99% OBW Antenna WF8 (20MHz BW 802.11be(SU) - Ch.105)

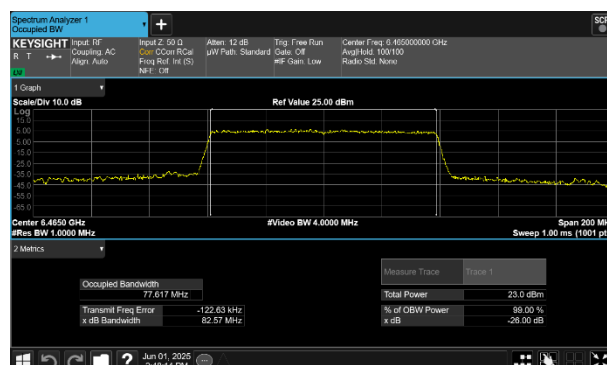

Plot 7-47 26dB BW & 99% OBW Antenna WF8 (80MHz BW 802.11be(SU) - Ch.103)




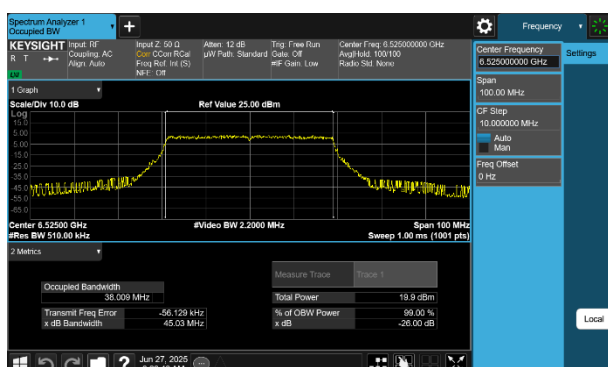


Plot 7-46 26dB BW & 99% OBW Antenna WF8 (40MHz BW 802.11be(SU) - Ch.115)




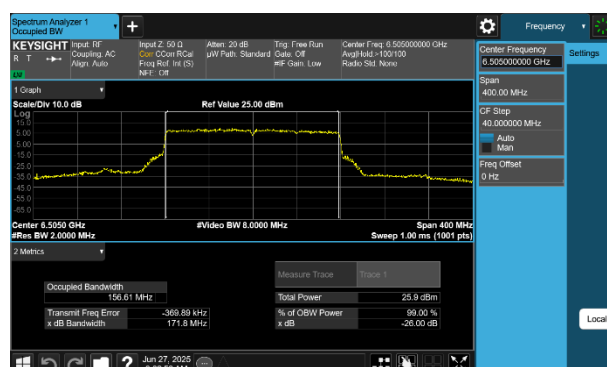


Plot 7-48 26dB BW & 99% OBW Antenna WF8 (160MHz BW 802.11be(SU) - Ch.111)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG			Page 34 of 239
Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device		

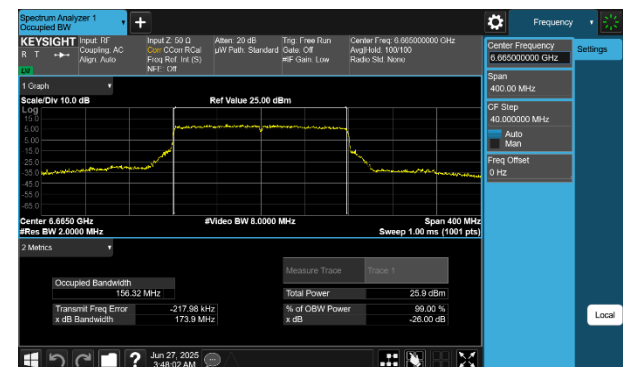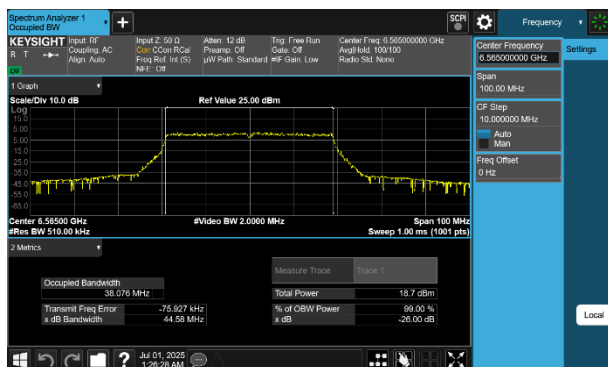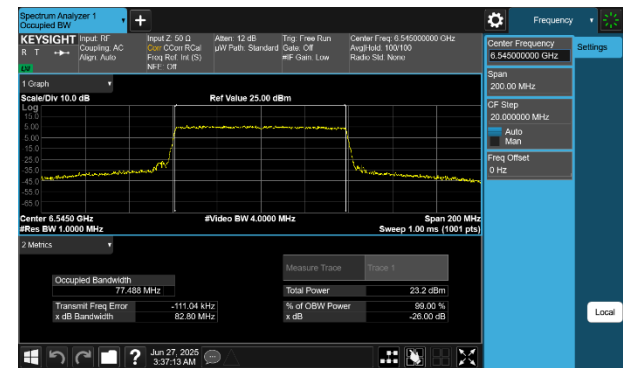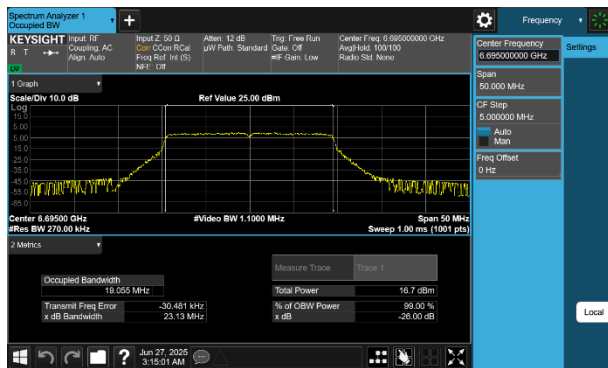

FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 35 of 239	

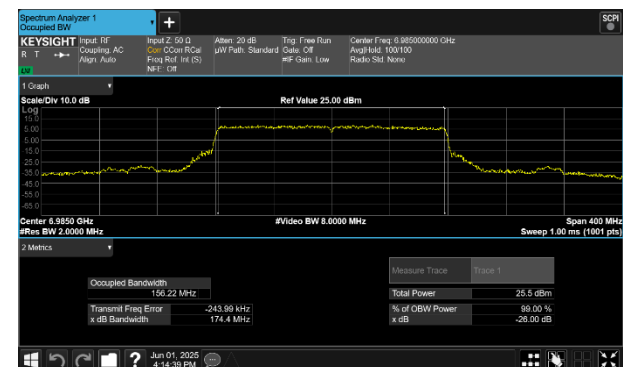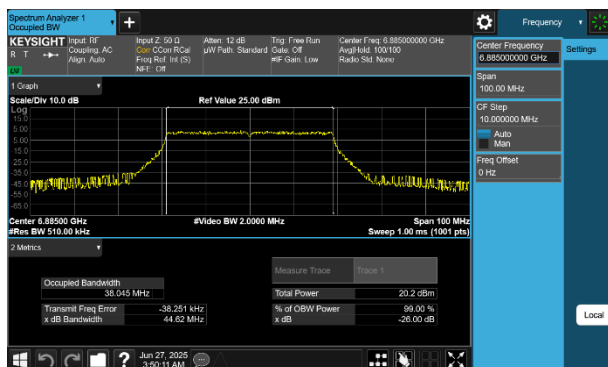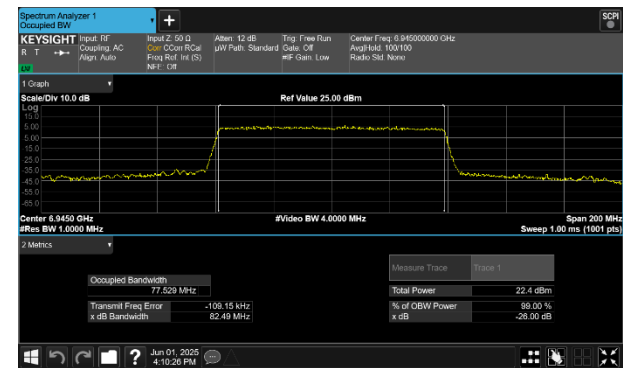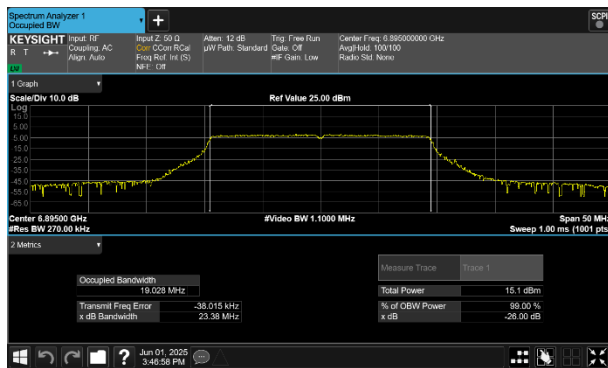


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 36 of 239

7.2.5 Antenna WF7 26dB & 99% Bandwidth Measurements – SP


	Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	6Mbps	17.99	23.09	320	Pass
	6175	45	a	6Mbps	18.01	22.77	320	Pass
	6415	93	a	6Mbps	18.00	22.84	320	Pass
	5955	1	be (20MHz)	MCS0	19.08	23.18	320	Pass
	6175	45	be (20MHz)	MCS0	19.10	23.25	320	Pass
	6415	93	be (20MHz)	MCS0	19.12	23.49	320	Pass
	5965	3	be (40MHz)	MCS0	38.13	44.49	320	Pass
	6165	43	be (40MHz)	MCS0	38.08	44.67	320	Pass
	6405	91	be (40MHz)	MCS5	38.05	44.92	320	Pass
	5985	7	be (80MHz)	MCS3	77.61	82.68	320	Pass
	6145	39	be (80MHz)	MCS5	77.60	82.75	320	Pass
	6385	87	be (80MHz)	MCS0	77.61	82.51	320	Pass
	6025	15	be (160MHz)	MCS5	156.82	165.22	320	Pass
	6185	47	be (160MHz)	MCS0	156.71	168.00	320	Pass
Band 6	6345	79	be (160MHz)	MCS5	156.88	181.66	320	Pass
	6435	97	a	6Mbps	17.96	22.72	320	Pass
	6475	105	a	6Mbps	17.96	23.15	320	Pass
	6515	113	a	6Mbps	18.00	22.71	320	Pass
	6435	97	be (20MHz)	MCS0	19.07	23.27	320	Pass
	6475	105	be (20MHz)	MCS0	19.05	23.51	320	Pass
	6515	113	be (20MHz)	MCS0	19.05	23.01	320	Pass
	6445	99	be (40MHz)	MCS3	37.99	44.52	320	Pass
	6485	107	be (40MHz)	MCS3	38.13	44.21	320	Pass
	6525	115	be (40MHz)	MCS0	38.07	44.39	320	Pass
Band 7	6465	103	be (80MHz)	MCS0	77.66	82.70	320	Pass
	6505	111	be (160MHz)	MCS3	156.48	164.91	320	Pass
	6535	117	a	6Mbps	17.99	22.80	320	Pass
	6695	149	a	6Mbps	17.96	22.62	320	Pass
	6855	181	a	6Mbps	17.99	23.05	320	Pass
	6535	117	be (20MHz)	MCS0	19.03	23.08	320	Pass
	6695	149	be (20MHz)	MCS0	19.06	22.73	320	Pass
	6855	181	be (20MHz)	MCS0	19.07	23.25	320	Pass
	6565	123	be (40MHz)	MCS0	38.03	44.59	320	Pass
	6725	155	be (40MHz)	MCS0	38.06	44.65	320	Pass
	6845	179	be (40MHz)	MCS0	38.08	45.13	320	Pass
	6545	119	be (80MHz)	MCS5	77.51	82.57	320	Pass
	6705	151	be (80MHz)	MCS0	77.81	82.75	320	Pass
	6785	167	be (80MHz)	MCS0	77.53	82.56	320	Pass
	6665	143	be (160MHz)	MCS0	156.87	168.14	320	Pass

Table 7-6. Conducted Bandwidth Measurements Antenna WF7


FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 37 of 239

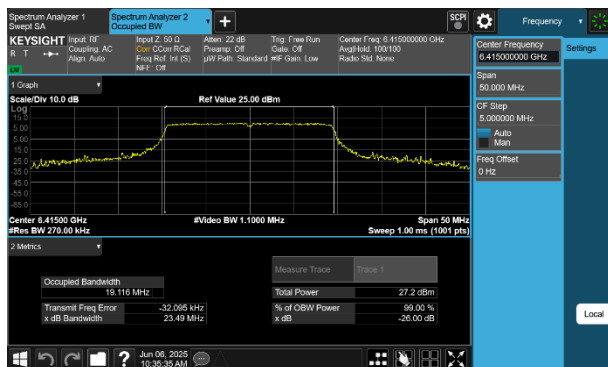


Plot 7-57 26dB BW & 99% OBW Antenna WF7 (20MHz BW 802.11be(SU) - Ch.93)

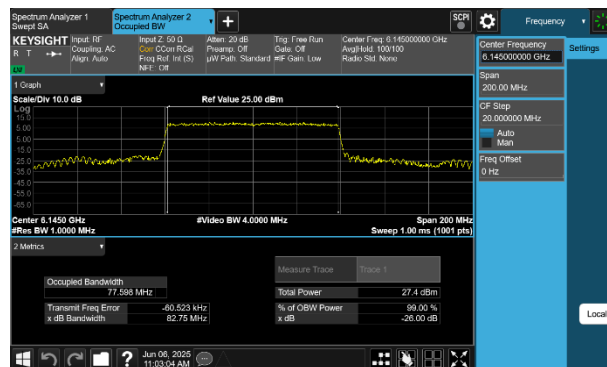

Plot 7-59 26dB BW & 99% OBW Antenna WF7 (80MHz BW 802.11be(SU) - Ch.39)

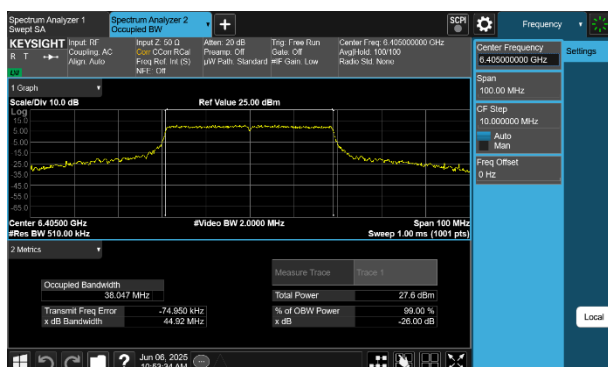


Plot 7-58 26dB BW & 99% OBW Antenna WF7 (40MHz BW 802.11be(SU) - Ch.91)

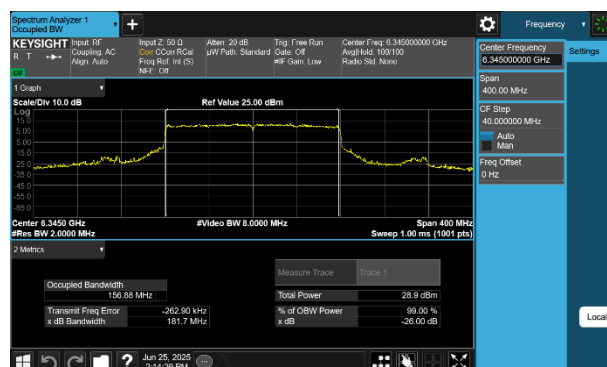


Plot 7-60 26dB BW & 99% OBW Antenna WF7 (160MHz BW 802.11be(SU) - Ch.79)


FCC ID: BCGA3357 IC: 579C-A3357	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 38 of 239

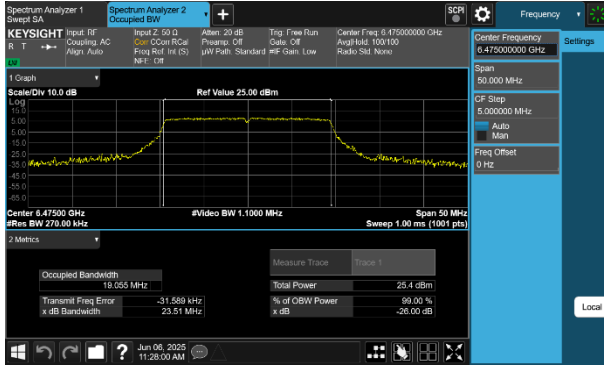


Plot 7-61 26dB BW & 99% OBW Antenna WF7 (20MHz BW 802.11be(SU) - Ch.105)

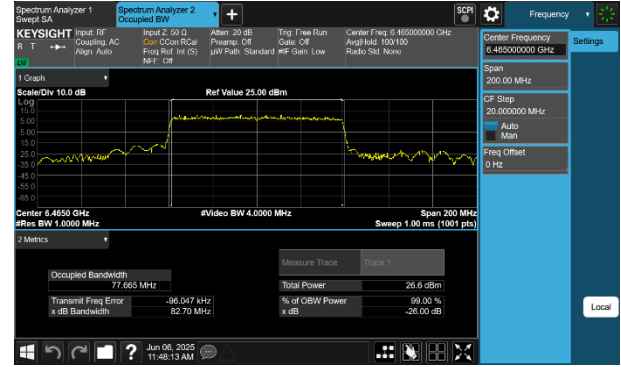

Plot 7-63 26dB BW & 99% OBW Antenna WF7 (80MHz BW 802.11be(SU) - Ch.103)




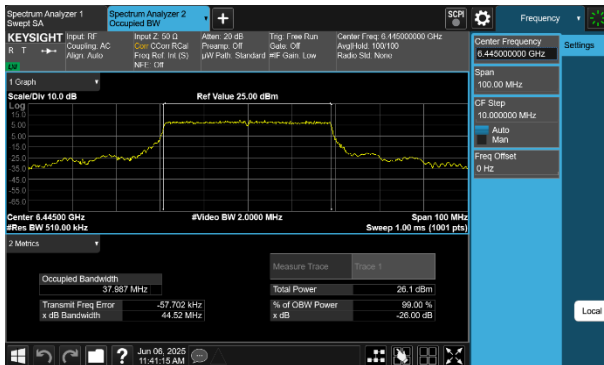


Plot 7-62 26dB BW & 99% OBW Antenna WF7 (40MHz BW 802.11be(SU) - Ch.99)

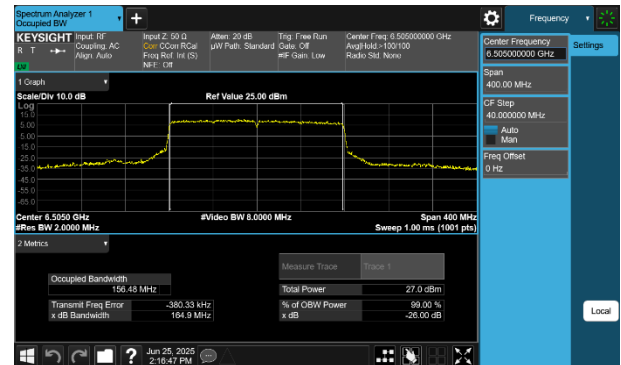

Plot 7-64 26dB BW & 99% OBW Antenna WF7 (160MHz BW 802.11be(SU) - Ch.111)

FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 39 of 239	

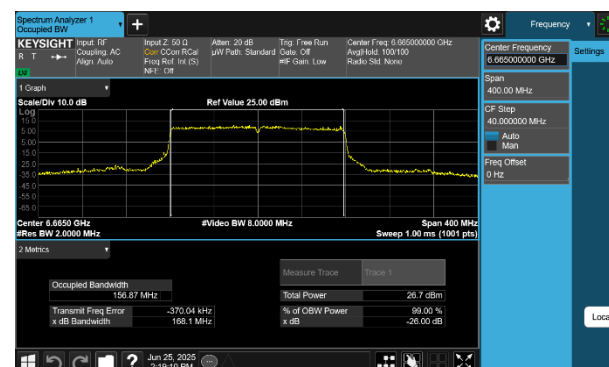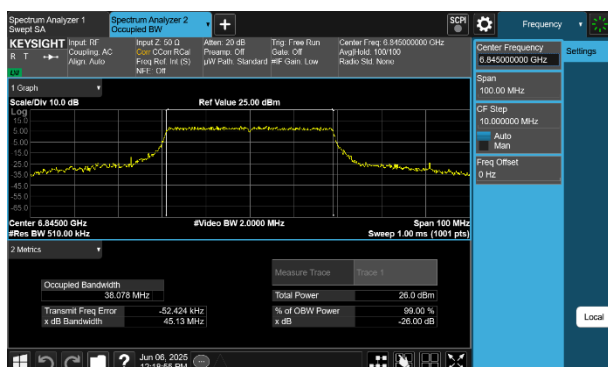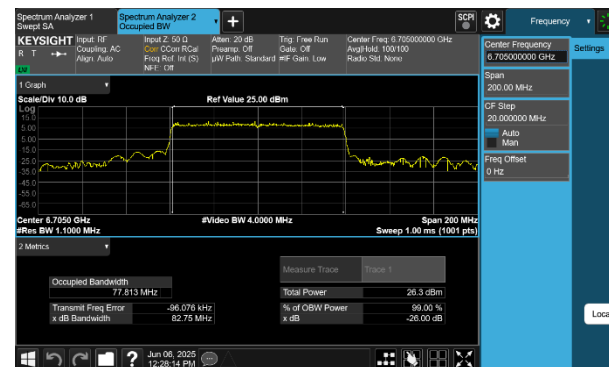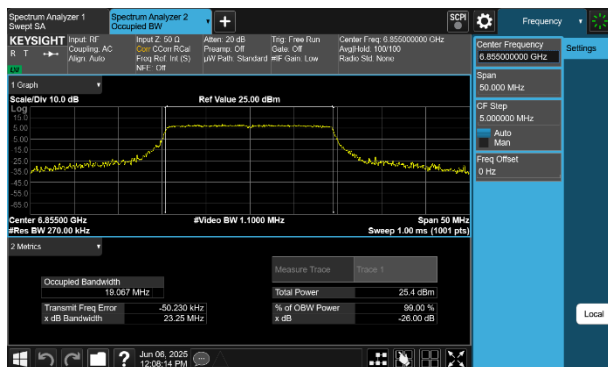





FCC ID: BCGA3357 IC: 579C-A3357	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 40 of 239

7.2.6 Antenna WF7 26dB & 99% Bandwidth Measurements – LPI


	Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	6Mbps	17.93	22.29	320	Pass
	6175	45	a	6Mbps	18.00	22.54	320	Pass
	6415	93	a	6Mbps	17.94	23.07	320	Pass
	5955	1	be (20MHz)	MCS0	19.06	22.94	320	Pass
	6175	45	be (20MHz)	MCS0	19.06	22.68	320	Pass
	6415	93	be (20MHz)	MCS0	19.06	22.96	320	Pass
	5965	3	be (40MHz)	MCS0	38.06	44.12	320	Pass
	6165	43	be (40MHz)	MCS3	38.04	44.27	320	Pass
	6405	91	be (40MHz)	MCS0	38.05	44.46	320	Pass
	5985	7	be (80MHz)	MCS3	77.50	82.73	320	Pass
	6145	39	be (80MHz)	MCS0	77.51	82.75	320	Pass
	6385	87	be (80MHz)	MCS5	77.51	82.37	320	Pass
	6025	15	be (160MHz)	MCS5	156.43	171.36	320	Pass
	6185	47	be (160MHz)	MCS5	156.81	179.50	320	Pass
Band 6	6345	79	be (160MHz)	MCS5	156.85	175.89	320	Pass
	6435	97	a	6Mbps	17.97	22.89	320	Pass
	6475	105	a	6Mbps	17.96	22.84	320	Pass
	6515	113	a	6Mbps	17.98	22.51	320	Pass
	6435	97	be (20MHz)	MCS0	19.04	23.27	320	Pass
	6475	105	be (20MHz)	MCS0	19.04	23.23	320	Pass
	6515	113	be (20MHz)	MCS0	19.06	23.34	320	Pass
	6445	99	be (40MHz)	MCS5	38.02	44.18	320	Pass
	6485	107	be (40MHz)	MCS5	38.07	44.20	320	Pass
	6525	115	be (40MHz)	MCS0	38.06	44.53	320	Pass
Band 7	6465	103	be (80MHz)	MCS5	77.47	82.63	320	Pass
	6505	111	be (160MHz)	MCS5	156.60	166.72	320	Pass
	6535	117	a	6Mbps	18.00	22.85	320	Pass
	6695	149	a	6Mbps	17.97	22.94	320	Pass
	6875	185	a	6Mbps	17.94	22.88	320	Pass
	6535	117	be (20MHz)	MCS0	19.07	23.07	320	Pass
	6695	149	be (20MHz)	MCS0	19.07	22.56	320	Pass
	6875	185	be (20MHz)	MCS0	19.05	22.92	320	Pass
	6565	123	be (40MHz)	MCS3	38.03	44.95	320	Pass
	6725	155	be (40MHz)	MCS0	38.01	44.23	320	Pass
	6845	179	be (40MHz)	MCS3	38.03	44.51	320	Pass
	6545	119	be (80MHz)	MCS5	77.45	82.42	320	Pass
	6705	151	be (80MHz)	MCS5	77.41	82.57	320	Pass
	6865	183	be (80MHz)	MCS0	77.51	82.72	320	Pass
Band 8	6665	143	be (160MHz)	MCS5	156.69	175.04	320	Pass
	6825	175	be (160MHz)	MCS5	156.59	171.19	320	Pass
	6895	189	a	6Mbps	17.95	22.80	320	Pass
	6995	209	a	6Mbps	17.94	22.62	320	Pass
	7115	233	a	6Mbps	17.93	22.70	320	Pass
	6895	189	be (20MHz)	MCS0	19.03	23.27	320	Pass
	6995	209	be (20MHz)	MCS0	19.06	22.35	320	Pass
	7115	233	be (20MHz)	MCS0	19.02	23.20	320	Pass
	6885	187	be (40MHz)	MCS3	38.01	44.10	320	Pass
	7005	211	be (40MHz)	MCS0	38.04	44.02	320	Pass
	7085	227	be (40MHz)	MCS0	38.01	44.46	320	Pass
	6945	199	be (80MHz)	MCS5	77.45	82.58	320	Pass
	7025	215	be (80MHz)	MCS3	77.53	82.60	320	Pass
	6985	207	be (160MHz)	MCS5	156.48	175.26	320	Pass

Table 7-7. Conducted Bandwidth Measurements Antenna WF7


FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 41 of 239

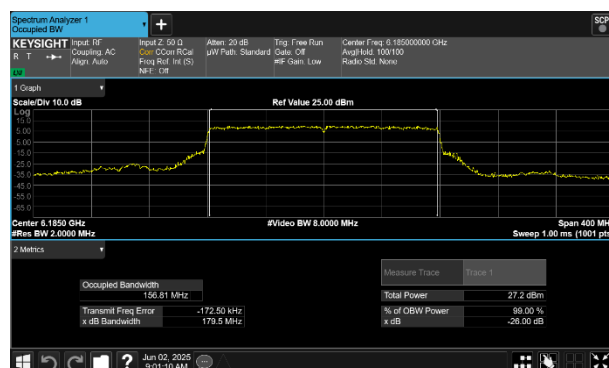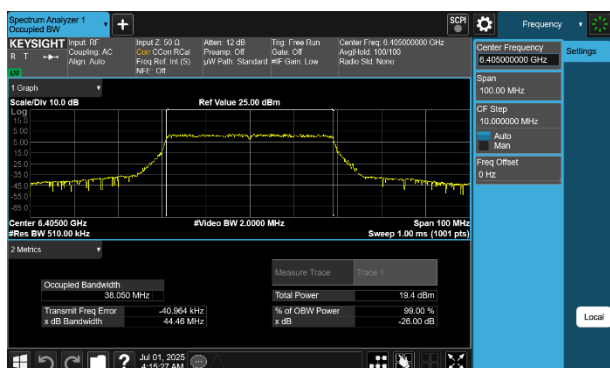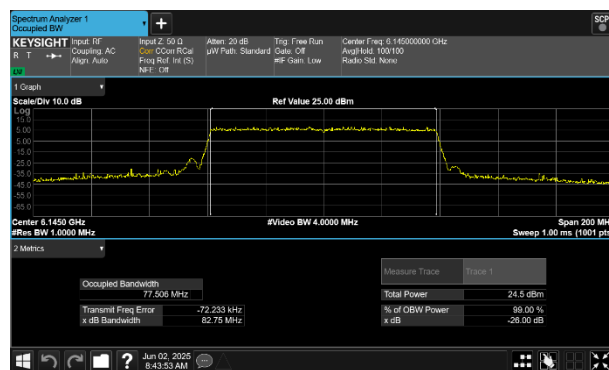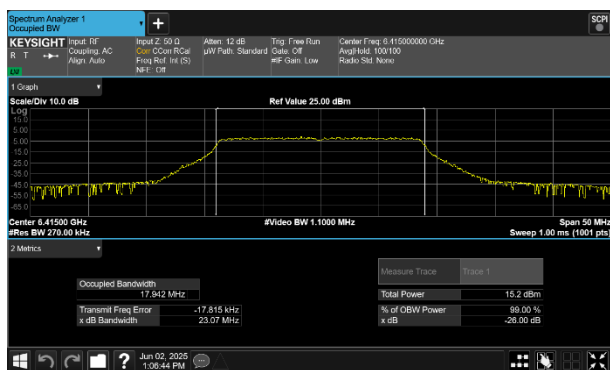


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 42 of 239

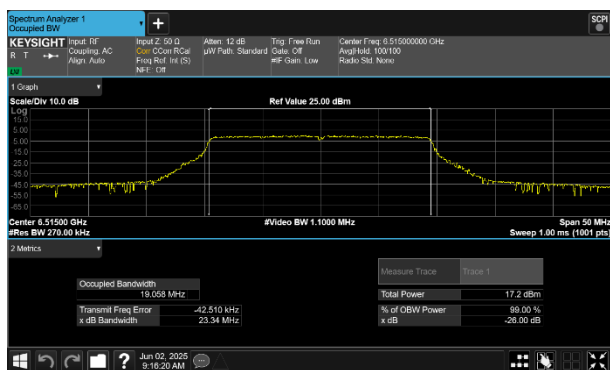


Plot 7-73 26dB BW & 99% OBW Antenna WF7 (20MHz BW 802.11be(SU) - Ch.113)

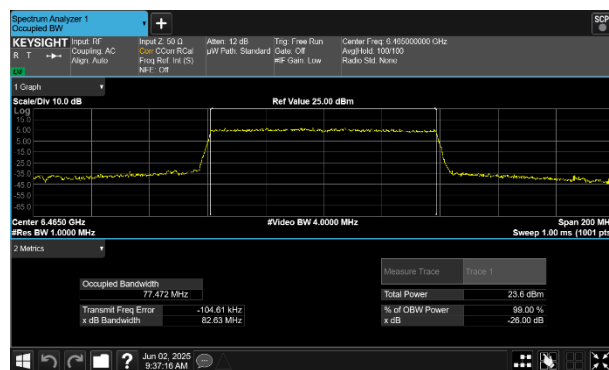

Plot 7-75 26dB BW & 99% OBW Antenna WF7 (80MHz BW 802.11be(SU) - Ch.103)




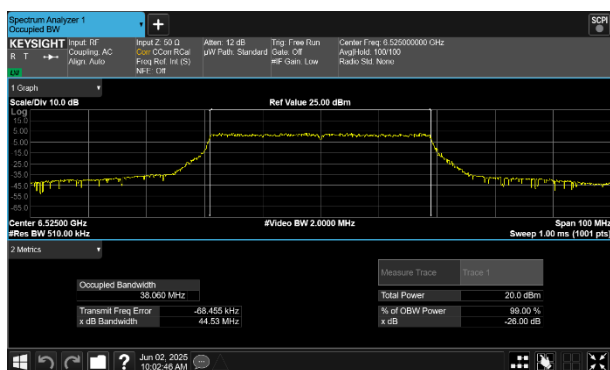


Plot 7-74 26dB BW & 99% OBW Antenna WF7 (40MHz BW 802.11be(SU) - Ch.115)

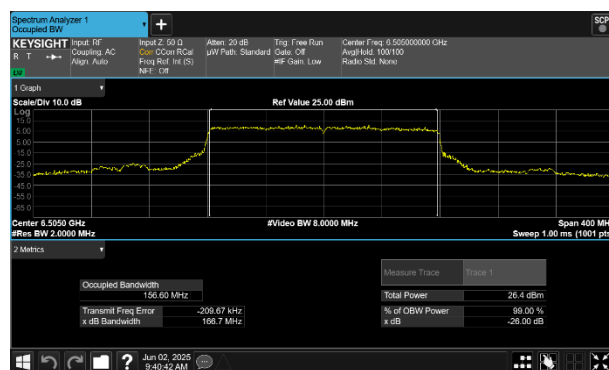


Plot 7-76 26dB BW & 99% OBW Antenna WF7 (160MHz BW 802.11be(SU) - Ch.111)


FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device		Page 43 of 239

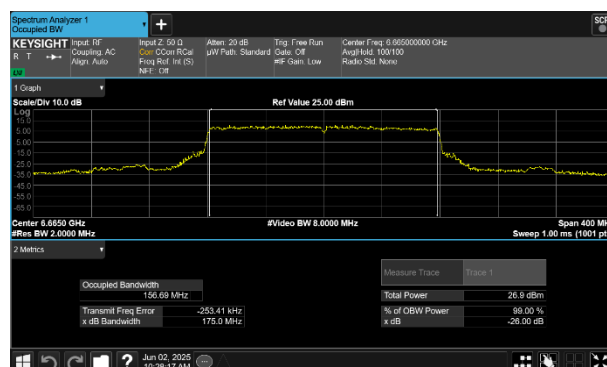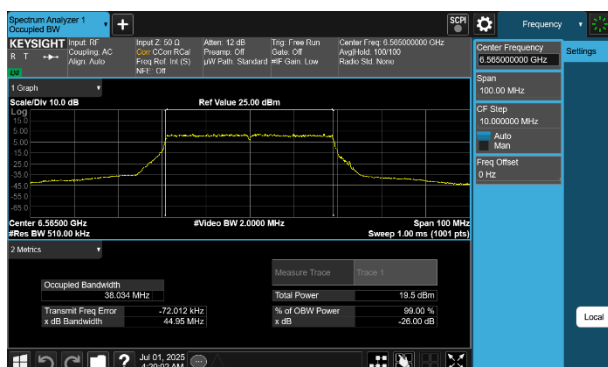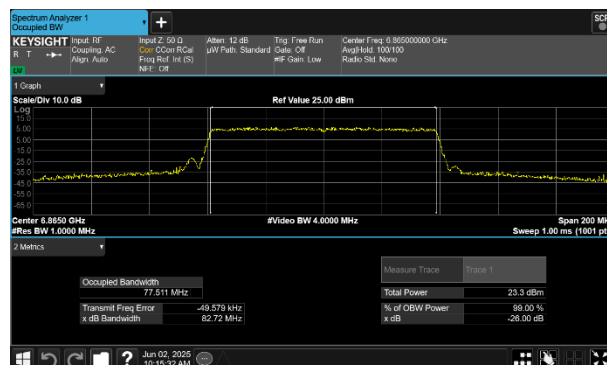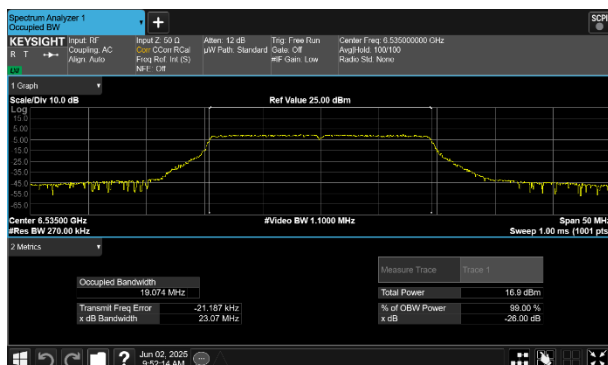


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 44 of 239

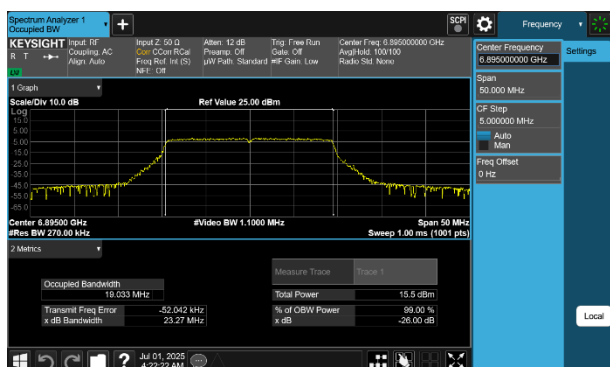


Plot 7-81 26dB BW & 99% OBW Antenna WF7 (20MHz BW 802.11be(SU) - Ch.189)

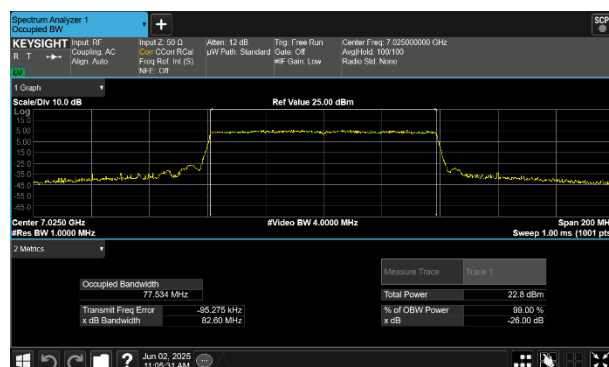

Plot 7-83 26dB BW & 99% OBW Antenna WF7 (80MHz BW 802.11be(SU) - Ch.215)

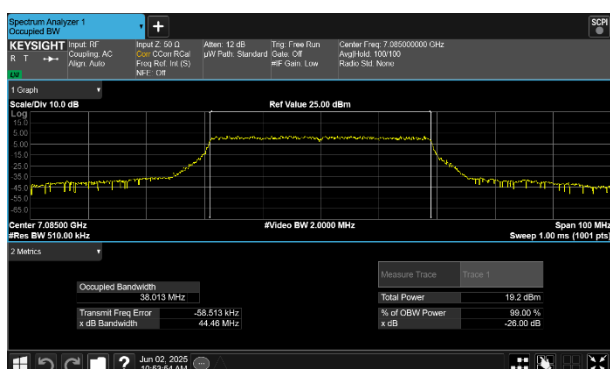

Plot 7-82 26dB BW & 99% OBW Antenna WF7 (40MHz BW 802.11be(SU) - Ch.227)

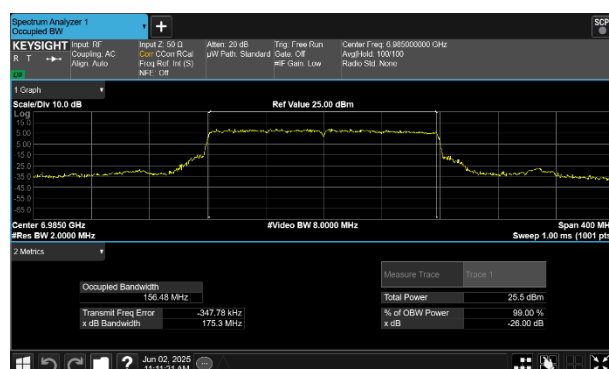

Plot 7-84 26dB BW & 99% OBW Antenna WF7 (160MHz BW 802.11be(SU) - Ch.207)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 45 of 239

7.3 Conducted Output Power and Max EIRP Measurement

§15.407(a)(7)(8), RSS-248 [4.5.3], [4.5.5]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.925 – 7.125GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm for Standard Power mode (SP), and 24dBm for Low Power Indoor mode (LPI).

Test Procedure Used

ANSI C63.10-2020 – Section 12.4.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G
ANSI C63.10-2020 – Section 14.4 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 46 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.1 Antenna WF5B Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	6Mbps	18.94	2.00	20.94	30.00	-9.06
	6175	45	6Mbps	18.85	0.50	19.35	30.00	-10.65
	6415	93	18Mbps	18.88	1.30	20.18	30.00	-9.82
	6435	97	6Mbps	17.49	-0.30	17.19	30.00	-12.81
	6475	105	18Mbps	17.47	-0.30	17.17	30.00	-12.83
	6515	113	6Mbps	17.26	-0.30	16.96	30.00	-13.04
	6535	117	6Mbps	17.32	1.40	18.72	30.00	-11.28
	6695	149	6Mbps	17.50	1.40	18.90	30.00	-11.10
	6855	181	6Mbps	17.26	1.40	18.66	30.00	-11.35

Table 7-8. Antenna WF5B 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	MCS0	18.83	2.00	20.83	30.00	-9.17
	6175	45	MCS0	18.71	0.50	19.21	30.00	-10.79
	6415	93	MCS5	18.87	1.30	20.17	30.00	-9.83
	6435	97	MCS5	17.49	-0.30	17.19	30.00	-12.81
	6475	105	MCS0	17.45	-0.30	17.15	30.00	-12.85
	6515	113	MCS5	17.20	-0.30	16.90	30.00	-13.10
	6535	117	MCS0	17.11	1.40	18.51	30.00	-11.49
	6695	149	MCS5	17.48	1.40	18.88	30.00	-11.12
	6855	181	MCS5	17.24	1.40	18.64	30.00	-11.36

Table 7-9. Antenna WF5B 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	MCS0	18.84	2.00	20.84	30.00	-9.16
	6165	43	MCS0	18.98	0.50	19.48	30.00	-10.52
	6405	91	MCS0	18.92	1.30	20.22	30.00	-9.78
	6445	99	MCS3	17.24	-0.30	16.94	30.00	-13.07
	6485	107	MCS3	17.20	-0.30	16.90	30.00	-13.10
	6525	115	MCS5	17.41	1.40	18.81	30.00	-11.19
	6565	123	MCS5	17.44	1.40	18.84	30.00	-11.16
	6725	155	MCS5	17.39	1.40	18.79	30.00	-11.21
	6845	179	MCS0	17.29	1.40	18.69	30.00	-11.31

Table 7-10. Antenna WF5B 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	MCS5	18.80	2.00	20.80	30.00	-9.20
	6145	39	MCS3	18.98	0.50	19.48	30.00	-10.52
	6385	87	MCS3	18.72	1.30	20.02	30.00	-9.98
	6465	103	MCS0	17.25	-0.30	16.95	30.00	-13.05
	6545	119	MCS5	17.46	1.40	18.86	30.00	-11.14
	6705	151	MCS5	17.36	1.40	18.76	30.00	-11.24
	6785	167	MCS3	17.47	1.40	18.87	30.00	-11.13

Table 7-11. Antenna WF5B 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	MCS3	18.96	2.00	20.96	30.00	-9.04
	6185	47	MCS5	18.99	0.50	19.49	30.00	-10.51
	6345	79	MCS0	18.86	1.30	20.16	30.00	-9.84
	6505	111	MCS5	17.46	-0.30	17.16	30.00	-12.84
	6665	143	MCS0	17.43	1.40	18.83	30.00	-11.17

Table 7-12. Antenna WF5B 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 47 of 239	

7.3.2 Antenna WF5B Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	18Mbps	6.24	2.00	8.24	24.00	-15.76
	6175	45	18Mbps	8.60	0.50	9.10	24.00	-14.91
	6415	93	36Mbps	7.78	1.30	9.08	24.00	-14.92
	6435	97	36Mbps	7.88	-0.30	7.58	24.00	-16.42
	6475	105	18Mbps	7.81	-0.30	7.51	24.00	-16.49
	6515	113	6Mbps	7.68	-0.30	7.38	24.00	-16.63
	6535	117	6Mbps	7.58	1.40	8.98	24.00	-15.02
	6695	149	36Mbps	7.44	1.40	8.84	24.00	-15.16
	6875	185	18Mbps	7.28	1.40	8.68	24.00	-15.32
	6895	189	6Mbps	6.95	1.90	8.85	24.00	-15.15
	6995	209	6Mbps	6.87	1.90	8.77	24.00	-15.23
	7115	233	6Mbps	6.57	1.90	8.47	24.00	-15.53

Table 7-13. Antenna WF5B 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	MCS0	6.26	2.00	8.26	24.00	-15.74
	6175	45	MCS0	8.57	0.50	9.07	24.00	-14.93
	6415	93	MCS0	7.84	1.30	9.14	24.00	-14.86
	6435	97	MCS5	8.08	-0.30	7.78	24.00	-16.22
	6475	105	MCS3	8.09	-0.30	7.79	24.00	-16.21
	6515	113	MCS3	8.07	-0.30	7.77	24.00	-16.23
	6535	117	MCS0	7.52	1.40	8.92	24.00	-15.08
	6695	149	MCS0	7.43	1.40	8.83	24.00	-15.17
	6875	185	MCS3	7.48	1.40	8.88	24.00	-15.12
	6895	189	MCS5	7.29	1.90	9.19	24.00	-14.81
	6995	209	MCS5	7.27	1.90	9.17	24.00	-14.83
	7115	233	MCS3	6.54	1.90	8.44	24.00	-15.56

Table 7-14. Antenna WF5B 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	MCS0	9.38	2.00	11.38	24.00	-12.63
	6165	43	MCS0	11.24	0.50	11.74	24.00	-12.26
	6405	91	MCS5	10.93	1.30	12.23	24.00	-11.78
	6445	99	MCS0	10.76	-0.30	10.46	24.00	-13.54
	6485	107	MCS3	10.81	-0.30	10.51	24.00	-13.49
	6525	115	MCS3	10.43	1.40	11.83	24.00	-12.17
	6565	123	MCS0	10.56	1.40	11.96	24.00	-12.04
	6725	155	MCS3	10.55	1.40	11.95	24.00	-12.05
	6845	179	MCS3	10.53	1.40	11.93	24.00	-12.07
	6885	187	MCS3	9.95	1.90	11.85	24.00	-12.15
	7005	211	MCS0	10.02	1.90	11.92	24.00	-12.09
	7085	227	MCS0	9.85	1.90	11.75	24.00	-12.25

Table 7-15. Antenna WF5B 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 48 of 239

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	MCS3	12.20	2.00	14.20	24.00	-9.80
	6145	39	MCS0	14.68	0.50	15.18	24.00	-8.83
	6385	87	MCS5	13.69	1.30	14.99	24.00	-9.01
	6465	103	MCS5	14.08	-0.30	13.78	24.00	-10.22
	6545	119	MCS5	13.57	1.40	14.97	24.00	-9.03
	6705	151	MCS0	13.79	1.40	15.19	24.00	-8.81
	6865	183	MCS3	13.28	1.40	14.68	24.00	-9.32
	6945	199	MCS5	12.96	1.90	14.86	24.00	-9.14
	7025	215	MCS0	13.37	1.90	15.27	24.00	-8.73

Table 7-16. Antenna WF5B 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	MCS0	14.98	2.00	16.98	24.00	-7.02
	6185	47	MCS5	17.25	0.50	17.75	24.00	-6.25
	6345	79	MCS0	16.69	1.30	17.99	24.00	-6.01
	6505	111	MCS5	16.25	-0.30	15.95	24.00	-8.05
	6665	143	MCS5	16.38	1.40	17.78	24.00	-6.22
	6825	175	MCS0	15.76	1.40	17.16	24.00	-6.84
	6985	207	MCS0	16.04	1.90	17.94	24.00	-6.07

Table 7-17. Antenna WF5B 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 49 of 239

7.3.3 Antenna WF8 Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	6Mbps	19.87	-0.40	19.47	30.00	-10.53
	6175	45	18Mbps	19.84	0.40	20.24	30.00	-9.76
	6415	93	18Mbps	19.68	-0.50	19.18	30.00	-10.82
	6435	97	36Mbps	18.26	-0.20	18.06	30.00	-11.94
	6475	105	36Mbps	18.24	-0.20	18.04	30.00	-11.96
	6515	113	18Mbps	18.24	-0.20	18.04	30.00	-11.97
	6535	117	6Mbps	18.38	0.60	18.98	30.00	-11.03
	6695	149	18Mbps	18.44	0.60	19.04	30.00	-10.96
	6855	181	6Mbps	18.32	0.60	18.92	30.00	-11.08

Table 7-18. Antenna WF8 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	MCS5	19.84	-0.40	19.44	30.00	-10.56
	6175	45	MCS5	19.82	0.40	20.22	30.00	-9.78
	6415	93	MCS0	19.85	-0.50	19.35	30.00	-10.65
	6435	97	MCS3	18.31	-0.20	18.11	30.00	-11.89
	6475	105	MCS0	18.21	-0.20	18.01	30.00	-11.99
	6515	113	MCS3	18.23	-0.20	18.03	30.00	-11.97
	6535	117	MCS3	18.36	0.60	18.96	30.00	-11.04
	6695	149	MCS3	18.44	0.60	19.04	30.00	-10.97
	6855	181	MCS0	18.31	0.60	18.91	30.00	-11.09

Table 7-19. Antenna WF8 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	MCS0	19.70	-0.40	19.30	30.00	-10.70
	6165	43	MCS0	19.98	0.40	20.38	30.00	-9.62
	6405	91	MCS0	19.74	-0.50	19.24	30.00	-10.76
	6445	99	MCS0	18.41	-0.20	18.21	30.00	-11.79
	6485	107	MCS0	18.39	-0.20	18.19	30.00	-11.82
	6525	115	MCS0	18.25	0.60	18.85	30.00	-11.15
	6565	123	MCS0	18.31	0.60	18.91	30.00	-11.09
	6725	155	MCS0	18.37	0.60	18.97	30.00	-11.03
	6845	179	MCS0	18.18	0.60	18.78	30.00	-11.22

Table 7-20. Antenna WF8 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	MCS5	19.81	-0.40	19.41	30.00	-10.59
	6145	39	MCS5	19.88	0.40	20.28	30.00	-9.72
	6385	87	MCS5	19.92	-0.50	19.42	30.00	-10.58
	6465	103	MCS0	18.23	-0.20	18.03	30.00	-11.97
	6545	119	MCS5	18.30	0.60	18.90	30.00	-11.10
	6705	151	MCS5	18.32	0.60	18.92	30.00	-11.08
	6785	167	MCS5	18.28	0.60	18.88	30.00	-11.12

Table 7-21. Antenna WF8 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	MCS0	19.90	-0.40	19.50	30.00	-10.50
	6185	47	MCS0	19.91	0.40	20.31	30.00	-9.69
	6345	79	MCS3	19.99	-0.50	19.49	30.00	-10.51
	6505	111	MCS0	18.37	-0.20	18.17	30.00	-11.83
	6665	143	MCS0	18.31	0.60	18.91	30.00	-11.09

Table 7-22. Antenna WF8 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 50 of 239

7.3.4 Antenna WF8 Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	6Mbps	8.66	-0.40	8.26	24.00	-15.74
	6175	45	6Mbps	8.64	0.40	9.04	24.00	-14.96
	6415	93	18Mbps	9.69	-0.50	9.19	24.00	-14.81
	6435	97	18Mbps	9.25	-0.20	9.05	24.00	-14.95
	6475	105	18Mbps	9.25	-0.20	9.05	24.00	-14.95
	6515	113	18Mbps	9.31	-0.20	9.11	24.00	-14.89
	6535	117	18Mbps	8.25	0.60	8.85	24.00	-15.15
	6695	149	6Mbps	8.33	0.60	8.93	24.00	-15.07
	6875	185	6Mbps	8.19	0.60	8.79	24.00	-15.21
	6895	189	36Mbps	8.96	0.00	8.96	24.00	-15.04
	6995	209	18Mbps	8.99	0.00	8.99	24.00	-15.02
	7115	233	36Mbps	8.14	0.00	8.14	24.00	-15.86

Table 7-23. Antenna WF8 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	MCS5	8.88	-0.40	8.48	24.00	-15.52
	6175	45	MCS3	8.73	0.40	9.13	24.00	-14.87
	6415	93	MCS5	9.82	-0.50	9.32	24.00	-14.68
	6435	97	MCS5	9.47	-0.20	9.27	24.00	-14.73
	6475	105	MCS5	9.44	-0.20	9.24	24.00	-14.76
	6515	113	MCS5	9.49	-0.20	9.29	24.00	-14.71
	6535	117	MCS5	8.22	0.60	8.82	24.00	-15.18
	6695	149	MCS3	8.19	0.60	8.79	24.00	-15.21
	6875	185	MCS0	8.28	0.60	8.88	24.00	-15.12
	6895	189	MCS0	9.05	0.00	9.05	24.00	-14.95
	6995	209	MCS3	9.10	0.00	9.10	24.00	-14.91
	7115	233	MCS5	8.27	0.00	8.27	24.00	-15.73

Table 7-24. Antenna WF8 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	MCS3	11.67	-0.40	11.27	24.00	-12.73
	6165	43	MCS3	11.45	0.40	11.85	24.00	-12.15
	6405	91	MCS5	12.59	-0.50	12.09	24.00	-11.91
	6445	99	MCS3	12.36	-0.20	12.16	24.00	-11.84
	6485	107	MCS3	12.37	-0.20	12.17	24.00	-11.83
	6525	115	MCS0	11.34	0.60	11.94	24.00	-12.06
	6565	123	MCS0	11.18	0.60	11.78	24.00	-12.22
	6725	155	MCS5	11.46	0.60	12.06	24.00	-11.94
	6845	179	MCS0	11.39	0.60	11.99	24.00	-12.01
	6885	187	MCS5	11.60	0.00	11.60	24.00	-12.40
	7005	211	MCS5	12.08	0.00	12.08	24.00	-11.92
	7085	227	MCS3	12.15	0.00	12.15	24.00	-11.85

Table 7-25. Antenna WF8 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 51 of 239

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	MCS5	14.82	-0.40	14.42	24.00	-9.59
	6145	39	MCS3	14.89	0.40	15.29	24.00	-8.71
	6385	87	MCS5	15.72	-0.50	15.22	24.00	-8.79
	6465	103	MCS0	15.42	-0.20	15.22	24.00	-8.78
	6545	119	MCS3	14.55	0.60	15.15	24.00	-8.85
	6705	151	MCS0	14.34	0.60	14.94	24.00	-9.06
	6865	183	MCS0	14.31	0.60	14.91	24.00	-9.10
	6945	199	MCS5	14.91	0.00	14.91	24.00	-9.09
	7025	215	MCS0	14.82	0.00	14.82	24.00	-9.18

Table 7-26. Antenna WF8 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	MCS5	17.64	-0.40	17.24	24.00	-6.76
	6185	47	MCS3	17.59	0.40	17.99	24.00	-6.01
	6345	79	MCS0	18.52	-0.50	18.02	24.00	-5.98
	6505	111	MCS0	17.20	-0.20	17.00	24.00	-7.00
	6665	143	MCS0	17.35	0.60	17.95	24.00	-6.05
	6825	175	MCS3	17.19	0.60	17.79	24.00	-6.21
	6985	207	MCS5	17.87	0.00	17.87	24.00	-6.13

Table 7-27. Antenna WF8 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 52 of 239

7.3.5 Antenna WF7 Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	6Mbps	18.89	1.50	20.39	30.00	-9.61
	6175	45	6Mbps	18.85	-0.20	18.65	30.00	-11.35
	6415	93	6Mbps	18.85	0.40	19.25	30.00	-10.75
	6435	97	6Mbps	17.17	1.10	18.27	30.00	-11.73
	6475	105	6Mbps	17.21	1.10	18.31	30.00	-11.69
	6515	113	18Mbps	17.27	1.10	18.37	30.00	-11.63
	6535	117	6Mbps	17.29	0.70	17.99	30.00	-12.01
	6695	149	6Mbps	17.17	0.70	17.87	30.00	-12.14
	6855	181	6Mbps	17.26	0.70	17.96	30.00	-12.04

Table 7-28. Antenna WF7 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	MCS0	18.85	1.50	20.35	30.00	-9.65
	6175	45	MCS3	18.81	-0.20	18.61	30.00	-11.39
	6415	93	MCS0	19.00	0.40	19.40	30.00	-10.60
	6435	97	MCS3	17.33	1.10	18.43	30.00	-11.57
	6475	105	MCS3	17.39	1.10	18.49	30.00	-11.51
	6515	113	MCS3	17.45	1.10	18.55	30.00	-11.45
	6535	117	MCS5	17.41	0.70	18.11	30.00	-11.89
	6695	149	MCS5	17.29	0.70	17.99	30.00	-12.01
	6855	181	MCS3	17.44	0.70	18.14	30.00	-11.86

Table 7-29. Antenna WF7 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	MCS0	18.88	1.50	20.38	30.00	-9.62
	6165	43	MCS0	18.78	-0.20	18.58	30.00	-11.42
	6405	91	MCS0	18.92	0.40	19.32	30.00	-10.68
	6445	99	MCS0	17.19	1.10	18.29	30.00	-11.71
	6485	107	MCS0	17.41	1.10	18.51	30.00	-11.49
	6525	115	MCS0	17.29	0.70	17.99	30.00	-12.01
	6565	123	MCS3	17.48	0.70	18.18	30.00	-11.82
	6725	155	MCS3	17.32	0.70	18.02	30.00	-11.98
	6845	179	MCS0	17.48	0.70	18.18	30.00	-11.83

Table 7-30. Antenna WF7 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	MCS3	18.72	1.50	20.22	30.00	-9.78
	6145	39	MCS0	18.72	-0.20	18.52	30.00	-11.48
	6385	87	MCS5	18.98	0.40	19.38	30.00	-10.62
	6465	103	MCS5	17.30	1.10	18.40	30.00	-11.60
	6545	119	MCS0	17.39	0.70	18.09	30.00	-11.91
	6705	151	MCS3	17.39	0.70	18.09	30.00	-11.92
	6785	167	MCS3	17.28	0.70	17.98	30.00	-12.02

Table 7-31. Antenna WF7 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	MCS0	18.92	1.50	20.42	30.00	-9.58
	6185	47	MCS0	18.85	-0.20	18.65	30.00	-11.35
	6345	79	MCS5	18.94	0.40	19.34	30.00	-10.66
	6505	111	MCS3	17.50	1.10	18.60	30.00	-11.40
	6665	143	MCS0	17.44	0.70	18.14	30.00	-11.86

Table 7-32. Antenna WF7 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 53 of 239

7.3.6 Antenna WF7 Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	18Mbps	6.20	1.50	7.70	24.00	-16.30
	6175	45	18Mbps	8.60	-0.20	8.40	24.00	-15.61
	6415	93	6Mbps	7.90	0.40	8.30	24.00	-15.70
	6435	97	6Mbps	7.88	1.10	8.98	24.00	-15.02
	6475	105	6Mbps	7.78	1.10	8.88	24.00	-15.12
	6515	113	18Mbps	7.84	1.10	8.94	24.00	-15.06
	6535	117	36Mbps	7.53	0.70	8.23	24.00	-15.77
	6695	149	6Mbps	7.44	0.70	8.14	24.00	-15.86
	6875	185	36Mbps	7.39	0.70	8.09	24.00	-15.91
	6895	189	18Mbps	6.88	-0.70	6.18	24.00	-17.82
	6995	209	6Mbps	7.00	-0.70	6.30	24.00	-17.71
	7115	233	36Mbps	6.41	-0.70	5.71	24.00	-18.29

Table 7-33. Antenna WF7 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	MCS3	6.22	1.50	7.72	24.00	-16.28
	6175	45	MCS5	8.61	-0.20	8.41	24.00	-15.59
	6415	93	MCS3	7.89	0.40	8.29	24.00	-15.71
	6435	97	MCS5	8.08	1.10	9.18	24.00	-14.82
	6475	105	MCS5	8.08	1.10	9.18	24.00	-14.82
	6515	113	MCS5	8.09	1.10	9.19	24.00	-14.81
	6535	117	MCS5	7.50	0.70	8.20	24.00	-15.80
	6695	149	MCS5	7.47	0.70	8.17	24.00	-15.83
	6875	185	MCS3	7.47	0.70	8.17	24.00	-15.83
	6895	189	MCS0	7.27	-0.70	6.57	24.00	-17.43
	6995	209	MCS5	7.27	-0.70	6.57	24.00	-17.43
	7115	233	MCS5	6.67	-0.70	5.97	24.00	-18.03

Table 7-34. Antenna WF7 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	MCS5	9.46	1.50	10.96	24.00	-13.05
	6165	43	MCS0	11.50	-0.20	11.30	24.00	-12.71
	6405	91	MCS3	10.84	0.40	11.24	24.00	-12.76
	6445	99	MCS5	10.79	1.10	11.89	24.00	-12.11
	6485	107	MCS0	10.82	1.10	11.92	24.00	-12.08
	6525	115	MCS3	10.54	0.70	11.24	24.00	-12.76
	6565	123	MCS0	10.58	0.70	11.28	24.00	-12.72
	6725	155	MCS5	10.58	0.70	11.28	24.00	-12.73
	6845	179	MCS5	10.41	0.70	11.11	24.00	-12.89
	6885	187	MCS0	9.98	-0.70	9.28	24.00	-14.72
	7005	211	MCS5	10.10	-0.70	9.40	24.00	-14.60
	7085	227	MCS5	10.08	-0.70	9.38	24.00	-14.62

Table 7-35. Antenna WF7 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 54 of 239

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	MCS5	12.28	1.50	13.78	24.00	-10.22
	6145	39	MCS5	14.69	-0.20	14.49	24.00	-9.51
	6385	87	MCS5	13.72	0.40	14.12	24.00	-9.88
	6465	103	MCS0	13.94	1.10	15.04	24.00	-8.96
	6545	119	MCS5	13.44	0.70	14.14	24.00	-9.86
	6705	151	MCS5	13.77	0.70	14.47	24.00	-9.53
	6865	183	MCS0	13.18	0.70	13.88	24.00	-10.12
	6945	199	MCS3	13.18	-0.70	12.48	24.00	-11.52
	7025	215	MCS3	13.38	-0.70	12.68	24.00	-11.32

Table 7-36. Antenna WF7 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	MCS0	14.97	1.50	16.47	24.00	-7.53
	6185	47	MCS5	17.25	-0.20	17.05	24.00	-6.95
	6345	79	MCS3	16.49	0.40	16.89	24.00	-7.12
	6505	111	MCS3	16.39	1.10	17.49	24.00	-6.52
	6665	143	MCS0	16.34	0.70	17.04	24.00	-6.96
	6825	175	MCS5	15.84	0.70	16.54	24.00	-7.46
	6985	207	MCS0	16.04	-0.70	15.34	24.00	-8.66

Table 7-37. Antenna WF7 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 55 of 239

7.3.7 CDD Primary Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5B	Antenna WF8	Summed				
	5955	1	CDD	6Mbps	18.85	18.94	21.91	2.00	23.91	30.00	-6.09
	6175	45	CDD	36Mbps	18.64	18.80	21.73	0.50	22.23	30.00	-7.77
	6415	93	CDD	36Mbps	18.93	18.89	21.92	1.30	23.22	30.00	-6.78
	6435	97	CDD	6Mbps	17.46	17.29	20.39	-0.20	20.19	30.00	-9.81
	6475	105	CDD	6Mbps	17.46	17.23	20.36	-0.20	20.16	30.00	-9.84
	6515	113	CDD	36Mbps	17.25	17.27	20.27	-0.20	20.07	30.00	-9.93
	6535	117	CDD	6Mbps	17.33	17.37	20.36	1.40	21.76	30.00	-8.24
	6695	149	CDD	36Mbps	17.26	17.46	20.37	1.40	21.77	30.00	-8.23
	6855	181	CDD	6Mbps	17.27	17.37	20.33	1.40	21.73	30.00	-8.27

Table 7-38. CDD Primary 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5B	Antenna WF8	Summed				
	5955	1	CDD	MCS3	18.96	18.87	21.93	2.00	23.93	30.00	-6.07
	6175	45	CDD	MCS3	18.79	18.75	21.78	0.50	22.28	30.00	-7.72
	6415	93	CDD	MCS0	18.96	18.82	21.90	1.30	23.20	30.00	-6.80
	6435	97	CDD	MCS5	17.45	17.26	20.37	-0.20	20.17	30.00	-9.83
	6475	105	CDD	MCS0	17.44	17.23	20.35	-0.20	20.15	30.00	-9.85
	6515	113	CDD	MCS3	17.18	17.24	20.22	-0.20	20.02	30.00	-9.98
	6535	117	CDD	MCS0	17.15	17.38	20.28	1.40	21.68	30.00	-8.32
	6695	149	CDD	MCS3	17.49	17.48	20.49	1.40	21.89	30.00	-8.11
	6855	181	CDD	MCS3	17.22	17.35	20.30	1.40	21.70	30.00	-8.30

Table 7-39. CDD Primary 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5B	Antenna WF8	Summed				
	5965	3	CDD	MCS3	18.81	18.79	21.81	2.00	23.81	30.00	-6.19
	6165	43	CDD	MCS0	18.99	18.96	21.98	0.50	22.48	30.00	-7.52
	6405	91	CDD	MCS0	18.92	18.69	21.82	1.30	23.12	30.00	-6.88
	6445	99	CDD	MCS5	17.36	17.37	20.38	-0.20	20.18	30.00	-9.82
	6485	107	CDD	MCS3	17.33	17.37	20.36	-0.20	20.16	30.00	-9.84
	6525	115	CDD	MCS0	17.48	17.32	20.41	1.40	21.81	30.00	-8.19
	6565	123	CDD	MCS5	17.46	17.29	20.39	1.40	21.79	30.00	-8.21
	6725	155	CDD	MCS5	17.48	17.38	20.44	1.40	21.84	30.00	-8.16
	6845	179	CDD	MCS0	17.33	17.27	20.31	1.40	21.71	30.00	-8.29

Table 7-40. CDD Primary 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5B	Antenna WF8	Summed				
	5985	7	CDD	MCS0	18.67	18.65	21.67	2.00	23.67	30.00	-6.33
	6145	39	CDD	MCS0	18.96	18.70	21.84	0.50	22.34	30.00	-7.66
	6385	87	CDD	MCS0	18.75	18.70	21.73	1.30	23.03	30.00	-6.97
	6465	103	CDD	MCS0	17.44	17.22	20.34	-0.20	20.14	30.00	-9.86
	6545	119	CDD	MCS0	17.17	17.17	20.18	1.40	21.58	30.00	-8.42
	6705	151	CDD	MCS5	17.50	17.24	20.38	1.40	21.78	30.00	-8.22
	6785	167	CDD	MCS0	17.46	17.20	20.34	1.40	21.74	30.00	-8.26

Table 7-41. CDD Primary 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5B	Antenna WF8	Summed				
	6025	15	CDD	MCS0	18.99	18.89	21.95	2.00	23.95	30.00	-6.05
	6185	47	CDD	MCS3	18.97	18.70	21.85	0.50	22.35	30.00	-7.65
	6345	79	CDD	MCS0	18.82	18.87	21.85	1.30	23.15	30.00	-6.85
	6505	111	CDD	MCS0	17.34	17.38	20.37	-0.20	20.17	30.00	-9.83
	6665	143	CDD	MCS3	17.39	17.32	20.37	1.40	21.77	30.00	-8.23

Table 7-42. CDD Primary 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 56 of 239

7.3.8 CDD/SDM Primary Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5B	Antenna WF8	Summed				
	5955	1	CDD	6Mbps	1.32	1.33	4.34	2.00	6.34	24.00	-17.66
	6175	45	CDD	18Mbps	2.57	2.59	5.59	0.50	6.09	24.00	-17.91
	6415	93	CDD	18Mbps	2.68	2.70	5.70	1.30	7.00	24.00	-17.00
	6435	97	CDD	6Mbps	2.48	2.41	5.46	-0.20	5.26	24.00	-18.74
	6475	105	CDD	36Mbps	2.45	2.39	5.43	-0.20	5.23	24.00	-18.77
	6515	113	CDD	6Mbps	2.25	2.30	5.29	-0.20	5.09	24.00	-18.91
	6535	117	CDD	36Mbps	2.00	1.97	4.99	1.40	6.39	24.00	-17.61
	6695	149	CDD	6Mbps	1.97	1.90	4.94	1.40	6.34	24.00	-17.66
	6875	185	CDD	18Mbps	1.79	1.76	4.79	1.40	6.19	24.00	-17.81
	6895	189	CDD	18Mbps	1.69	1.39	4.55	1.90	6.45	24.00	-17.55
	6995	209	CDD	18Mbps	1.61	1.75	4.69	1.90	6.59	24.00	-17.41
	7115	233	CDD	18Mbps	1.14	1.11	4.13	1.90	6.03	24.00	-17.97

Table 7-43. CDD/SDM Primary 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5B	Antenna WF8	Summed				
	5955	1	SDM	MCS3	4.28	4.14	7.22	0.96	8.18	24.00	-15.82
	6175	45	SDM	MCS3	5.64	5.68	8.67	0.45	9.12	24.00	-14.88
	6415	93	SDM	MCS3	5.73	5.71	8.73	0.49	9.22	24.00	-14.78
	6435	97	SDM	MCS5	5.57	5.55	8.57	-0.25	8.32	24.00	-15.68
	6475	105	SDM	MCS0	5.50	5.45	8.49	-0.25	8.24	24.00	-15.76
	6515	113	SDM	MCS0	5.61	5.54	8.58	-0.25	8.33	24.00	-15.67
	6535	117	SDM	MCS0	4.72	4.74	7.74	1.02	8.76	24.00	-15.24
	6695	149	SDM	MCS3	4.82	4.89	7.87	1.02	8.89	24.00	-15.11
	6875	185	SDM	MCS0	4.84	5.03	7.95	1.02	8.97	24.00	-15.03
	6895	189	SDM	MCS0	5.07	5.10	8.10	1.05	9.15	24.00	-14.85
	6995	209	SDM	MCS3	5.06	4.95	8.02	1.05	9.07	24.00	-14.93
	7115	233	SDM	MCS3	4.05	4.15	7.11	1.05	8.16	24.00	-15.84

Table 7-44. CDD/SDM Primary 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5B	Antenna WF8	Summed				
	5965	3	SDM	MCS0	7.16	7.39	10.29	0.96	11.25	24.00	-12.75
	6165	43	SDM	MCS5	8.40	8.54	11.48	0.45	11.93	24.00	-12.07
	6405	91	SDM	MCS5	8.75	8.66	11.71	0.49	12.20	24.00	-11.80
	6445	99	SDM	MCS3	8.32	8.30	11.32	-0.25	11.07	24.00	-12.93
	6485	107	SDM	MCS3	8.31	8.30	11.31	-0.25	11.06	24.00	-12.94
	6525	115	SDM	MCS3	7.94	7.94	10.95	1.02	11.97	24.00	-12.03
	6565	123	SDM	MCS0	8.04	7.95	11.00	1.02	12.02	24.00	-11.98
	6725	155	SDM	MCS3	7.86	7.82	10.85	1.02	11.87	24.00	-12.13
	6845	179	SDM	MCS0	7.92	7.83	10.89	1.02	11.91	24.00	-12.09
	6885	187	SDM	MCS3	7.70	7.44	10.58	1.05	11.63	24.00	-12.37
	7005	211	SDM	MCS0	7.91	7.88	10.90	1.05	11.95	24.00	-12.05
	7085	227	SDM	MCS0	7.81	7.84	10.84	1.05	11.89	24.00	-12.11

Table 7-45. CDD/SDM Primary 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5B	Antenna WF8	Summed				
	5985	7	SDM	MCS0	10.21	10.13	13.18	0.96	14.14	24.00	-9.86
	6145	39	SDM	MCS5	11.62	11.66	14.65	0.45	15.10	24.00	-8.90
	6385	87	SDM	MCS5	11.68	11.69	14.70	0.49	15.19	24.00	-8.81
	6465	103	SDM	MCS0	11.66	11.64	14.66	-0.25	14.41	24.00	-9.59
	6545	119	SDM	MCS0	10.96	10.69	13.84	1.02	14.86	24.00	-9.14
	6705	151	SDM	MCS3	10.82	10.95	13.90	1.02	14.92	24.00	-9.08
	6865	183	SDM	MCS0	10.62	10.79	13.71	1.02	14.73	24.00	-9.27
	6945	199	SDM	MCS0	10.89	10.98	13.94	1.05	14.99	24.00	-9.01
	7025	215	SDM	MCS5	10.78	10.97	13.89	1.05	14.94	24.00	-9.06

Table 7-46. CDD/SDM Primary 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF5B	Antenna WF8	Summed				
	6025	15	SDM	MCS5	13.06	13.10	16.09	0.96	17.05	24.00	-6.95
	6185	47	SDM	MCS5	14.28	14.13	17.22	0.45	17.67	24.00	-6.33
	6345	79	SDM	MCS0	14.52	14.43	17.49	0.49	17.98	24.00	-6.02
	6505	111	SDM	MCS5	13.53	13.73	16.64	-0.25	16.39	24.00	-7.61
	6665	143	SDM	MCS0	13.73	13.76	16.75	1.02	17.77	24.00	-6.23
	6825	175	SDM	MCS3	13.27	13.48	16.39	1.02	17.41	24.00	-6.59
	6985	207	SDM	MCS0	13.88	13.88	16.89	1.05	17.94	24.00	-6.06

Table 7-47. CDD/SDM Primary 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-15-R2.BCG	Test Dates: 5/12/2025 - 8/26/2025	EUT Type: Tablet Device	Page 57 of 239