



Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 7085MHz
Channel: 227

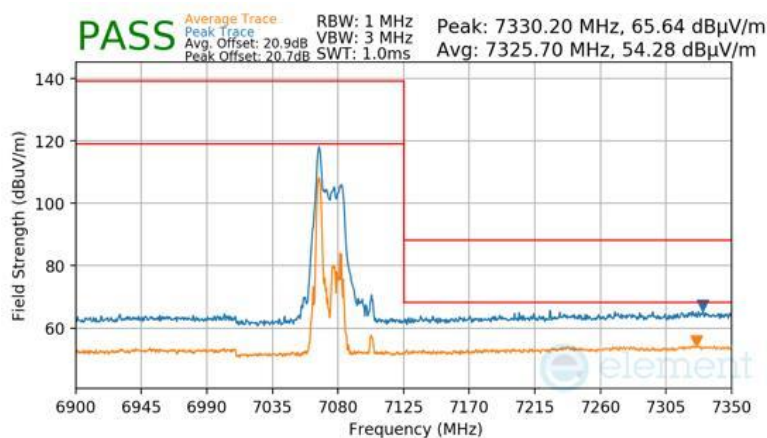

Plot 7-1103 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 17
Distance of Measurements: 3 Meters
Operating Frequency: 7085MHz
Channel: 227

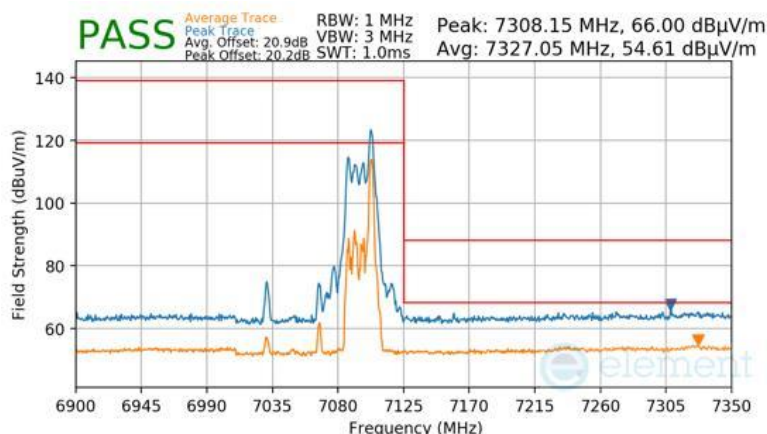


Plot 7-1104 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 422 of 463


RU484

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 65
Distance of Measurements: 3 Meters
Operating Frequency: 6125MHz
Channel: 35

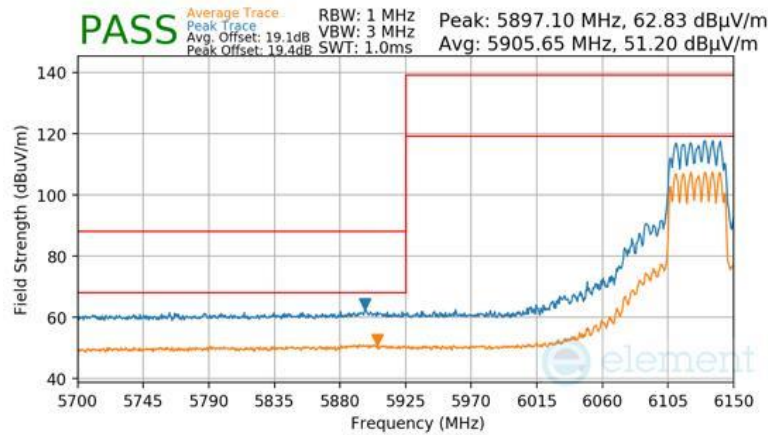

Plot 7-1105 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 65
Distance of Measurements: 3 Meters
Operating Frequency: 7085MHz
Channel: 227

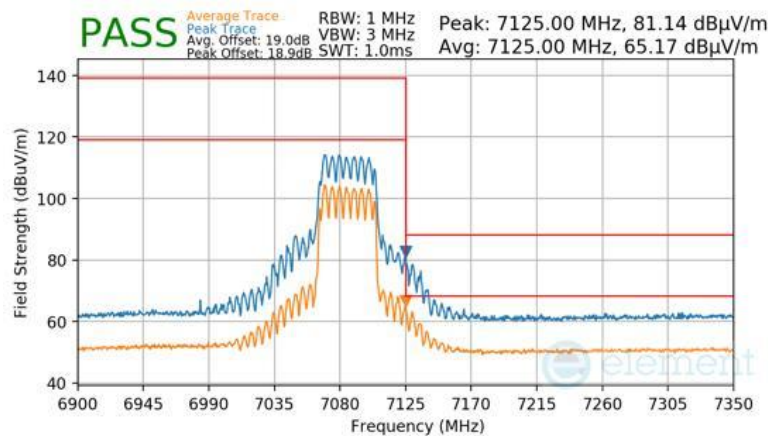

Plot 7-1106 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 423 of 463

V 11.0 05/2025

7.7.21 SDM Diversity Radiated Band Edge Measurements (80MHz BW)


RU26

Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6145MHz
 Channel: 39

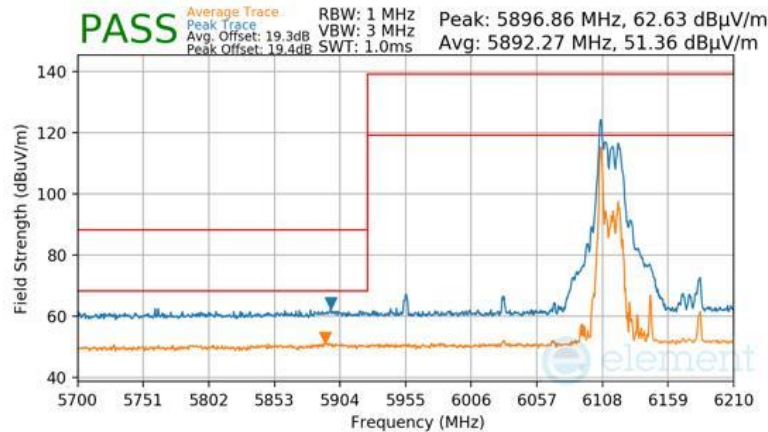

Plot 7-1107 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26


Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 36
 Distance of Measurements: 3 Meters
 Operating Frequency: 6145MHz
 Channel: 39

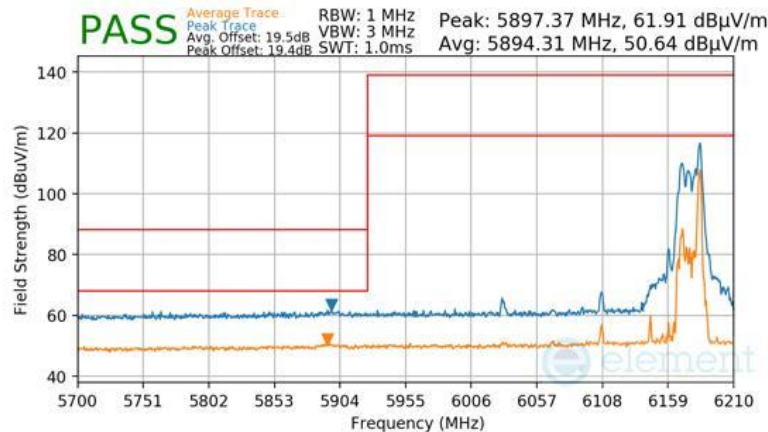

Plot 7-1108 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 424 of 463

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

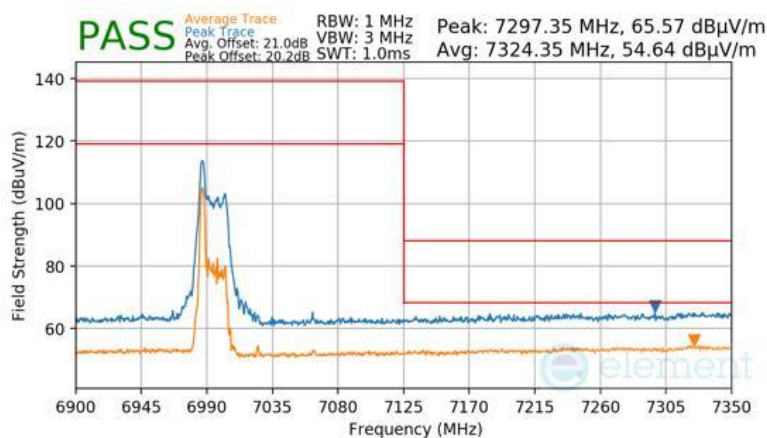

Plot 7-1109 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 36
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

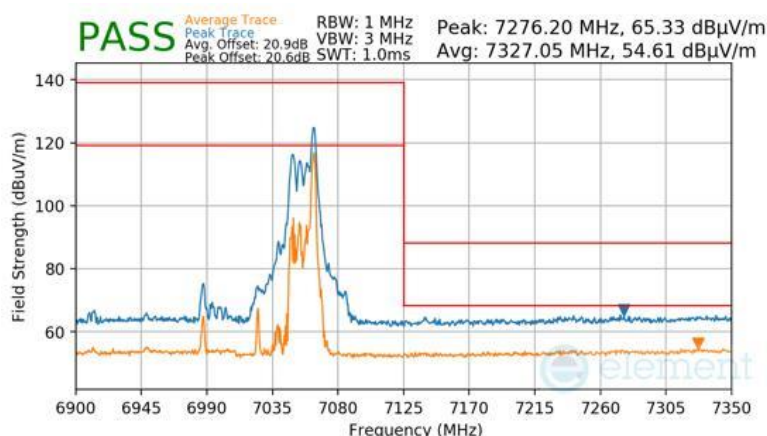


Plot 7-1110 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 425 of 463


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 92
Distance of Measurements: 3 Meters
Operating Frequency: 6145MHz
Channel: 39

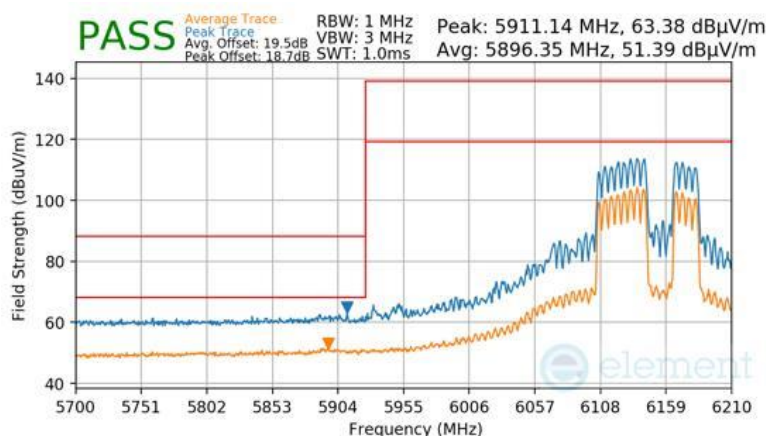

Plot 7-1113 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 93
Distance of Measurements: 3 Meters
Operating Frequency: 6145MHz
Channel: 39

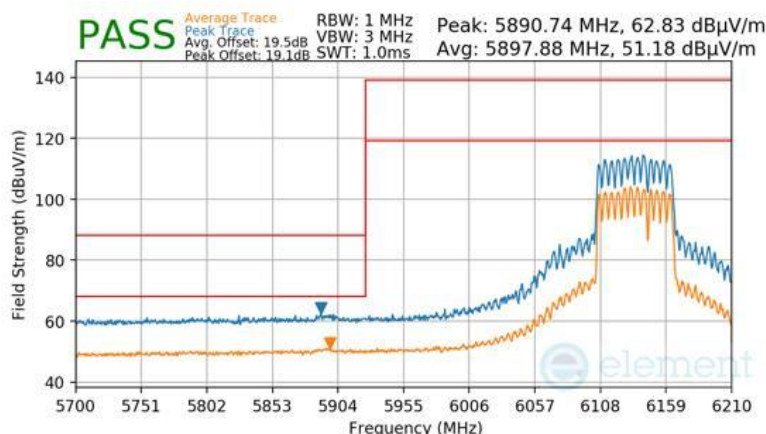


Plot 7-1114 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 427 of 463


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 90
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

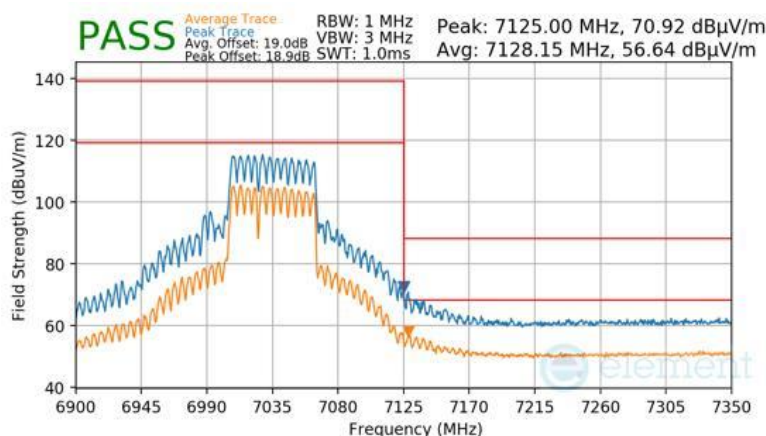

Plot 7-1115 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 91
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

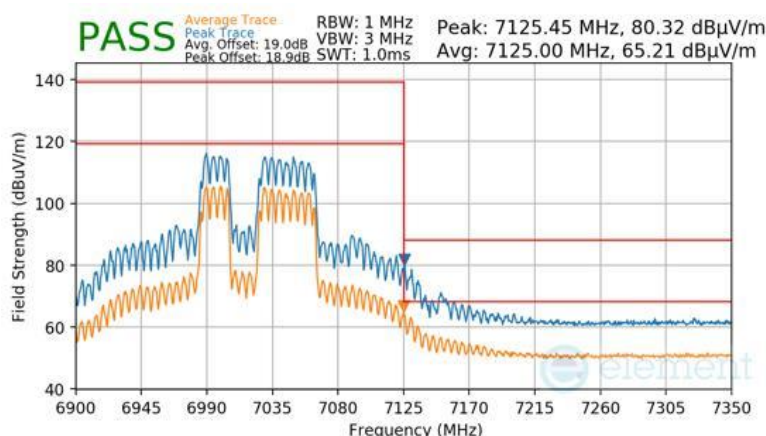


Plot 7-1116 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 428 of 463


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 92
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

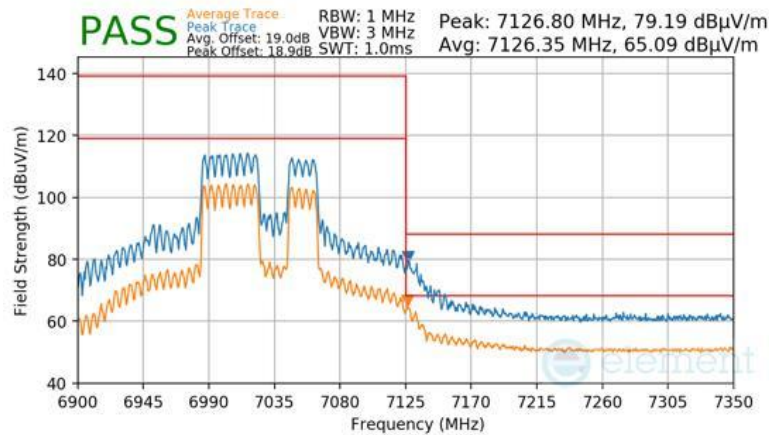

Plot 7-1117 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 93
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

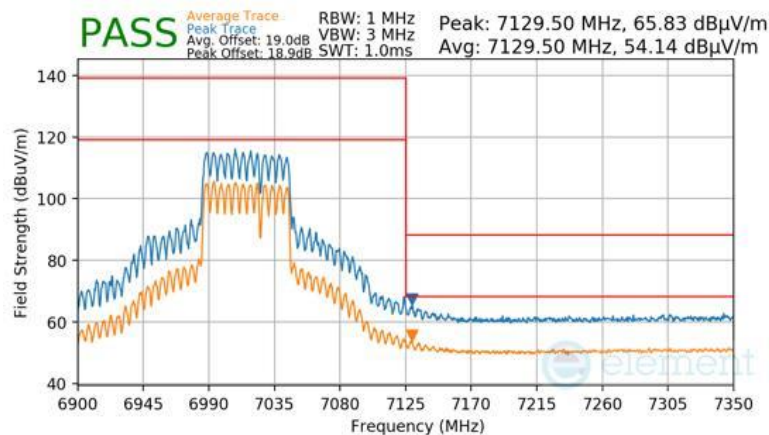


Plot 7-1118 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 429 of 463


RU996

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 6145MHz
Channel: 39

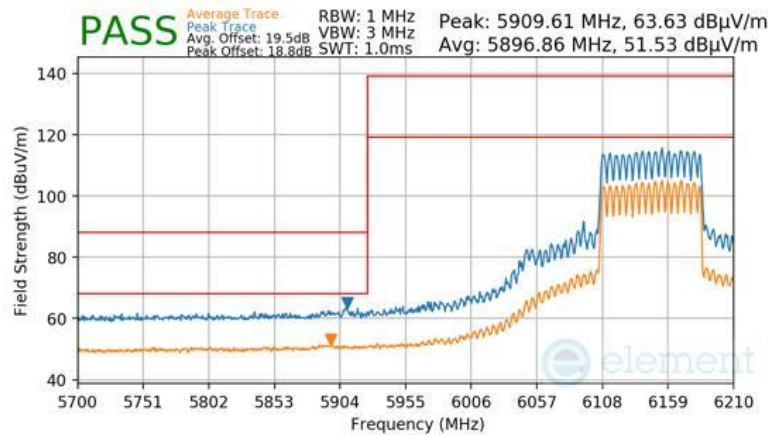

Plot 7-1119 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

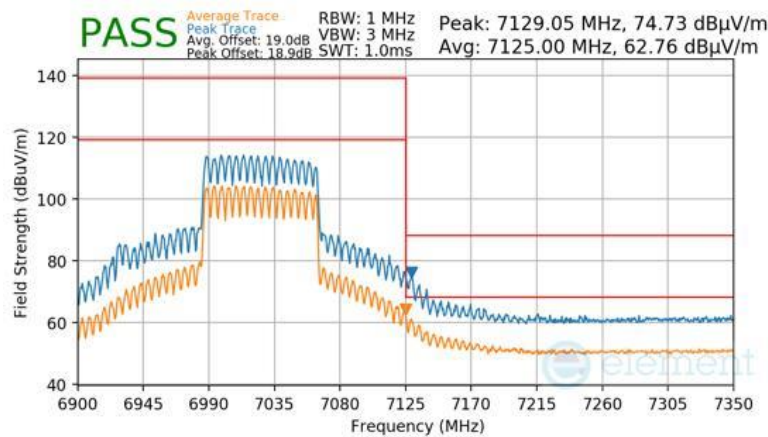

Plot 7-1120 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 430 of 463

V 11.0 05/2025

7.7.22 SDM Diversity Radiated Band Edge Measurements (160MHz BW)


RU26

Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6185MHz
 Channel: 47

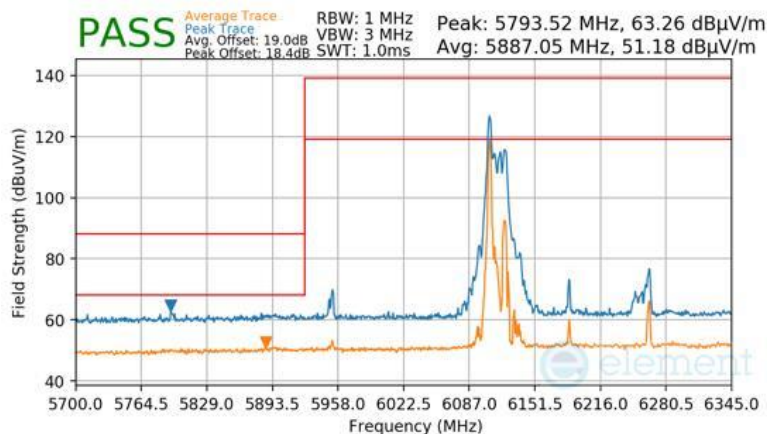

Plot 7-1121 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 36
 Distance of Measurements: 3 Meters
 Operating Frequency: 6185MHz
 Channel: 47

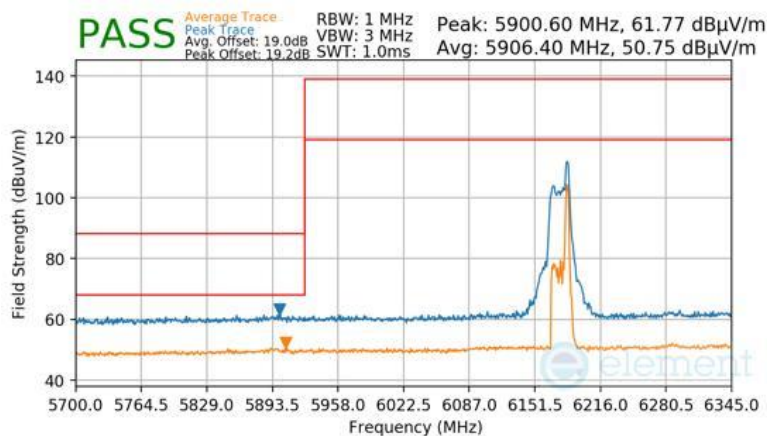


Plot 7-1122 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 431 of 463


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

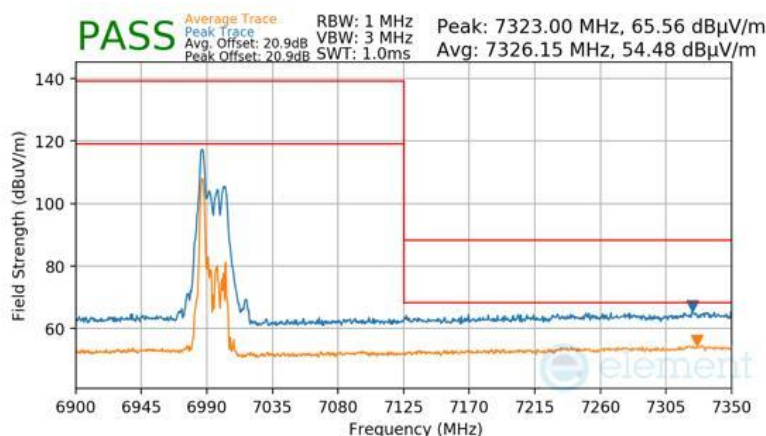

Plot 7-1123 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 36
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

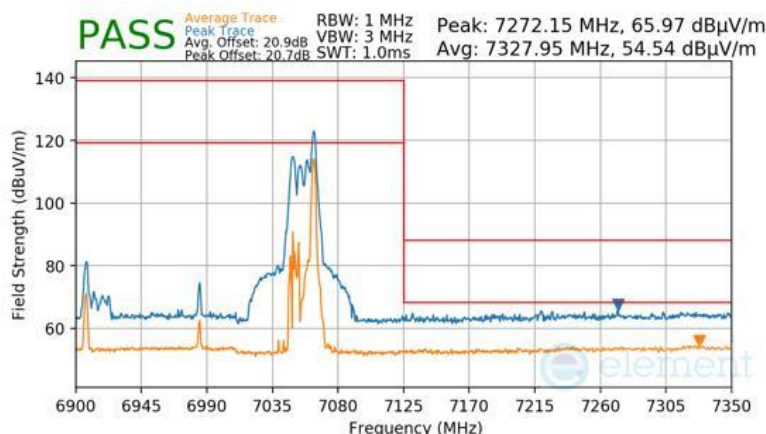


Plot 7-1124 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 432 of 463


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6185MHz
Channel: 47

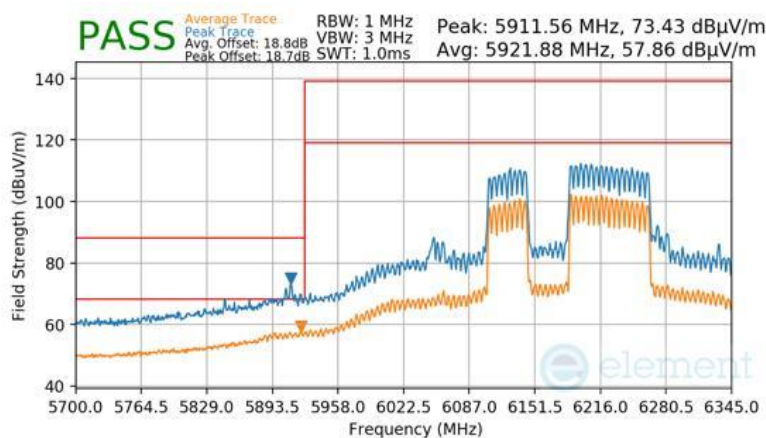

Plot 7-1127 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6185MHz
Channel: 47

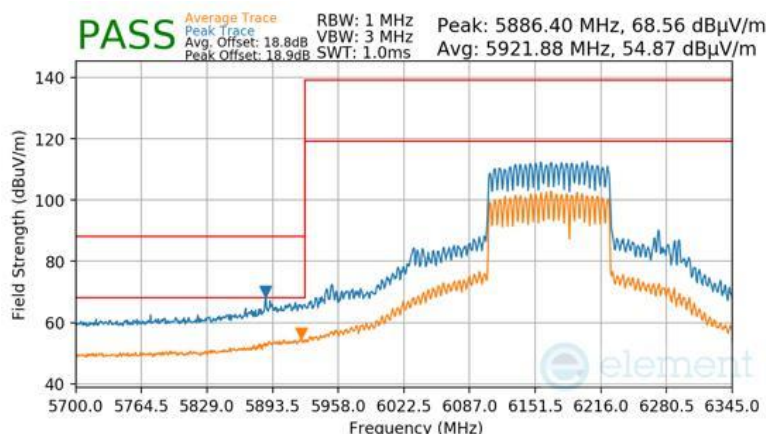


Plot 7-1128 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (H)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 434 of 463


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

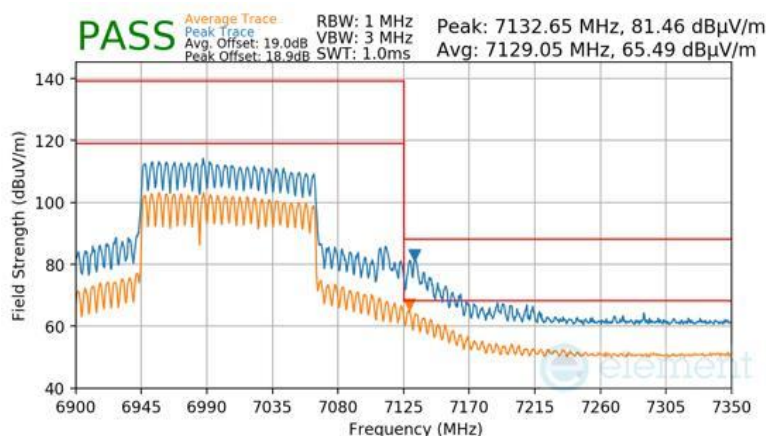

Plot 7-1129 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

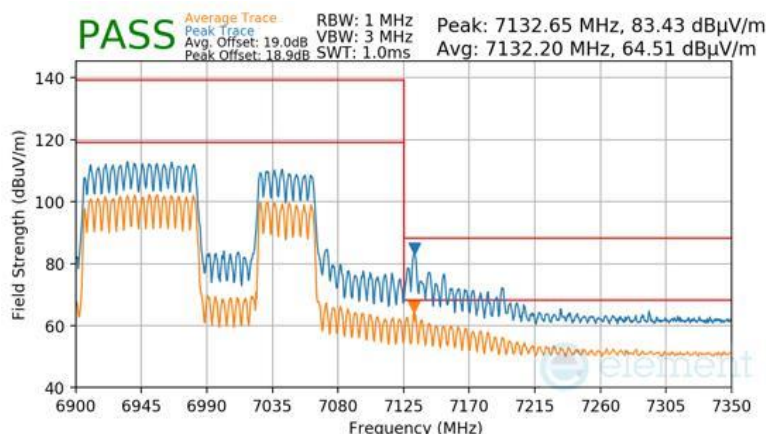


Plot 7-1130 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 435 of 463


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

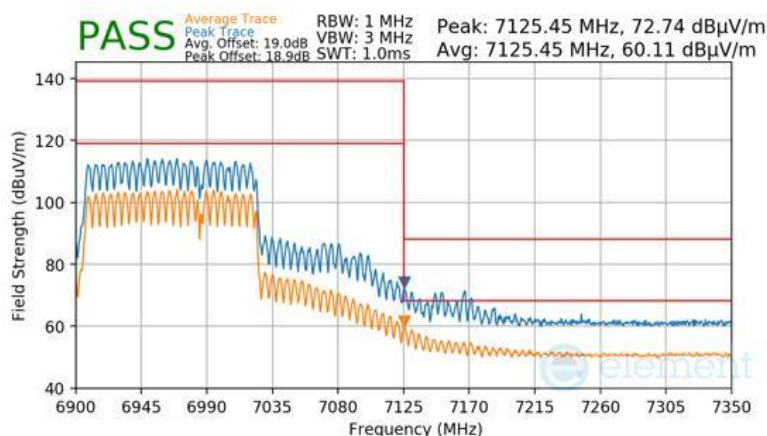

Plot 7-1131 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

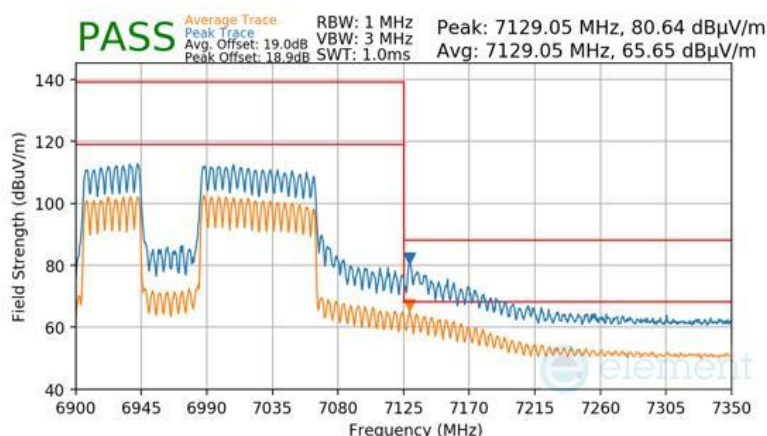


Plot 7-1132 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 436 of 463


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6185MHz
Channel: 47

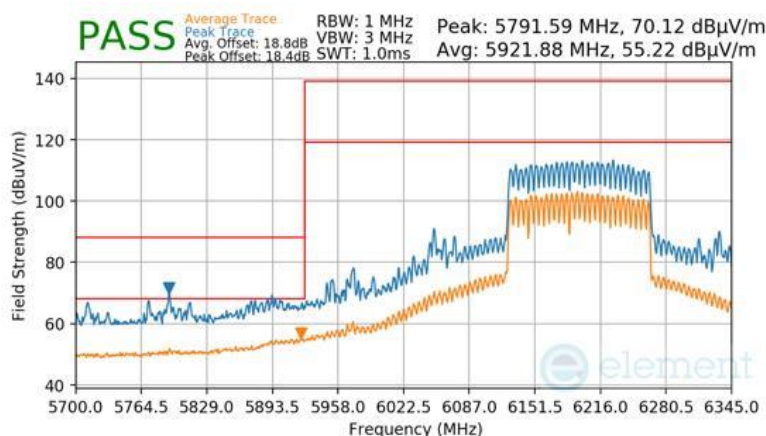

Plot 7-1133 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6185MHz
Channel: 47

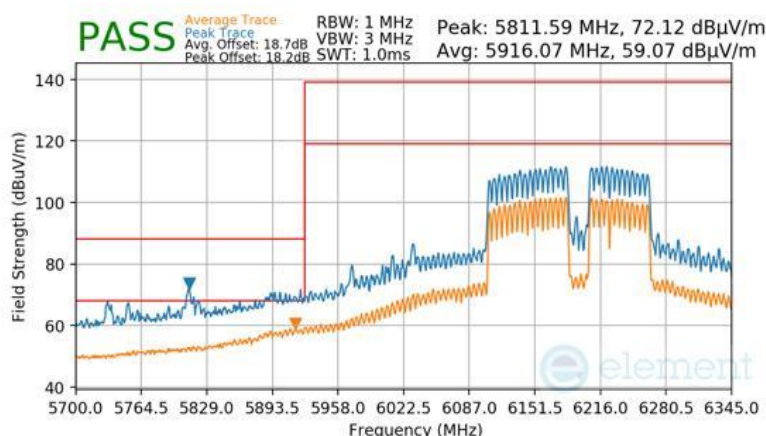


Plot 7-1134 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 437 of 463


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6185MHz
Channel: 47

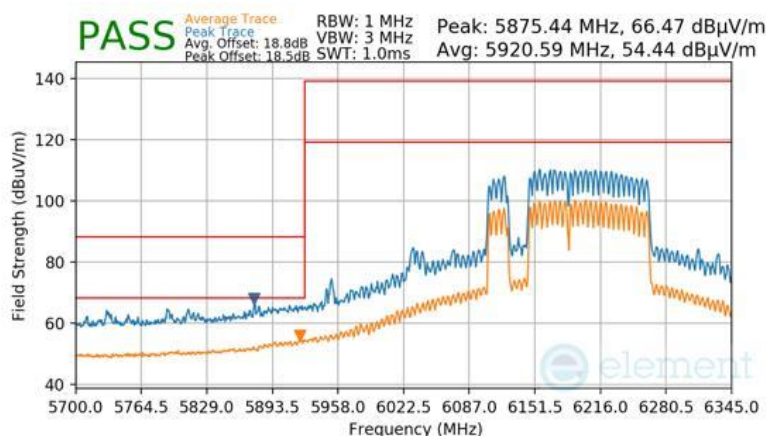

Plot 7-1135 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6185MHz
Channel: 47

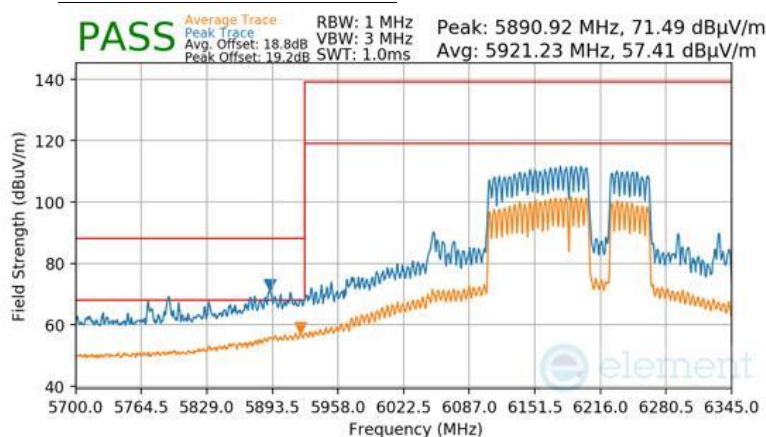


Plot 7-1136 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 438 of 463


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6185MHz
Channel: 47

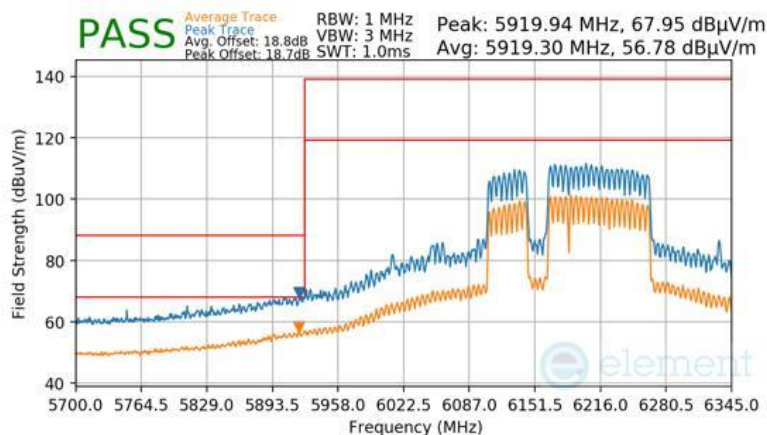

Plot 7-1137 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6185MHz
Channel: 47

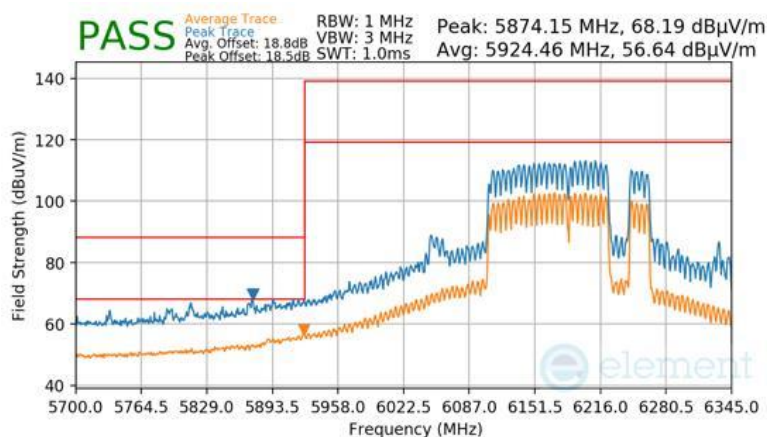


Plot 7-1138 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 439 of 463


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6185MHz
Channel: 47

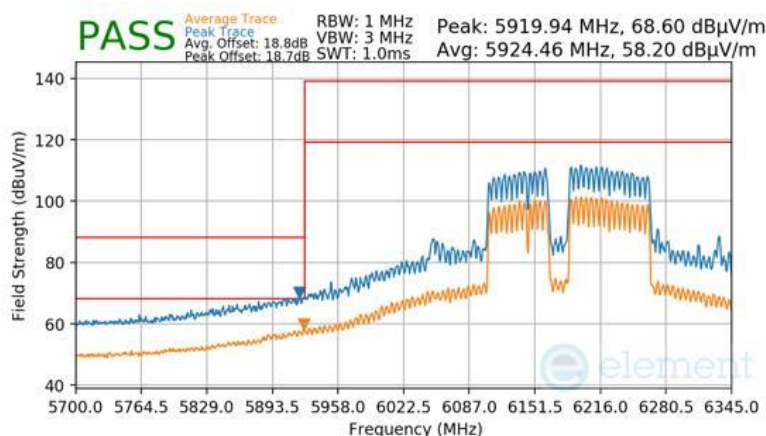

Plot 7-1139 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6185MHz
Channel: 47

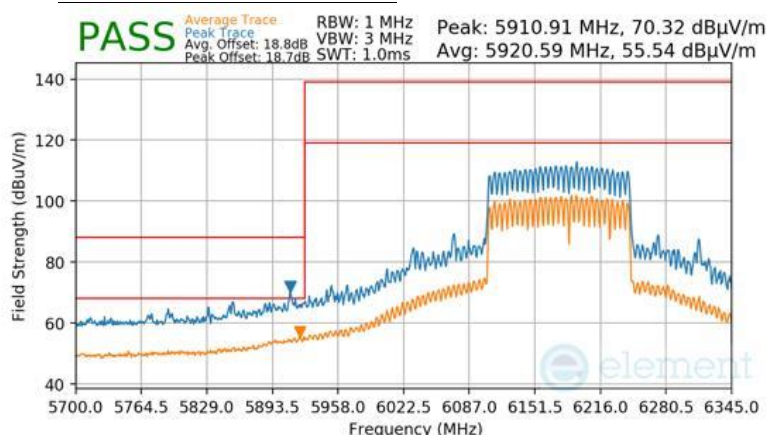


Plot 7-1140 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 440 of 463


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

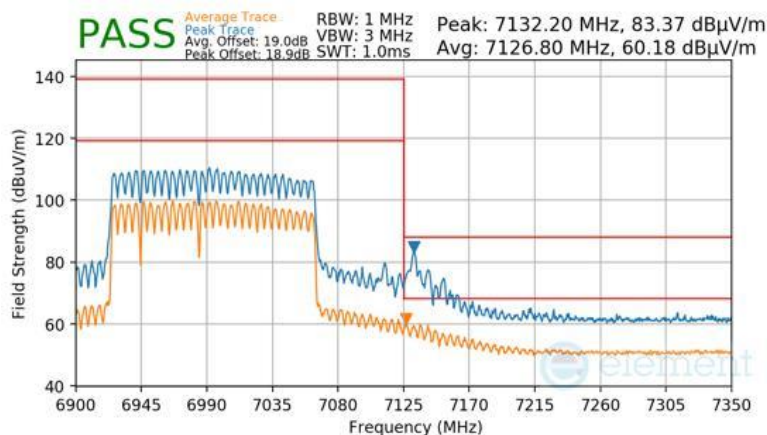

Plot 7-1141 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

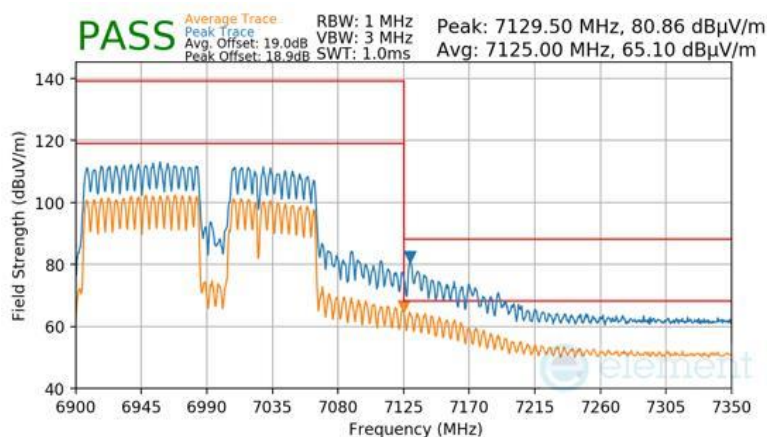


Plot 7-1142 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 441 of 463


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

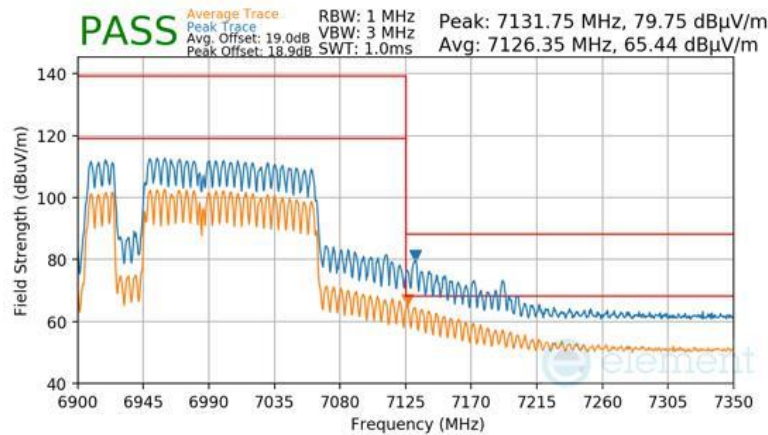

Plot 7-1143 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

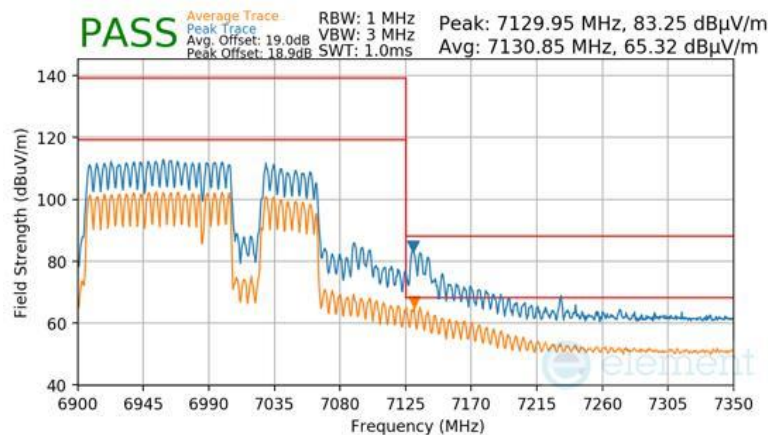

Plot 7-1144 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 442 of 463

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

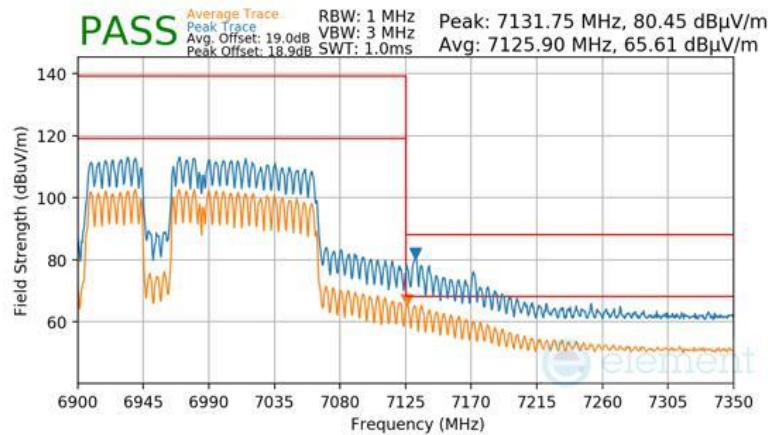

Plot 7-1145 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

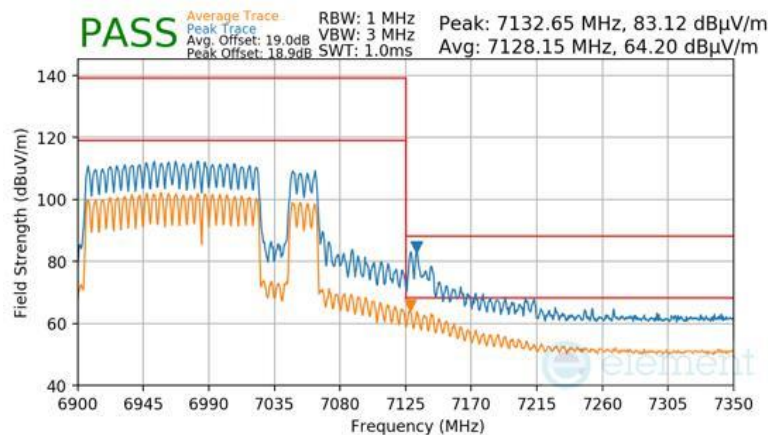

Plot 7-1146 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 443 of 463

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

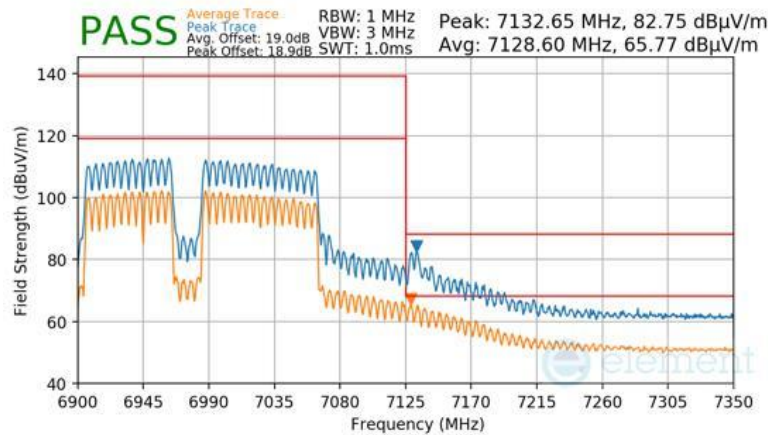

Plot 7-1147 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

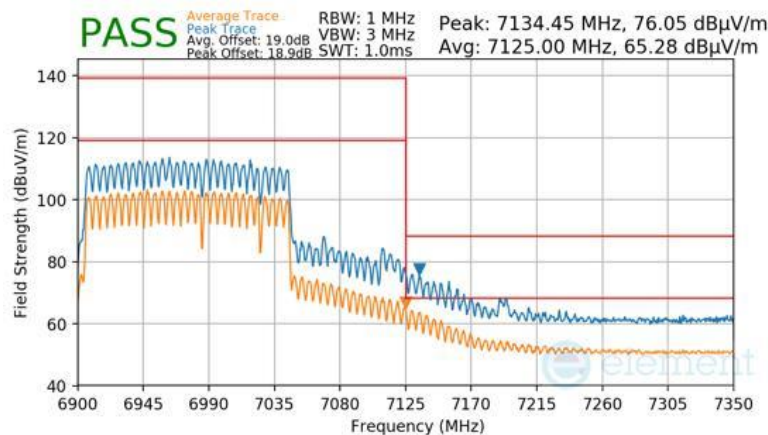


Plot 7-1148 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 444 of 463

V 11.0 05/2025


RU996x2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 6185MHz
Channel: 47

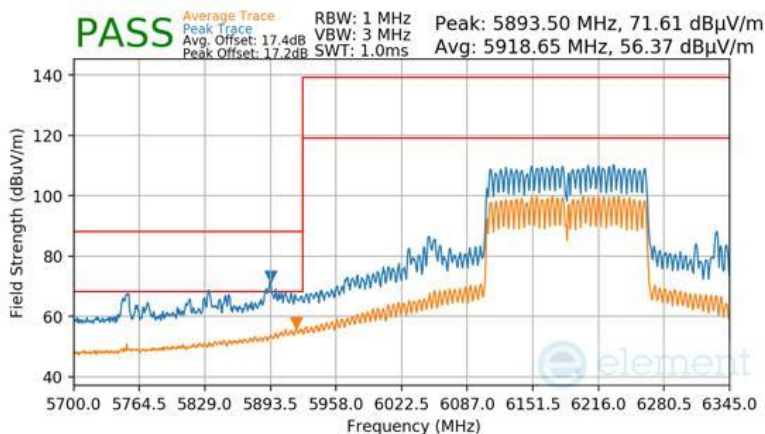

Plot 7-1149 SDM Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996X2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

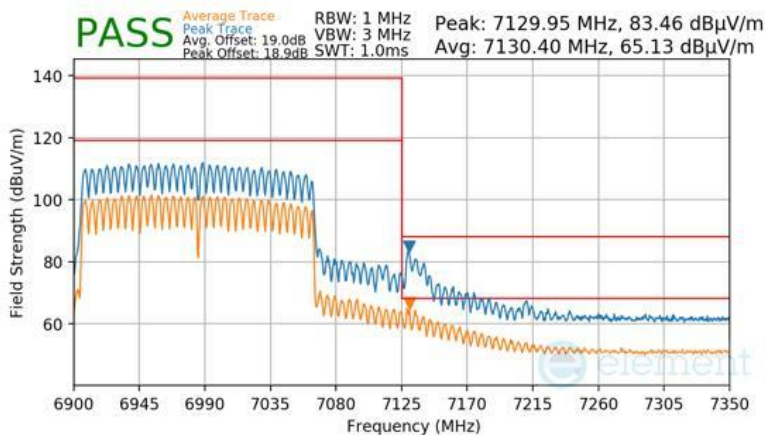

Plot 7-1150 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996X2

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 445 of 463

V 11.0 05/2025

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-153 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-153. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 446 of 463

V 11.0 05/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

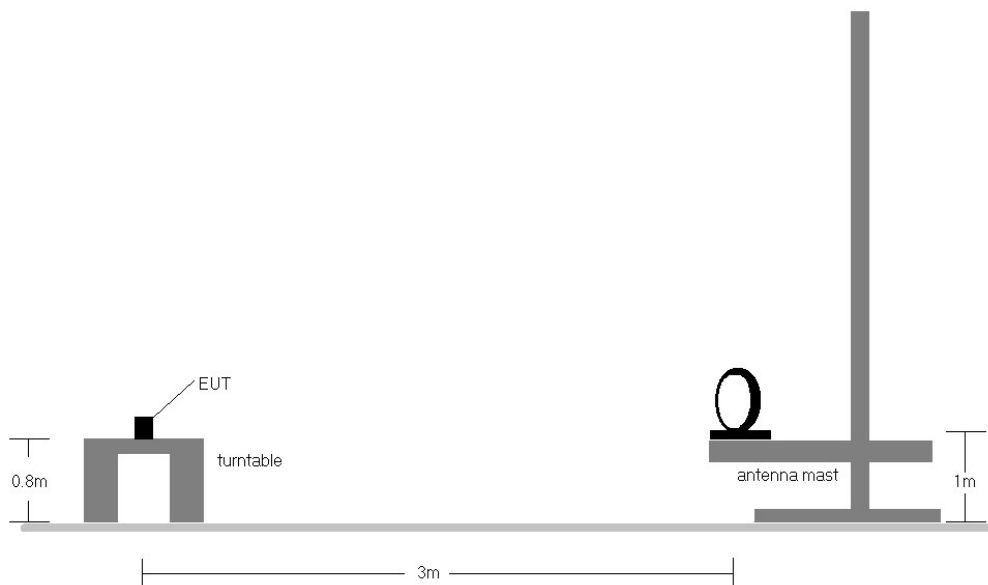


Figure 7-6. Radiated Test Setup < 30MHz

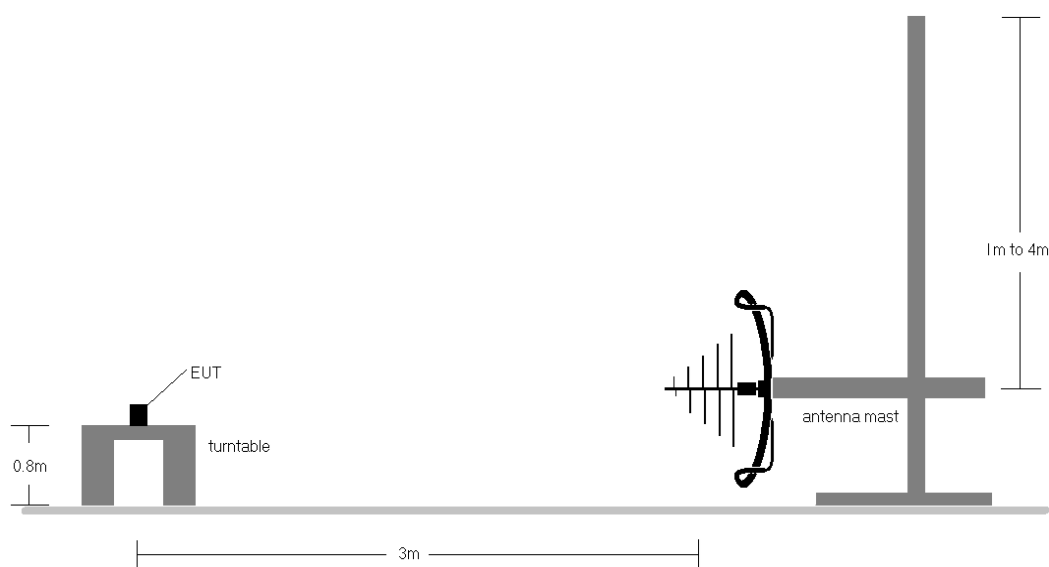


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 447 of 463	

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-153.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamp Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 448 of 463

V 11.0 05/2025

7.8.1 SDM Primary Radiated Spurious Emissions Measurements (Below 1GHz)

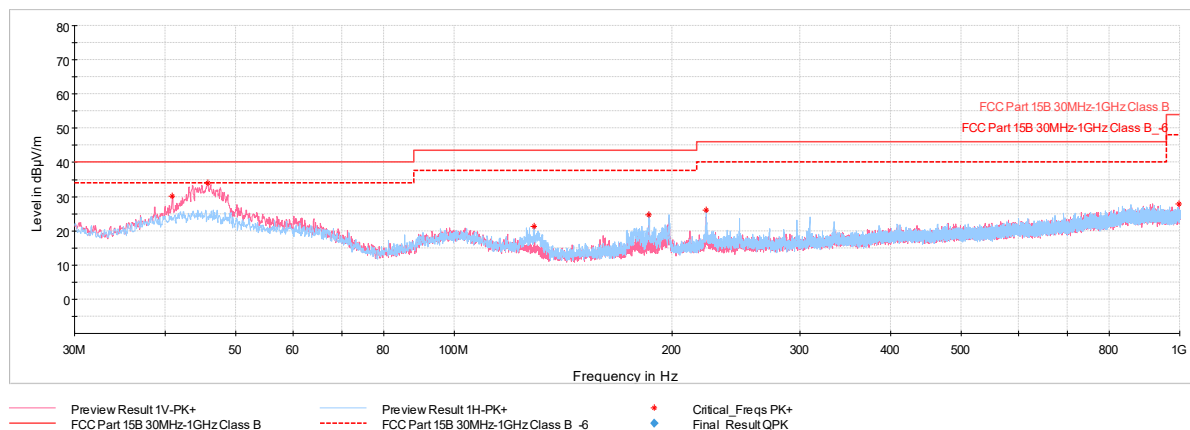


Plot 7-1151. Radiated Spurious Emissions below 1GHz SDM Primary (802.11be – Ch.61 – RU26) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
40.91	Max Peak	V	100	276	-61.44	-15.48	30.08	40.00	-9.92
45.76	Max Peak	V	100	15	-58.61	-14.49	33.90	40.00	-6.10
128.79	Max Peak	H	300	184	-66.25	-19.48	21.27	43.52	-22.25
185.64	Max Peak	H	200	102	-65.11	-17.23	24.66	43.52	-18.86
222.59	Max Peak	H	200	15	-65.44	-15.59	25.97	46.02	-20.05
996.51	Max Peak	V	100	162	-78.26	-0.97	27.77	53.98	-26.21

Table 7-154. Radiated Spurious Emissions below 1GHz SDM Primary(802.11be – Ch.61 – RU26) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 449 of 463

V 11.0 05/2025

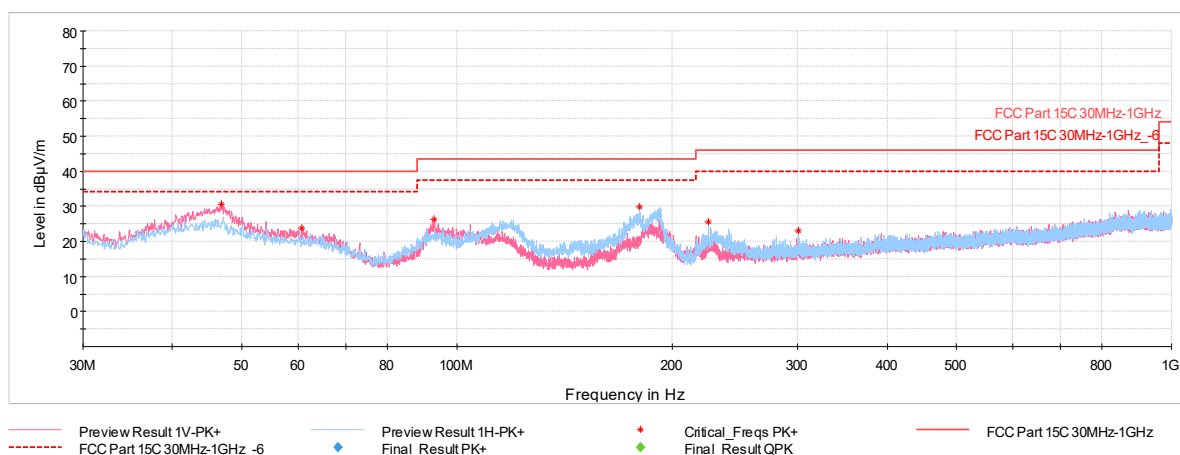

Plot 7-1152. Radiated Spurious Emissions below 1GHz SDM Primary (802.11be – Ch.61 – RU242) with AC/DC Adapter


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
46.83	Max Peak	V	100	235	-62.09	-14.38	30.53	40.00	-9.47
60.70	Max Peak	V	100	16	-67.31	-15.99	23.70	40.00	-16.30
93.05	Max Peak	V	100	72	-62.87	-17.73	26.40	43.52	-17.12
180.30	Max Peak	H	100	76	-59.49	-17.75	29.76	43.52	-13.76
224.83	Max Peak	H	100	93	-66.00	-15.45	25.55	46.02	-20.47
300.63	Max Peak	H	100	114	-70.60	-13.34	23.06	46.02	-22.96

Table 7-155. Radiated Spurious Emissions below 1GHz SDM Primary (802.11be – Ch.61 – RU242) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 450 of 463

V 11.0 05/2025

7.8.2 SDM Diversity Radiated Spurious Emissions Measurements (Below 1GHz)

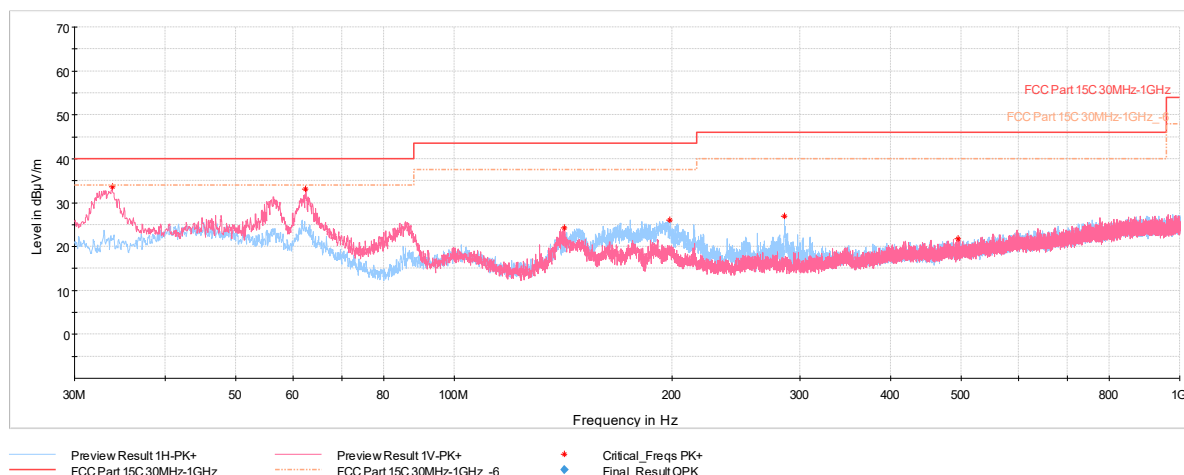

Plot 7-1153. Radiated Spurious Emissions below 1GHz SDM Diversity (802.11be – Ch.61 – RU26) with AC/DC Adapter


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
33.83	Max Peak	V	100	266	-54.55	-18.91	33.54	40.00	-6.46
62.50	Max Peak	V	100	26	-56.04	-17.85	33.11	40.00	-6.89
142.08	Max Peak	V	100	266	-61.21	-21.58	24.21	43.52	-19.31
198.49	Max Peak	H	100	179	-63.19	-17.75	26.06	43.52	-17.46
285.35	Max Peak	H	100	294	-64.21	-15.88	26.91	46.02	-19.11
494.87	Max Peak	V	200	179	-73.92	-11.33	21.75	46.02	-24.27

Table 7-156. Radiated Spurious Emissions below 1GHz SDM Diversity(802.11be – Ch.61 – RU26) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 451 of 463

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

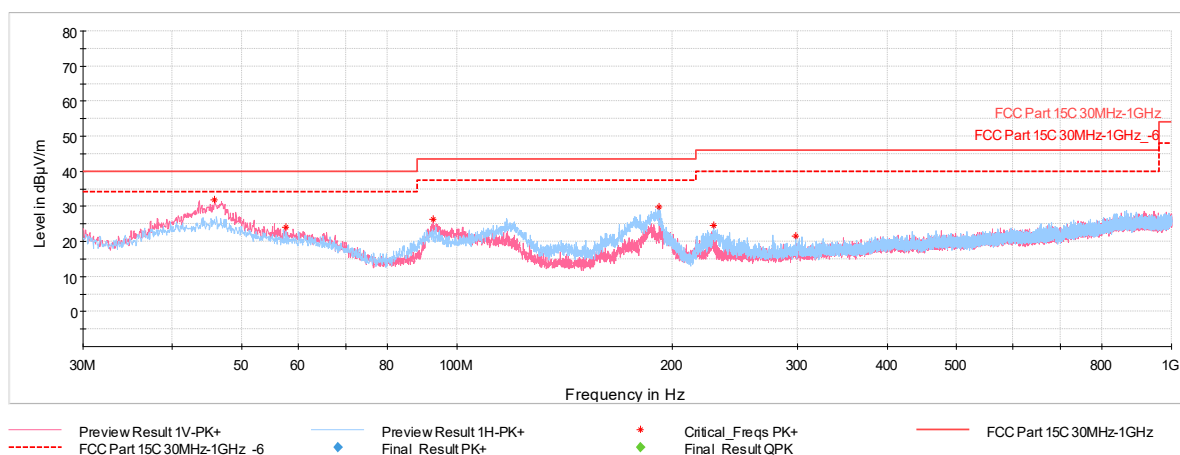

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
45.81	Max Peak	V	100	343	-60.69	-14.48	31.83	40.00	-8.17
57.60	Max Peak	V	100	315	-67.75	-15.14	24.11	40.00	-15.89
92.61	Max Peak	V	100	98	-62.91	-17.76	26.33	43.52	-17.19
191.85	Max Peak	H	200	255	-60.73	-16.32	29.95	43.52	-13.57
229.00	Max Peak	H	100	102	-67.15	-15.21	24.64	46.02	-21.38
298.35	Max Peak	H	100	14	-72.24	-13.33	21.43	46.02	-24.59

Table 7-157. Radiated Spurious Emissions below 1GHz SDM Diversity (802.11be – Ch.61 – RU242) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 452 of 463

V 11.0 05/2025

7.9 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-158. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 453 of 463

V 11.0 05/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

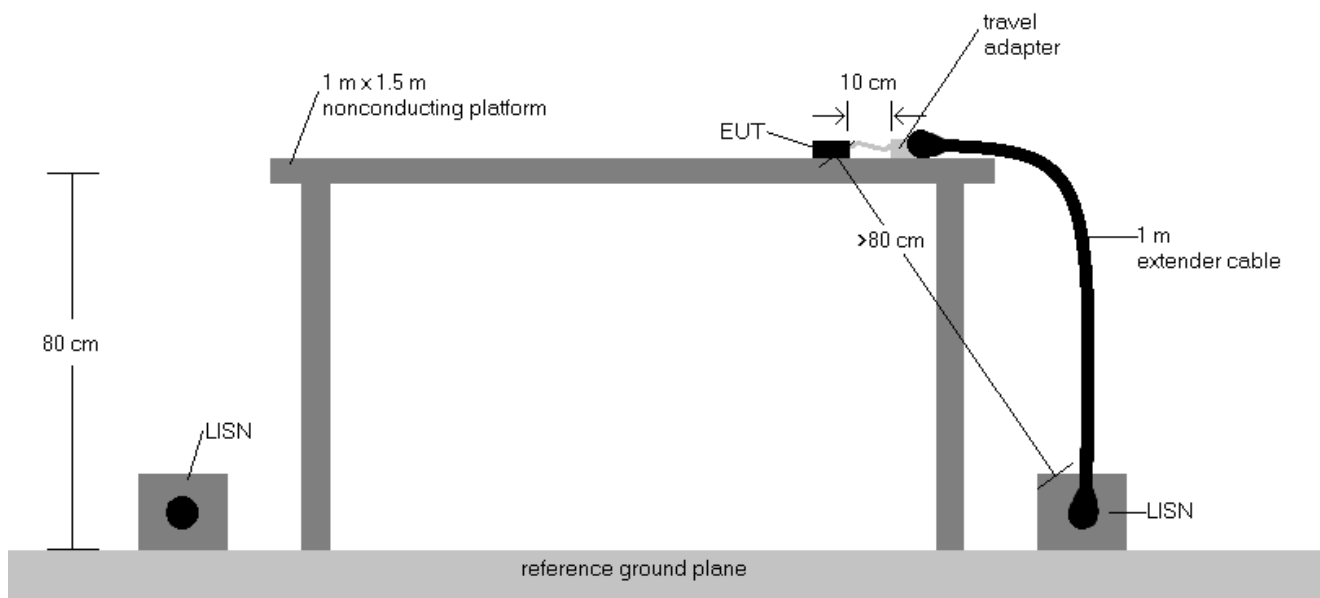


Figure 7-8. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 454 of 463

V 11.0 05/2025

7.9.1 SDM Primary

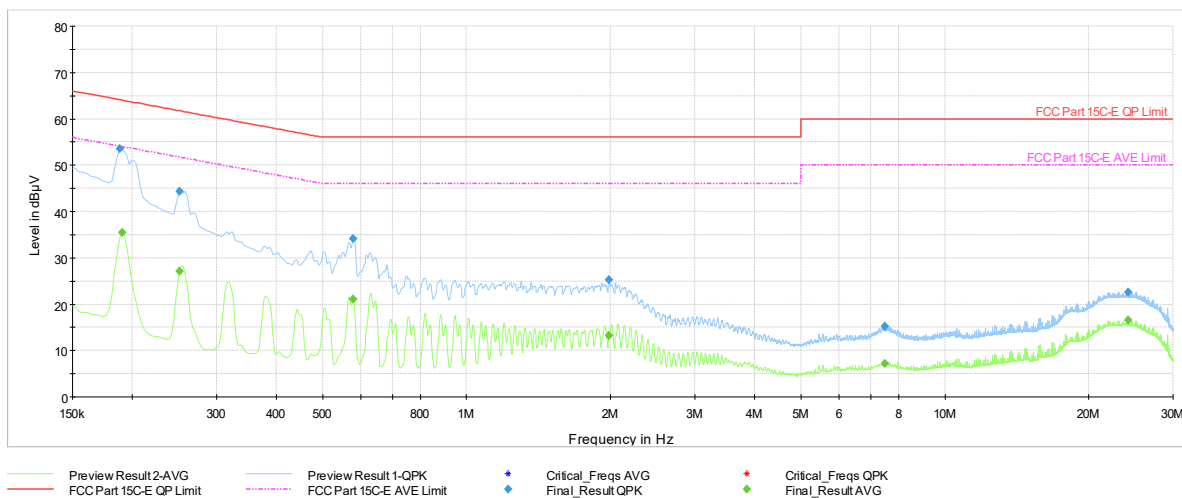

Plot 7-1155. AC Line Conducted Plot with 11be UNII Band 5 SDM Primary – RU26 – Ch.33 (L1) with Laptop


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.19	FINAL	53.54	---	64.11	-10.57	L1	GND
0.19	FINAL	---	35.48	54.02	-18.54	L1	GND
0.25	FINAL	---	27.14	51.72	-24.58	L1	GND
0.25	FINAL	44.41	---	61.72	-17.31	L1	GND
0.58	FINAL	---	21.03	46.00	-24.97	L1	GND
0.58	FINAL	34.19	---	56.00	-21.81	L1	GND
1.98	FINAL	25.27	---	56.00	-30.73	L1	GND
1.99	FINAL	---	13.29	46.00	-32.71	L1	GND
7.49	FINAL	15.27	---	60.00	-44.73	L1	GND
7.50	FINAL	---	7.15	50.00	-42.85	L1	GND
24.14	FINAL	---	16.59	50.00	-33.41	L1	GND
24.14	FINAL	22.65	---	60.00	-37.35	L1	GND

Table 7-159. AC Line Conducted Data with 11be UNII Band 5 SDM Primary – RU26 – Ch.33 (L1) with Laptop

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 455 of 463

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

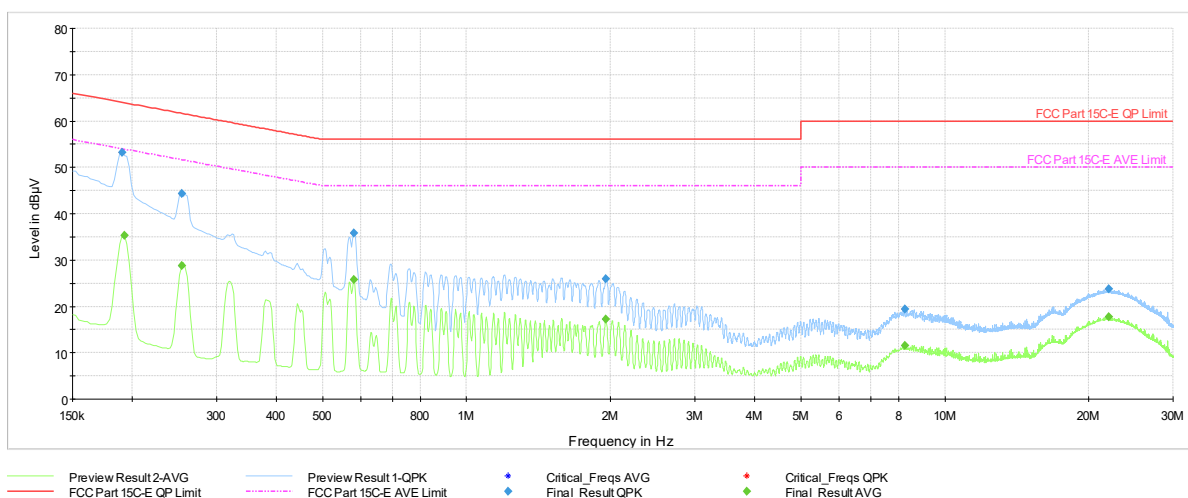

Plot 7-1156. AC Line Conducted Plot with 11be UNII Band 5 SDM Primary – RU26 – Ch.33 (N) with Laptop


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.19	FINAL	53.14	---	64.02	-10.88	N	GND
0.19	FINAL	---	35.39	53.92	-18.53	N	GND
0.25	FINAL	---	28.82	51.64	-22.82	N	GND
0.25	FINAL	44.38	---	61.64	-17.26	N	GND
0.58	FINAL	---	25.72	46.00	-20.28	N	GND
0.58	FINAL	35.86	---	56.00	-20.14	N	GND
1.96	FINAL	25.93	---	56.00	-30.07	N	GND
1.96	FINAL	---	17.20	46.00	-28.80	N	GND
8.25	FINAL	19.39	---	60.00	-40.61	N	GND
8.25	FINAL	---	11.47	50.00	-38.53	N	GND
22.04	FINAL	---	17.78	50.00	-32.22	N	GND
22.04	FINAL	23.72	---	60.00	-36.28	N	GND

Table 7-160. AC Line Conducted Data with 11be UNII Band 5 SDM Primary – RU26 – Ch.33 (N) with Laptop

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 456 of 463

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

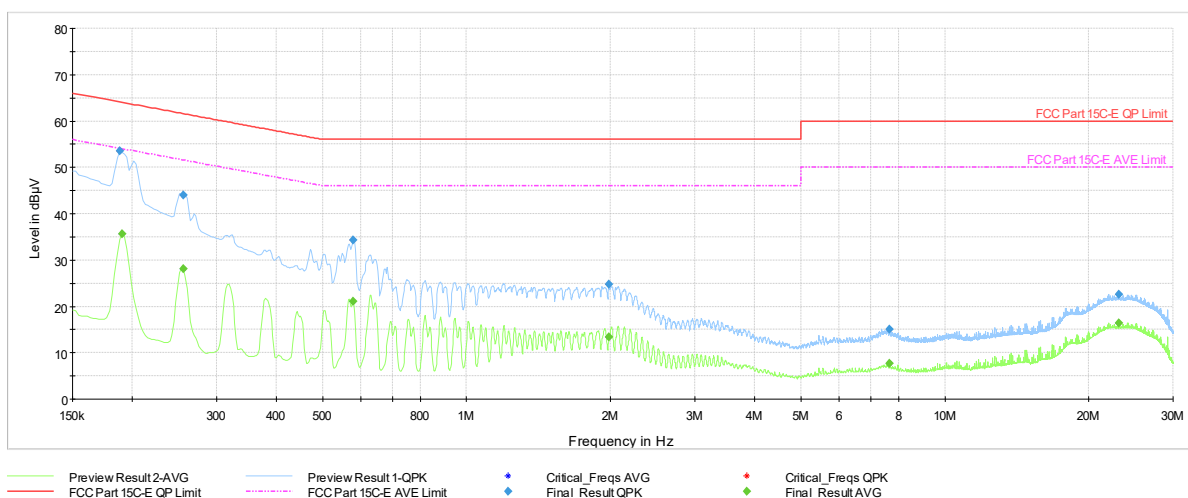


Plot 7-1157. AC Line Conducted Plot with 11be UNII Band 5 SDM Primary – RU242 – Ch.33 (L1) with Laptop

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.19	FINAL	53.48	---	64.11	-10.63	L1	GND
0.19	FINAL	---	35.58	54.02	-18.44	L1	GND
0.26	FINAL	---	28.16	51.57	-23.41	L1	GND
0.26	FINAL	43.93	---	61.57	-17.64	L1	GND
0.58	FINAL	---	21.11	46.00	-24.89	L1	GND
0.58	FINAL	34.23	---	56.00	-21.77	L1	GND
1.98	FINAL	24.85	---	56.00	-31.15	L1	GND
1.99	FINAL	---	13.37	46.00	-32.63	L1	GND
7.66	FINAL	---	7.68	50.00	-42.32	L1	GND
7.66	FINAL	15.07	---	60.00	-44.93	L1	GND
23.09	FINAL	---	16.37	50.00	-33.63	L1	GND
23.09	FINAL	22.58	---	60.00	-37.42	L1	GND

Table 7-161. AC Line Conducted Data with 11be UNII Band 5 SDM Primary – RU242 – Ch.33 (L1) with Laptop

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 457 of 463

V 11.0 05/2025

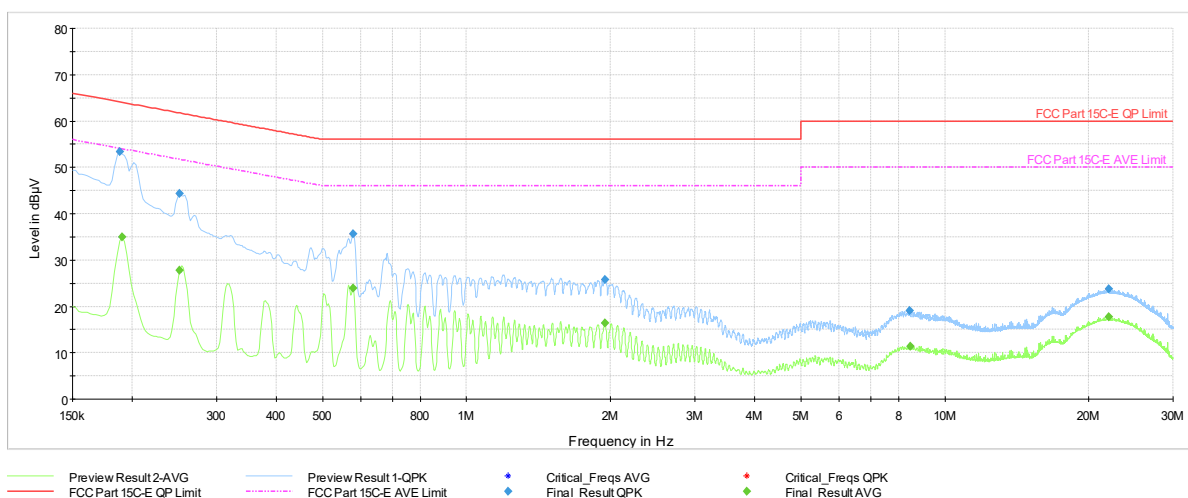

Plot 7-1158. AC Line Conducted Plot with 11be UNII Band 5 SDM Primary – RU242 – Ch.33 (N) with Laptop


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.19	FINAL	53.38	---	64.11	-10.73	N	GND
0.19	FINAL	---	34.90	54.02	-19.12	N	GND
0.25	FINAL	---	27.86	51.72	-23.86	N	GND
0.25	FINAL	44.29	---	61.72	-17.43	N	GND
0.58	FINAL	---	24.00	46.00	-22.00	N	GND
0.58	FINAL	35.59	---	56.00	-20.41	N	GND
1.95	FINAL	---	16.40	46.00	-29.60	N	GND
1.95	FINAL	25.73	---	56.00	-30.27	N	GND
8.45	FINAL	19.02	---	60.00	-40.98	N	GND
8.46	FINAL	---	11.38	50.00	-38.62	N	GND
22.04	FINAL	---	17.82	50.00	-32.18	N	GND
22.04	FINAL	23.78	---	60.00	-36.22	N	GND

Table 7-162. AC Line Conducted Data with 11be UNII Band 5 SDM Primary – RU242 – Ch.33 (N) with Laptop

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 458 of 463

V 11.0 05/2025

7.9.2 SDM Diversity

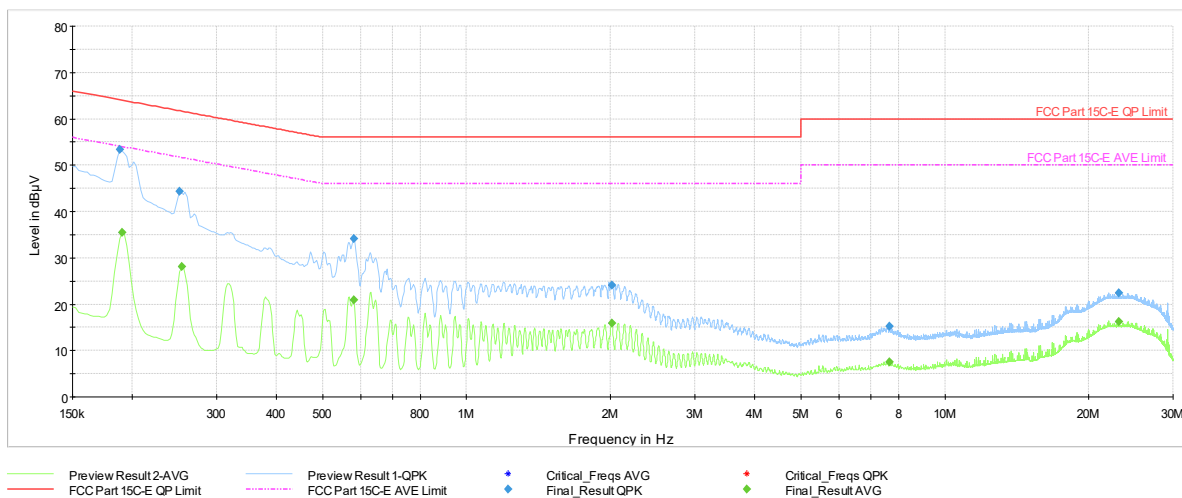


Plot 7-1159. AC Line Conducted Plot with 11be UNII Band 5 SDM Diversity – RU26 – Ch.33 (L1) with Laptop

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.19	FINAL	53.32	---	64.11	-10.79	L1	GND
0.19	FINAL	---	35.45	54.02	-18.57	L1	GND
0.25	FINAL	44.28	---	61.72	-17.44	L1	GND
0.25	FINAL	---	28.15	51.64	-23.49	L1	GND
0.58	FINAL	34.22	---	56.00	-21.78	L1	GND
0.58	FINAL	---	20.91	46.00	-25.09	L1	GND
2.01	FINAL	---	15.84	46.00	-30.16	L1	GND
2.01	FINAL	24.08	---	56.00	-31.92	L1	GND
7.66	FINAL	---	7.60	50.00	-42.40	L1	GND
7.66	FINAL	15.19	---	60.00	-44.81	L1	GND
23.09	FINAL	---	16.24	50.00	-33.76	L1	GND
23.09	FINAL	22.43	---	60.00	-37.57	L1	GND

Table 7-163. AC Line Conducted Data with 11be UNII Band 5 SDM Diversity – RU26 – Ch.33 (L1) with Laptop

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 459 of 463

V 11.0 05/2025

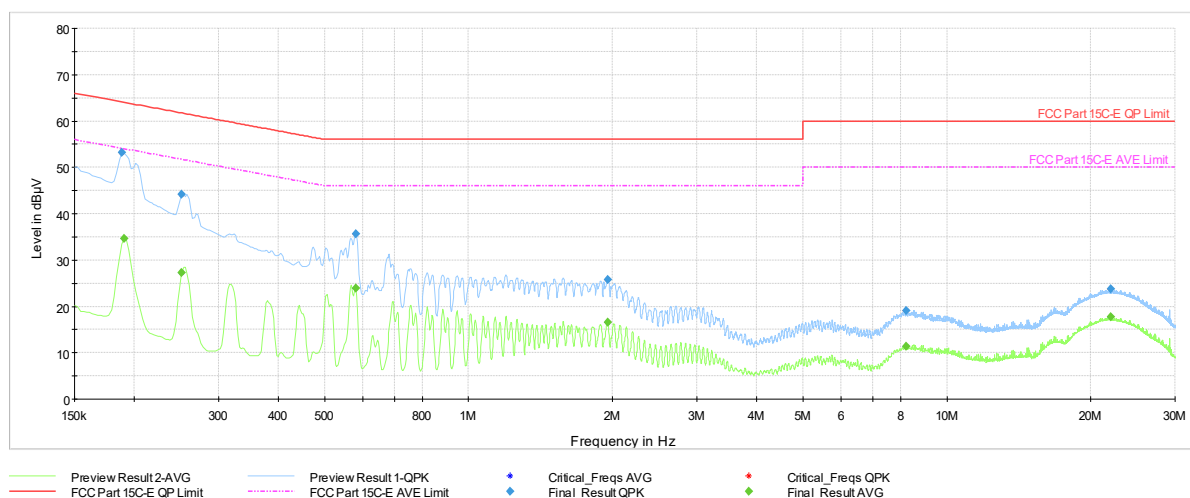


Plot 7-1160. AC Line Conducted Plot with 11be UNII Band 5 SDM Diversity – RU26 – Ch.33 (N) with Laptop

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.19	FINAL	53.22	---	64.11	-10.89	N	GND
0.19	FINAL	---	34.73	54.02	-19.29	N	GND
0.25	FINAL	---	27.21	51.72	-24.51	N	GND
0.25	FINAL	44.24	---	61.72	-17.48	N	GND
0.58	FINAL	35.66	---	56.00	-20.34	N	GND
0.58	FINAL	---	23.89	46.00	-22.11	N	GND
1.95	FINAL	25.77	---	56.00	-30.23	N	GND
1.95	FINAL	---	16.50	46.00	-29.50	N	GND
8.23	FINAL	---	11.39	50.00	-38.61	N	GND
8.23	FINAL	19.08	---	60.00	-40.92	N	GND
22.04	FINAL	---	17.74	50.00	-32.26	N	GND
22.04	FINAL	23.73	---	60.00	-36.27	N	GND

Table 7-164. AC Line Conducted Data with 11be UNII Band 5 SDM Diversity – RU26 – Ch.33 (N) with Laptop

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 460 of 463

V 11.0 05/2025

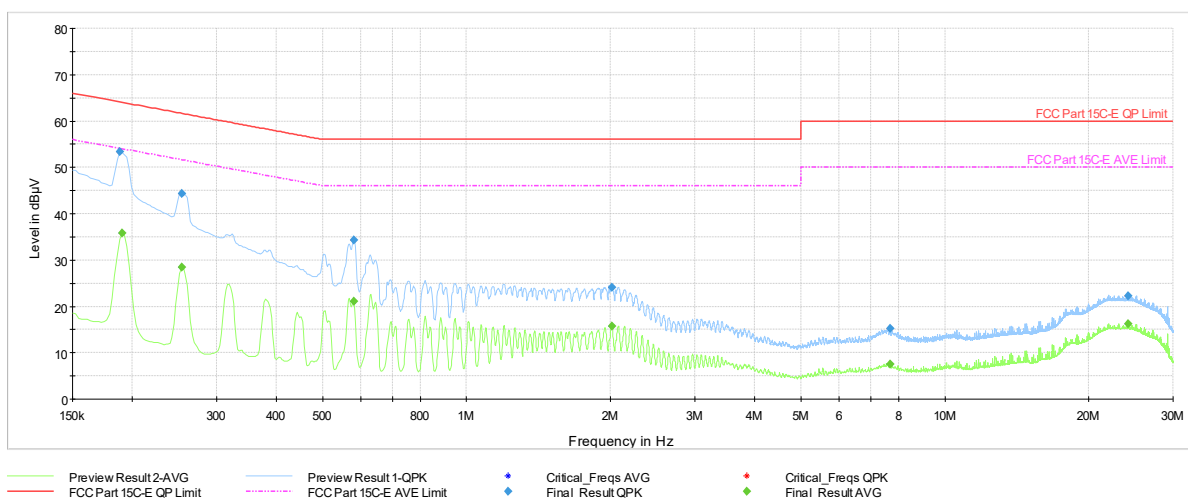


Plot 7-1161. AC Line Conducted Plot with 11be UNII Band 5 SDM Diversity – RU242 – Ch.33 (L1) with Laptop

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.19	FINAL	53.41	---	64.11	-10.70	L1	GND
0.19	FINAL	---	35.85	54.02	-18.17	L1	GND
0.25	FINAL	---	28.44	51.64	-23.20	L1	GND
0.25	FINAL	44.32	---	61.64	-17.32	L1	GND
0.58	FINAL	---	21.06	46.00	-24.94	L1	GND
0.58	FINAL	34.32	---	56.00	-21.68	L1	GND
2.01	FINAL	---	15.71	46.00	-30.29	L1	GND
2.01	FINAL	24.11	---	56.00	-31.89	L1	GND
7.67	FINAL	15.17	---	60.00	-44.83	L1	GND
7.68	FINAL	---	7.49	50.00	-42.51	L1	GND
24.14	FINAL	---	16.23	50.00	-33.77	L1	GND
24.14	FINAL	22.29	---	60.00	-37.71	L1	GND

Table 7-165. AC Line Conducted Data with 11be UNII Band 5 SDM Diversity – RU242 – Ch.33 (L1) with Laptop

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 461 of 463

V 11.0 05/2025

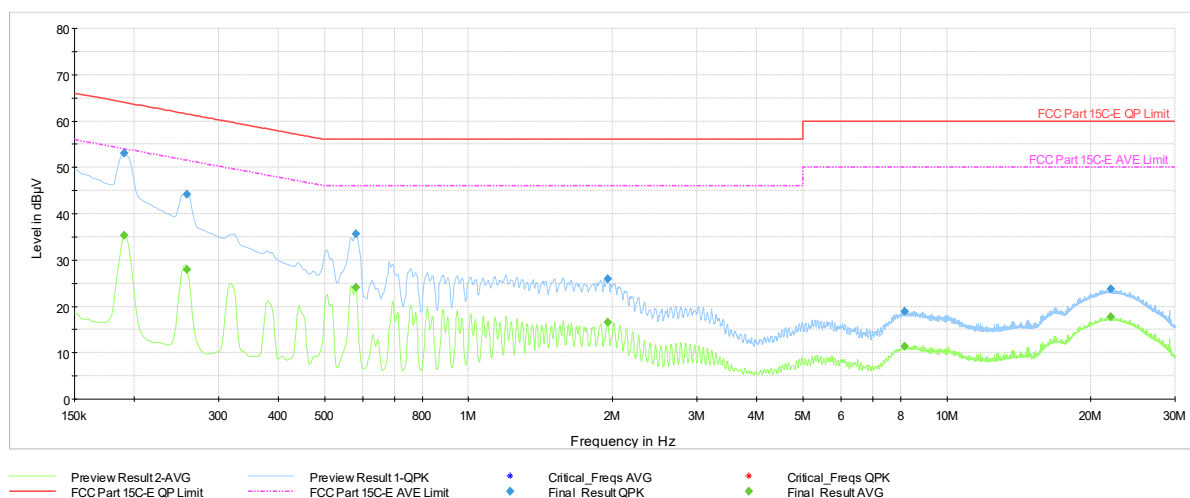

Plot 7-1162. AC Line Conducted Plot with 11be UNII Band 5 SDM Diversity – RU242 – Ch.33 (N) with Laptop

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.19	FINAL	---	35.26	54.02	-18.76	N	GND
0.19	FINAL	53.07	---	64.02	-10.95	N	GND
0.26	FINAL	---	27.88	51.50	-23.62	N	GND
0.26	FINAL	44.13	---	61.50	-17.37	N	GND
0.58	FINAL	---	24.13	46.00	-21.87	N	GND
0.58	FINAL	35.72	---	56.00	-20.28	N	GND
1.96	FINAL	---	16.59	46.00	-29.41	N	GND
1.96	FINAL	25.88	---	56.00	-30.12	N	GND
8.16	FINAL	18.96	---	60.00	-41.04	N	GND
8.16	FINAL	---	11.44	50.00	-38.56	N	GND
22.04	FINAL	---	17.76	50.00	-32.24	N	GND
22.04	FINAL	23.70	---	60.00	-36.30	N	GND

Table 7-166. AC Line Conducted Data with 11be UNII Band 5 SDM Diversity – RU242 – Ch.33 (N) with Laptop

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 462 of 463

V 11.0 05/2025

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3357** and **IC: 579C-A3357** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-18-R2.BCG	Test Dates: 5/12/2025 - 8/13/2025	EUT Type: Tablet Device	Page 463 of 463

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.