
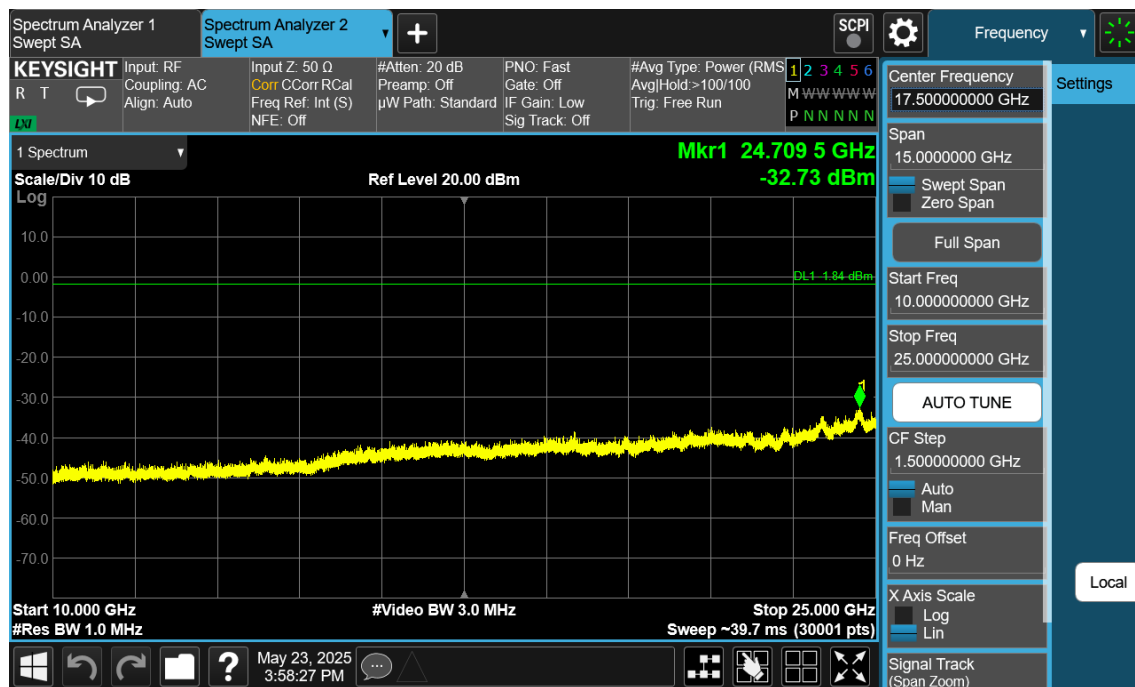


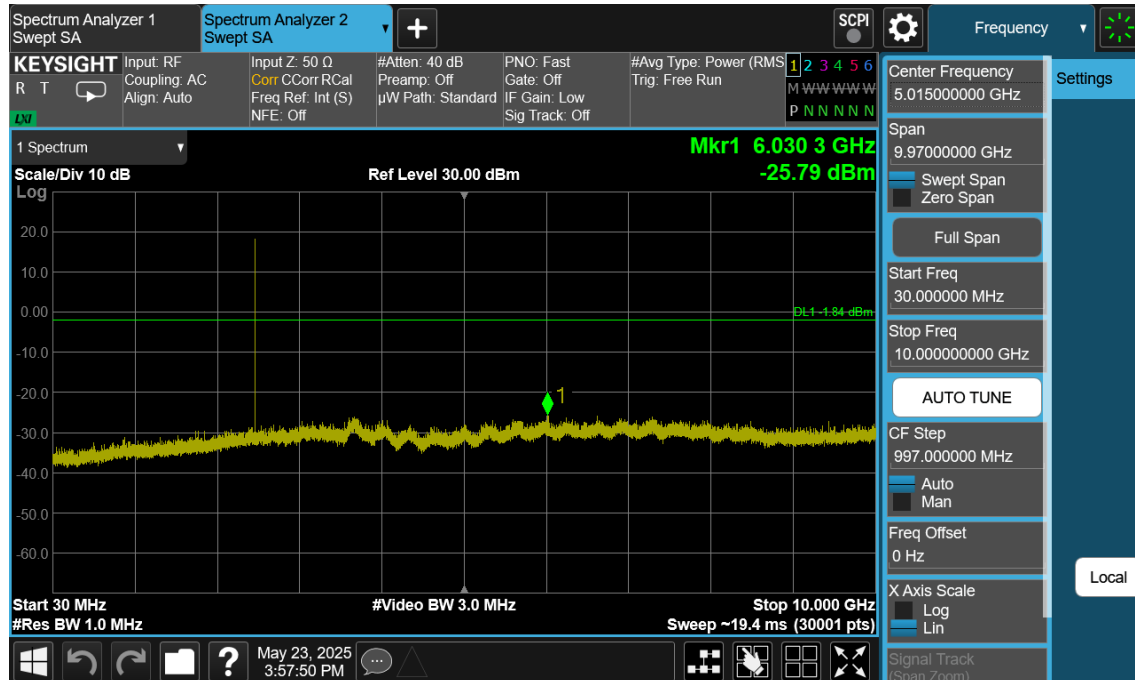

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 157 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7 Radiated Spurious Emissions – Above 1GHz

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-20 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-20. Radiated Limits

Test Procedures Used

ANSI C63.10-2020 – Subclause 6.6.4.3
KDB 558074 D01 v05r02 – Sections 8.6, 8.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 158 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

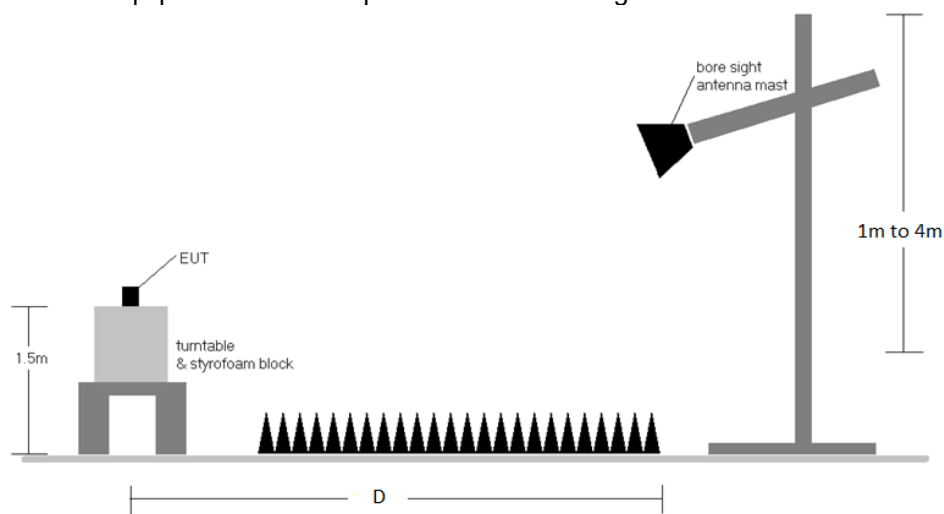


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-20.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 159 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{\text{[dB}\mu\text{V/m]}} = \text{Analyzer Level}_{\text{[dBm]}} + 107 + \text{AFCL}_{\text{[dB/m]}}$
- $\text{AFCL}_{\text{[dB/m]}} = \text{Antenna Factor}_{\text{[dB/m]}} + \text{Cable Loss}_{\text{[dB]}} - \text{Preamplifier Gain}_{\text{[dB]}}$
- $\text{Margin}_{\text{[dB]}} = \text{Field Strength Level}_{\text{[dB}\mu\text{V/m]}} - \text{Limit}_{\text{[dB}\mu\text{V/m]}}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7.3 to 7.7.7 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain


FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 160 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7.1 TxBF Primary Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

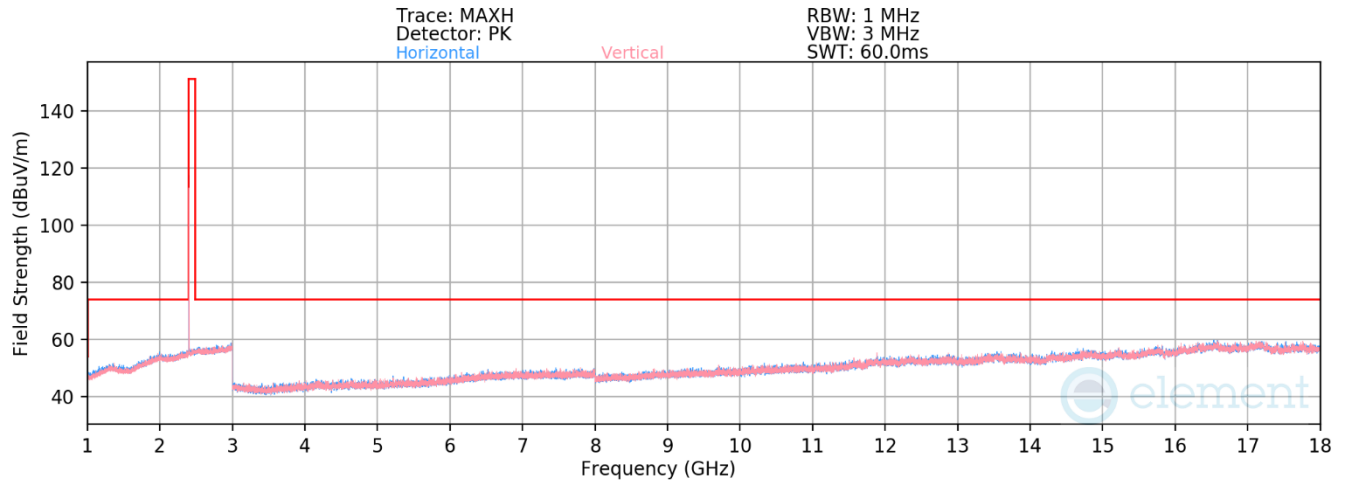

Plot 7-247. Radiated Spurious Emissions 1-18GHz TxBF Primary (1Mbps, ePA – Ch. 0)

Bluetooth Mode: LE
Data Rate: 1Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2402MHz
Channel: 0


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4804.00	Average	H	-	-	-79.18	6.73	34.56	53.98	-19.42
4804.00	Peak	H	-	-	-68.26	6.73	45.48	73.98	-28.50
12010.00	Average	V	-	-	-81.43	16.76	42.33	53.98	-11.65
12010.00	Peak	V	-	-	-70.83	16.76	52.92	73.98	-21.06

Table 7-21. Radiated Measurements TxBF Primary

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 161 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

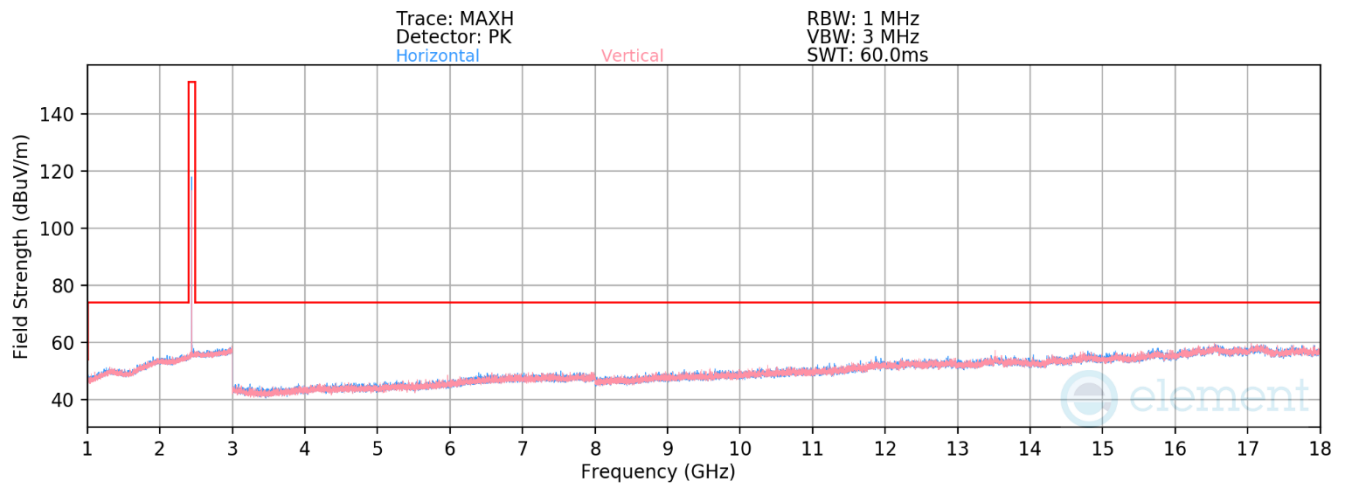

Plot 7-248. Radiated Spurious Emissions 1-18GHz TxBF Primary (1Mbps, ePA – Ch. 19)

Bluetooth Mode: LE
Data Rate: 1Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2440MHz
Channel: 19


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4880.00	Average	V	-	-	-79.24	7.02	34.78	53.98	-19.20
4880.00	Peak	V	-	-	-67.44	7.02	46.58	73.98	-27.40
7320.00	Average	H	-	-	-78.81	10.60	38.79	53.98	-15.19
7320.00	Peak	H	-	-	-66.08	10.60	51.52	73.98	-22.46
12200.00	Average	H	-	-	-81.65	17.77	43.12	53.98	-10.86
12200.00	Peak	H	-	-	-70.66	17.77	54.11	73.98	-19.87

Table 7-22. Radiated Measurements TxBF Primary


FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 162 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

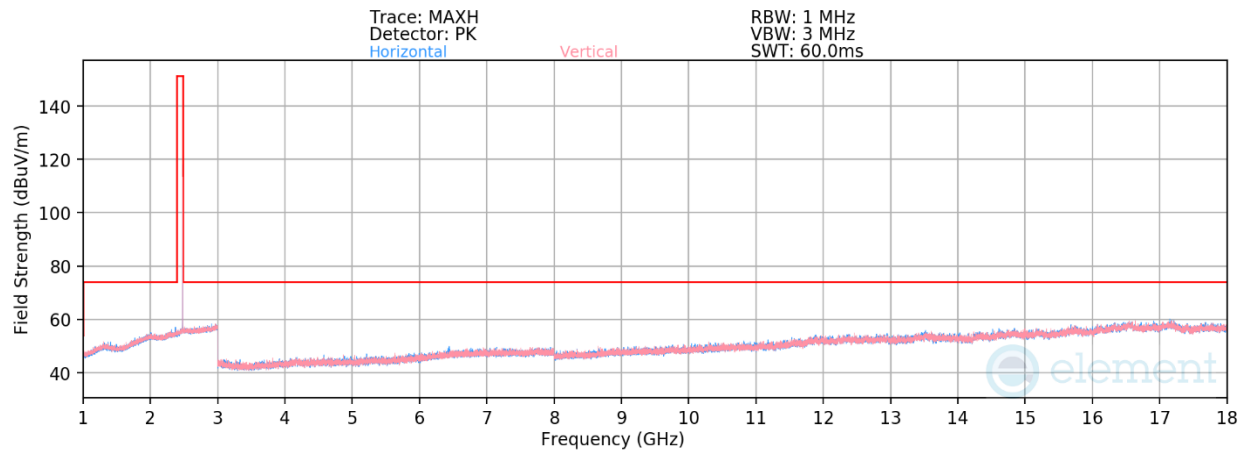

Plot 7-249. Radiated Spurious Emissions 1-18GHz TxBF Primary (1Mbps ePA – Ch. 39)

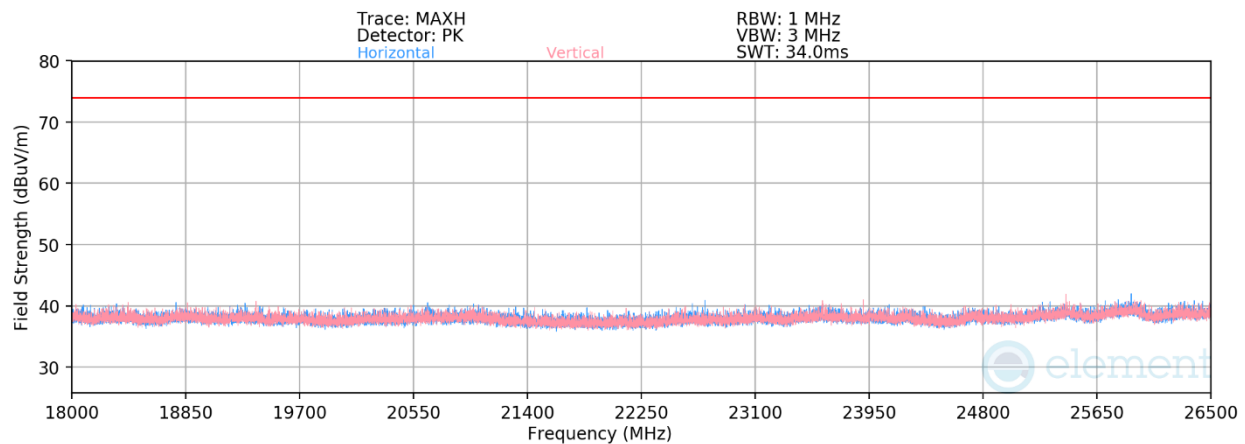

Plot 7-250. Radiated Spurious Emissions Above 18GHz TxBF Primary (1Mbps ePA – Ch. 39)

Bluetooth Mode: LE
Data Rate: 1Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2480MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Average	V	-	-	-79.52	7.24	34.72	53.98	-19.26
4960.00	Peak	V	-	-	-68.16	7.24	46.08	73.98	-27.90
7440.00	Average	H	-	-	-78.59	10.89	39.30	53.98	-14.68
7440.00	Peak	H	-	-	-67.01	10.89	50.88	73.98	-23.10
12400.00	Average	V	-	-	-81.76	17.41	42.65	53.98	-11.33
12400.00	Peak	V	-	-	-69.38	17.41	55.03	73.98	-18.95

Table 7-23. Radiated Measurements TxBF Primary


FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 163 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7.2 TxBF Diversity Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

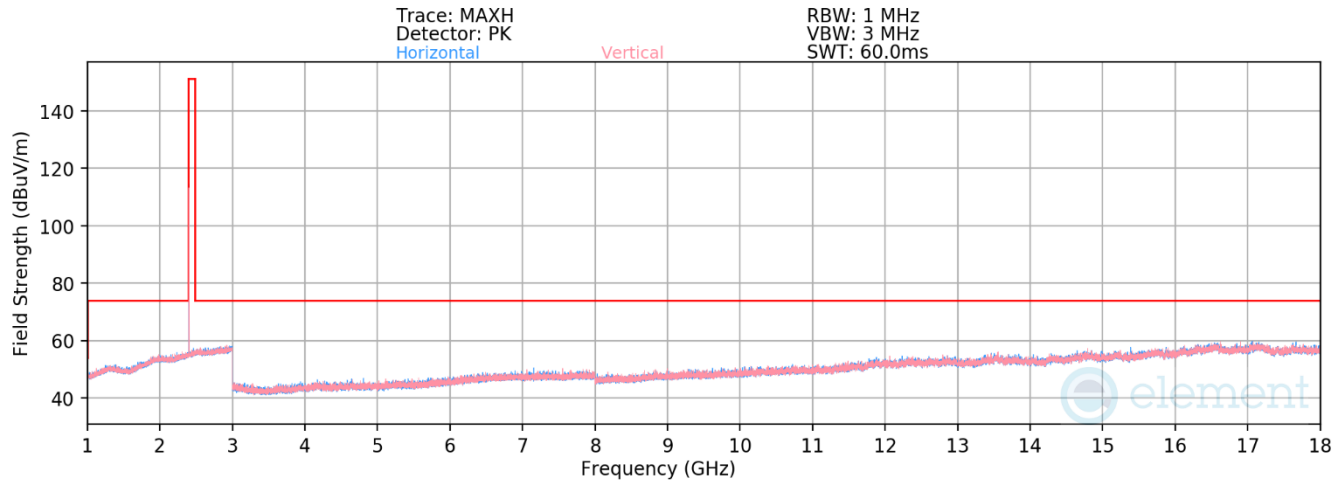

Plot 7-251. Radiated Spurious Emissions 1-18GHz TxBF Diversity (1Mbps, ePA – Ch. 0)

Bluetooth Mode: LE
Data Rate: 1Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2402MHz
Channel: 0


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Average	H	-	-	-79.42	6.73	34.31	53.98	-19.67
4804.00	Peak	H	-	-	-67.89	6.73	45.84	73.98	-28.14
12010.00	Average	H	-	-	-82.06	16.76	41.70	53.98	-12.28
12010.00	Peak	H	-	-	-70.38	16.76	53.37	73.98	-20.61

Table 7-24. Radiated Measurements TxBF Diversity

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 164 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

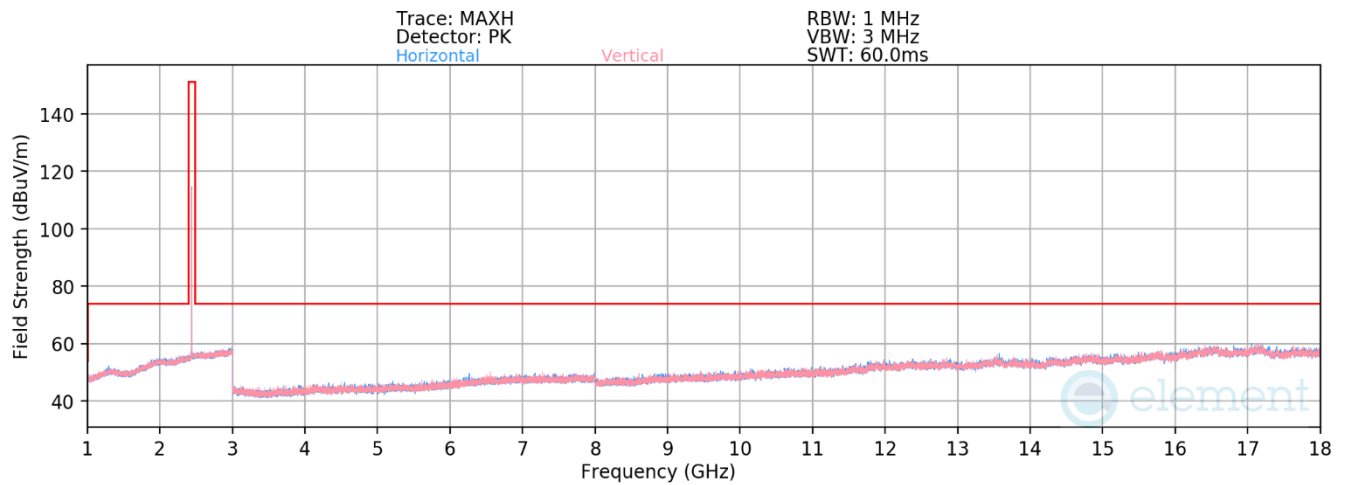

Plot 7-252. Radiated Spurious Emissions 1-18GHz TxBF Diversity (1Mbps, ePA – Ch. 19)

Bluetooth Mode: LE
Data Rate: 1Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2440MHz
Channel: 19


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4880.00	Average	V	-	-	-79.19	7.02	34.83	53.98	-19.15
4880.00	Peak	V	-	-	-67.27	7.02	46.75	73.98	-27.23
7320.00	Average	H	-	-	-79.50	11.41	38.91	53.98	-15.07
7320.00	Peak	H	-	-	-67.28	11.41	51.13	73.98	-22.85
12200.00	Average	V	-	-	-81.27	16.99	42.72	53.98	-11.26
12200.00	Peak	V	-	-	-69.88	16.99	54.11	73.98	-19.87

Table 7-25. Radiated Measurements TxBF Diversity


FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 165 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

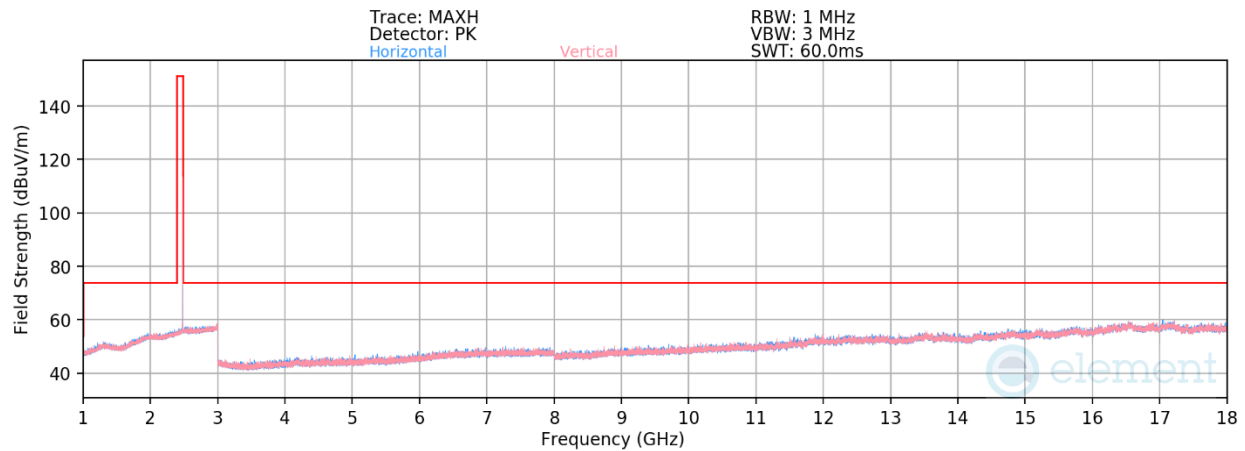

Plot 7-253. Radiated Spurious Emissions 1-18GHz TxBF Diversity (1Mbps ePA – Ch. 39)

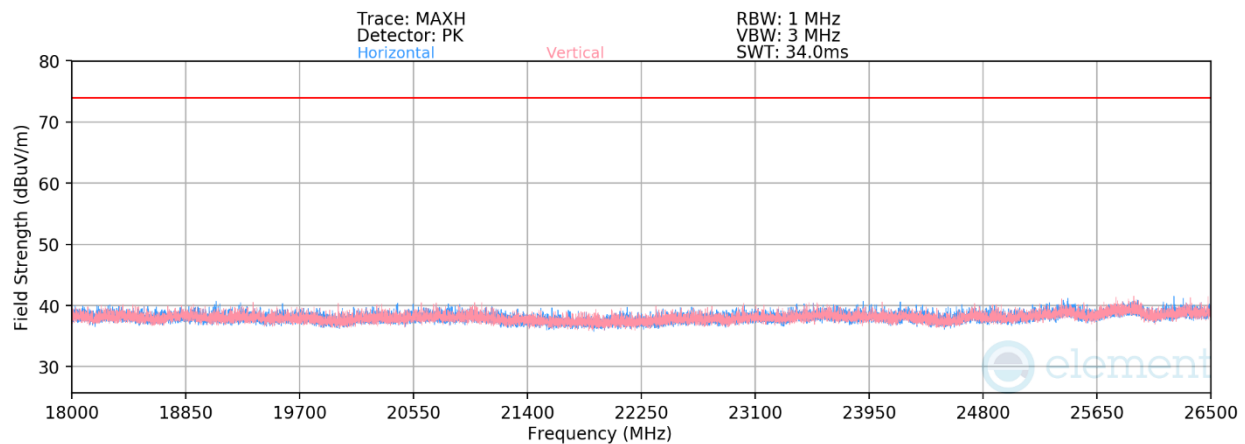

Plot 7-254. Radiated Spurious Emissions Above 18GHz TxBF Diversity (1Mbps ePA – Ch. 39)

Bluetooth Mode: LE
Data Rate: 1Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2480MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Average	V	-	-	-79.57	6.98	34.41	53.98	-19.57
4960.00	Peak	V	-	-	-67.48	6.98	46.50	73.98	-27.48
7440.00	Average	V	-	-	-78.71	10.89	39.18	53.98	-14.80
7440.00	Peak	V	-	-	-67.41	10.89	50.48	73.98	-23.50
12400.00	Average	V	-	-	-81.83	17.35	42.52	53.98	-11.46
12400.00	Peak	V	-	-	-71.13	17.35	53.22	73.98	-20.76

Table 7-26. Radiated Measurements TxBF Diversity

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 166 of 188


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7.3 Antenna WF8 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

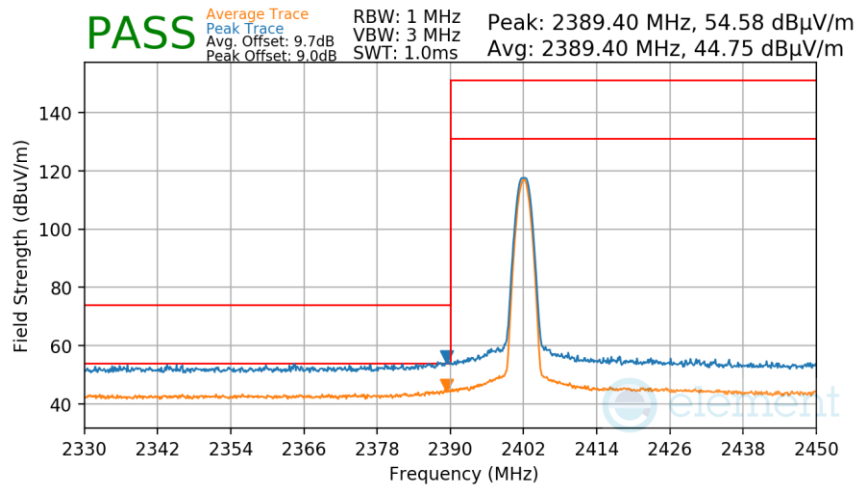

Plot 7-255. Radiated Restricted Lower Band Edge Measurement Antenna WF8 (Average & Peak)


Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

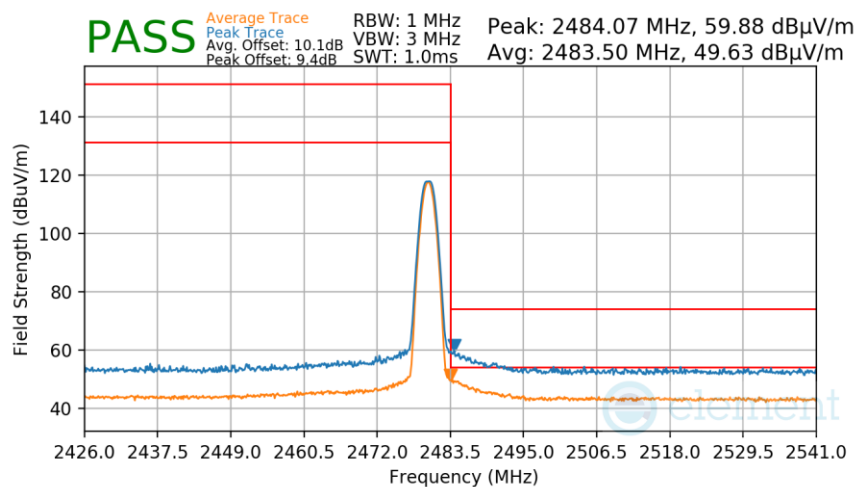

Plot 7-256. Radiated Restricted Upper Band Edge Measurement Antenna WF8 (Average & Peak)


FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 167 of 188

Bluetooth Mode:	LE
Data Rate:	2Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

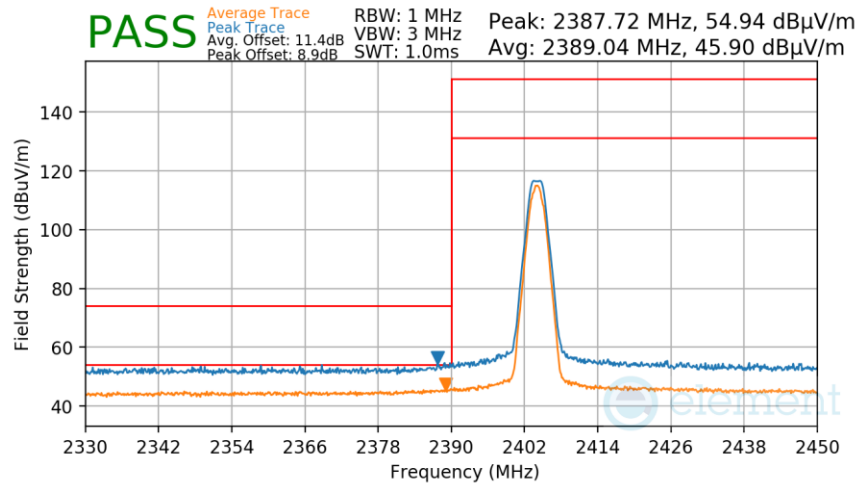

Plot 7-257. Radiated Restricted Lower Band Edge Measurement Antenna WF8 (Average & Peak)

Bluetooth Mode:	LE
Data Rate:	2Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2478MHz
Channel:	38

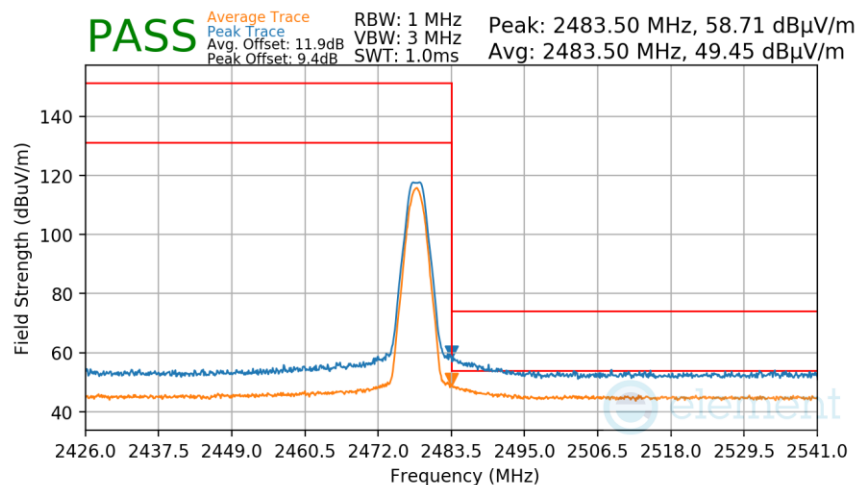

Plot 7-258. Radiated Restricted Upper Band Edge Measurement Antenna WF8 (Average & Peak)

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 168 of 188


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7.4 Antenna WF7 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

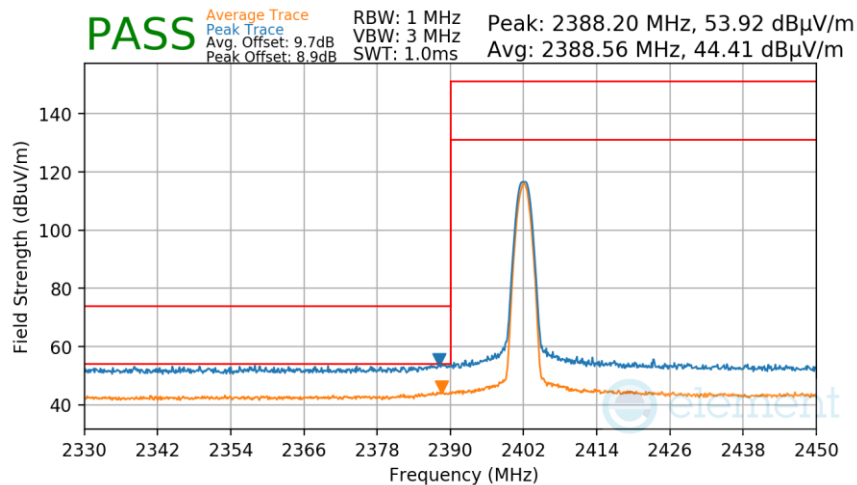

Plot 7-259. Radiated Restricted Lower Band Edge Measurement Antenna WF7 (Average & Peak)


Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

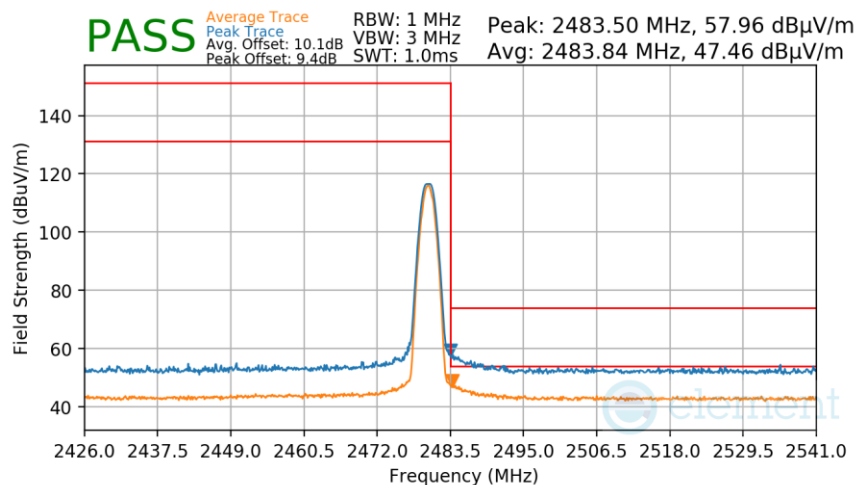

Plot 7-260. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Average & Peak)


FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 169 of 188

Bluetooth Mode:	LE
Data Rate:	2Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

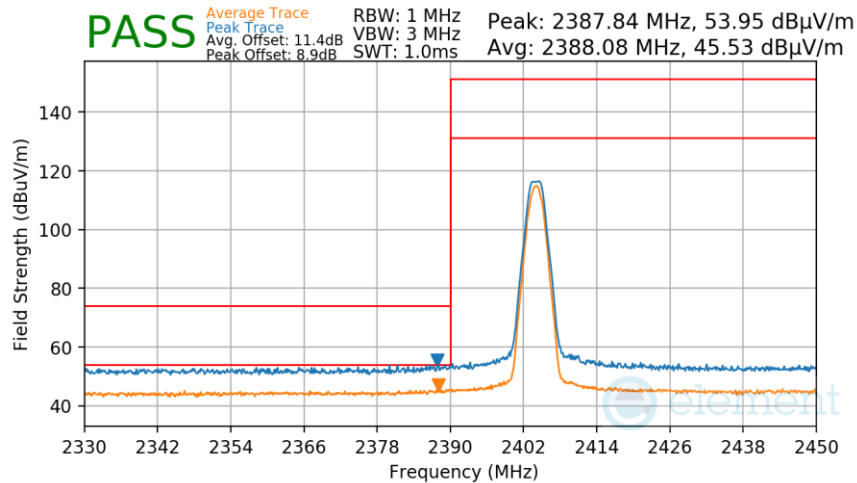

Plot 7-261. Radiated Restricted Lower Band Edge Measurement Antenna WF7 (Average & Peak)

Bluetooth Mode:	LE
Data Rate:	2Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2478MHz
Channel:	38

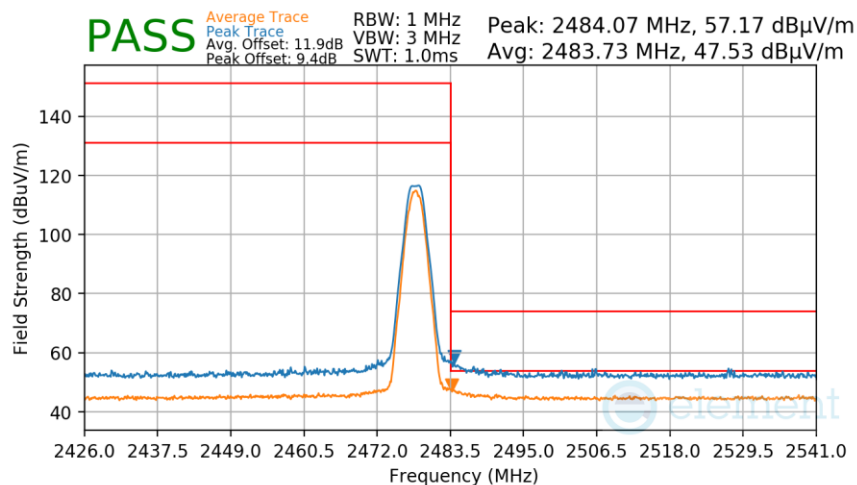

Plot 7-262. Radiated Restricted Upper Band Edge Measurement Antenna WF7 (Average & Peak)

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 170 of 188


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7.5 Antenna WF9 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

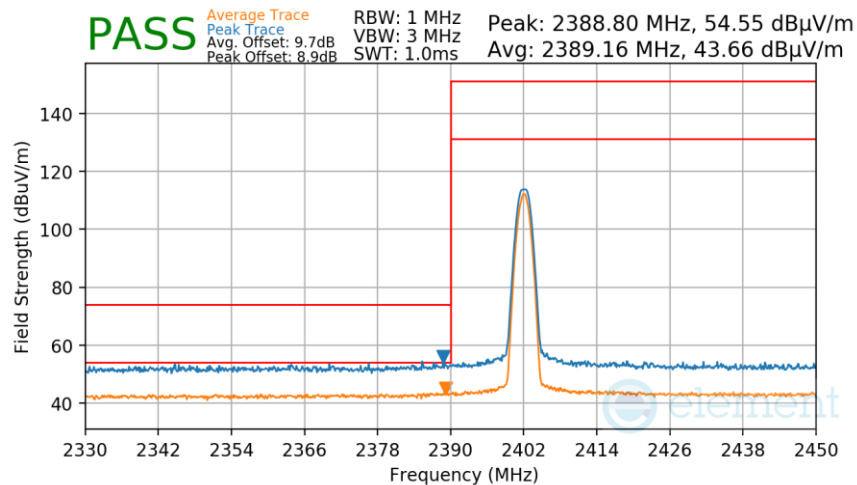

Plot 7-263. Radiated Restricted Lower Band Edge Measurement Antenna WF9 (Average & Peak)


Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

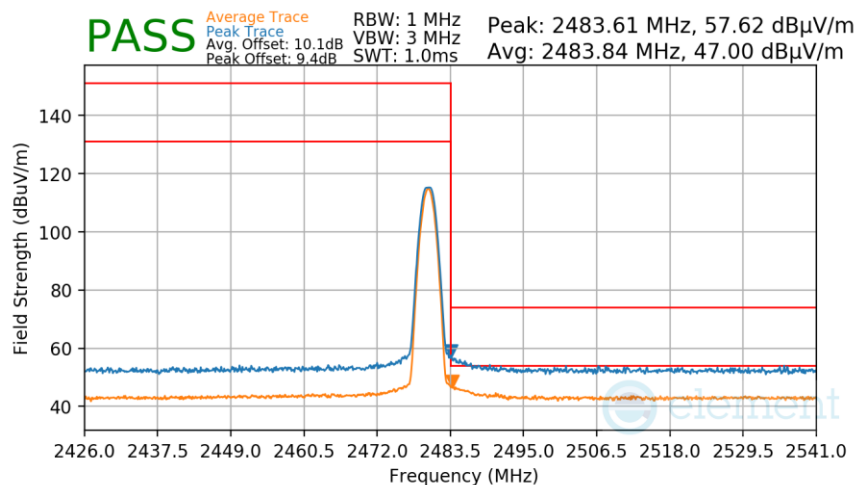

Plot 7-264. Radiated Restricted Upper Band Edge Measurement Antenna WF9 (Average & Peak)


FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 171 of 188

Bluetooth Mode:	LE
Data Rate:	2Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

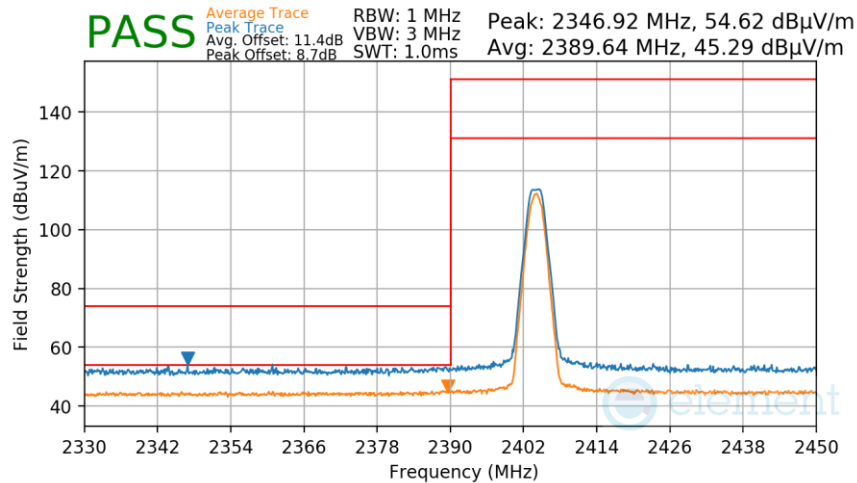

Plot 7-265. Radiated Restricted Lower Band Edge Measurement Antenna WF9 (Average & Peak)

Bluetooth Mode:	LE
Data Rate:	2Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2478MHz
Channel:	38

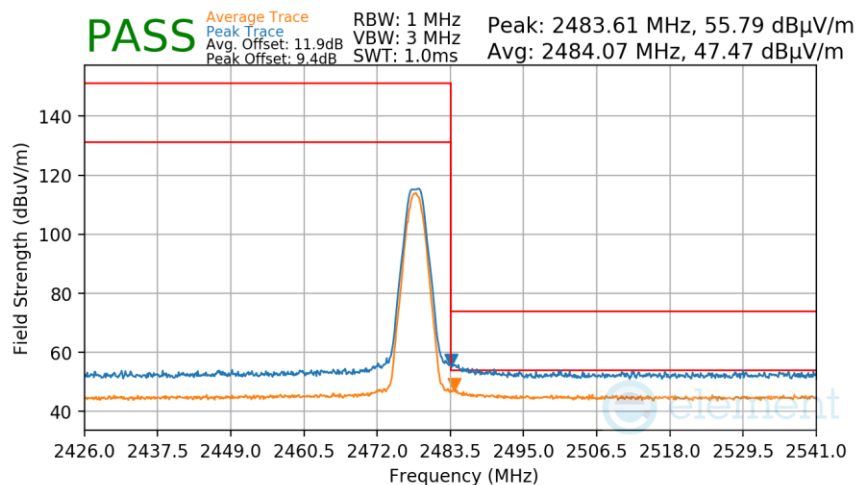

Plot 7-266. Radiated Restricted Upper Band Edge Measurement Antenna WF9 (Average & Peak)

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 172 of 188


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7.6 TxBF Primary Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

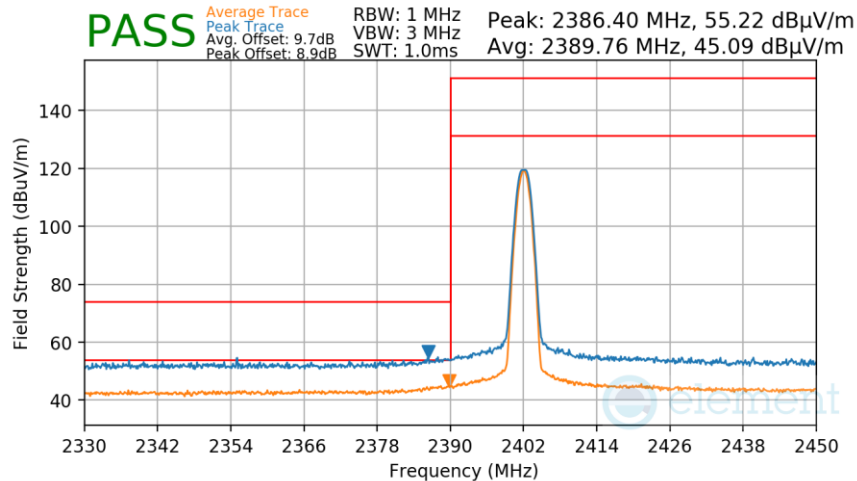

Plot 7-267. Radiated Restricted Lower Band Edge Measurement TxBF Primary (Average & Peak)

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

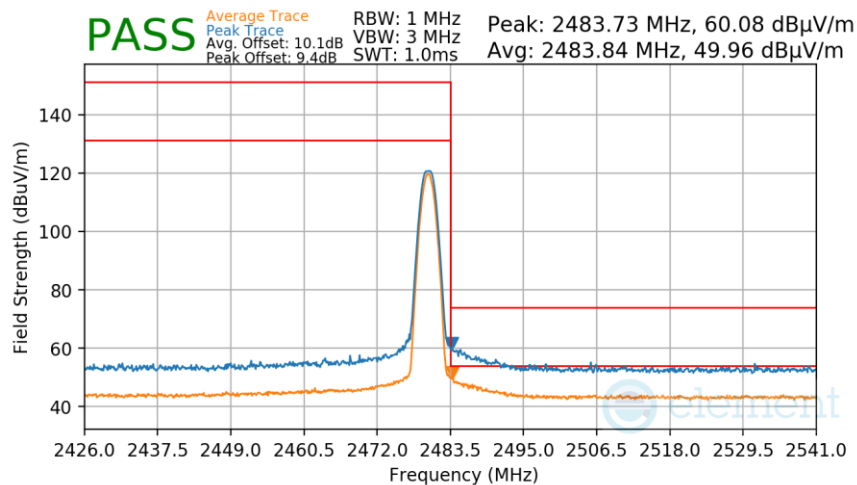


Plot 7-268. Radiated Restricted Upper Band Edge Measurement TxBF Primary (Average & Peak)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 173 of 188

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bluetooth Mode:	LE
Data Rate:	2Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

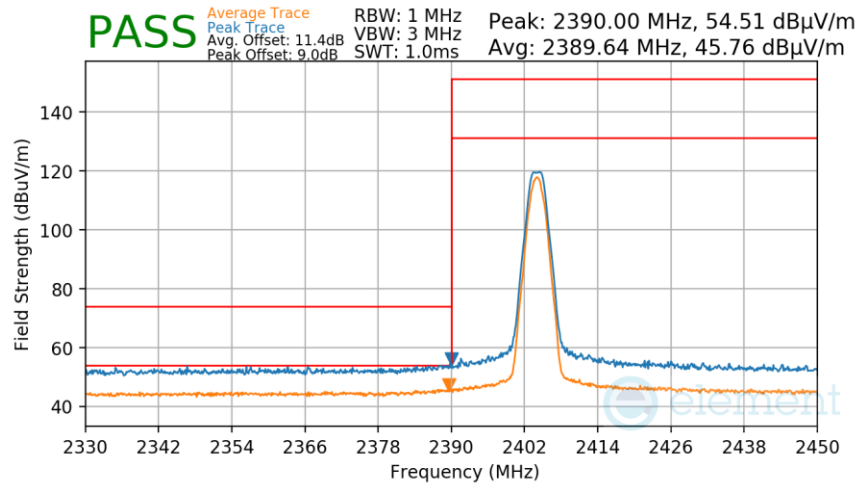

Plot 7-269. Radiated Restricted Lower Band Edge Measurement TxBF Primary (Average & Peak)

Bluetooth Mode:	LE
Data Rate:	2Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2478MHz
Channel:	38

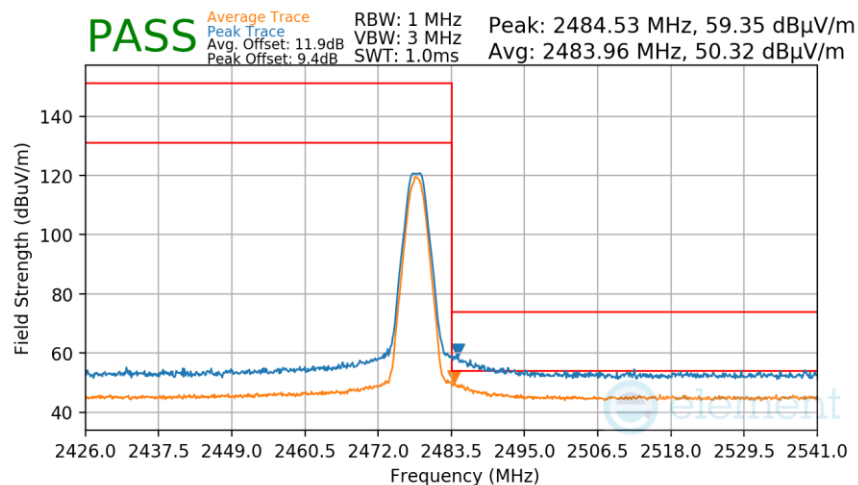

Plot 7-270. Radiated Restricted Upper Band Edge Measurement TxBF Primary (Average & Peak)

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 174 of 188


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7.7 TxBF Diversity Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

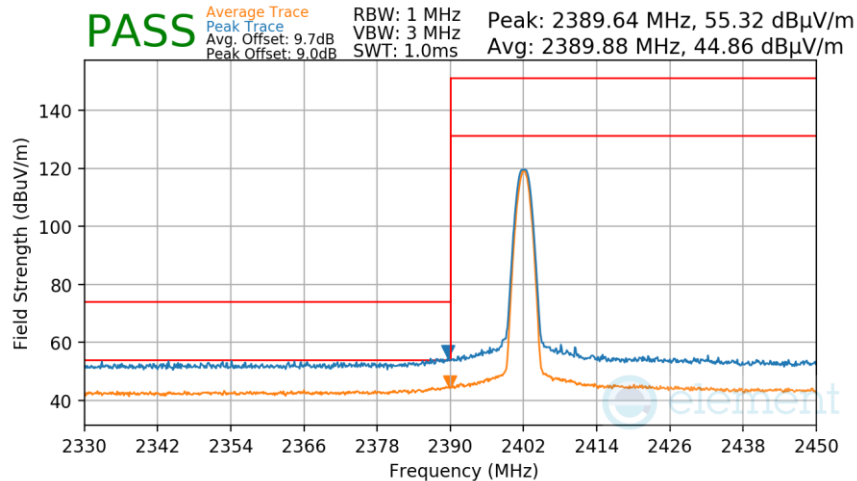

Plot 7-271. Radiated Restricted Lower Band Edge Measurement TxBF Diversity (Average & Peak)


Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

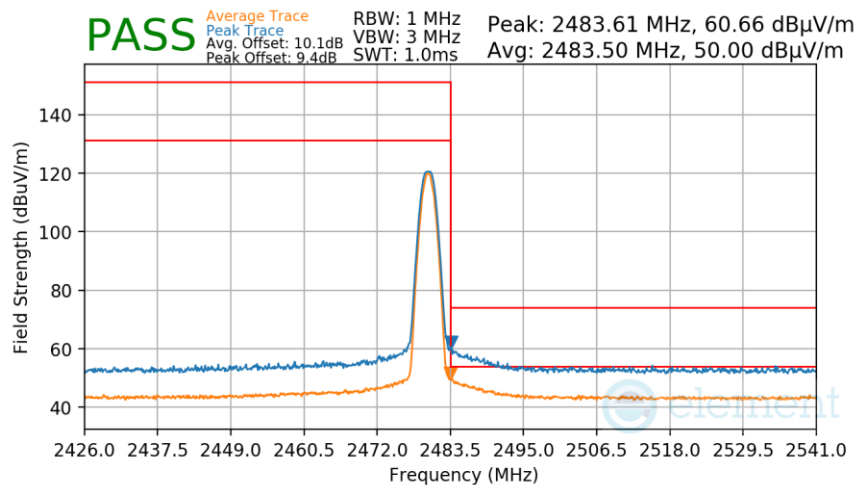

Plot 7-272. Radiated Restricted Upper Band Edge Measurement TxBF Diversity (Average & Peak)


FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 175 of 188

Bluetooth Mode:	LE
Data Rate:	2Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

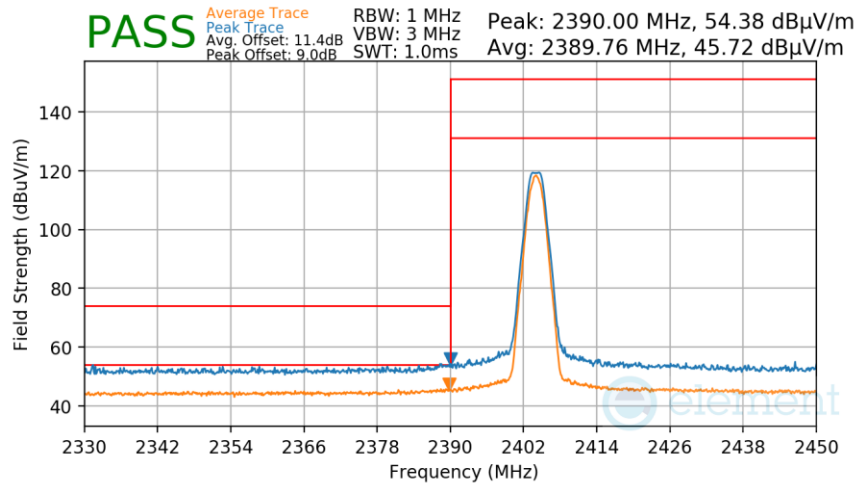

Plot 7-273. Radiated Restricted Lower Band Edge Measurement TxBF Diversity (Average & Peak)

Bluetooth Mode:	LE
Data Rate:	2Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2478MHz
Channel:	38

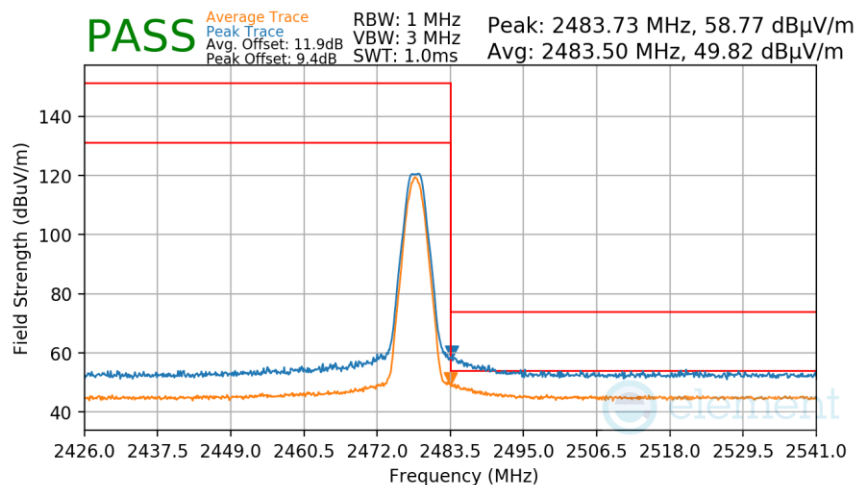

Plot 7-274. Radiated Restricted Upper Band Edge Measurement TxBF Diversity (Average & Peak)

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 176 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-27 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-27. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 177 of 188

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

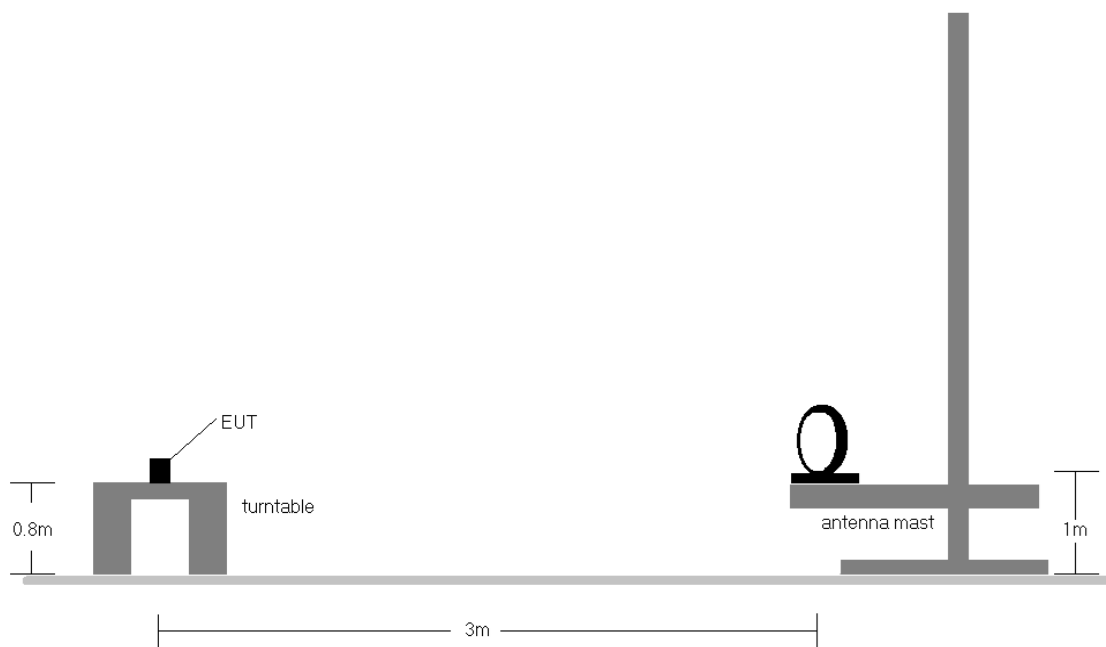


Figure 7-7. Radiated Test Setup < 30MHz

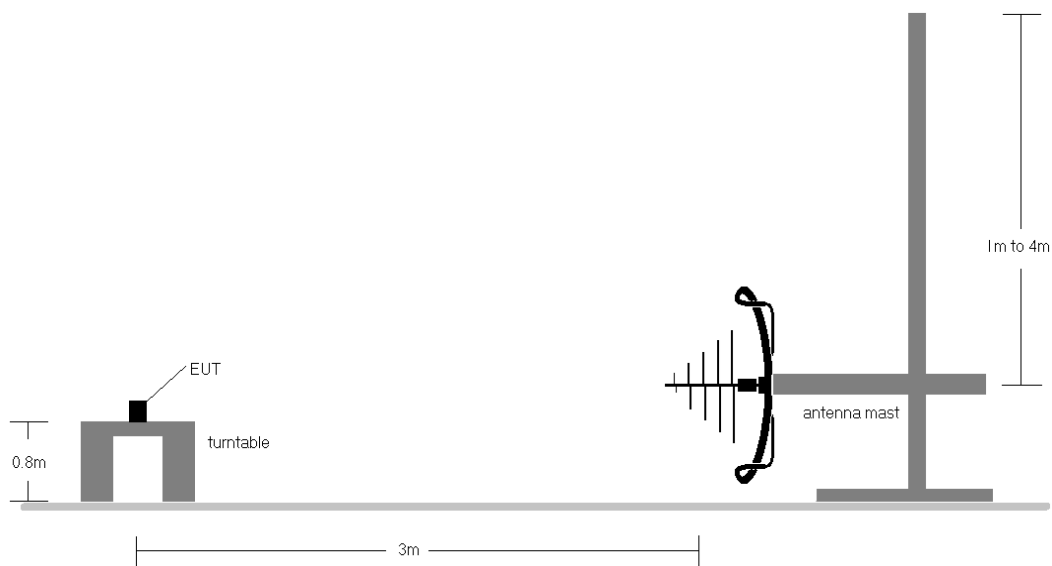


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 178 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-27.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 179 of 188

V 11.0 05/2025

7.8.1 TxBF Primary Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

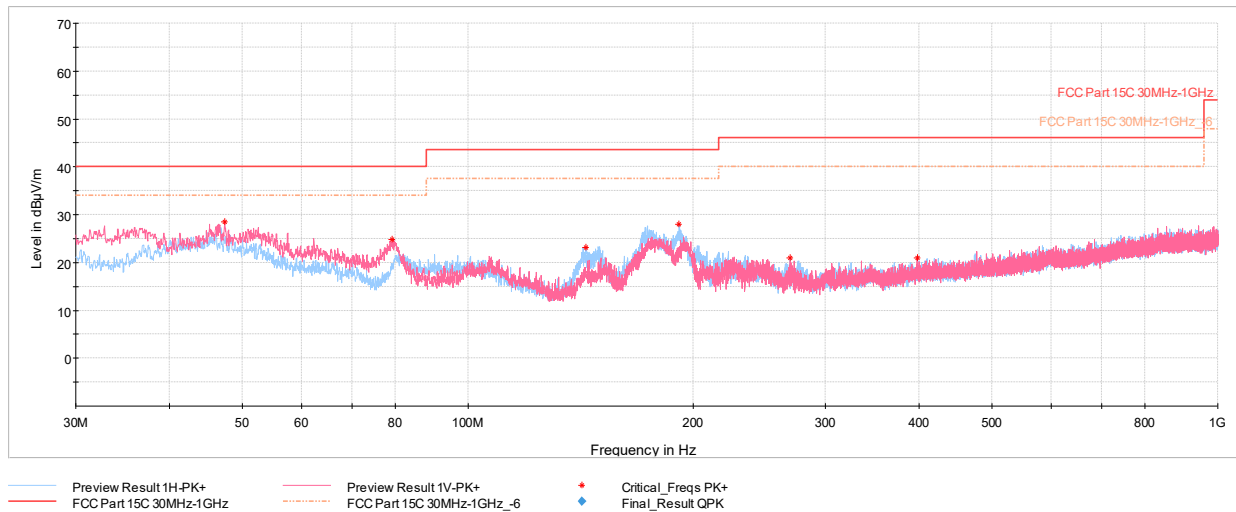

Plot 7-275. Radiated Spurious Emissions Below 1GHz TxBF Primary (1Mbps, ePA – Ch.19, Pol. H & V, with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
47.36	Max Peak	V	100	255	-63.15	-15.40	28.45	40.00	-11.55
79.28	Max Peak	V	100	312	-59.22	-22.92	24.86	40.00	-15.14
143.59	Max Peak	H	100	279	-62.34	-21.50	23.16	43.52	-20.36
191.31	Max Peak	H	100	224	-60.60	-18.33	28.07	43.52	-15.45
268.72	Max Peak	H	100	182	-69.85	-16.24	20.91	46.02	-25.11
397.24	Max Peak	H	300	217	-73.37	-12.69	20.94	46.02	-25.08

Table 7-28. Radiated Spurious Emissions Below 1GHz TxBF Primary (1Mbps, ePA – Ch.19, Pol. H & V, with AC/DC Adapter)


FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 180 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.8.2 TxBF Diversity Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

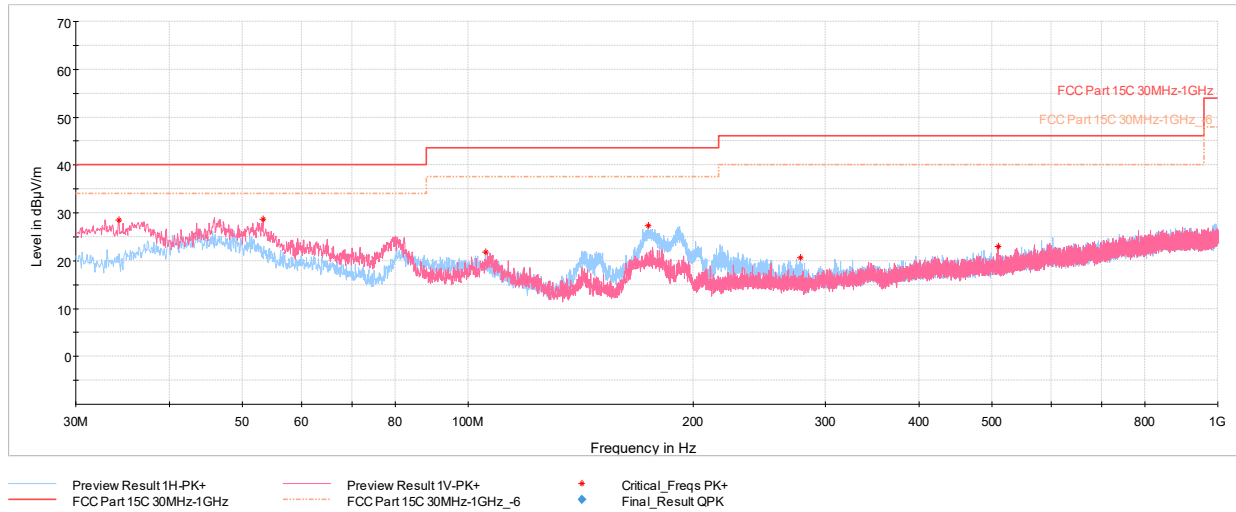

Plot 7-276. Radiated Spurious Emissions Below 1GHz TxBF Diversity (1Mbps, ePA – Ch.19, Pol. H & V, with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.94	Max Peak	V	100	173	-60.68	-17.50	28.82	40.00	-11.18
79.42	Max Peak	V	100	353	-59.62	-22.91	24.47	40.00	-15.53
108.86	Max Peak	V	100	202	-67.38	-18.27	21.35	43.52	-22.17
191.46	Max Peak	H	100	222	-60.79	-18.31	27.90	43.52	-15.62
248.20	Max Peak	V	100	76	-69.08	-16.43	21.49	46.02	-24.53
413.88	Max Peak	V	300	32	-71.81	-12.44	22.75	46.02	-23.27

Table 7-29. Radiated Spurious Emissions Below 1GHz TxBF Diversity (1Mbps, ePA – Ch.19, Pol. H & V, with AC/DC Adapter)

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 181 of 188

7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-30. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 182 of 188

V 11.0 05/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

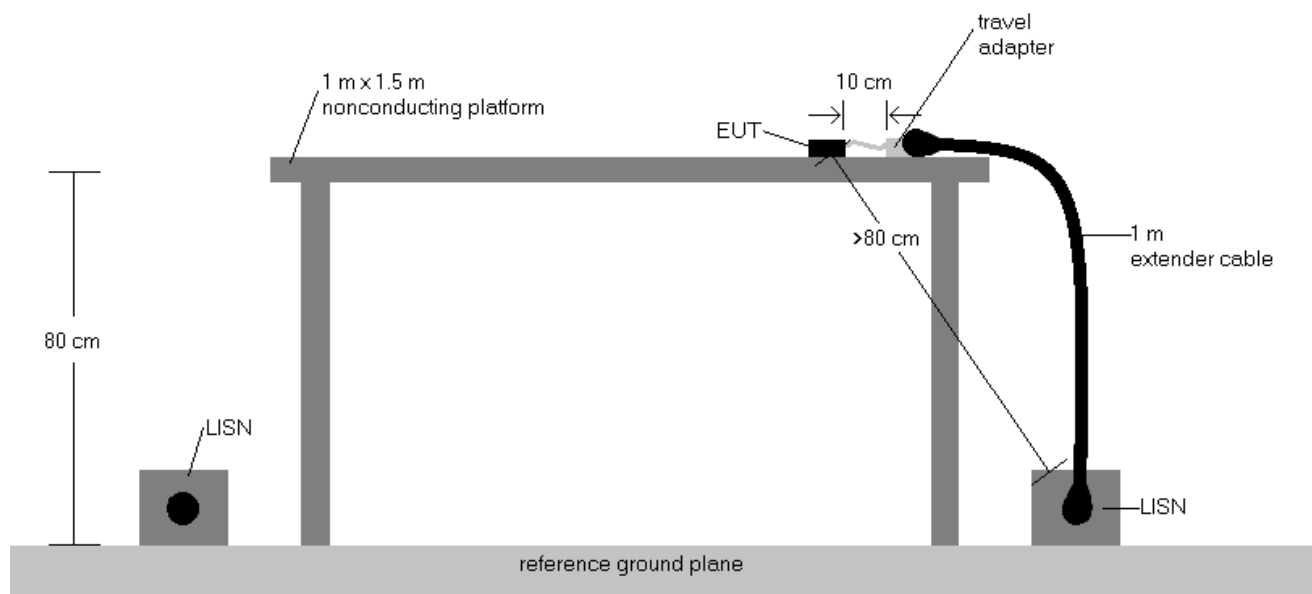


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen (8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using a quasi peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 183 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

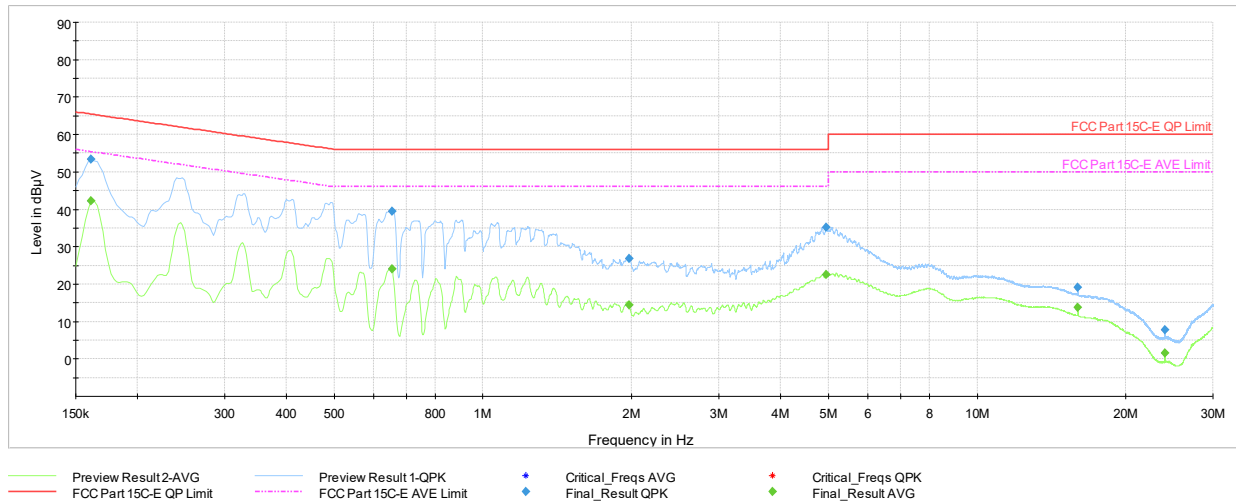

Plot 7-277. AC Line Conducted Plot with Bluetooth LE Tx BF Primary (L1, 1Mbps ePA – Ch.19 with AC/DC Adapter)


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.161	FINAL	—	42.19	55.40	-13.21	L1	GND
0.161	FINAL	53.3	—	65.40	-12.11	L1	GND
0.654	FINAL	—	23.97	46.00	-22.03	L1	GND
0.654	FINAL	39.5	—	56.00	-16.51	L1	GND
1.977	FINAL	—	14.38	46.00	-31.62	L1	GND
1.977	FINAL	26.9	—	56.00	-29.06	L1	GND
4.949	FINAL	35.1	—	56.00	-20.91	L1	GND
4.949	FINAL	—	22.53	46.00	-23.47	L1	GND
15.997	FINAL	19.2	—	60.00	-40.80	L1	GND
15.997	FINAL	—	13.77	50.00	-36.23	L1	GND
23.996	FINAL	—	1.65	50.00	-48.35	L1	GND
23.996	FINAL	7.7	—	60.00	-52.32	L1	GND

Table 7-31. AC Line Conducted Data with Bluetooth LE Tx BF Primary (L1, 1Mbps ePA – Ch.19 with AC/DC Adapter)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 184 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

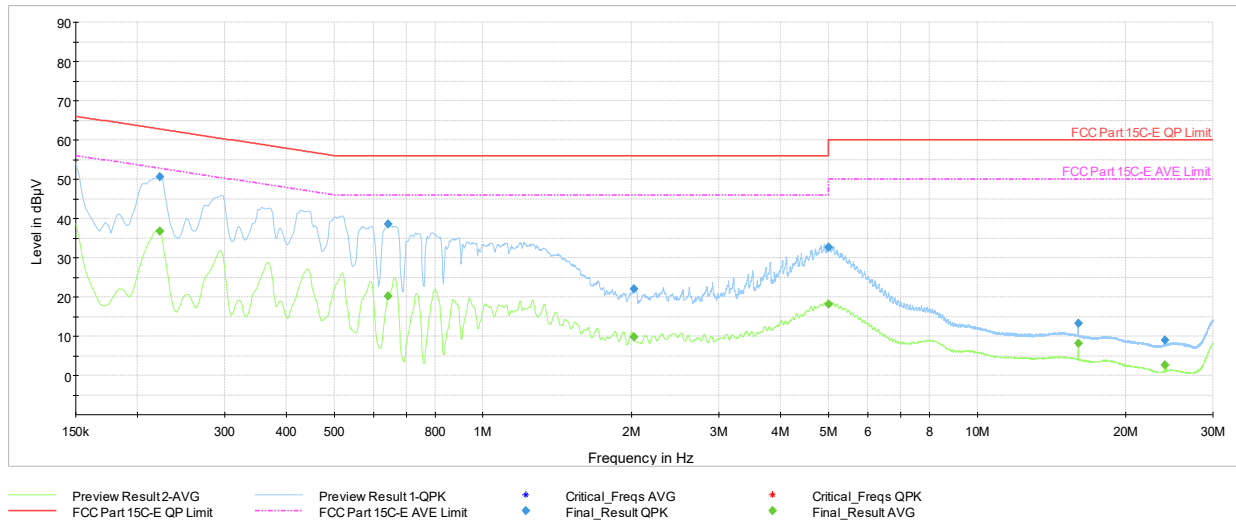

Plot 7-278. AC Line Conducted Plot with Bluetooth LE Tx BF Primary (N, 1Mbps ePA – Ch.19, with AC/DC Adapter)


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.222	FINAL	—	36.68	52.74	-16.06	N	GND
0.222	FINAL	50.6	—	62.74	-12.19	N	GND
0.643	FINAL	—	20.24	46.00	-25.76	N	GND
0.643	FINAL	38.6	—	56.00	-17.44	N	GND
2.018	FINAL	—	9.80	46.00	-36.20	N	GND
2.018	FINAL	22.1	—	56.00	-33.89	N	GND
5.010	FINAL	—	—	60.00	-27.31	N	GND
5.010	FINAL	32.7	18.24	50.00	-31.76	N	GND
16.001	FINAL	13.3	—	60.00	-46.73	N	GND
16.001	FINAL	—	8.19	50.00	-41.81	N	GND
24.000	FINAL	—	2.66	50.00	-47.34	N	GND
24.000	FINAL	8.9	—	60.00	-51.07	N	GND

Table 7-32. AC Line Conducted Data with Bluetooth LE Tx BF Primary (N, 1Mbps ePA – Ch.19 with AC/DC Adapter)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 185 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

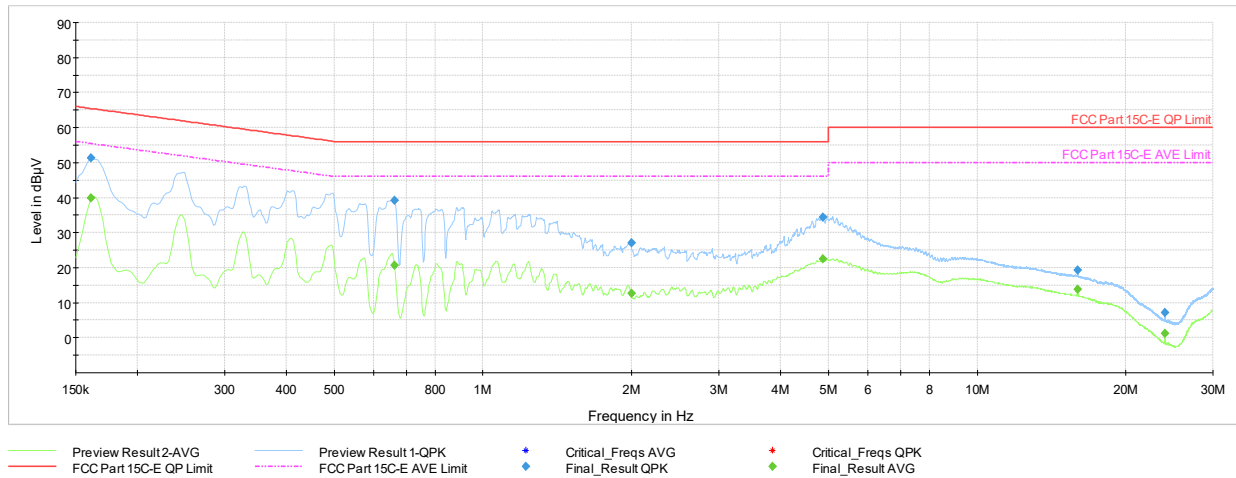

Plot 7-279. AC Line Conducted Plot with Bluetooth LE TxBF Diversity (L1, 1Mbps ePA – Ch.19 with AC/DC Adapter)


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.161	FINAL	—	39.90	55.40	-15.50	L1	GND
0.161	FINAL	51.3	—	65.40	-14.14	L1	GND
0.663	FINAL	—	20.75	46.00	-25.25	L1	GND
0.663	FINAL	39.1	—	56.00	-16.91	L1	GND
1.995	FINAL	—	12.66	46.00	-33.34	L1	GND
1.995	FINAL	27.2	—	56.00	-28.85	L1	GND
4.880	FINAL	34.5	—	56.00	-21.53	L1	GND
4.880	FINAL	—	22.49	46.00	-23.51	L1	GND
15.992	FINAL	19.3	—	60.00	-40.69	L1	GND
15.992	FINAL	—	13.82	50.00	-36.18	L1	GND
23.991	FINAL	—	1.17	50.00	-48.83	L1	GND
23.991	FINAL	7.1	—	60.00	-52.88	L1	GND

Table 7-33. AC Line Conducted Data with Bluetooth LE TxBF Diversity (L1, 1Mbps ePA – Ch.19 with AC/DC Adapter)

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 186 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

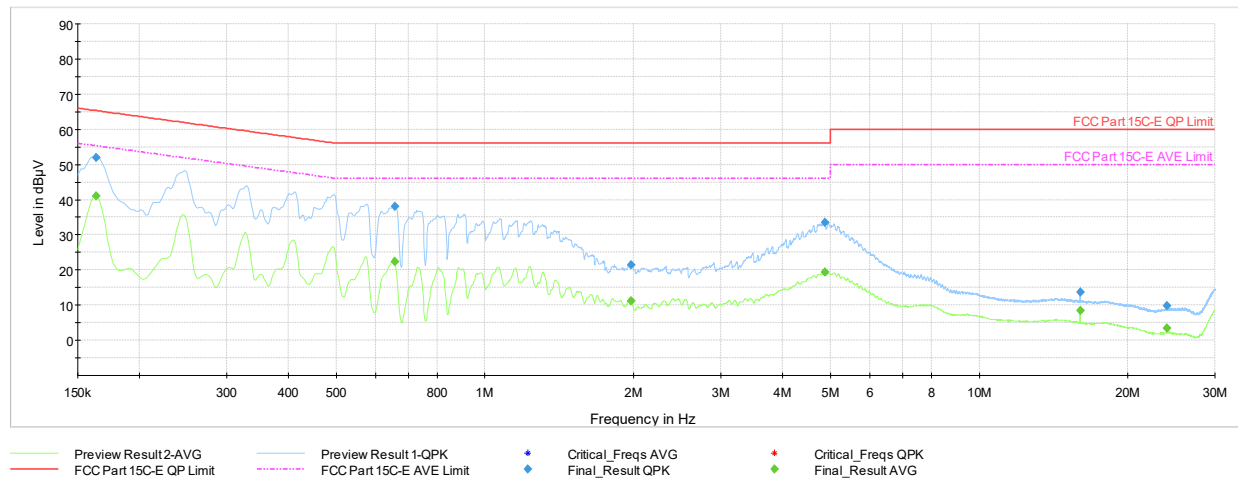

Plot 7-280. AC Line Conducted Plot with Bluetooth LE Tx BF Diversity (N, 1Mbps ePA – Ch.19, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	—	40.94	55.28	-14.34	N	GND
0.164	FINAL	52.0	—	65.28	-13.26	N	GND
0.659	FINAL	—	22.38	46.00	-23.62	N	GND
0.659	FINAL	38.0	—	56.00	-18.02	N	GND
1.977	FINAL	—	11.25	46.00	-34.75	N	GND
1.977	FINAL	21.4	—	56.00	-34.61	N	GND
4.871	FINAL	33.5	—	56.00	-22.49	N	GND
4.871	FINAL	—	19.43	46.00	-26.57	N	GND
15.999	FINAL	13.7	—	60.00	-46.30	N	GND
15.999	FINAL	—	8.51	50.00	-41.49	N	GND
23.998	FINAL	—	3.46	50.00	-46.54	N	GND
23.998	FINAL	9.8	—	60.00	-50.16	N	GND

Table 7-34. AC Line Conducted Data with Bluetooth LE Tx BF Diversity (N, 1Mbps ePA – Ch.19 with AC/DC Adapter)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 187 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3360 and IC: 579C-A3360** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-08.BCG	Test Dates: 05/12/2025 - 09/02/2025	EUT Type: Tablet Device	Page 188 of 188

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.