




MRU

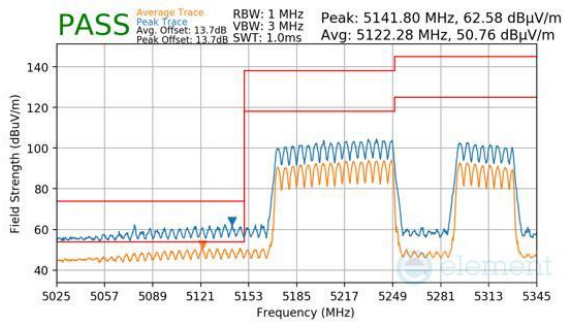


Plot 7-1103. CDD Diversity (Peak & Average, RU996+484, Index 94, Ch.50, MCS11)

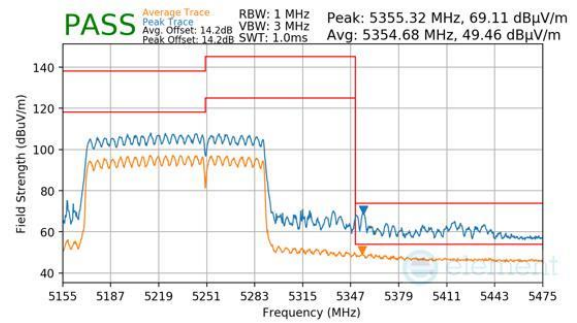


Plot 7-1106. CDD Diversity (Peak & Average, RU996+484, Index 95, Ch.50, MCS11)

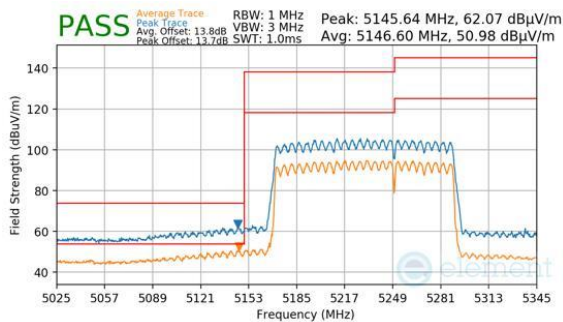


Plot 7-1104. CDD Diversity (Peak & Average, RU996+484, Index 95, Ch.50, MCS11)

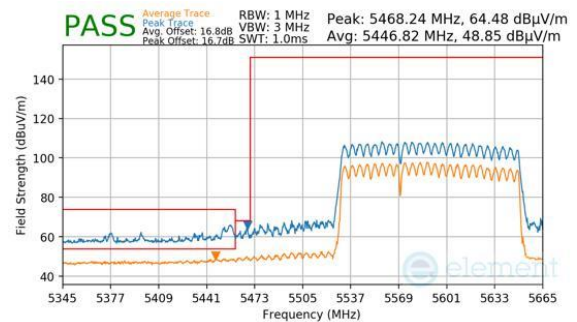

Plot 7-1107. CDD Diversity (Peak & Average, RU996+484, Index 94 (L), Ch.114 (FCC ONLY), MCS11)

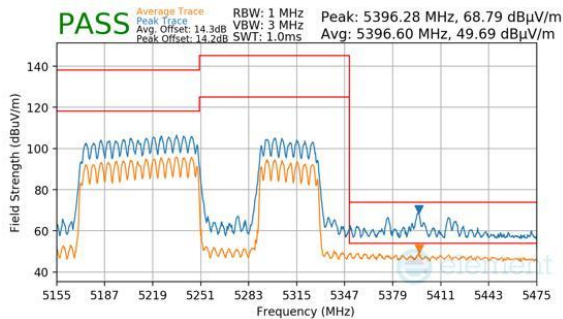

Plot 7-1105. CDD Diversity (Peak & Average, RU996+484, Index 94, Ch.50, MCS11)

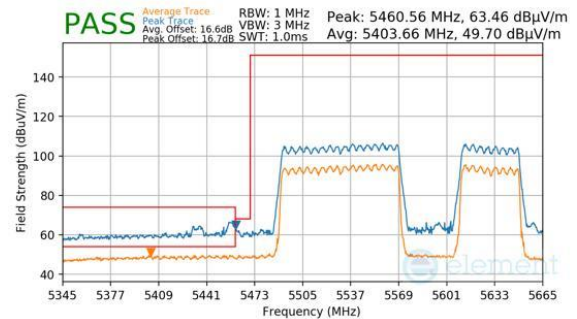


Plot 7-1108. CDD Diversity (Peak & Average, RU996+484, Index 94 (H), Ch.114 (FCC ONLY), MCS11)


FCC ID: BCGA3360 IC: 579C-A3360			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device		Page 341 of 372

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

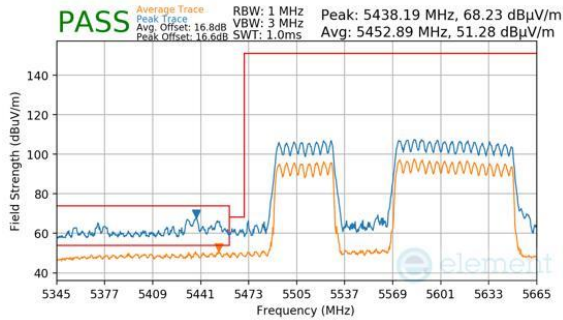


Plot 7-1109. CDD Diversity (Peak & Average, RU996+484, Index 95 (L), Ch.114 (FCC ONLY), MCS11)

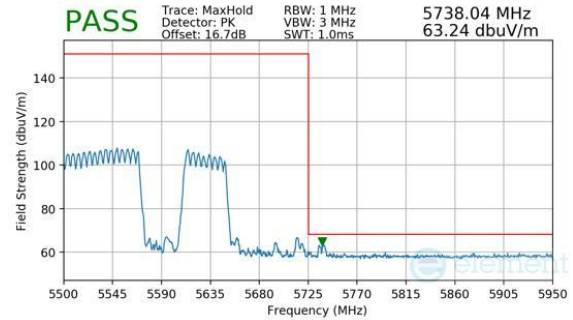


Plot 7-1112. CDD Diversity (Peak, RU996+484, Index 94 (H), Ch.114 (FCC ONLY), MCS11)

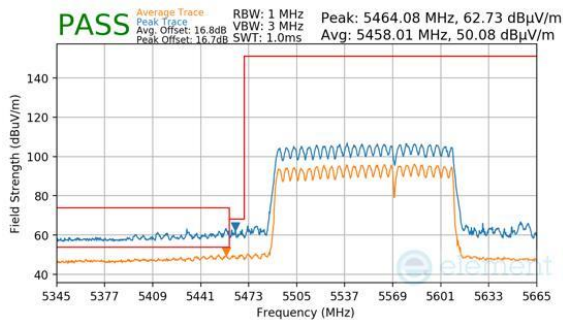


Plot 7-1110. CDD Diversity (Peak & Average, RU996+484, Index 95 (H), Ch.114 (FCC ONLY), MCS11)

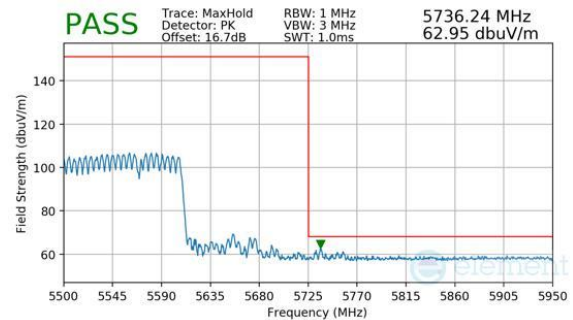

Plot 7-1113. CDD Diversity (Peak, RU996+484, Index 95 (H), Ch.114 (FCC ONLY), MCS11)

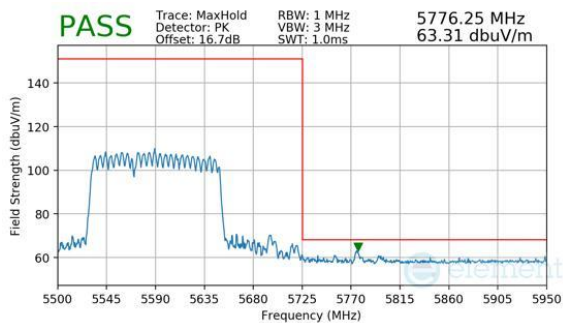

Plot 7-1111. CDD Diversity (Peak, RU996+484, Index 94 (L), Ch.114 (FCC ONLY), MCS11)

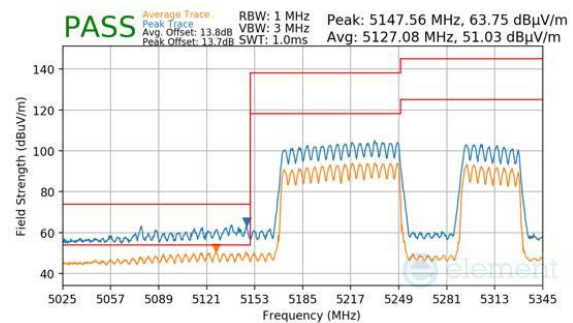


Plot 7-1114. CDD Diversity (Peak & Average, RU996+484+242, Index 94, Ch.50, MCS11)


FCC ID: BCGA3360 IC: 579C-A3360			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 342 of 372	

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

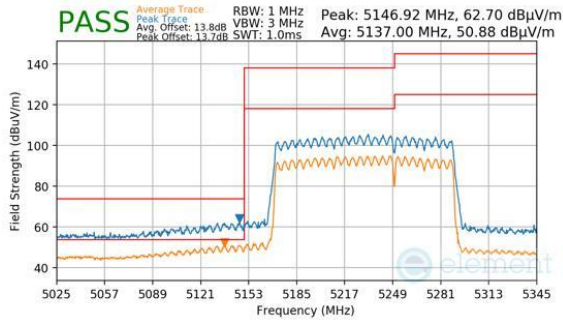


Plot 7-1115. CDD Diversity (Peak & Average, RU996+484+242, Index 95, Ch.50, MCS11)

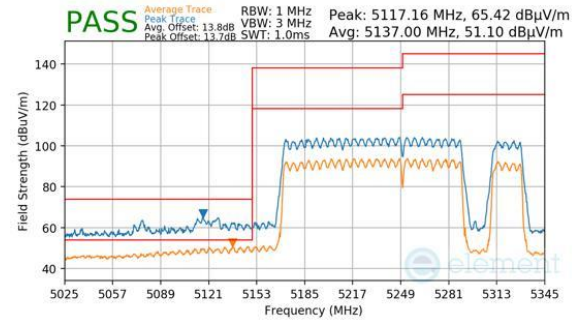


Plot 7-1118. CDD Diversity (Peak & Average, RU996+484+242, Index 98, Ch.50, MCS11)

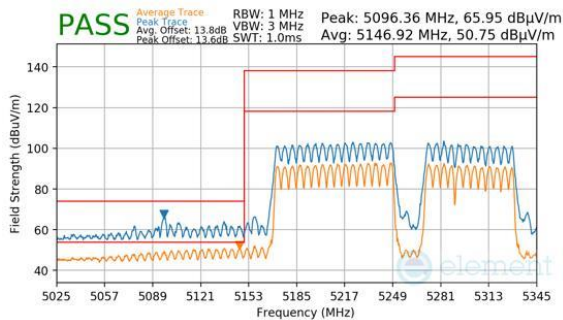


Plot 7-1116. CDD Diversity (Peak & Average, RU996+484+242, Index 96, Ch.50, MCS11)

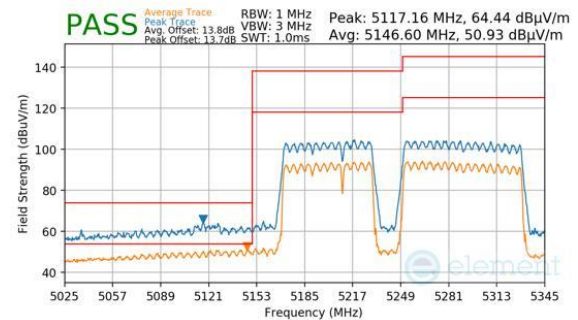

Plot 7-1119. CDD Diversity (Peak & Average, RU996+484+242, Index 99, Ch.50, MCS11)

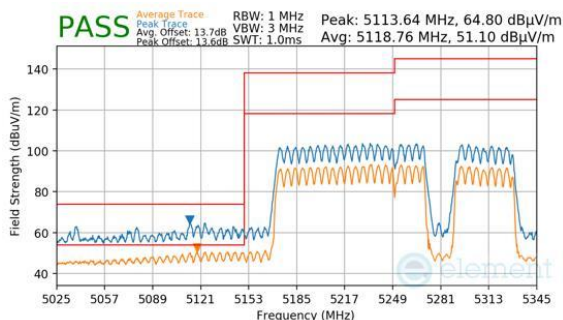

Plot 7-1117. CDD Diversity (Peak & Average, RU996+484+242, Index 97, Ch.50, MCS11)

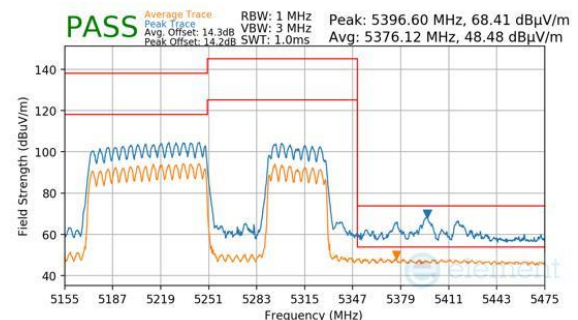


Plot 7-1120. CDD Diversity (Peak & Average, RU996+484+242, Index 94, Ch.50, MCS11)


FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 343 of 372

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

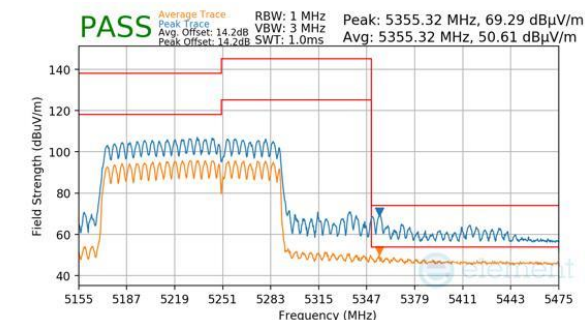


Plot 7-1121. CDD Diversity (Peak & Average, RU996+484+242, Index 95, Ch.50, MCS11)

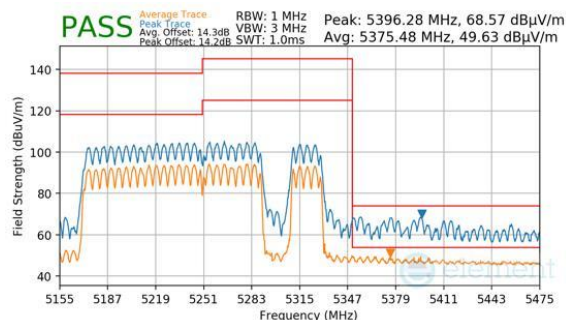


Plot 7-1124. CDD Diversity (Peak & Average, RU996+484+242, Index 98, Ch.50, MCS11)

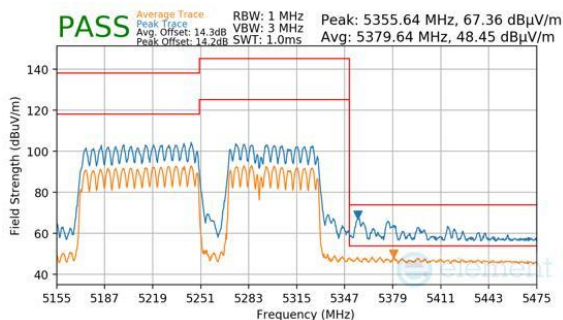


Plot 7-1122. CDD Diversity (Peak & Average, RU996+484+242, Index 96, Ch.50, MCS11)

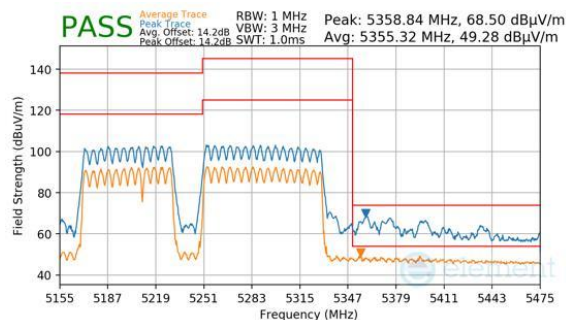

Plot 7-1125. CDD Diversity (Peak & Average, RU996+484+242, Index 99, Ch.50, MCS11)

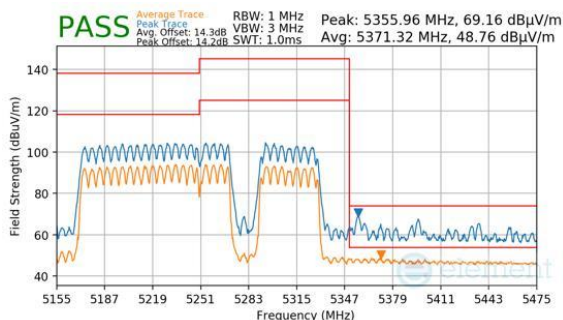


Plot 7-1123. CDD Diversity (Peak & Average, RU996+484+242, Index 97, Ch.50, MCS11)

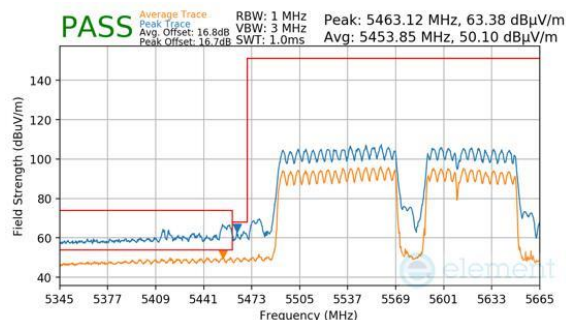


Plot 7-1126. CDD Diversity (Peak & Average, RU996+484+242, Index 96 (H), Ch.114 (FCC ONLY), MCS11)


FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 344 of 372

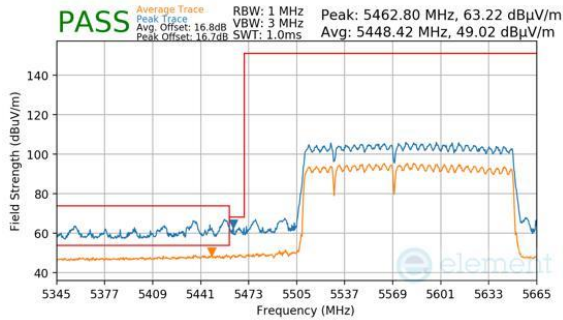


Plot 7-1127. CDD Diversity (Peak & Average, RU996+484+242, Index 96 (L), Ch.114 (FCC ONLY), MCS11)

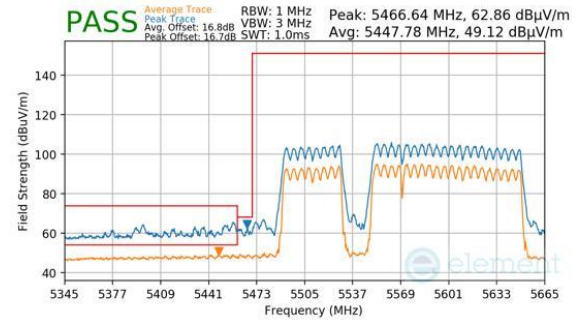


Plot 7-1130. CDD Diversity (Peak & Average, RU996+484+242, Index 98 (L), Ch.114 (FCC ONLY), MCS11)

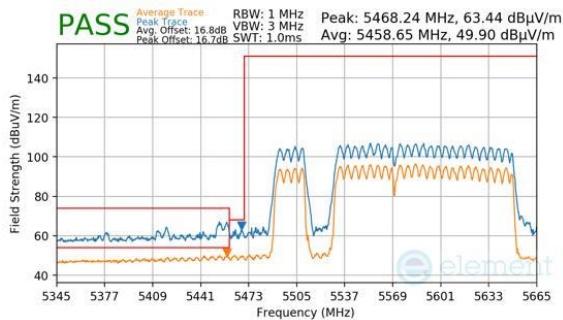


Plot 7-1128. CDD Diversity (Peak & Average, RU996+484+242, Index 97 (L), Ch.114 (FCC ONLY), MCS11)

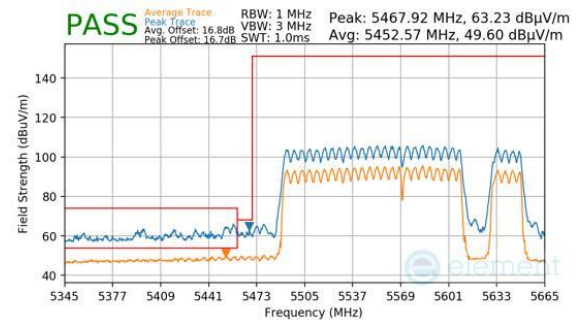

Plot 7-1131. CDD Diversity (Peak & Average, RU996+484+242, Index 98 (H), Ch.114 (FCC ONLY), MCS11)

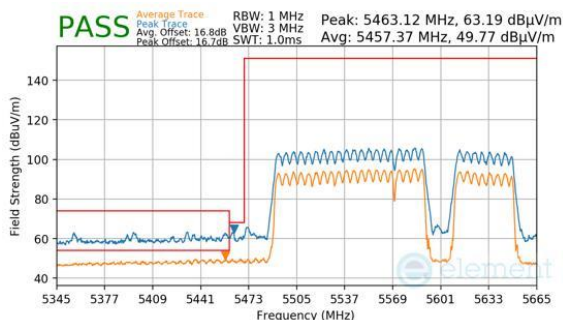

Plot 7-1129. CDD Diversity (Peak & Average, RU996+484+242, Index 97 (H), Ch.114 (FCC ONLY), MCS11)

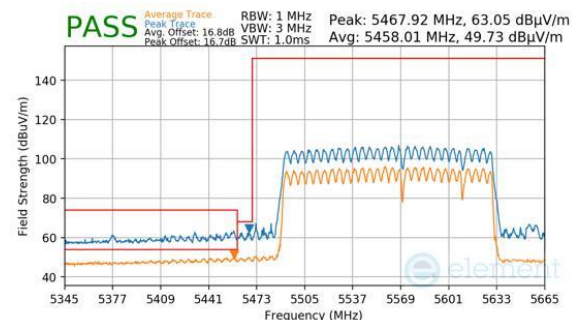


Plot 7-1132. CDD Diversity (Peak & Average, RU996+484+242, Index 99 (H), Ch.114 (FCC ONLY), MCS11)


FCC ID: BCGA3360 IC: 579C-A3360			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device		Page 345 of 372

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

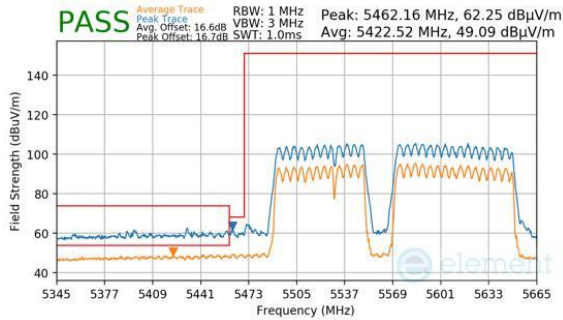


Plot 7-1133. CDD Diversity (Peak & Average, RU996+484+242, Index 99 (L), Ch.114 (FCC ONLY), MCS11)

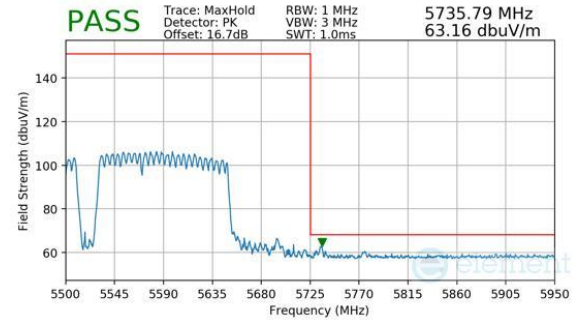


Plot 7-1136. CDD Diversity (Peak, RU996+484+242, Index 97 (L), Ch.114 (FCC ONLY), MCS11)

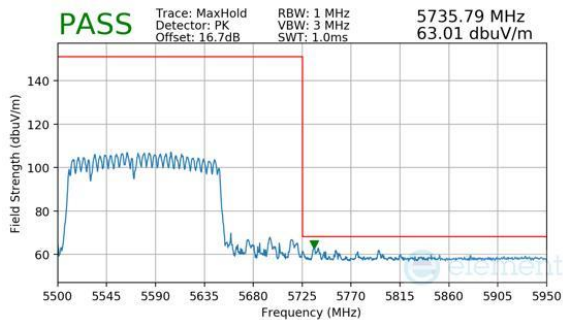


Plot 7-1134. CDD Diversity (Peak, RU996+484+242, Index 96 (L), Ch.114 (FCC ONLY), MCS11)

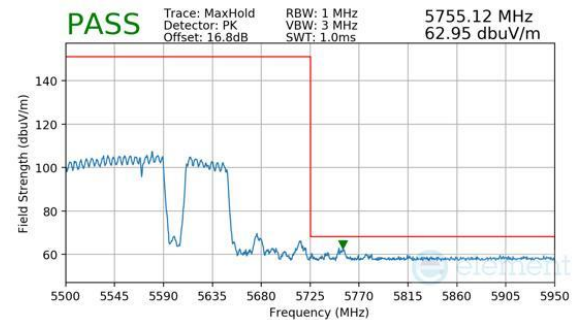

Plot 7-1137. CDD Diversity (Peak, RU996+484+242, Index 97 (H), Ch.114 (FCC ONLY), MCS11)

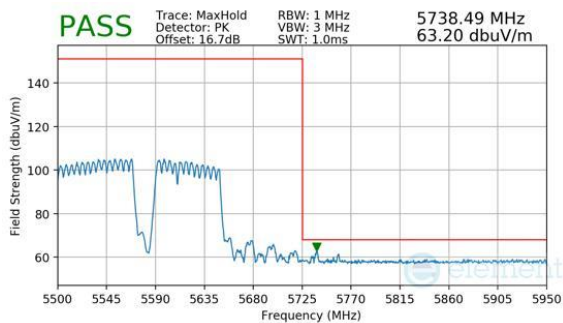


Plot 7-1135. CDD Diversity (Peak, RU996+484+242, Index 96 (H), Ch.114 (FCC ONLY), MCS11)

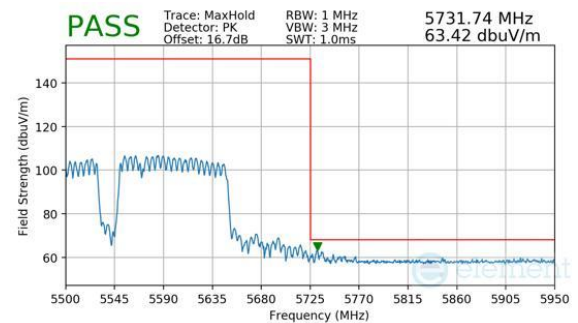


Plot 7-1138. CDD Diversity (Peak, RU996+484+242, Index 98 (L), Ch.114 (FCC ONLY), MCS11)


FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 346 of 372

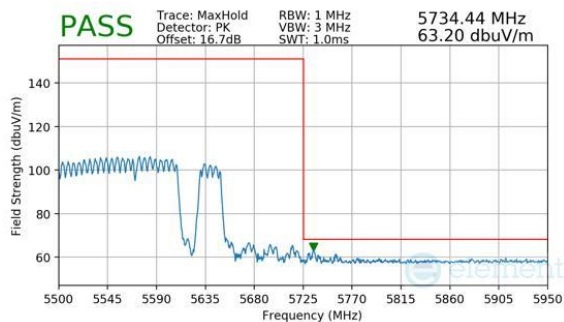

Plot 7-1139. CDD Diversity (Peak, RU996+484+242, Index 98 (H), Ch.114 (FCC ONLY), MCS11)

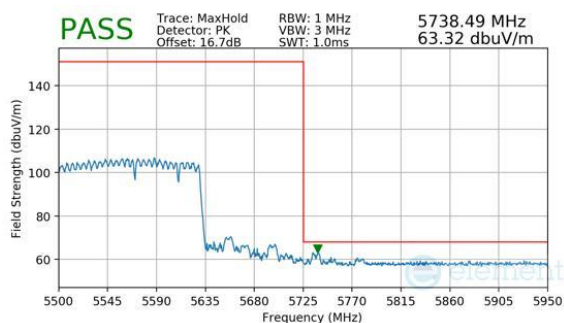

Plot 7-1140. CDD Diversity (Peak, RU996+484+242, Index 99 (H), Ch.114 (FCC ONLY), MCS11)

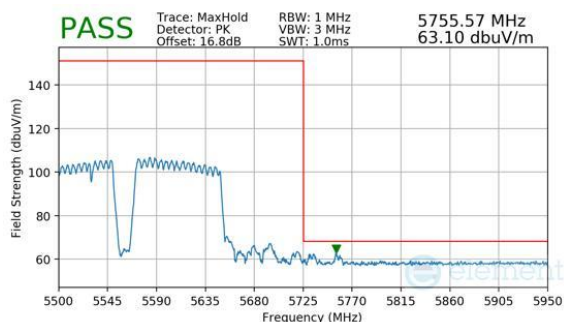


Plot 7-1141. CDD Diversity (Peak, RU996+484+242, Index 99 (L), Ch.114 (FCC ONLY), MCS11)


FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 347 of 372

V 11.0 05/2025


RU996X2

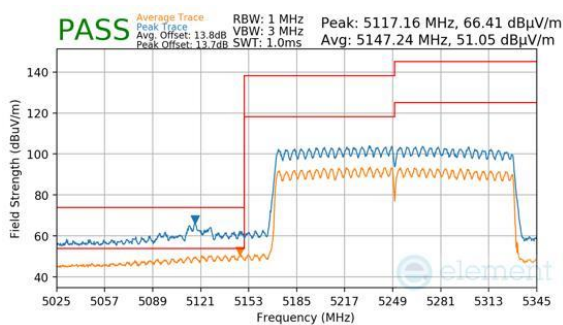


Plot 7-1142. CDD Diversity (Peak & Average, RU996X2, Index 68, Ch.50, MCS11)

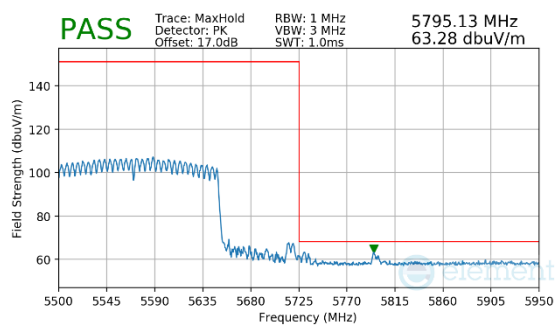

Plot 7-1145. CDD Diversity (Peak RU996X2, Index 68, Ch.114, MCS11)

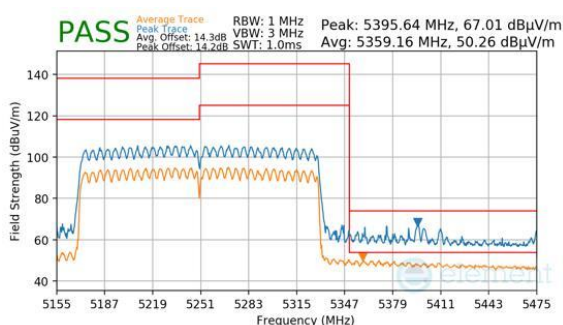

Plot 7-1143. CDD Diversity (Peak & Average, RU996X2, Index 68, Ch.50, MCS11)

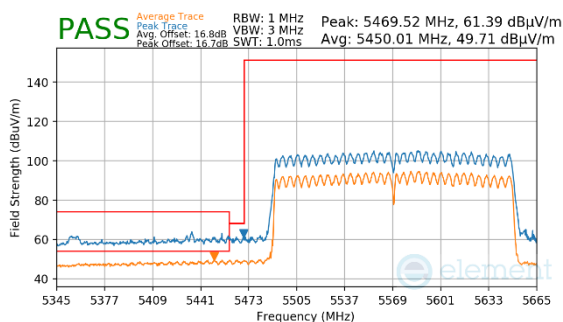

Plot 7-1144. CDD Diversity (Peak & Average, RU996X2, Index 68, Ch.114, MCS11)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 348 of 372

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-234 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-234. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 349 of 372

V 11.0 05/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

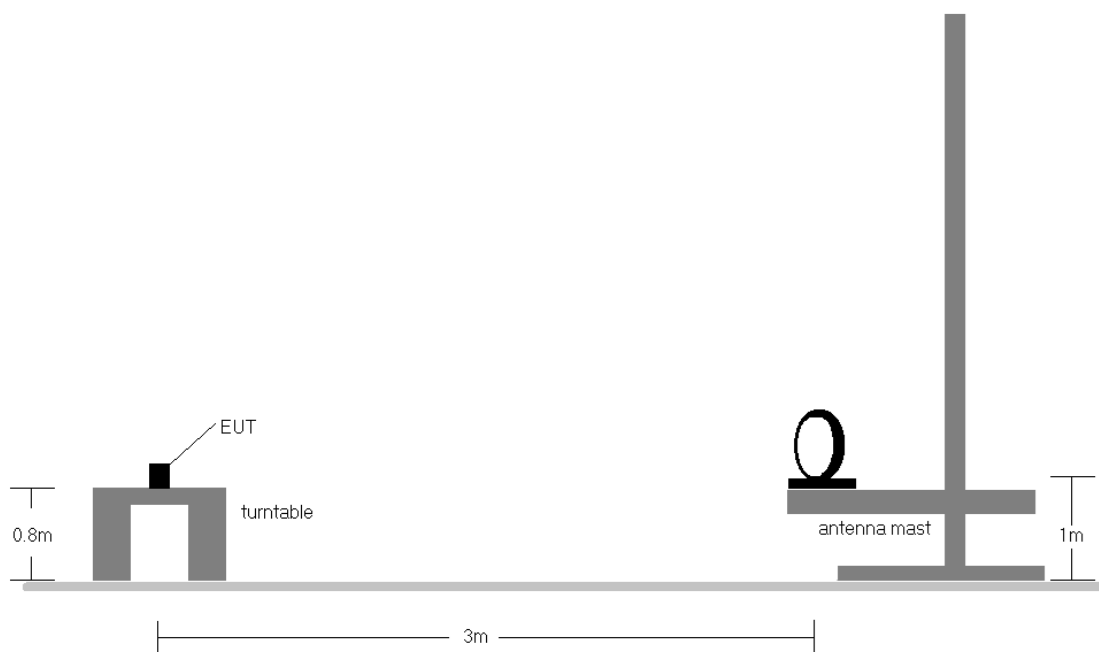


Figure 7-6. Radiated Test Setup < 30MHz

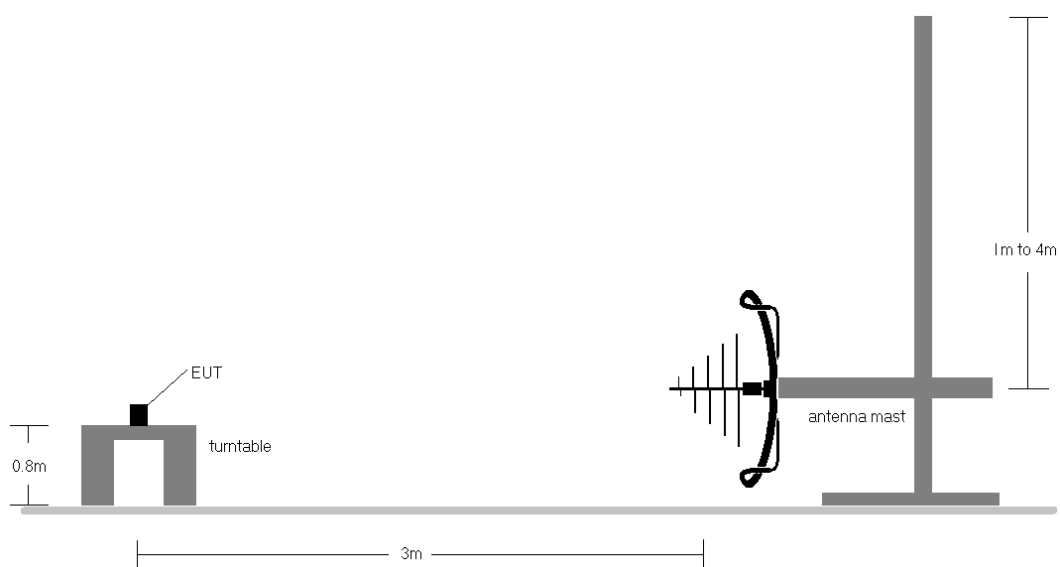


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 350 of 372

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-234.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All antenna configurations and data rates were investigated and only the worst case are reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 351 of 372

V 11.0 05/2025

7.7.1 CDD Primary Radiated Spurious Emissions (Below 1GHz)

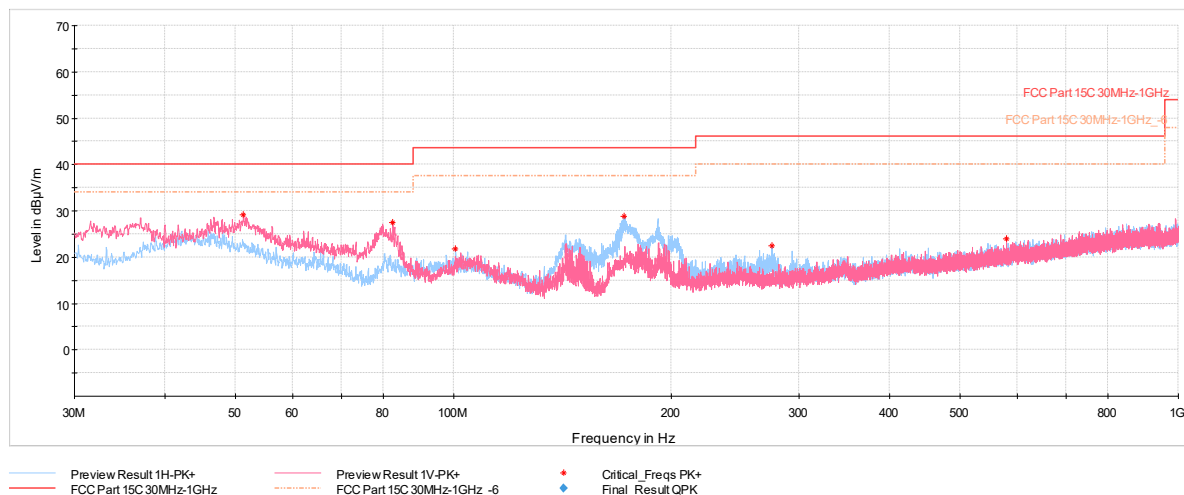


Plot 7-1146. RSE below 1GHz CDD Primary (802.11be RU26 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
51.34	Max Peak	V	100	3	-62.42	-15.43	29.15	40.00	-10.85
82.43	Max Peak	V	100	0	-57.33	-22.16	27.51	40.00	-12.49
100.67	Max Peak	H	300	76	-67.18	-17.95	21.87	43.52	-21.65
171.86	Max Peak	H	100	195	-57.94	-20.26	28.80	43.52	-14.72
274.97	Max Peak	H	100	132	-68.34	-16.14	22.52	46.02	-23.50
579.12	Max Peak	V	100	141	-73.46	-9.51	24.03	46.02	-21.99

Table 7-235. RSE below 1GHz CDD Primary (802.11be RU26 – Ch.40), with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 352 of 372

V 11.0 05/2025

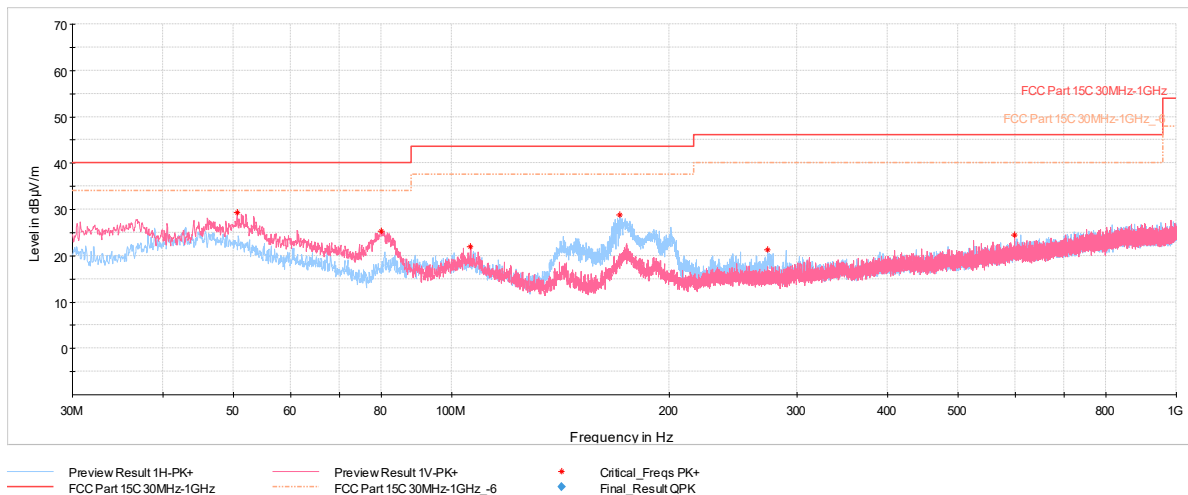


Plot 7-1147. RSE below 1GHz CDD Primary (802.11be RU52+26 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
50.66	Max Peak	V	100	13	-62.26	-15.40	29.34	40.00	-10.66
80.05	Max Peak	V	100	246	-58.82	-22.85	25.33	40.00	-14.67
106.29	Max Peak	V	100	197	-66.74	-18.21	22.05	43.52	-21.47
170.55	Max Peak	H	100	189	-57.93	-20.27	28.80	43.52	-14.72
273.18	Max Peak	H	100	126	-69.52	-16.14	21.34	46.02	-24.68
598.47	Max Peak	V	100	0	-73.84	-8.74	24.42	46.02	-21.60

Table 7-236. RSE below 1GHz CDD Primary (802.11be RU52+26– Ch.40), with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 353 of 372

V 11.0 05/2025

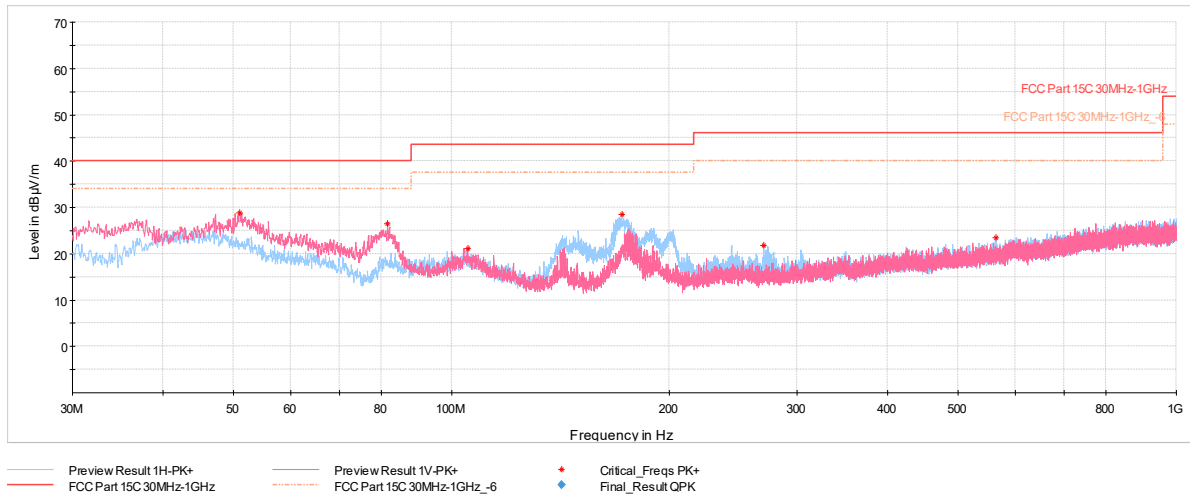


Plot 7-1148. RSE below 1GHz CDD Primary (802.11be RU242 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
51.05	Max Peak	V	100	7	-62.83	-15.40	28.77	40.00	-11.23
81.65	Max Peak	V	100	6	-58.01	-22.43	26.56	40.00	-13.44
105.27	Max Peak	V	300	166	-67.67	-18.14	21.19	43.52	-22.33
171.81	Max Peak	H	100	182	-58.27	-20.26	28.47	43.52	-15.05
269.78	Max Peak	H	100	143	-69.11	-16.10	21.79	46.02	-24.23
563.60	Max Peak	H	100	221	-73.84	-9.72	23.44	46.02	-22.58

Table 7-237. RSE below 1GHz CDD Primary (802.11be RU242– Ch.40), with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 354 of 372

7.7.2 CDD Diversity Radiated Spurious Emissions (Below 1GHz)

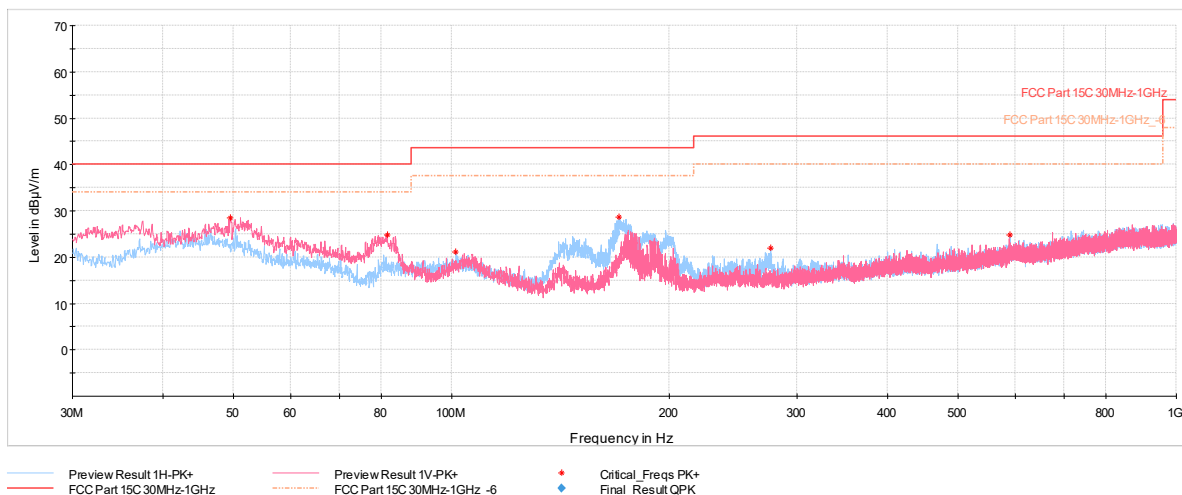


Plot 7-1149. RSE below 1GHz CDD Diversity (802.11be RU26 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
49.59	Max Peak	V	100	0	-63.13	-15.36	28.51	40.00	-11.49
81.56	Max Peak	V	100	7	-59.66	-22.46	24.88	40.00	-15.12
101.44	Max Peak	H	300	272	-68.04	-17.91	21.05	43.52	-22.47
170.31	Max Peak	H	100	195	-58.14	-20.27	28.59	43.52	-14.93
275.80	Max Peak	H	100	119	-68.84	-16.14	22.02	46.02	-24.00
589.25	Max Peak	H	100	302	-73.23	-8.97	24.80	46.02	-21.22

Table 7-238. RSE below 1GHz CDD Diversity (802.11be RU26 – Ch.40), with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 355 of 372

V 11.0 05/2025

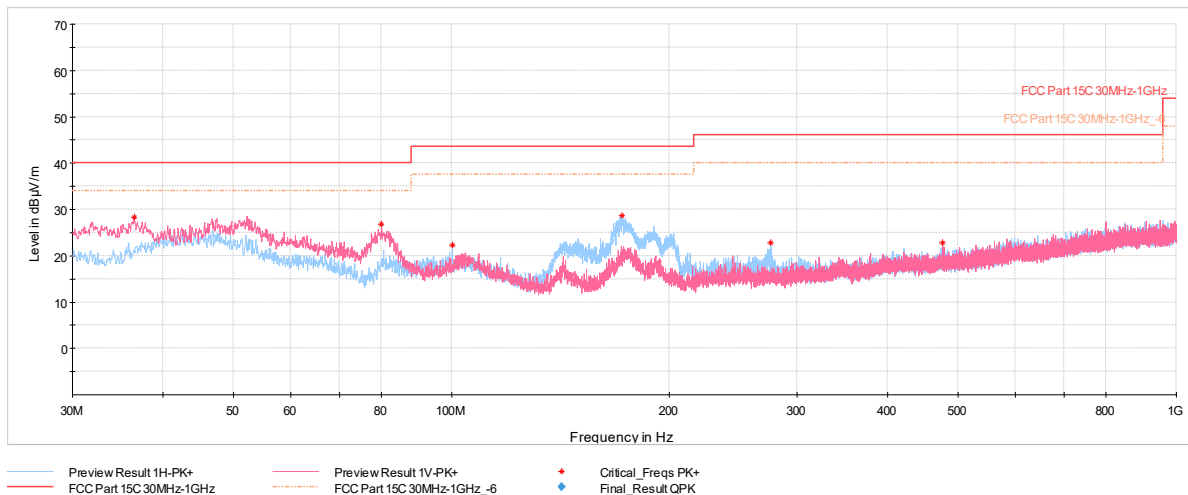


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
36.50	Max Peak	V	100	3	-61.06	-17.67	28.27	40.00	-11.73
80.05	Max Peak	V	100	262	-57.36	-22.85	26.79	40.00	-13.21
100.28	Max Peak	H	300	260	-66.62	-18.00	22.38	43.52	-21.14
171.77	Max Peak	H	100	186	-58.06	-20.26	28.68	43.52	-14.84
275.65	Max Peak	H	100	167	-68.11	-16.14	22.75	46.02	-23.27
475.62	Max Peak	V	300	244	-72.70	-11.45	22.85	46.02	-23.17

Table 7-239. RSE below 1GHz CDD Primary (802.11be RU52+26– Ch.40), with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 356 of 372

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

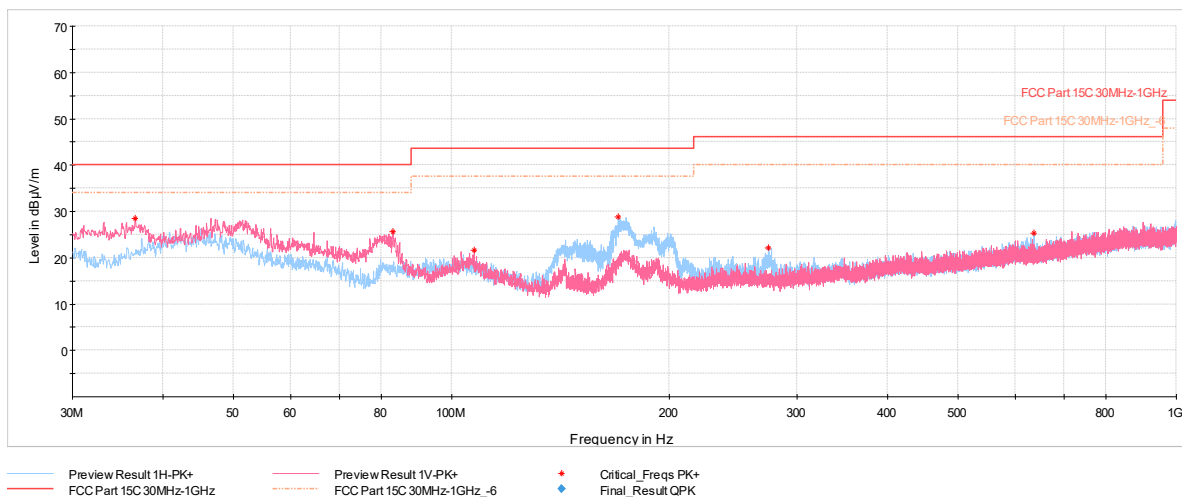

Plot 7-1151. RSE below 1GHz CDD Diversity (802.11be RU242 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
36.60	Max Peak	V	100	25	-60.81	-17.63	28.56	40.00	-11.44
83.01	Max Peak	V	100	0	-59.39	-21.95	25.66	40.00	-14.34
107.55	Max Peak	V	100	149	-67.20	-18.24	21.56	43.52	-21.96
169.87	Max Peak	H	100	189	-57.90	-20.26	28.84	43.52	-14.68
273.76	Max Peak	H	100	146	-68.74	-16.18	22.08	46.02	-23.94
635.72	Max Peak	H	100	0	-72.99	-8.70	25.31	46.02	-20.71

Table 7-240. RSE below 1GHz CDD Diversity (802.11be RU242– Ch.40), with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 357 of 372

V 11.0 05/2025

7.8 AC Line Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-241. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 358 of 372

V 11.0 05/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

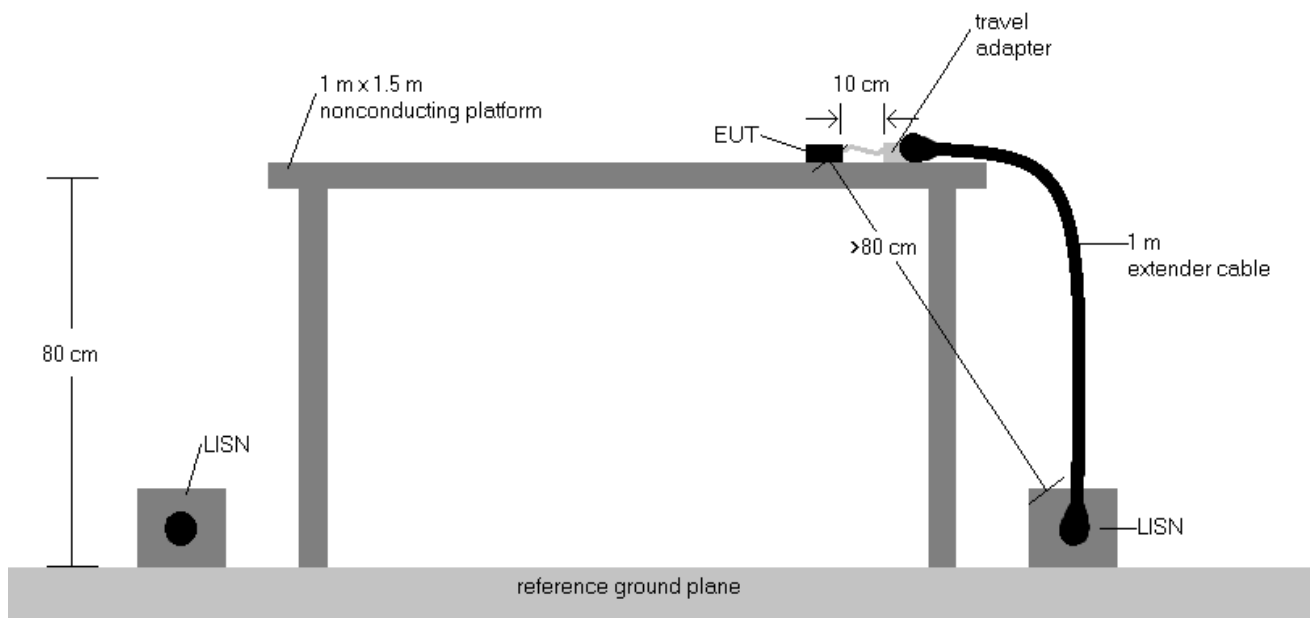


Figure 7-8. Test Instrument & Measurement Setup

Test Notes


1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 359 of 372

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.8.1 CDD Primary AC Line Conducted Emissions Measurement

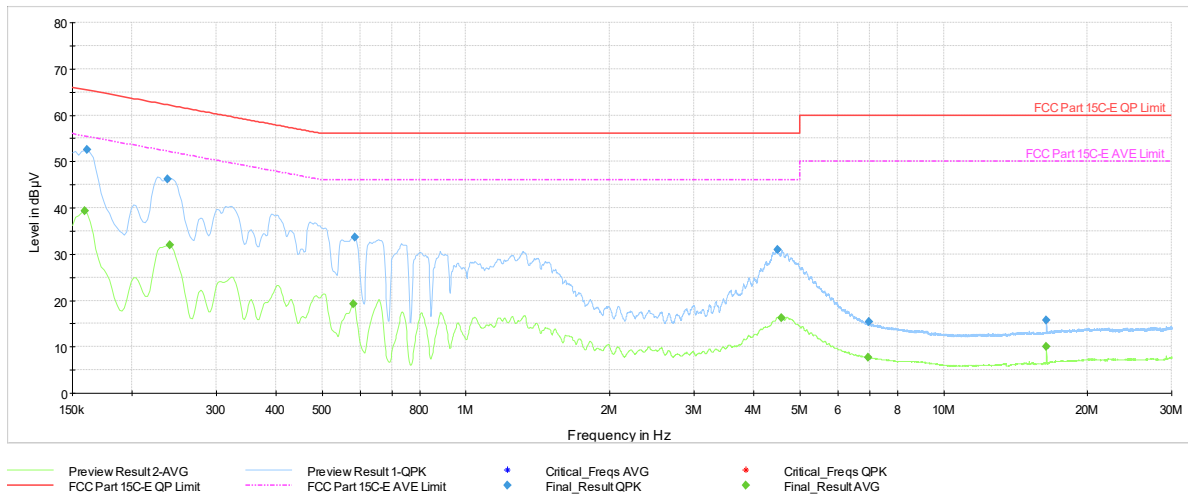

Plot 7-1152. AC Line Conducted Plot with 11be CDD Primary UNII Band 1 – RU26 – Ch.40 (L1) with AC/DC Adapter


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	---	39.33	55.52	-16.19	L1	GND
0.161	FINAL	52.50	---	65.40	-12.90	L1	GND
0.238	FINAL	46.21	---	62.17	-15.96	L1	GND
0.240	FINAL	---	31.95	52.10	-20.15	L1	GND
0.582	FINAL	---	19.27	46.00	-26.73	L1	GND
0.587	FINAL	33.61	---	56.00	-22.39	L1	GND
4.486	FINAL	31.02	---	56.00	-24.98	L1	GND
4.578	FINAL	---	16.23	46.00	-29.77	L1	GND
6.950	FINAL	---	7.70	50.00	-42.30	L1	GND
6.981	FINAL	15.33	---	60.00	-44.67	L1	GND
16.418	FINAL	---	10.12	50.00	-39.88	L1	GND
16.418	FINAL	15.82	---	60.00	-44.18	L1	GND

Table 7-242. AC Line Conducted with 11be CDD Primary UNII Band 1 – RU26 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 360 of 372

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

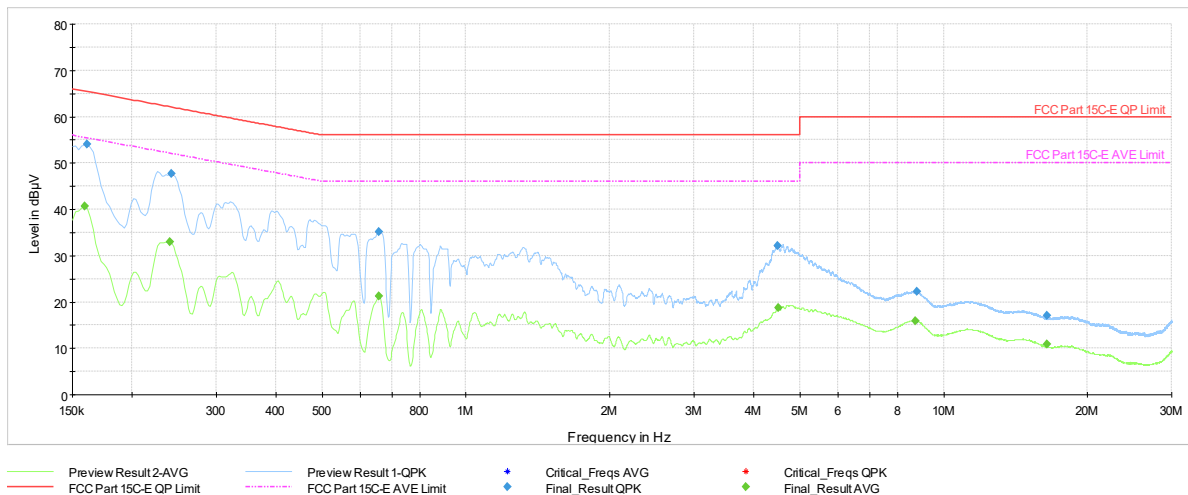

Plot 7-1153. AC Line Conducted Plot with 11be CDD Primary UNII Band 1 – RU26 – Ch.40 (N) with AC/DC Adapter


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	---	40.73	55.52	-14.79	N	GND
0.161	FINAL	54.11	---	65.40	-11.29	N	GND
0.240	FINAL	---	33.04	52.10	-19.06	N	GND
0.242	FINAL	47.66	---	62.02	-14.36	N	GND
0.659	FINAL	---	21.33	46.00	-24.67	N	GND
0.659	FINAL	35.11	---	56.00	-20.89	N	GND
4.486	FINAL	32.19	---	56.00	-23.81	N	GND
4.499	FINAL	---	18.81	46.00	-27.19	N	GND
8.716	FINAL	---	15.98	50.00	-34.02	N	GND
8.781	FINAL	22.33	---	60.00	-37.67	N	GND
16.424	FINAL	---	10.85	50.00	-39.15	N	GND
16.424	FINAL	17.00	---	60.00	-43.00	N	GND

Table 7-243. AC Line Conducted with 11be CDD Primary UNII Band 1 – RU26 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 361 of 372

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

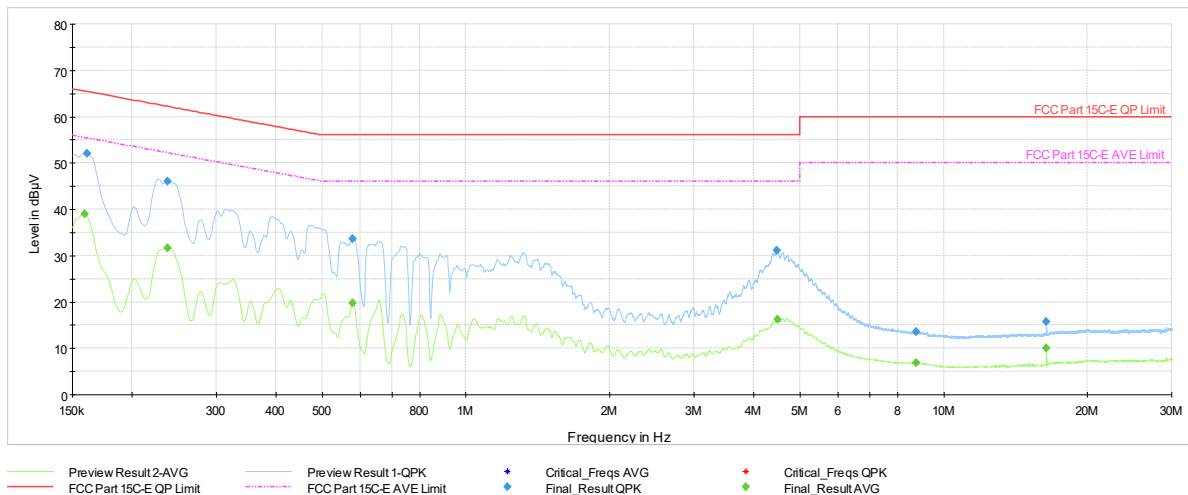


Plot 7-1154. AC Line Conducted Plot with 11be CDD Primary UNII Band 1 – RU52+26 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	---	39.07	55.52	-16.45	L1	GND
0.161	FINAL	52.13	---	65.40	-13.27	L1	GND
0.238	FINAL	---	31.58	52.17	-20.59	L1	GND
0.238	FINAL	45.98	---	62.17	-16.19	L1	GND
0.580	FINAL	---	19.77	46.00	-26.23	L1	GND
0.580	FINAL	33.66	---	56.00	-22.34	L1	GND
4.477	FINAL	31.06	---	56.00	-24.94	L1	GND
4.486	FINAL	---	16.27	46.00	-29.73	L1	GND
8.754	FINAL	---	6.83	50.00	-43.17	L1	GND
8.759	FINAL	13.49	---	60.00	-46.51	L1	GND
16.415	FINAL	---	10.06	50.00	-39.94	L1	GND
16.415	FINAL	15.76	---	60.00	-44.24	L1	GND

Table 7-244. AC Line Conducted with 11be CDD Primary UNII Band 1 – RU52+26 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 362 of 372

V 11.0 05/2025

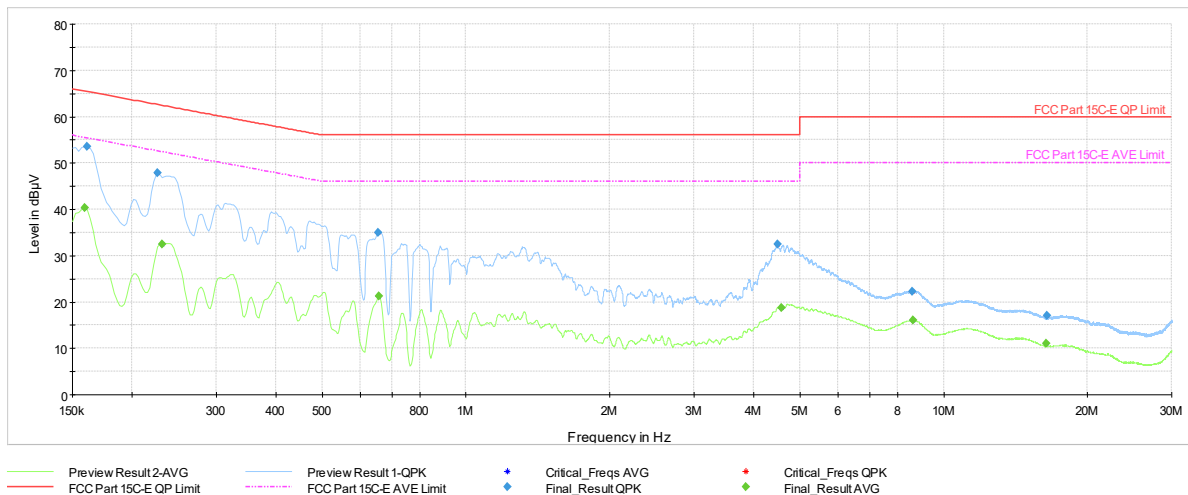

Plot 7-1155. AC Line Conducted Plot with 11be CDD Primary UNII Band 1 – RU52+26 – Ch.40 (N) with AC/DC Adapter


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	---	40.39	55.52	-15.13	N	GND
0.161	FINAL	53.63	---	65.40	-11.77	N	GND
0.227	FINAL	47.87	---	62.58	-14.71	N	GND
0.231	FINAL	---	32.50	52.41	-19.91	N	GND
0.654	FINAL	34.91	---	56.00	-21.09	N	GND
0.656	FINAL	---	21.31	46.00	-24.69	N	GND
4.486	FINAL	32.55	---	56.00	-23.45	N	GND
4.576	FINAL	---	18.80	46.00	-27.20	N	GND
8.610	FINAL	22.34	---	60.00	-37.66	N	GND
8.642	FINAL	---	16.02	50.00	-33.98	N	GND
16.420	FINAL	---	10.98	50.00	-39.02	N	GND
16.422	FINAL	17.14	---	60.00	-42.86	N	GND

Table 7-245. AC Line Conducted with 11be CDD Primary UNII Band 1 – RU52+26 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 363 of 372

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

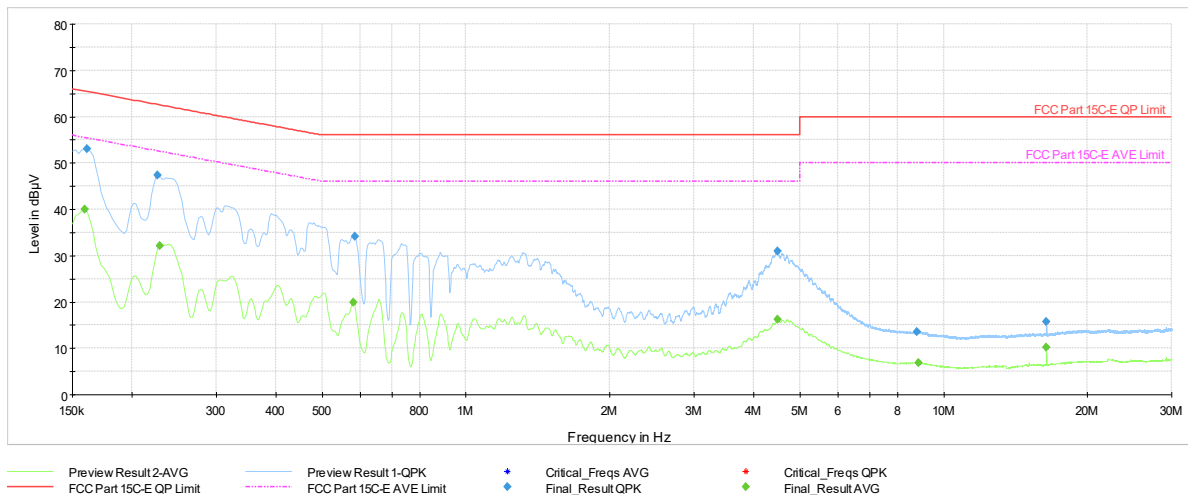

Plot 7-1156. AC Line Conducted Plot with 11be CDD Primary UNII Band 1 – RU242 – Ch.40 (L1) with AC/DC Adapter


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.159	FINAL	---	39.95	55.52	-15.57	L1	GND
0.161	FINAL	53.04	---	65.40	-12.36	L1	GND
0.227	FINAL	47.40	---	62.58	-15.18	L1	GND
0.229	FINAL	---	32.10	52.50	-20.40	L1	GND
0.582	FINAL	---	19.91	46.00	-26.09	L1	GND
0.587	FINAL	34.08	---	56.00	-21.92	L1	GND
4.486	FINAL	---	16.17	46.00	-29.83	L1	GND
4.493	FINAL	31.03	---	56.00	-24.97	L1	GND
8.795	FINAL	13.62	---	60.00	-46.38	L1	GND
8.869	FINAL	---	6.81	50.00	-43.19	L1	GND
16.418	FINAL	---	10.15	50.00	-39.85	L1	GND
16.418	FINAL	15.66	---	60.00	-44.34	L1	GND

Table 7-246. AC Line Conducted with 11be CDD Primary UNII Band 1 – RU242 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 364 of 372

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

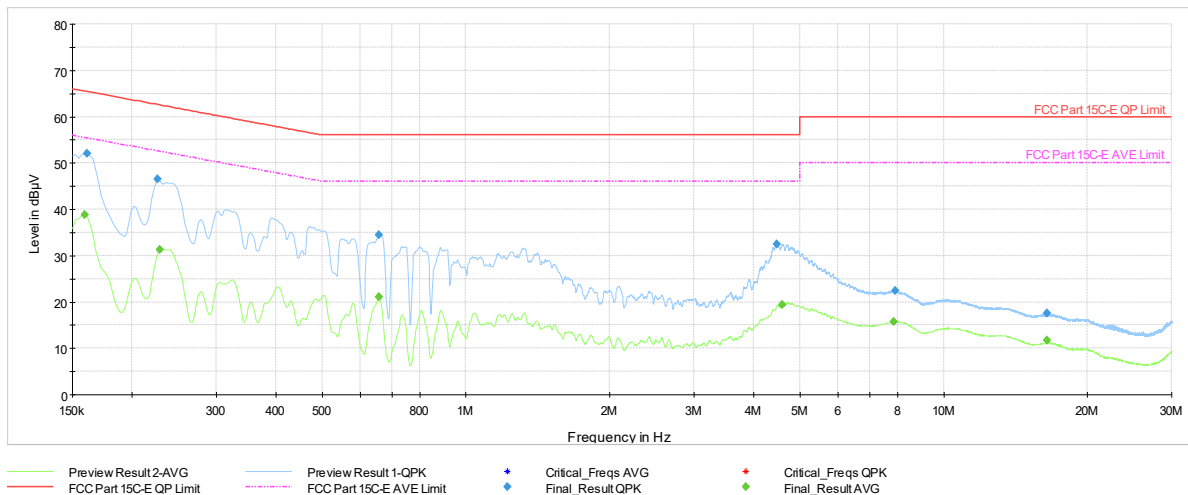

Plot 7-1157. AC Line Conducted Plot with 11be CDD Primary UNII Band 1 – RU242 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.159	FINAL	---	38.89	55.52	-16.63	N	GND
0.161	FINAL	52.11	---	65.40	-13.29	N	GND
0.227	FINAL	46.46	---	62.58	-16.12	N	GND
0.229	FINAL	---	31.23	52.50	-21.27	N	GND
0.656	FINAL	---	21.06	46.00	-24.94	N	GND
0.656	FINAL	34.53	---	56.00	-21.47	N	GND
4.470	FINAL	32.54	---	56.00	-23.46	N	GND
4.585	FINAL	---	19.37	46.00	-26.63	N	GND
7.859	FINAL	---	15.77	50.00	-34.23	N	GND
7.926	FINAL	22.49	---	60.00	-37.51	N	GND
16.422	FINAL	17.51	---	60.00	-42.49	N	GND
16.424	FINAL	---	11.64	50.00	-38.36	N	GND


Table 7-247. AC Line Conducted with 11be CDD Primary UNII Band 1 – RU242 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 365 of 372

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.8.2 CDD Diversity AC Line Conducted Emissions Measurement

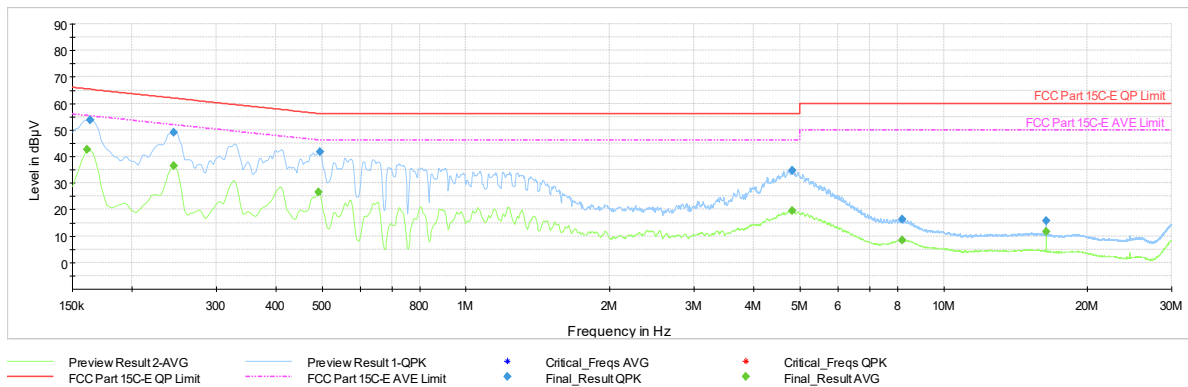

Plot 7-1158. AC Line Conducted Plot with 11be CDD Diversity UNII Band 1 – RU26 – Ch.40 (L1) with AC/DC Adapter


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.161	FINAL	---	42.59	55.40	-12.81	L1	GND
0.164	FINAL	53.84	---	65.28	-11.44	L1	GND
0.245	FINAL	---	36.52	51.94	-15.42	L1	GND
0.245	FINAL	49.13	---	61.94	-12.81	L1	GND
0.492	FINAL	---	26.64	46.13	-19.49	L1	GND
0.494	FINAL	41.71	---	56.10	-14.39	L1	GND
4.828	FINAL	34.75	---	56.00	-21.25	L1	GND
4.828	FINAL	---	19.65	46.00	-26.35	L1	GND
8.174	FINAL	16.26	---	60.00	-43.74	L1	GND
8.174	FINAL	---	8.35	50.00	-41.65	L1	GND
16.368	FINAL	---	11.52	50.00	-38.48	L1	GND
16.368	FINAL	15.59	---	60.00	-44.41	L1	GND

Table 7-248. AC Line Conducted with 11be CDD Diversity UNII Band 1 – RU26 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 366 of 372

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

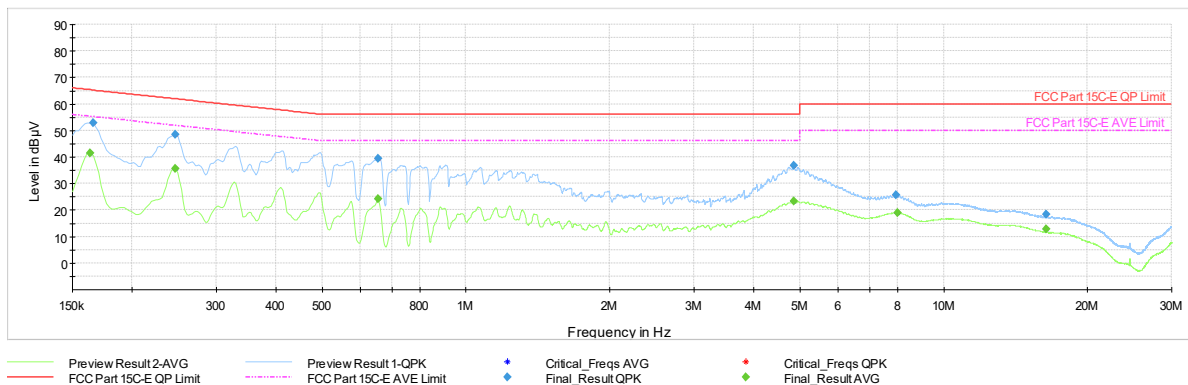


Plot 7-1159. AC Line Conducted Plot with 11be CDD Diversity UNII Band 1 – RU26 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	---	41.57	55.28	-13.71	N	GND
0.166	FINAL	52.75	---	65.17	-12.42	N	GND
0.247	FINAL	---	35.57	51.87	-16.30	N	GND
0.247	FINAL	48.44	---	61.87	-13.43	N	GND
0.654	FINAL	---	24.16	46.00	-21.84	N	GND
0.654	FINAL	39.41	---	56.00	-16.59	N	GND
4.848	FINAL	---	23.40	46.00	-22.60	N	GND
4.857	FINAL	36.77	---	56.00	-19.23	N	GND
7.962	FINAL	25.55	---	60.00	-34.45	N	GND
7.996	FINAL	---	18.97	50.00	-31.03	N	GND
16.373	FINAL	---	12.77	50.00	-37.23	N	GND
16.373	FINAL	18.45	---	60.00	-41.55	N	GND

Table 7-249. AC Line Conducted with 11be CDD Diversity UNII Band 1 – RU26 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 367 of 372

V 11.0 05/2025

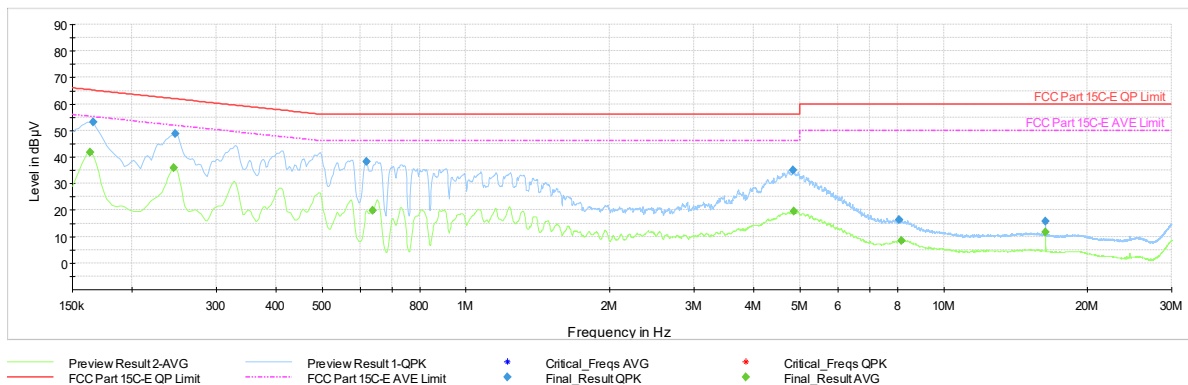


Plot 7-1160. AC Line Conducted Plot with 11be CDD Diversity UNII Band 1 – RU52+26 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	---	41.62	55.28	-13.66	L1	GND
0.166	FINAL	53.01	---	65.17	-12.16	L1	GND
0.245	FINAL	---	35.97	51.94	-15.97	L1	GND
0.247	FINAL	48.92	---	61.87	-12.95	L1	GND
0.620	FINAL	38.37	---	56.00	-17.63	L1	GND
0.638	FINAL	---	19.92	46.00	-26.08	L1	GND
4.837	FINAL	35.15	---	56.00	-20.85	L1	GND
4.848	FINAL	---	19.66	46.00	-26.34	L1	GND
8.077	FINAL	16.29	---	60.00	-43.71	L1	GND
8.171	FINAL	---	8.48	50.00	-41.52	L1	GND
16.352	FINAL	---	11.53	50.00	-38.47	L1	GND
16.352	FINAL	15.70	---	60.00	-44.30	L1	GND

Table 7-250. AC Line Conducted with 11be CDD Diversity UNII Band 1 – RU52+26 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 368 of 372

V 11.0 05/2025

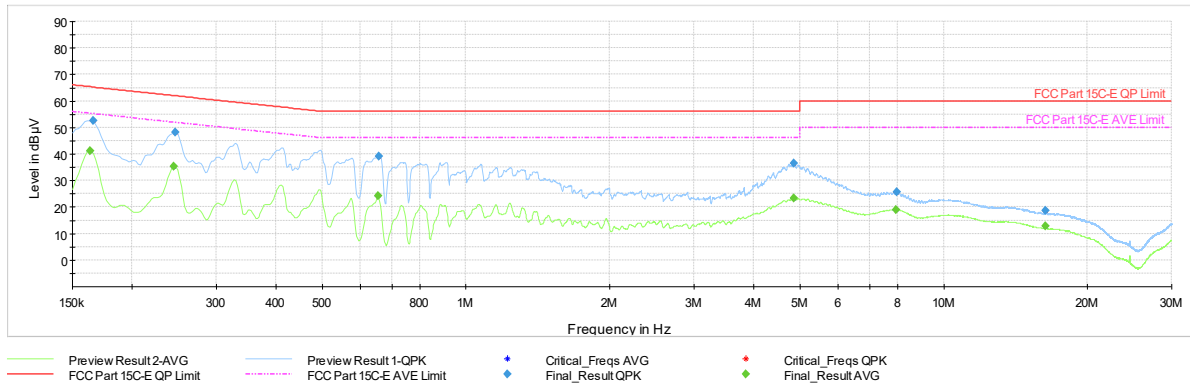


Plot 7-1161. AC Line Conducted Plot with 11be CDD Diversity UNII Band 1 – RU52+26 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	---	41.21	55.28	-14.07	N	GND
0.166	FINAL	52.46	---	65.17	-12.71	N	GND
0.245	FINAL	---	35.43	51.94	-16.51	N	GND
0.247	FINAL	48.19	---	61.87	-13.68	N	GND
0.654	FINAL	---	24.07	46.00	-21.93	N	GND
0.659	FINAL	39.09	---	56.00	-16.91	N	GND
4.850	FINAL	36.46	---	56.00	-19.54	N	GND
4.853	FINAL	---	23.42	46.00	-22.58	N	GND
7.962	FINAL	---	19.05	50.00	-30.95	N	GND
7.969	FINAL	25.68	---	60.00	-34.32	N	GND
16.359	FINAL	---	12.94	50.00	-37.06	N	GND
16.359	FINAL	18.70	---	60.00	-41.30	N	GND

Table 7-251. AC Line Conducted with 11be CDD Diversity UNII Band 1 – RU52+26 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 369 of 372

V 11.0 05/2025

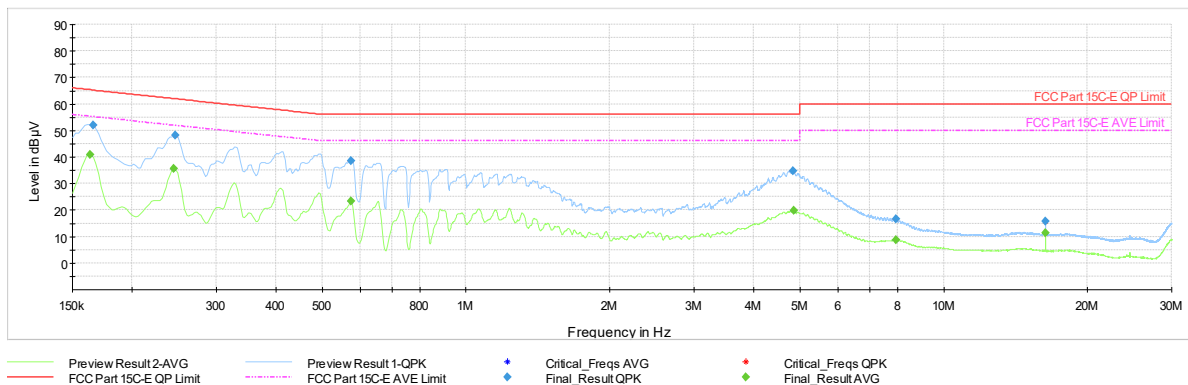


Plot 7-1162. AC Line Conducted Plot with 11be CDD Diversity UNII Band 1 – RU242 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	---	40.96	55.28	-14.32	L1	GND
0.166	FINAL	52.11	---	65.17	-13.06	L1	GND
0.245	FINAL	---	35.56	51.94	-16.38	L1	GND
0.247	FINAL	48.27	---	61.87	-13.60	L1	GND
0.575	FINAL	---	23.46	46.00	-22.54	L1	GND
0.575	FINAL	38.46	---	56.00	-17.54	L1	GND
4.839	FINAL	34.80	---	56.00	-21.20	L1	GND
4.848	FINAL	---	19.92	46.00	-26.08	L1	GND
7.942	FINAL	---	8.74	50.00	-41.26	L1	GND
7.962	FINAL	16.59	---	60.00	-43.41	L1	GND
16.350	FINAL	15.63	---	60.00	-44.37	L1	GND
16.352	FINAL	---	11.36	50.00	-38.64	L1	GND

Table 7-252. AC Line Conducted with 11be CDD Diversity UNII Band 1 – RU242 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 370 of 372

V 11.0 05/2025

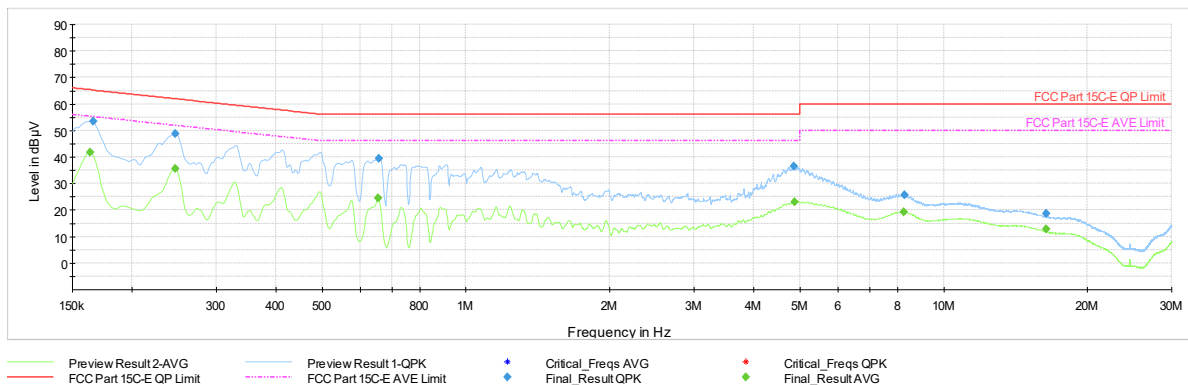

Plot 7-1163. AC Line Conducted Plot with 11be CDD Diversity UNII Band 1 – RU242 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	---	41.68	55.28	-13.60	N	GND
0.166	FINAL	53.32	---	65.17	-11.85	N	GND
0.247	FINAL	---	35.72	51.87	-16.15	N	GND
0.247	FINAL	48.79	---	61.87	-13.08	N	GND
0.654	FINAL	---	24.59	46.00	-21.41	N	GND
0.656	FINAL	39.39	---	56.00	-16.61	N	GND
4.855	FINAL	36.51	---	56.00	-19.49	N	GND
4.868	FINAL	---	23.19	46.00	-22.81	N	GND
8.241	FINAL	---	19.21	50.00	-30.79	N	GND
8.282	FINAL	25.70	---	60.00	-34.30	N	GND
16.366	FINAL	---	12.87	50.00	-37.13	N	GND
16.366	FINAL	18.52	---	60.00	-41.48	N	GND

Table 7-253. AC Line Conducted with 11be CDD Diversity UNII Band 1 – RU242 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 371 of 372

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3360** and **IC: 579C-A3360** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-14.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 372 of 372

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.