


Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
MCS7
3 Meters
2447MHz
8

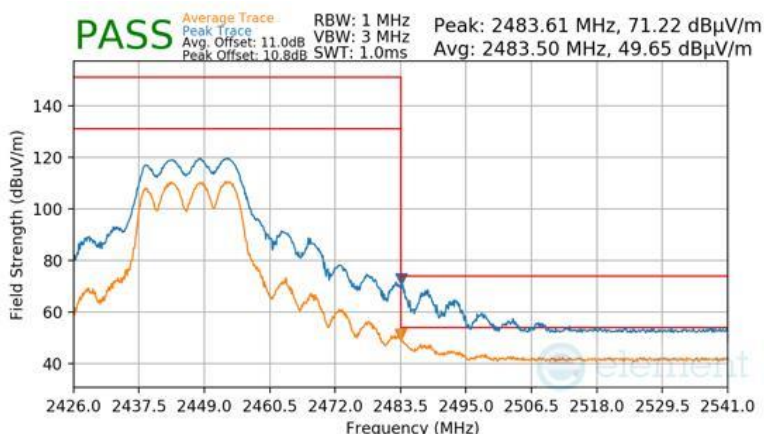

Plot 7-397 Radiated Restricted Upper Band Edge Measurement CDD Diversity

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
MCS7
3 Meters
2452MHz
9

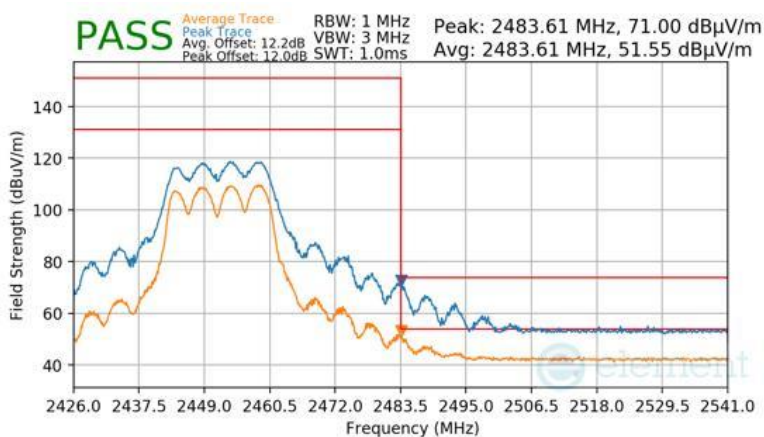


Plot 7-398 Radiated Restricted Upper Band Edge Measurement CDD Diversity

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 254 of 281

V 11.0 5/2025

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
MCS7
3 Meters
2457MHz
10

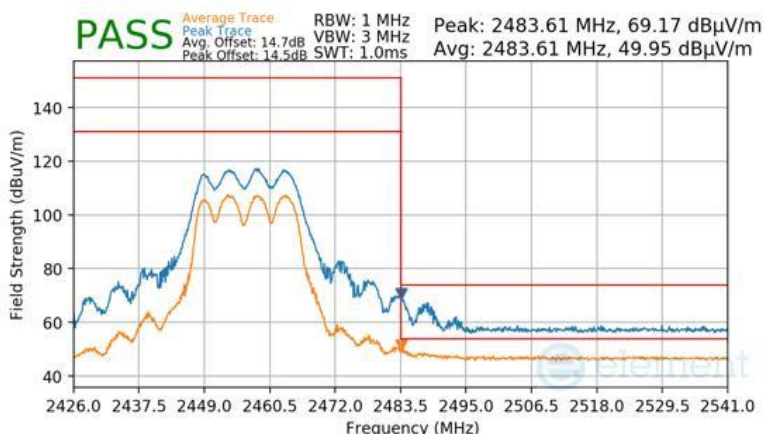

Plot 7-399 Radiated Restricted Upper Band Edge Measurement CDD Diversity

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
MCS7
3 Meters
2462MHz
11

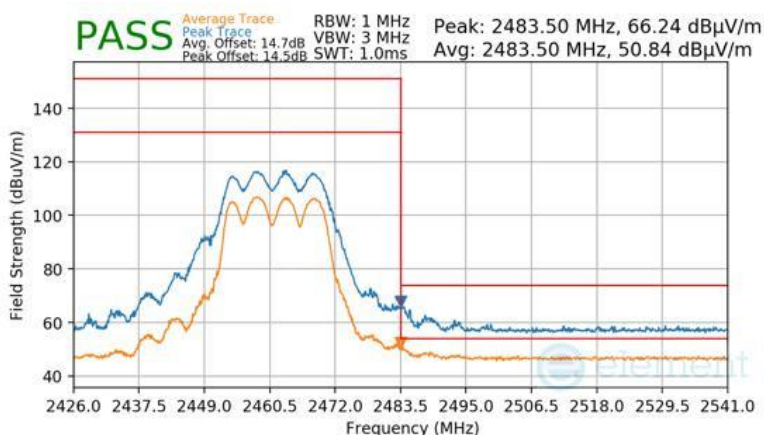


Plot 7-400 Radiated Restricted Upper Band Edge Measurement CDD Diversity

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 255 of 281

V 11.0 5/2025

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11n
 MCS7
 3 Meters
 2467MHz
 12

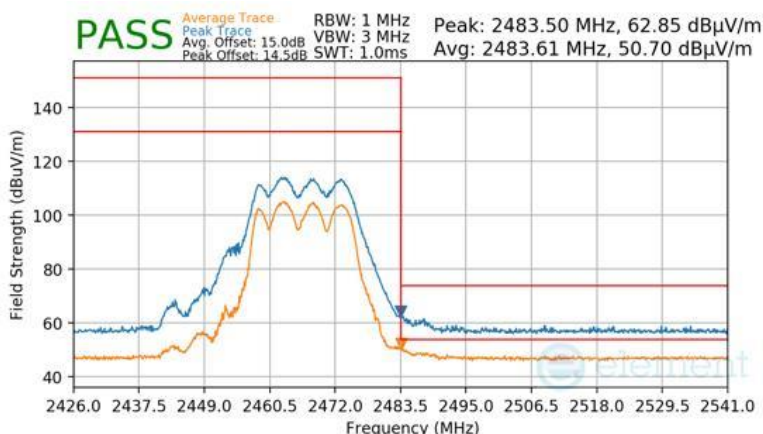

Plot 7-401 Radiated Restricted Upper Band Edge Measurement CDD Diversity

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11n
 MCS7
 3 Meters
 2472MHz
 13

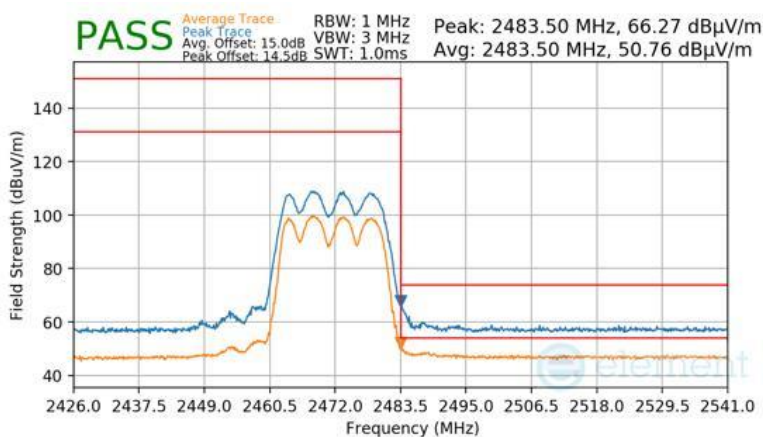


Plot 7-402 Radiated Restricted Upper Band Edge Measurement CDD Diversity

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 256 of 281

V 11.0 5/2025

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
MCS9
3 Meters
2412MHz
1

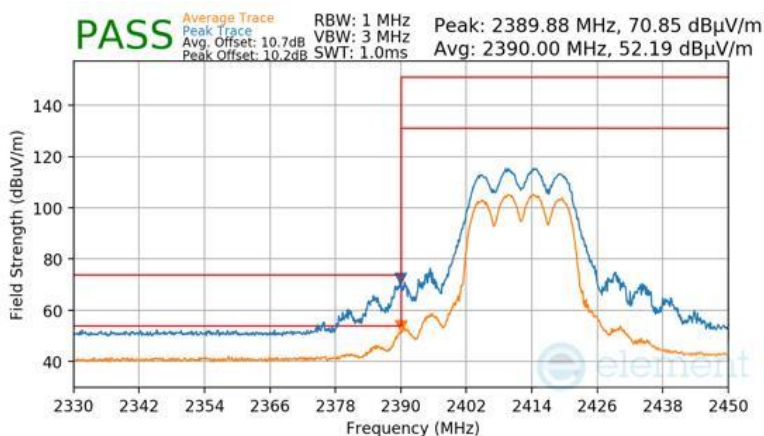

Plot 7-403 Radiated Restricted Lower Band Edge Measurement CDD Diversity

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
MCS9
3 Meters
2417MHz
2

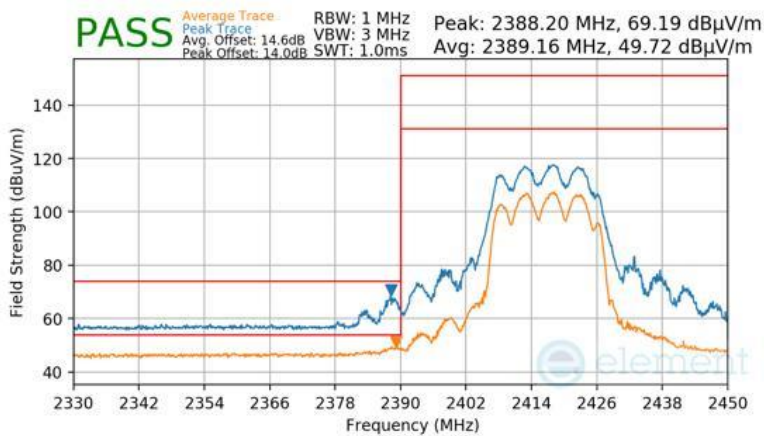


Plot 7-404 Radiated Restricted Lower Band Edge Measurement CDD Diversity

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 257 of 281

V 11.0 5/2025

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
MCS9
3 Meters
2422MHz
3

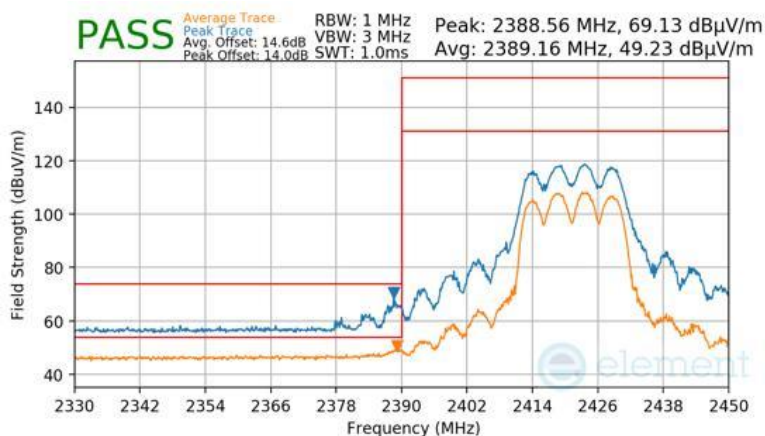

Plot 7-405 Radiated Restricted Lower Band Edge Measurement CDD Diversity

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
MCS9
3 Meters
2427MHz
4

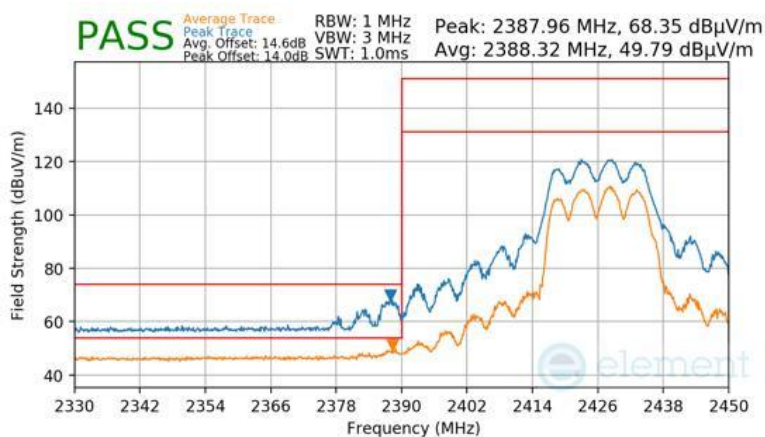


Plot 7-406 Radiated Restricted Lower Band Edge Measurement CDD Diversity

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 258 of 281

V 11.0 5/2025

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2432MHz
 5

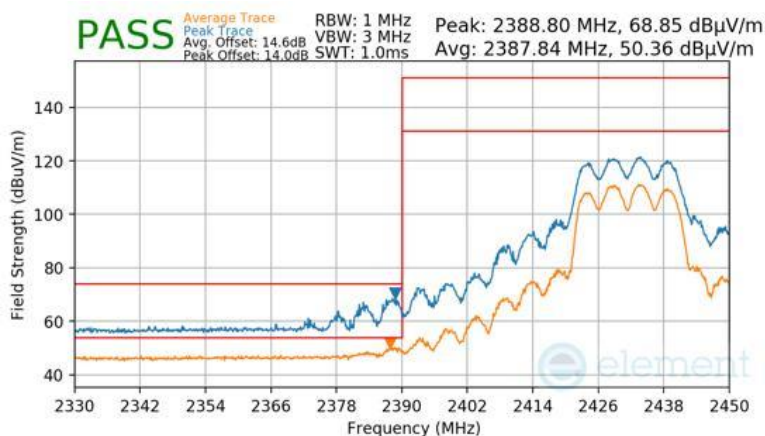

Plot 7-407 Radiated Restricted Lower Band Edge Measurement CDD Diversity

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2437MHz
 6

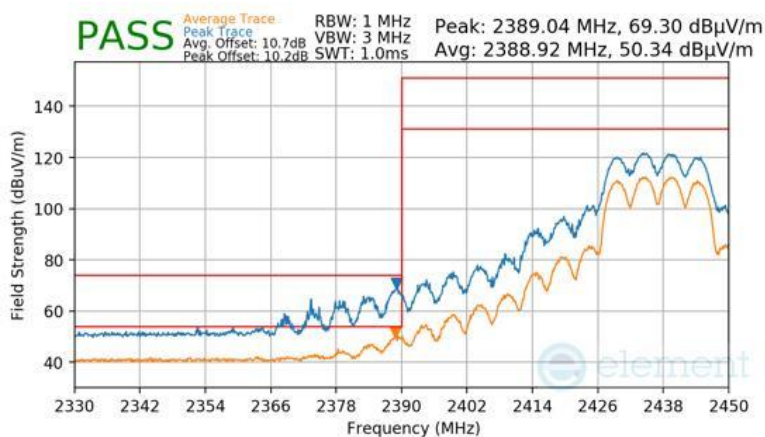


Plot 7-408 Radiated Restricted Lower Band Edge Measurement CDD Diversity

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 259 of 281

V 11.0 5/2025

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
MCS9
3 Meters
2437MHz
6

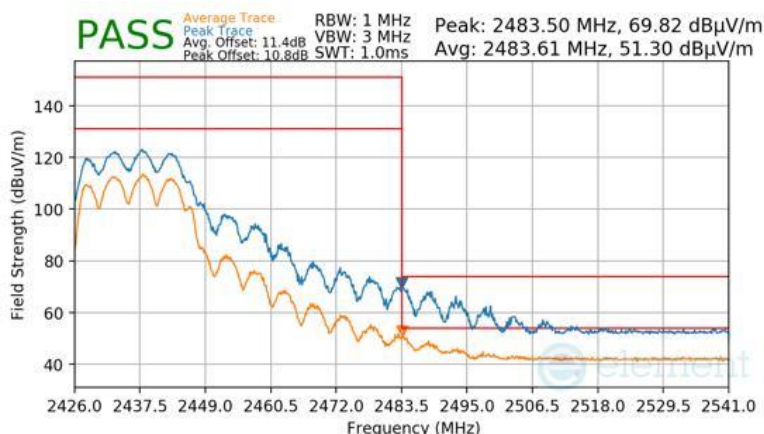

Plot 7-409 Radiated Restricted Upper Band Edge Measurement CDD Diversity

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
MCS9
3 Meters
2442MHz
7

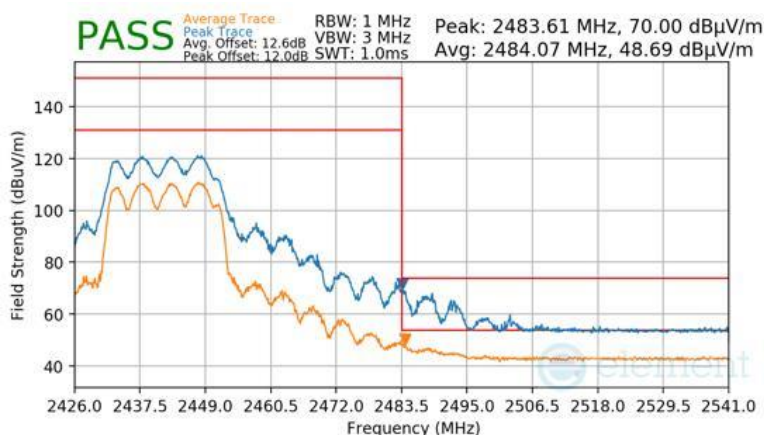


Plot 7-410 Radiated Restricted Upper Band Edge Measurement CDD Diversity

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 260 of 281

V 11.0 5/2025

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
MCS9
3 Meters
2447MHz
8

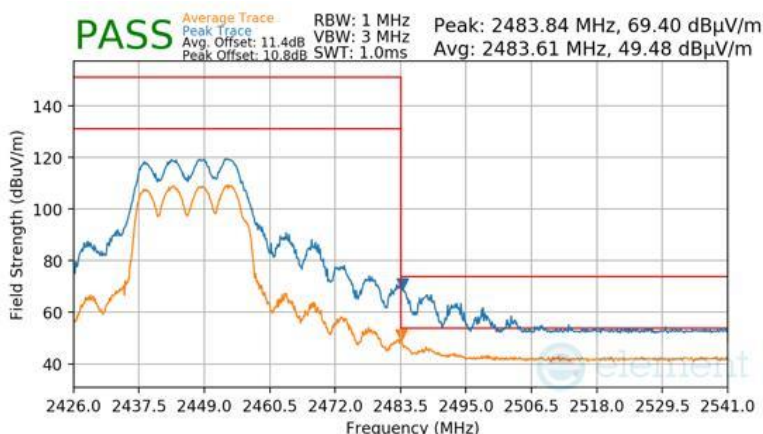

Plot 7-411 Radiated Restricted Upper Band Edge Measurement CDD Diversity

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
MCS9
3 Meters
2452MHz
9

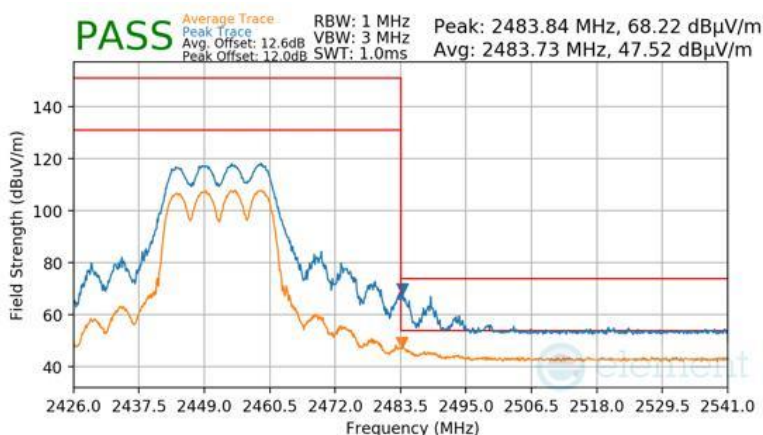


Plot 7-412 Radiated Restricted Upper Band Edge Measurement CDD Diversity

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 261 of 281

V 11.0 5/2025

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU
 MCS9
 3 Meters
 2457MHz
 10

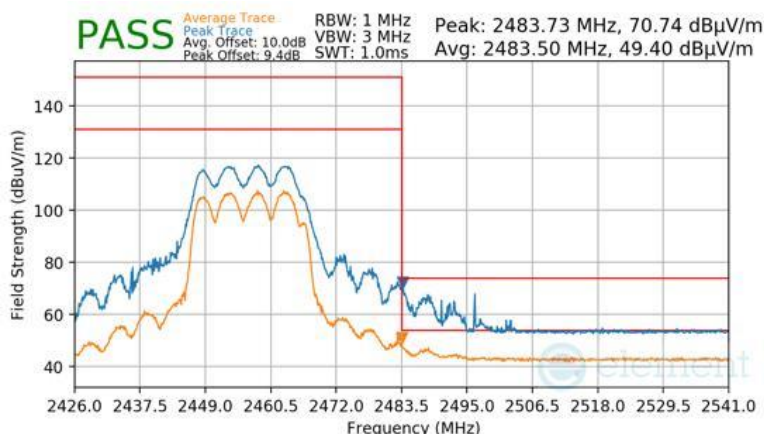

Plot 7-413 Radiated Restricted Upper Band Edge Measurement CDD Diversity

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel

802.11be-SU
 MCS9
 3 Meters
 2462MHz
 11

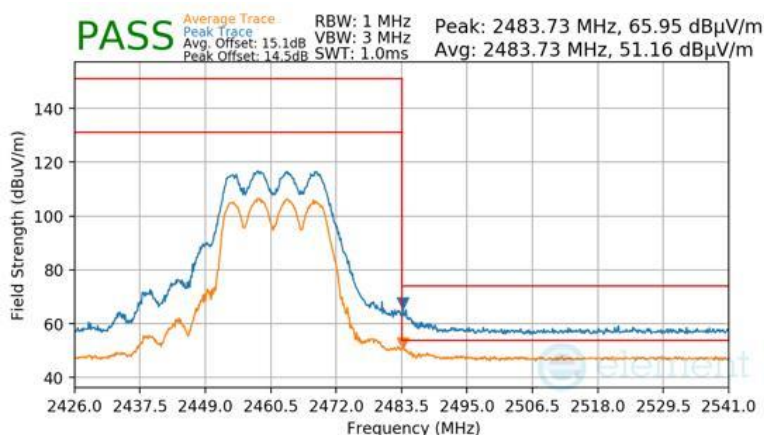

Plot 7-414 Radiated Restricted Upper Band Edge Measurement CDD Diversity

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 262 of 281

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU

MCS9

3 Meters

2467MHz

12

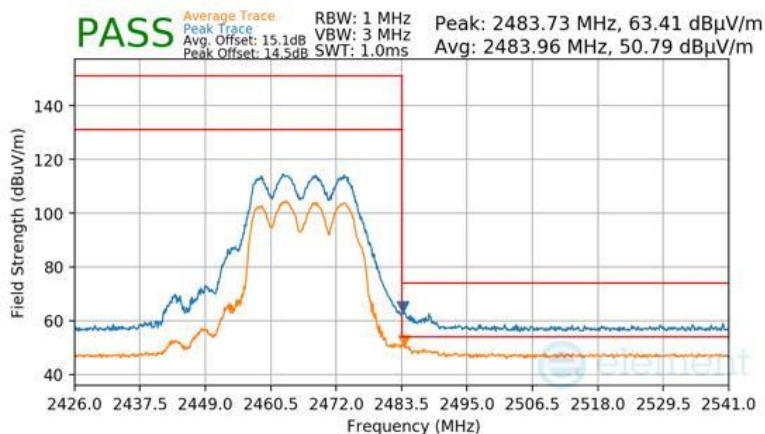

Plot 7-415 Radiated Restricted Upper Band Edge Measurement CDD Diversity

Mode
Data Rate
Distance of Measurement
Operating Frequency
Channel


802.11be-SU

MCS9

3 Meters

2472MHz

13

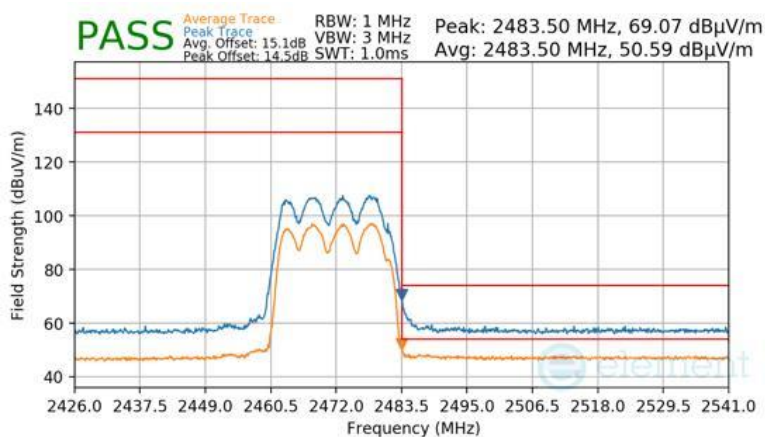

Plot 7-416 Radiated Restricted Upper Band Edge Measurement CDD Diversity

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 263 of 281

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-49 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-49. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 264 of 281

V 11.0 5/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

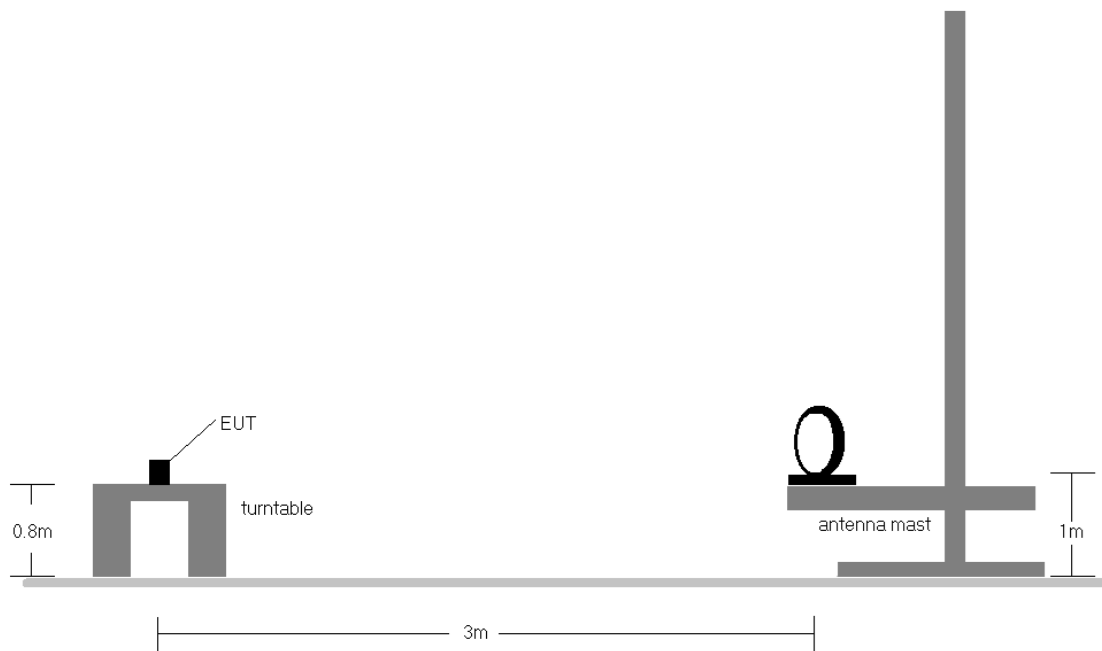


Figure 7-7. Radiated Test Setup < 30Mhz

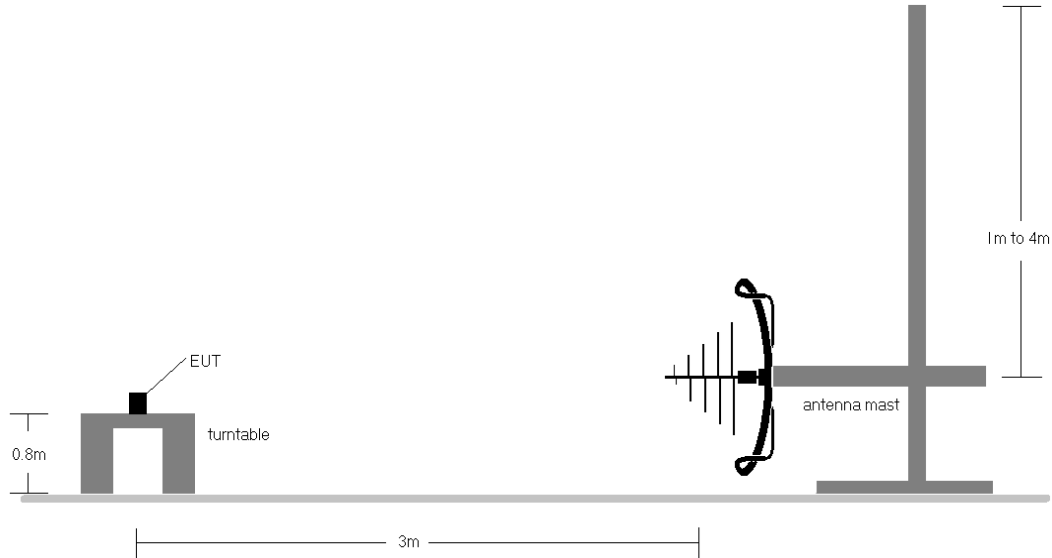


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 265 of 281

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-49.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
9. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification.
11. The unit was tested with all possible modes and only the highest emission is reported.
12. All antenna configurations were investigated and only the worst case is reported.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamplifier Gain} [\text{dB}]$
- $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 266 of 281

V 11.0 5/2025

CDD Primary Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

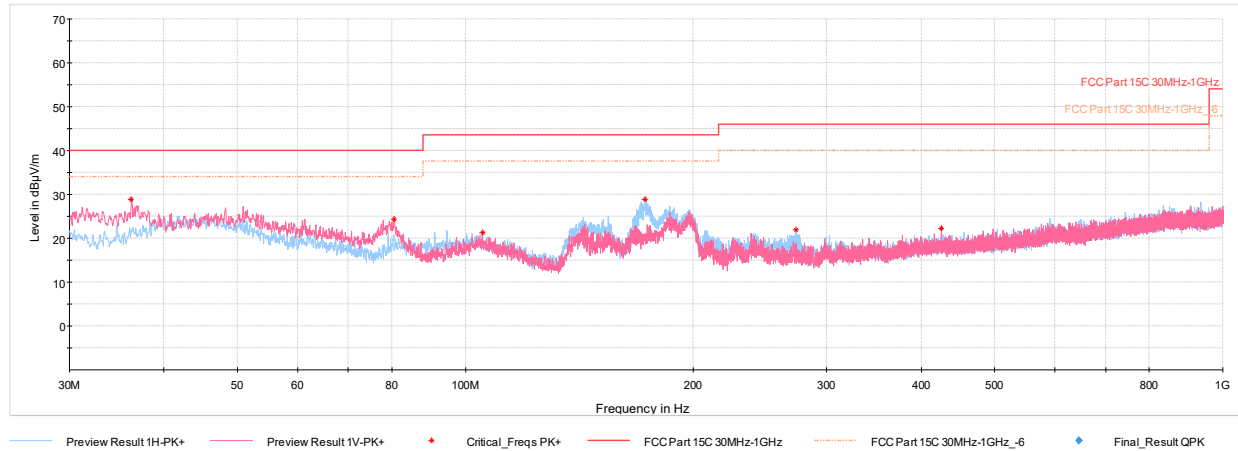

Plot 7-417. Radiated Spurious Emissions below 1GHz CDD Primary 11n Ch.6, with AC/DC Adaptor


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.21	Max Peak	V	100	357	-60.28	-17.80	28.92	40.00	-11.08
80.44	Max Peak	V	100	347	-59.77	-22.80	24.43	40.00	-15.57
105.32	Max Peak	V	100	195	-67.64	-18.10	21.26	43.52	-22.26
172.69	Max Peak	H	100	229	-57.98	-20.20	28.82	43.52	-14.70
273.32	Max Peak	H	100	162	-68.94	-16.20	21.86	46.02	-24.16
424.79	Max Peak	V	300	0	-72.46	-12.30	22.24	46.02	-23.78

Table 7-50. Radiated Spurious Emissions below 1GHz CDD Primary 11n Ch.6, with AC/DC Adaptor

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 267 of 281

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

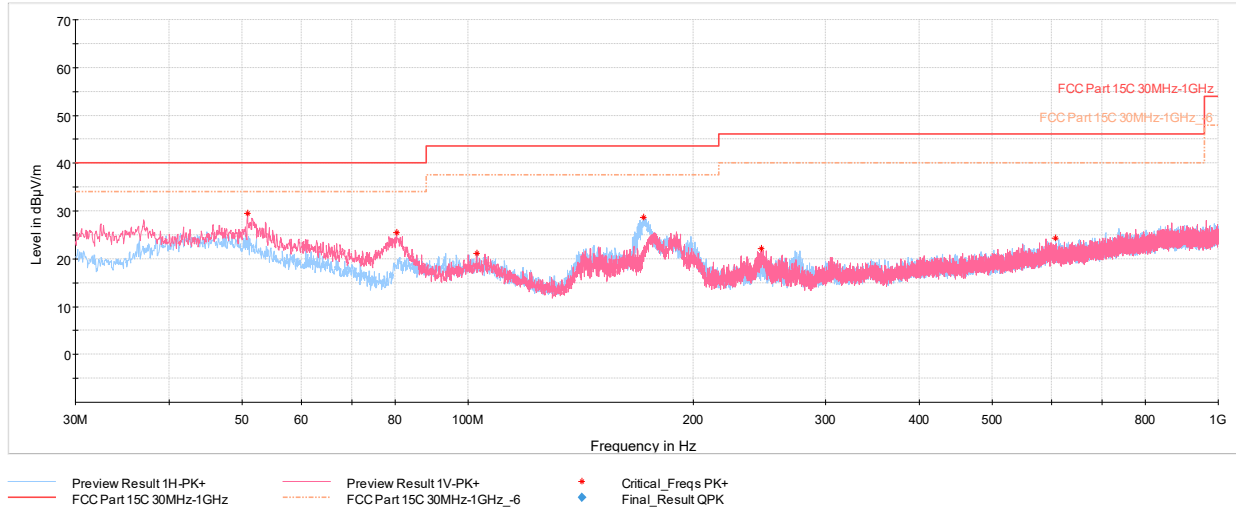

Plot 7-418. Radiated Spurious Emissions below 1GHz CDD Primary 11be - SU Ch.6, with AC/DC Adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
50.86	Max Peak	V	100	273	-62.12	-15.40	29.48	40.00	-10.52
80.34	Max Peak	V	100	237	-58.71	-22.79	25.50	40.00	-14.50
102.90	Max Peak	H	100	91	-67.91	-17.95	21.14	43.52	-22.38
171.52	Max Peak	H	100	212	-58.09	-20.27	28.64	43.52	-14.88
246.12	Max Peak	V	100	159	-68.42	-16.51	22.07	46.02	-23.95
607.10	Max Peak	H	100	195	-73.83	-8.79	24.38	46.02	-21.64


Table 7-51. Radiated Spurious Emissions below 1GHz CDD Primary 11be - SU Ch.6, with AC/DC Adaptor

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 268 of 281

V 11.0 5/2025

CDD Diversity Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

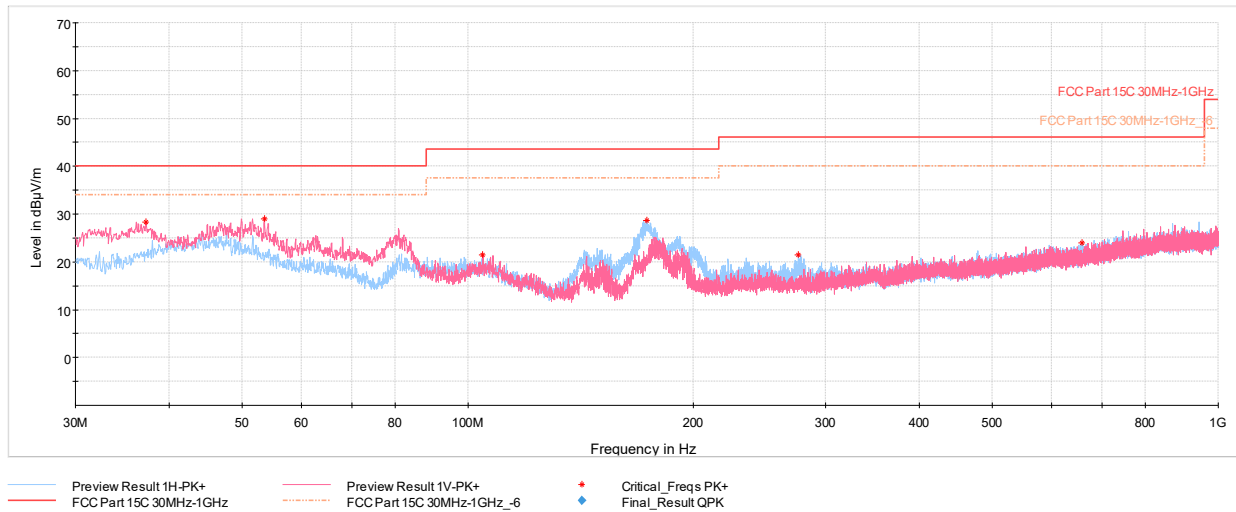


Plot 7-419. Radiated Spurious Emissions below 1GHz CDD Diversity 11n Ch.6, with AC/DC Adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
37.28	Max Peak	V	100	321	-61.24	-17.40	28.36	40.00	-11.64
53.57	Max Peak	V	100	44	-62.36	-15.68	28.96	40.00	-11.04
104.74	Max Peak	V	100	154	-67.49	-18.09	21.42	43.52	-22.10
173.27	Max Peak	H	100	208	-58.13	-20.13	28.74	43.52	-14.78
275.75	Max Peak	H	100	144	-69.48	-16.14	21.38	46.02	-24.64
658.03	Max Peak	H	300	153	-74.55	-8.44	24.01	46.02	-22.01

Table 7-52. Radiated Spurious Emissions below 1GHz CDD Diversity 11n Ch.6, with AC/DC Adaptor

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 269 of 281

V 11.0 5/2025

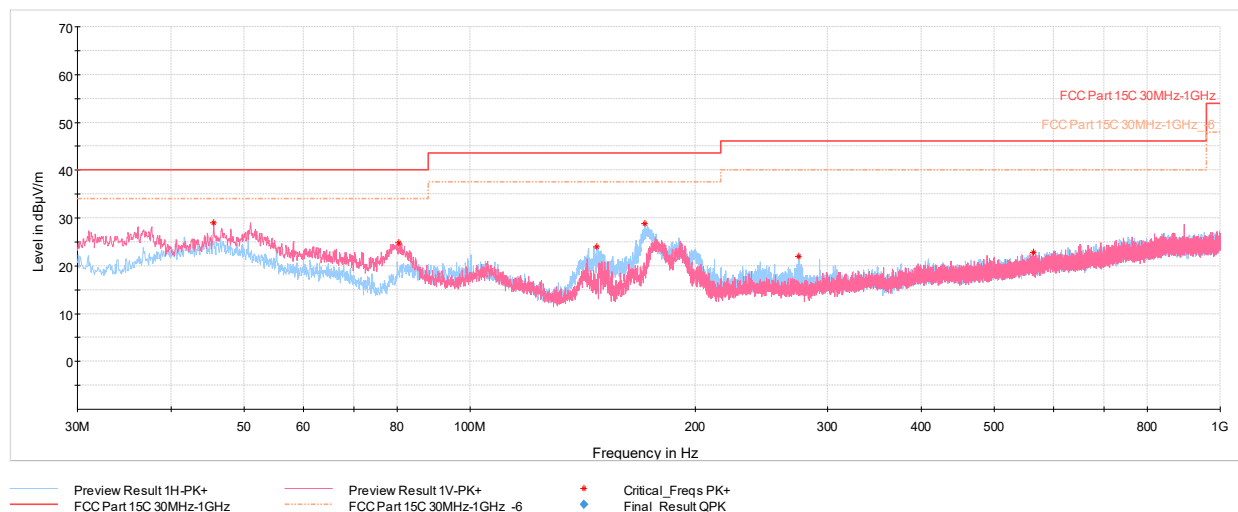

Plot 7-420. Radiated Spurious Emissions below 1GHz CDD Diversity 11be - SU Ch.6, with AC/DC Adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
45.57	Max Peak	V	100	355	-62.54	-15.43	29.03	40.00	-10.97
80.44	Max Peak	V	100	232	-59.46	-22.77	24.77	40.00	-15.23
147.61	Max Peak	H	100	209	-61.66	-21.40	23.94	43.52	-19.58
171.09	Max Peak	H	100	177	-57.89	-20.27	28.84	43.52	-14.68
274.34	Max Peak	H	100	155	-68.88	-16.18	21.94	46.02	-24.08
564.28	Max Peak	V	300	6	-74.42	-9.73	22.85	46.02	-23.17

Table 7-53. Radiated Spurious Emissions below 1GHz CDD Diversity 11be - SU Ch.6, with AC/DC Adaptor

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 270 of 281

V 11.0 5/2025

7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-54. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 271 of 281

V 11.0 5/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

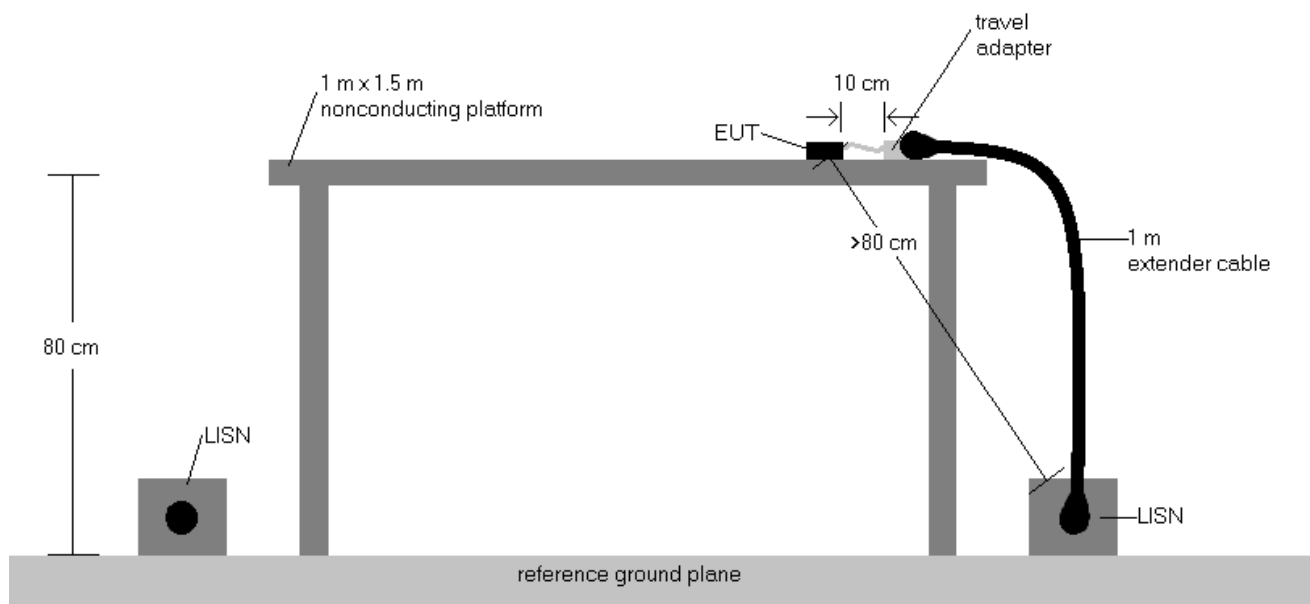



Figure 7-9. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plot are made using quasi peak and average detectors.
- Deviations to the Specifications: None.
- The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 272 of 281

V 11.0 5/2025

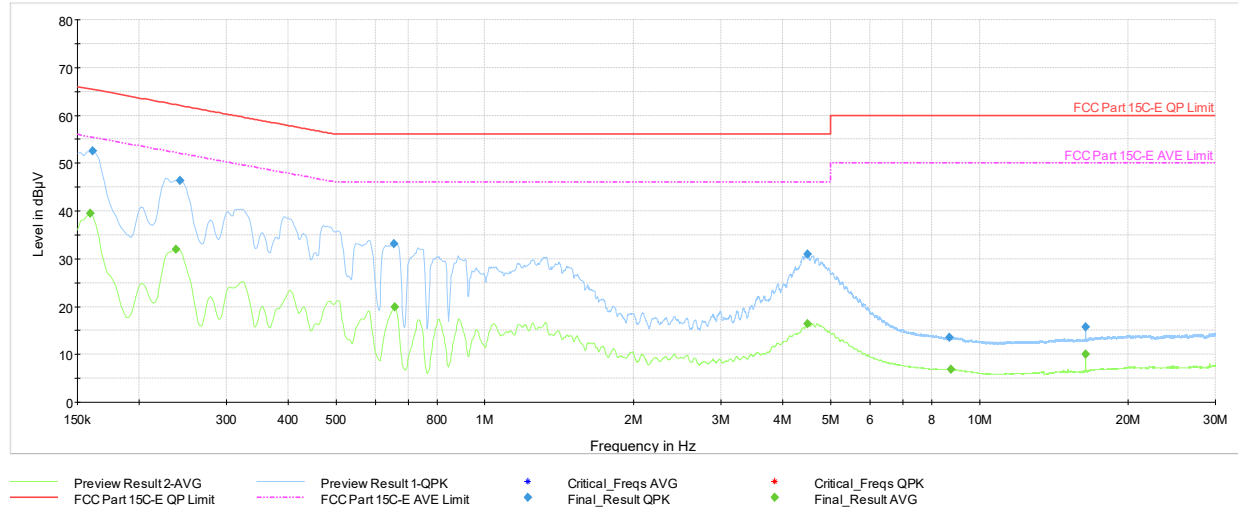


Plot 7-421. AC Line Conducted Plot with CDD Primary 11n Ch.6 (L1, with AC/DC Adaptor)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	---	39.44	55.52	-16.08	L1	GND
0.161	FINAL	52.63	---	65.40	-12.77	L1	GND
0.238	FINAL	---	31.99	52.17	-20.18	L1	GND
0.242	FINAL	46.40	---	62.02	-15.62	L1	GND
0.654	FINAL	33.12	---	56.00	-22.88	L1	GND
0.659	FINAL	---	19.91	46.00	-26.09	L1	GND
4.484	FINAL	---	16.40	46.00	-29.60	L1	GND
4.490	FINAL	31.04	---	56.00	-24.96	L1	GND
8.693	FINAL	13.52	---	60.00	-46.48	L1	GND
8.754	FINAL	---	6.83	50.00	-43.17	L1	GND
16.413	FINAL	---	10.10	50.00	-39.90	L1	GND
16.413	FINAL	15.76	---	60.00	-44.24	L1	GND

Table 7-55. AC Line Conducted Data with CDD Primary 11n Ch.6 (L1, with AC/DC Adaptor)

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 273 of 281

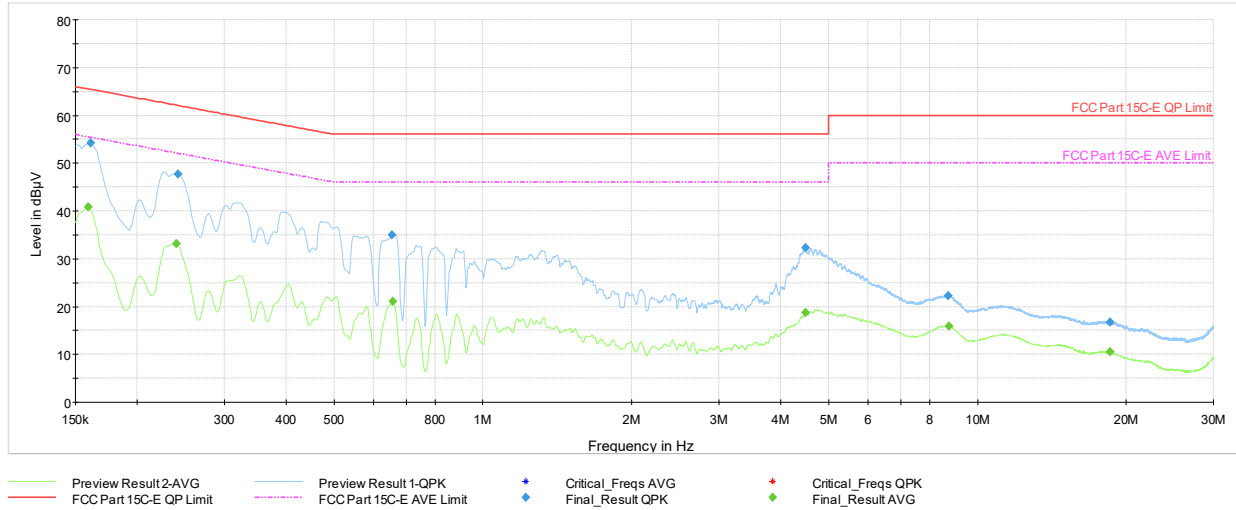


Plot 7-422. AC Line Conducted Plot with CDD Primary 11n Ch.6 (N, with AC/DC Adaptor)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	---	40.86	55.52	-14.66	N	GND
0.161	FINAL	54.17	---	65.40	-11.23	N	GND
0.240	FINAL	---	33.21	52.10	-18.89	N	GND
0.242	FINAL	47.69	---	62.02	-14.33	N	GND
0.654	FINAL	34.93	---	56.00	-21.07	N	GND
0.659	FINAL	---	21.03	46.00	-24.97	N	GND
4.486	FINAL	32.38	---	56.00	-23.62	N	GND
4.488	FINAL	---	18.80	46.00	-27.20	N	GND
8.716	FINAL	22.21	---	60.00	-37.79	N	GND
8.754	FINAL	---	15.95	50.00	-34.05	N	GND
18.544	FINAL	---	10.49	50.00	-39.51	N	GND
18.548	FINAL	16.78	---	60.00	-43.22	N	GND

Table 7-56. AC Line Conducted Data with CDD Primary 11n Ch.6 (N, with AC/DC Adaptor)

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 274 of 281

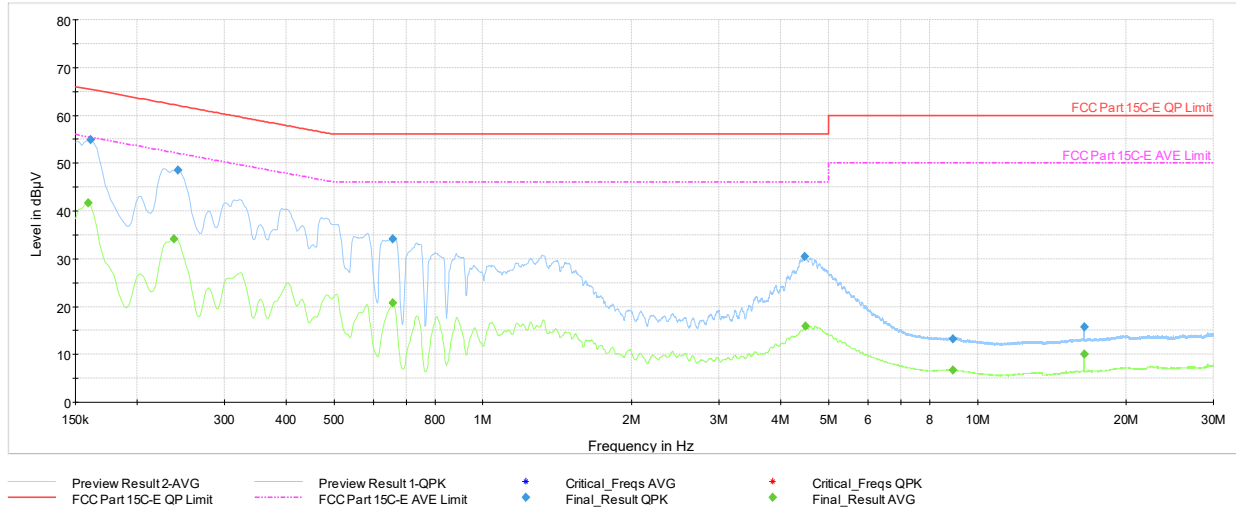

Plot 7-423. AC Line Conducted Plot with CDD Primary 11be - SU Ch.6 (L1, with AC/DC Adaptor)


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	---	41.70	55.52	-13.82	L1	GND
0.161	FINAL	54.91	---	65.40	-10.49	L1	GND
0.238	FINAL	---	34.08	52.17	-18.09	L1	GND
0.242	FINAL	48.55	---	62.02	-13.47	L1	GND
0.659	FINAL	---	20.67	46.00	-25.33	L1	GND
0.659	FINAL	34.12	---	56.00	-21.88	L1	GND
4.479	FINAL	30.47	---	56.00	-25.53	L1	GND
4.486	FINAL	---	15.87	46.00	-30.13	L1	GND
8.907	FINAL	13.30	---	60.00	-46.70	L1	GND
8.916	FINAL	---	6.72	50.00	-43.28	L1	GND
16.422	FINAL	---	10.04	50.00	-39.96	L1	GND
16.422	FINAL	15.76	---	60.00	-44.24	L1	GND

Table 7-57. AC Line Conducted Data with CDD Primary 11be - SU Ch.6 (L1, with AC/DC Adaptor)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 275 of 281

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

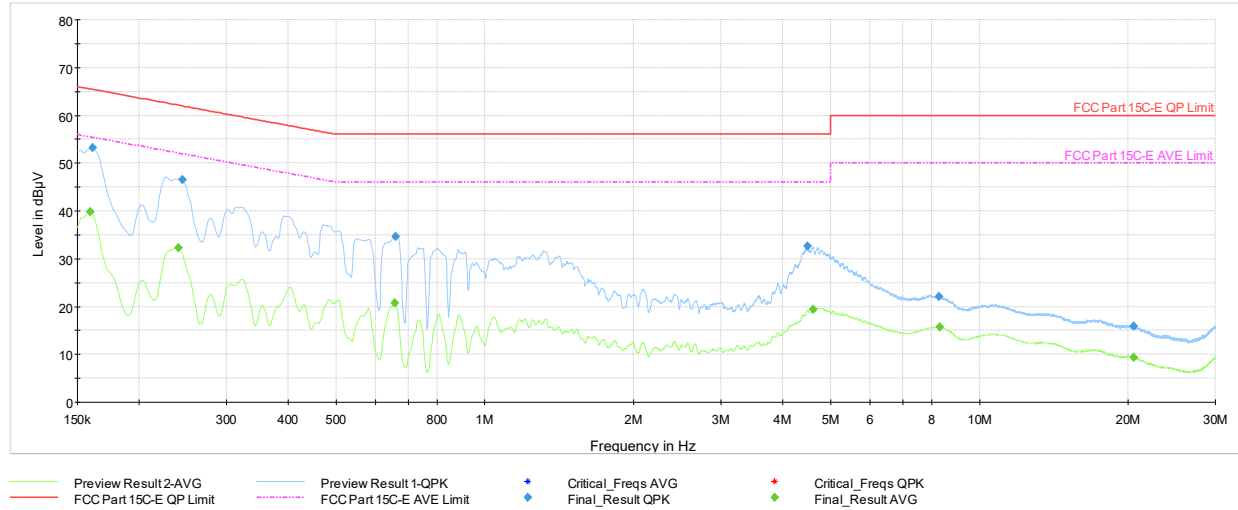

Plot 7-424. AC Line Conducted Plot with CDD Primary 11be - SU Ch.6 (N, with AC/DC Adaptor)


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	---	39.86	55.52	-15.66	N	GND
0.161	FINAL	53.15	---	65.40	-12.25	N	GND
0.240	FINAL	---	32.29	52.10	-19.81	N	GND
0.245	FINAL	46.59	---	61.94	-15.35	N	GND
0.656	FINAL	---	20.74	46.00	-25.26	N	GND
0.661	FINAL	34.60	---	56.00	-21.40	N	GND
4.486	FINAL	32.58	---	56.00	-23.42	N	GND
4.607	FINAL	---	19.35	46.00	-26.65	N	GND
8.270	FINAL	22.16	---	60.00	-37.84	N	GND
8.313	FINAL	---	15.72	50.00	-34.28	N	GND
20.479	FINAL	---	9.40	50.00	-40.60	N	GND
20.542	FINAL	15.87	---	60.00	-44.13	N	GND

Table 7-58. AC Line Conducted Data with CDD Primary 11be - SU Ch.6 (N, with AC/DC Adaptor)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 276 of 281

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

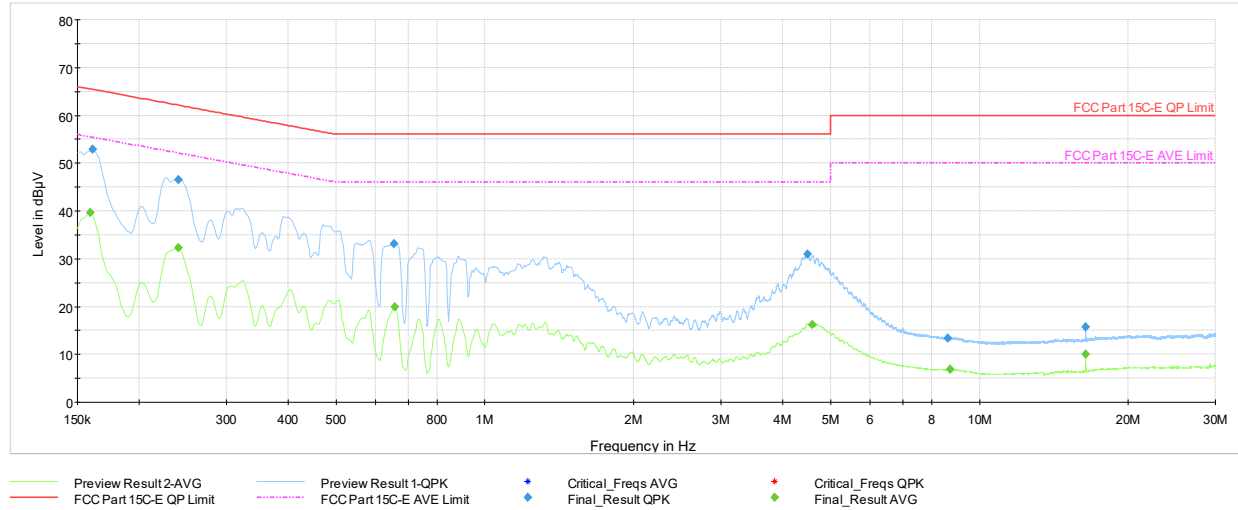

Plot 7-425. AC Line Conducted Plot with CDD Diversity 11n Ch.6 (L1, with AC/DC Adaptor)


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	---	39.62	55.52	-15.90	L1	GND
0.161	FINAL	52.81	---	65.40	-12.59	L1	GND
0.240	FINAL	---	32.25	52.10	-19.85	L1	GND
0.240	FINAL	46.49	---	62.10	-15.61	L1	GND
0.654	FINAL	33.08	---	56.00	-22.92	L1	GND
0.656	FINAL	---	19.95	46.00	-26.05	L1	GND
4.486	FINAL	31.03	---	56.00	-24.97	L1	GND
4.585	FINAL	---	16.22	46.00	-29.78	L1	GND
8.626	FINAL	13.46	---	60.00	-46.54	L1	GND
8.716	FINAL	---	6.80	50.00	-43.20	L1	GND
16.415	FINAL	---	10.09	50.00	-39.91	L1	GND
16.415	FINAL	15.69	---	60.00	-44.31	L1	GND

Table 7-59. AC Line Conducted Data with CDD Diversity 11n Ch.6 (L1, with AC/DC Adaptor)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 277 of 281

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

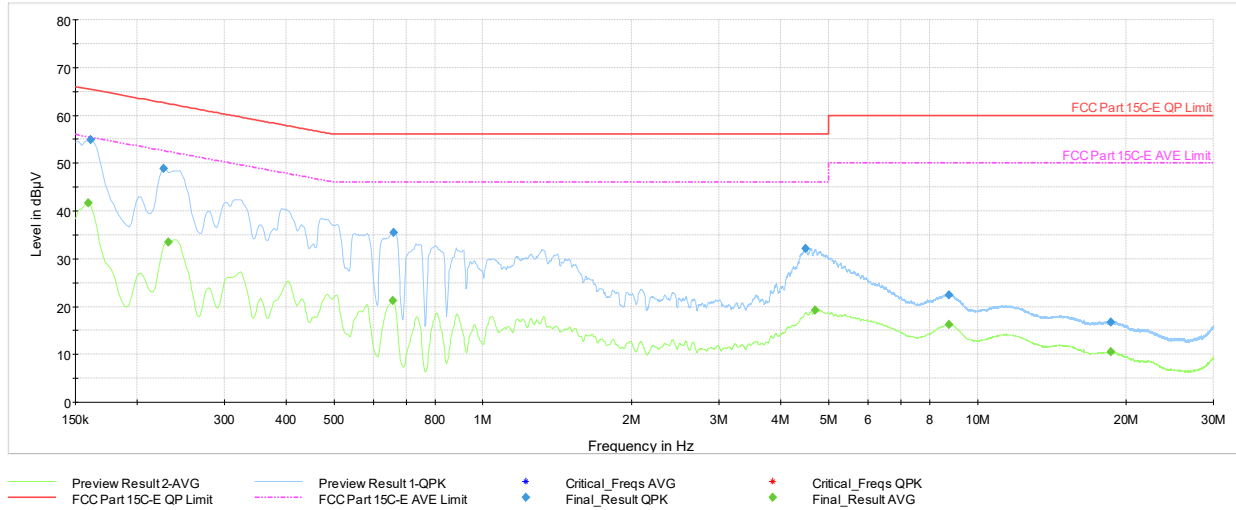


Plot 7-426. AC Line Conducted Plot with CDD Diversity 11n Ch.6 (N, with AC/DC Adaptor)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	---	41.67	55.52	-13.85	N	GND
0.161	FINAL	54.97	---	65.40	-10.43	N	GND
0.227	FINAL	48.92	---	62.58	-13.66	N	GND
0.231	FINAL	---	33.44	52.41	-18.97	N	GND
0.659	FINAL	---	21.27	46.00	-24.73	N	GND
0.661	FINAL	35.40	---	56.00	-20.60	N	GND
4.486	FINAL	32.15	---	56.00	-23.85	N	GND
4.691	FINAL	---	19.18	46.00	-26.82	N	GND
8.754	FINAL	---	16.28	50.00	-33.72	N	GND
8.759	FINAL	22.51	---	60.00	-37.49	N	GND
18.625	FINAL	---	10.48	50.00	-39.52	N	GND
18.643	FINAL	16.78	---	60.00	-43.22	N	GND

Table 7-60. AC Line Conducted Data with CDD Diversity 11n Ch.6 (N, with AC/DC Adaptor)

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 278 of 281

V 11.0 5/2025

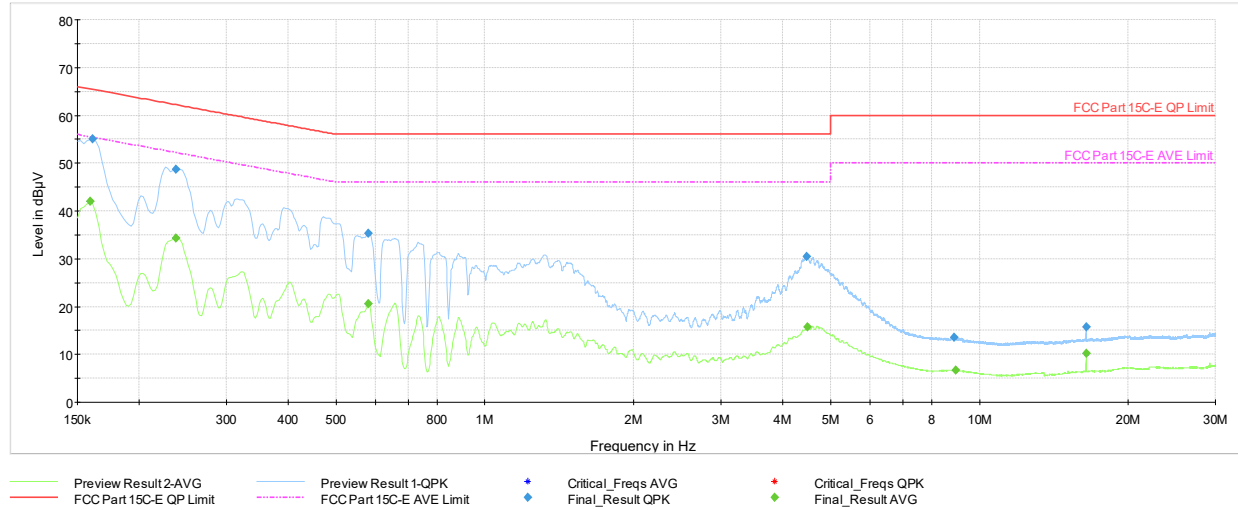

Plot 7-427. AC Line Conducted Plot with CDD Diversity 11be - SU Ch.6 (L1, with AC/DC Adaptor)


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	---	41.96	55.52	-13.56	L1	GND
0.161	FINAL	55.09	---	65.40	-10.31	L1	GND
0.238	FINAL	---	34.31	52.17	-17.86	L1	GND
0.238	FINAL	48.63	---	62.17	-13.54	L1	GND
0.582	FINAL	---	20.52	46.00	-25.48	L1	GND
0.582	FINAL	35.34	---	56.00	-20.66	L1	GND
4.477	FINAL	30.51	---	56.00	-25.49	L1	GND
4.486	FINAL	---	15.80	46.00	-30.20	L1	GND
8.876	FINAL	13.52	---	60.00	-46.48	L1	GND
8.945	FINAL	---	6.65	50.00	-43.35	L1	GND
16.424	FINAL	---	10.15	50.00	-39.85	L1	GND
16.424	FINAL	15.75	---	60.00	-44.25	L1	GND

Table 7-61. AC Line Conducted Data with CDD Diversity 11be - SU Ch.6 (L1, with AC/DC Adaptor)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 279 of 281

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

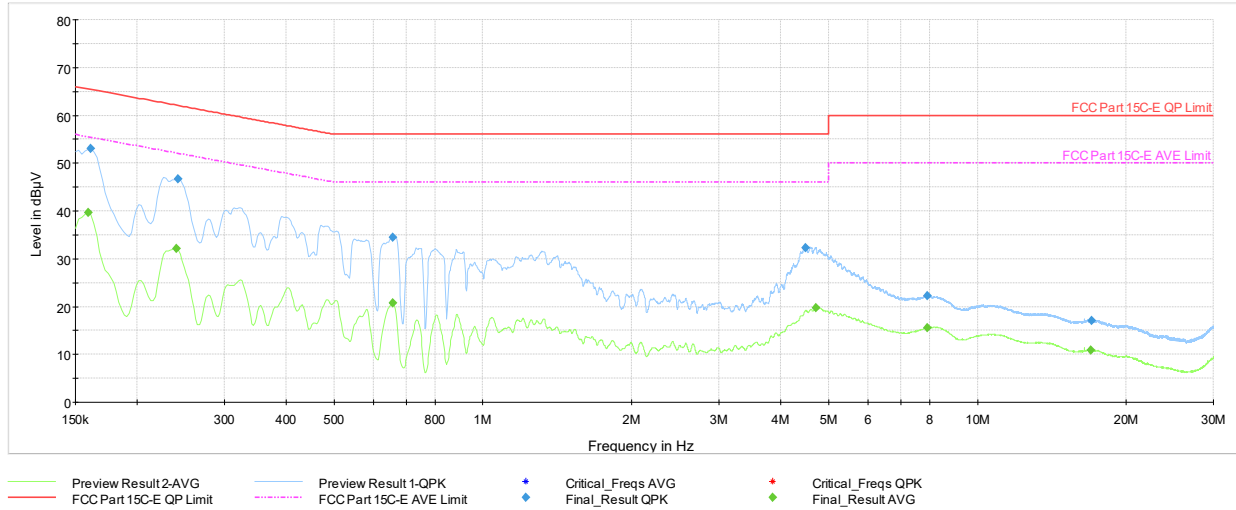

Plot 7-428. AC Line Conducted Plot with CDD Diversity 11be - SU Ch.6 (N, with AC/DC Adaptor)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.159	FINAL	---	39.71	55.52	-15.81	N	GND
0.161	FINAL	53.04	---	65.40	-12.36	N	GND
0.240	FINAL	---	32.15	52.10	-19.95	N	GND
0.242	FINAL	46.63	---	62.02	-15.39	N	GND
0.656	FINAL	---	20.69	46.00	-25.31	N	GND
0.656	FINAL	34.56	---	56.00	-21.44	N	GND
4.486	FINAL	32.36	---	56.00	-23.64	N	GND
4.718	FINAL	---	19.73	46.00	-26.27	N	GND
7.917	FINAL	22.33	---	60.00	-37.67	N	GND
7.926	FINAL	---	15.55	50.00	-34.45	N	GND
16.937	FINAL	---	10.88	50.00	-39.12	N	GND
16.989	FINAL	17.13	---	60.00	-42.87	N	GND

Table 7-62. AC Line Conducted Data with CDD Diversity 11be - SU Ch.6 (N, with AC/DC Adaptor)

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 280 of 281

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3360, IC: 579C-A3360** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-05-R1.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 281 of 281

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.