


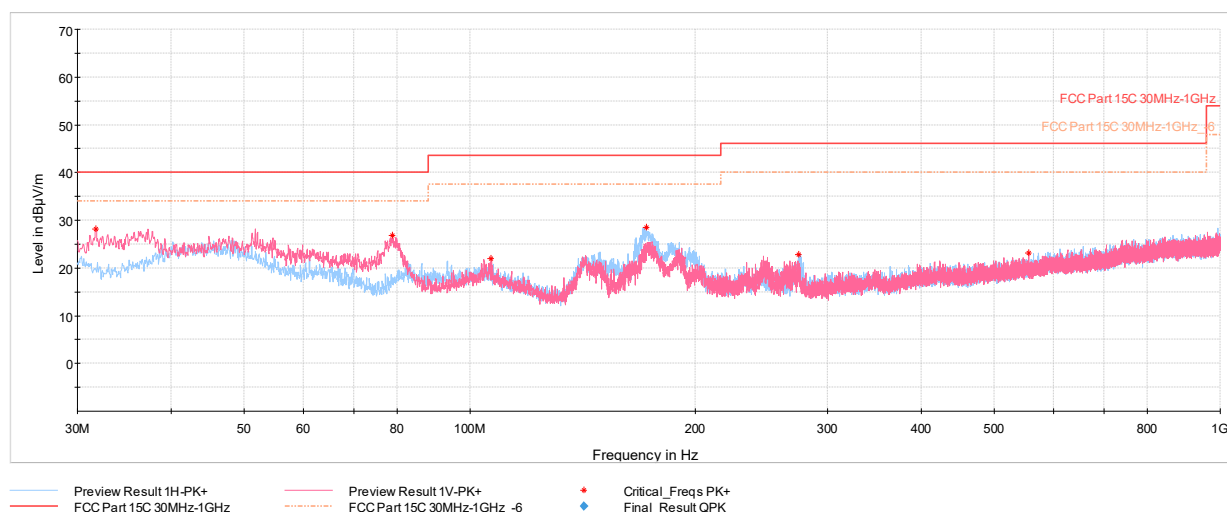


Plot 7-358. Radiated Spurious Emissions below 1GHz CDD Primary Ch.6 (RU242), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
31.75	Max Peak	V	100	287	-59.30	-19.46	28.24	40.00	-11.76
78.89	Max Peak	V	100	287	-57.19	-22.93	26.88	40.00	-13.12
106.82	Max Peak	V	100	194	-66.78	-18.20	22.02	43.52	-21.50
172.01	Max Peak	H	100	210	-58.30	-20.26	28.44	43.52	-15.08
274.05	Max Peak	H	100	146	-67.94	-16.19	22.87	46.02	-23.15
555.69	Max Peak	V	300	259	-73.74	-10.09	23.17	46.02	-22.85

Table 7-69. Radiated Spurious Emissions below 1GHz CDD Primary Ch.6 (RU242), with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 232 of 245

7.8.2 CDD Diversity Radiated Spurious Emissions Measurements (Below 1GHz)

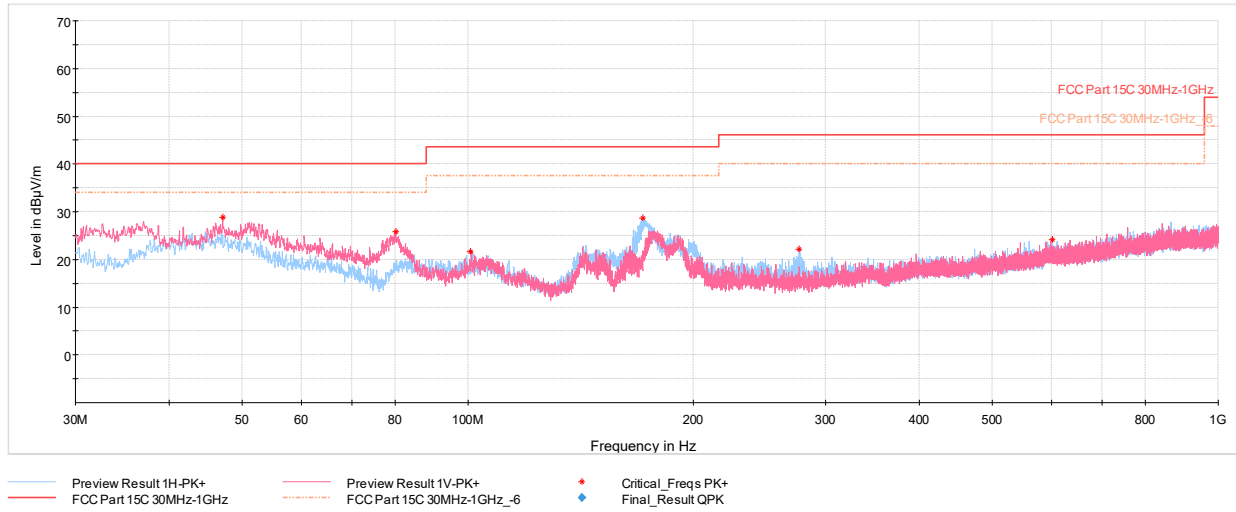


Plot 7-359. Radiated Spurious Emissions below 1GHz CDD Diversity Ch.6 (RU26), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
47.12	Max Peak	V	100	211	-62.83	-15.40	28.77	40.00	-11.23
80.15	Max Peak	V	100	269	-58.39	-22.83	25.78	40.00	-14.22
100.81	Max Peak	H	100	143	-67.37	-17.93	21.70	43.52	-21.82
171.09	Max Peak	H	100	202	-58.07	-20.27	28.66	43.52	-14.86
276.28	Max Peak	H	100	143	-68.74	-16.13	22.13	46.02	-23.89
601.23	Max Peak	H	100	179	-74.11	-8.69	24.20	46.02	-21.82

Table 7-70. Radiated Spurious Emissions below 1GHz CDD Diversity Ch.6 (RU26), with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 233 of 245

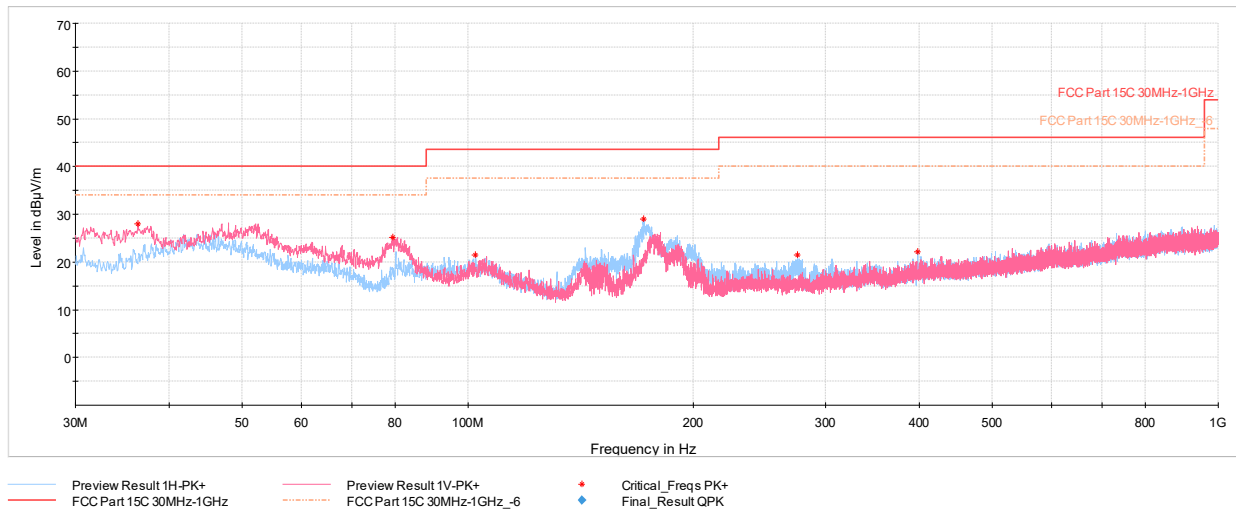

Plot 7-360. Radiated Spurious Emissions below 1GHz CDD Diversity Ch.6 (RU242), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.31	Max Peak	V	100	353	-61.26	-17.74	28.00	40.00	-12.00
79.47	Max Peak	V	100	317	-58.95	-22.91	25.14	40.00	-14.86
102.41	Max Peak	H	300	286	-67.64	-17.93	21.43	43.52	-22.09
171.33	Max Peak	H	100	207	-57.67	-20.27	29.06	43.52	-14.46
274.93	Max Peak	H	100	165	-69.39	-16.14	21.47	46.02	-24.55
397.68	Max Peak	H	300	0	-72.14	-12.71	22.15	46.02	-23.87

Table 7-71. Radiated Spurious Emissions below 1GHz CDD Diversity Ch.6 (RU242), with AC/DC Adapter

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 234 of 245

7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-72. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3360 IC: 579C-A3360	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 235 of 245

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

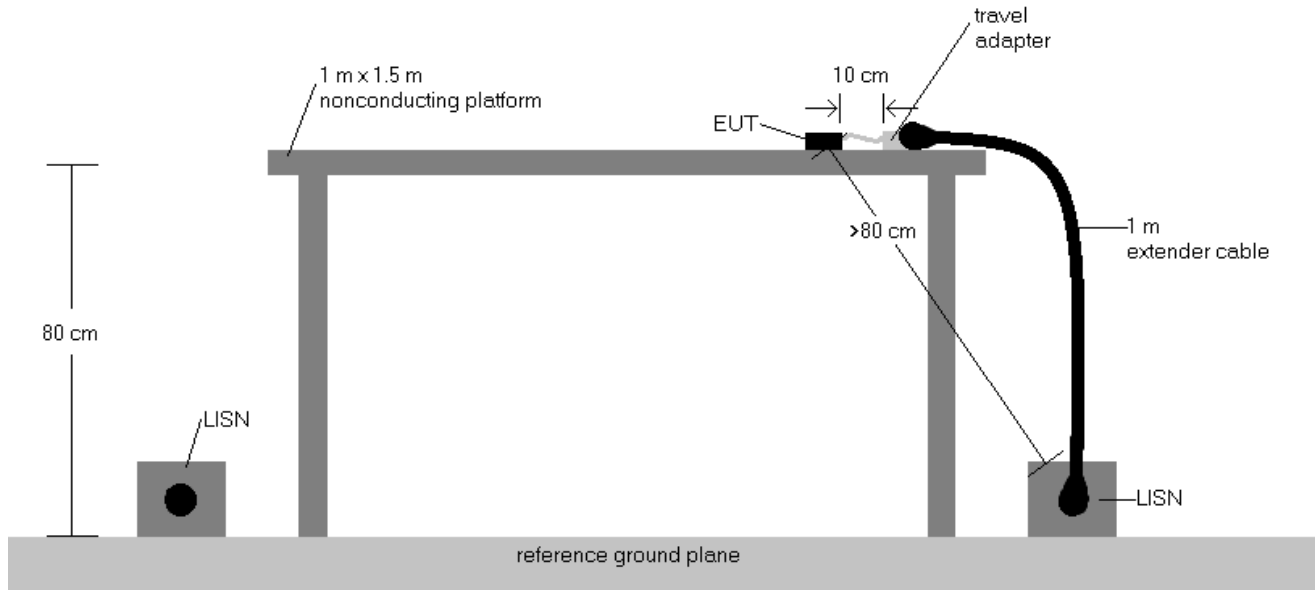



Figure 7-9. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plot are made using quasi peak and average detectors.
- Deviations to the Specifications: None.
- All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 236 of 245

7.9.1 CDD Primary AC Line-Conducted Emissions Measurement

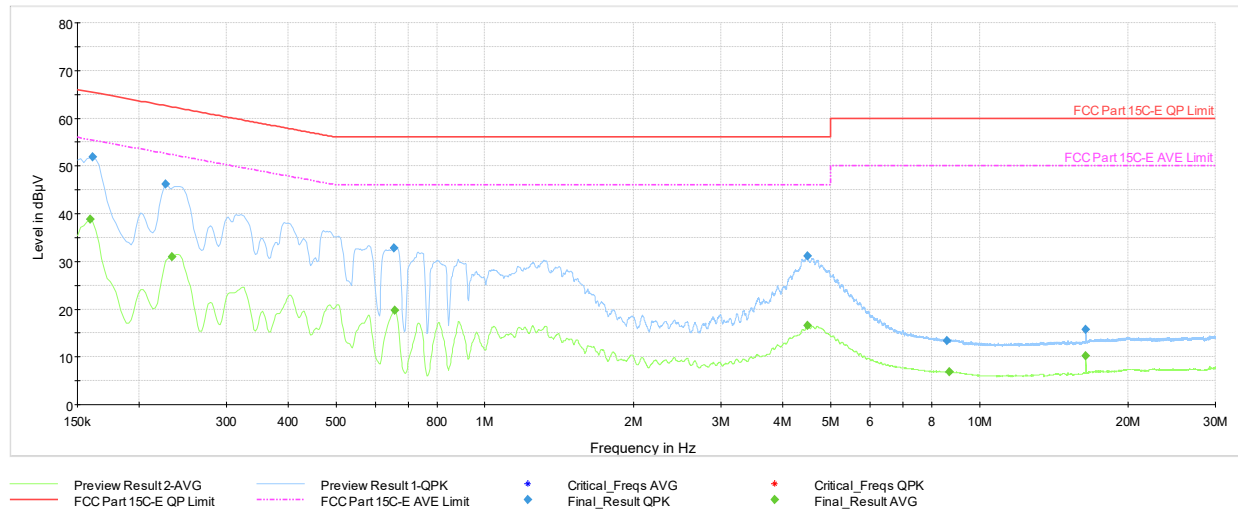


Plot 7-361. AC Line Conducted Emissions with 802.11be CDD Primary (RU26) Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	—	38.75	55.52	-16.77	L1	GND
0.161	FINAL	51.9	—	65.40	-13.47	L1	GND
0.227	FINAL	46.2	—	62.58	-16.39	L1	GND
0.233	FINAL	—	30.95	52.33	-21.38	L1	GND
0.654	FINAL	32.8	—	56.00	-23.22	L1	GND
0.656	FINAL	—	19.74	46.00	-26.26	L1	GND
4.486	FINAL	31.2	—	56.00	-24.79	L1	GND
4.486	FINAL	—	16.53	46.00	-29.47	L1	GND
8.606	FINAL	13.4	—	60.00	-46.57	L1	GND
8.680	FINAL	—	6.79	50.00	-43.21	L1	GND
16.418	FINAL	—	10.19	50.00	-39.81	L1	GND
16.418	FINAL	15.8	—	60.00	-44.24	L1	GND

Table 7-73. AC Line Conducted Data with 802.11be CDD Primary (RU26) Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 237 of 245

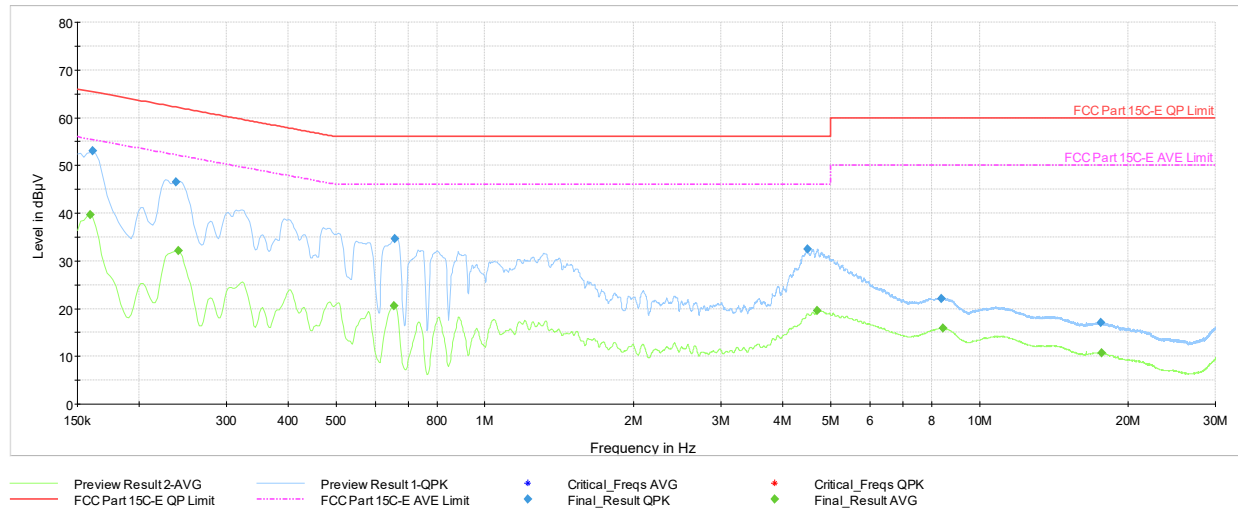


Plot 7-362. AC Line Conducted Emissions with 802.11be CDD Primary (RU26) Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.159	FINAL	—	39.68	55.52	-15.84	N	GND
0.161	FINAL	53.0	—	65.40	-12.39	N	GND
0.238	FINAL	46.5	—	62.17	-15.71	N	GND
0.240	FINAL	—	32.15	52.10	-19.94	N	GND
0.654	FINAL	—	20.52	46.00	-25.48	N	GND
0.659	FINAL	34.6	—	56.00	-21.38	N	GND
4.486	FINAL	32.4	—	56.00	-23.59	N	GND
4.702	FINAL	—	19.56	46.00	-26.44	N	GND
8.390	FINAL	22.1	—	60.00	-37.86	N	GND
8.421	FINAL	—	15.86	50.00	-34.14	N	GND
17.626	FINAL	17.0	—	60.00	-43.01	N	GND
17.684	FINAL	—	10.70	50.00	-39.30	N	GND

Table 7-74. AC Line Conducted Data with 802.11be CDD Primary (RU26) Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 238 of 245

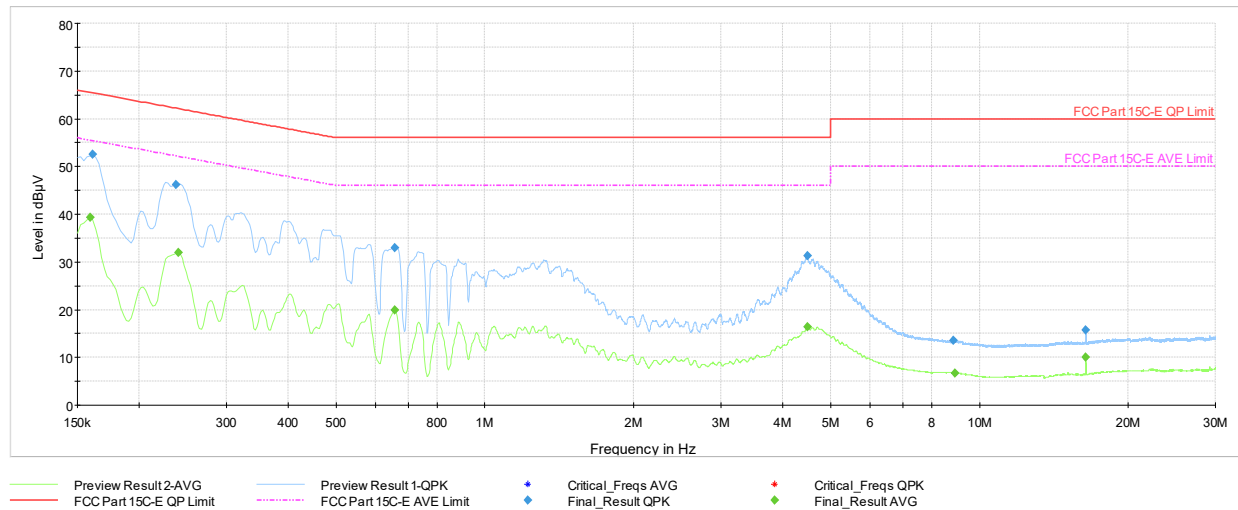


Plot 7-363. AC Line Conducted Emissions with 802.11be CDD Primary (RU242) Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	—	39.28	55.52	-16.23	L1	GND
0.161	FINAL	52.5	—	65.40	-12.90	L1	GND
0.238	FINAL	46.2	—	62.17	-15.95	L1	GND
0.240	FINAL	—	31.99	52.10	-20.11	L1	GND
0.656	FINAL	—	19.85	46.00	-26.15	L1	GND
0.656	FINAL	33.0	—	56.00	-23.03	L1	GND
4.486	FINAL	31.2	—	56.00	-24.78	L1	GND
4.486	FINAL	—	16.36	46.00	-29.64	L1	GND
8.842	FINAL	13.6	—	60.00	-46.38	L1	GND
8.914	FINAL	—	6.76	50.00	-43.24	L1	GND
16.418	FINAL	—	10.11	50.00	-39.90	L1	GND
16.418	FINAL	15.7	—	60.00	-44.28	L1	GND

Table 7-75. AC Line Conducted Data with 802.11be CDD Primary (RU242) Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 239 of 245

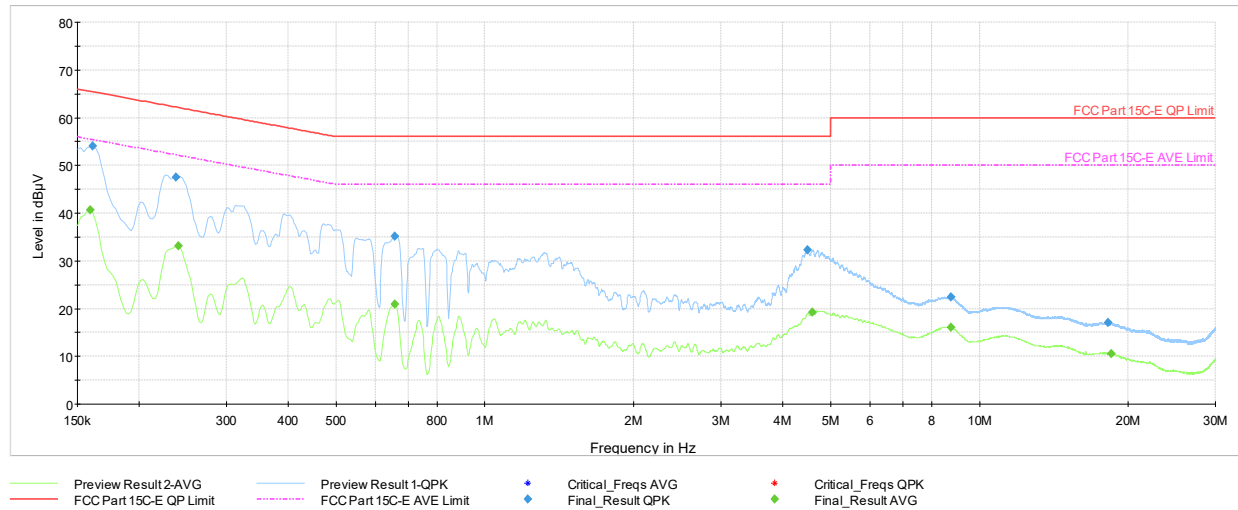


Plot 7-364. AC Line Conducted Emissions with 802.11be CDD Primary (RU242) Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.159	FINAL	—	40.66	55.52	-14.85	N	GND
0.161	FINAL	54.1	—	65.40	-11.28	N	GND
0.238	FINAL	47.5	—	62.17	-14.66	N	GND
0.240	FINAL	—	33.09	52.10	-19.00	N	GND
0.659	FINAL	—	20.88	46.00	-25.12	N	GND
0.659	FINAL	35.1	—	56.00	-20.89	N	GND
4.488	FINAL	32.3	—	56.00	-23.68	N	GND
4.594	FINAL	—	19.17	46.00	-26.83	N	GND
8.754	FINAL	—	16.04	50.00	-33.96	N	GND
8.759	FINAL	22.4	—	60.00	-37.62	N	GND
18.195	FINAL	17.0	—	60.00	-43.01	N	GND
18.465	FINAL	—	10.52	50.00	-39.48	N	GND

Table 7-76. AC Line Conducted Data with 802.11be CDD Primary (RU242) Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 240 of 245

7.9.2 CDD Diversity AC Line-Conducted Emissions Measurement

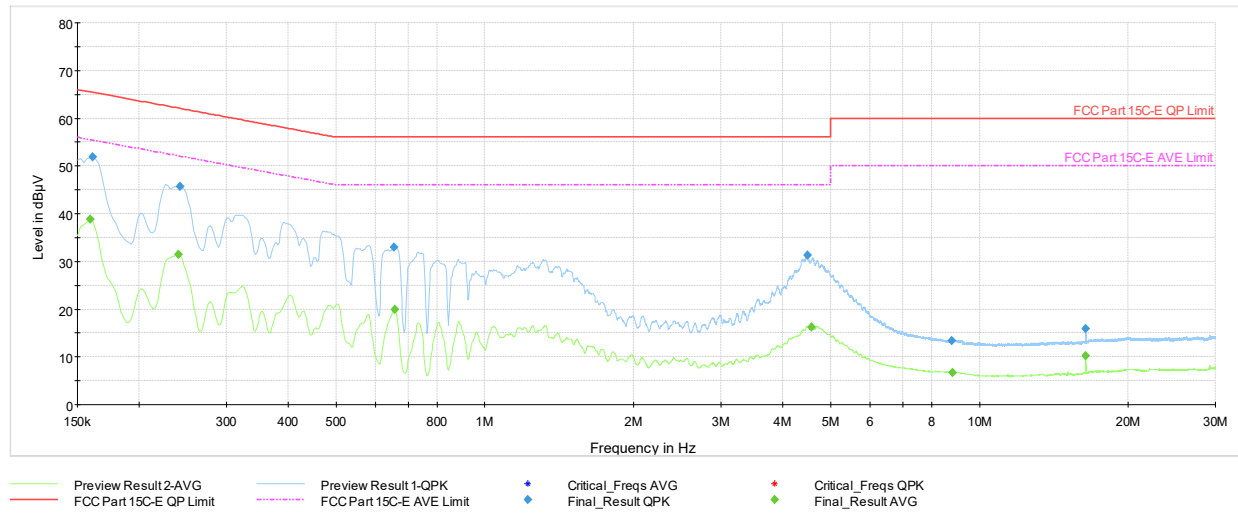

Plot 7-365. AC Line Conducted Emissions with 802.11be CDD Diversity (RU26) Ch.6 (L1, with AC/DC Adapter)


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	—	38.79	55.52	-16.73	L1	GND
0.161	FINAL	51.8	—	65.40	-13.57	L1	GND
0.240	FINAL	—	31.51	52.10	-20.59	L1	GND
0.242	FINAL	45.7	—	62.02	-16.35	L1	GND
0.654	FINAL	32.9	—	56.00	-23.06	L1	GND
0.656	FINAL	—	19.92	46.00	-26.08	L1	GND
4.486	FINAL	31.2	—	56.00	-24.77	L1	GND
4.580	FINAL	—	16.21	46.00	-29.79	L1	GND
8.799	FINAL	13.5	—	60.00	-46.55	L1	GND
8.808	FINAL	—	6.70	50.00	-43.30	L1	GND
16.418	FINAL	—	10.20	50.00	-39.80	L1	GND
16.418	FINAL	15.9	—	60.00	-44.11	L1	GND

Table 7-77. AC Line Conducted Data with 802.11be CDD Diversity (RU26) Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 241 of 245

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

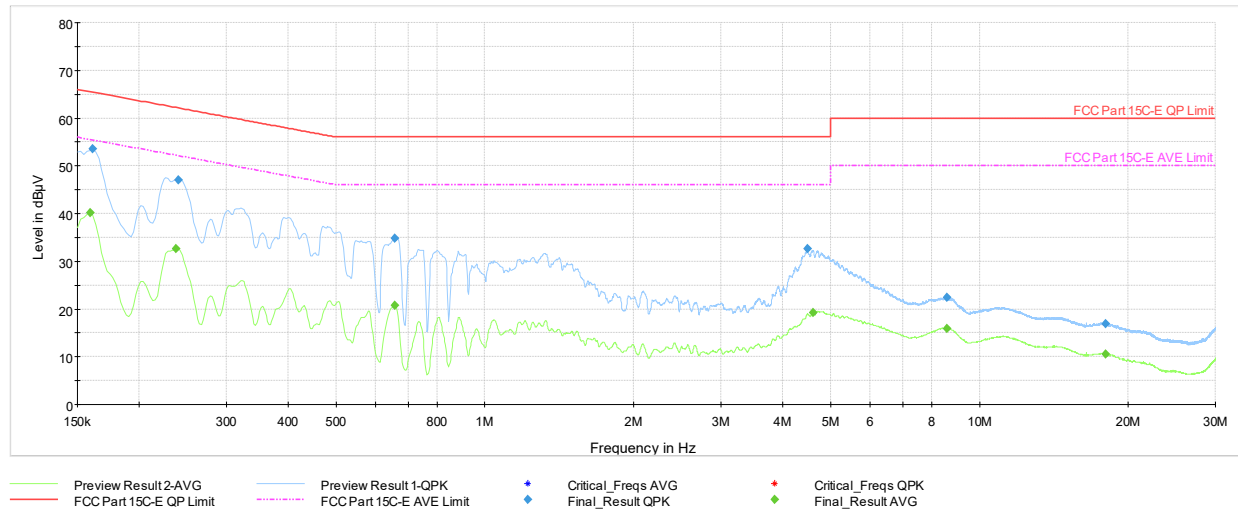


Plot 7-366. AC Line Conducted Emissions with 802.11be CDD Diversity (RU26) Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.159	FINAL	—	40.20	55.52	-15.31	N	GND
0.161	FINAL	53.5	—	65.40	-11.86	N	GND
0.238	FINAL	—	32.57	52.17	-19.61	N	GND
0.240	FINAL	47.1	—	62.10	-15.02	N	GND
0.656	FINAL	—	20.78	46.00	-25.22	N	GND
0.659	FINAL	34.8	—	56.00	-21.18	N	GND
4.486	FINAL	32.6	—	56.00	-23.43	N	GND
4.603	FINAL	—	19.21	46.00	-26.79	N	GND
8.599	FINAL	22.4	—	60.00	-37.63	N	GND
8.603	FINAL	—	15.92	50.00	-34.08	N	GND
17.984	FINAL	—	10.59	50.00	-39.41	N	GND
17.993	FINAL	16.9	—	60.00	-43.09	N	GND

Table 7-78. AC Line Conducted Data with 802.11be CDD Diversity (RU26) Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 242 of 245

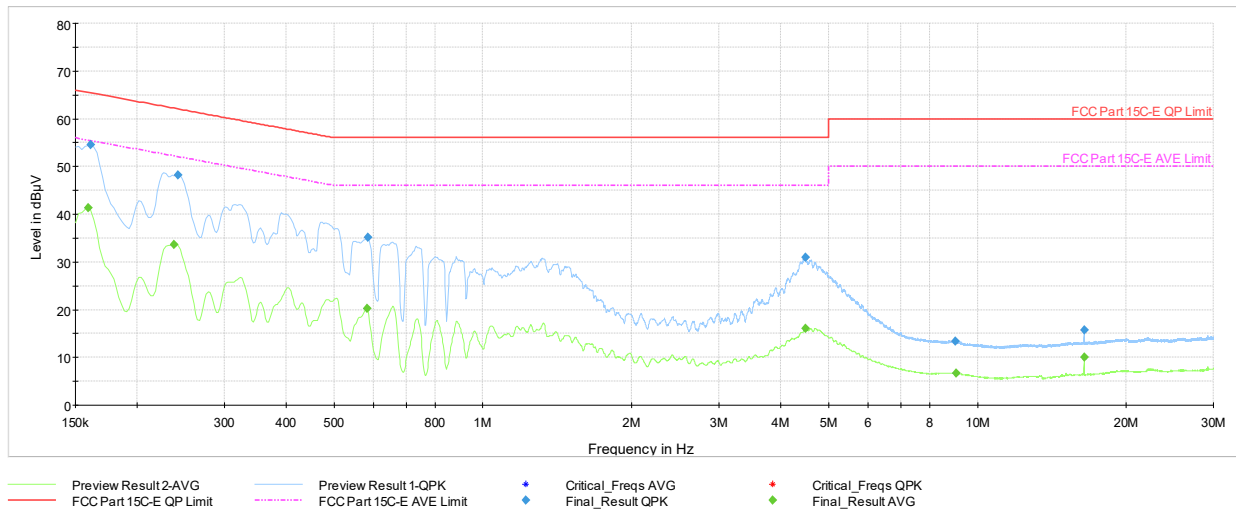


Plot 7-367. AC Line Conducted Emissions with 802.11be CDD Diversity (RU242) Ch.6 (L1, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	—	41.35	55.52	-14.16	L1	GND
0.161	FINAL	54.6	—	65.40	-10.82	L1	GND
0.238	FINAL	—	33.71	52.17	-18.46	L1	GND
0.242	FINAL	48.2	—	62.02	-13.84	L1	GND
0.584	FINAL	—	20.30	46.00	-25.70	L1	GND
0.587	FINAL	35.1	—	56.00	-20.91	L1	GND
4.484	FINAL	31.0	—	56.00	-25.05	L1	GND
4.486	FINAL	—	16.12	46.00	-29.88	L1	GND
9.011	FINAL	13.5	—	60.00	-46.54	L1	GND
9.062	FINAL	—	6.61	50.00	-43.39	L1	GND
16.424	FINAL	—	10.11	50.00	-39.89	L1	GND
16.424	FINAL	15.8	—	60.00	-44.23	L1	GND

Table 7-79. AC Line Conducted Data with 802.11be CDD Diversity (RU242) Ch.6 (L1, with AC/DC Adapter)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 243 of 245

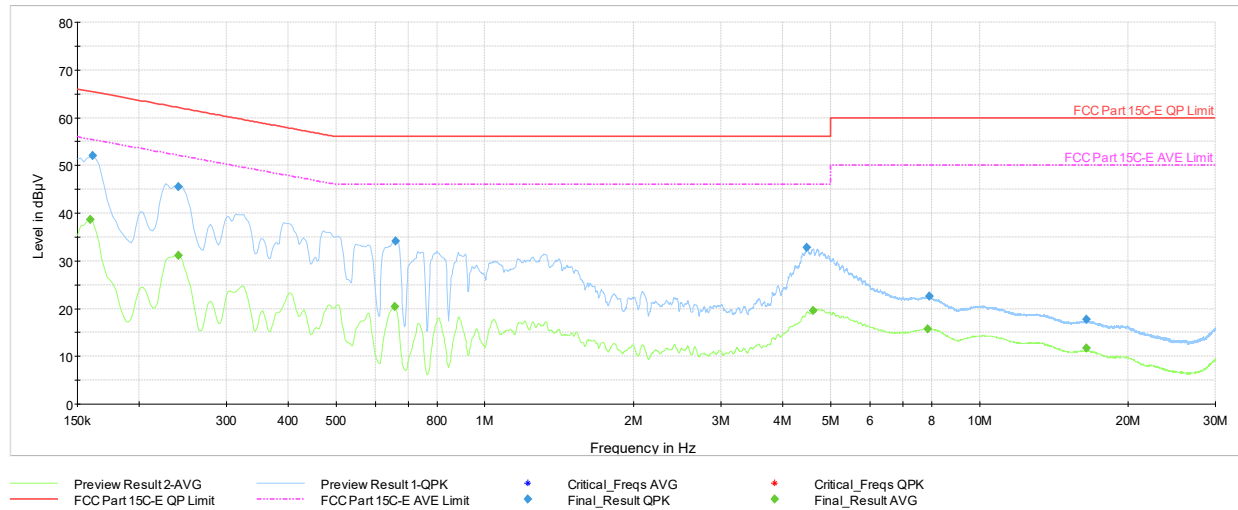

Plot 7-368. AC Line Conducted Emissions with 802.11be CDD Diversity (RU242) Ch.6 (N, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	—	38.67	55.52	-16.84	N	GND
0.161	FINAL	52.0	—	65.40	-13.42	N	GND
0.240	FINAL	—	31.20	52.10	-20.89	N	GND
0.240	FINAL	45.5	—	62.10	-16.55	N	GND
0.656	FINAL	—	20.48	46.00	-25.52	N	GND
0.661	FINAL	34.2	—	56.00	-21.83	N	GND
4.481	FINAL	—	—	56.00	-23.27	N	GND
4.610	FINAL	—	19.54	46.00	-26.46	N	GND
7.859	FINAL	—	15.77	50.00	-34.23	N	GND
7.928	FINAL	22.5	—	60.00	-37.49	N	GND
16.427	FINAL	—	11.64	50.00	-38.36	N	GND
16.427	FINAL	17.8	—	60.00	-42.22	N	GND

Table 7-80. AC Line Conducted Data with 802.11be CDD Diversity (RU242) Ch.6 (N, with AC/DC Adapter)

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 244 of 245

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3360, IC: 579C-A3360** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3360 IC: 579C-A3360		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170040-06.BCG	Test Dates: 05/12/2025 - 07/28/2025	EUT Type: Tablet Device	Page 245 of 245

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.