



Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

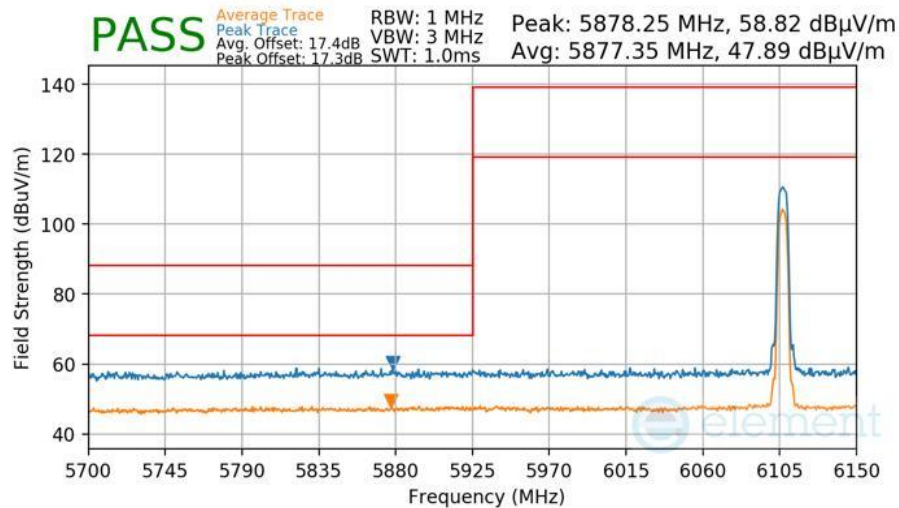

Plot 7-483 Radiated Lower Band Edge Measurement TxBF Diversity


Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

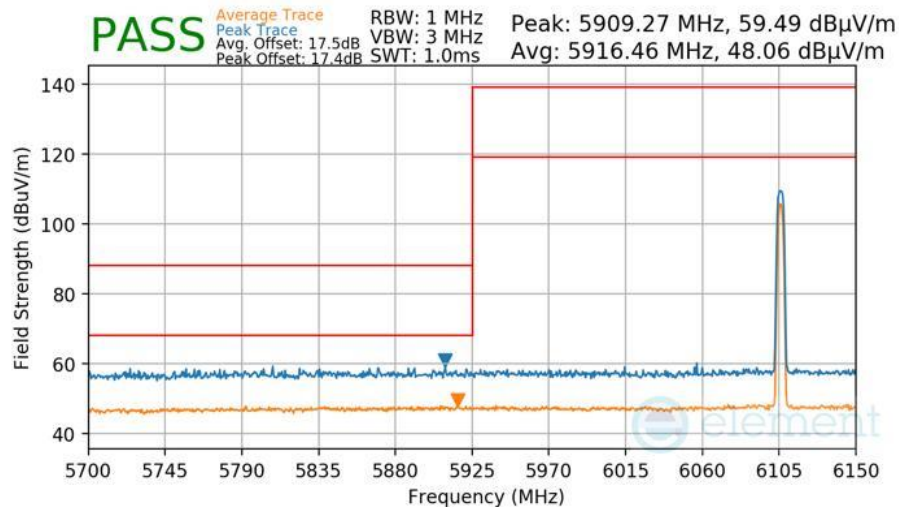

Plot 7-484 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 309 of 336

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

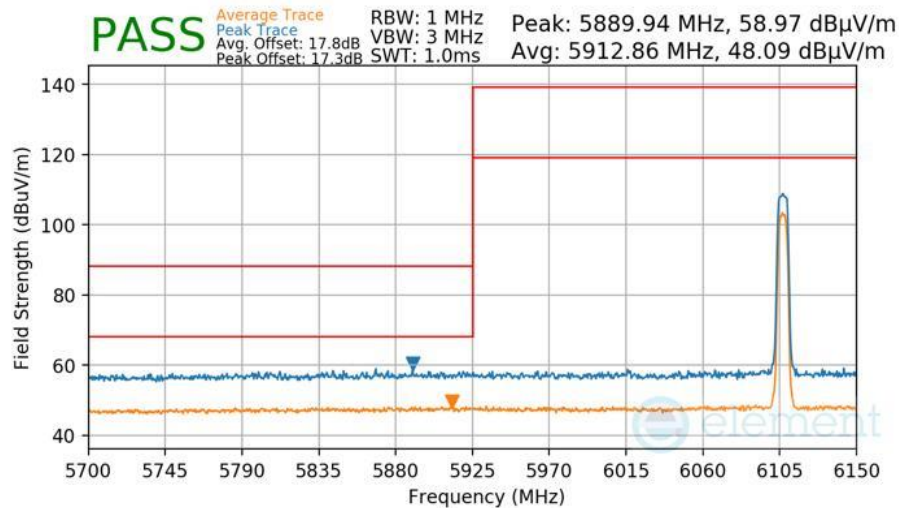

Plot 7-485 Radiated Lower Band Edge Measurement TxBF Diversity


Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6107MHz

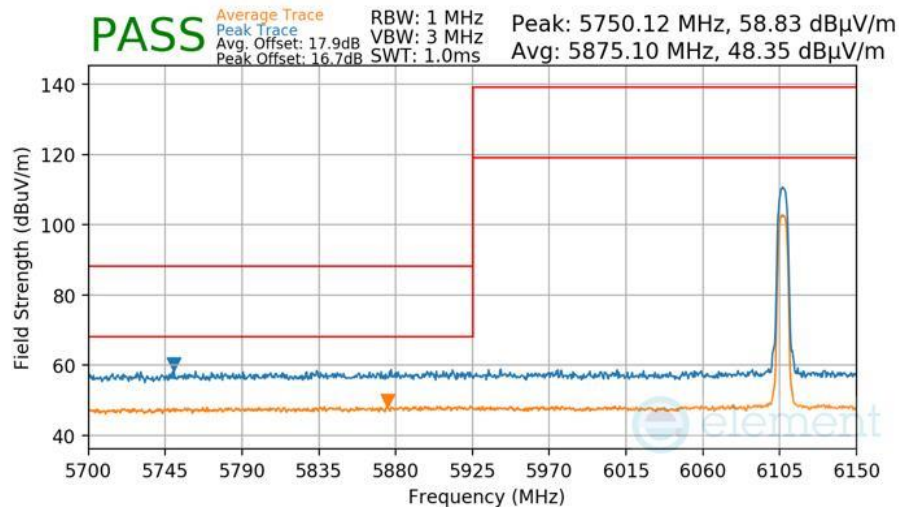

Plot 7-486 Radiated Lower Band Edge Measurement TxBF Diversity


FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 310 of 336

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109MHz

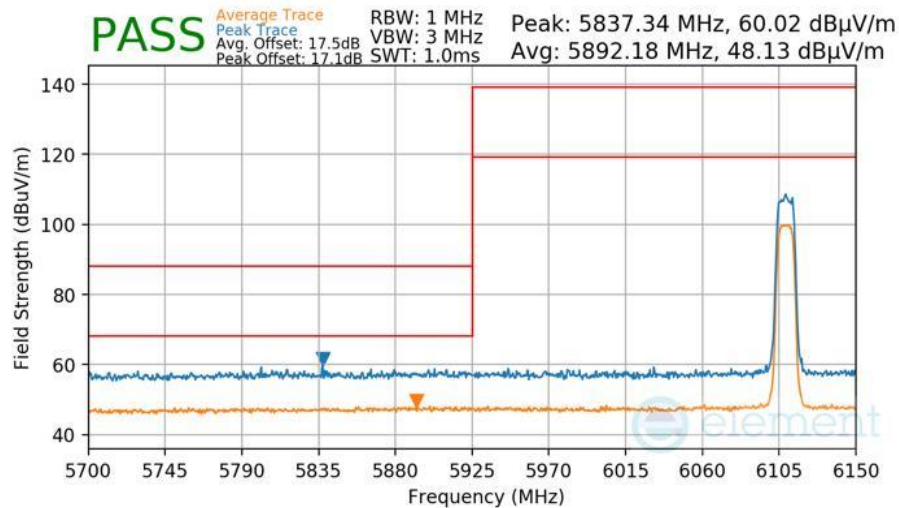

Plot 7-487 Radiated Lower Band Edge Measurement TxBF Diversity


Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6109MHz

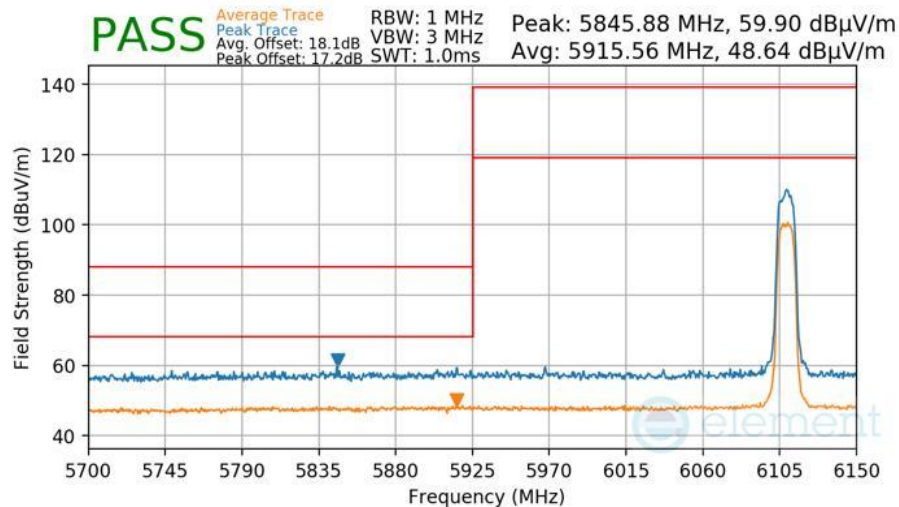

Plot 7-488 Radiated Lower Band Edge Measurement TxBF Diversity

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 311 of 336

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 6106MHz

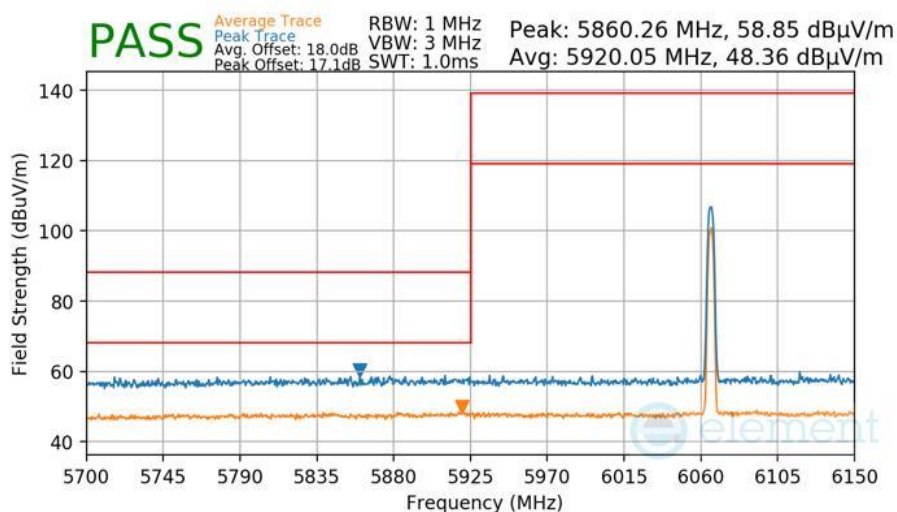

Plot 7-489 Radiated Lower Band Edge Measurement TxBF Diversity

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 312 of 336

7.9 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 must not exceed the limits shown in Table 7-44 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-44. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 313 of 336

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

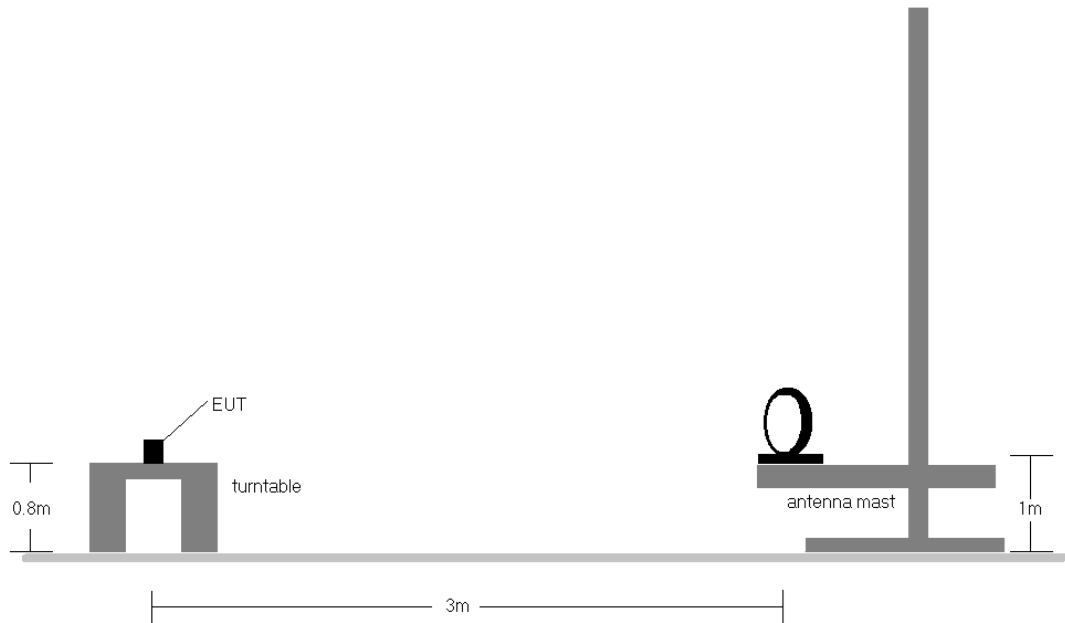


Figure 7-9. Radiated Test Setup < 30MHz

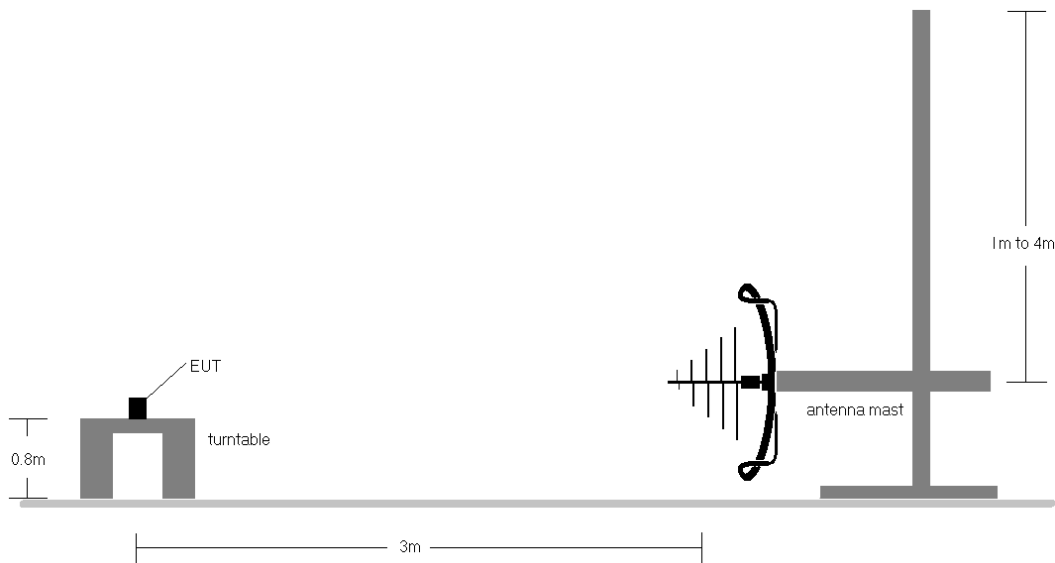


Figure 7-10. Radiated Test Setup < 1GHz

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 314 of 336

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-44.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor to USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
11. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamplifier Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCGA3361 IC: 579C-A3361			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device		Page 315 of 336

7.9.1 Radiated Spurious Emissions (Below 1GHz)

§15.209

TxBF Primary

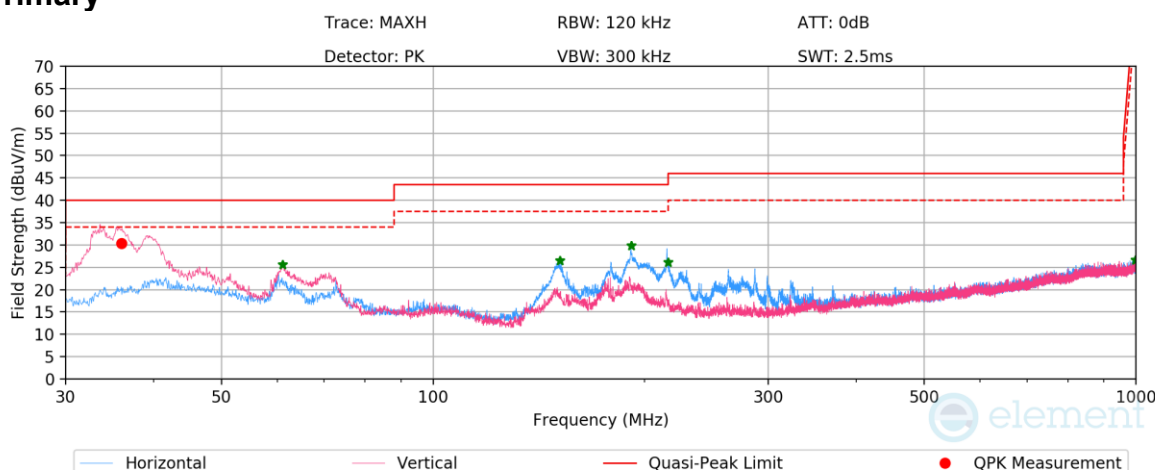


Plot 7-490. Radiated Spurious Emissions Below 1GHz TxBF Primary (NB UNII BDR ePA – 6263MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.04	Quasi-Peak	V	148	16	-61.38	-15.28	30.34	40.00	-9.66
61.02	Max-Peak	V	300	-	-66.64	-14.72	25.64	40.00	-14.36
151.39	Max-Peak	H	200	-	-62.45	-18.01	26.54	43.50	-16.96
191.23	Max-Peak	H	100	-	-62.06	-15.07	29.87	43.50	-13.63
216.01	Max-Peak	H	100	-	-66.39	-14.54	26.07	46.00	-19.93
998.02	Max-Peak	H	300	-	-81.02	0.61	26.60	54.00	-27.40

Table 7-45. Radiated Spurious Emissions Below 1GHz TxBF Primary (NB UNII BDR ePA – 6263MHz), with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 316 of 336

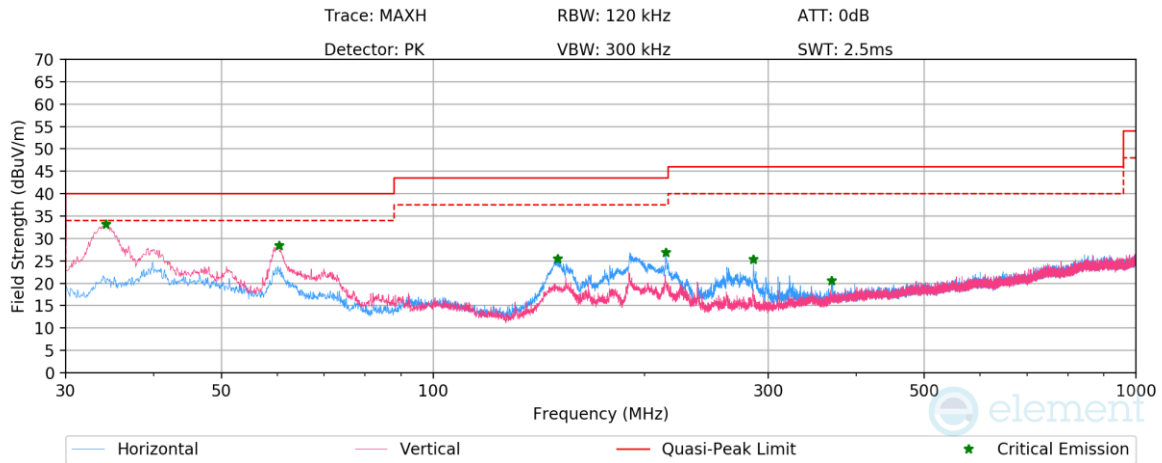


Plot 7-491. Radiated Spurious Emissions Below 1GHz TxBF Primary (NB UNII HDR4 ePA – 6263MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
34.20	Max-Peak	V	100	-	-57.66	-16	33.23	40.00	-6.77
60.36	Max-Peak	V	100	-	-64.06	-15	28.41	40.00	-11.59
150.30	Max-Peak	H	200	-	-63.42	-18	25.49	43.50	-18.01
214.33	Max-Peak	H	100	-	-65.53	-15	26.86	43.50	-16.64
285.67	Max-Peak	H	100	-	-69.36	-12	25.35	46.00	-20.65
368.89	Max-Peak	H	100	-	-76.19	-10	20.56	46.00	-25.44

Table 7-46. Radiated Spurious Emissions Below 1GHz TxBF Primary (NB UNII HDR4 ePA – 6263MHz), with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 317 of 336

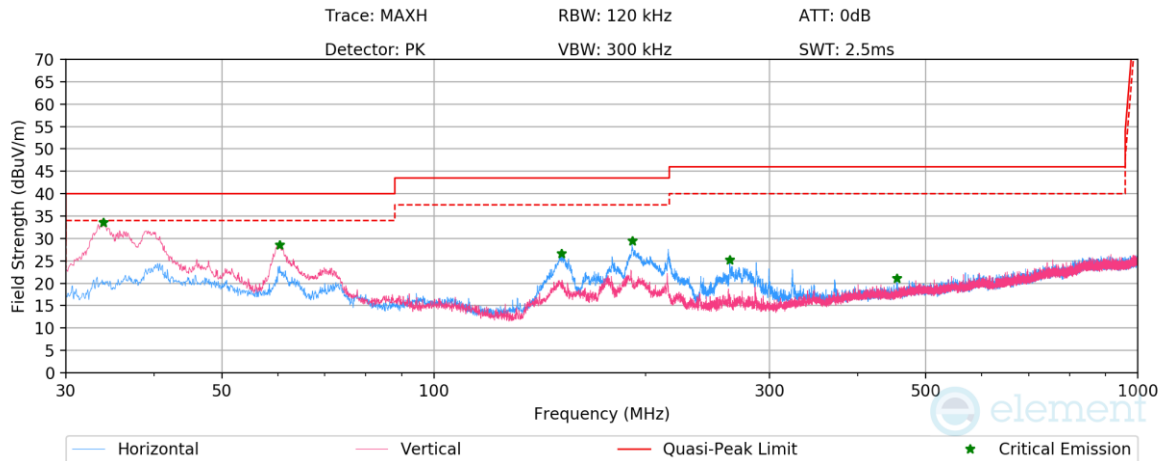


Plot 7-492. Radiated Spurious Emissions Below 1GHz TxBF Primary (NB UNII LE1M ePA – 6263MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
33.90	Max-Peak	V	200	-	-57.14	-16	33.63	40.00	-6.37
60.36	Max-Peak	V	100	-	-63.84	-15	28.63	40.00	-11.37
151.87	Max-Peak	H	200	-	-62.39	-18	26.61	43.50	-16.89
191.23	Max-Peak	H	200	-	-62.50	-15	29.43	43.50	-14.07
263.17	Max-Peak	H	100	-	-68.93	-13	25.17	46.00	-20.83
454.40	Max-Peak	H	200	-	-77.32	-9	21.10	46.00	-24.90

Table 7-47. Radiated Spurious Emissions Below 1GHz TxBF Primary (NB UNII LE1M ePA – 6263MHz), with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 318 of 336

TxBF Diversity

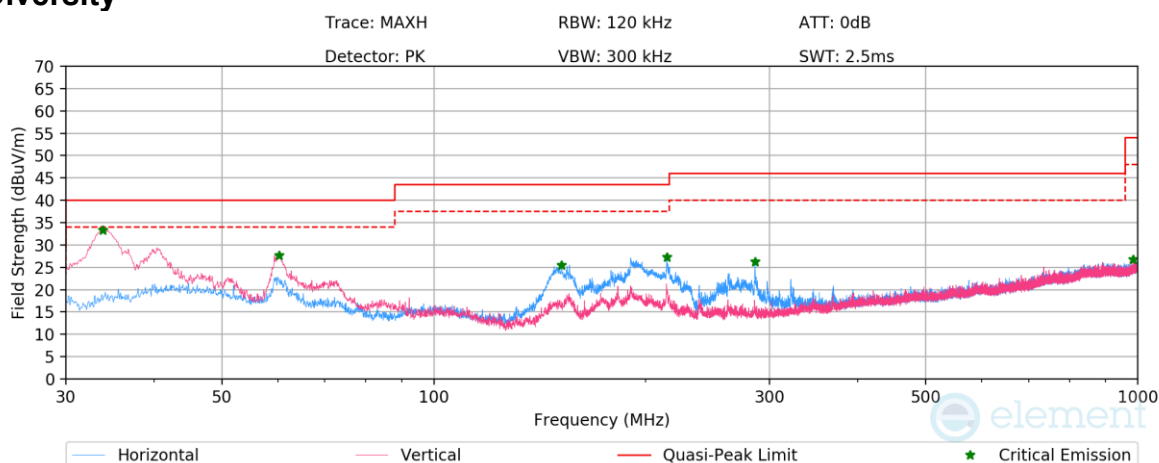

Plot 7-493. Radiated Spurious Emissions Below 1GHz TxBF Diversity (NB UNII BDR ePA – 6263MHz), with AC/DC adaptor


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
33.84	Max-Peak	V	200	-	-57.85	-16.25	32.90	40.00	-7.10
59.82	Max-Peak	V	100	-	-65.92	-14.37	26.71	40.00	-13.29
150.96	Max-Peak	H	200	-	-62.90	-18.02	26.08	43.50	-17.42
214.81	Max-Peak	H	100	-	-64.72	-14.56	27.72	43.50	-15.78
286.21	Max-Peak	H	100	-	-69.52	-12.25	25.23	46.00	-20.77
369.79	Max-Peak	H	100	-	-76.07	-10.25	20.68	46.00	-25.32

Table 7-48. Radiated Spurious Emissions Below 1GHz TxBF Diversity (NB UNII BDR ePA – 6263MHz), with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 319 of 336

© Apple Inc. Apple Inc.

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

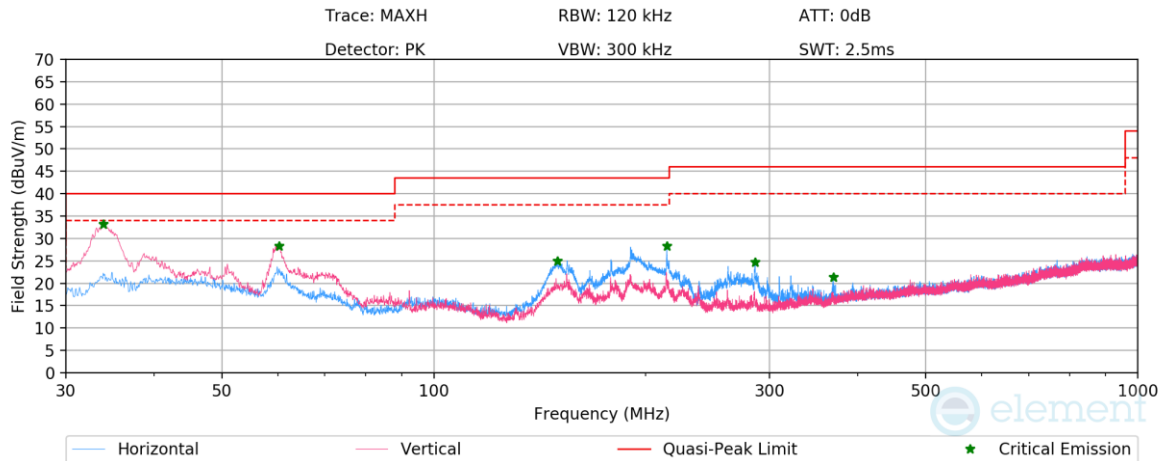


Plot 7-494. Radiated Spurious Emissions Below 1GHz TxBF Diversity (NB UNII HDR4 ePA – 6263MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
33.90	Max-Peak	V	100	-	-57.62	-16	33.15	40.00	-6.85
60.24	Max-Peak	V	100	-	-64.22	-14	28.29	40.00	-11.71
149.88	Max-Peak	H	200	-	-63.93	-18	24.94	43.50	-18.56
214.21	Max-Peak	H	200	-	-64.11	-15	28.27	43.50	-15.23
285.97	Max-Peak	H	100	-	-70.00	-12	24.74	46.00	-21.26
369.25	Max-Peak	H	100	-	-75.36	-10	21.39	46.00	-24.61

Table 7-49. Radiated Spurious Emissions Below 1GHz TxBF Diversity (NB UNII HDR4 ePA – 6263MHz), with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 320 of 336

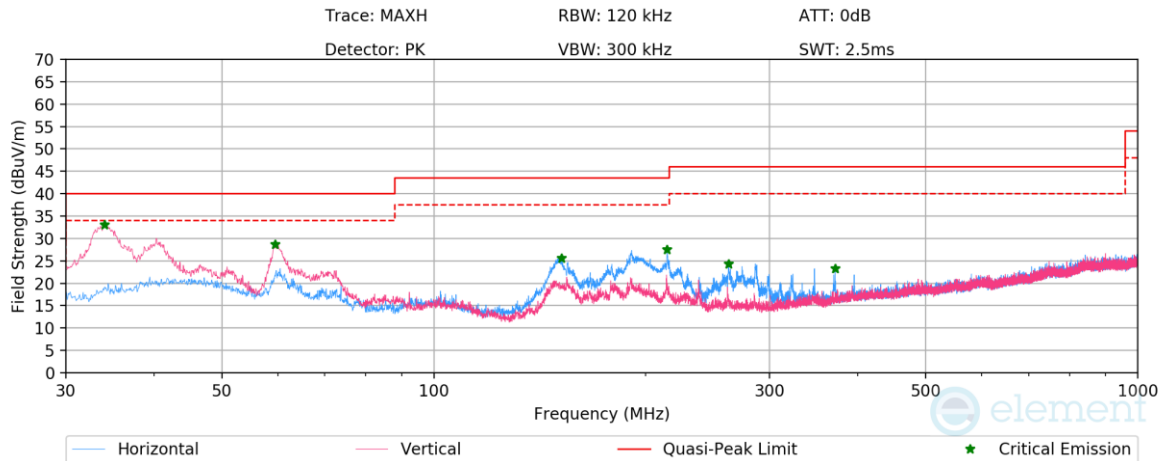

Plot 7-495. Radiated Spurious Emissions Below 1GHz TxBF Diversity (NB UNII LE1M ePA – 6263MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
34.02	Max-Peak	V	100	-	-57.69	-16	33.12	40.00	-6.88
59.52	Max-Peak	V	100	-	-64.04	-14	28.68	40.00	-11.32
151.81	Max-Peak	H	200	-	-63.40	-18	25.60	43.50	-17.90
214.51	Max-Peak	H	100	-	-64.86	-15	27.54	43.50	-15.96
262.27	Max-Peak	H	100	-	-69.75	-13	24.35	46.00	-21.65
371.47	Max-Peak	H	100	-	-73.56	-10	23.30	46.00	-22.70

Table 7-50. Radiated Spurious Emissions Below 1GHz TxBF Diversity (NB UNII LE1M ePA – 6263MHz), with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 321 of 336

7.10 AC Line Conducted Emissions Measurement

§15.207; RSS-Gen[8.8]

Test Overview and Limit

All AC line conducted emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted emissions. All data rates and modes were investigated for AC Line conducted emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-51. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 322 of 336

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


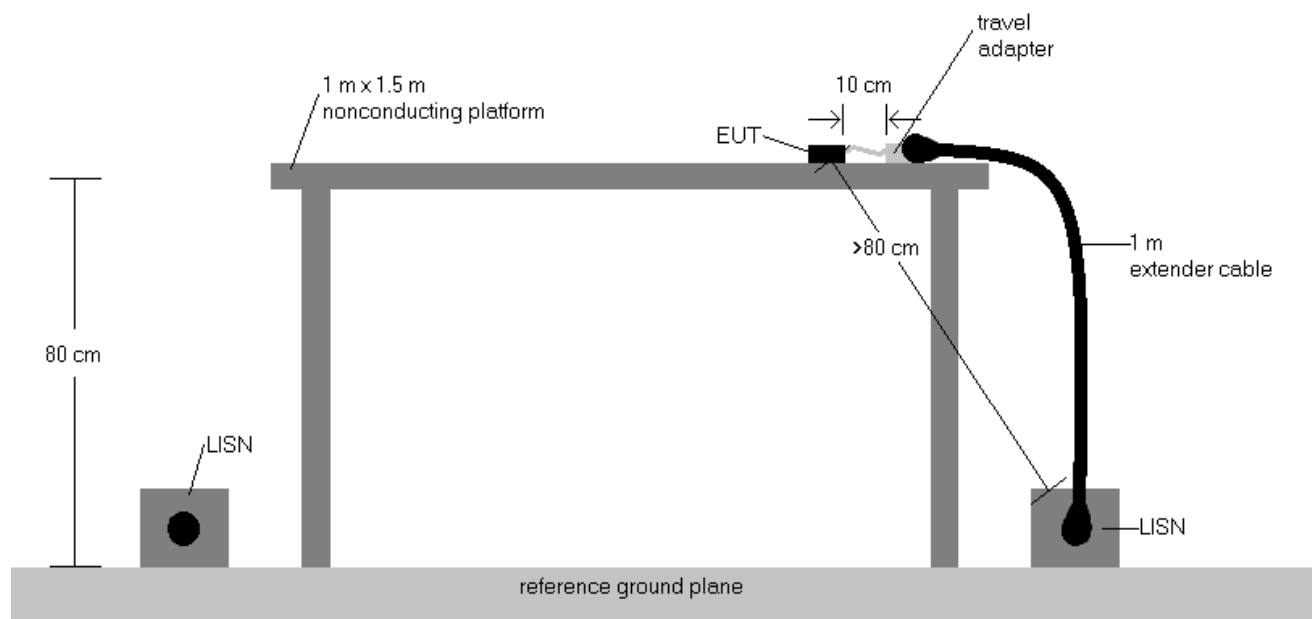


Figure 7-11. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated, and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor to USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150kHz to 30MHz is specified in 15.207 and RSS-Gen (8.8).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.
- The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 323 of 336

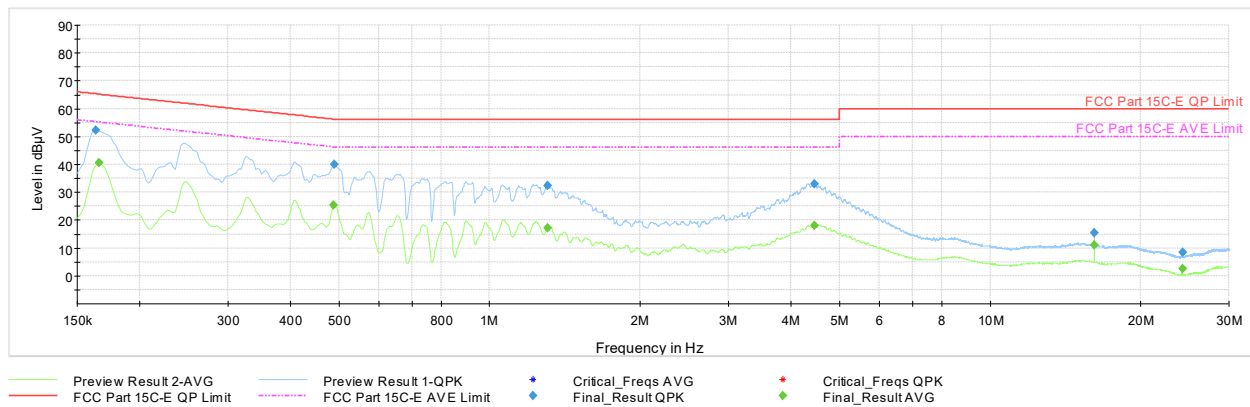


Plot 7-496. AC Line Conducted Plot TxBF Primary (NB UNII BDR ePA – 6263MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	52.4	—	65.28	-12.90	L1	GND
0.166	FINAL	—	40.50	55.17	-14.68	L1	GND
0.488	FINAL	—	25.51	46.21	-20.70	L1	GND
0.490	FINAL	39.9	—	56.17	-16.24	L1	GND
1.304	FINAL	—	17.12	46.00	-28.88	L1	GND
1.304	FINAL	32.3	—	56.00	-23.67	L1	GND
4.450	FINAL	33.0	—	56.00	-23.03	L1	GND
4.450	FINAL	—	18.08	46.00	-27.92	L1	GND
16.141	FINAL	15.5	—	60.00	-44.54	L1	GND
16.141	FINAL	—	11.16	50.00	-38.84	L1	GND
24.212	FINAL	—	2.51	50.00	-47.49	L1	GND
24.214	FINAL	8.5	—	60.00	-51.52	L1	GND

Table 7-52. AC Line Conducted Data TxBF Primary (NB UNII BDR ePA – 6263MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 324 of 336

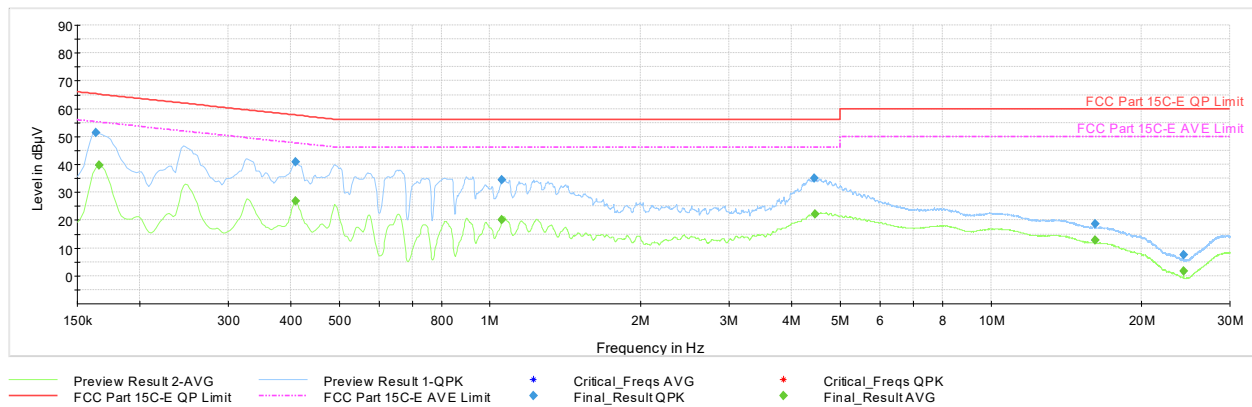


Plot 7-497. AC Line Conducted Plot TxBF Primary (NB UNII BDR ePA – 6263MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	51.5	—	65.28	-13.83	N	GND
0.166	FINAL	—	39.69	55.17	-15.48	N	GND
0.409	FINAL	—	26.70	47.67	-20.97	N	GND
0.409	FINAL	40.7	—	57.67	-16.93	N	GND
1.057	FINAL	—	20.05	46.00	-25.95	N	GND
1.057	FINAL	34.5	—	56.00	-21.52	N	GND
4.448	FINAL	35.1	—	56.00	-20.87	N	GND
4.466	FINAL	—	22.28	46.00	-23.72	N	GND
16.157	FINAL	18.6	—	60.00	-41.43	N	GND
16.157	FINAL	—	12.82	50.00	-37.18	N	GND
24.234	FINAL	—	1.69	50.00	-48.31	N	GND
24.234	FINAL	7.6	—	60.00	-52.41	N	GND

Table 7-53. AC Line Conducted TxBF Primary (NB UNII BDR ePA – 6263MHz) (N) with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 325 of 336

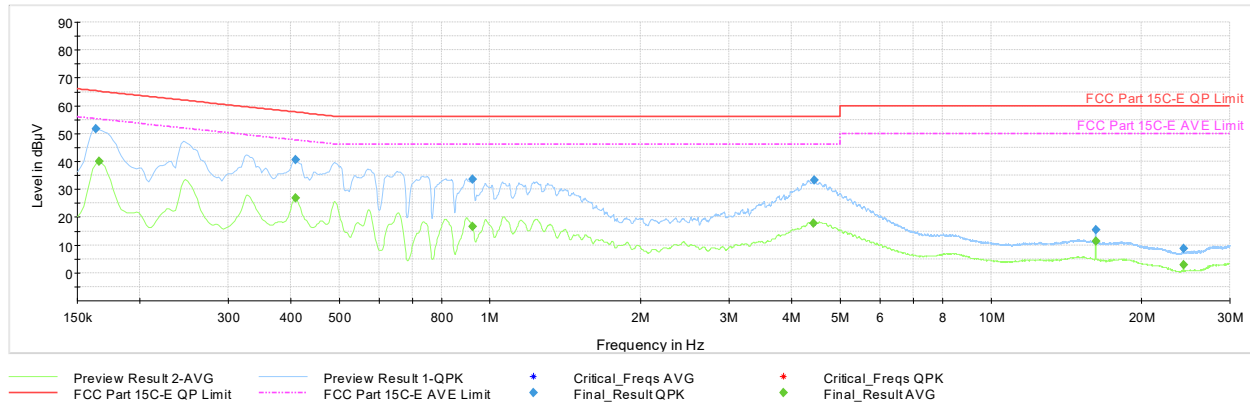


Plot 7-498. AC Line Conducted Plot TxBF Primary (NB UNII HDR4 ePA – 6263MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	51.8	—	65.28	-13.51	L1	GND
0.166	FINAL	—	39.94	55.17	-15.23	L1	GND
0.409	FINAL	—	26.91	47.67	-20.76	L1	GND
0.409	FINAL	40.6	—	57.67	-17.05	L1	GND
0.924	FINAL	—	16.63	46.00	-29.37	L1	GND
0.924	FINAL	33.6	—	56.00	-22.43	L1	GND
4.430	FINAL	—	17.87	46.00	-28.13	L1	GND
4.439	FINAL	33.2	—	56.00	-22.79	L1	GND
16.179	FINAL	15.5	—	60.00	-44.48	L1	GND
16.179	FINAL	—	11.22	50.00	-38.78	L1	GND
24.268	FINAL	—	2.72	50.00	-47.28	L1	GND
24.270	FINAL	8.8	—	60.00	-51.22	L1	GND

Table 7-54. AC Line Conducted Data TxBF Primary (NB UNII HDR4 ePA – 6263MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 326 of 336

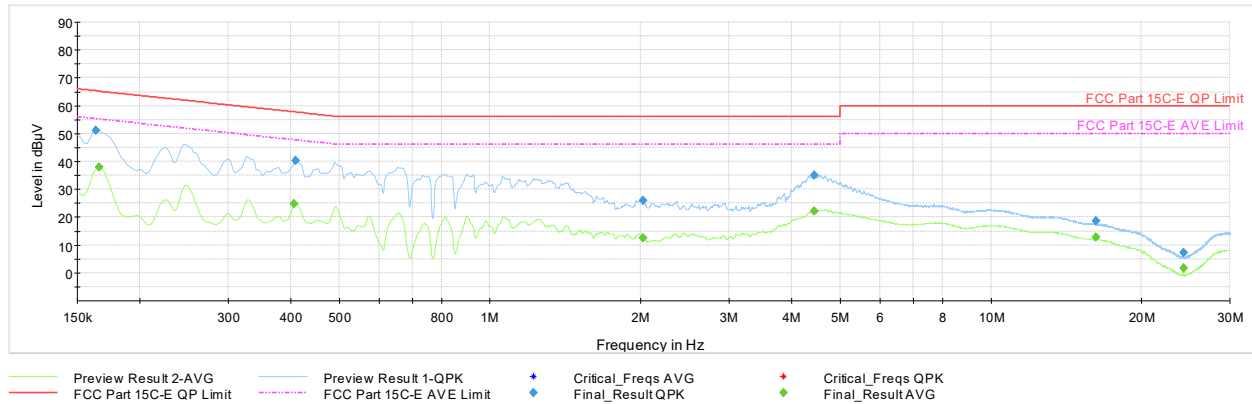


Plot 7-499. AC Line Conducted Plot TxBF Primary (NB UNII HDR4 ePA – 6263MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	51.0	—	65.28	-14.24	N	GND
0.166	FINAL	—	37.94	55.17	-17.23	N	GND
0.407	FINAL	—	24.77	47.72	-22.95	N	GND
0.409	FINAL	40.4	—	57.67	-17.26	N	GND
2.022	FINAL	—	12.64	46.00	-33.36	N	GND
2.022	FINAL	25.9	—	56.00	-30.08	N	GND
4.441	FINAL	35.1	—	56.00	-20.88	N	GND
4.448	FINAL	—	22.25	46.00	-23.75	N	GND
16.193	FINAL	18.5	—	60.00	-41.49	N	GND
16.193	FINAL	—	12.93	50.00	-37.07	N	GND
24.288	FINAL	—	1.63	50.00	-48.37	N	GND
24.288	FINAL	7.4	—	60.00	-52.61	N	GND

Table 7-55. AC Line Conducted Data TxBF Primary (NB UNII HDR4 ePA – 6263MHz) (N) with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 327 of 336	

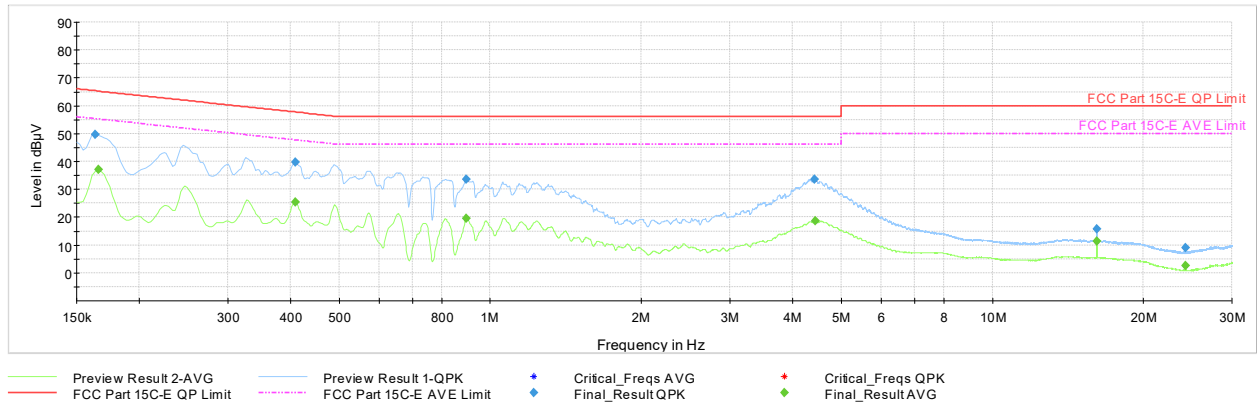


Plot 7-500. AC Line Conducted Plot TxBF Primary (NB UNII LE1M ePA – 6263MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	49.8	—	65.28	-15.50	L1	GND
0.166	FINAL	—	36.99	55.17	-18.18	L1	GND
0.409	FINAL	—	25.43	47.67	-22.24	L1	GND
0.409	FINAL	39.8	—	57.67	-17.91	L1	GND
0.897	FINAL	—	19.45	46.00	-26.55	L1	GND
0.897	FINAL	33.5	—	56.00	-22.48	L1	GND
4.425	FINAL	33.5	—	56.00	-22.47	L1	GND
4.441	FINAL	—	18.51	46.00	-27.49	L1	GND
16.159	FINAL	15.8	—	60.00	-44.19	L1	GND
16.159	FINAL	—	11.26	50.00	-38.74	L1	GND
24.236	FINAL	—	2.62	50.00	-47.38	L1	GND
24.239	FINAL	9.0	—	60.00	-50.97	L1	GND

Table 7-56. AC Line Conducted Data TxBF Primary (NB UNII LE1M ePA – 6263MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 328 of 336

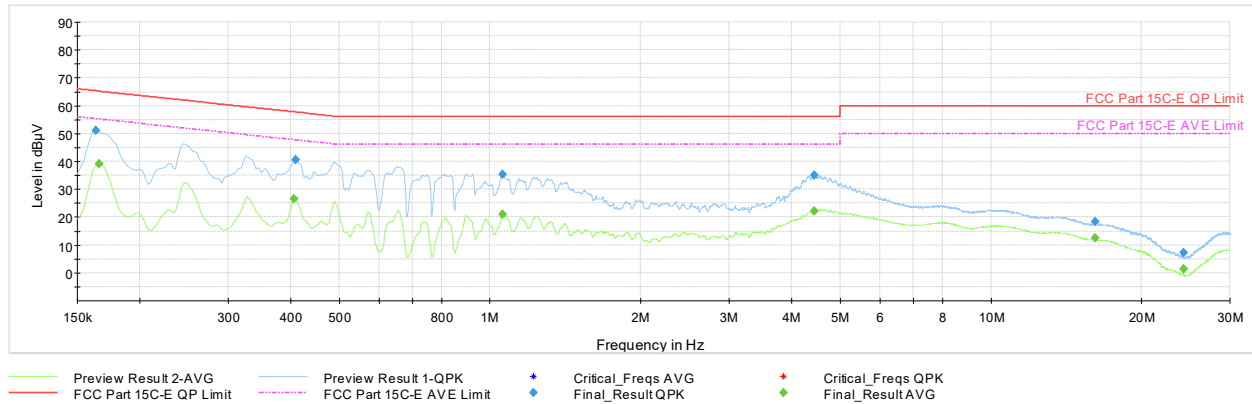


Plot 7-501. AC Line Conducted Plot TxBF Primary (NB UNII LE1M ePA – 6263MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	51.1	—	65.28	-14.21	N	GND
0.166	FINAL	—	39.23	55.17	-15.94	N	GND
0.407	FINAL	—	26.51	47.72	-21.21	N	GND
0.409	FINAL	40.5	—	57.67	-17.13	N	GND
1.059	FINAL	35.2	—	56.00	-20.80	N	GND
1.059	FINAL	—	21.00	46.00	-25.00	N	GND
4.448	FINAL	34.9	—	56.00	-21.06	N	GND
4.448	FINAL	—	22.22	46.00	-23.78	N	GND
16.157	FINAL	—	12.61	50.00	-37.39	N	GND
16.159	FINAL	18.4	—	60.00	-41.61	N	GND
24.236	FINAL	—	1.53	50.00	-48.47	N	GND
24.236	FINAL	7.4	—	60.00	-52.61	N	GND

Table 7-57. AC Line Conducted Data TxBF Primary (NB UNII LE1M ePA – 6263MHz) (N) with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 329 of 336

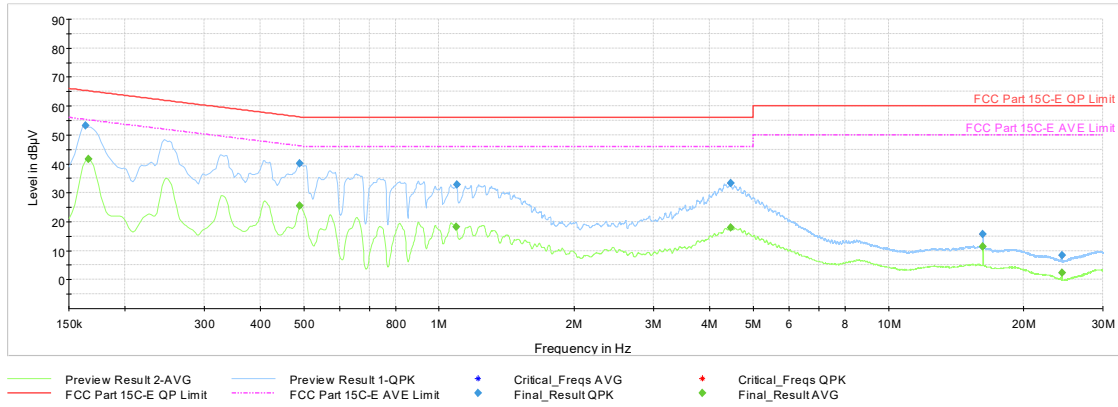


Plot 7-502. AC Line Conducted Plot TxBF Diversity (NB UNII BDR ePA – 6263MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	53.2	—	65.28	-12.12	L1	GND
0.166	FINAL	—	41.75	55.17	-13.42	L1	GND
0.490	FINAL	—	25.49	46.17	-20.68	L1	GND
0.490	FINAL	40.1	—	56.17	-16.04	L1	GND
1.093	FINAL	—	18.15	46.00	-27.85	L1	GND
1.095	FINAL	32.8	—	56.00	-23.20	L1	GND
4.450	FINAL	33.3	—	56.00	-22.75	L1	GND
4.450	FINAL	—	17.95	46.00	-28.05	L1	GND
16.235	FINAL	15.7	—	60.00	-44.28	L1	GND
16.235	FINAL	—	11.30	50.00	-38.70	L1	GND
24.353	FINAL	—	2.31	50.00	-47.69	L1	GND
24.353	FINAL	8.4	—	60.00	-51.60	L1	GND

Table 7-58. AC Line Conducted Data TxBF Diversity (NB UNII BDR ePA – 6263MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 330 of 336

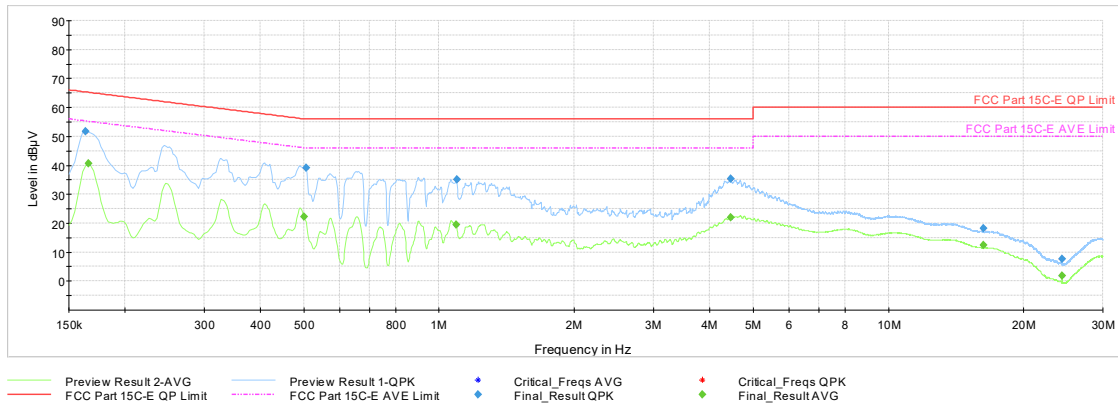


Plot 7-503. AC Line Conducted Plot TxBF Diversity (NB UNII BDR ePA – 6263MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	51.7	—	65.28	-13.55	N	GND
0.166	FINAL	—	40.53	55.17	-14.64	N	GND
0.501	FINAL	—	22.34	46.00	-23.66	N	GND
0.506	FINAL	39.2	—	56.00	-16.77	N	GND
1.091	FINAL	—	19.49	46.00	-26.51	N	GND
1.095	FINAL	35.0	—	56.00	-21.01	N	GND
4.452	FINAL	35.3	—	56.00	-20.75	N	GND
4.466	FINAL	—	22.06	46.00	-23.94	N	GND
16.247	FINAL	18.3	—	60.00	-41.73	N	GND
16.247	FINAL	—	12.46	50.00	-37.54	N	GND
24.369	FINAL	—	1.84	50.00	-48.16	N	GND
24.369	FINAL	7.6	—	60.00	-52.40	N	GND

Table 7-59. AC Line Conducted TxBF Diversity (NB UNII BDR ePA – 6263MHz) (N) with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 331 of 336

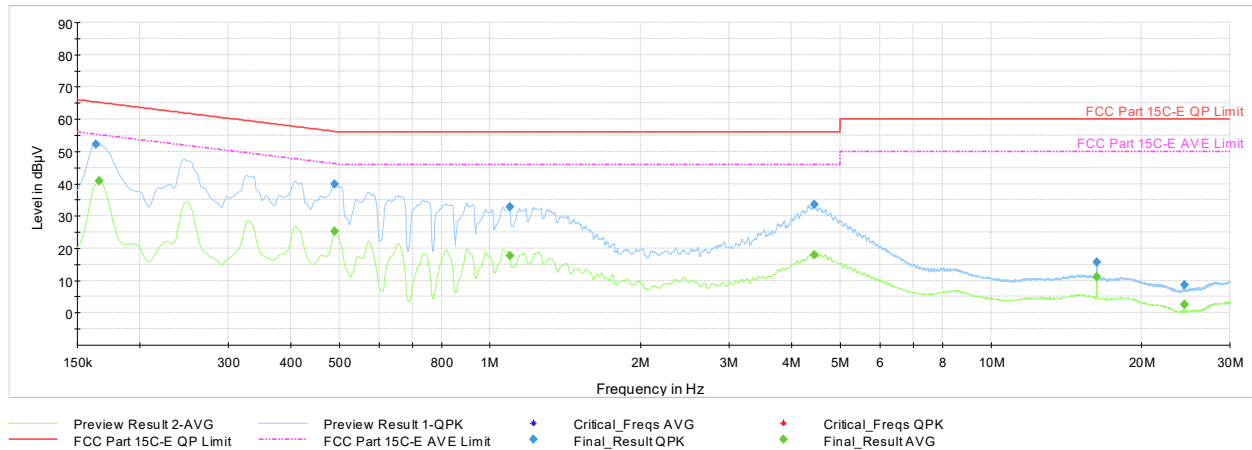


Plot 7-504. AC Line Conducted Plot TxBF Diversity (NB UNII HDR4 ePA – 6263MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	52.2	—	65.28	-13.06	L1	GND
0.166	FINAL	—	40.89	55.17	-14.28	L1	GND
0.490	FINAL	—	25.33	46.17	-20.85	L1	GND
0.490	FINAL	39.8	—	56.17	-16.41	L1	GND
1.095	FINAL	—	17.60	46.00	-28.40	L1	GND
1.095	FINAL	32.8	—	56.00	-23.25	L1	GND
4.434	FINAL	—	18.05	46.00	-27.95	L1	GND
4.436	FINAL	33.5	—	56.00	-22.50	L1	GND
16.249	FINAL	15.6	—	60.00	-44.38	L1	GND
16.249	FINAL	—	11.27	50.00	-38.73	L1	GND
24.371	FINAL	—	2.54	50.00	-47.46	L1	GND
24.371	FINAL	8.7	—	60.00	-51.35	L1	GND

Table 7-60. AC Line Conducted Data TxBF Diversity (NB UNII HDR4 ePA – 6263MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 332 of 336

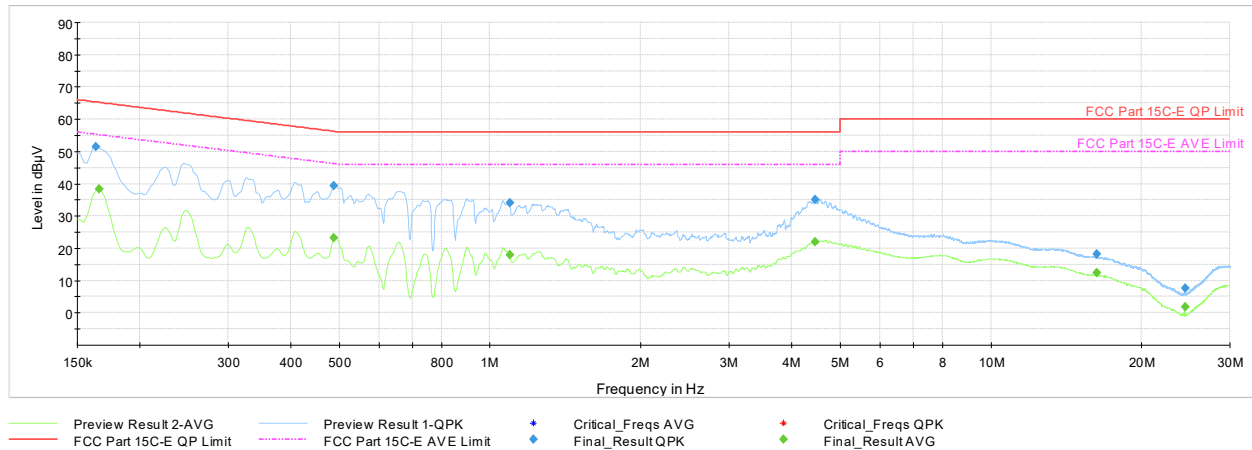


Plot 7-505. AC Line Conducted Plot TxBF Diversity (NB UNII HDR4 ePA – 6263MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	51.4	—	65.28	-13.94	N	GND
0.166	FINAL	—	38.41	55.17	-16.76	N	GND
0.488	FINAL	—	23.36	46.21	-22.85	N	GND
0.488	FINAL	39.3	—	56.21	-16.93	N	GND
1.095	FINAL	—	17.97	46.00	-28.03	N	GND
1.095	FINAL	34.1	—	56.00	-21.87	N	GND
4.450	FINAL	35.2	—	56.00	-20.82	N	GND
4.452	FINAL	—	22.10	46.00	-23.90	N	GND
16.258	FINAL	18.2	—	60.00	-41.85	N	GND
16.258	FINAL	—	12.51	50.00	-37.49	N	GND
24.389	FINAL	—	1.72	50.00	-48.28	N	GND
24.389	FINAL	7.6	—	60.00	-52.45	N	GND

Table 7-61. AC Line Conducted Data TxBF Diversity (NB UNII HDR4 ePA – 6263MHz) (N) with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 333 of 336

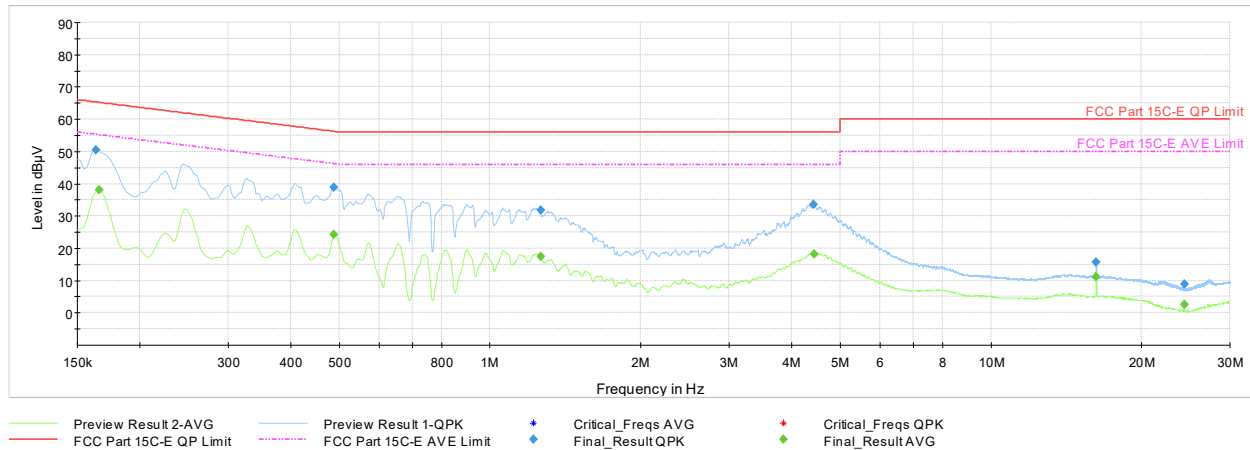


Plot 7-506. AC Line Conducted Plot TxBF Diversity (NB UNII LE1M ePA – 6263MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	50.4	—	65.28	-14.86	L1	GND
0.166	FINAL	—	38.07	55.17	-17.10	L1	GND
0.488	FINAL	—	24.14	46.21	-22.07	L1	GND
0.488	FINAL	38.9	—	56.21	-17.35	L1	GND
1.262	FINAL	—	17.40	46.00	-28.60	L1	GND
1.262	FINAL	31.9	—	56.00	-24.12	L1	GND
4.432	FINAL	33.7	—	56.00	-22.35	L1	GND
4.436	FINAL	—	18.32	46.00	-27.68	L1	GND
16.235	FINAL	15.7	—	60.00	-44.26	L1	GND
16.235	FINAL	—	11.25	50.00	-38.75	L1	GND
24.353	FINAL	8.9	—	60.00	-51.11	L1	GND
24.356	FINAL	—	2.67	50.00	-47.33	L1	GND

Table 7-62. AC Line Conducted Data TxBF Diversity (NB UNII LE1M ePA – 6263MHz) (L1) with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 334 of 336

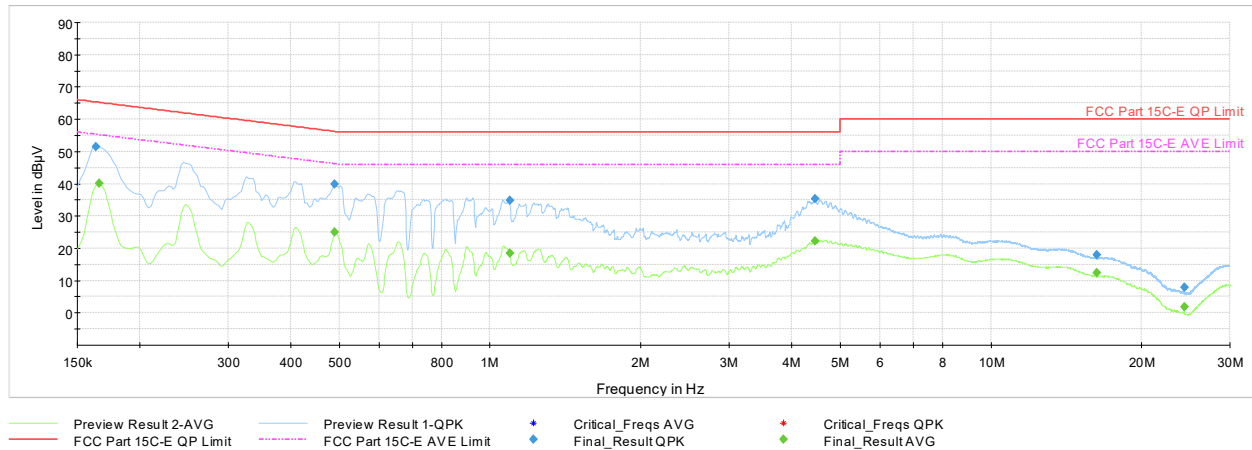

Plot 7-507. AC Line Conducted Plot TxBF Diversity (NB UNII LE1M ePA – 6263MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	51.6	—	65.28	-13.73	N	GND
0.166	FINAL	—	40.20	55.17	-14.97	N	GND
0.490	FINAL	—	24.91	46.17	-21.26	N	GND
0.490	FINAL	39.8	—	56.17	-16.36	N	GND
1.095	FINAL	—	18.49	46.00	-27.51	N	GND
1.095	FINAL	34.8	—	56.00	-21.21	N	GND
4.452	FINAL	35.2	—	56.00	-20.78	N	GND
4.459	FINAL	—	22.17	46.00	-23.83	N	GND
16.242	FINAL	18.0	—	60.00	-41.97	N	GND
16.242	FINAL	—	12.44	50.00	-37.56	N	GND
24.362	FINAL	—	1.94	50.00	-48.06	N	GND
24.362	FINAL	7.9	—	60.00	-52.15	N	GND

Table 7-63. AC Line Conducted Data TxBF Diversity (NB UNII LE1M ePA – 6263MHz) (N) with AC/DC adaptor

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 335 of 336

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3361** and **IC: 579C-A3361** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3361 IC: 579C-A3361	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170041-20-R4.BCG	Test Dates: 05/12/2025 - 09/05/2025	EUT Type: Tablet Device	Page 336 of 336

© Apple Inc. Apple Inc.

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.