



7.7.18 CDD/SDM Primary Radiated Band Edge Measurements (160MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025MHz
Channel	15

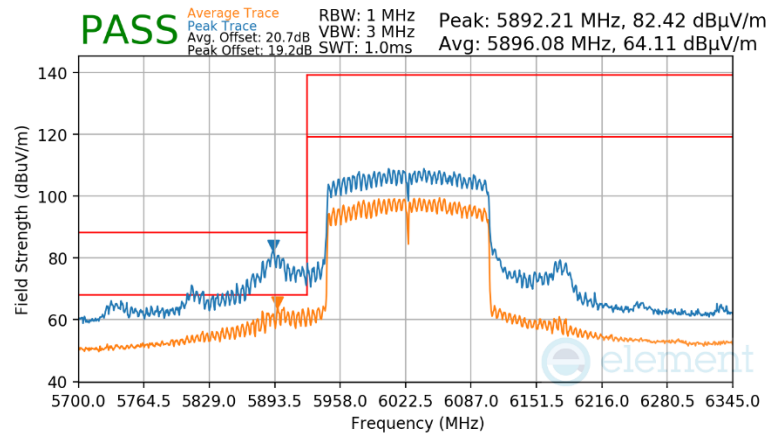

Plot 7-597 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985MHz
Channel	207

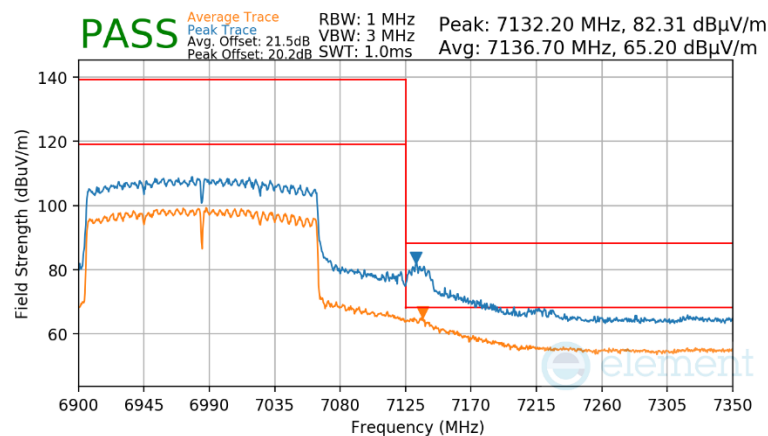


Plot 7-598 SDM Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 220 of 239

V 11.0 5/2025


7.7.19 CDD/SDM Diversity Radiated Band Edge Measurements (20MHz BW)

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	5955MHz
Channel	1

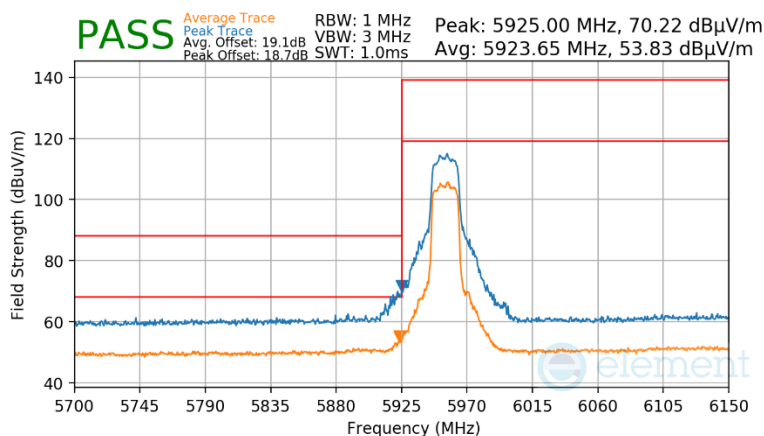

Plot 7-599 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7095MHz
Channel	229

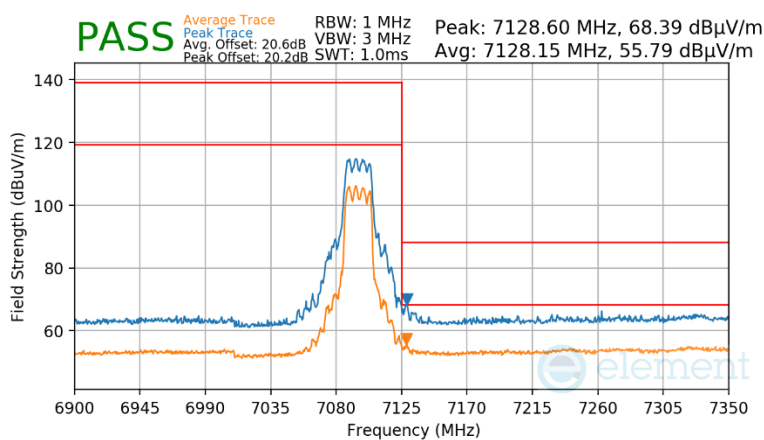


Plot 7-600 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 221 of 239

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115MHz
Channel	233

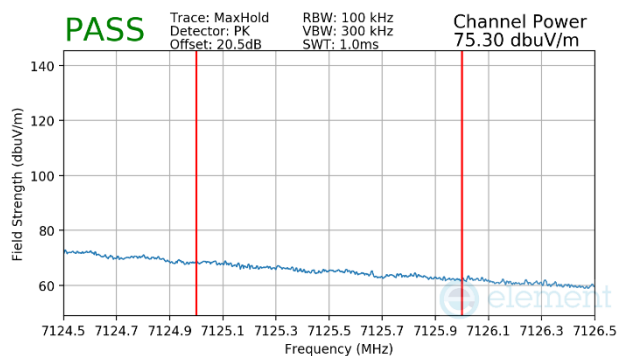

Plot 7-601 SDM Diversity Radiated Upper Band Edge (Peak – UNII Band 8)

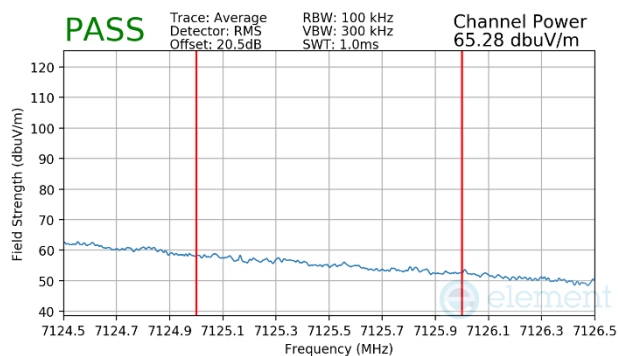


Plot 7-602 SDM Diversity Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 222 of 239


V 11.0 5/2025

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5955MHz
Channel	1

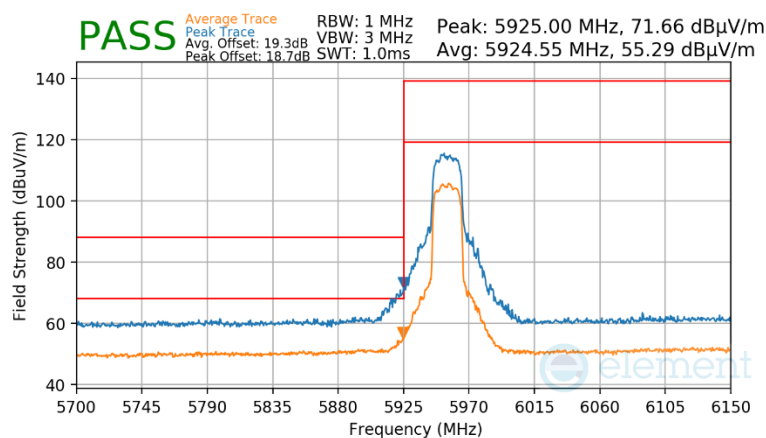

Plot 7-603 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7095MHz
Channel	229

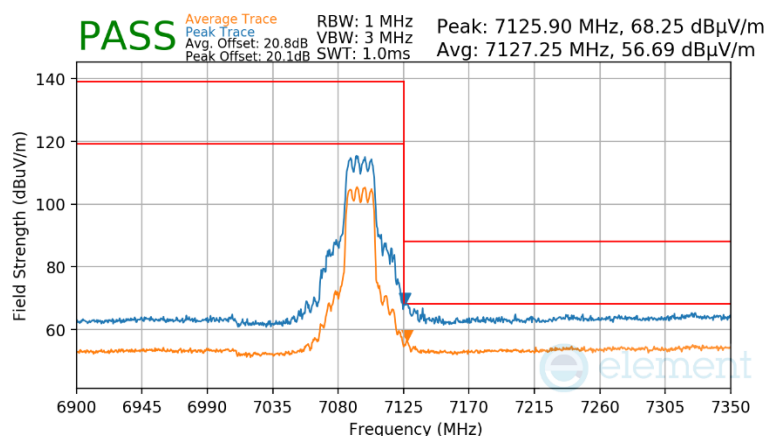


Plot 7-604 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)


FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 223 of 239

V 11.0 5/2025

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7115MHz
Channel	233

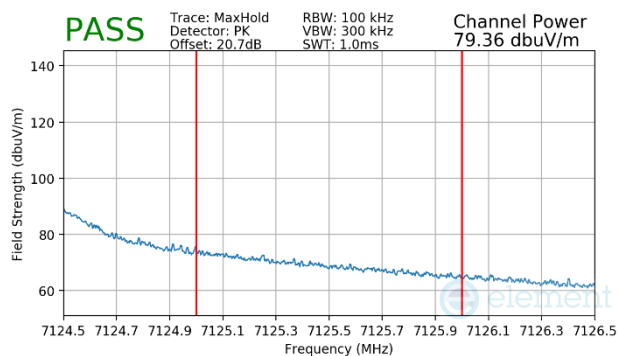

Plot 7-605 SDM Diversity Radiated Upper Band Edge (Peak – UNII Band 8)

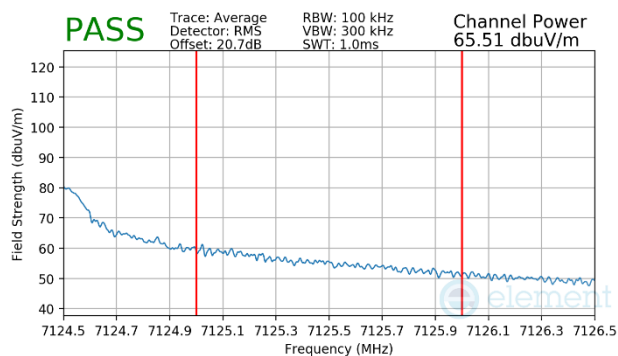


Plot 7-606 SDM Diversity Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 224 of 239

V 11.0 5/2025


7.7.20 CDD/SDM Diversity Radiated Band Edge Measurements (40MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5965MHz
Channel	3

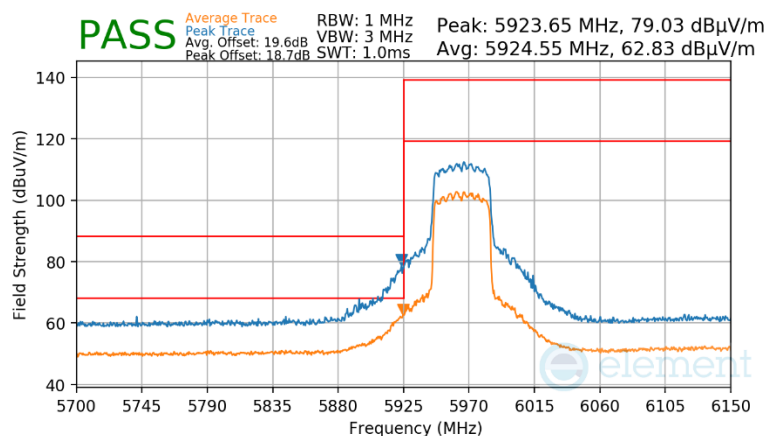

Plot 7-607 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085MHz
Channel	227

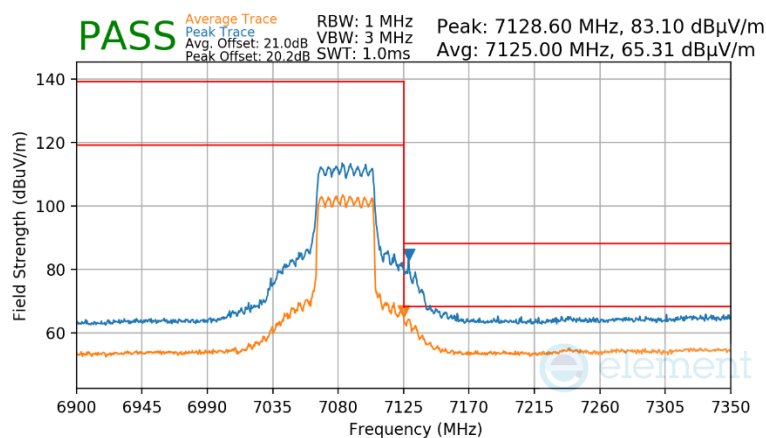


Plot 7-608 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 225 of 239

V 11.0 5/2025


7.7.21 CDD/SDM Diversity Radiated Band Edge Measurements (80MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5985MHz
Channel	7

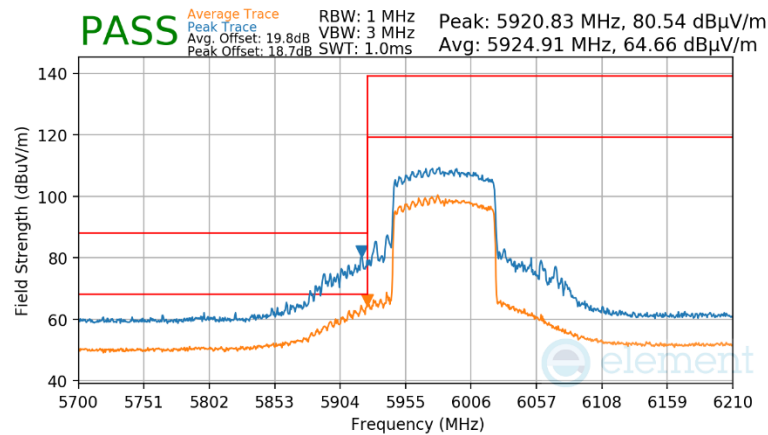

Plot 7-609 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025MHz
Channel	215

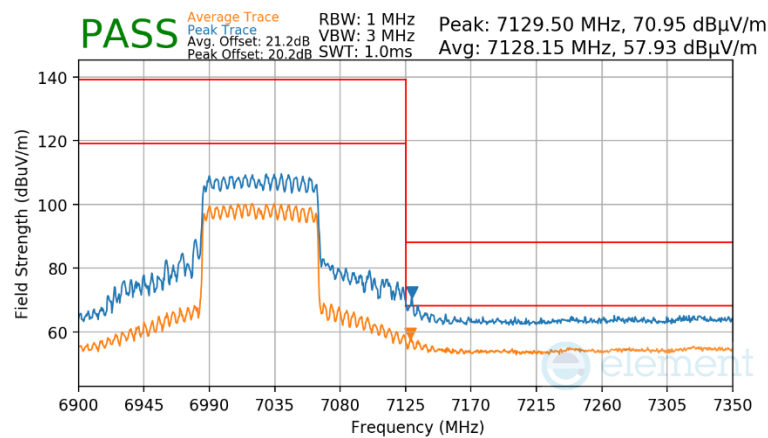


Plot 7-610 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 226 of 239


7.7.22 CDD/SDM Diversity Radiated Band Edge Measurements (160MHz BW)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6025MHz
Channel	15

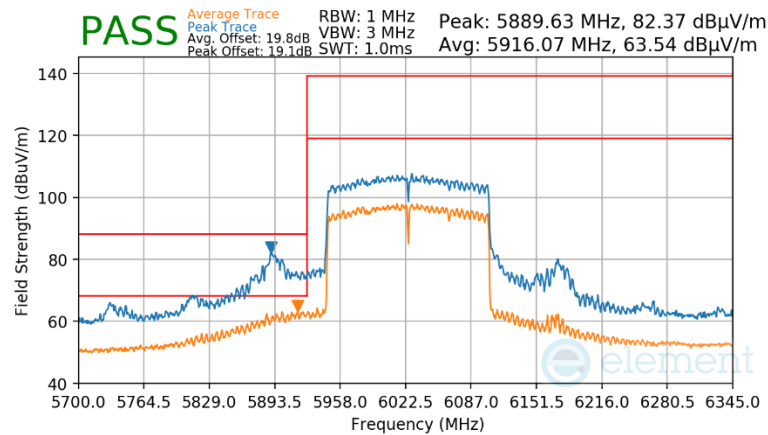

Plot 7-611 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode	802.11be-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6985MHz
Channel	207

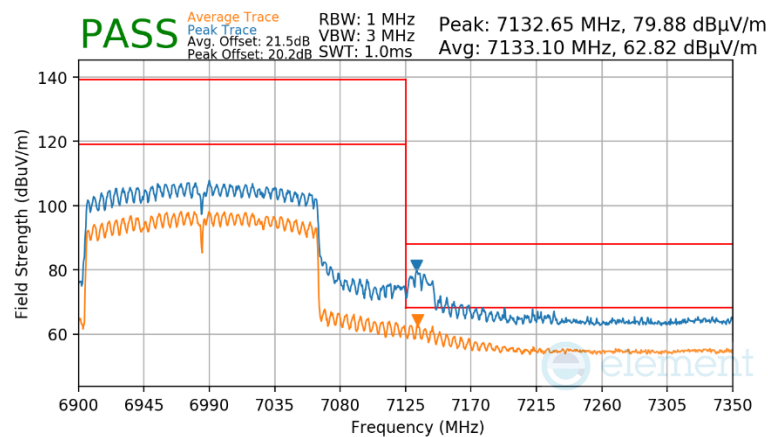

Plot 7-612 SDM Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 227 of 239

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-106 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-106. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 228 of 239

V 11.0 5/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

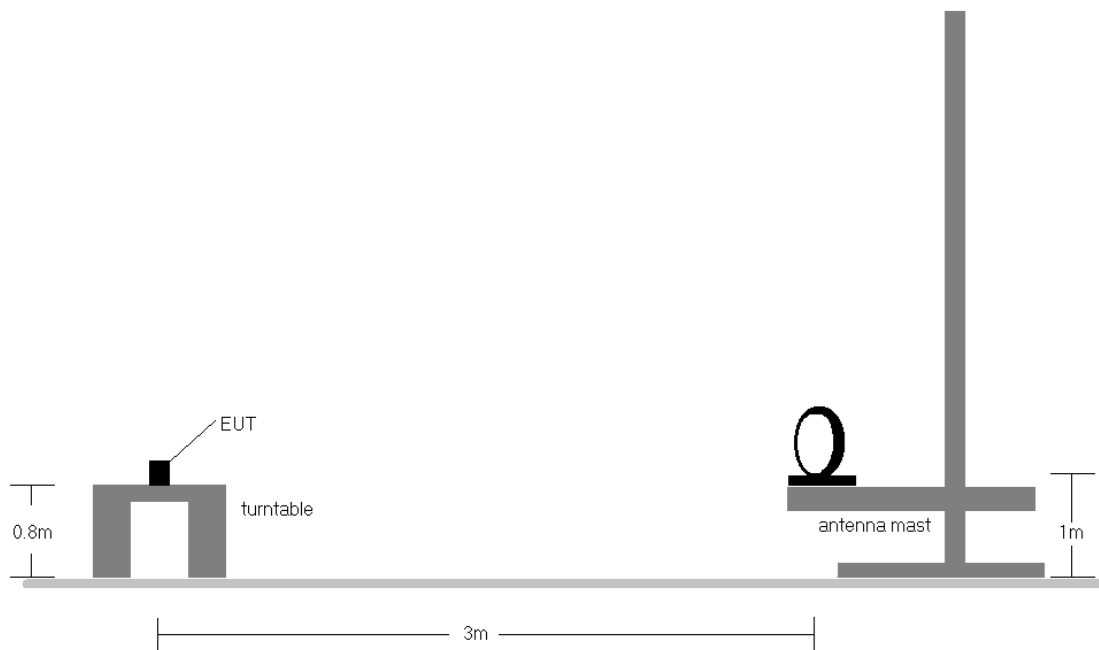


Figure 7-7. Radiated Test Setup < 30MHz

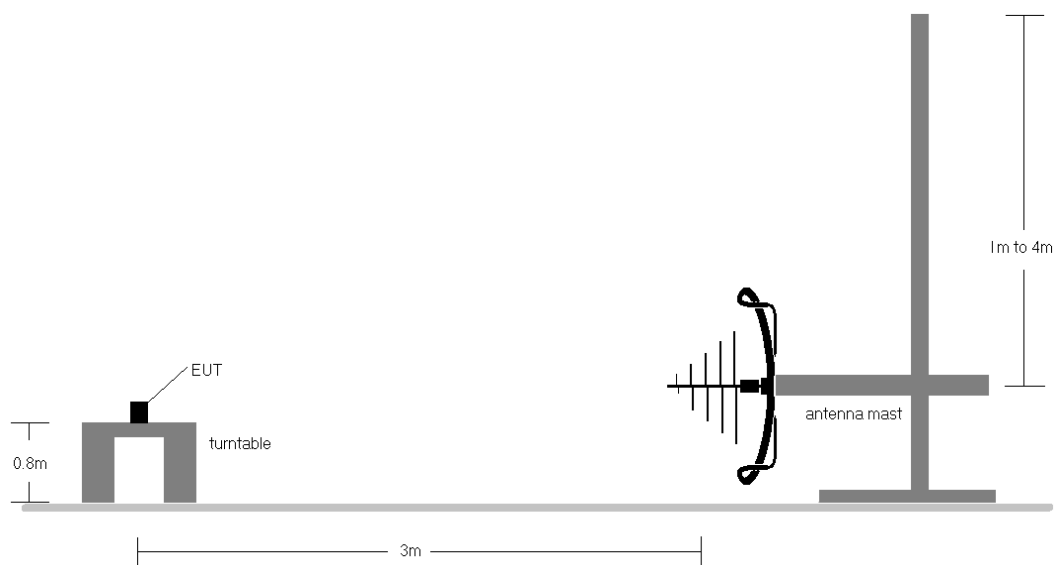


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 229 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-106.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
11. All antenna configurations were investigated and only the worst case is reported.
12. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamp Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 230 of 239

V 11.0 5/2025

7.8.1 CDD Primary Radiated Spurious Emissions Measurements (Below 1GHz)

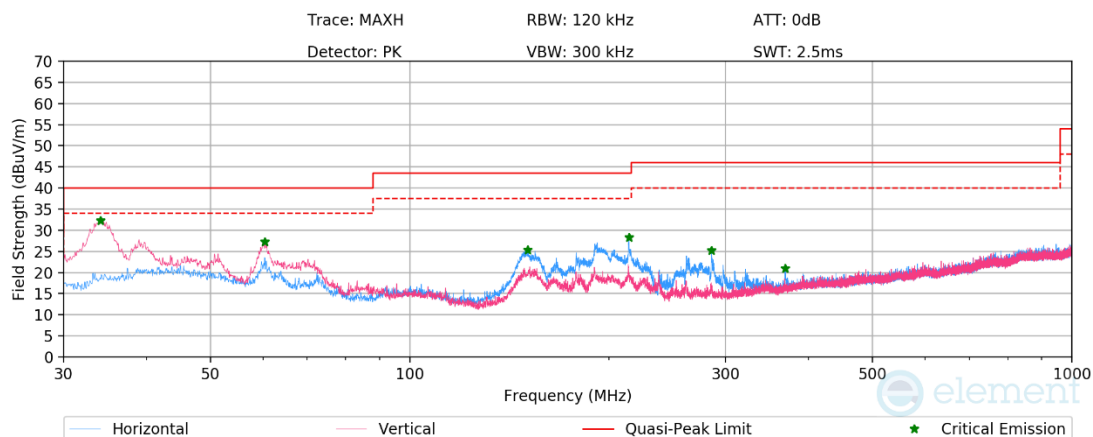

Plot 7-613. Radiated Spurious Emissions below 1GHz CDD Primary, 802.11be, Ch.45 with AC/DC adapter


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
34.08	Max-Peak	V	100	312	-58.52	-16.16	32.32	40.00	-7.68
60.42	Max-Peak	V	200	294	-65.18	-14.55	27.27	40.00	-12.73
150.72	Max-Peak	H	200	246	-63.66	-18.04	25.30	43.50	-18.20
214.15	Max-Peak	H	200	328	-64.02	-14.63	28.34	43.50	-15.16
285.55	Max-Peak	H	100	100	-69.47	-12.30	25.23	46.00	-20.77
369.01	Max-Peak	H	100	59	-75.82	-10.25	20.93	46.00	-25.07

Table 7-107. Radiated Spurious Emissions Measurement below 1GHz CDD Primary, 802.11be, Ch.45 with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 231 of 239

V 11.0 5/2025

7.8.2 CDD Diversity Radiated Spurious Emissions Measurements (Below 1GHz)

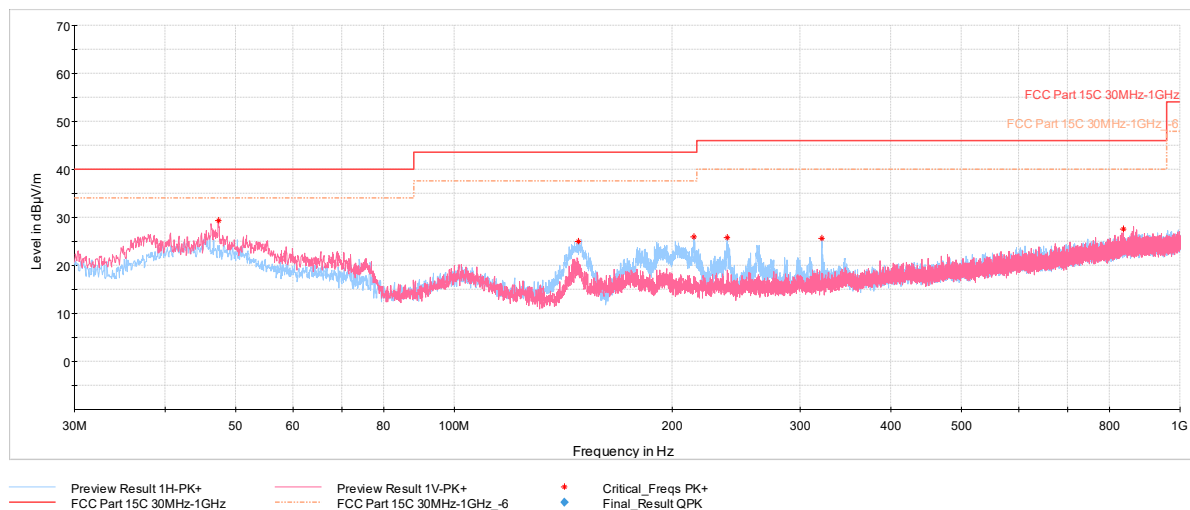

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
47.36	Max-Peak	V	100	359	-62.25	-15.40	29.35	40.00	-10.65
148.19	Max-Peak	H	100	203	-60.58	-21.38	25.04	43.52	-18.48
213.91	Max-Peak	H	100	140	-62.88	-18.16	25.96	43.52	-17.56
237.77	Max-Peak	H	100	163	-64.45	-16.77	25.78	46.02	-20.24
321.00	Max-Peak	H	100	132	-66.51	-14.80	25.69	46.02	-20.33
835.78	Max-Peak	V	300	0	-74.31	-5.11	27.58	46.02	-18.44

Table 7-108. Radiated Spurious Emissions Measurement below 1GHz CDD Diversity, 802.11be, Ch.45 with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 232 of 239

V 11.0 5/2025

7.9 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-109. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 233 of 239

V 11.0 5/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

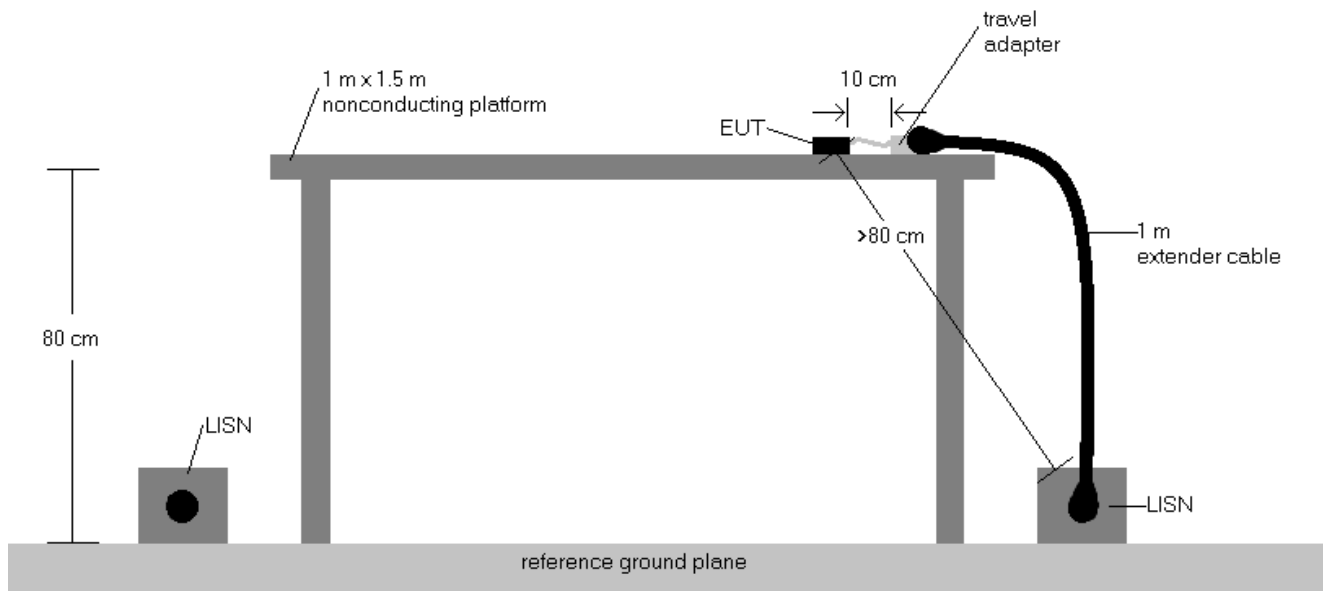



Figure 7-9. Test Instrument & Measurement Setup

Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - EUT powered by host PC via USB-C cable with wire charger
- The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.
- The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 234 of 239

V 11.0 5/2025

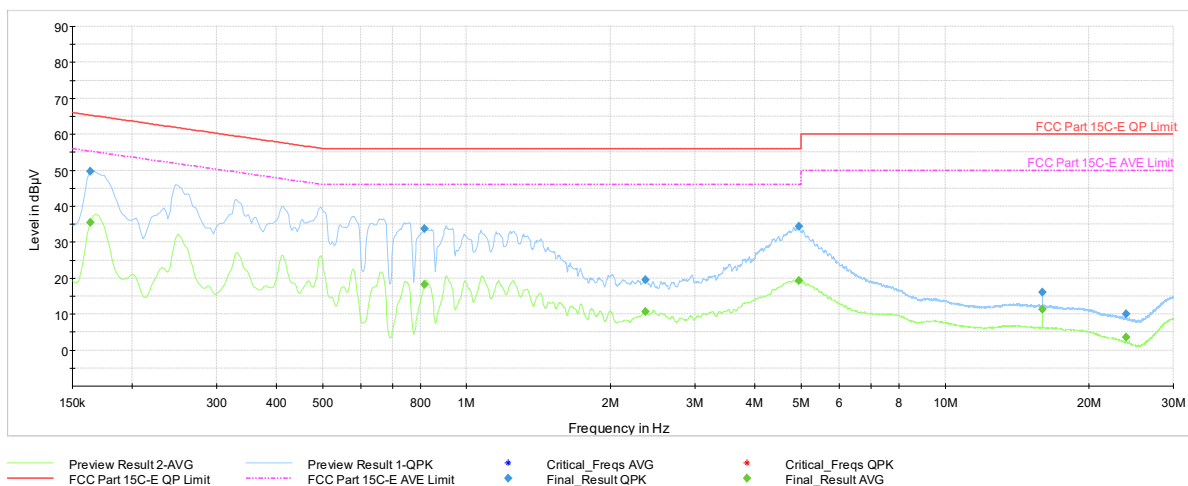

Plot 7-615. AC Line Conducted Plot with 802.11be CDD Primary – Ch.45 (L1), with AC/DC adapter


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	—	35.39	55.28	-19.89	L1	GND
0.164	FINAL	49.6	—	65.28	-15.66	L1	GND
0.816	FINAL	—	18.29	46.00	-27.71	L1	GND
0.816	FINAL	33.7	—	56.00	-22.35	L1	GND
2.364	FINAL	—	10.71	46.00	-35.29	L1	GND
2.364	FINAL	19.6	—	56.00	-36.43	L1	GND
4.949	FINAL	34.3	—	56.00	-21.66	L1	GND
4.949	FINAL	—	19.37	46.00	-26.63	L1	GND
15.952	FINAL	16.0	—	60.00	-43.96	L1	GND
15.952	FINAL	—	11.37	50.00	-38.63	L1	GND
23.928	FINAL	—	3.59	50.00	-46.41	L1	GND
23.928	FINAL	10.0	—	60.00	-50.04	L1	GND

Table 7-110. AC Line Conducted Data with 802.11be CDD Primary – Ch. 45 (L1) with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 235 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

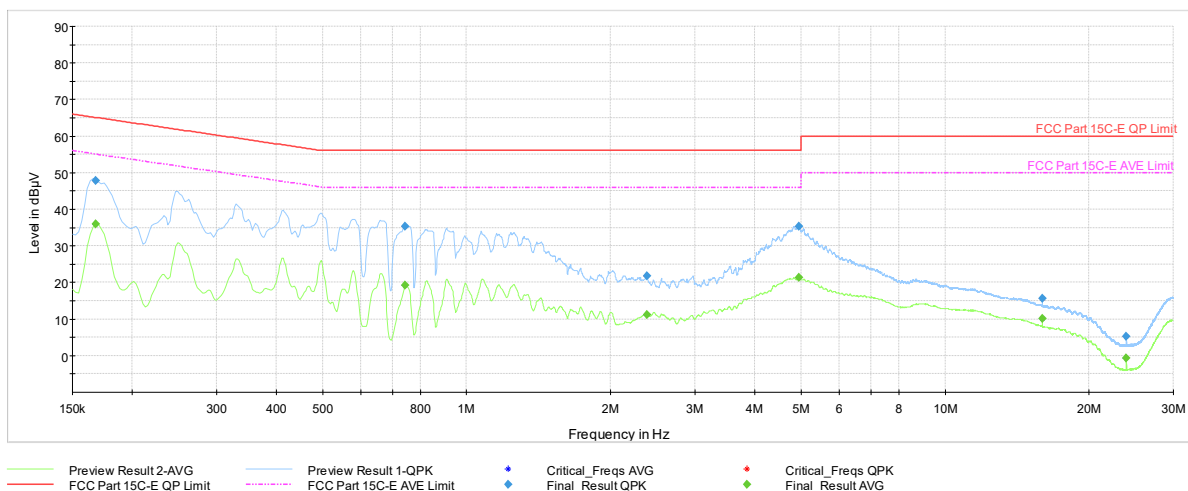

Plot 7-616. AC Line Conducted Plot with 802.11be CDD Primary – Ch. 45 (N), with AC/DC adapter


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	—	36.01	55.06	-19.05	N	GND
0.168	FINAL	47.9	—	65.06	-17.12	N	GND
0.744	FINAL	—	19.20	46.00	-26.80	N	GND
0.744	FINAL	35.3	—	56.00	-20.69	N	GND
2.384	FINAL	—	11.25	46.00	-34.75	N	GND
2.384	FINAL	21.8	—	56.00	-34.19	N	GND
4.947	FINAL	35.4	—	56.00	-20.64	N	GND
4.947	FINAL	—	21.33	46.00	-24.67	N	GND
15.956	FINAL	15.6	—	60.00	-44.44	N	GND
15.956	FINAL	—	10.12	50.00	-39.88	N	GND
23.933	FINAL	—	-0.67	50.00	-50.67	N	GND
23.933	FINAL	5.3	—	60.00	-54.70	N	GND

Table 7-111. AC Line Conducted Data with 802.11be CDD Primary – Ch. 45 (N), with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 236 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

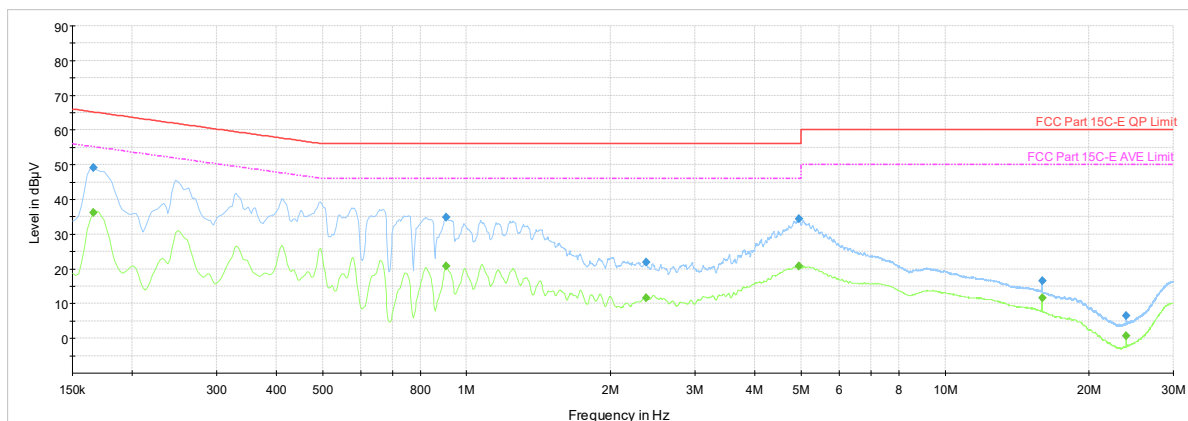


Plot 7-617. AC Line Conducted Plot with 802.11be CDD Diversity – Ch.45 (L1), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.166	FINAL	—	36.16	55.17	-19.01	L1	GND
0.166	FINAL	49.2	—	65.17	-15.96	L1	GND
0.906	FINAL	—	20.83	46.00	-25.17	L1	GND
0.906	FINAL	34.8	—	56.00	-21.19	L1	GND
2.375	FINAL	—	11.65	46.00	-34.35	L1	GND
2.375	FINAL	22.0	—	56.00	-34.03	L1	GND
4.954	FINAL	34.5	—	56.00	-21.52	L1	GND
4.954	FINAL	—	20.82	46.00	-25.18	L1	GND
15.941	FINAL	16.6	—	60.00	-43.37	L1	GND
15.941	FINAL	—	11.76	50.00	-38.24	L1	GND
23.912	FINAL	—	0.65	50.00	-49.35	L1	GND
23.912	FINAL	6.6	—	60.00	-53.37	L1	GND

Table 7-112. AC Line Conducted Data with 802.11be CDD Diversity – Ch. 45 (L1) with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 237 of 239

V 11.0 5/2025

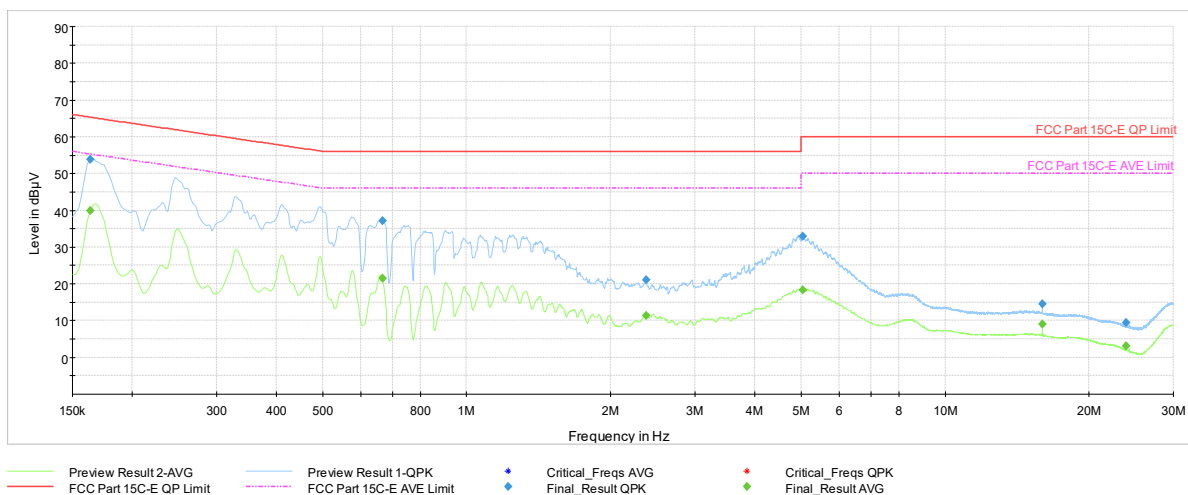

Plot 7-618. AC Line Conducted Plot with 802.11be CDD Diversity – Ch. 45 (N), with AC/DC adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	—	39.98	55.28	-15.31	N	GND
0.164	FINAL	53.9	—	65.28	-11.36	N	GND
0.668	FINAL	—	21.52	46.00	-24.48	N	GND
0.668	FINAL	37.2	—	56.00	-18.80	N	GND
2.373	FINAL	—	11.31	46.00	-34.69	N	GND
2.373	FINAL	21.0	—	56.00	-34.98	N	GND
5.039	FINAL	33.0	—	60.00	-26.99	N	GND
5.039	FINAL	—	18.40	50.00	-31.60	N	GND
15.945	FINAL	14.5	—	60.00	-45.48	N	GND
15.945	FINAL	—	9.00	50.00	-41.00	N	GND
23.917	FINAL	—	3.11	50.00	-46.89	N	GND
23.917	FINAL	9.4	—	60.00	-50.56	N	GND

Table 7-113. AC Line Conducted Data with 802.11be CDD Diversity – Ch. 45 (N), with AC/DC adapter

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 238 of 239

V 11.0 5/2025

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3361** and **IC: 579C-A3361** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3361 IC: 579C-A3361		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170041-24-R1.BCG	Test Dates: 5/12/2025 - 8/27/2025	EUT Type: Tablet Device	Page 239 of 239

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.