



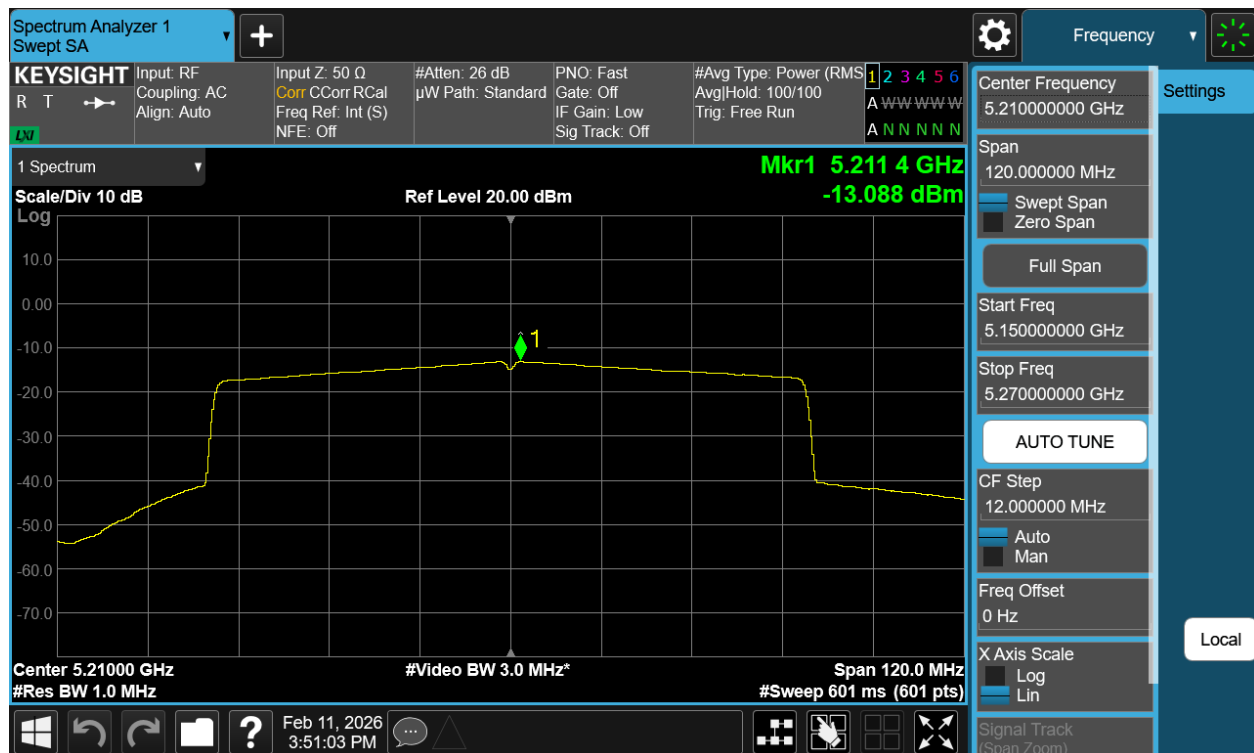


Plot 7-51 PSD CDD Antenna 0 (80MHz BW 802.11ax(SU) - Ch.42)

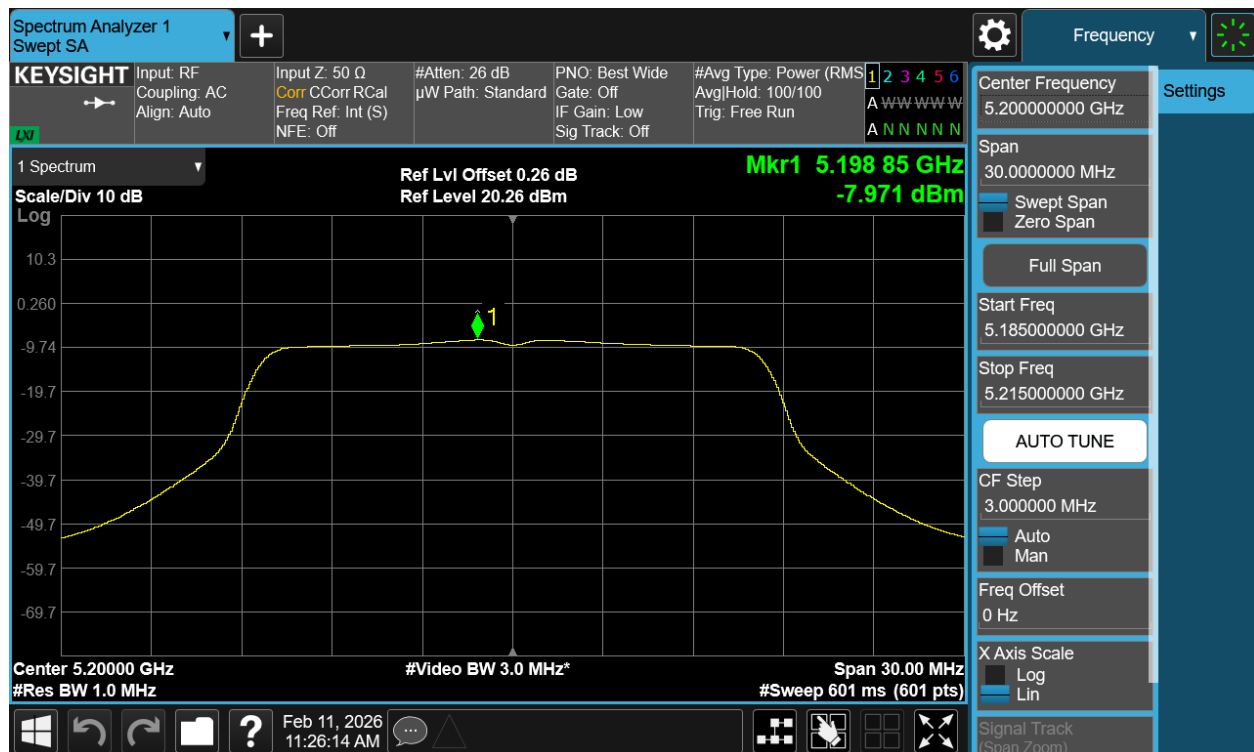


Plot 7-52 PSD CDD Antenna 1 (20MHz BW 802.11a - Ch.40)

FCC ID: BCGA3374 IC: 579C-A3374	element	Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 83 of 158

V 12.0 03/03/2026

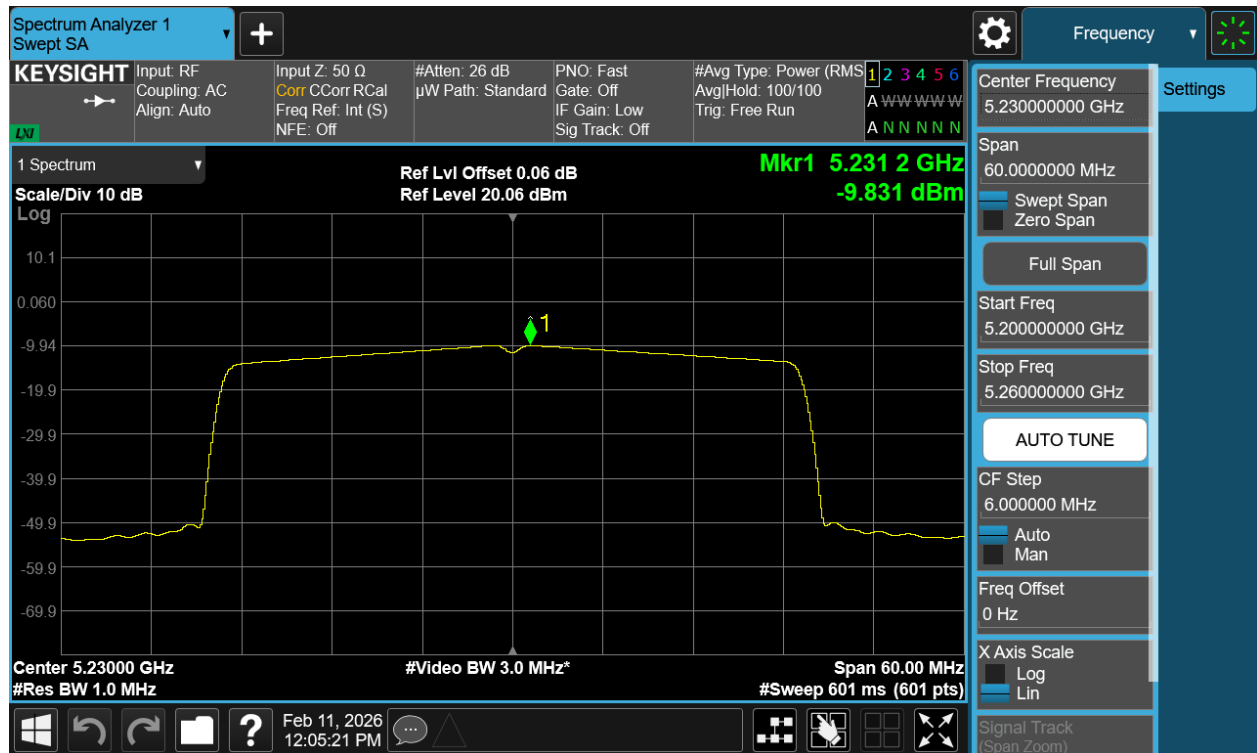

Plot 7-53 PSD CDD Antenna 1 (40MHz BW 802.11ax(SU) - Ch.46)

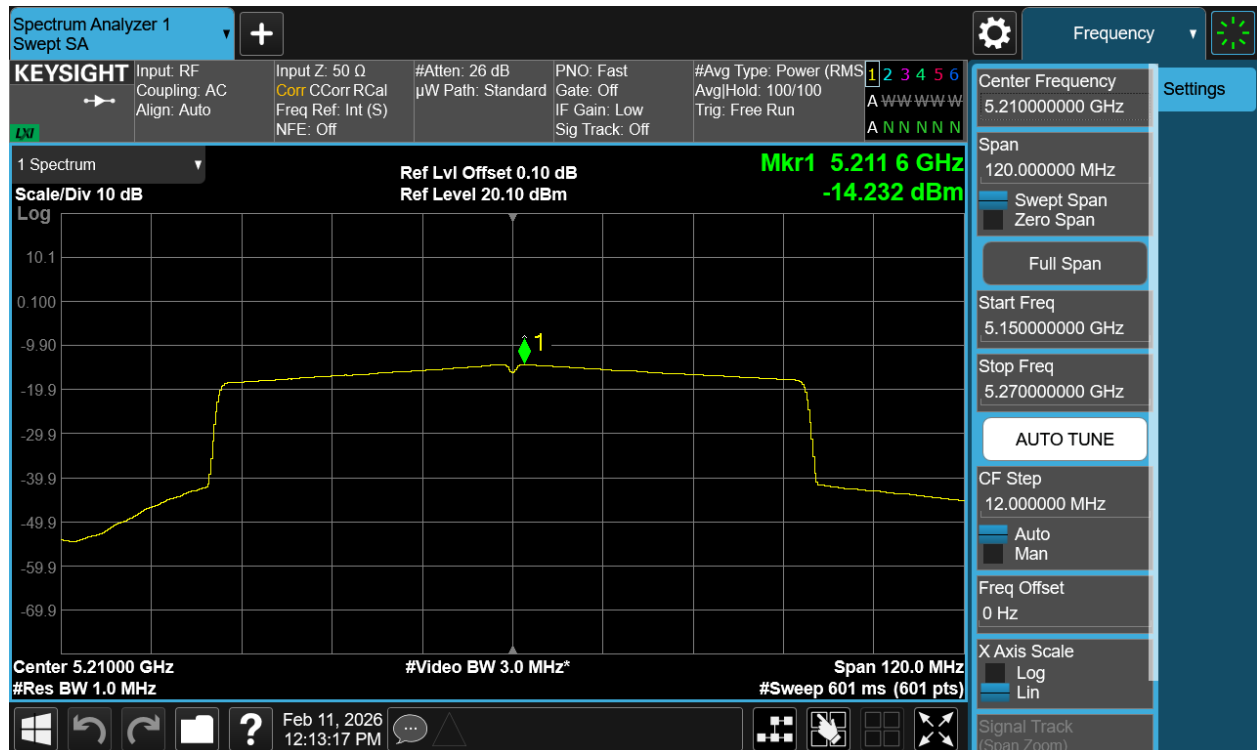

Plot 7-54 PSD CDD Antenna 1 (80MHz BW 802.11ax(SU) - Ch.42)

FCC ID: BCGA3374 IC: 579C-A3374	element	Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 84 of 158

Notes:

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 662911 v02r01 Section E)1), the power spectral density at Antenna 0 and Antenna 1 were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Section 14.6.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Section 14.6.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample CDD/SDM Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average power spectral density was measured to be -7.00 dBm for Antenna 0 and -8.42 dBm for Antenna 1.

$$\text{Antenna 0} + \text{Antenna 1} = \text{CDD/SDM}$$

$$(-7.00 \text{ dBm} + (-8.42 \text{ dBm})) = (0.200 \text{ mW} + 0.144 \text{ mW}) = 0.344 \text{ mW} = -4.64 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average MIMO power spectral density was calculated to be -4.64 dBm with directional gain of 7.12 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$-4.64 \text{ dBm} + 7.12 \text{ dBi} = 2.48 \text{ dBm}$$

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 85 of 158

7.6 Radiated Spurious Emissions – Above 1GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n, /ax(SU) (20MHz BW), 802.11n, /ax(SU) (40MHz BW), and 802.11ac, /ax(SU) (80MHz), and 802.11ac, /ax(SU), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-57 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-57. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Sections 12.7.7, 12.7.6
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 86 of 158

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

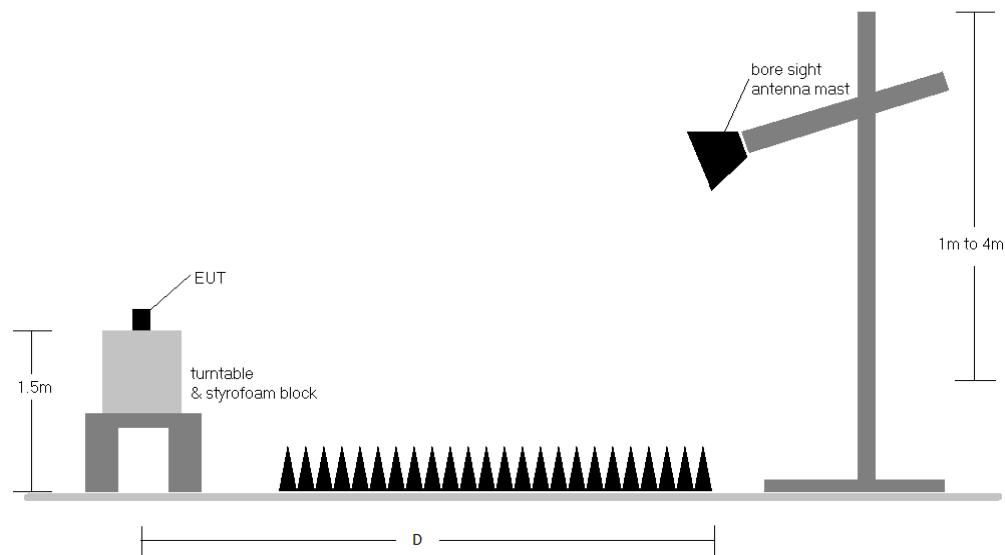


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 87 of 158

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-57.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-57. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through one orthogonal plane.
4. This unit was tested while powered by an AC/DC adaptor via USB-C cable.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. All data rates and antenna configurations were investigated and only the worst case is reported.
9. The unit was tested with all possible modes and only the highest emission is reported.
10. The unit was tested at its highest output power.
11. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6.3 to 7.6.11 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 88 of 158

7.6.1 CDD Radiated Spurious Emission

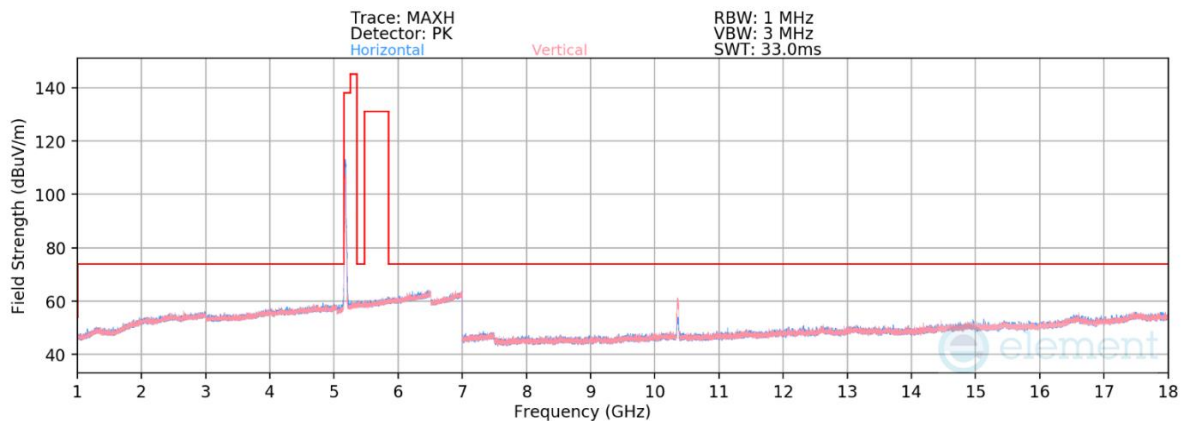

Plot 7-55. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 36)

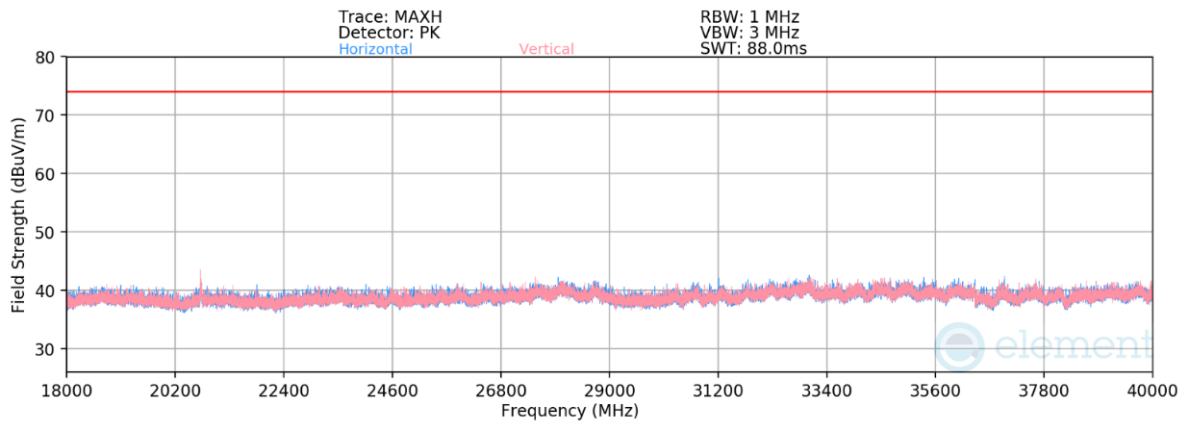


Plot 7-56. Radiated Spurious Emissions 18GHz - 40GHz CDD (802.11n – Ch. 36)

Mode:	802.11n
Data Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	V	225	258	-52.43	9.28	0.00	63.86	68.23	-4.37
* 15540.00	Average	V	-	-	-79.42	13.60	0.00	41.18	53.98	-12.80
* 15540.00	Peak	V	-	-	-68.94	13.60	0.00	51.66	73.98	-22.32
* 20720.00	Average	V	-	-	-61.32	-6.06	-9.54	30.08	53.98	-23.90
* 20720.00	Peak	V	-	-	-46.99	-6.06	-9.54	44.41	73.98	-29.57
25900.00	Peak	V	-	-	-49.93	-5.81	-9.54	41.72	68.23	-26.51
31080.00	Peak	V	-	-	-49.93	-4.36	-9.54	43.17	68.23	-25.06

Table 7-58. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 89 of 158

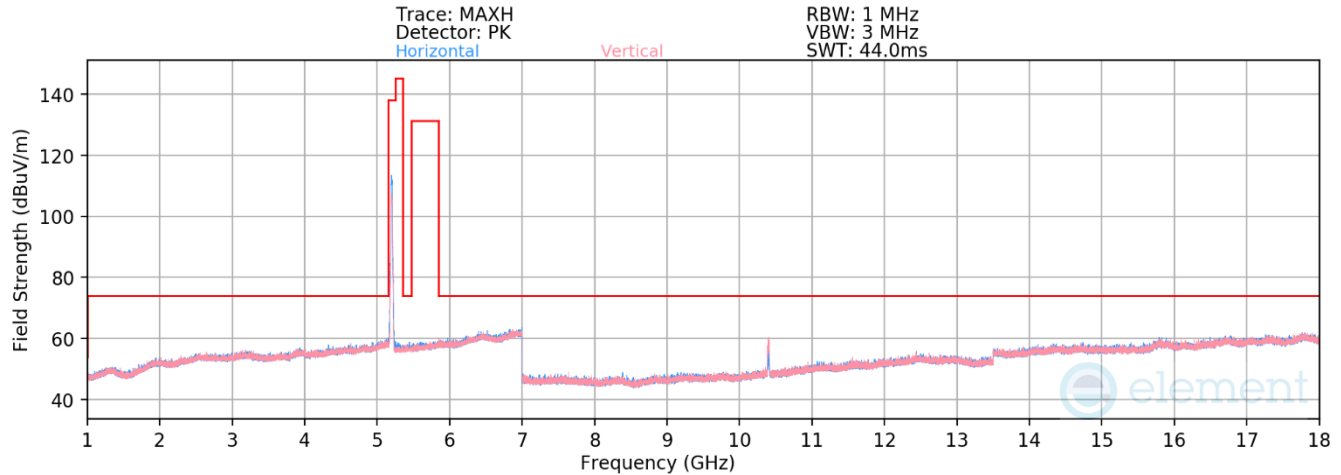


Plot 7-57. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 40)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	V	163	227	-61.26	17.25	62.98	68.23	-5.25
* 15600.00	Average	H	-	-	-86.15	25.87	46.72	53.98	-7.26
* 15600.00	Peak	H	-	-	-74.17	25.87	58.70	73.98	-15.28

Table 7-59. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 90 of 158

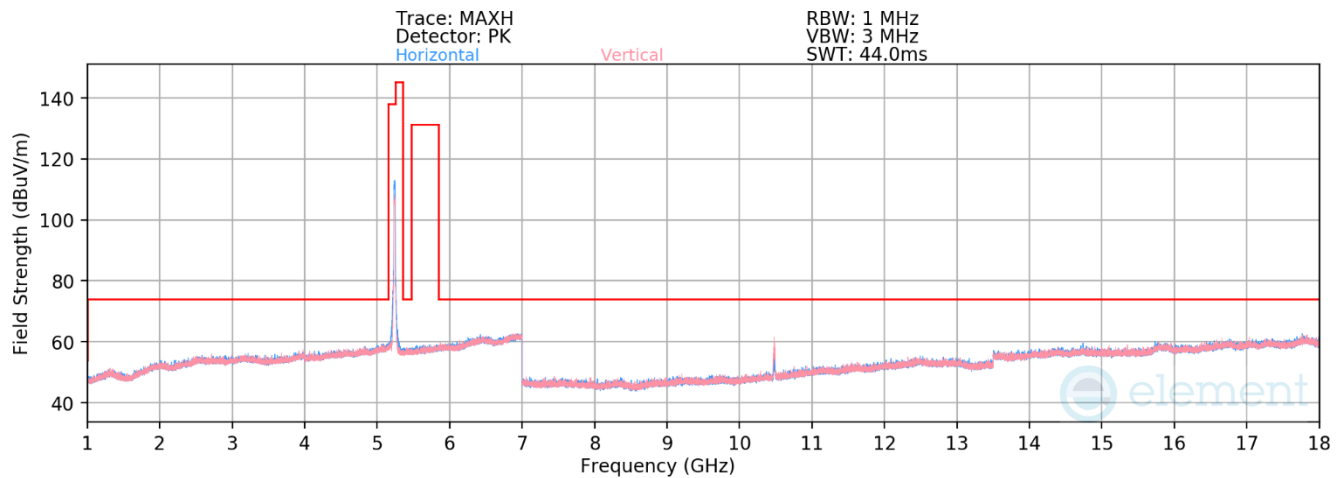


Plot 7-58. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 48)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	V	191	225	-61.46	17.27	62.82	68.23	-5.41
* 15720.00	Average	V	185	114	-76.38	16.35	46.96	53.98	-7.02
* 15720.00	Peak	V	185	114	-65.40	16.35	57.95	73.98	-16.03

Table 7-60. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 91 of 158

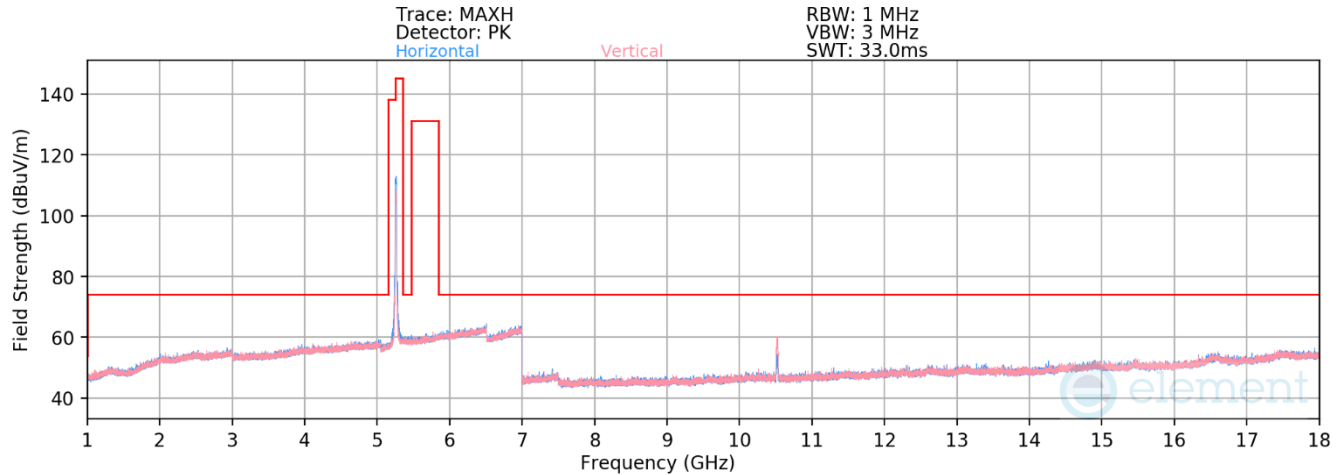


Plot 7-59. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 52)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	V	214	265	-63.06	9.41	63.54	68.23	-4.69
* 15780.00	Average	V	184	99	-74.21	13.13	45.92	53.98	-8.06
* 15780.00	Peak	V	184	99	-62.84	13.13	57.29	73.98	-16.69

Table 7-61. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 92 of 158

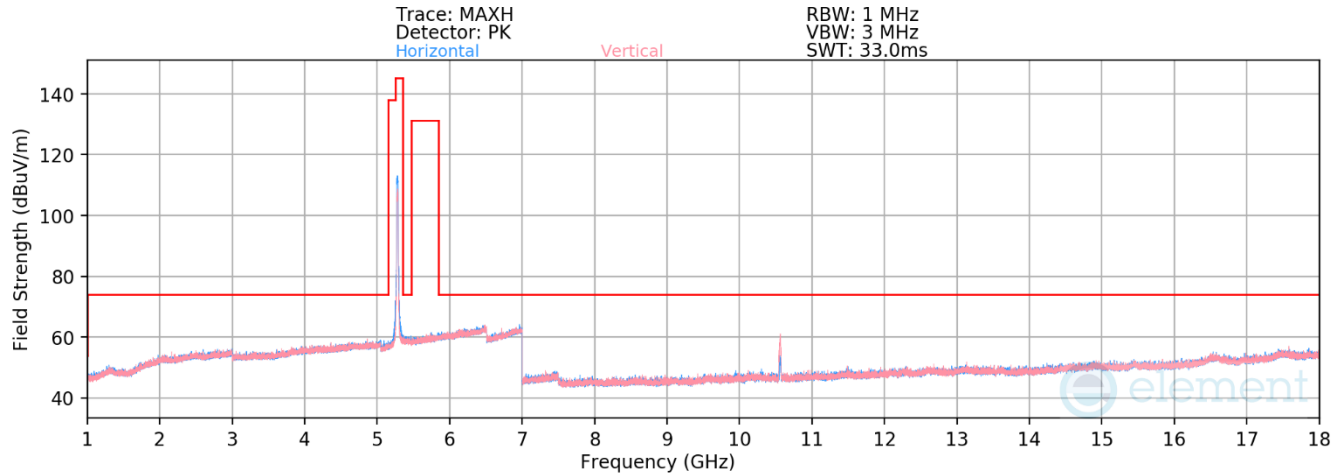


Plot 7-60. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 56)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	215	261	-52.72	9.61	63.89	68.23	-4.34
* 15840.00	Average	V	-	-	-78.69	13.37	41.68	53.98	-12.30
* 15840.00	Peak	V	-	-	-67.96	13.37	52.41	73.98	-21.57

Table 7-62. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 93 of 158

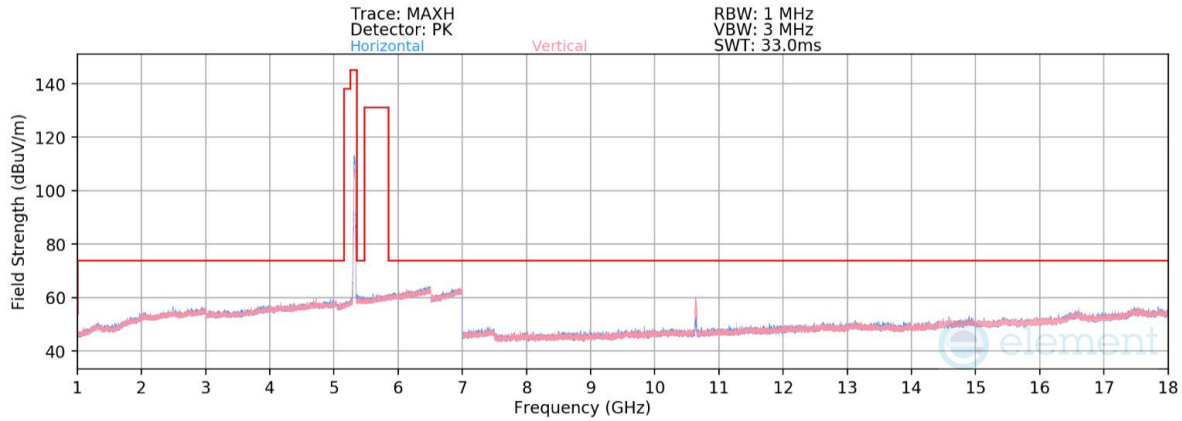

Plot 7-61. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 64)

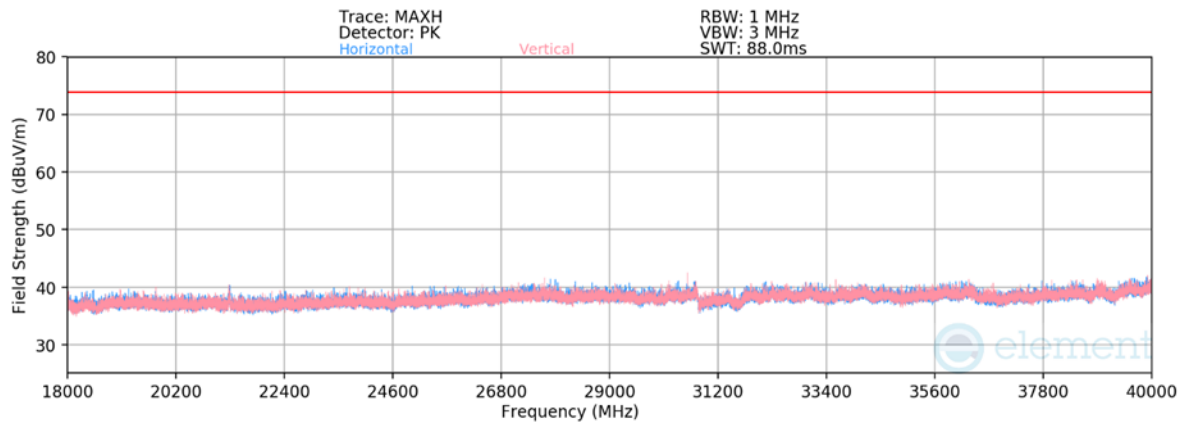


Plot 7-62. Radiated Spurious Emissions 18GHz - 40GHz CDD (802.11n – Ch. 64)

Mode:	802.11n
Data Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 10640.00	Average	V	277	251	-64.45	9.04	0.00	51.59	53.98	-2.39
* 10640.00	Peak	V	277	251	-54.47	9.04	0.00	61.57	73.98	-12.41
* 15960.00	Average	V	-	-	-79.54	13.63	0.00	41.09	53.98	-12.89
* 15960.00	Peak	V	-	-	-69.21	13.63	0.00	51.42	73.98	-22.56
* 21280.00	Average	V	-	-	-61.14	-6.54	-9.54	39.32	53.98	-13.68
* 21280.00	Peak	V	-	-	-49.35	-6.54	-9.54	51.11	73.98	-21.89
31920.00	Peak	V	-	-	-55.52	-6.73	-9.54	44.75	68.23	-28.25

Table 7-63. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

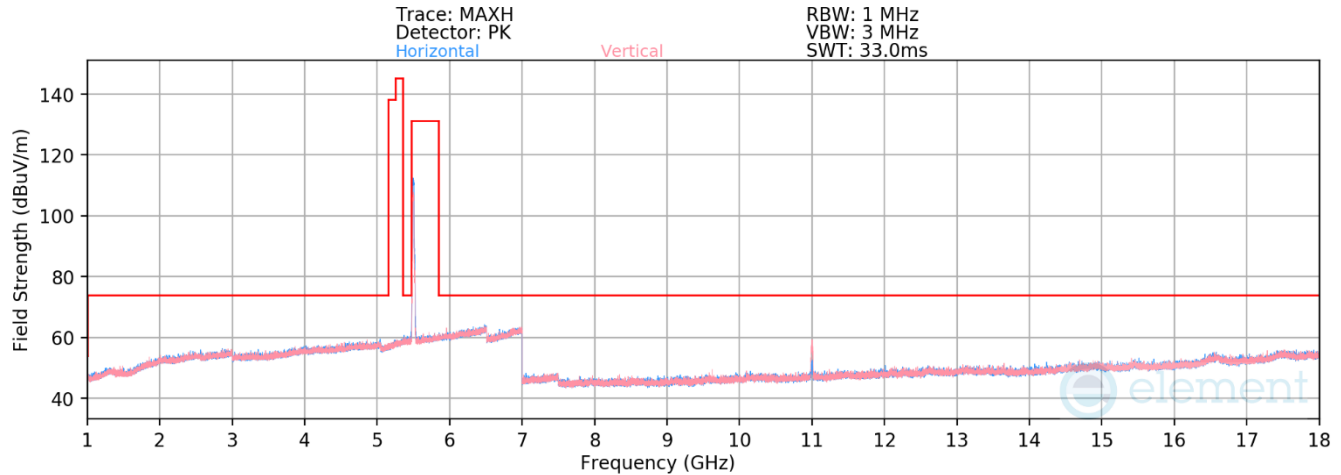


Plot 7-63. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 100)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	297	297	-66.02	9.73	50.71	53.98	-3.27
* 11000.00	Peak	V	297	297	-56.05	9.73	60.68	73.98	-13.30
16500.00	Peak	V	-	-	-69.66	15.94	53.27	68.23	-14.96

Table 7-64. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 95 of 158

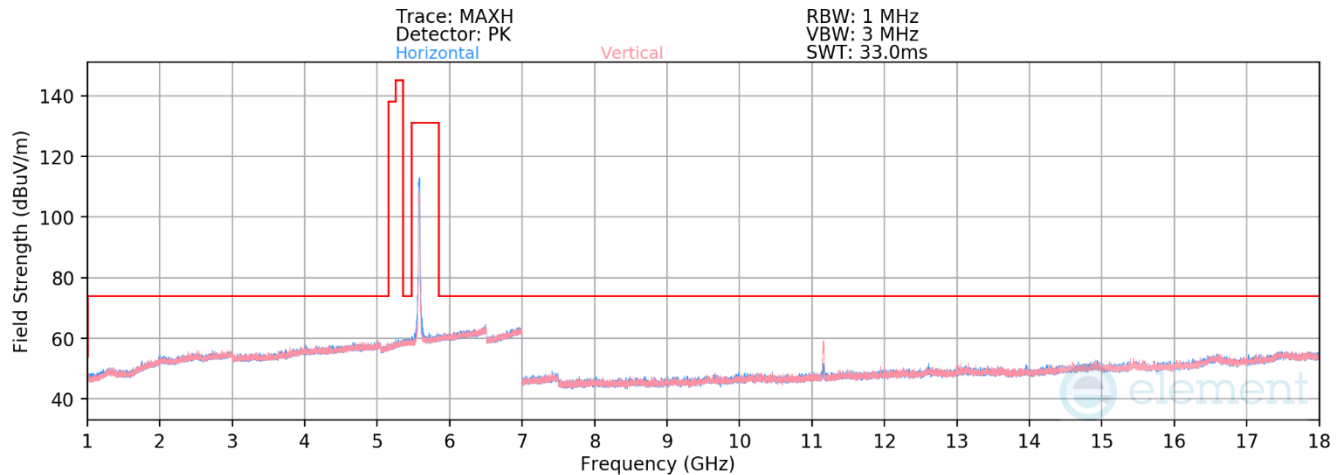


Plot 7-64. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 116)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	V	263	321	-65.85	9.74	50.88	53.98	-3.10
* 11160.00	Peak	V	263	321	-55.81	9.74	60.93	73.98	-13.05
16740.00	Peak	V	-	-	-68.41	15.16	53.74	68.23	-14.49

Table 7-65. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 96 of 158

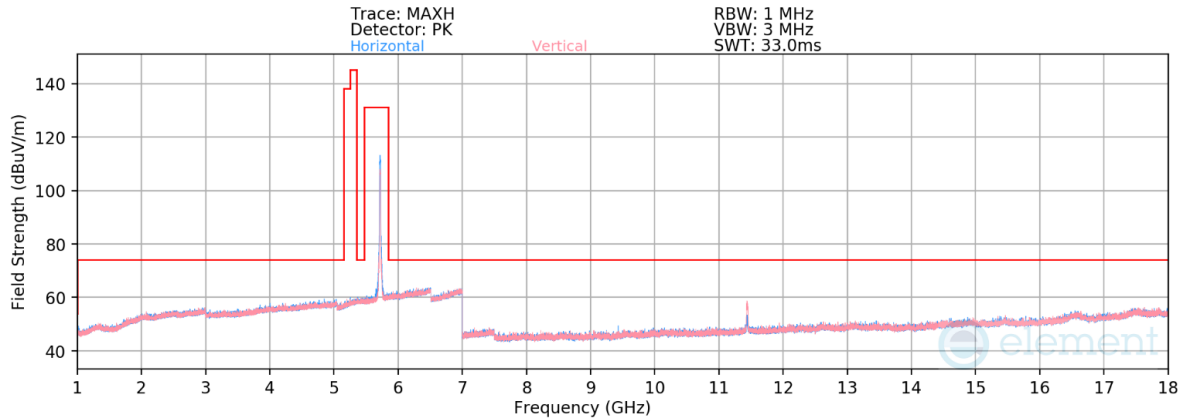

Plot 7-65. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 144)

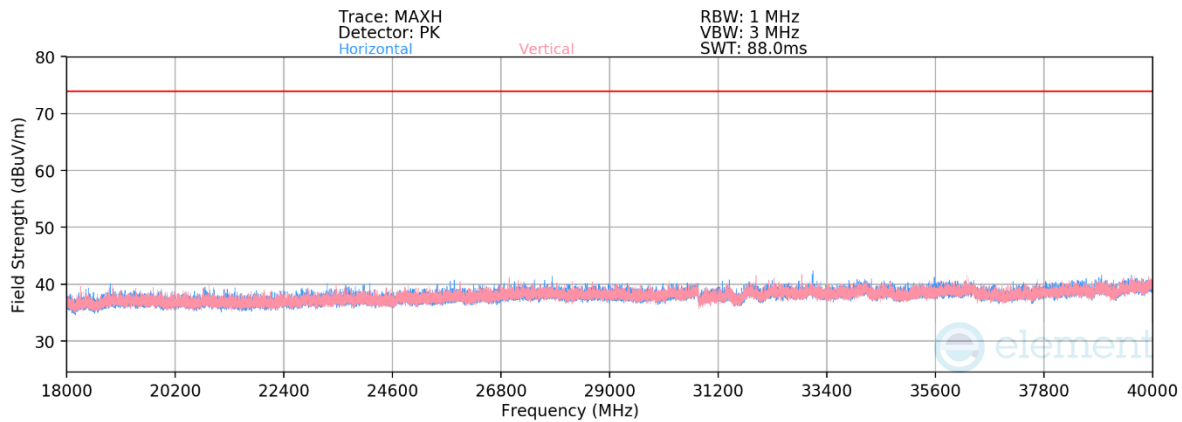


Plot 7-66. Radiated Spurious Emissions 18GHz - 40GHz CDD (802.11n – Ch. 144)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11440.00	Average	V	254	297	-66.10	10.29	0.00	51.19	53.98	-2.79
* 11440.00	Peak	V	254	297	-57.11	10.29	0.00	60.17	73.98	-13.81
17160.00	Peak	V	-	-	-69.46	16.36	0.00	53.90	68.23	-14.33
* 22880.00	Average	V	-	-	-56.45	-6.39	-9.54	34.62	53.98	-19.36
* 22880.00	Peak	V	-	-	-44.81	-6.39	-9.54	46.26	73.98	-27.72
28600.00	Peak	V	-	-	-50.32	-3.47	-9.54	43.67	68.23	-24.56
34320.00	Peak	V	-	-	-47.38	-4.44	-9.54	45.64	68.23	-22.59

Table 7-66. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

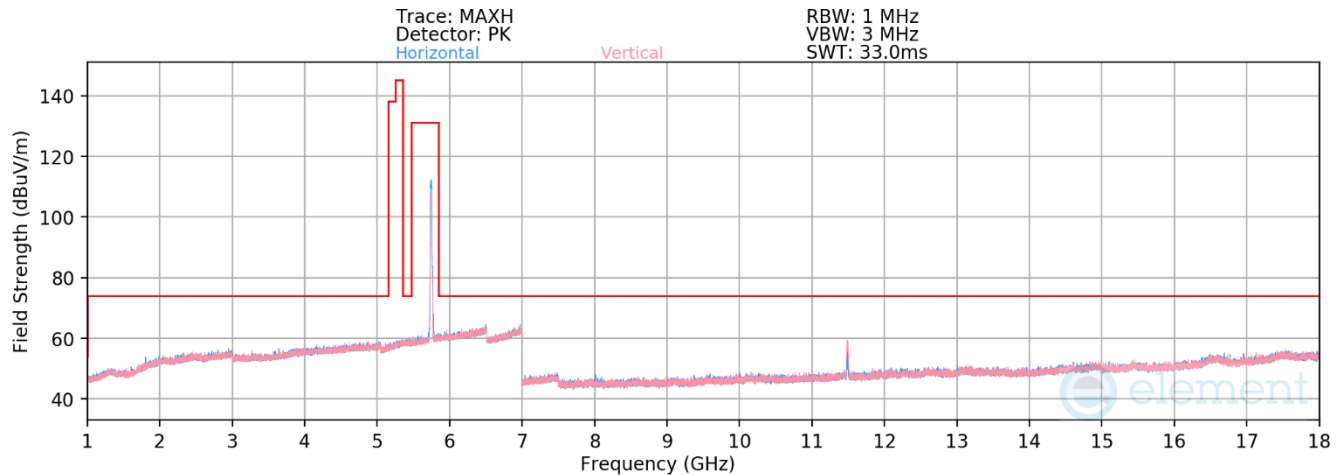


Plot 7-67. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 149)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	V	253	292	-66.03	10.07	51.04	53.98	-2.94
* 11490.00	Peak	V	253	292	-56.39	10.07	60.68	73.98	-13.30
17235.00	Peak	V	-	-	-69.42	16.29	53.87	68.23	-14.36

Table 7-67. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 98 of 158

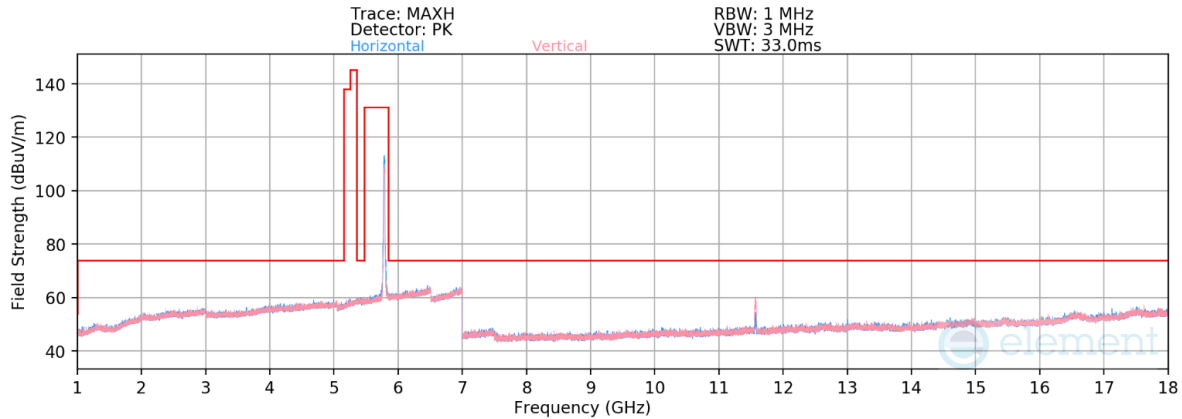

Plot 7-68. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 157)

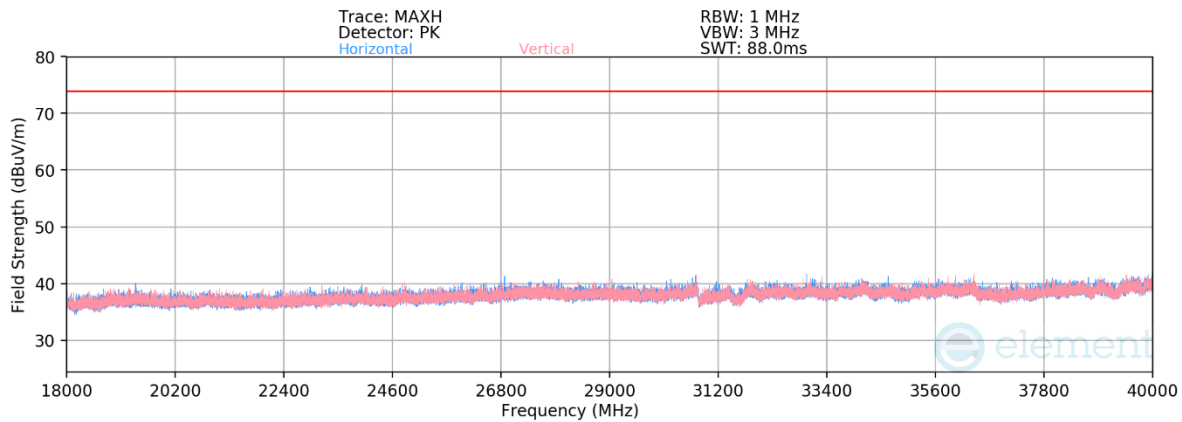

Plot 7-69. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 157)

Mode: 802.11n

Data Rate: MCS8

Distance of Measurements: 3 Meters


Operating Frequency: 5785MHz

Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11570.00	Average	V	248	294	-65.96	10.17	0.00	51.21	53.98	-2.77
* 11570.00	Peak	V	248	294	-56.28	10.17	0.00	60.89	73.98	-13.09
17355.00	Peak	V	-	-	-69.91	17.11	0.00	54.20	68.23	-14.03
23140.00	Peak	V	-	-	-45.28	-6.32	-9.54	45.86	68.23	-22.37
28925.00	Peak	V	-	-	-50.35	-3.41	-9.54	43.70	68.23	-24.53
34710.00	Peak	V	-	-	-46.62	-4.76	-9.54	46.08	68.23	-22.15

Table 7-68. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 99 of 158

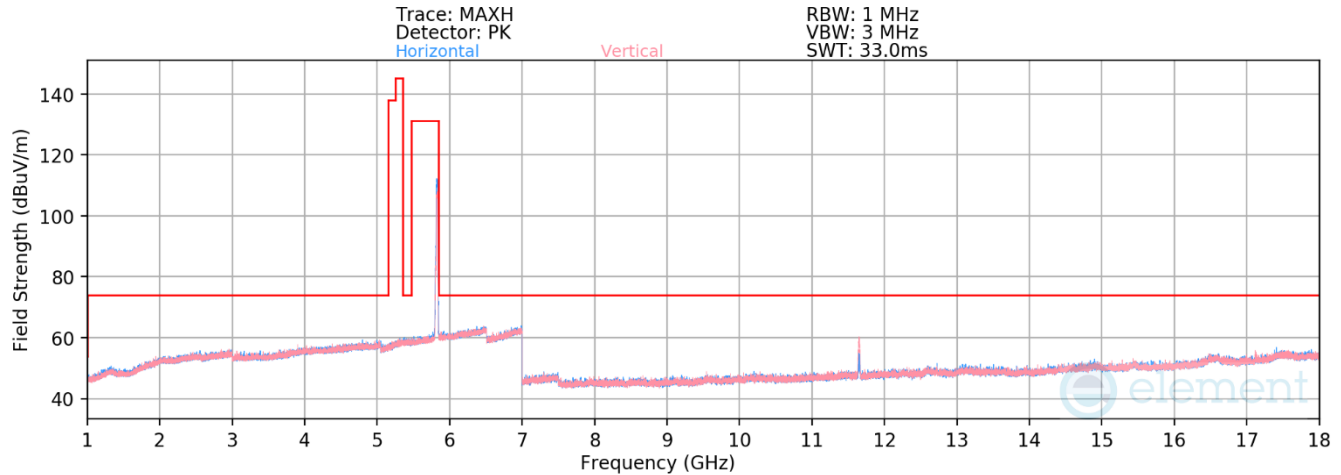


Plot 7-70. Radiated Spurious Emissions above 1GHz CDD (802.11n – Ch. 165)

Mode: 802.11n
Data Rate: MCS8
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	246	297	-66.33	10.37	51.05	53.98	-2.93
* 11650.00	Peak	V	246	297	-56.78	10.37	60.59	73.98	-13.39
17475.00	Peak	V	-	-	-68.72	19.04	57.32	68.23	-10.91

Table 7-69. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 100 of 158

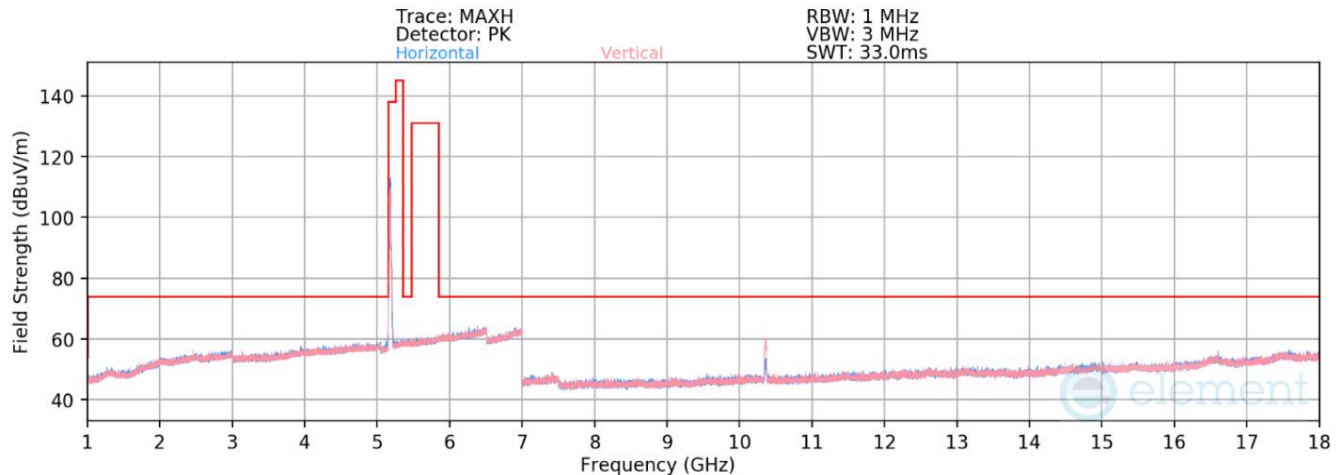


Plot 7-71. Radiated Spurious Emissions above 1GHz CDD (802.11ax(SU) – Ch. 36)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	V	201	266	-52.67	9.28	63.61	68.23	-4.62
* 15540.00	Average	V	-	-	-79.82	13.60	40.79	53.98	-13.19
* 15540.00	Peak	V	-	-	-69.80	13.60	50.80	73.98	-23.18

Table 7-70. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 101 of 158

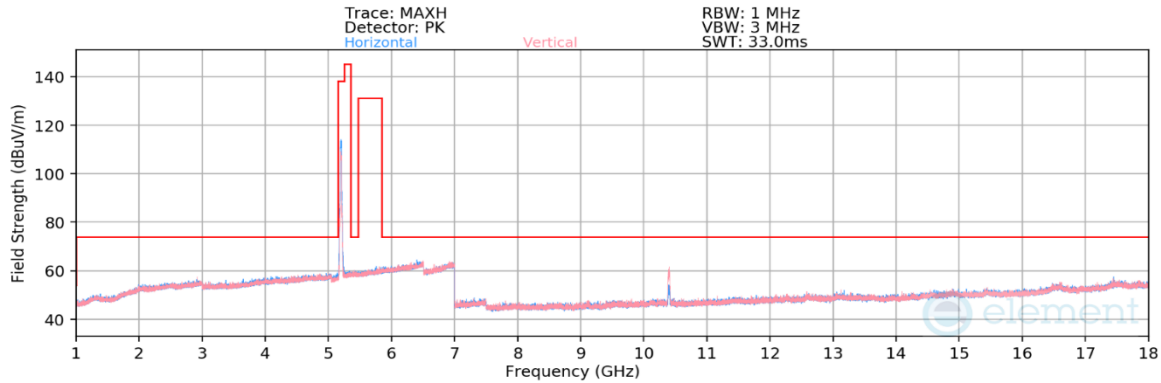

Plot 7-72. Radiated Spurious Emissions above 1GHz CDD (802.11ax(SU) – Ch. 40)

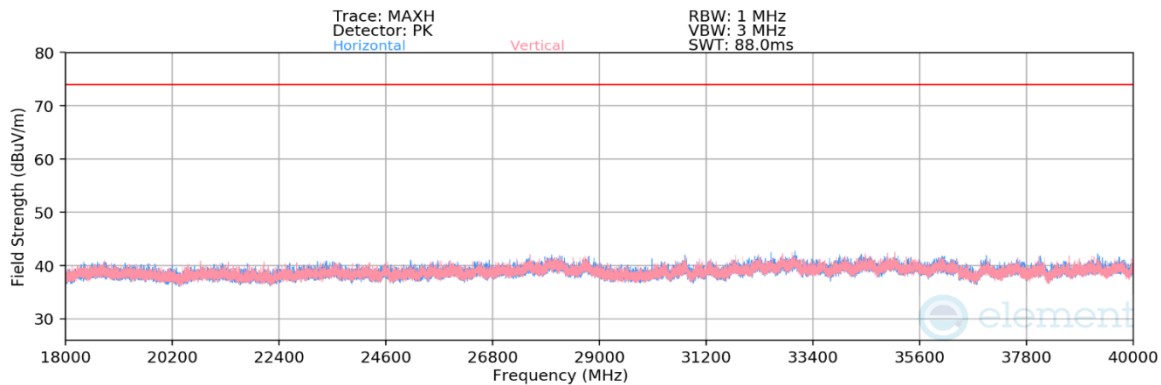


Plot 7-73. Radiated Spurious Emissions 18GHz - 40GHz CDD (802.11ax(SU) – Ch.40)

Mode: 802.11ax(SU)
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	220	263	-51.24	9.25	0.00	65.01	68.23	-3.22
* 15600.00	Average	V	-	-	-79.63	13.64	0.00	41.01	53.98	-12.97
* 15600.00	Peak	V	-	-	-69.49	13.64	0.00	51.15	73.98	-22.83
* 20800.00	Average	V	-	-	-52.33	-6.06	-9.54	39.08	53.98	-14.90
* 20800.00	Peak	V	-	-	-41.36	-6.06	-9.54	50.04	73.98	-23.94
26000.00	Peak	V	-	-	-40.96	-5.88	-9.54	50.62	68.23	-17.61
* 31200.00	Average	V	-	-	-53.88	-4.26	-9.54	39.32	53.98	-14.66
* 31200.00	Peak	V	-	-	-42.11	-4.26	-9.54	51.09	73.98	-22.89

Table 7-71. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

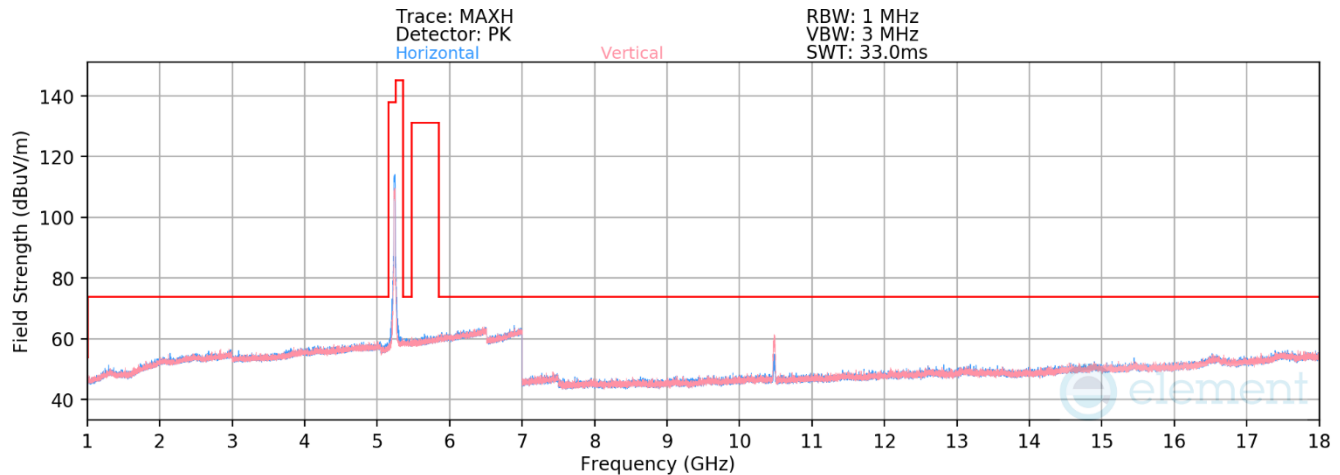


Plot 7-74. Radiated Spurious Emissions above 1GHz CDD (802.11ax(SU) – Ch. 48)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	172	270	-52.14	9.71	64.57	68.23	-3.66
* 15720.00	Average	V	-	-	-78.55	13.05	41.49	53.98	-12.49
* 15720.00	Peak	V	-	-	-67.46	13.05	52.59	73.98	-21.39

Table 7-72. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 103 of 158

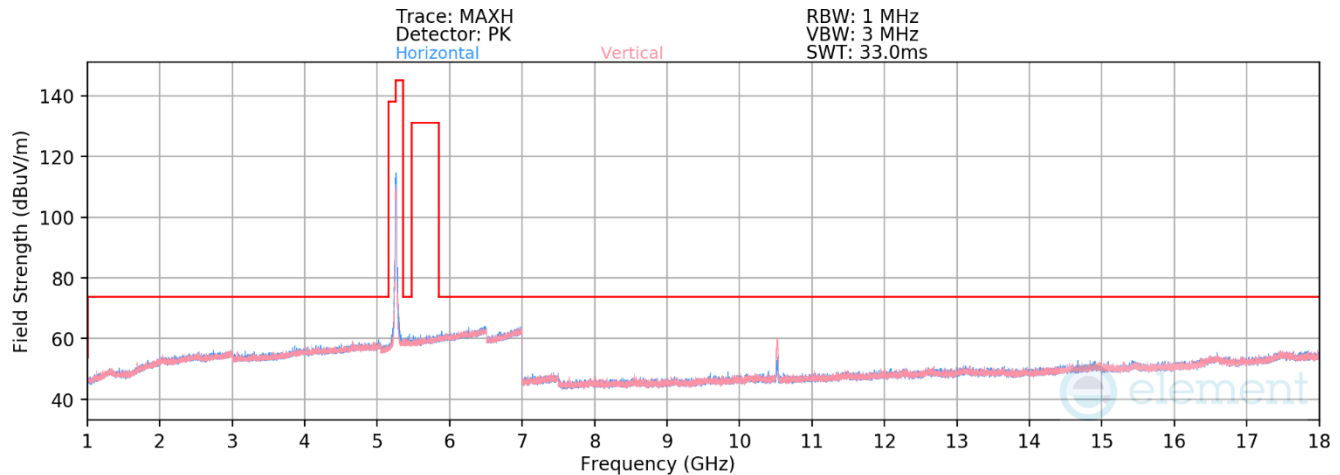


Plot 7-75. Radiated Spurious Emissions above 1GHz CDD (802.11ax(SU) – Ch. 52)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	237	260	-52.38	9.48	64.11	68.23	-4.12
* 15780.00	Average	V	-	-	-78.33	13.13	41.80	53.98	-12.18
* 15780.00	Peak	V	-	-	-68.41	13.13	51.72	73.98	-22.26

Table 7-73. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 104 of 158

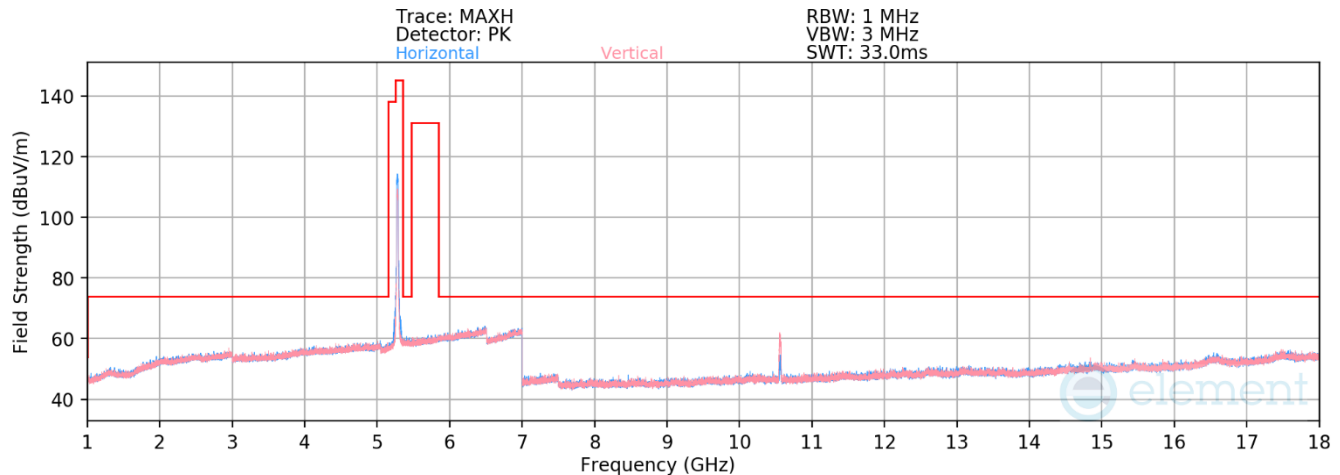


Plot 7-76. Radiated Spurious Emissions above 1GHz CDD (802.11ax(SU) – Ch. 56)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	187	260	-52.68	9.61	63.93	68.23	-4.30
* 15840.00	Average	V	-	-	-78.63	13.37	41.74	53.98	-12.24
* 15840.00	Peak	V	-	-	-67.32	13.37	53.04	73.98	-20.94

Table 7-74. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 105 of 158

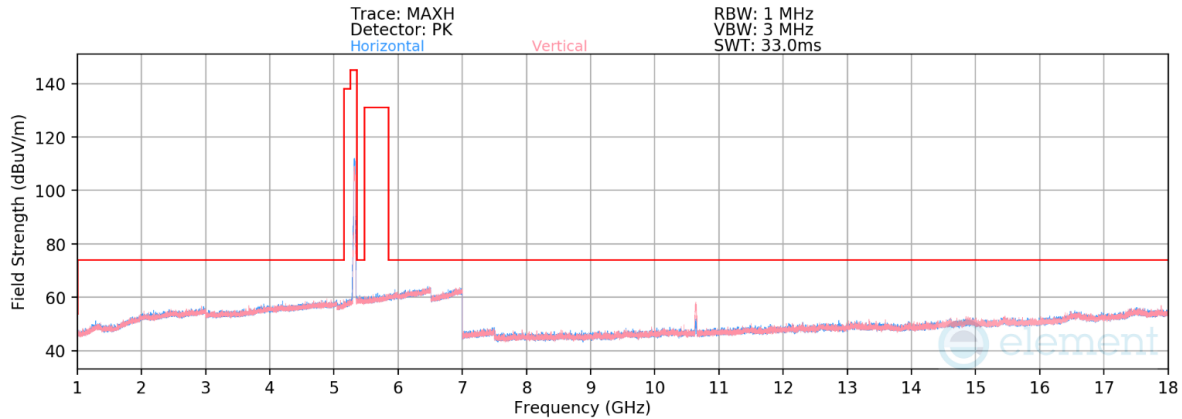

Plot 7-77. Radiated Spurious Emissions above 1GHz CDD (802.11ax(SU) – Ch. 64)

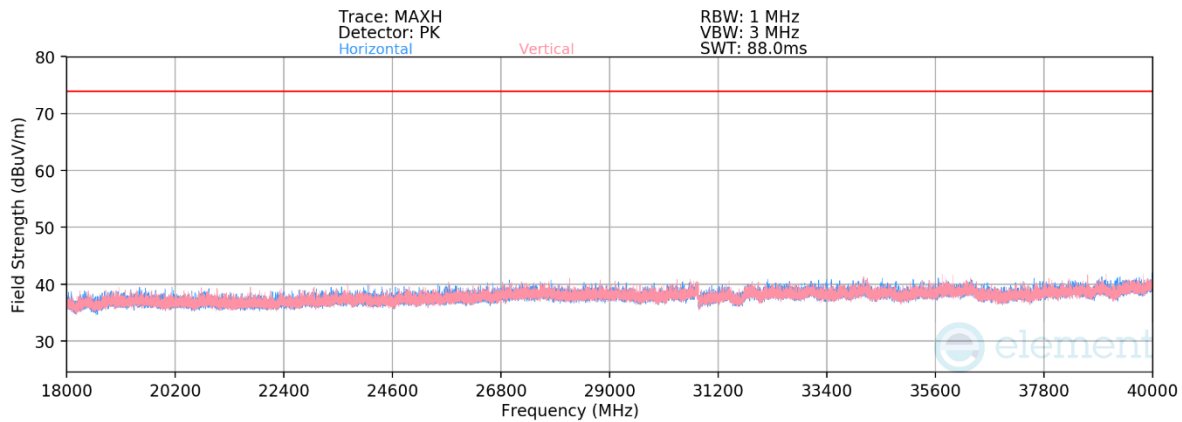

Plot 7-78. Radiated Spurious Emissions 18GHz - 40GHz CDD (802.11ax(SU) – Ch. 64)

Mode: 802.11ax(SU)

Data Rate: MCS0

Distance of Measurements: 3 Meters


Operating Frequency: 5320MHz

Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 10640.00	Average	V	243	255	-66.12	9.60	0.00	50.48	53.98	-3.50
* 10640.00	Peak	V	243	255	-55.27	9.60	0.00	61.33	73.98	-12.65
* 15960.00	Average	V	-	-	-79.73	13.63	0.00	40.90	53.98	-13.08
* 15960.00	Peak	V	-	-	-69.17	13.63	0.00	51.46	73.98	-22.52
* 21280.00	Average	V	-	-	-55.92	-6.12	-9.54	35.00	53.98	-18.98
* 21280.00	Peak	V	-	-	-44.08	-6.12	-9.54	46.84	73.98	-27.14
31920.00	Peak	V	-	-	-46.49	-2.95	-9.54	44.24	68.23	-23.99

Table 7-75. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

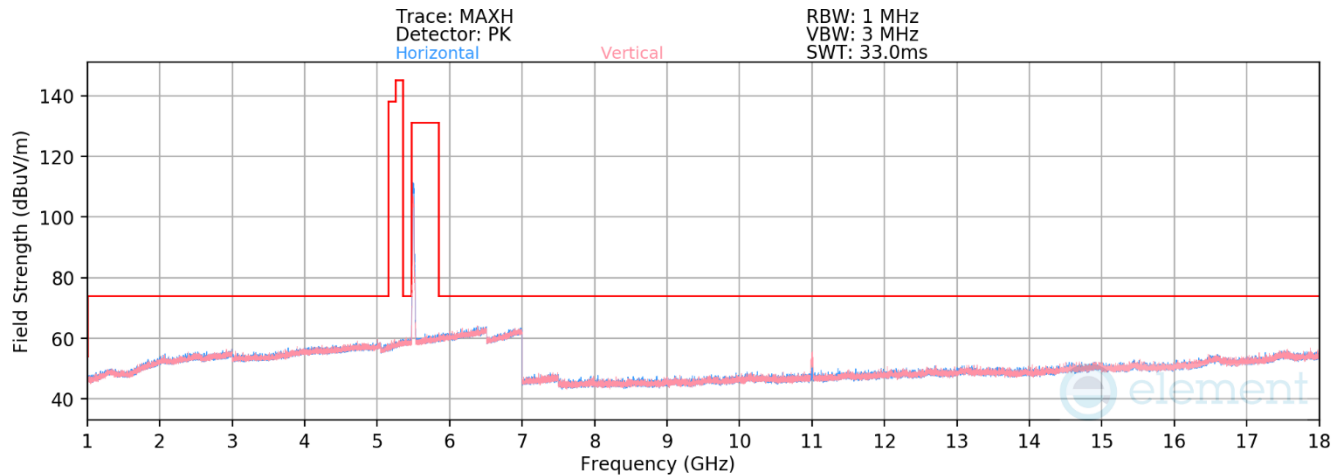


Plot 7-79. Radiated Spurious Emissions above 1GHz CDD (802.11ax(SU) – Ch. 100)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	272	319	-69.45	9.73	47.28	53.98	-6.70
* 11000.00	Peak	V	272	319	-58.33	9.73	58.40	73.98	-15.58
16500.00	Peak	V	-	-	-68.82	15.69	53.87	68.23	-14.36

Table 7-76. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 107 of 158

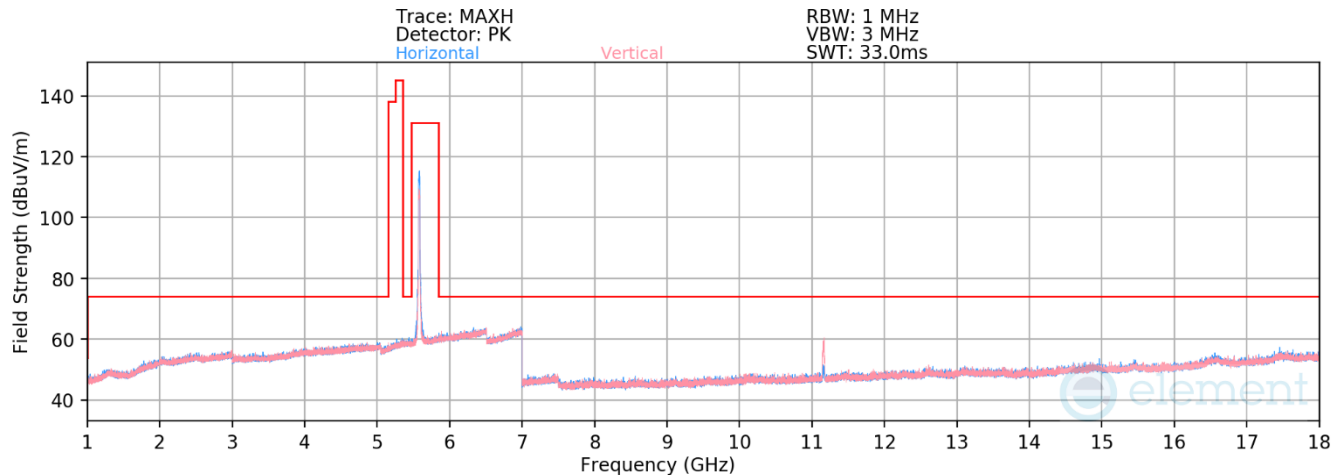


Plot 7-80. Radiated Spurious Emissions above 1GHz CDD (802.11ax(SU) – Ch. 116)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	V	314	317	-65.99	9.74	50.74	53.98	-3.24
* 11160.00	Peak	V	314	317	-55.63	9.74	61.10	73.98	-12.88
16740.00	Peak	V	-	-	-68.39	15.17	53.77	68.23	-14.46

Table 7-77. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 108 of 158

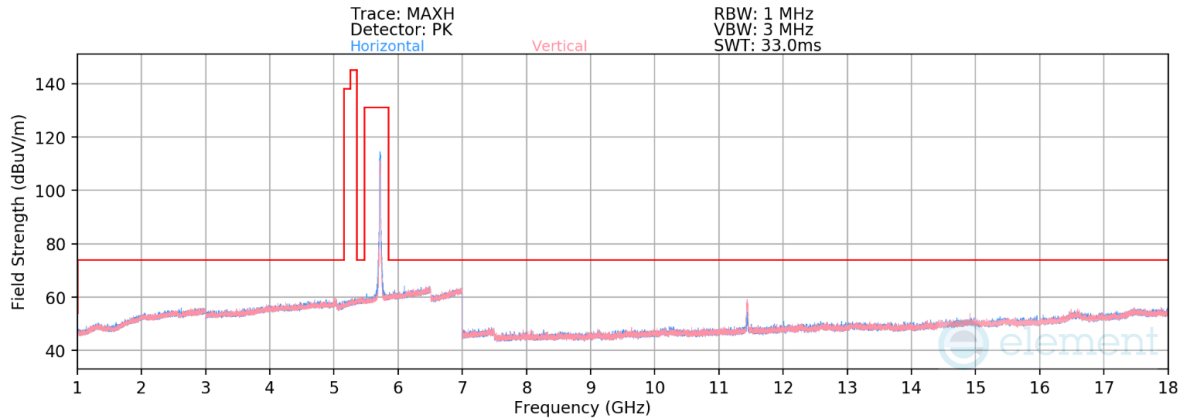

Plot 7-81. Radiated Spurious Emissions above 1GHz CDD (802.11ax(SU) – Ch. 144)

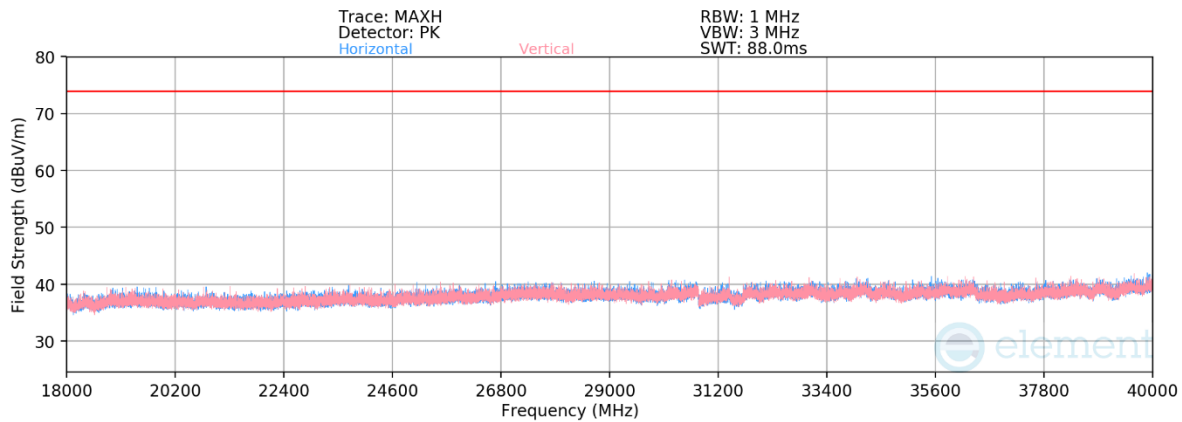


Plot 7-82. Radiated Spurious Emissions 18GHz - 40GHz CDD (802.11ax(SU) – Ch.144)

Mode: 802.11ax(SU)
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5720MHz
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11440.00	Average	V	265	294	-66.21	10.07	0.00	50.86	53.98	-3.12
* 11440.00	Peak	V	265	294	-56.08	10.07	0.00	60.99	73.98	-12.99
17160.00	Peak	V	-	-	-69.48	16.44	0.00	53.97	68.23	-14.26
* 22880.00	Average	V	-	-	-55.92	-5.48	-9.54	34.58	53.98	-19.40
* 22880.00	Peak	V	-	-	-44.08	-5.48	-9.54	46.29	73.98	-27.69
34320.00	Peak	V	-	-	-46.49	-4.23	-9.54	45.05	68.23	-23.18

Table 7-78. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

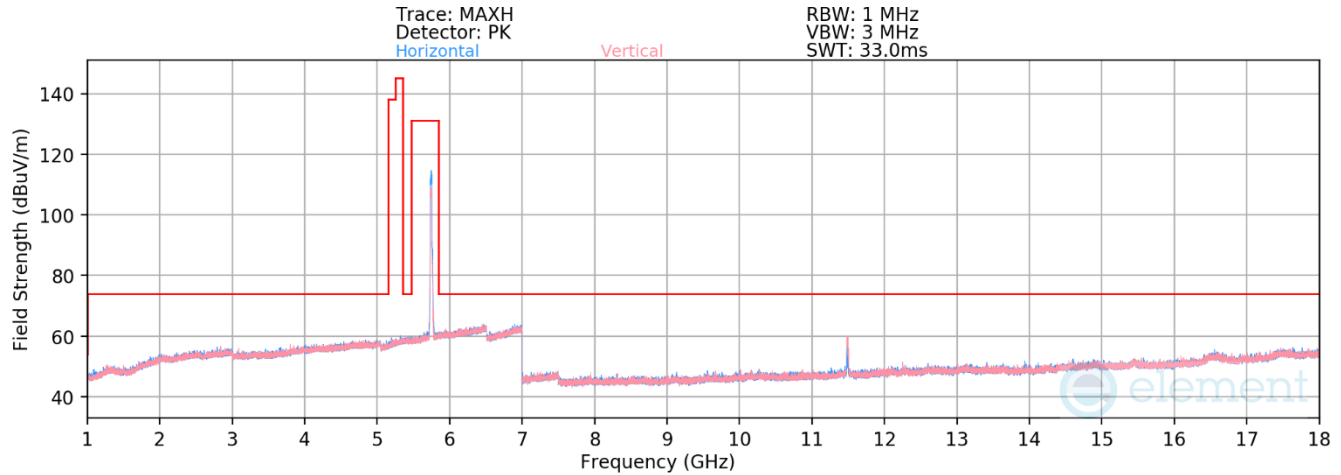


Plot 7-83. Radiated Spurious Emissions above 1GHz CDD (802.11ax(SU) – Ch. 149)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	V	263	294	-66.32	10.07	50.75	53.98	-3.23
* 11490.00	Peak	V	263	294	-55.46	10.07	61.61	73.98	-12.37
17235.00	Peak	V	-	-	-69.64	16.29	53.65	68.23	-14.58

Table 7-79. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 110 of 158

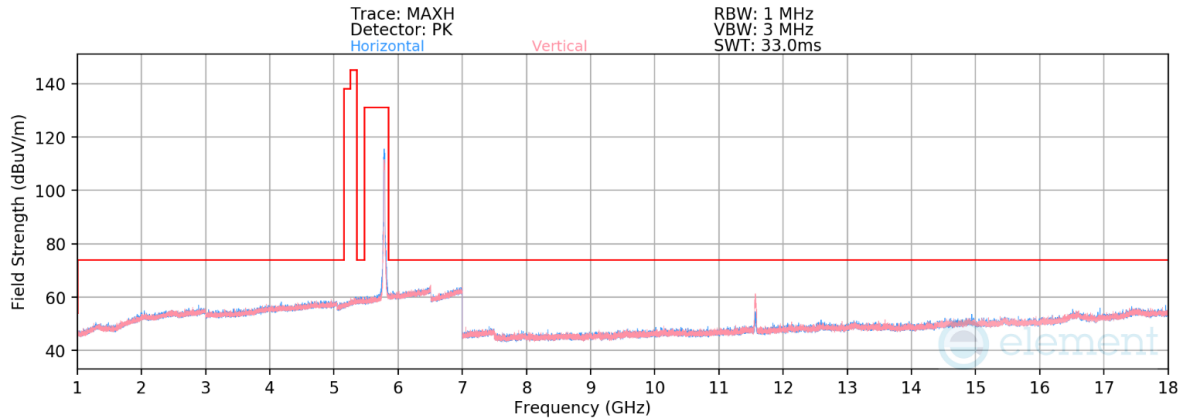

Plot 7-84. Radiated Spurious Emissions above 1GHz CDD (802.11ax(SU) – Ch. 157)

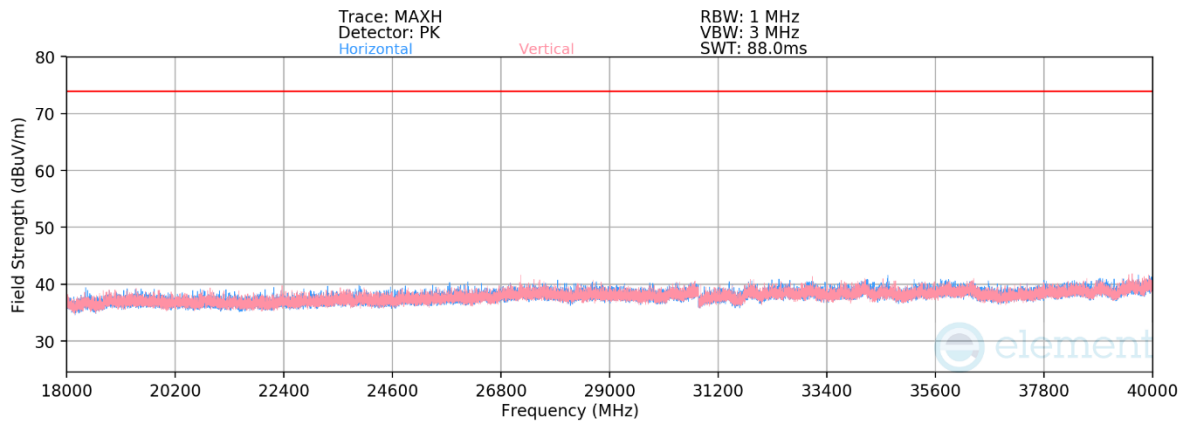

Plot 7-85. Radiated Spurious Emissions 18GHz - 40GHz CDD (802.11ax(SU) – Ch. 157)

Mode: 802.11ax(SU)

Data Rate: MCS0

Distance of Measurements: 3 Meters


Operating Frequency: 5785MHz

Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11570.00	Average	V	250	300	-65.66	10.17	0.00	51.50	53.98	-2.48
* 11570.00	Peak	V	250	300	-55.33	10.17	0.00	61.84	73.98	-12.14
17355.00	Peak	V	-	-	-69.00	17.11	0.00	55.11	68.23	-13.12
23140.00	Peak	V	-	-	-45.33	-6.32	-9.54	45.81	68.23	-22.42
28925.00	Peak	V	-	-	-50.30	-3.41	-9.54	43.75	68.23	-24.48
34710.00	Peak	V	-	-	-46.56	-4.76	-9.54	46.14	68.23	-22.09

Table 7-80. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

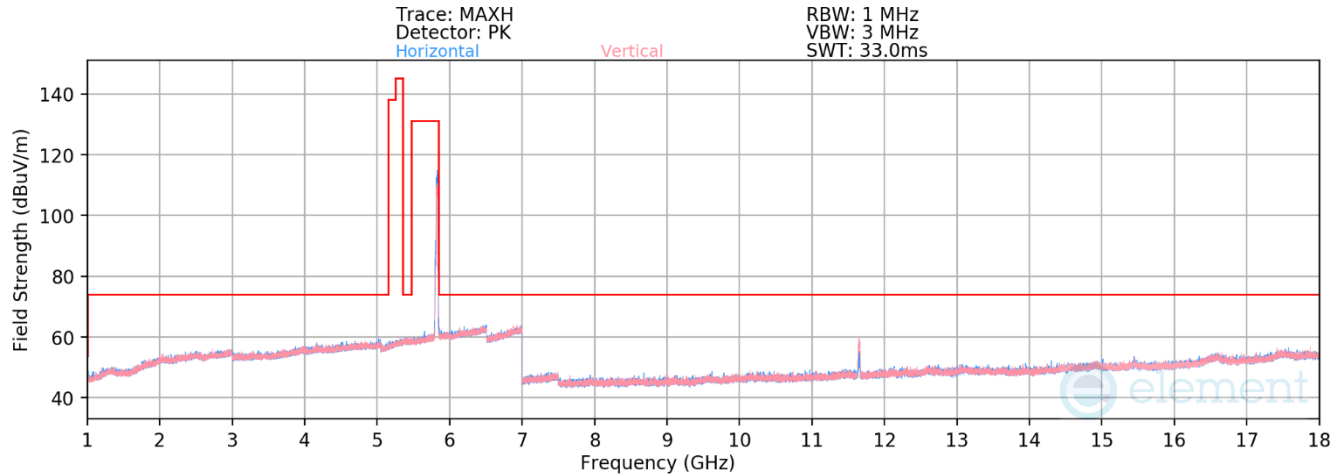

Plot 7-86. Radiated Spurious Emissions above 1GHz CDD (802.11ax(SU) – Ch. 165)

Mode: 802.11ax(SU)
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11650.00	Average	V	249	297	-66.36	10.37	51.01	53.98	-2.97
* 11650.00	Peak	V	249	297	-56.49	10.37	60.88	73.98	-13.10
17475.00	Peak	V	-	-	-70.45	19.04	55.59	68.23	-12.64


Table 7-81. Radiated Measurements CDD

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 112 of 158


7.6.2 Simultaneous Tx Radiated Spurious Emission (1 – 18GHz)

Description	Bluetooth	UNII
Antenna	Antenna 0	Antenna 0
Channel	78	36
Operating Frequency (MHz)	2480	5180
Mode/Modulation	GFSK iPA	802.11n

Table 7-82. Worst Case Simultaneous Transmission Configuration

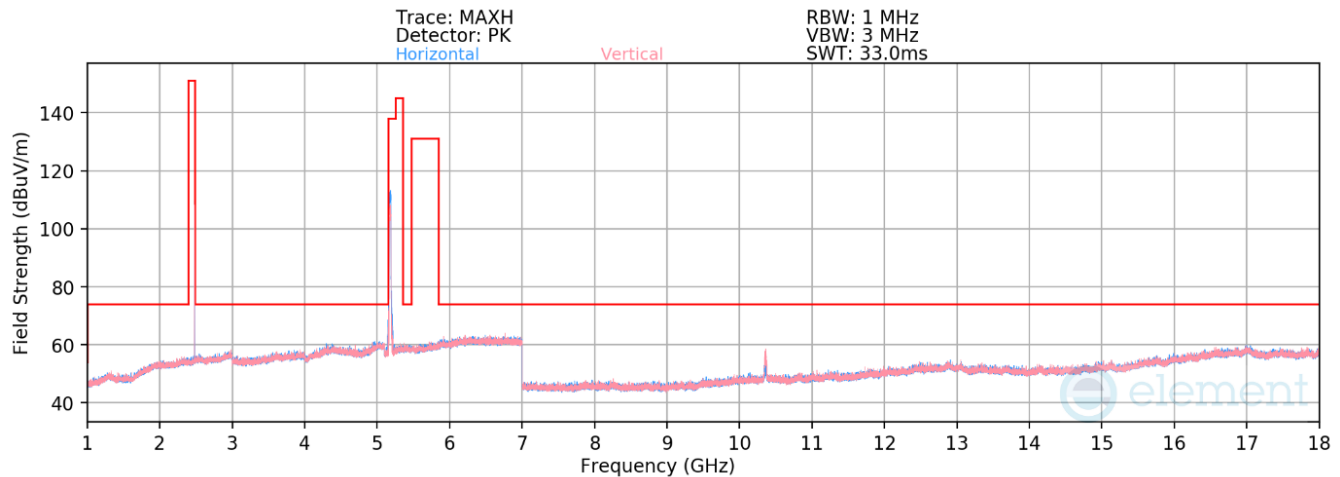

Plot 7-87. Radiated Spurious Emissions Above 1GHz – Simultaneous Transmission

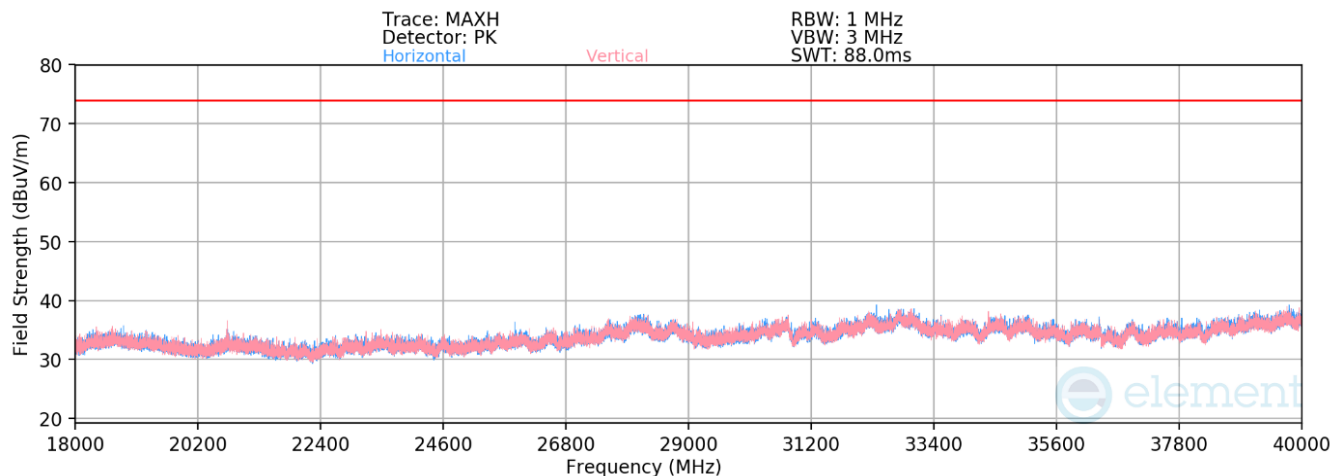

Plot 7-88. Radiated Spurious Emissions Above 18GHz – Simultaneous Transmission

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	V	237	263	-56.02	10.44	0.00	61.42	68.23	-6.81
* 15540.00	Average	V	-	-	-84.39	15.57	0.00	38.18	53.98	-15.80
* 15540.00	Peak	V	-	-	-73.14	15.57	0.00	49.43	73.98	-24.55
* 20720.00	Average	V	-	-	-62.37	-5.88	-9.54	29.21	53.98	-24.77
* 20720.00	Peak	V	-	-	-50.81	-5.88	-9.54	40.77	73.98	-33.21
25900.00	Peak	V	-	-	-52.13	-4.45	-9.54	40.87	68.23	-27.36
31080.00	Peak	V	-	-	-53.71	-2.75	-9.54	41.01	68.23	-27.22


Table 7-83. UNII Emissions Measurement - Simultaneous Transmission

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 4960.00	Peak	V	-	-	-68.17	16.57	0.00	55.40	73.98	-18.58
* 7440.00	Peak	V	-	-	-69.83	8.91	0.00	46.08	73.98	-27.90
* 12400.00	Peak	V	-	-	-72.14	13.29	0.00	48.15	73.98	-25.83
* 19840.00	Peak	V	-	-	-66.99	-6.06	-9.54	24.41	73.98	-49.57
* 22320.00	Peak	V	-	-	-66.76	-5.46	-9.54	44.32	73.98	-29.66


Table 7-84. Bluetooth Emissions Measurement - Simultaneous Transmission

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 114 of 158


7.6.3 Antenna 0 Radiated Band Edge Measurements (20MHz BW)

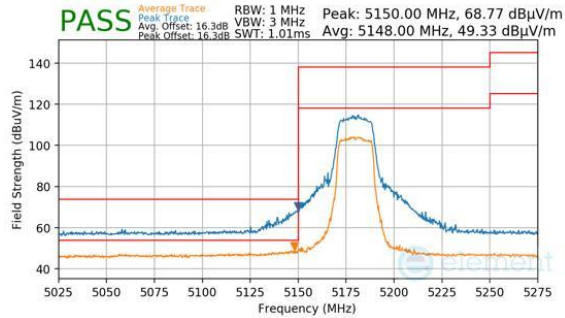


Plot 7-89. Antenna 0 (Peak & Average, Ch.36, 802.11n, MCS7)

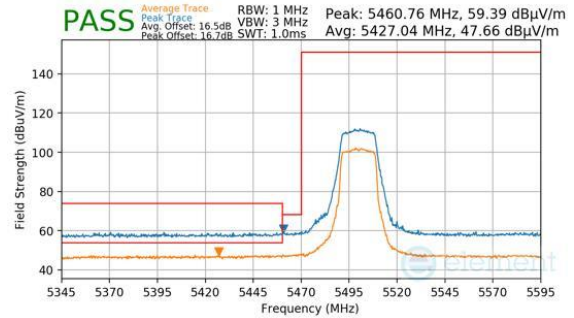


Plot 7-92. Antenna 0 (Peak & Average, Ch.100, 802.11n, MCS7)

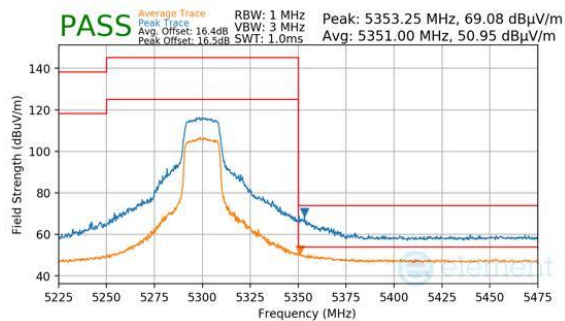


Plot 7-90. Antenna 0 (Peak & Average, Ch.60, 802.11n, MCS7)

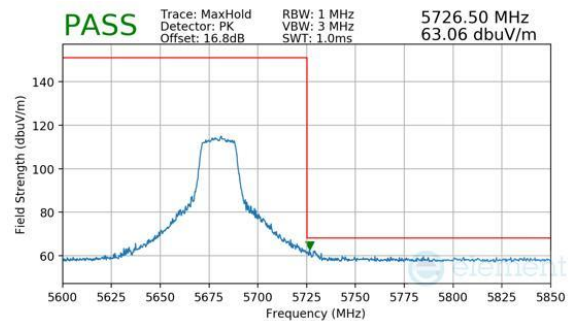

Plot 7-93. Antenna 0 (Peak, Ch.136, 802.11n, MCS7)

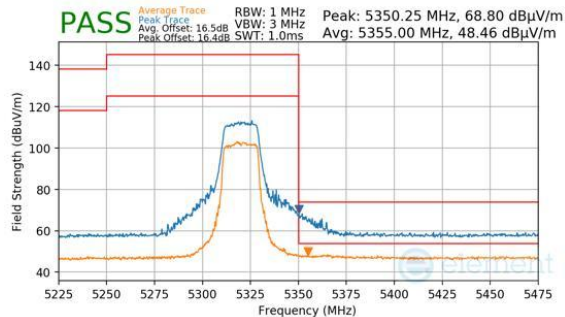


Plot 7-91. Antenna 0 (Peak & Average, Ch.64, 802.11n, MCS7)

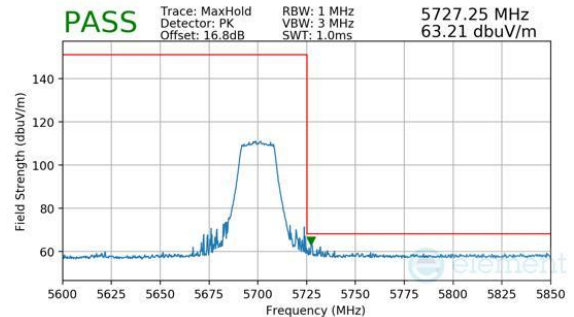


Plot 7-94. Antenna 0 (Peak, Ch.140, 802.11n, MCS7)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 115 of 158

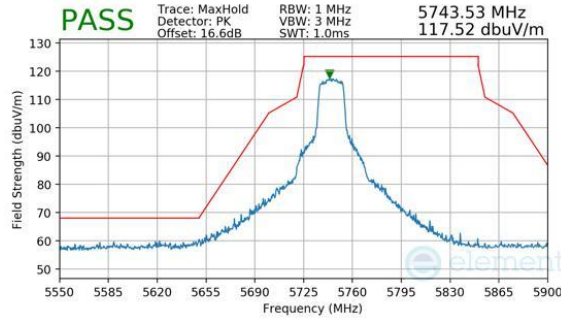


Plot 7-95. Antenna 0 (Peak, Ch.149, 802.11n, MCS7)

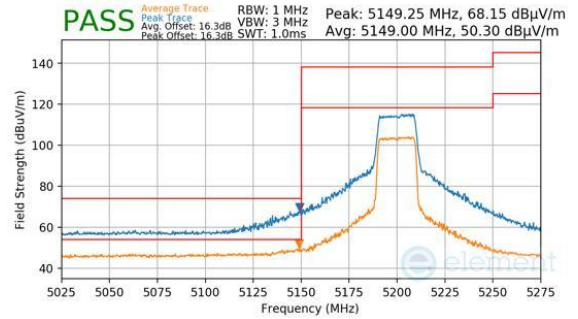


Plot 7-98. Antenna 0 (Peak & Average, Ch.40, (SU), MCS11)

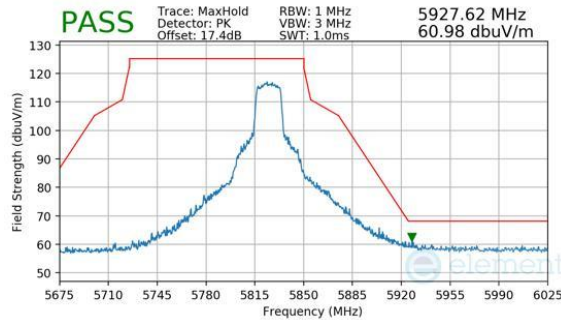


Plot 7-96. Antenna 0 (Peak, Ch.165, 802.11n, MCS7)

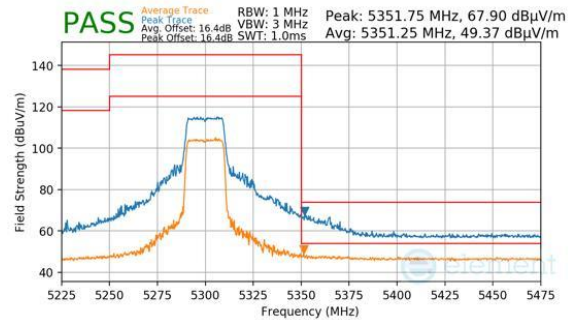

Plot 7-99. Antenna 0 (Peak & Average, Ch.60, (SU), MCS11)

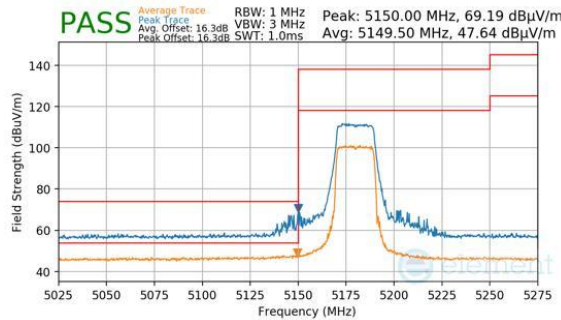


Plot 7-97. Antenna 0 (Peak & Average, Ch.36, (SU), MCS11)

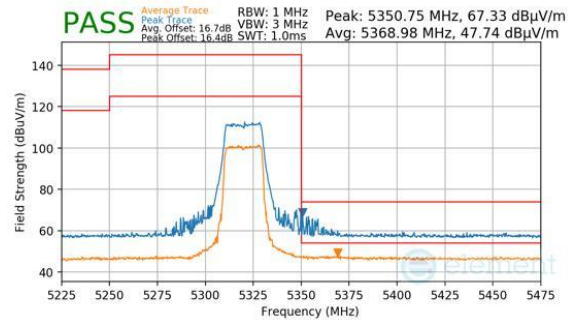


Plot 7-100. Antenna 0 (Peak & Average, Ch.64, (SU), MCS11)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.	Page 116 of 158	

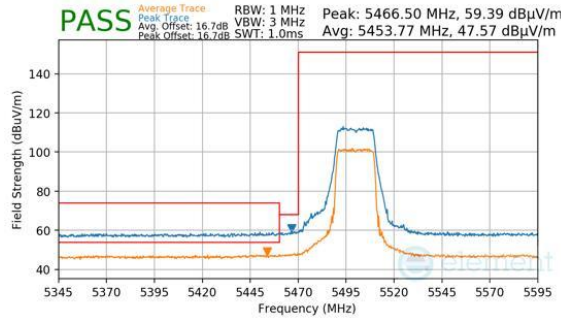


Plot 7-101. Antenna 0 (Peak & Average, Ch.100, (SU), MCS11)

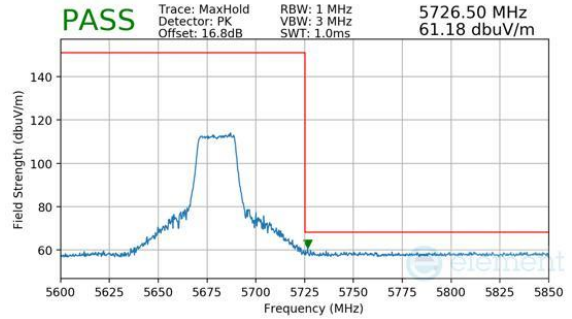


Plot 7-104. Antenna 0 (Peak, Ch.136, (SU), MCS11)

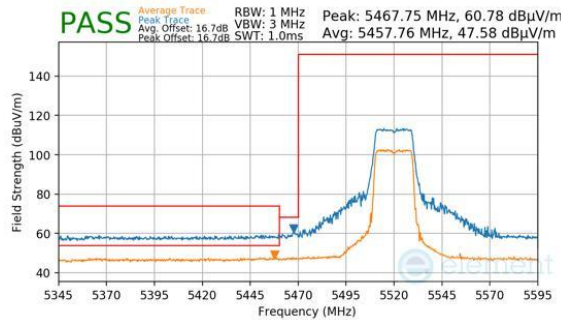


Plot 7-102. Antenna 0 (Peak & Average, Ch.104, (SU), MCS11)

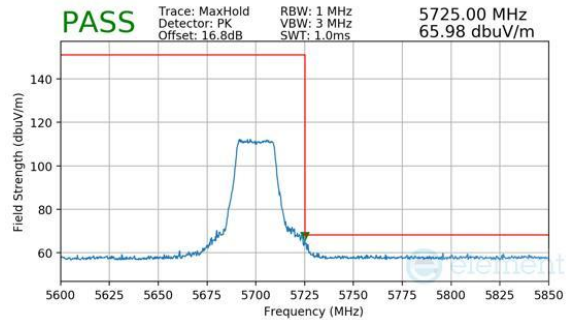

Plot 7-105. Antenna 0 (Peak, Ch.140, (SU), MCS11)

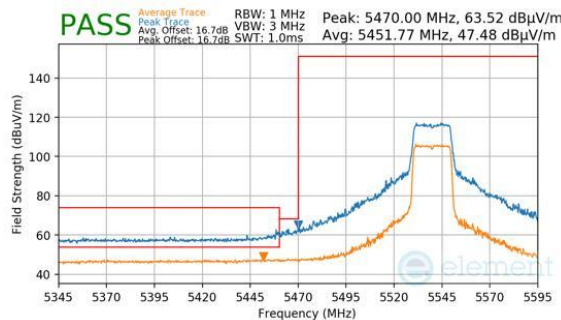


Plot 7-103. Antenna 0 (Peak & Average, Ch.108, (SU), MCS11)

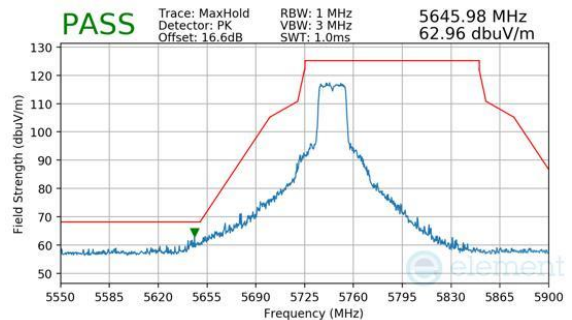

Plot 7-106. Antenna 0 (Peak, Ch.149, (SU), MCS11)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 117 of 158

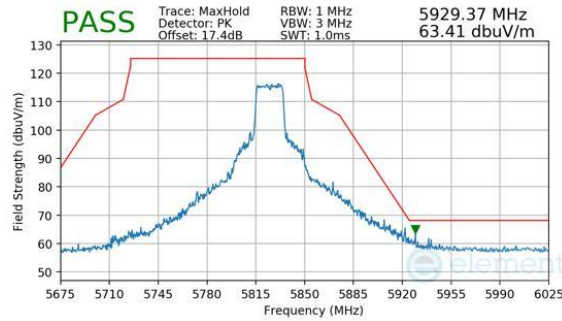


Plot 7-107. Antenna 0 (Peak, Ch.165, (SU), MCS11)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 118 of 158


V 12.0 03/03/2026

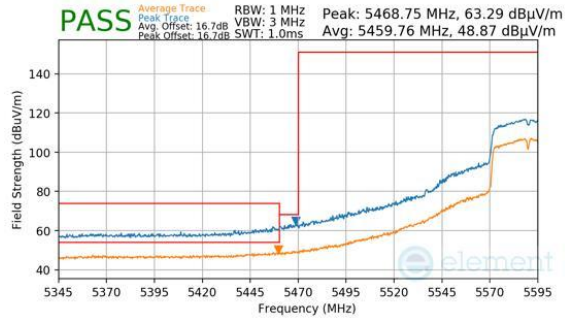


Plot 7-114. Antenna 0 (Peak & Average, Ch.118, 802.11n, MCS7)

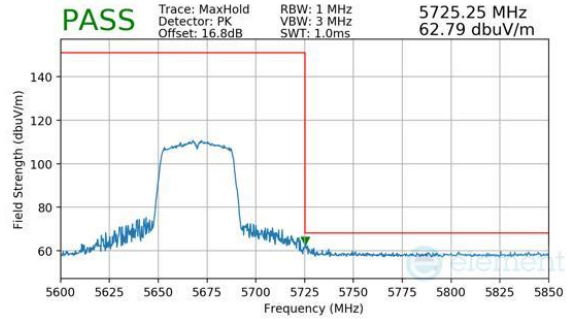


Plot 7-117. Antenna 0 (Peak, Ch.134, 802.11n, MCS7)

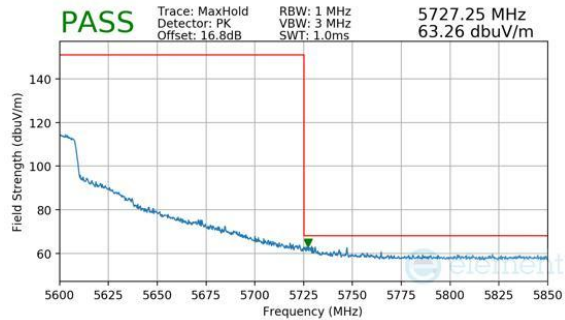


Plot 7-115. Antenna 0 (Peak, Ch.118, 802.11n, MCS7)

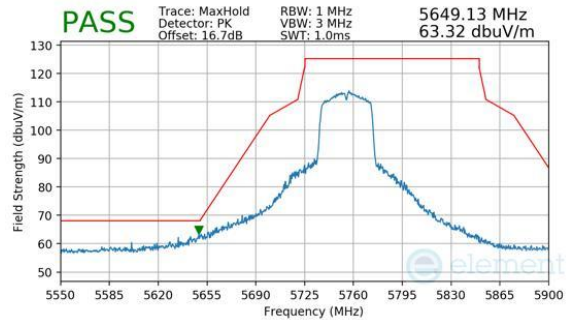

Plot 7-118. Antenna 0 (Peak, Ch.151, 802.11n, MCS7)

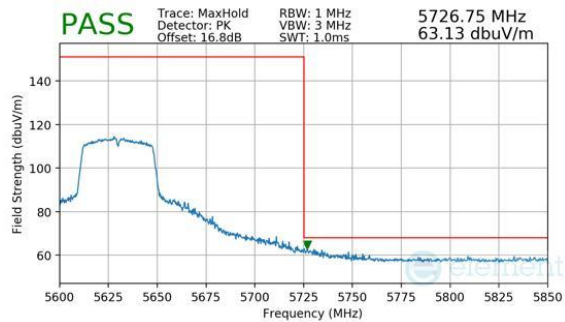


Plot 7-116. Antenna 0 (Peak, Ch.126, 802.11n, MCS7)

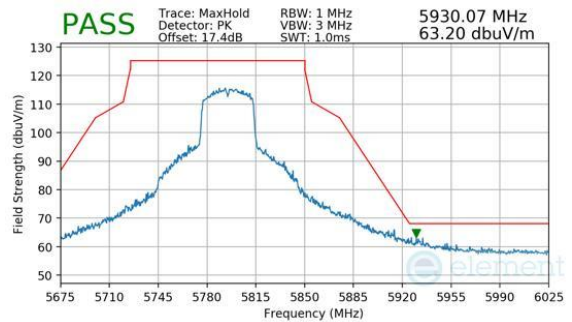


Plot 7-119. Antenna 0 (Peak, Ch.159, 802.11n, MCS7)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 120 of 158

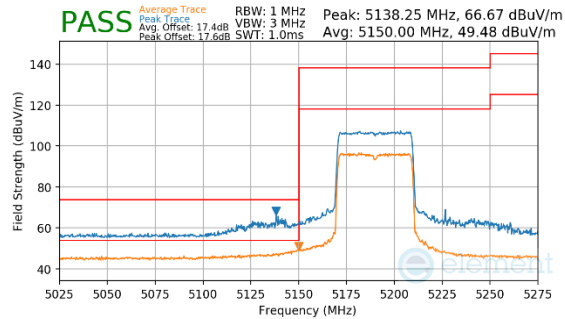


Plot 7-120. Antenna 0 (Peak & Average, Ch.38, (SU), MCS11)

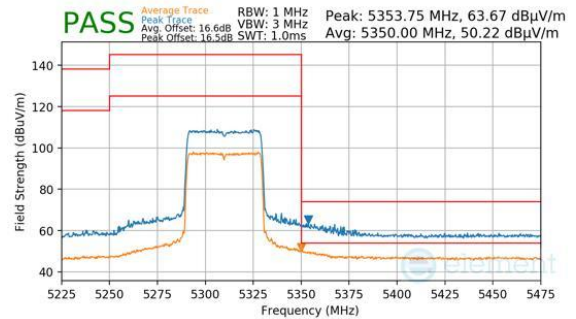


Plot 7-123. Antenna 0 (Peak & Average, Ch.62, (SU), MCS11)

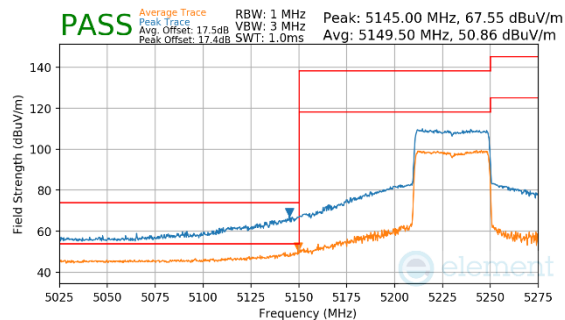


Plot 7-121. Antenna 0 (Peak & Average, Ch.46, (SU), MCS11)

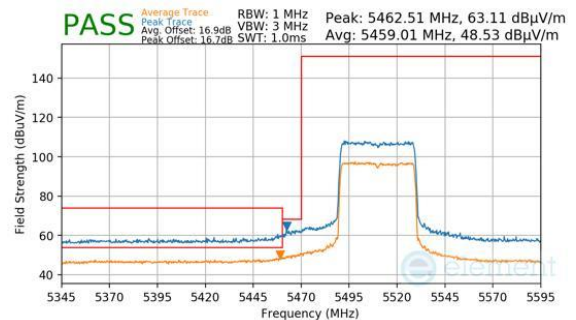

Plot 7-124. Antenna 0 (Peak & Average, Ch.102, (SU), MCS11)

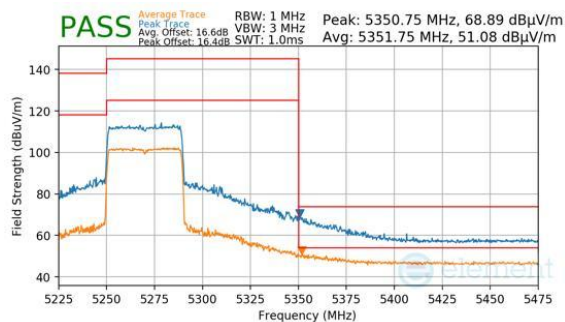


Plot 7-122. Antenna 1 (Peak & Average, Ch.54, (SU), MCS11)

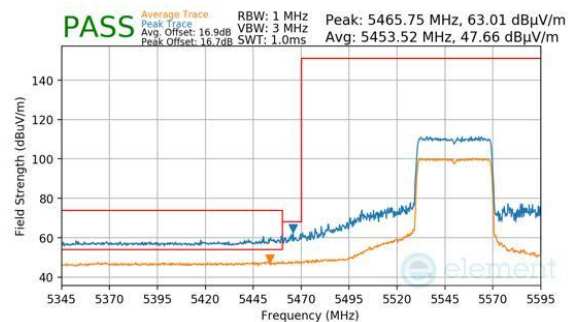


Plot 7-125. Antenna 0 (Peak & Average, Ch.110, (SU), MCS11)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 121 of 158

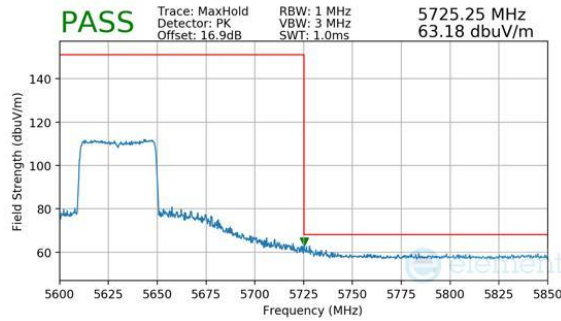


Plot 7-126. Antenna 0 (Peak, Ch.126, (SU), MCS11)

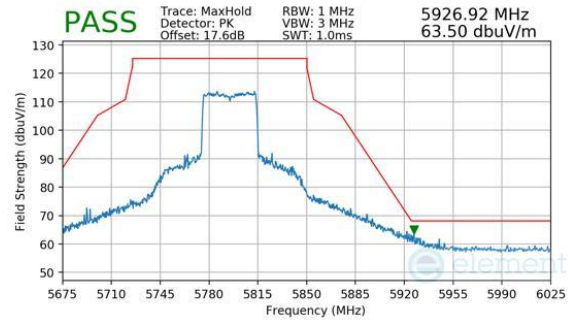

Plot 7-129. Antenna 0 (Peak, Ch.159, (SU), MCS11)

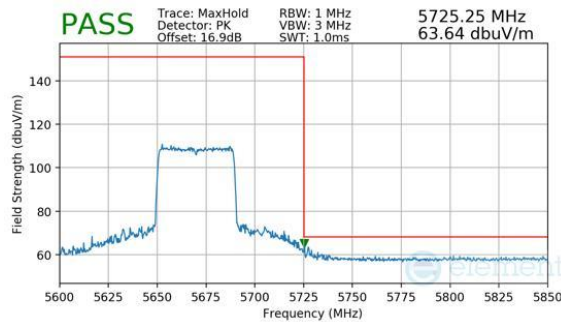

Plot 7-127. Antenna 0 (Peak, Ch.134, (SU), MCS11)

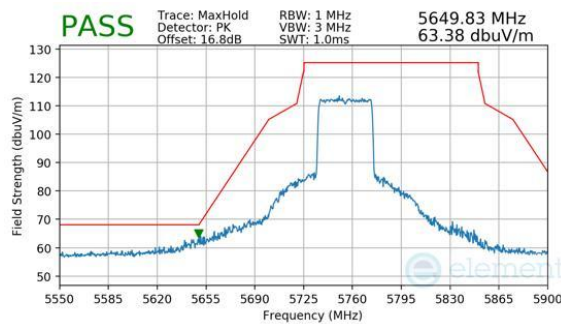

Plot 7-128. Antenna 0 (Peak, Ch.151, (SU), MCS11)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 2/10/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-07-R3.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		