

MEASUREMENT REPORT

FCC PART 15.407 / ISSED RSS-248 UNII 6GHz OFDM 802.11a/ax

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

05/15/2025 - 02/28/2026

Test Report Issue Date:

9/15/2026

Test Site/Location:

Element Materials Technology, Morgan Hill, CA, USA

Test Report Serial No.:

1C2505300067-12-R1.BCG

FCC ID:

BCGA3374

IC:

579C-A3374

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A3374

EUT Type:

Smart Speaker

Frequency Range:

6115 – 7115MHz

Modulation Type:

OFDM

FCC Classification:

15E 6 GHz Very Low Power Device (6VL)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISED Specification:

RSS-248 Issue 3

Test Procedure(s):

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to
C63.10a:2024, KDB 789033 D02 v02r01
KDB 662911 D01 v02r01, KDB 987594 D02 v03
KDB 987594 D03 v03r04, KDB 987594 D04 v03
KDB 987594 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President



FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1 BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 1 of 133

Revision Summary

Revision	Date	Comments	Revised By
-	04/08/2026	Initial Released	WKR007077
R1	05/26/2026	Addressed comment in sections 2.2, 2.3, 2.6	WKR016696

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 2 of 133

V 12.0 03/03/2026


TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope.....	5
1.2	Element Materials Technology Test Location	5
1.3	Test Facility / Accreditations	5
2.0	PRODUCT INFORMATION	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Antenna Description	10
2.4	Test Support Equipment.....	10
2.5	Test Configuration.....	11
2.6	Software and Firmware	11
2.7	EMI Suppression Device(s)/Modifications.....	11
3.0	DESCRIPTION OF TESTS	12
3.1	Evaluation Procedure	12
3.2	AC Line Conducted Emissions	12
3.3	Radiated Emissions.....	13
3.4	Environmental Conditions.....	13
4.0	ANTENNA REQUIREMENTS	14
5.0	MEASUREMENT UNCERTAINTY	15
6.0	TEST EQUIPMENT CALIBRATION DATA.....	16
7.0	TEST RESULTS	17
7.1	Summary.....	17
7.2	26dB & 99% Bandwidth Measurement	18
7.3	Conducted Output Power and Max EIRP Measurement	19
7.4	Maximum Power Spectral Density.....	34
7.5	In-Band Emissions	47
7.6	Contention Based Protocol.....	55
7.7	Transmit Power Control (TPC)	69
7.8	Radiated Spurious Emissions – Above 1GHz.....	90
7.9	Radiated Spurious Emissions – Below 1GHz	125
7.10	AC Line-Conducted Emissions Measurement.....	129
8.0	CONCLUSION.....	133


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 3 of 133

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO				CDD/SDM	
				Antenna 0		Antenna 1		Summed	
				Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)
5	20	802.11a/ax	6115 - 6415	2.851	4.55	2.512	4.00	2.723	4.35
6		802.11a/ax	6435 - 6515	2.812	4.49	2.228	3.48	2.742	4.38
7		802.11a/ax	6535 - 6875	2.767	4.42	2.113	3.25	2.773	4.43
8		802.11a/ax	6895 - 7115	2.704	4.32	2.594	4.14	2.924	4.66
5	40	802.11ax	6125 - 6405	4.457	6.49	3.741	5.73	4.355	6.39
6		802.11ax	6445 - 6525	4.477	6.51	3.540	5.49	4.477	6.51
7		802.11ax	6565 - 6845	4.550	6.58	3.459	5.39	4.406	6.44
8		802.11ax	6885 - 7085	4.188	6.22	4.093	6.12	4.699	6.72
5	80	802.11ax	6145 - 6385	9.484	9.77	7.674	8.85	9.204	9.64
6		802.11ax	6465	8.892	9.49	6.950	8.42	8.810	9.45
7		802.11ax	6545 - 6865	9.036	9.56	6.714	8.27	8.790	9.44
8		802.11ax	6945 - 7025	9.705	9.87	9.036	9.56	9.268	9.67

EUT Overview

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 4 of 133

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISSED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISSED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 5 of 133

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Smart Speaker FCC ID: BCGA3374** and **IC: 579C-A3374**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter while operating in the 6GHz band.

Test Device Serial No.: DWPYQ17WGN, F4Y3LP2074, G59KG4D2LL, GXC9HHV20W, DLWP4MKXKL, DMWY056GXX, JQW7TJGXT3

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), 802.15.4, Bluetooth (1x, EDR, LE1M, LE2M), UWB

VLP channels below 6105 MHz in the UNII-5 band are disabled in the US and its territories.

The device supports channel bandwidth reduction and does not support channel puncturing.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 6 of 133

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
33	6115	97	6435	117	6535	189	6895
:	:	:	:	:	:	:	:
61	6255	105	6475	149	6695	209	6995
:	:	:	:	:	:	:	:
93	6415	113	6515	185	6875	233	7115

Table 2-1. 802.11a/ax (20MHz) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
35	6125	99	6445	123	6565	187	6885
:	:	:	:	:	:	:	:
59	6245	107	6485	155	6725	211	7005
:	:	:	:	:	:	:	:
91	6405	115	6525	179	6845	227	7085

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
39	6145	103	6465	119	6545	199	6945
:	:			:	:	:	:
55	6225			151	6705	215	7025
:	:			:	:		
87	6385			183	6865		

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 7 of 133

Notes:

- 6GHz NII operation is possible in 20MHz, 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) KDB 789033 D02 v02r01 and ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band	Duty Cycle [%]					
	Antenna 0		Antenna 1		SDM	
	Duty Cycle [%]	Radiated DCCF [dB]	Duty Cycle [%]	Radiated DCCF [dB]	Duty Cycle [%]	Radiated DCCF [dB]
a (Low Data Rate)	95.060	0.220	94.624	0.240	-	-
a (Mid Data Rate)	91.180	0.401	90.782	0.420	-	-
a (High Data Rate)	83.119	0.803	83.291	0.794	-	-
ax(SU) (HE20) (Low Data Rate)	98.651	0.059	98.492	0.066	98.787	0.053
ax(SU) (HE20) (Mid Data Rate)	98.787	0.053	98.424	0.069	98.220	0.078
ax(SU) (HE20) (High Data Rate)	97.949	0.090	98.017	0.087	97.949	0.090
ax(SU) (HE40) (Low Data Rate)	98.946	0.046	98.446	0.068	98.220	0.078
ax(SU) (HE40) (Mid Data Rate)	98.537	0.064	98.039	0.086	98.855	0.050
ax(SU) (HE40) (High Data Rate)	96.427	0.158	96.828	0.140	96.828	0.140
ax(SU) (HE80) (Low Data Rate)	98.787	0.053	98.265	0.076	98.265	0.076
ax(SU) (HE80) (Mid Data Rate)	97.297	0.119	97.972	0.089	97.544	0.108
ax(SU) (HE80) (High Data Rate)	94.363	0.252	93.994	0.269	94.363	0.252

Table 2-4. Measured Duty Cycles

- The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		CDD		SDM		STBC	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
6GHz	11a	✓	✓	✗	✗	✗	✗	✗	✗
	11ax(SU) (20MHz)	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (40MHz)	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (80MHz)	✓	✓	✓	✓	✓	✓	✓	✓

Table 2-5. WIFI Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

STBC = Space-Time Block Coding – 2Tx Function

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 8 of 133

V 12.0 03/03/2026

3. The device supports the following data rates (shown in Mbps):

802.11a	MCS Index	Spatial Stream	OFDM (802.11ax)									
			20MHz			40MHz			80MHz			
	20MHz		HE	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	
6	0	1	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	Low Rate
9	1	1	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	
12	2	1	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9	
18	3	1	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	Midrate
24	4	1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	High Rate
36	5	1	68.8	65	58.5	137.6	130	117	288.2	272.2	245	
48	6	1	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	
54	7	1	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	
-	8	1	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	
-	9	1	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	
-	10	1	129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	
-	11	1	143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	
-	0	2	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	Low Rate
-	1	2	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	
-	2	2	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	
-	3	2	68.8	65	58.5	137.6	130	117	288.2	272.2	245	Midrate
-	4	2	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	High Rate
-	5	2	137.6	130	117	275.3	260	234	576.5	544.4	490	
-	6	2	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	
-	7	2	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	
-	8	2	206.5	195	175.5	412.9	390	351	864.7	816.7	735	
-	9	2	229.4	216.7	195	458.8	433.3	390	960.8	907.4	816.7	
-	10	2	258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	
-	11	2	286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	

Table 2-6. Data Rate Supported

4. This device supports simultaneous transmission operations, which allows multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Bluetooth 2.4GHz	Thread	WLAN	WIFI 5GHz	WIFI 6GHz
		BDR, EDR, LE	802.15.4	802.11 b/g/n/ax	802.11 a/n/ac/ax	802.11 a/ax
Antenna 0	Config 1	✓	✗	✗	✓	✗
	Config 2	✓	✗	✗	✗	✓
Antenna 1	Config 3	✗	✓	✗	✓	✗
	Config 4	✗	✓	✗	✗	✓

Table 2-7. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 1 and reported in RF Bluetooth and RF UNII 5GHz OFDM test reports.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 9 of 133

V 12.0 03/03/2026

2.3 Antenna Description

Following antennas gains provided by manufacturer were used for testing. The validity of the calculated results is based on the accuracy of the information provided.

UNII Band	Frequency [GHz]	Highest Antenna Gain (dBi)		Lowest Antenna Gain (dBi)	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1
5	6.105 – 6.265	0.83	0.03	0.30	-0.23
	6.265 – 6.425	0.12	-0.48	0.12	-0.48
6	6.425 – 6.525	0.50	-0.51	0.50	-0.51
7	6.525 – 6.875	1.08	-0.10	0.30	-0.77
8	6.875 – 7.125	-0.11	-0.35	-0.70	-1.48

Table 2-8. Antenna Gains

2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02H604EQ05D
	w/AC/DC Adapter	Model:	A2166	S/N:	C4H042705ZNPM0WA6
2	Apple USB-C Cable	Model:	Chimp Cable	S/N:	304323
3	AC Adapter	Model:	A3228	S/N:	C4HHAU000PD0000EWV
4	Home Accessory	Model:	A3300	S/N:	GM9R4V7RT2

Table 2-9. Test Support Equipment List

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 10 of 133

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024, KDB 789033 D02 v02r01 and KDB 987594 D02 v03. ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel were reported.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and the worst cases were reported.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger

For 802.11ax-RU test results, see separate UNII 6E OFDMA report, 1C2505300067-13.BCG.

The data rates have been categorized into three groups: low, middle, and high data rates (see Table 2-6). All three groups have been investigated, and only the worst-case data rate has been reported.

2.6 Software and Firmware

The test was conducted with firmware version 23J215 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 11 of 133

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.10. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 12 of 133

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 13 of 133

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

V 12.0 03/03/2026

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	2.00
Line Conducted Disturbance	1.88
Radiated Disturbance (<30MHz)	4.24
Radiated Disturbance (30MHz - 1GHz)	4.96
Radiated Disturbance (1 - 18GHz)	5.18
Radiated Disturbance (>18GHz)	5.18

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 15 of 133

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance with the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	7/7/2025	Biennial	7/7/2027	MY56470202
Anritsu	ML2496A	Power Meter	6/27/2025	Annual	6/27/2026	C00612
Anritsu	MA2411B	Pulse Power Sensor	6/27/2025	Annual	6/27/2026	1911105
Anritsu	MA2411B	Pulse Power Sensor	10/14/2025	Annual	10/14/2026	1027293
ATM	180-442-KF	20dB Nominal Gain Horn Antenna	3/24/2025	Annual	3/24/2026	T058601-02
ETS-Lindgren	3117	Double Ridged Guide Horn (1-18 GHz)	4/16/2025	Annual	4/16/2026	218555
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz RF Cable/Attenuator *	6/10/2025	Annual	6/10/2026	-
Keysight Technology	N9040B	UXA Signal Analyzer	6/9/2025	Annual	6/9/2026	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/6/2025	Annual	8/6/2026	101639
Rohde & Schwarz	FSW43	Spectrum Analyzer 2Hz to 43GHz	8/5/2025	Annual	8/5/2026	104093
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	5/13/2025	Annual	5/13/2026	101867
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	10/14/2025	Annual	10/14/2026	102328
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/3/2025	Annual	6/3/2026	100052
Rohde & Schwarz	ENV216	Two-Line V-Network	4/24/2025	Annual	4/24/2026	101364
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	7/17/2025	Annual	7/17/2026	00302

Table 6-1. Test Equipment List

Note:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. * denotes passive equipment that have been internally verified/calibrated.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 16 of 133

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA3374
 IC: 579C-A3374
 FCC Classification: 15E 6 GHZ Very Low Power Device (6VL)

FCC Part Section(s) / KDB Reference	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049, 15.407(a)(11)	RSS-Gen [5.1], RSS-248 [4.4]	Occupied Bandwidth/ 26dB Bandwidth	99% of the occupied bandwidth of any channel must be contained within each of its respective U-NII sub bands < 320MHz (5.925 - 7.125GHz)	CONDUCTED	PASS	Section 7.2
15.407(a)(9)	RSS-248 [4.5.6]	Maximum Power Spectral Density	< -5dBm/MHz e.i.r.p for Very Low Power		PASS	Section 7.4
15.407(a)(9)	RSS-248 [4.5.6]	Maximum EIRP	< 14dBm over the frequency band of operation for Very Low Power		PASS	Section 7.3
15.407(b)(7)	RSS-248 [4.6.2]	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(7) and RSS-248 [4.6.2] b)		PASS	Section 7.5
15.407(d)(6)	RSS-248 [4.7]	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty		PASS	Section 7.6
15.407(d)(10)	RSS-248 [4.5.6]	Transmit Power Control	EUT must employ a TPC mechanism to operate 6dB below the maximum EIRP PSD value of -5 dBm/MHz		PASS	Section 7.7
15.407(b)(6)	RSS-248 [4.6.2]	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band	RADIATED	PASS	Section 7.8
15.205, 15.209	RSS-248 [4.6.2], RSS-Gen [7.4.3]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [7.4.3])		PASS	Section 7.8, 7.9
15.407(b)(9)	RSS-Gen [7.4.2]	AC Conducted Emissions (150kHz – 30MHz)	< FCC 15.207 (RSS-Gen [7.4.2]) limits	LINE CONDUCTED	PASS	Section 7.10

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among the UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Conducted Automation Software,” Version 1.5.0.
- 5) For radiated testing, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 3.6.1.
- 6) All radiated measurements were tested at the highest supported power setting per band.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 17 of 133

V 12.0 03/03/2026

7.2 26dB & 99% Bandwidth Measurement

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

In the 5.925 – 7.125GHz band, the channel bandwidth must be < 320MHz.

Test Procedure Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 – Section 12.5
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = in the range of 1% to 5% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All data rates, antenna configurations and channels (low, mid, and high) were investigated, and tabular data provided. Only the worst-case plots are reported.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 18 of 133

V 12.0 03/03/2026


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2.1 Antenna 0 26dB & 99% Bandwidth Measurements – VLP


	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	6115	33	a	54Mbps	16.57	20.27	320	Pass
	6255	61	a	54Mbps	16.57	20.29	320	Pass
	6415	93	a	54Mbps	16.59	20.53	320	Pass
	6115	33	ax (20MHz)	MCS11	19.10	22.31	320	Pass
	6255	61	ax (20MHz)	MCS11	19.14	22.29	320	Pass
	6415	93	ax (20MHz)	MCS11	19.14	22.45	320	Pass
	6125	35	ax (40MHz)	MCS11	37.92	39.98	320	Pass
	6245	59	ax (40MHz)	MCS11	37.89	39.93	320	Pass
	6405	91	ax (40MHz)	MCS11	37.93	40.00	320	Pass
	6145	39	ax (80MHz)	MCS11	77.57	80.85	320	Pass
	6225	55	ax (80MHz)	MCS11	77.60	80.83	320	Pass
	6385	87	ax (80MHz)	MCS11	77.62	80.73	320	Pass
Band 6	6435	97	a	54Mbps	16.57	20.22	320	Pass
	6475	105	a	54Mbps	16.57	20.37	320	Pass
	6515	113	a	54Mbps	16.59	20.67	320	Pass
	6435	97	ax (20MHz)	MCS11	19.14	22.26	320	Pass
	6475	105	ax (20MHz)	MCS11	19.14	22.45	320	Pass
	6515	113	ax (20MHz)	MCS11	19.11	22.29	320	Pass
	6445	99	ax (40MHz)	MCS11	37.96	39.89	320	Pass
	6485	107	ax (40MHz)	MCS11	37.95	39.85	320	Pass
	6525	115	ax (40MHz)	MCS11	37.92	40.09	320	Pass
	6465	103	ax (80MHz)	MCS11	77.62	80.80	320	Pass
	6535	117	a	54Mbps	16.58	20.47	320	Pass
	6695	149	a	54Mbps	16.56	20.32	320	Pass
Band 7	6875	185	a	54Mbps	16.61	20.10	320	Pass
	6535	117	ax (20MHz)	MCS11	19.14	22.45	320	Pass
	6695	149	ax (20MHz)	MCS11	19.15	22.48	320	Pass
	6875	185	ax (20MHz)	MCS11	19.11	22.62	320	Pass
	6565	123	ax (40MHz)	MCS11	37.96	39.98	320	Pass
	6725	155	ax (40MHz)	MCS11	37.93	39.93	320	Pass
	6845	179	ax (40MHz)	MCS11	37.92	40.01	320	Pass
	6545	119	ax (80MHz)	MCS11	77.54	80.73	320	Pass
	6705	151	ax (80MHz)	MCS11	77.49	80.82	320	Pass
	6865	183	ax (80MHz)	MCS11	77.60	80.80	320	Pass
	6895	189	a	54Mbps	16.58	20.29	320	Pass
	6995	209	a	54Mbps	16.59	20.77	320	Pass
Band 8	7115	233	a	54Mbps	16.57	20.65	320	Pass
	6895	189	ax (20MHz)	MCS11	19.10	22.38	320	Pass
	6995	209	ax (20MHz)	MCS11	19.15	22.77	320	Pass
	7115	233	ax (20MHz)	MCS11	19.11	22.53	320	Pass
	6885	187	ax (40MHz)	MCS11	37.93	39.96	320	Pass
	7005	211	ax (40MHz)	MCS11	37.94	39.99	320	Pass
	7085	227	ax (40MHz)	MCS11	37.98	39.93	320	Pass
	6945	199	ax (80MHz)	MCS11	77.63	80.75	320	Pass
	7025	215	ax (80MHz)	MCS11	77.56	80.72	320	Pass

Table 7-2. Conducted Bandwidth Measurements Antenna 0


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 19 of 133

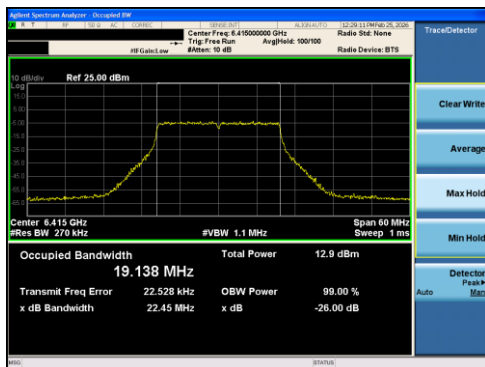

Plot 7-1 26dB BW & 99% OBW Antenna 0 (20MHz BW 802.11ax(SU) - Ch.93)

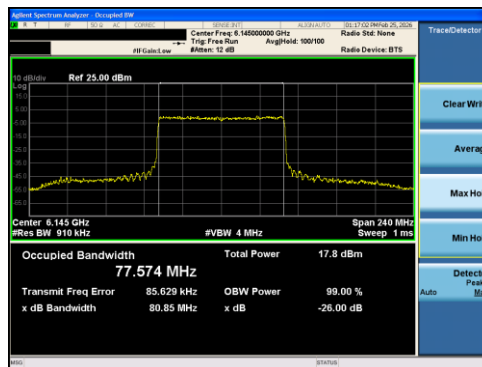


Plot 7-3 26dB BW & 99% OBW Antenna 0 (80MHz BW 802.11ax(SU) - Ch.39)

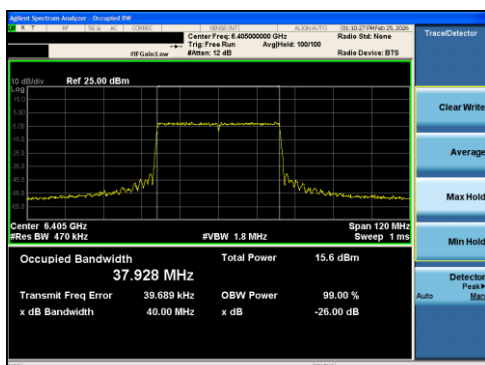


Plot 7-2 26dB BW & 99% OBW Antenna 0 (40MHz BW 802.11ax(SU) - Ch.91)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 20 of 133

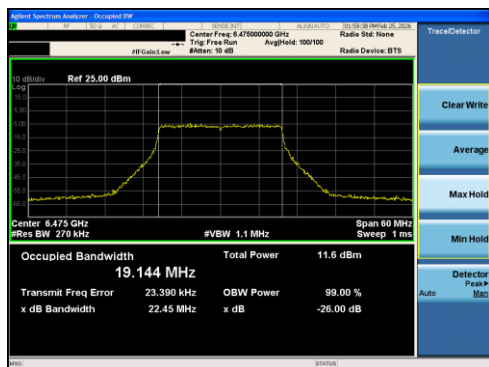

Plot 7-4 26dB BW & 99% OBW Antenna 0 (20MHz BW 802.11ax(SU) - Ch.105)

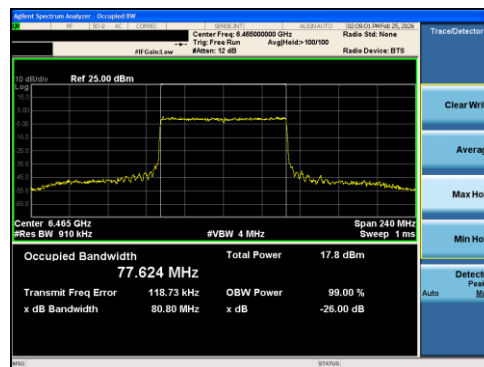


Plot 7-6 26dB BW & 99% OBW Antenna 0 (80MHz BW 802.11ax(SU) - Ch.103)

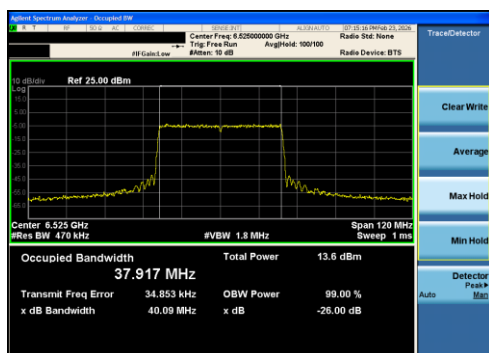


Plot 7-5 26dB BW & 99% OBW Antenna 0 (40MHz BW 802.11ax(SU) - Ch.115)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 21 of 133

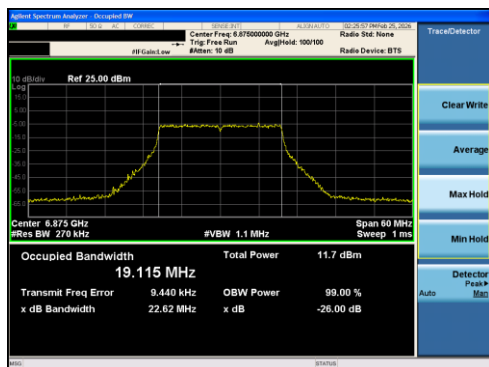

Plot 7-7 26dB BW & 99% OBW Antenna 0 (20MHz BW 802.11ax(SU) - Ch.185)



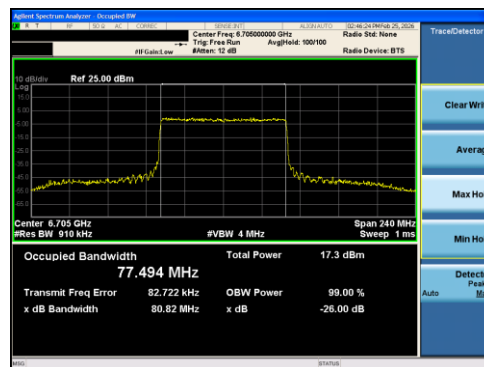


Plot 7-9 26dB BW & 99% OBW Antenna 0 (80MHz BW 802.11ax(SU) - Ch.151)

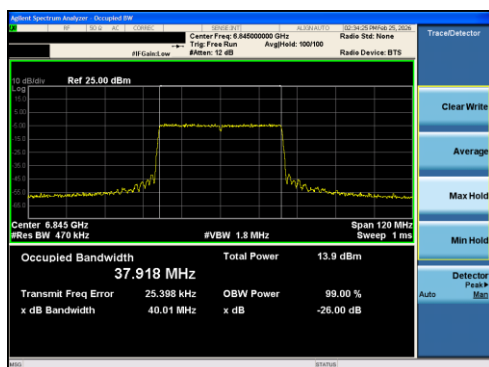

Plot 7-8 26dB BW & 99% OBW Antenna 0 (40MHz BW 802.11ax(SU) - Ch.179)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 22 of 133

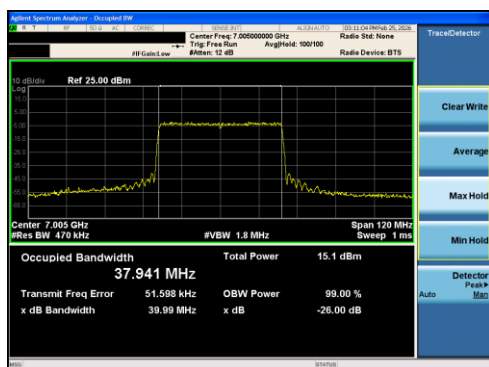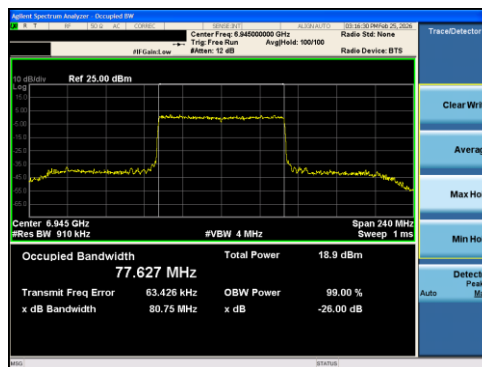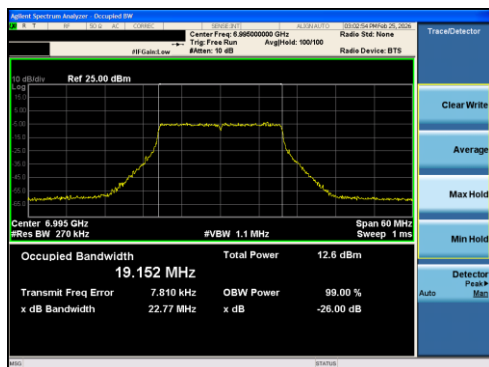

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 23 of 133

7.2.2 Antenna 1 26dB & 99% Bandwidth Measurements – VLP


	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	6115	33	a	54Mbps	16.57	20.05	320	Pass
	6255	61	a	54Mbps	16.56	20.11	320	Pass
	6415	93	a	54Mbps	16.57	20.46	320	Pass
	6115	33	ax (20MHz)	MCS11	19.13	22.53	320	Pass
	6255	61	ax (20MHz)	MCS11	19.10	22.38	320	Pass
	6415	93	ax (20MHz)	MCS11	19.10	22.10	320	Pass
	6125	35	ax (40MHz)	MCS11	37.96	39.92	320	Pass
	6245	59	ax (40MHz)	MCS11	37.93	39.93	320	Pass
	6405	91	ax (40MHz)	MCS11	37.93	40.00	320	Pass
	6145	39	ax (80MHz)	MCS11	77.50	80.82	320	Pass
Band 6	6225	55	ax (80MHz)	MCS11	77.61	80.75	320	Pass
	6385	87	ax (80MHz)	MCS11	77.55	80.88	320	Pass
	6435	97	a	54Mbps	16.56	20.57	320	Pass
	6475	105	a	54Mbps	16.58	20.50	320	Pass
	6515	113	a	54Mbps	16.55	20.47	320	Pass
	6435	97	ax (20MHz)	MCS11	19.14	22.49	320	Pass
	6475	105	ax (20MHz)	MCS11	19.12	22.43	320	Pass
	6515	113	ax (20MHz)	MCS11	19.10	22.44	320	Pass
	6445	99	ax (40MHz)	MCS11	37.92	40.03	320	Pass
	6485	107	ax (40MHz)	MCS11	37.97	39.97	320	Pass
Band 7	6525	115	ax (40MHz)	MCS11	37.94	39.97	320	Pass
	6465	103	ax (80MHz)	MCS11	77.56	80.83	320	Pass
	6535	117	a	54Mbps	16.57	20.49	320	Pass
	6695	149	a	54Mbps	16.59	20.35	320	Pass
	6875	185	a	54Mbps	16.55	20.34	320	Pass
	6535	117	ax (20MHz)	MCS11	19.13	22.13	320	Pass
	6695	149	ax (20MHz)	MCS11	19.12	22.50	320	Pass
	6875	185	ax (20MHz)	MCS11	19.14	22.40	320	Pass
	6565	123	ax (40MHz)	MCS11	37.98	39.96	320	Pass
	6725	155	ax (40MHz)	MCS11	37.94	39.91	320	Pass
Band 8	6845	179	ax (40MHz)	MCS11	37.93	39.91	320	Pass
	6545	119	ax (80MHz)	MCS11	77.59	80.86	320	Pass
	6705	151	ax (80MHz)	MCS11	77.45	80.80	320	Pass
	6865	183	ax (80MHz)	MCS11	77.59	80.69	320	Pass
	6895	189	a	54Mbps	16.58	20.45	320	Pass
	6995	209	a	54Mbps	16.57	20.40	320	Pass
	7115	233	a	54Mbps	16.58	20.50	320	Pass
	6895	189	ax (20MHz)	MCS11	19.16	22.46	320	Pass
	6995	209	ax (20MHz)	MCS11	19.12	22.29	320	Pass
	7115	233	ax (20MHz)	MCS11	19.15	22.67	320	Pass
	6885	187	ax (40MHz)	MCS11	37.93	39.90	320	Pass
	7005	211	ax (40MHz)	MCS11	37.91	39.92	320	Pass
	7085	227	ax (40MHz)	MCS11	37.92	39.99	320	Pass
	6945	199	ax (80MHz)	MCS11	77.52	80.67	320	Pass
	7025	215	ax (80MHz)	MCS11	77.52	80.65	320	Pass

Table 7-3. Conducted Bandwidth Measurements Antenna 1


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 24 of 133



Plot 7-13 26dB BW & 99% OBW Antenna 1 (20MHz BW 802.11ax(SU) - Ch.93)

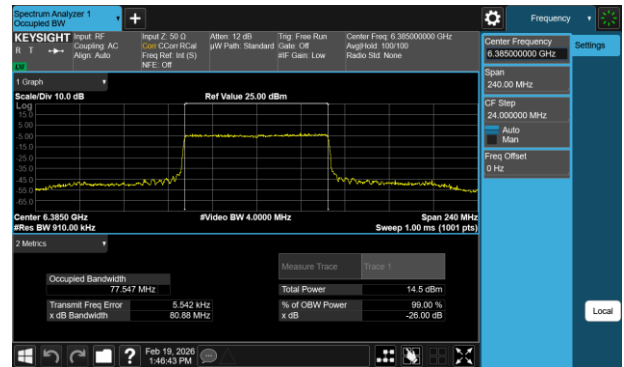

Plot 7-15 26dB BW & 99% OBW Antenna 1 (80MHz BW 802.11ax(SU) - Ch.87)

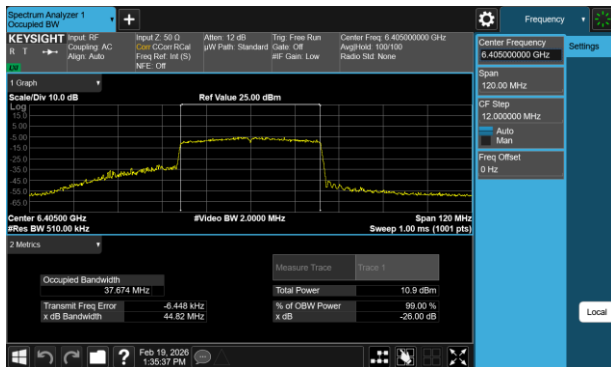


Plot 7-14 26dB BW & 99% OBW Antenna 1 (40MHz BW 802.11ax(SU) - Ch.91)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 25 of 133

V 12.0 03/03/2026


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

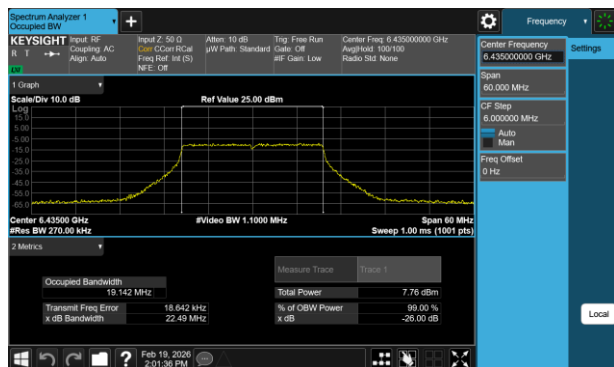

Plot 7-16 26dB BW & 99% OBW Antenna 1 (20MHz BW 802.11ax(SU) - Ch.97)



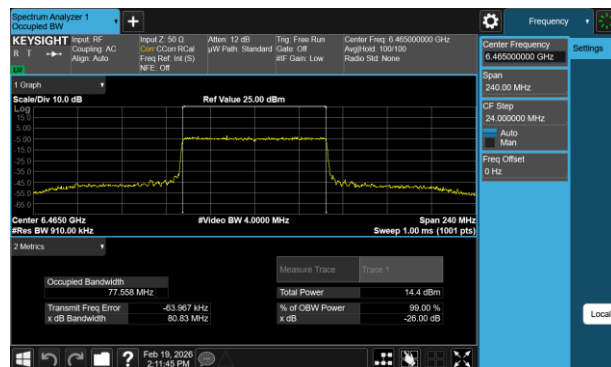


Plot 7-18 26dB BW & 99% OBW Antenna 1 (80MHz BW 802.11ax(SU) - Ch.103)


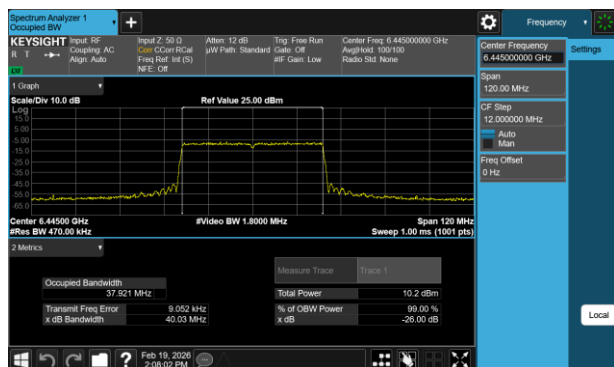


Plot 7-17 26dB BW & 99% OBW Antenna 1 (40MHz BW 802.11ax(SU) - Ch.99)

FCC ID: BCGA3374 IC: 579C-A3374	element	Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 26 of 133

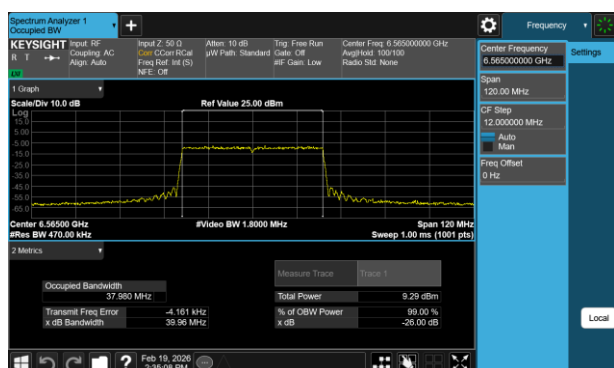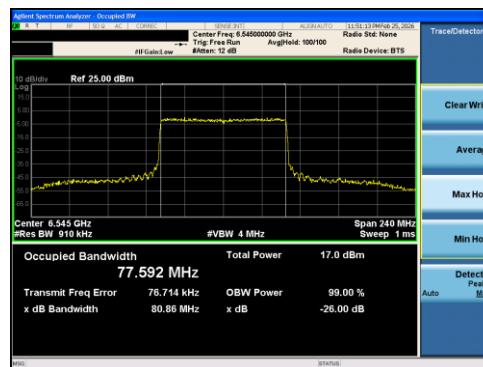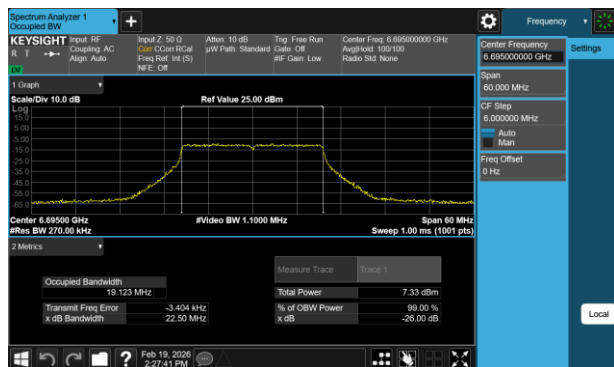

FCC ID: BCGA3374 IC: 579C-A3374	element	Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 27 of 133

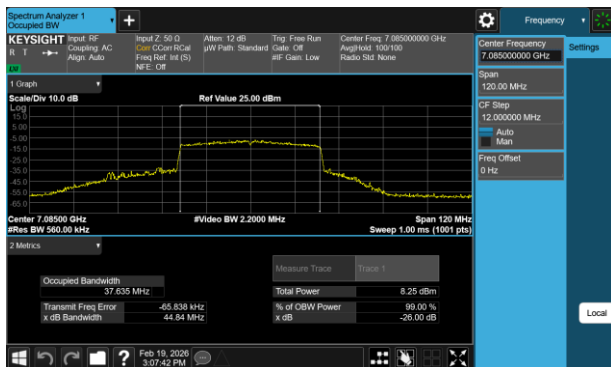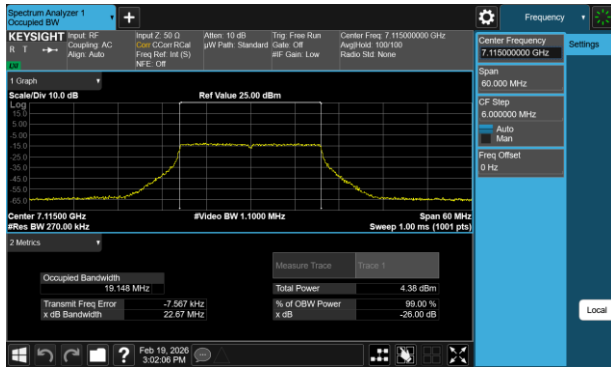

FCC ID: BCGA3374 IC: 579C-A3374	element	Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 28 of 133

7.3 Conducted Output Power and Max EIRP Measurement

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.925 – 7.125GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 14dBm for Very Low Power (VLP) devices.

Test Procedure Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 – Section 12.4.3.2 Method PM-G

KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 – Section 14.4 Measure-and-Sum Technique

KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 29 of 133

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.1 Antenna 0 Conducted Output Power Measurements – VLP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6115	33	24Mbps	2.88	0.83	3.71	14.00	-10.29
	6255	61	54Mbps	2.98	0.83	3.81	14.00	-10.19
	6415	93	24Mbps	3.94	0.12	4.06	14.00	-9.94
	6435	97	54Mbps	3.42	0.50	3.92	14.00	-10.08
	6475	105	24Mbps	3.37	0.50	3.87	14.00	-10.14
	6515	113	12Mbps	3.42	0.50	3.92	14.00	-10.08
	6535	117	24Mbps	2.98	1.08	4.06	14.00	-9.94
	6695	149	54Mbps	2.98	1.08	4.06	14.00	-9.94
	6875	185	54Mbps	2.99	1.08	4.07	14.00	-9.93
	6895	189	54Mbps	3.78	-0.11	3.67	14.00	-10.33
	6995	209	24Mbps	3.97	-0.11	3.86	14.00	-10.14
	7115	233	24Mbps	3.96	-0.11	3.85	14.00	-10.15

Table 7-4. Antenna 0 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6115	33	MCS4	3.27	0.83	4.10	14.00	-9.90
	6255	61	MCS2	3.15	0.83	3.98	14.00	-10.02
	6415	93	MCS4	4.43	0.12	4.55	14.00	-9.45
	6435	97	MCS4	3.99	0.50	4.49	14.00	-9.51
	6475	105	MCS11	3.94	0.50	4.44	14.00	-9.56
	6515	113	MCS4	3.99	0.50	4.49	14.00	-9.51
	6535	117	MCS2	3.34	1.08	4.42	14.00	-9.58
	6695	149	MCS11	3.24	1.08	4.32	14.00	-9.69
	6875	185	MCS4	3.17	1.08	4.25	14.00	-9.75
	6895	189	MCS11	4.39	-0.11	4.28	14.00	-9.72
	6995	209	MCS2	4.43	-0.11	4.32	14.00	-9.68
	7115	233	MCS2	4.43	-0.11	4.32	14.00	-9.68

Table 7-5. Antenna 0 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6125	35	MCS11	5.50	0.83	6.33	14.00	-7.67
	6245	59	MCS4	5.35	0.83	6.18	14.00	-7.82
	6405	91	MCS11	6.37	0.12	6.49	14.00	-7.51
	6445	99	MCS11	5.81	0.50	6.31	14.00	-7.69
	6485	107	MCS11	5.90	0.50	6.40	14.00	-7.60
	6525	115	MCS2	5.43	1.08	6.51	14.00	-7.49
	6565	123	MCS4	5.50	1.08	6.58	14.00	-7.42
	6725	155	MCS11	5.46	1.08	6.54	14.00	-7.47
	6845	179	MCS11	5.50	1.08	6.58	14.00	-7.42
	6885	187	MCS11	5.31	-0.11	5.20	14.00	-8.81
	7005	211	MCS11	6.24	-0.11	6.13	14.00	-7.87
	7085	227	MCS2	6.33	-0.11	6.22	14.00	-7.78

Table 7-6. Antenna 0 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 30 of 133

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6145	39	MCS4	8.94	0.83	9.77	14.00	-4.23
	6225	55	MCS2	8.66	0.83	9.49	14.00	-4.51
	6385	87	MCS11	9.47	0.12	9.59	14.00	-4.41
	6465	103	MCS4	8.99	0.50	9.49	14.00	-4.51
	6545	119	MCS2	8.45	1.08	9.53	14.00	-4.47
	6705	151	MCS2	8.35	1.08	9.43	14.00	-4.57
	6865	183	MCS4	8.48	1.08	9.56	14.00	-4.44
	6945	199	MCS2	9.98	-0.11	9.87	14.00	-4.13
	7025	215	MCS11	9.96	-0.11	9.85	14.00	-4.15

Table 7-7. Antenna 0 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 31 of 133

V 12.0 03/03/2026

7.3.2 Antenna 1 Conducted Output Power Measurements – VLP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6115	33	54Mbps	2.89	0.03	2.92	14.00	-11.09
	6255	61	24Mbps	2.98	0.03	3.01	14.00	-10.99
	6415	93	12Mbps	3.91	-0.48	3.43	14.00	-10.57
	6435	97	54Mbps	3.22	-0.51	2.71	14.00	-11.29
	6475	105	54Mbps	3.47	-0.51	2.96	14.00	-11.04
	6515	113	54Mbps	3.35	-0.51	2.84	14.00	-11.16
	6535	117	54Mbps	3.00	-0.10	2.90	14.00	-11.10
	6695	149	54Mbps	2.80	-0.10	2.70	14.00	-11.30
	6875	185	54Mbps	2.89	-0.10	2.79	14.00	-11.21
	6895	189	54Mbps	3.95	-0.35	3.60	14.00	-10.40
	6995	209	12Mbps	3.91	-0.35	3.56	14.00	-10.44
	7115	233	54Mbps	3.89	-0.35	3.54	14.00	-10.46

Table 7-8. Antenna 1 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6115	33	MCS2	3.21	0.03	3.24	14.00	-10.76
	6255	61	MCS2	3.24	0.03	3.27	14.00	-10.73
	6415	93	MCS2	4.48	-0.48	4.00	14.00	-10.00
	6435	97	MCS11	3.99	-0.51	3.48	14.00	-10.52
	6475	105	MCS4	3.94	-0.51	3.43	14.00	-10.57
	6515	113	MCS4	3.93	-0.51	3.42	14.00	-10.58
	6535	117	MCS4	3.12	-0.10	3.02	14.00	-10.98
	6695	149	MCS4	3.35	-0.10	3.25	14.00	-10.76
	6875	185	MCS4	3.23	-0.10	3.13	14.00	-10.87
	6895	189	MCS4	4.45	-0.35	4.10	14.00	-9.90
	6995	209	MCS2	4.44	-0.35	4.09	14.00	-9.91
	7115	233	MCS2	4.49	-0.35	4.14	14.00	-9.86

Table 7-9. Antenna 1 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6125	35	MCS11	5.24	0.03	5.27	14.00	-8.73
	6245	59	MCS4	5.48	0.03	5.51	14.00	-8.49
	6405	91	MCS2	6.21	-0.48	5.73	14.00	-8.28
	6445	99	MCS2	6.00	-0.51	5.49	14.00	-8.51
	6485	107	MCS11	5.77	-0.51	5.26	14.00	-8.74
	6525	115	MCS11	5.49	-0.10	5.39	14.00	-8.61
	6565	123	MCS4	5.19	-0.10	5.09	14.00	-8.92
	6725	155	MCS2	5.49	-0.10	5.39	14.00	-8.61
	6845	179	MCS11	5.19	-0.10	5.09	14.00	-8.91
	6885	187	MCS11	5.33	-0.35	4.98	14.00	-9.02
	7005	211	MCS11	6.47	-0.35	6.12	14.00	-7.88
	7085	227	MCS11	6.41	-0.35	6.06	14.00	-7.94

Table 7-10. Antenna 1 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 32 of 133

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6145	39	MCS2	8.73	0.03	8.76	14.00	-5.24
	6225	55	MCS11	8.82	0.03	8.85	14.00	-5.15
	6385	87	MCS11	9.30	-0.48	8.82	14.00	-5.18
	6465	103	MCS11	8.93	-0.51	8.42	14.00	-5.58
	6545	119	MCS2	8.21	-0.10	8.11	14.00	-5.89
	6705	151	MCS2	8.31	-0.10	8.21	14.00	-5.79
	6865	183	MCS11	8.37	-0.10	8.27	14.00	-5.73
	6945	199	MCS11	9.91	-0.35	9.56	14.00	-4.44
	7025	215	MCS2	9.80	-0.35	9.45	14.00	-4.55

Table 7-11. Antenna 1 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 33 of 133

V 12.0 03/03/2026

7.3.3 SDM Conducted Output Power Measurements – VLP

6GHz (20MHz Bandwidth) (1+2)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1	Summed				
	6115	33	SDM	MCS4	0.94	0.83	3.90	0.45	4.35	14.00	-9.65
	6255	61	SDM	MCS11	0.67	0.93	3.81	0.45	4.26	14.00	-9.74
	6415	93	SDM	MCS11	1.30	1.47	4.40	-0.17	4.23	14.00	-9.77
	6435	97	SDM	MCS4	1.21	1.49	4.36	0.02	4.38	14.00	-9.62
	6475	105	SDM	MCS4	1.29	1.25	4.28	0.02	4.30	14.00	-9.70
	6515	113	SDM	MCS2	1.44	1.18	4.32	0.02	4.34	14.00	-9.66
	6535	117	SDM	MCS4	0.90	0.83	3.88	0.53	4.41	14.00	-9.59
	6695	149	SDM	MCS4	0.80	0.82	3.82	0.53	4.35	14.00	-9.65
	6875	185	SDM	MCS11	0.85	0.93	3.90	0.53	4.43	14.00	-9.57
	6895	189	SDM	MCS11	1.98	1.61	4.81	-0.23	4.58	14.00	-9.42
	6995	209	SDM	MCS11	1.89	1.86	4.89	-0.23	4.66	14.00	-9.34
	7115	233	SDM	MCS11	1.90	1.76	4.84	-0.23	4.61	14.00	-9.39

Table 7-12. SDM 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1	Summed				
	6125	35	SDM	MCS2	2.88	2.99	5.94	0.45	6.39	14.00	-7.61
	6245	59	SDM	MCS2	2.79	2.73	5.77	0.45	6.22	14.00	-7.78
	6405	91	SDM	MCS4	3.16	3.44	6.31	-0.17	6.14	14.00	-7.86
	6445	99	SDM	MCS11	3.36	3.24	6.31	0.02	6.33	14.00	-7.67
	6485	107	SDM	MCS2	3.49	3.47	6.49	0.02	6.51	14.00	-7.49
	6525	115	SDM	MCS2	2.94	2.95	5.96	0.53	6.49	14.00	-7.51
	6565	123	SDM	MCS4	2.84	2.68	5.77	0.53	6.30	14.00	-7.70
	6725	155	SDM	MCS11	2.88	2.84	5.87	0.53	6.40	14.00	-7.60
	6845	179	SDM	MCS11	2.98	2.81	5.91	0.53	6.44	14.00	-7.56
	6885	187	SDM	MCS2	2.80	2.88	5.85	-0.23	5.62	14.00	-8.38
	7005	211	SDM	MCS2	3.63	3.81	6.73	-0.23	6.50	14.00	-7.50
	7085	227	SDM	MCS4	3.99	3.90	6.95	-0.23	6.72	14.00	-7.28

Table 7-13. SDM 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1	Summed				
	6145	39	SDM	MCS4	5.79	5.76	8.78	0.45	9.23	14.00	-4.77
	6225	55	SDM	MCS11	5.82	5.98	8.91	0.45	9.36	14.00	-4.64
	6385	87	SDM	MCS2	6.70	6.90	9.81	-0.17	9.64	14.00	-4.36
	6465	103	SDM	MCS2	6.47	6.37	9.43	0.02	9.45	14.00	-4.55
	6545	119	SDM	MCS4	5.89	5.91	8.91	0.53	9.44	14.00	-4.56
	6705	151	SDM	MCS4	5.82	5.81	8.83	0.53	9.36	14.00	-4.64
	6865	183	SDM	MCS2	5.88	5.81	8.85	0.53	9.38	14.00	-4.62
	6945	199	SDM	MCS2	6.85	6.93	9.90	-0.23	9.67	14.00	-4.33
	7025	215	SDM	MCS2	6.81	6.74	9.78	-0.23	9.55	14.00	-4.45

Table 7-14. SDM 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 34 of 133

Note:

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 662911 v02r01 Section E)1), the conducted powers at Antenna 0 and Antenna 1 were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Subclause 14.6.3, the correlated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = G_{ANT} + \text{Array Gain dBi}$$

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Subclause 14.6.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log [(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample SDM Calculation:

At 6115MHz in 802.11ax (20MHz BW) mode, the average conducted output power was measured to be 0.94 dBm for Antenna 0 and 0.83 dBm for Antenna 1.

$$\text{Antenna 0} + \text{Antenna 1} = \text{SDM}$$

$$(0.94 \text{ dBm} + 0.83 \text{ dBm}) = (1.242 \text{ mW} + 1.211 \text{ mW}) = 2.453 \text{ mW} = 3.90 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 6115MHz in 802.11ax (20MHz BW), SDM mode, the average SDM conducted power was calculated to be 3.90 dBm with directional gain of 0.45 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$3.90 \text{ dBm} + 0.45 \text{ dBi} = 4.35$$

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 35 of 133

7.4 Maximum Power Spectral Density

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.925 – 7.125GHz bands, the maximum permissible power spectral density must not exceed -5dBm e.i.r.p. in any 1-megahertz band for Very Low Power operating modes.

Test Procedure Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 – Section 12.4.2.2

KDB 789033 D02 v02r01 – Section F

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 – Section 14.5.2.2 Measure-and-Sum Technique

KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Set span to encompass the entire 99% OBW of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span/RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. All data rates and channels (low, mid, and high) were investigated, and tabular data provided. Only the worst-case plots are reported.
2. The duty cycle correction factor (DCCF) has been applied as an amplitude offset in the spectrum analyzer to ensure the required correction is accurately reflected in the measured Power Spectral Density (PSD). The offset value is indicated on each PSD plot.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 36 of 133


V 12.0 03/03/2026

7.4.1 Antenna 0 Power Spectral Density Measurements – VLP


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	6115	33	a	12Mbps	-8.57	0.83	-7.74	-5	-2.74
	6175	61	a	36Mbps	-7.99	0.83	-7.16	-5	-2.16
	6415	93	a	12Mbps	-7.36	0.12	-7.24	-5	-2.24
	6115	33	ax (20MHz)	MCS4	-9.02	0.83	-8.19	-5	-3.19
	6175	61	ax (20MHz)	MCS4	-8.74	0.83	-7.91	-5	-2.91
	6415	93	ax (20MHz)	MCS2	-7.88	0.12	-7.76	-5	-2.76
	6125	35	ax (40MHz)	MCS4	-9.06	0.83	-8.23	-5	-3.23
	6165	59	ax (40MHz)	MCS4	-8.74	0.83	-7.91	-5	-2.91
	6405	91	ax (40MHz)	MCS2	-8.07	0.12	-7.95	-5	-2.95
	6145	39	ax (80MHz)	MCS2	-8.24	0.83	-7.41	-5	-2.41
Band 6	6145	55	ax (80MHz)	MCS2	-8.51	0.83	-7.68	-5	-2.68
	6385	87	ax (80MHz)	MCS2	-8.52	0.12	-8.40	-5	-3.40
	6435	97	a	6Mbps	-8.13	0.5	-7.63	-5	-2.63
	6475	105	a	12Mbps	-9.01	0.5	-8.51	-5	-3.51
	6515	113	a	6Mbps	-8.97	0.5	-8.47	-5	-3.47
	6345	97	ax (20MHz)	MCS2	-8.38	0.5	-7.88	-5	-2.88
	6475	105	ax (20MHz)	MCS2	-9.34	0.5	-8.84	-5	-3.84
	6515	113	ax (20MHz)	MCS4	-9.18	0.5	-8.68	-5	-3.68
	6445	99	ax (40MHz)	MCS2	-9.09	0.5	-8.59	-5	-3.59
	6485	107	ax (40MHz)	MCS2	-9.46	0.5	-8.96	-5	-3.96
Band 7	6525	115	ax (40MHz)	MCS4	-9.07	0.5	-8.57	-5	-3.57
	6465	103	ax (80MHz)	MCS2	-8.90	0.5	-8.40	-5	-3.40
	6535	117	a	12Mbps	-9.39	1.08	-8.31	-5	-3.31
	6695	149	a	36Mbps	-8.95	1.08	-7.87	-5	-2.87
	6875	185	a	36Mbps	-8.36	1.08	-7.28	-5	-2.28
	6535	117	ax (20MHz)	MCS2	-9.75	1.08	-8.67	-5	-3.67
	6695	149	ax (20MHz)	MCS4	-9.56	1.08	-8.48	-5	-3.48
	6875	185	ax (20MHz)	MCS4	-8.96	1.08	-7.88	-5	-2.88
	6565	123	ax (40MHz)	MCS4	-9.43	1.08	-8.35	-5	-3.35
	6725	155	ax (40MHz)	MCS4	-9.24	1.08	-8.16	-5	-3.16
Band 8	6885	179	ax (40MHz)	MCS4	-9.30	1.08	-8.22	-5	-3.22
	6545	119	ax (80MHz)	MCS2	-9.48	1.08	-8.40	-5	-3.40
	6705	151	ax (80MHz)	MCS2	-9.03	1.08	-7.95	-5	-2.95
	6865	183	ax (80MHz)	MCS2	-9.17	1.08	-8.09	-5	-3.09
	6895	189	a	36Mbps	-7.84	-0.11	-7.95	-5	-2.95
	6995	209	a	12Mbps	-8.27	-0.11	-8.38	-5	-3.38
	7115	233	a	12Mbps	-7.53	-0.11	-7.64	-5	-2.64
	6895	189	ax (20MHz)	MCS4	-7.98	-0.11	-8.09	-5	-3.09
	6995	209	ax (20MHz)	MCS4	-8.51	-0.11	-8.62	-5	-3.62
	7115	233	ax (20MHz)	MCS4	-7.85	-0.11	-7.96	-5	-2.96
Band 8	6925	187	ax (40MHz)	MCS4	-9.38	-0.11	-9.49	-5	-4.49
	7005	211	ax (40MHz)	MCS2	-8.92	-0.11	-9.03	-5	-4.03
	7085	227	ax (40MHz)	MCS2	-8.11	-0.11	-8.22	-5	-3.22
	6945	199	ax (80MHz)	MCS2	-7.36	-0.11	-7.47	-5	-2.47
	7025	215	ax (80MHz)	MCS2	-8.09	-0.11	-8.20	-5	-3.20

Table 7-15. Power Spectral Density Measurements Antenna 0


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 37 of 133

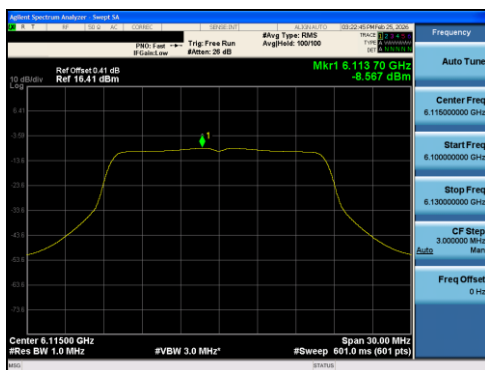

Plot 7-25 PSD Antenna 0 (20MHz BW 802.11a - Ch.33)



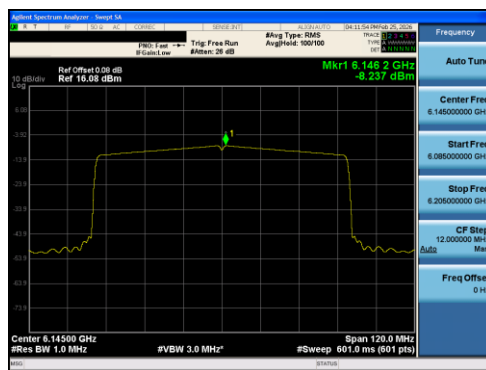


Plot 7-27 PSD Antenna 0 (80MHz BW 802.11ax(SU) - Ch.39)



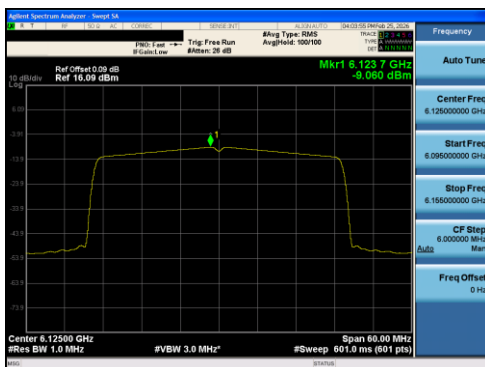


Plot 7-26 PSD Antenna 0 (40MHz BW 802.11ax(SU) - Ch.35)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 38 of 133

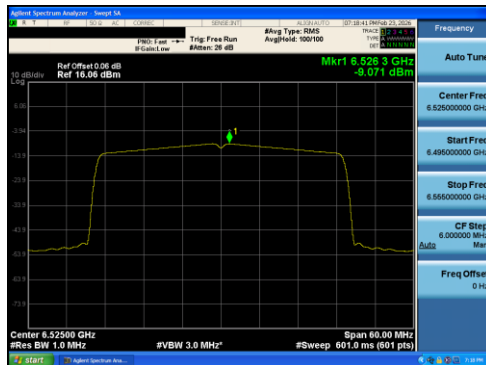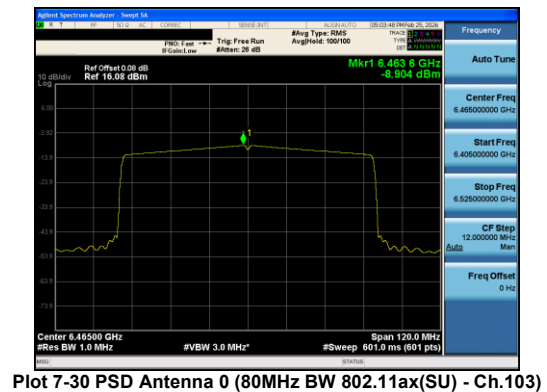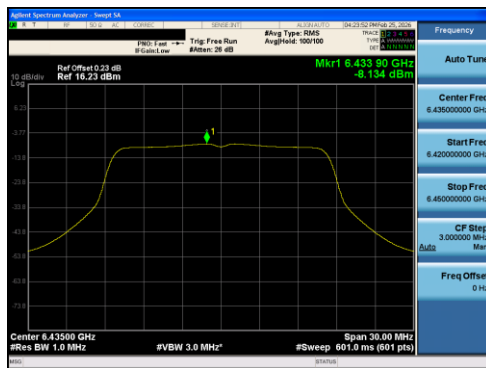


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 39 of 133

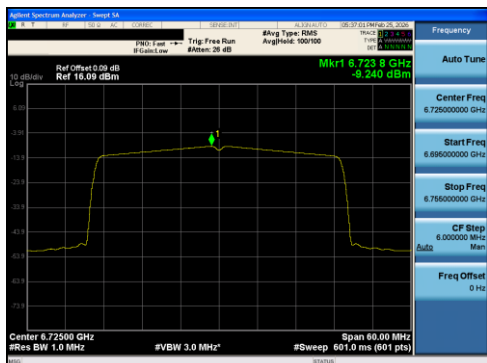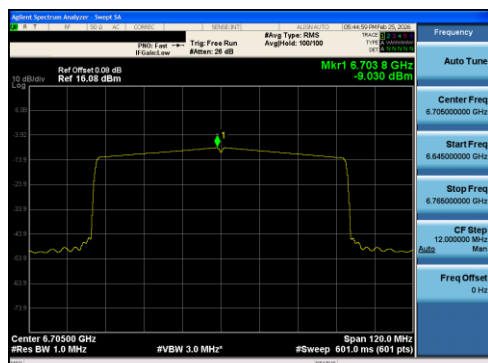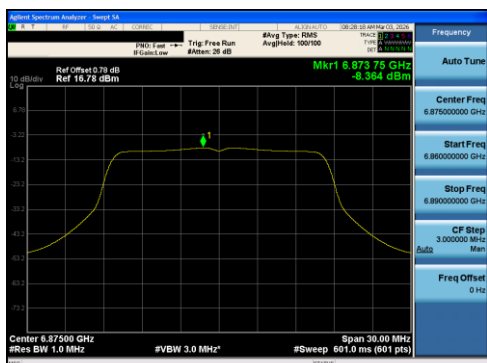


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 40 of 133

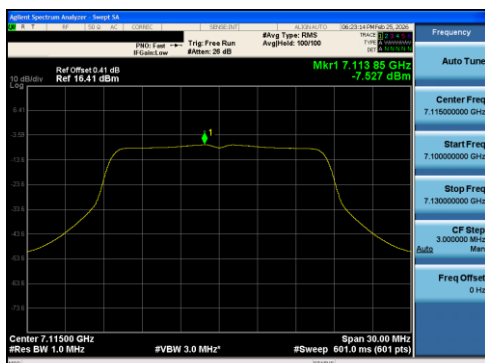

Plot 7-34 PSD Antenna 0 (20MHz BW 802.11a - Ch.233)

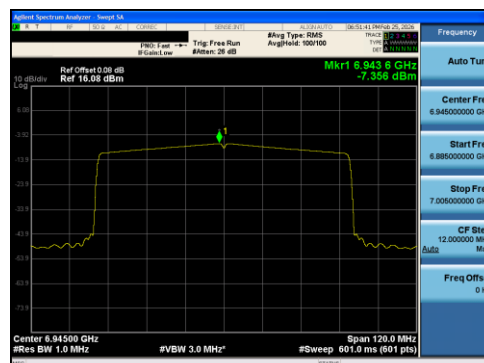

Plot 7-36 PSD Antenna 0 (80MHz BW 802.11ax(SU) - Ch.199)

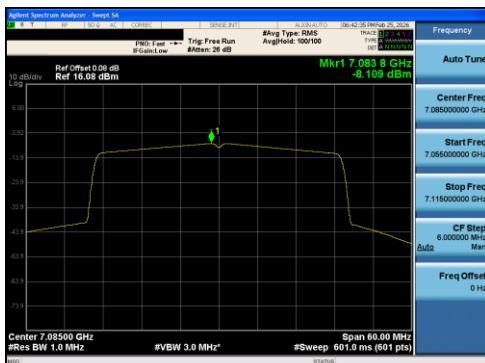

Plot 7-35 PSD Antenna 0 (40MHz BW 802.11ax(SU) - Ch.227)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 41 of 133

7.4.2 Antenna 1 Power Spectral Density Measurements – VLP


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	6115	33	a	36Mbps	-8.52	0.03	-8.49	-5	-3.49
	6175	61	a	12Mbps	-8.72	0.03	-8.69	-5	-3.69
	6415	93	a	12Mbps	-7.44	-0.48	-7.92	-5	-2.92
	6115	33	ax (20MHz)	MCS2	-9.08	0.03	-9.05	-5	-4.05
	6175	61	ax (20MHz)	MCS4	-8.92	0.03	-8.89	-5	-3.89
	6415	93	ax (20MHz)	MCS4	-7.57	-0.48	-8.05	-5	-3.05
	6125	35	ax (40MHz)	MCS2	-9.35	0.03	-9.32	-5	-4.32
	6165	59	ax (40MHz)	MCS4	-8.60	0.03	-8.57	-5	-3.57
	6405	91	ax (40MHz)	MCS2	-8.18	-0.48	-8.66	-5	-3.66
	6145	39	ax (80MHz)	MCS2	-8.52	0.03	-8.49	-5	-3.49
Band 6	6145	55	ax (80MHz)	MCS2	-8.37	0.03	-8.34	-5	-3.34
	6385	87	ax (80MHz)	MCS2	-7.85	-0.48	-8.33	-5	-3.33
	6435	97	a	36Mbps	-7.99	-0.51	-8.50	-5	-3.50
	6475	105	a	12Mbps	-8.16	-0.51	-8.67	-5	-3.67
	6515	113	a	6Mbps	-8.31	-0.51	-8.82	-5	-3.82
	6345	97	ax (20MHz)	MCS2	-8.37	-0.51	-8.88	-5	-3.88
	6475	105	ax (20MHz)	MCS2	-8.35	-0.51	-8.86	-5	-3.86
	6515	113	ax (20MHz)	MCS4	-8.88	-0.51	-9.39	-5	-4.39
	6445	99	ax (40MHz)	MCS4	-8.21	-0.51	-8.72	-5	-3.72
	6485	107	ax (40MHz)	MCS4	-8.58	-0.51	-9.09	-5	-4.09
Band 7	6525	115	ax (40MHz)	MCS2	-9.37	-0.51	-9.88	-5	-4.88
	6465	103	ax (80MHz)	MCS2	-8.61	-0.51	-9.12	-5	-4.12
	6535	117	a	6Mbps	-8.87	-0.1	-8.97	-5	-3.97
	6695	149	a	36Mbps	-8.63	-0.1	-8.73	-5	-3.73
	6875	185	a	36Mbps	-8.73	-0.1	-8.83	-5	-3.83
	6535	117	ax (20MHz)	MCS4	-9.04	-0.1	-9.14	-5	-4.14
	6695	149	ax (20MHz)	MCS4	-9.17	-0.1	-9.27	-5	-4.27
	6875	185	ax (20MHz)	MCS4	-9.26	-0.1	-9.36	-5	-4.36
	6565	123	ax (40MHz)	MCS4	-9.67	-0.1	-9.77	-5	-4.77
	6725	155	ax (40MHz)	MCS2	-8.44	-0.1	-8.54	-5	-3.54
Band 8	6885	179	ax (40MHz)	MCS2	-8.88	-0.1	-8.98	-5	-3.98
	6545	119	ax (80MHz)	MCS2	-9.10	-0.1	-9.20	-5	-4.20
	6705	151	ax (80MHz)	MCS2	-8.93	-0.1	-9.03	-5	-4.03
	6865	183	ax (80MHz)	MCS2	-8.96	-0.1	-9.06	-5	-4.06
	6895	189	a	36Mbps	-7.23	-0.35	-7.58	-5	-2.58
	6995	209	a	6Mbps	-7.33	-0.35	-7.68	-5	-2.68
	7115	233	a	36Mbps	-7.73	-0.35	-8.08	-5	-3.08
	6895	189	ax (20MHz)	MCS4	-7.78	-0.35	-8.13	-5	-3.13
	6995	209	ax (20MHz)	MCS4	-7.51	-0.35	-7.86	-5	-2.86
	7115	233	ax (20MHz)	MCS4	-7.16	-0.35	-7.51	-5	-2.51
	6925	187	ax (40MHz)	MCS4	-9.07	-0.35	-9.42	-5	-4.42
	7005	211	ax (40MHz)	MCS2	-7.34	-0.35	-7.69	-5	-2.69
	7085	227	ax (40MHz)	MCS2	-7.78	-0.35	-8.13	-5	-3.13
	6945	199	ax (80MHz)	MCS2	-7.56	-0.35	-7.91	-5	-2.91
	7025	215	ax (80MHz)	MCS2	-7.70	-0.35	-8.05	-5	-3.05

Table 7-16. Power Spectral Density Measurements Antenna 1


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 42 of 133

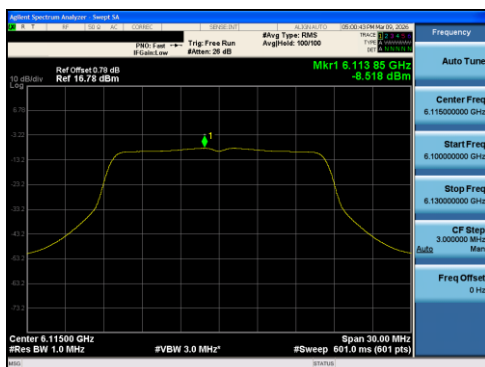

Plot 7-37 PSD Antenna 1 (20MHz BW 802.11a - Ch.33)

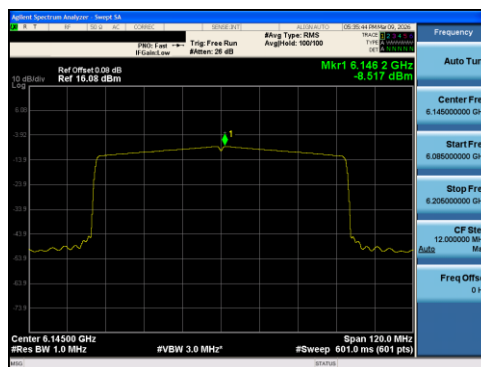


Plot 7-39 PSD Antenna 1 (80MHz BW 802.11ax(SU) - Ch.39)

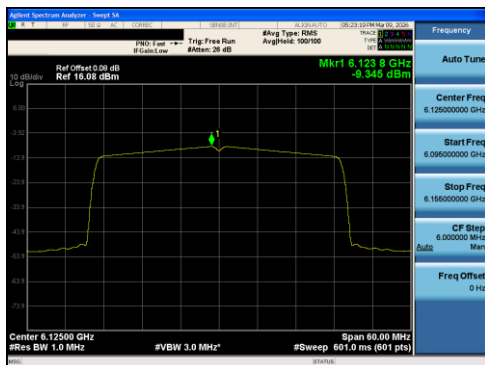


Plot 7-38 PSD Antenna 1 (40MHz BW 802.11ax(SU) - Ch.35)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 43 of 133

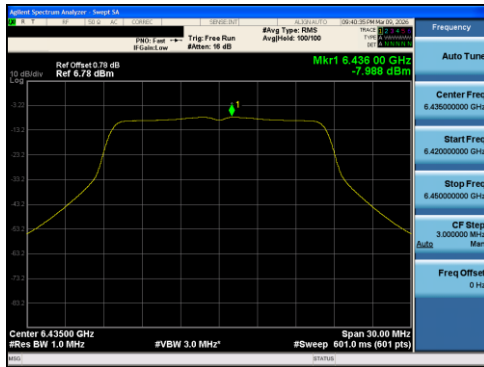

Plot 7-40 PSD Antenna 1 (20MHz BW 802.11a - Ch.97)

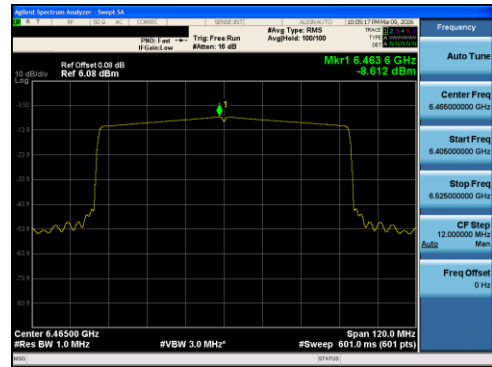


Plot 7-42 PSD Antenna 1 (80MHz BW 802.11ax(SU) - Ch.103)

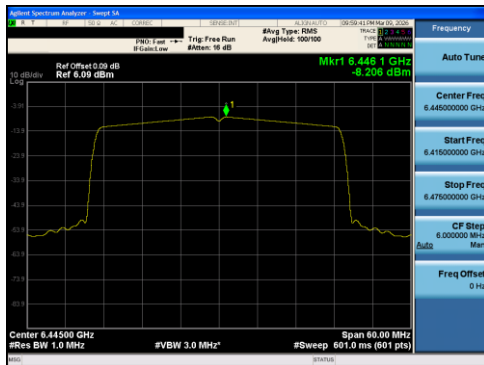


Plot 7-41 PSD Antenna 1 (40MHz BW 802.11ax(SU) - Ch.99)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 44 of 133

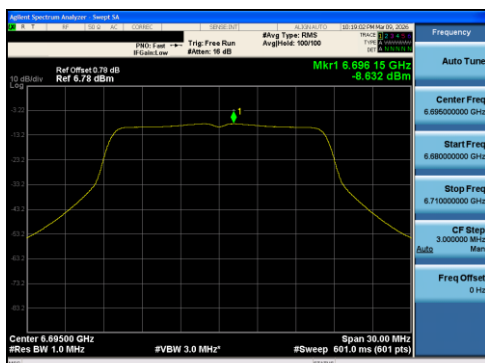

Plot 7-43 PSD Antenna 1 (20MHz BW 802.11a - Ch.149)

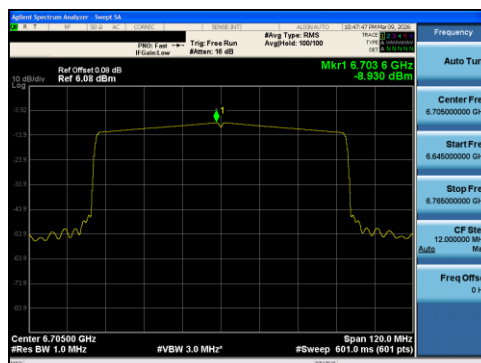


Plot 7-45 PSD Antenna 1 (80MHz BW 802.11ax(SU) - Ch.151)

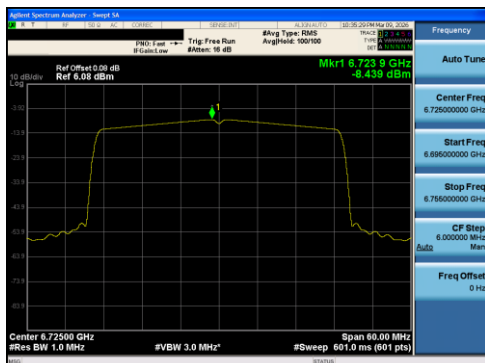


Plot 7-44 PSD Antenna 1 (40MHz BW 802.11ax(SU) - Ch.155)


FCC ID: BCGA3374 IC: 579C-A3374	element	Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 45 of 133

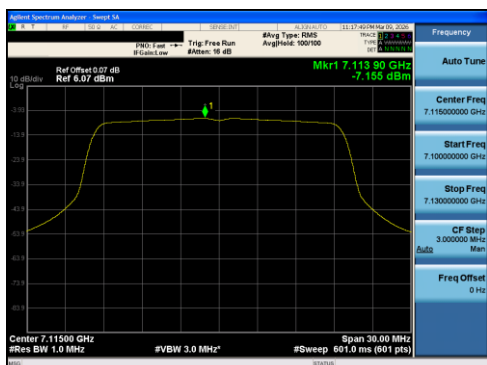

Plot 7-46 PSD Antenna 1 (20MHz BW 802.11ax(SU) - Ch.233)

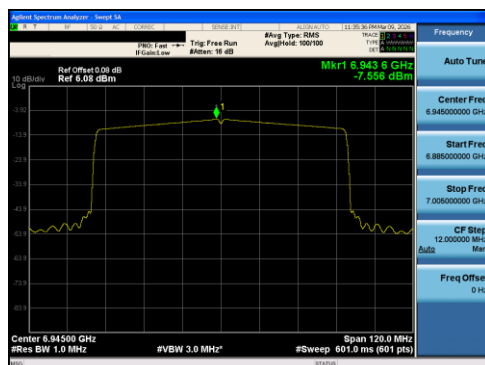

Plot 7-48 PSD Antenna 1 (80MHz BW 802.11ax(SU) - Ch.199)

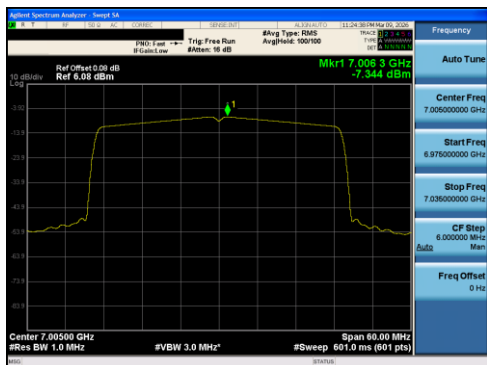

Plot 7-47 PSD Antenna 1 (40MHz BW 802.11ax(SU) - Ch.211)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 46 of 133

7.4.3 SDM Power Spectral Density Measurements – VLP


	Frequency [MHz]	Channel No.	802.11 Mode	Mode	Data Rate	Antenna 0 Measured Power Density [dBm/MHz]	Antenna 1 Measured Power Density [dBm/MHz]	Summed MIMO Power Density [dBm/MHz]	Directional Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	6115	33	ax (20MHz)	SDM	MCS2	-11.08	-11.51	-8.28	0.45	-7.83	-5	-2.83
	6255	61	ax (20MHz)	SDM	MCS2	-11.33	-11.46	-8.38	0.45	-7.93	-5	-2.93
	6415	93	ax (20MHz)	SDM	MCS2	-11.10	-11.33	-8.21	-0.17	-8.38	-5	-3.38
	6125	35	ax (40MHz)	SDM	MCS4	-11.35	-11.23	-8.28	0.45	-7.83	-5	-2.83
	6245	59	ax (40MHz)	SDM	MCS4	-11.12	-11.77	-8.42	0.45	-7.97	-5	-2.97
	6405	91	ax (40MHz)	SDM	MCS4	-11.10	-11.31	-8.20	-0.17	-8.37	-5	-3.37
	6145	39	ax (80MHz)	SDM	MCS2	-10.89	-11.42	-8.14	0.45	-7.69	-5	-2.69
	6225	55	ax (80MHz)	SDM	MCS2	-11.06	-11.28	-8.16	0.45	-7.71	-5	-2.71
	6385	87	ax (80MHz)	SDM	MCS2	-10.76	-10.29	-7.51	-0.17	-7.68	-5	-2.68
	6435	97	ax (20MHz)	SDM	MCS4	-10.66	-10.67	-7.66	0.02	-7.63	-5	-2.63
Band 6	6475	105	ax (20MHz)	SDM	MCS4	-11.08	-11.07	-8.07	0.02	-8.04	-5	-3.04
	6515	113	ax (20MHz)	SDM	MCS4	-10.75	-10.86	-7.79	0.02	-7.77	-5	-2.77
	6445	99	ax (40MHz)	SDM	MCS4	-10.85	-11.02	-7.92	0.02	-7.90	-5	-2.90
	6485	107	ax (40MHz)	SDM	MCS4	-11.31	-10.91	-8.09	0.02	-8.07	-5	-3.07
	6525	115	ax (40MHz)	SDM	MCS4	-11.46	-11.58	-8.51	0.02	-8.49	-5	-3.49
	6465	103	ax (80MHz)	SDM	MCS4	-10.66	-11.07	-7.85	0.02	-7.82	-5	-2.82
	6535	117	ax (20MHz)	SDM	MCS4	-11.42	-11.76	-8.58	0.53	-8.05	-5	-3.05
	6695	149	ax (20MHz)	SDM	MCS2	-11.72	-11.73	-8.71	0.53	-8.18	-5	-3.18
	6875	185	ax (20MHz)	SDM	MCS2	-11.43	-10.95	-8.17	0.53	-7.64	-5	-2.64
	6565	123	ax (40MHz)	SDM	MCS4	-11.74	-11.98	-8.85	0.53	-8.32	-5	-3.32
Band 7	6725	155	ax (40MHz)	SDM	MCS2	-11.17	-11.60	-8.37	0.53	-7.84	-5	-2.84
	6845	179	ax (40MHz)	SDM	MCS2	-10.91	-11.85	-8.34	0.53	-7.81	-5	-2.81
	6545	119	ax (80MHz)	SDM	MCS2	-11.56	-11.93	-8.73	0.53	-8.20	-5	-3.20
	6705	151	ax (80MHz)	SDM	MCS2	-10.96	-11.79	-8.34	0.53	-7.81	-5	-2.81
	6865	183	ax (80MHz)	SDM	MCS2	-11.26	-11.88	-8.55	0.53	-8.02	-5	-3.02
	6895	189	ax (20MHz)	SDM	MCS2	-10.54	-10.07	-7.29	-0.23	-7.51	-5	-2.51
	6995	209	ax (20MHz)	SDM	MCS4	-10.93	-10.79	-7.85	-0.23	-8.08	-5	-3.08
	7115	233	ax (20MHz)	SDM	MCS2	-9.88	-10.16	-7.00	-0.23	-7.23	-5	-2.23
	6885	187	ax (40MHz)	SDM	MCS2	-11.36	-11.55	-8.44	-0.23	-8.67	-5	-3.67
	7005	211	ax (40MHz)	SDM	MCS4	-11.05	-10.31	-7.65	-0.23	-7.88	-5	-2.88
Band 8	7085	227	ax (40MHz)	SDM	MCS4	-10.12	-10.19	-7.14	-0.23	-7.37	-5	-2.37
	6945	199	ax (80MHz)	SDM	MCS4	-10.53	-10.47	-7.49	-0.23	-7.72	-5	-2.72
	7025	215	ax (80MHz)	SDM	MCS4	-10.57	-10.37	-7.46	-0.23	-7.68	-5	-2.68

Table 7-17. Power Spectral Density Measurements SDM


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 47 of 133

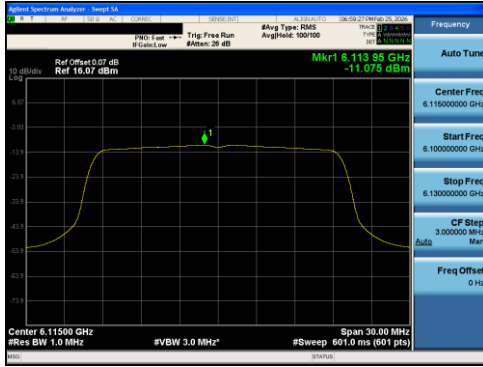


Plot 7-49 PSD SDM Antenna 0 (20MHz BW 802.11ax(SU) - Ch.33)

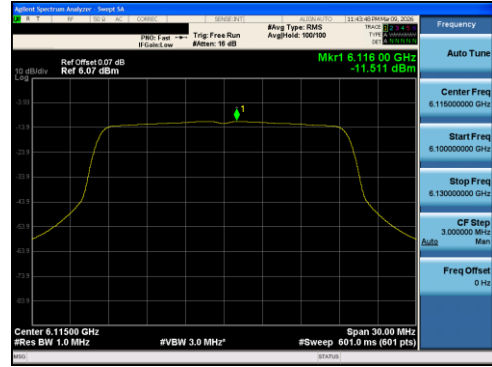


Plot 7-52 PSD SDM Antenna 1 (20MHz BW 802.11ax(SU) - Ch.33)

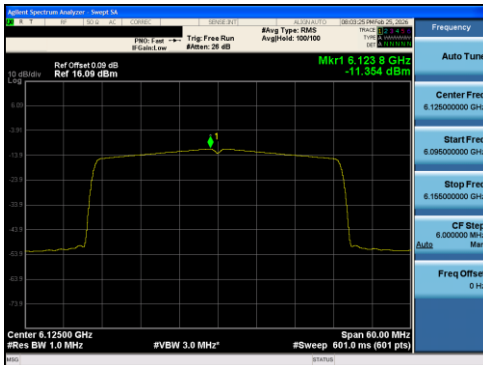


Plot 7-50 PSD SDM Antenna 0 (40MHz BW 802.11ax(SU) - Ch.35)

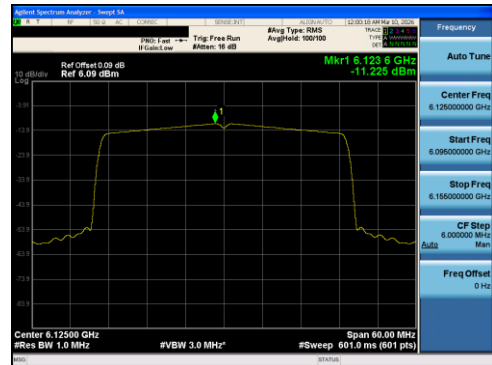

Plot 7-53 PSD SDM Antenna 1 (40MHz BW 802.11ax(SU) - Ch.35)

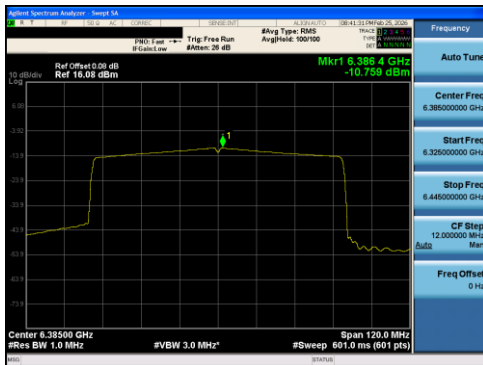


Plot 7-51 PSD SDM Antenna 0 (80MHz BW 802.11ax(SU) - Ch.87)

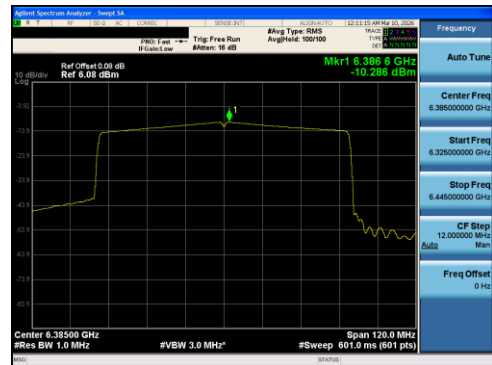


Plot 7-54 PSD SDM Antenna 1 (80MHz BW 802.11ax(SU) - Ch.87)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 48 of 133

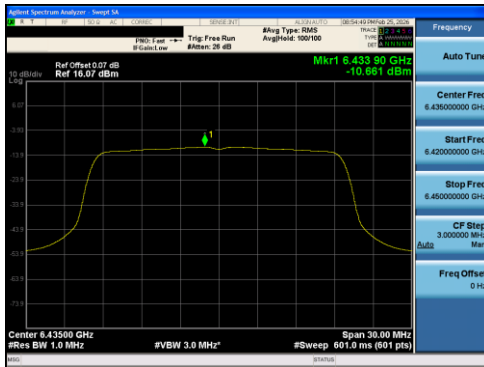


Plot 7-55 PSD SDM Antenna 0 (20MHz BW 802.11ax(SU) - Ch.97)

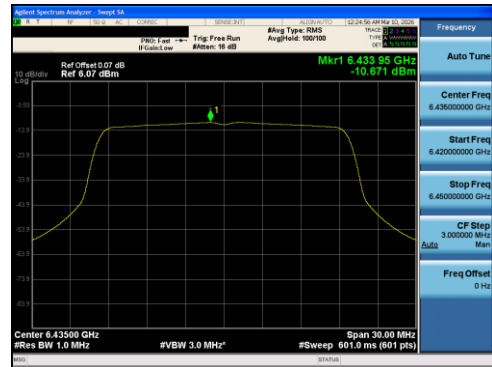


Plot 7-58 PSD SDM Antenna 1 (20MHz BW 802.11ax(SU) - Ch.97)

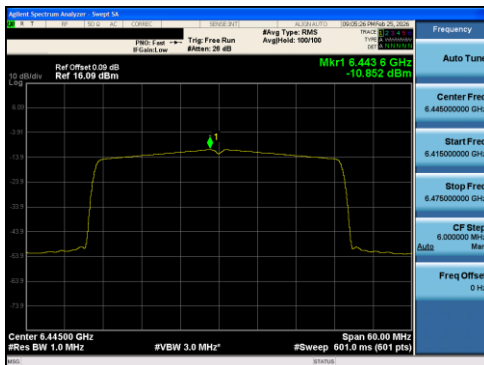


Plot 7-56 PSD SDM Antenna 0 (40MHz BW 802.11ax(SU) - Ch.99)

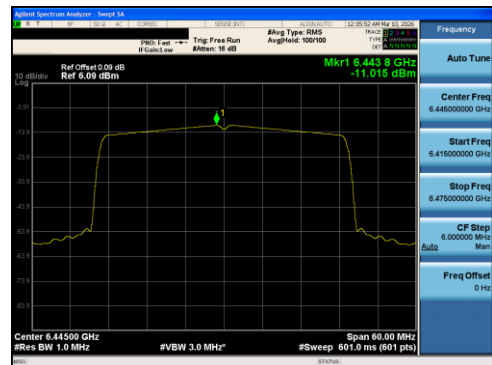

Plot 7-59 PSD SDM Antenna 1 (40MHz BW 802.11ax(SU) - Ch.99)

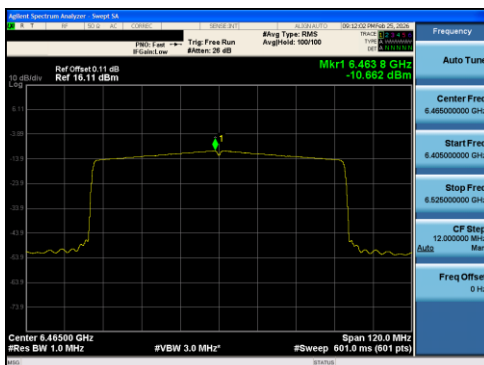


Plot 7-57 PSD SDM Antenna 0 (80MHz BW 802.11ax(SU) - Ch.103)

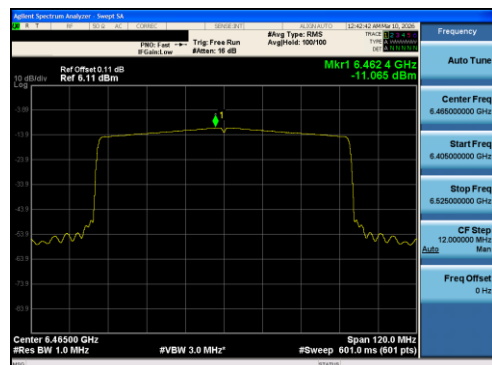


Plot 7-60 PSD SDM Antenna 1 (80MHz BW 802.11ax(SU) - Ch.103)


FCC ID: BCGA3374 IC: 579C-A3374	element	Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 49 of 133

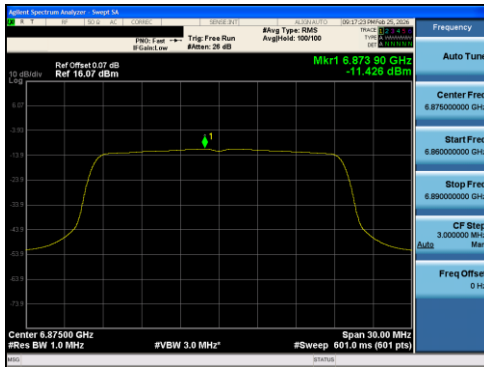


Plot 7-61 PSD SDM Antenna 0 (20MHz BW 802.11ax(SU) - Ch.185)

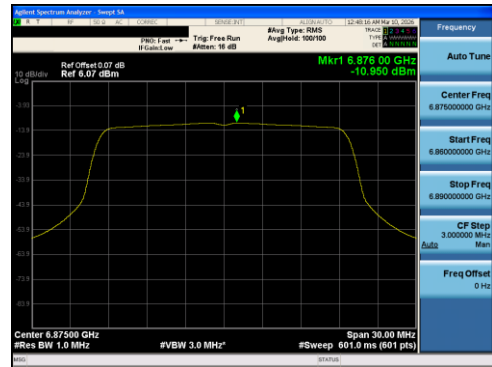


Plot 7-64 PSD SDM Antenna 1 (20MHz BW 802.11ax(SU) - Ch.185)

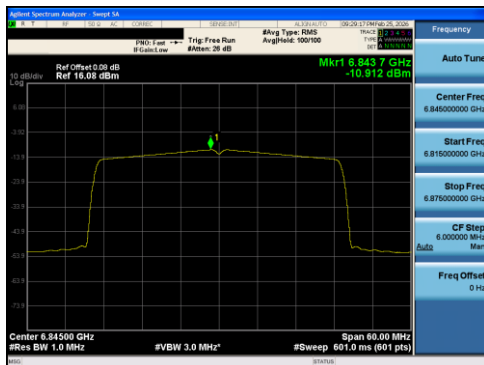


Plot 7-62 PSD SDM Antenna 0 (40MHz BW 802.11ax(SU) - Ch.179)

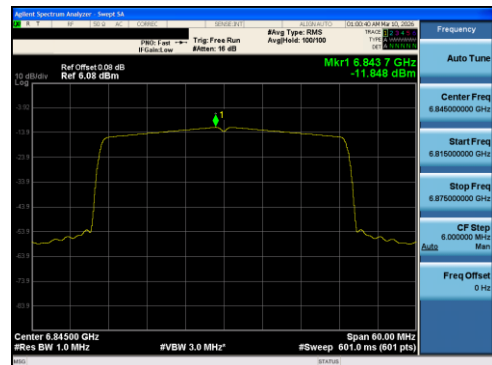

Plot 7-65 PSD SDM Antenna 1 (40MHz BW 802.11ax(SU) - Ch.179)

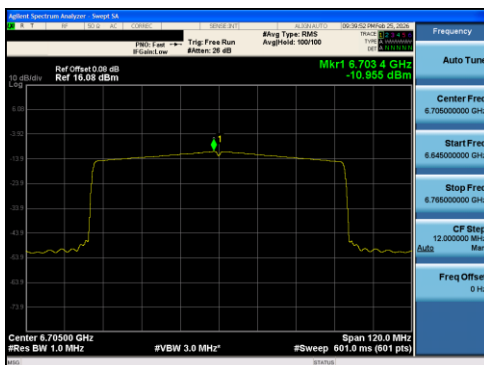

Plot 7-63 PSD SDM Antenna 0 (80MHz BW 802.11ax(SU) - Ch.151)

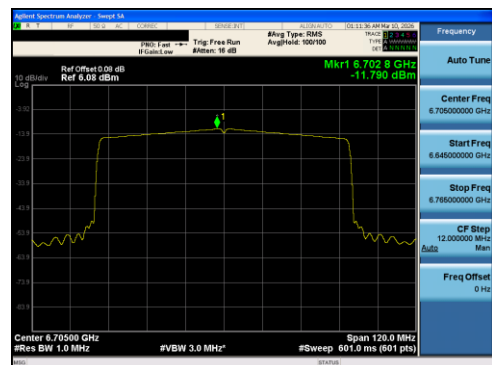

Plot 7-66 PSD SDM Antenna 1 (80MHz BW 802.11ax(SU) - Ch.151)

FCC ID: BCGA3374 IC: 579C-A3374	element	Test Dates: 05/15/2025 - 02/28/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-12-R1.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 50 of 133