

MEASUREMENT REPORT

FCC PART 15.247 / ISED RSS-247 WLAN 802.11a/ax (OFDMA)

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

09/15/2025 - 3/27/2026

Test Report Issue Date:

9/15/2026

Test Site/Location:

Element Materials Technology, Morgan Hill, CA USA

Test Report Serial No.:

1C2505300067-06-R2.BCG

FCC ID:

BCGA3374

IC:

579C-A3374

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A3374

EUT Type:

Smart Speaker

Frequency Range:

2412 – 2472MHz

Modulation Type:

OFDMA

FCC Classification:

Digital Transmission System (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification:

RSS-247 Issue 4

Test Procedure(s):

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to
C63.10a:2024, KDB 558074 D01 v05r02,
KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President



FCC ID: BCGA3374 IC: 579C-A3374	 element	Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 1 of 179

Revision Summary

Revision	Date	Comments	Revised By
-	04/07/2026	Initial Released	WKR007077
R1	06/02/2026	Addressed comment in section 2.1	WKR007077
R2	06/26/2026	Addressed comments in sections 2.2 to 2.6 and 7.2 to 7.10	WKR016622


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 2 of 179

V 12.0 03/03/2026


TABLE OF CONTENTS

1.0	INTRODUCTION.....	5
1.1	Scope	5
1.2	Element Materials Technology Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION	6
2.1	Equipment Description	6
2.2	Device Capabilities	6
2.3	Antenna Description	8
2.4	Test Support Equipment.....	9
2.5	Test Configuration	9
2.6	Software and Firmware	10
2.7	EMI Suppression Device(s)/Modifications	10
3.0	DESCRIPTION OF TESTS	11
3.1	Evaluation Procedure	11
3.2	AC Line Conducted Emissions	11
3.3	Radiated Emissions.....	12
3.4	Environmental Conditions.....	12
4.0	ANTENNA REQUIREMENTS	13
5.0	MEASUREMENT UNCERTAINTY.....	14
6.0	TEST EQUIPMENT CALIBRATION DATA.....	15
7.0	TEST RESULTS.....	16
7.1	Summary	16
7.2	99% OBW Measurement.....	17
7.3	6 dB Bandwidth Measurement	28
7.4	Output Power Measurement.....	36
7.5	Power Spectral Density	50
7.6	Conducted Authorized Band Edge	62
7.7	Conducted Spurious Emissions.....	89
7.8	Radiated Spurious Emissions – Above 1 GHz	103
7.9	Radiated Spurious Emissions – Below 1GHz.....	168
7.10	AC Line-Conducted Emissions Measurement	173
8.0	CONCLUSION	179

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 3 of 179



MEASUREMENT REPORT



Tx Frequency [MHz]	Antenna 0				Antenna 1				CDD			
	Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
2412 - 2467	41.400	16.17	300.608	24.78	42.170	16.25	208.449	23.19	76.736	18.85	512.861	27.10

EUT Overview (802.11ax – RU)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 4 of 179

V 12.0 03/03/2026

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISSED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISSED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 5 of 179

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Smart Speaker FCC ID: BCGA3374, IC: 579C-A3374**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN 802.11ax – RU (DTS) transmitter.

Test Device Serial No.: DWPYQ17WGN, F4Y3LP2074, G59KG4D2LL, GXC9HHV20W, DLWP4MKXKL, DMWY056GXX, JQW7TJGXT3

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), 802.15.4, Bluetooth (1x, EDR, LE1M, LE2M), UWB

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. 802.11ax Frequency/ Channel Operations

*Channel 13 is disabled for DTS 802.11ax HE20

Note: The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band	Duty Cycle [%]									
	Antenna 0		Antenna 1 Dedicated		Antenna 1 Common		CDD Dedicated		CDD Common	
	Duty Cycle [%]	DCCF [dB]	Duty Cycle [%]	DCCF [dB]	Duty Cycle [%]	DCCF [dB]	Duty Cycle [%]	DCCF [dB]	Duty Cycle [%]	DCCF [dB]
ax(RU) 26T HE20	98.311	0.074	98.537	0.064	98.311	0.074	98.537	0.064	98.311	0.074
ax(RU) 52T HE20	98.311	0.074	98.583	0.062	98.311	0.074	98.719	0.056	98.311	0.074
ax(RU) 106T HE20	98.311	0.074	98.742	0.055	98.311	0.074	98.583	0.062	98.311	0.074
ax(RU) 242T HE20	98.311	0.074	98.446	0.068	98.311	0.074	98.220	0.078	97.949	0.090

Table 2-2. Measured Duty Cycles

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 6 of 179

The device employs CDD technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		Antenna 0	Antenna 1	Antenna 0	Antenna 1	Antenna 0	Antenna 1
2.4GHz	11ax	✓	✓	✓	✓	✓	✓

Table 2-3. WiFi Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

CDD = Cyclic Delay Diversity - 2Tx Function

The device supports the following data rates (shown in Mbps):

MCS Index	Spatial Stream	MU-OFDMA (802.11ax)											
		26-tone RU			52-tone RU			106-tone RU			242-tone RU		
HE		0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI
0	1	0.9	0.8	0.8	1.8	1.7	1.5	3.8	3.5	3.2	8.6	8.1	7.3
1	1	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6
2	1	2.6	2.5	2.3	5.3	5	4.5	11.3	10.6	9.6	25.8	24.4	21.9
3	1	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3
4	1	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9
5	1	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5
6	1	7.9	7.5	6.8	15.9	15	13.5	33.8	31.9	28.7	77.4	73.1	65.8
7	1	8.8	8.3	7.5	17.6	16.7	15	37.5	35.4	31.9	86	81.3	73.1
8	1	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8
9	1	11.8	11.1	10	23.5	22.2	20	50	47.2	42.5	114.7	108.3	97.5
10	1	13.2	12.5	11.3	26.5	25	22.5	56.3	53.1	47.8	129	121.9	109.7
11	1	14.7	13.9	12.5	29.4	27.8	25	62.5	59	53.1	143.4	135.4	121.9
0	2	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6
1	2	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3
2	2	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9
3	2	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5
4	2	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8
5	2	14.1	13.3	12	28.2	26.7	24	60	56.7	51	137.6	130	117
6	2	15.9	15	13.5	31.8	30	27	67.5	63.8	57.4	154.9	146.3	131.6
7	2	17.6	16.7	15	35.3	33.3	30	75	70.8	63.8	172.1	162.5	146.3
8	2	21.2	20	18	42.4	40	36	90	85	76.5	206.5	195	175.5
9	2	23.5	22.2	20	47.1	44.4	40	100	94.4	85	229.4	216.7	195

Table 2-4. Supported Data Rates

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 7 of 179

This device supports simultaneous transmission operations, which allows multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Bluetooth 2.4GHz	Thread	WLAN	WIFI 5GHz	WIFI 6GHz
		BDR, EDR, LE	802.15.4	802.11 b/g/n/ax	802.11 a/n/ac/ax	802.11 a/ax
Antenna 0	Config 1	✓	✗	✗	✓	✗
	Config 2	✓	✗	✗	✗	✓
Antenna 1	Config 3	✗	✓	✗	✓	✗
	Config 4	✗	✓	✗	✗	✓

Table 2-5. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be Config 1 and reported in RF Bluetooth, RF UNII 5GHz OFDM, and RF UWB test reports.

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Frequency [GHz]	Antenna Gain (dBi)	
	Antenna 0	Antenna 1
2.4	1.03	1.49

Table 2-6. Highest Antenna Gain

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 8 of 179

2.4 Test Support Equipment

1	Apple MacBook Pro	Model:	A2141	S/N:	C02H604EQ05D
	w/AC/DC Adapter	Model:	A2166	S/N:	C4H042705ZNPM0WA6
2	Apple USB-C Cable	Model:	Chimp Cable	S/N:	304323
3	AC Adapter	Model:	A3228	S/N:	C4HHAU000PD0000EWV

Table 2-7. Test Support Equipment List

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 and KDB 558074 D01 v05r02. ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, Section 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, 7.6, and 7.7 for antenna port conducted emissions test setups

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through one orthogonal plane of X-orientation (flatbed) during the testing.

For AC line conducted and radiated test below 1GHz, following configuration was investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB-C Cable

Antenna 1 supports two signal paths (Dedicated and Common) to a single port via a splitter, with Common path power equal to or lower than Dedicated path power.

For 802.11b/g/n/ax-SU test results, see separate WLAN report, 1C2505300067-05.BCG

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 9 of 179

2.6 Software and Firmware

The test was conducted with firmware version 23J215 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 10 of 179

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that the cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.10. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 11 of 179

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through one orthogonal plane and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 12 of 179

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	2.00
AC Line Conducted Disturbance	1.88
Radiated Disturbance (<30MHz)	4.24
Radiated Disturbance (30MHz - 1GHz)	4.96
Radiated Disturbance (1 - 18GHz)	5.18
Radiated Disturbance (>18GHz)	5.18

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 14 of 179

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance with the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	7/7/2025	Biennial	7/7/2027	MY56470202
Anritsu	ML2496A	Power Meter	2/10/2025	Annual	2/10/2026	1306009
Anritsu	MA2411B	Pulse Power Sensor	2/10/2025	Annual	2/10/2026	1315051
Anritsu	MA2411B	Pulse Power Sensor	2/10/2025	Annual	2/10/2026	1339027
ATM	180-442-KF	20dB Nominal Gain Horn Antenna	3/24/2025	Annual	3/24/2026	T058601-02
ETS-Lindgren	3117	Double Ridged Guide Horn (1-18 GHz)	4/16/2025	Annual	4/16/2026	218555
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz RF Cable/Attenuator *	6/10/2025	Annual	6/10/2026	-
Keysight Technology	N9040B	UXA Signal Analyzer	6/9/2025	Annual	6/9/2026	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/6/2025	Annual	8/6/2026	101639
Rohde & Schwarz	FSW43	Spectrum Analyzer 2Hz to 43GHz	8/5/2025	Annual	8/5/2026	104093
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	5/13/2025	Annual	5/13/2026	101867
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	10/14/2025	Annual	10/14/2026	102328
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/3/2025	Annual	6/3/2026	100052
Rohde & Schwarz	ENV216	Two-Line V-Network	4/24/2025	Annual	4/24/2026	101364
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	7/17/2025	Annual	7/17/2026	00302

Table 6-1. Test Equipment List

Note:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- * denotes passive equipment that have been internally verified/calibrated.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 15 of 179

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA3374
 IC: 579C-A3374
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [6.3.1(a)]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.3
2.1049	RSS-Gen [5.1]	Occupied Bandwidth	N/A		N/A	Section 7.2
15.247(b)(3)	RSS-247 [6.3.2]	Transmitter Output Power	< 1 Watt		PASS	Section 7.4
15.247(e)	RSS-247 [6.3.1(b)]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.5
15.247(d)	RSS-247 [6.6]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.6, 7.7
15.205 15.209	RSS-Gen [7.4.3]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [7.4.3])	RADIATED	PASS	Sections 7.8, 7.9
15.207	RSS-Gen [7.4.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [7.4.2])	AC LINE CONDUCTED	PASS	Section 7.10

Table 7-1. Summary of Test Results

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
4. For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Conducted Automation,” Version 1.5.0.
5. For radiated testing, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 3.6.1.
6. 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
7. Only one RU index could be selected at a time so no contiguous or non-contiguous RU’s were considered for testing.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 16 of 179

7.2 99% OBW Measurement

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 – Subclause 6.9.3
RSS-Gen [5.1]

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Span = between 1.5x to 5x the OBW
3. RBW = in the range of 1- 5% of the OBW
4. VBW $\geq 3 \times$ RBW
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize
9. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 17 of 179

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All antenna configurations and data rates were investigated and only the worst case is reported
2. All RU's were investigated, and tabular data has been reported. Only worst-case partially-loaded and fully-loaded RU's plot are reported which corresponds to the widest 99% bandwidth.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 18 of 179

7.2.1 Antenna 1 Common Bandwidth Measurements

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 99% Occupied Bandwidth [MHz]
2412	1	ax	26	0	MCS9	18.33
			26	4	MCS9	17.07
			26	8	MCS9	18.38
2437	6	ax	26	0	MCS9	18.84
			26	4	MCS9	17.03
			26	8	MCS9	18.94
2462	11	ax	26	0	MCS9	18.84
			26	4	MCS9	17.03
			26	8	MCS9	19.01

Table 7-2. 99% OBW Measurements Antenna 1 Common (RU26)

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 99% Occupied Bandwidth [MHz]
2412	1	ax	52	37	MCS9	18.24
			52	39	MCS9	17.04
			52	40	MCS9	18.23
2437	6	ax	52	37	MCS9	18.67
			52	39	MCS9	17.04
			52	40	MCS9	18.71
2462	11	ax	52	37	MCS9	18.68
			52	39	MCS9	17.04
			52	40	MCS9	18.65

Table 7-3. 99% OBW Measurements Antenna 1 Common (RU52)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 19 of 179


Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 99% Occupied Bandwidth [MHz]
2412	1	ax	106	53	MCS9	18.21
			106	54	MCS9	18.22
2437	6	ax	106	53	MCS9	18.46
			106	54	MCS9	18.51
2462	11	ax	106	53	MCS9	18.47
			106	54	MCS9	18.54

Table 7-4. 99% OBW Measurements Antenna 1 Common (RU106)


Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 99% Occupied Bandwidth [MHz]
2412	1	ax	242	61	MCS9	19.12
2437	6	ax	242	61	MCS9	19.39
2462	11	ax	242	61	MCS9	19.43

Table 7-5. 99% OBW Measurements Antenna 1 Common


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 20 of 179

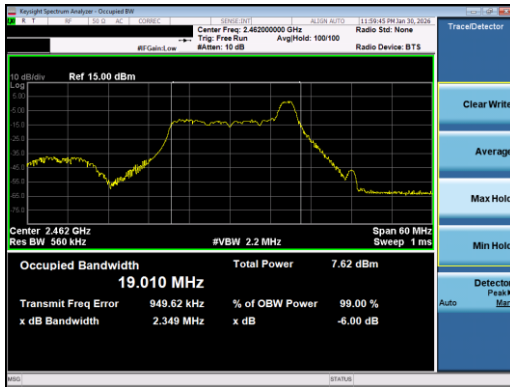


Plot 7-1. 99% OBW Antenna 1 Common (802.11ax OFDMA – RU26 Index 8 – Ch. 11)

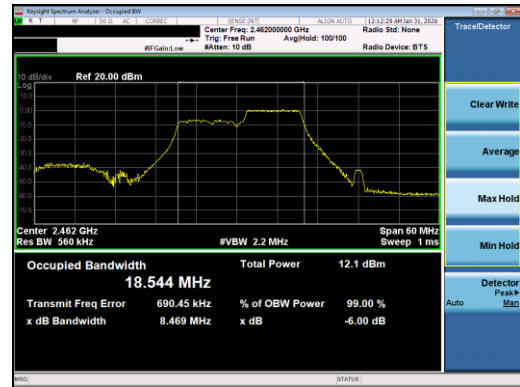

Plot 7-3. 99% OBW Antenna 1 Common (802.11ax OFDMA – RU106 Index 53 – Ch. 11)

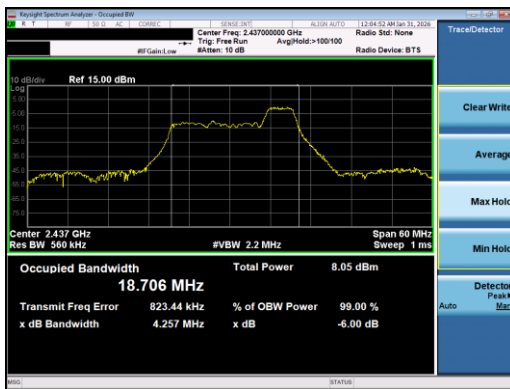

Plot 7-2. 99% OBW Antenna 1 Common (802.11ax OFDMA – RU52 Index 40 – Ch. 6)

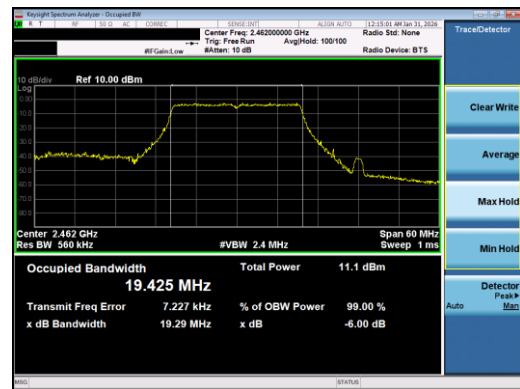

Plot 7-4. 99% OBW Plot Antenna 1 Common (802.11ax OFDMA – RU242 – Ch. 11)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 21 of 179

7.2.2 Antenna 0 Bandwidth Measurements

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 99% Occupied Bandwidth [MHz]
2412	1	ax	26	0	MCS9	18.39
			26	4	MCS9	17.05
			26	8	MCS9	18.32
2437	6	ax	26	0	MCS9	18.87
			26	4	MCS9	17.06
			26	8	MCS9	18.86
2462	11	ax	26	0	MCS9	18.94
			26	4	MCS9	17.05
			26	8	MCS9	18.85

Table 7-6. 99% OBW Measurements Antenna 0 – RU26

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 99% Occupied Bandwidth [MHz]
2412	1	ax	52	37	MCS9	18.29
			52	39	MCS9	17.03
			52	40	MCS9	18.16
2437	6	ax	52	37	MCS9	18.69
			52	39	MCS9	17.07
			52	40	MCS9	18.57
2462	11	ax	52	37	MCS9	18.75
			52	39	MCS9	17.06
			52	40	MCS9	18.62

Table 7-7. 99% OBW Measurements Antenna 0 – RU52

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 99% Occupied Bandwidth [MHz]
2412	1	ax	106	53	MCS9	18.25
			106	54	MCS9	18.16
2437	6	ax	106	53	MCS9	18.51
			106	54	MCS9	18.47
2462	11	ax	106	53	MCS9	18.50
			106	54	MCS9	18.44

Table 7-8. 99% OBW Measurements Antenna 0 – RU106

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 22 of 179

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 99% Occupied Bandwidth [MHz]
2412	1	ax	242	61	MCS9	19.14
2437	6	ax	242	61	MCS9	19.43
2462	11	ax	242	61	MCS9	19.41

Table 7-9. 99% OBW Measurements Antenna 0 – RU242

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 23 of 179

V 12.0 03/03/2026

7.2.3 Antenna 1 Dedicated Bandwidth Measurements

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 99% Occupied Bandwidth [MHz]
2412	1	ax	26	0	MCS9	18.34
			26	4	MCS9	17.06
			26	8	MCS9	18.36
2437	6	ax	26	0	MCS9	18.76
			26	4	MCS9	17.04
			26	8	MCS9	18.90
2462	11	ax	26	0	MCS9	18.85
			26	4	MCS9	17.03
			26	8	MCS9	18.91

Table 7-10. 99% OBW Measurements Antenna 1 Dedicated (RU26)

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 99% Occupied Bandwidth [MHz]
2412	1	ax	52	37	MCS9	18.24
			52	39	MCS9	17.00
			52	40	MCS9	18.28
2437	6	ax	52	37	MCS9	18.70
			52	39	MCS9	17.05
			52	40	MCS9	18.65
2462	11	ax	52	37	MCS9	18.66
			52	39	MCS9	17.05
			52	40	MCS9	18.69

Table 7-11. 99% OBW Measurements Antenna 1 Dedicated (RU52)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 25 of 179


Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 99% Occupied Bandwidth [MHz]
2412	1	ax	106	53	MCS9	18.22
			106	54	MCS9	18.22
2437	6	ax	106	53	MCS9	18.50
			106	54	MCS9	18.51
2462	11	ax	106	53	MCS9	18.49
			106	54	MCS9	18.53

Table 7-12. 99% OBW Measurements Antenna 1 Dedicated (RU106)


Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 99% Occupied Bandwidth [MHz]
2412	1	ax	242	61	97.5/114.7 (MCS9)	19.12
2437	6	ax	242	61	97.5/114.7 (MCS9)	19.44
2462	11	ax	242	61	97.5/114.7 (MCS9)	19.40

Table 7-13. 99% OBW Measurements Antenna 1 Dedicated


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 26 of 179

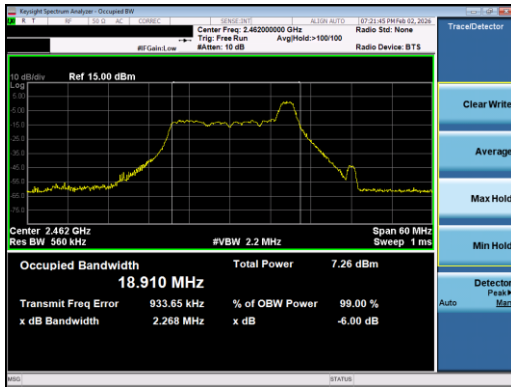

Plot 7-9. 99% OBW Plot Antenna 0 (802.11ax OFDMA – RU26 Index 8 – Ch. 11)

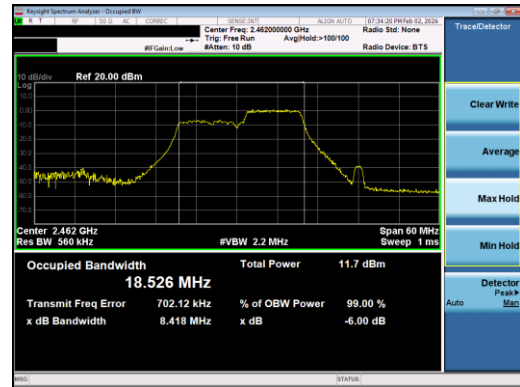

Plot 7-10. 99% OBW Plot Antenna 0 (802.11ax OFDMA – RU106 Index 54 – Ch. 11)

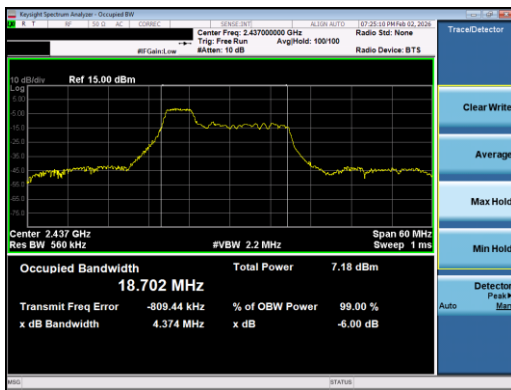

Plot 7-11. 99% OBW Plot Antenna 0 (802.11ax OFDMA – RU52 Index 37 – Ch. 6)



Plot 7-12. 99% OBW Plot Antenna 0 (802.11ax OFDMA – RU242 – Ch. 11)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

7.3 6 dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 – Subclause 11.8.2 Option 2
KDB 558074 D01 v05r02 – Section 8.2

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 28 of 179

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

1. All antenna configurations and data rates were investigated and only the worst case is reported
2. All RU's were investigated, and tabular data has been reported. Only worst-case partially-loaded and fully-loaded RU's plot are reported which corresponds to the narrowest 6dB bandwidth.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 29 of 179

7.3.1 Antenna 1 Common Bandwidth Measurements

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	26	0	MCS9	2.16	0.50	Pass
			26	4	MCS9	2.67	0.50	Pass
			26	8	MCS9	2.16	0.50	Pass
2437	6	ax	26	0	MCS9	2.14	0.50	Pass
			26	4	MCS9	2.70	0.50	Pass
			26	8	MCS9	2.15	0.50	Pass
2462	11	ax	26	0	MCS9	2.15	0.50	Pass
			26	4	MCS9	2.66	0.50	Pass
			26	8	MCS9	2.10	0.50	Pass

Table 7-14. 6dB BW OBW Measurements Antenna 1 Common (RU26)

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	52	37	MCS9	4.12	0.50	Pass
			52	39	MCS9	4.13	0.50	Pass
			52	40	MCS9	4.14	0.50	Pass
2437	6	ax	52	37	MCS9	4.18	0.50	Pass
			52	39	MCS9	4.11	0.50	Pass
			52	40	MCS9	4.13	0.50	Pass
2462	11	ax	52	37	MCS9	4.13	0.50	Pass
			52	39	MCS9	4.16	0.50	Pass
			52	40	MCS9	4.17	0.50	Pass

Table 7-15. 6dB BW OBW Measurements Antenna 1 Common (RU52)


Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	106	53	MCS9	17.21	0.50	Pass
			106	54	MCS9	17.20	0.50	Pass
2437	6	ax	106	53	MCS9	17.20	0.50	Pass
			106	54	MCS9	17.19	0.50	Pass
2462	11	ax	106	53	MCS9	17.19	0.50	Pass
			106	54	MCS9	17.19	0.50	Pass

Table 7-16. 6dB BW OBW Measurements Antenna 1 Common (RU106)


Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	242	61	MCS9	19.18	0.50	Pass
2437	6	ax	242	61	MCS9	19.20	0.50	Pass
2462	11	ax	242	61	MCS9	19.18	0.50	Pass

Table 7-17. 6dB BW OBW Measurements Antenna 1 Common


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 30 of 179

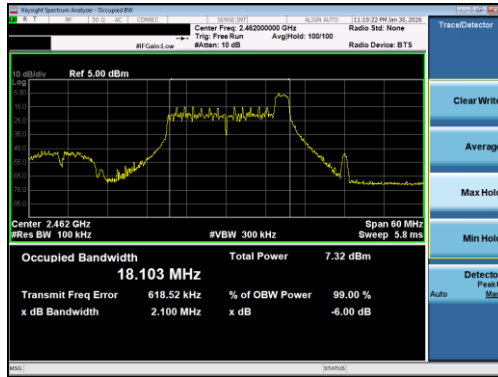


Plot 7-13. 99% OBW Antenna 1 Common (802.11ax OFDMA – RU26 Index 8 – Ch. 11)

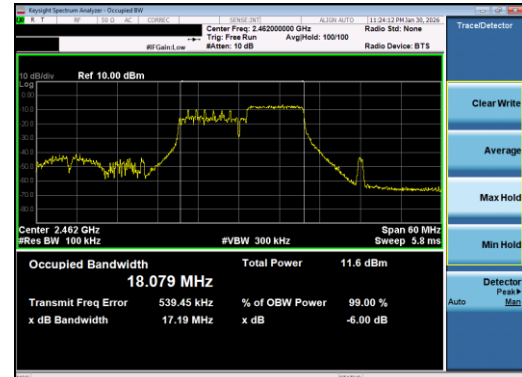

Plot 7-14. 99% OBW Plot Antenna 1 Common (802.11ax OFDMA – RU106 Index 54 – Ch. 11)

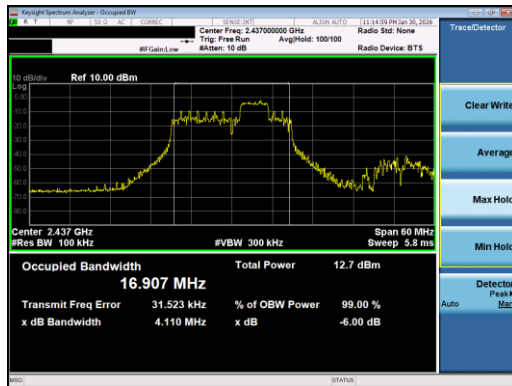

Plot 7-15. 99% OBW Antenna 1 Common (802.11ax OFDMA – RU52 Index 39 – Ch. 6)

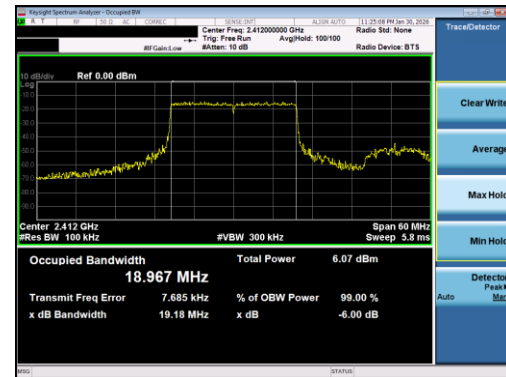

Plot 7-16. 99% OBW Plot Antenna 1 Common (802.11ax OFDMA – RU242 – Ch. 1)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

7.3.2 Antenna 0 Bandwidth Measurements

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	26	0	MCS9	2.12	0.50	Pass
			26	4	MCS9	2.69	0.50	Pass
			26	8	MCS9	2.12	0.50	Pass
2437	6	ax	26	0	MCS9	2.17	0.50	Pass
			26	4	MCS9	2.70	0.50	Pass
			26	8	MCS9	2.11	0.50	Pass
2462	11	ax	26	0	MCS9	2.11	0.50	Pass
			26	4	MCS9	2.69	0.50	Pass
			26	8	MCS9	2.16	0.50	Pass

Table 7-18. 6dB BW OBW Measurements Antenna 0 – RU26

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	52	37	MCS9	17.05	0.50	Pass
			52	39	MCS9	6.30	0.50	Pass
			52	40	MCS9	4.08	0.50	Pass
2437	6	ax	52	37	MCS9	4.16	0.50	Pass
			52	39	MCS9	4.20	0.50	Pass
			52	40	MCS9	4.13	0.50	Pass
2462	11	ax	52	37	MCS9	4.14	0.50	Pass
			52	39	MCS9	4.17	0.50	Pass
			52	40	MCS9	4.15	0.50	Pass

Table 7-19. 6dB BW OBW Measurements Antenna 0 – RU52


Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	106	53	MCS9	17.20	0.50	Pass
			106	54	MCS9	17.17	0.50	Pass
2437	6	ax	106	53	MCS9	17.21	0.50	Pass
			106	54	MCS9	17.21	0.50	Pass
2462	11	ax	106	53	MCS9	17.20	0.50	Pass
			106	54	MCS9	17.18	0.50	Pass

Table 7-20. 6dB BW OBW Measurements Antenna 0 – RU106


Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	242	61	MCS9	19.19	0.50	Pass
2437	6	ax	242	61	MCS9	19.16	0.50	Pass
2462	11	ax	242	61	MCS9	19.19	0.50	Pass

Table 7-21. 6dB BW OBW Measurements Antenna 0 – RU242


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 32 of 179

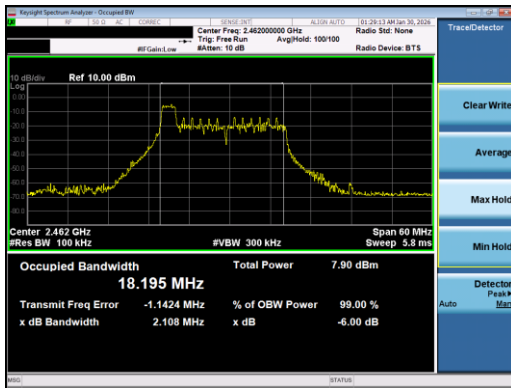


Plot 7-17. 6dB BW OBW Plot Antenna 0 (802.11ax OFDMA – RU26 Index 0 – Ch. 11)

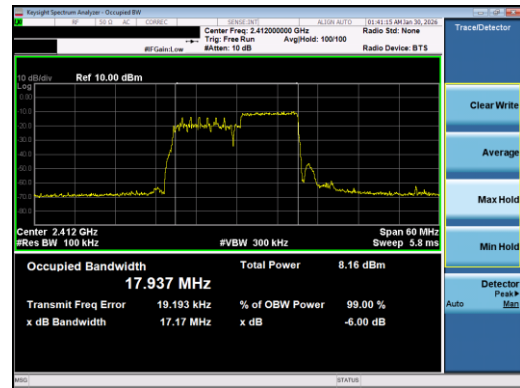

Plot 7-18. 6dB BW OBW Plot Antenna 0 (802.11ax OFDMA – RU106 Index 54 – Ch. 1)

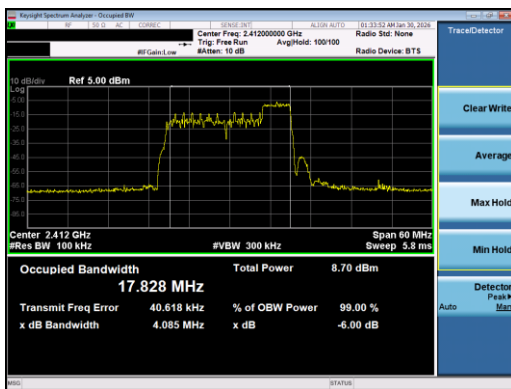

Plot 7-19. 6dB BW OBW Plot Antenna 0 (802.11ax OFDMA – RU52 Index 40 – Ch. 1)

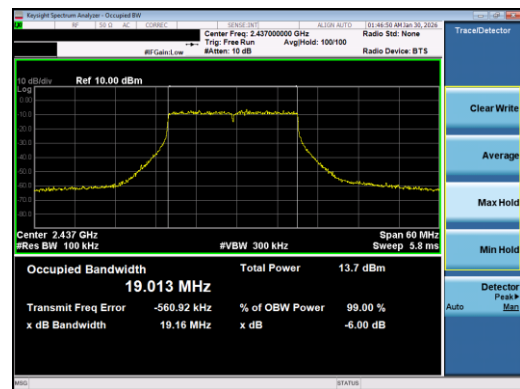

Plot 7-20. 6dB BW OBW Plot Antenna 0 (802.11ax OFDMA – RU242 – Ch. 6)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 33 of 179

7.3.3 Antenna 1 Dedicated Bandwidth Measurements

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	26	0	MCS9	2.11	0.50	Pass
			26	4	MCS9	2.69	0.50	Pass
			26	8	MCS9	2.15	0.50	Pass
2437	6	ax	26	0	MCS9	2.13	0.50	Pass
			26	4	MCS9	2.71	0.50	Pass
			26	8	MCS9	2.12	0.50	Pass
2462	11	ax	26	0	MCS9	2.13	0.50	Pass
			26	4	MCS9	2.66	0.50	Pass
			26	8	MCS9	2.17	0.50	Pass

Table 7-22. 6dB BW OBW Measurements Antenna 1 Dedicated (RU26)

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	52	37	MCS9	4.14	0.50	Pass
			52	39	MCS9	4.16	0.50	Pass
			52	40	MCS9	15.78	0.50	Pass
2437	6	ax	52	37	MCS9	17.04	0.50	Pass
			52	39	MCS9	4.20	0.50	Pass
			52	40	MCS9	4.18	0.50	Pass
2462	11	ax	52	37	MCS9	4.14	0.50	Pass
			52	39	MCS9	4.13	0.50	Pass
			52	40	MCS9	4.14	0.50	Pass

Table 7-23. 6dB BW OBW Measurements Antenna 1 Dedicated (RU52)



Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	106	53	MCS9	17.21	0.50	Pass
			106	54	MCS9	17.18	0.50	Pass
2437	6	ax	106	53	MCS9	17.18	0.50	Pass
			106	54	MCS9	17.19	0.50	Pass
2462	11	ax	106	53	MCS9	17.20	0.50	Pass
			106	54	MCS9	17.19	0.50	Pass

Table 7-24. 6dB BW OBW Measurements Antenna 1 Dedicated (RU106)

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	ax	242	61	MCS9	19.18	0.50	Pass
2437	6	ax	242	61	MCS9	19.20	0.50	Pass
2462	11	ax	242	61	MCS9	19.21	0.50	Pass

Table 7-25. 6dB BW OBW Measurements Antenna 1 Dedicated

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 34 of 179

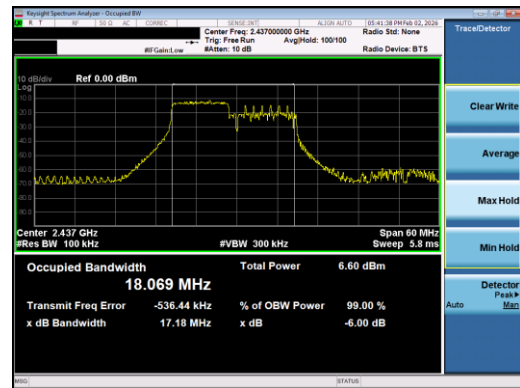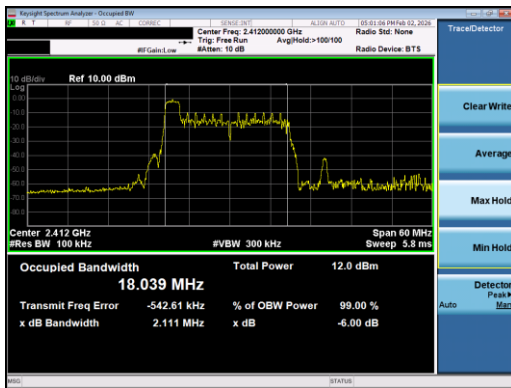

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 35 of 179

7.4 Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The average conducted output power of digital modulation systems operating in the 2400-2483.5 MHz band is 1 Watt. The conducted output power limit on paragraph above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For DTSs employing digital modulation techniques operating in the band 2400-2483.5 MHz, the average conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.

Test Procedure Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 – Subclause 11.9.2.3.2 Method AVGPM-G
KDB 558074 D01 v05r02 – Section 8.3.2.3 Measurement using a Power Meter (PM)
ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 – Subclause 14.4 Measure-and-Sum Technique
KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-3. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

1. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.
2. For 802.11ax-RU, the worst case data rate was found to be MCS9.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 36 of 179

7.4.1 Average Output Power Measurement

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	26	0	MCS9	7.85	30.00	-22.15	1.49	9.34	36.02	-26.68
2412	1	26	4	MCS9	7.64	30.00	-22.36	1.49	9.13	36.02	-26.89
2412	1	26	8	MCS9	7.78	30.00	-22.22	1.49	9.27	36.02	-26.75
2437	6	26	0	MCS9	7.93	30.00	-22.07	1.49	9.42	36.02	-26.60
2437	6	26	4	MCS9	7.88	30.00	-22.12	1.49	9.37	36.02	-26.65
2437	6	26	8	MCS9	7.88	30.00	-22.12	1.49	9.37	36.02	-26.65
2462	11	26	0	MCS9	7.93	30.00	-22.07	1.49	9.42	36.02	-26.60
2462	11	26	4	MCS9	7.86	30.00	-22.14	1.49	9.35	36.02	-26.67
2462	11	26	8	MCS9	7.90	30.00	-22.10	1.49	9.39	36.02	-26.63
2467	12	26	0	MCS9	6.79	30.00	-23.21	1.49	8.28	36.02	-27.74
2467	12	26	4	MCS9	6.88	30.00	-23.13	1.49	8.37	36.02	-27.66
2467	12	26	8	MCS9	6.48	30.00	-23.52	1.49	7.97	36.02	-28.05

Table 7-26. Average Conducted Output Power Measurements Antenna 1 Common (RU26)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	52	37	MCS9	8.35	30.00	-21.65	1.49	9.84	36.02	-26.18
2412	1	52	38	MCS9	8.11	30.00	-21.89	1.49	9.60	36.02	-26.42
2412	1	52	40	MCS9	8.32	30.00	-21.68	1.49	9.81	36.02	-26.21
2417	2	52	37	MCS9	8.80	30.00	-21.20	1.49	10.29	36.02	-25.73
2417	2	52	38	MCS9	8.79	30.00	-21.21	1.49	10.28	36.02	-25.74
2417	2	52	40	MCS9	8.84	30.00	-21.16	1.49	10.33	36.02	-25.69
2437	6	52	37	MCS9	8.88	30.00	-21.12	1.49	10.37	36.02	-25.65
2437	6	52	38	MCS9	8.90	30.00	-21.10	1.49	10.39	36.02	-25.63
2437	6	52	40	MCS9	8.89	30.00	-21.12	1.49	10.38	36.02	-25.65
2462	11	52	37	MCS9	8.90	30.00	-21.10	1.49	10.39	36.02	-25.63
2462	11	52	38	MCS9	8.92	30.00	-21.08	1.49	10.41	36.02	-25.61
2462	11	52	40	MCS9	8.99	30.00	-21.02	1.49	10.48	36.02	-25.55
2467	12	52	37	MCS9	6.83	30.00	-23.17	1.49	8.32	36.02	-27.70
2467	12	52	38	MCS9	6.91	30.00	-23.09	1.49	8.40	36.02	-27.62
2467	12	52	40	MCS9	7.00	30.00	-23.01	1.49	8.49	36.02	-27.54

Table 7-27. Average Conducted Output Power Measurements Antenna 1 Common (RU52)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	106	53	MCS9	8.37	30.00	-21.63	1.49	9.86	36.02	-26.16
2412	1	106	54	MCS9	8.29	30.00	-21.71	1.49	9.78	36.02	-26.24
2417	2	106	53	MCS9	9.77	30.00	-20.23	1.49	11.26	36.02	-24.76
2417	2	106	54	MCS9	9.82	30.00	-20.18	1.49	11.31	36.02	-24.71
2437	6	106	53	MCS9	9.80	30.00	-20.20	1.49	11.29	36.02	-24.73
2437	6	106	54	MCS9	9.86	30.00	-20.14	1.49	11.35	36.02	-24.67
2457	10	106	53	MCS9	9.87	30.00	-20.13	1.49	11.36	36.02	-24.66
2457	10	106	54	MCS9	9.85	30.00	-20.15	1.49	11.34	36.02	-24.68
2462	11	106	53	MCS9	9.45	30.00	-20.55	1.49	10.94	36.02	-25.08
2462	11	106	54	MCS9	9.40	30.00	-20.60	1.49	10.89	36.02	-25.13
2467	12	106	53	MCS9	6.89	30.00	-23.11	1.49	8.38	36.02	-27.64
2467	12	106	54	MCS9	7.00	30.00	-23.01	1.49	8.49	36.02	-27.54

Table 7-28. Average Conducted Output Power Measurements Antenna 1 Common (RU106)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 37 of 179

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	242	61	MCS9	8.21	30.00	-21.79	1.49	9.70	36.02	-26.32
2417	2	242	61	MCS9	10.68	30.00	-19.32	1.49	12.17	36.02	-23.85
2422	3	242	61	MCS9	11.26	30.00	-18.74	1.49	12.75	36.02	-23.27
2427	4	242	61	MCS9	12.65	30.00	-17.35	1.49	14.14	36.02	-21.88
2432	5	242	61	MCS9	13.19	30.00	-16.81	1.49	14.68	36.02	-21.34
2437	6	242	61	MCS9	13.59	30.00	-16.41	1.49	15.08	36.02	-20.94
2442	7	242	61	MCS9	13.23	30.00	-16.77	1.49	14.72	36.02	-21.30
2447	8	242	61	MCS9	12.71	30.00	-17.29	1.49	14.20	36.02	-21.82
2452	9	242	61	MCS9	11.72	30.00	-18.28	1.49	13.21	36.02	-22.81
2457	10	242	61	MCS9	10.80	30.00	-19.20	1.49	12.29	36.02	-23.73
2462	11	242	61	MCS9	9.43	30.00	-20.58	1.49	10.92	36.02	-25.11
2467	12	242	61	MCS9	6.94	30.00	-23.06	1.49	8.43	36.02	-27.59

Table 7-29. Average Conducted Output Power Measurements Antenna 1 Common (RU242)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	26	0	MCS9	9.62	30.00	-20.38	1.03	10.65	36.02	-25.37
2412	1	26	4	MCS9	9.68	30.00	-20.32	1.03	10.71	36.02	-25.31
2412	1	26	8	MCS9	9.73	30.00	-20.28	1.03	10.76	36.02	-25.27
2437	6	26	0	MCS9	9.70	30.00	-20.30	1.03	10.73	36.02	-25.29
2437	6	26	4	MCS9	9.84	30.00	-20.16	1.03	10.87	36.02	-25.15
2437	6	26	8	MCS9	9.63	30.00	-20.37	1.03	10.66	36.02	-25.36
2462	11	26	0	MCS9	9.60	30.00	-20.40	1.03	10.63	36.02	-25.39
2462	11	26	4	MCS9	9.66	30.00	-20.34	1.03	10.69	36.02	-25.33
2462	11	26	8	MCS9	9.55	30.00	-20.45	1.03	10.58	36.02	-25.44
2467	12	26	0	MCS9	8.90	30.00	-21.10	1.03	9.93	36.02	-26.09
2467	12	26	4	MCS9	9.01	30.00	-20.99	1.03	10.04	36.02	-25.98
2467	12	26	8	MCS9	9.04	30.00	-20.97	1.03	10.07	36.02	-25.96

Table 7-30. Average Conducted Output Power Measurements Antenna 0 (RU26)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	52	37	MCS9	10.77	30.00	-19.23	1.03	11.80	36.02	-24.22
2412	1	52	38	MCS9	10.63	30.00	-19.37	1.03	11.66	36.02	-24.36
2412	1	52	40	MCS9	10.71	30.00	-19.29	1.03	11.74	36.02	-24.28
2437	6	52	37	MCS9	10.86	30.00	-19.14	1.03	11.89	36.02	-24.13
2437	6	52	38	MCS9	10.72	30.00	-19.28	1.03	11.75	36.02	-24.27
2437	6	52	40	MCS9	10.70	30.00	-19.31	1.03	11.73	36.02	-24.30
2462	11	52	37	MCS9	10.54	30.00	-19.46	1.03	11.57	36.02	-24.45
2462	11	52	38	MCS9	10.59	30.00	-19.42	1.03	11.62	36.02	-24.41
2462	11	52	40	MCS9	10.60	30.00	-19.40	1.03	11.63	36.02	-24.39
2467	12	52	37	MCS9	9.13	30.00	-20.88	1.03	10.16	36.02	-25.87
2467	12	52	38	MCS9	8.98	30.00	-21.02	1.03	10.01	36.02	-26.01
2467	12	52	40	MCS9	9.05	30.00	-20.95	1.03	10.08	36.02	-25.94

Table 7-31. Average Conducted Output Power Measurements Antenna 0 (RU52)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 38 of 179

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	106	53	MCS9	11.21	30.00	-18.80	1.03	12.24	36.02	-23.79
2412	1	106	54	MCS9	11.18	30.00	-18.83	1.03	12.21	36.02	-23.82
2417	2	106	53	MCS9	11.75	30.00	-18.25	1.03	12.78	36.02	-23.24
2417	2	106	54	MCS9	11.79	30.00	-18.21	1.03	12.82	36.02	-23.20
2437	6	106	53	MCS9	11.72	30.00	-18.28	1.03	12.75	36.02	-23.27
2437	6	106	54	MCS9	11.70	30.00	-18.30	1.03	12.73	36.02	-23.29
2457	10	106	53	MCS9	11.46	30.00	-18.54	1.03	12.49	36.02	-23.53
2457	10	106	54	MCS9	11.63	30.00	-18.37	1.03	12.66	36.02	-23.36
2462	11	106	53	MCS9	11.08	30.00	-18.92	1.03	12.11	36.02	-23.91
2462	11	106	54	MCS9	11.08	30.00	-18.92	1.03	12.11	36.02	-23.91
2467	12	106	53	MCS9	9.06	30.00	-20.94	1.03	10.09	36.02	-25.93
2467	12	106	54	MCS9	8.90	30.00	-21.10	1.03	9.93	36.02	-26.09

Table 7-32. Average Conducted Output Power Measurements Antenna 0 (RU106)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	242	61	MCS9	11.10	30.00	-18.90	1.03	12.13	36.02	-23.89
2417	2	242	61	MCS9	12.59	30.00	-17.41	1.03	13.62	36.02	-22.40
2422	3	242	61	MCS9	14.07	30.00	-15.93	1.03	15.10	36.02	-20.92
2427	4	242	61	MCS9	15.56	30.00	-14.44	1.03	16.59	36.02	-19.43
2432	5	242	61	MCS9	16.15	30.00	-13.85	1.03	17.18	36.02	-18.84
2437	6	242	61	MCS9	16.17	30.00	-13.83	1.03	17.20	36.02	-18.82
2442	7	242	61	MCS9	14.78	30.00	-15.23	1.03	15.81	36.02	-20.22
2447	8	242	61	MCS9	14.96	30.00	-15.04	1.03	15.99	36.02	-20.03
2452	9	242	61	MCS9	13.94	30.00	-16.06	1.03	14.97	36.02	-21.05
2457	10	242	61	MCS9	12.50	30.00	-17.50	1.03	13.53	36.02	-22.49
2462	11	242	61	MCS9	11.50	30.00	-18.50	1.03	12.53	36.02	-23.49
2467	12	242	61	MCS9	9.43	30.00	-20.57	1.03	10.46	36.02	-25.56

Table 7-33. Average Conducted Output Power Measurements Antenna 0 (RU242)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	26	0	MCS9	9.84	30.00	-20.16	1.49	11.33	36.02	-24.69
2412	1	26	4	MCS9	9.90	30.00	-20.10	1.49	11.39	36.02	-24.63
2412	1	26	8	MCS9	9.93	30.00	-20.07	1.49	11.42	36.02	-24.60
2437	6	26	0	MCS9	9.79	30.00	-20.21	1.49	11.28	36.02	-24.74
2437	6	26	4	MCS9	9.80	30.00	-20.20	1.49	11.29	36.02	-24.73
2437	6	26	8	MCS9	9.81	30.00	-20.19	1.49	11.30	36.02	-24.72
2462	11	26	0	MCS9	9.67	30.00	-20.33	1.49	11.16	36.02	-24.86
2462	11	26	4	MCS9	9.58	30.00	-20.42	1.49	11.07	36.02	-24.95
2462	11	26	8	MCS9	9.70	30.00	-20.30	1.49	11.19	36.02	-24.83
2467	12	26	0	MCS9	9.47	30.00	-20.53	1.49	10.96	36.02	-25.06
2467	12	26	4	MCS9	9.21	30.00	-20.80	1.49	10.70	36.02	-25.33
2467	12	26	8	MCS9	9.29	30.00	-20.71	1.49	10.78	36.02	-25.24

Table 7-34. Average Conducted Output Power Measurements Antenna 1 Dedicated (RU26)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 39 of 179

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	52	37	MCS9	10.94	30.00	-19.06	1.49	12.43	36.02	-23.59
2412	1	52	38	MCS9	10.87	30.00	-19.13	1.49	12.36	36.02	-23.66
2412	1	52	40	MCS9	10.87	30.00	-19.13	1.49	12.36	36.02	-23.66
2437	6	52	37	MCS9	10.86	30.00	-19.14	1.49	12.35	36.02	-23.67
2437	6	52	38	MCS9	10.81	30.00	-19.19	1.49	12.30	36.02	-23.72
2437	6	52	40	MCS9	10.78	30.00	-19.23	1.49	12.27	36.02	-23.76
2462	11	52	37	MCS9	10.63	30.00	-19.37	1.49	12.12	36.02	-23.90
2462	11	52	38	MCS9	10.63	30.00	-19.38	1.49	12.12	36.02	-23.91
2462	11	52	40	MCS9	10.80	30.00	-19.20	1.49	12.29	36.02	-23.73
2467	12	52	37	MCS9	9.14	30.00	-20.86	1.49	10.63	36.02	-25.39
2467	12	52	38	MCS9	9.17	30.00	-20.83	1.49	10.66	36.02	-25.36
2467	12	52	40	MCS9	9.27	30.00	-20.73	1.49	10.76	36.02	-25.26

Table 7-35. Average Conducted Output Power Measurements Antenna 1 Dedicated (RU52)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	106	53	MCS9	11.36	30.00	-18.64	1.49	12.85	36.02	-23.17
2412	1	106	54	MCS9	11.35	30.00	-18.65	1.49	12.84	36.02	-23.18
2417	2	106	53	MCS9	11.90	30.00	-18.10	1.49	13.39	36.02	-22.63
2417	2	106	54	MCS9	11.79	30.00	-18.21	1.49	13.28	36.02	-22.74
2437	6	106	53	MCS9	11.71	30.00	-18.29	1.49	13.20	36.02	-22.82
2437	6	106	54	MCS9	11.73	30.00	-18.27	1.49	13.22	36.02	-22.80
2457	10	106	53	MCS9	11.65	30.00	-18.35	1.49	13.14	36.02	-22.88
2457	10	106	54	MCS9	11.73	30.00	-18.27	1.49	13.22	36.02	-22.80
2462	11	106	53	MCS9	11.15	30.00	-18.85	1.49	12.64	36.02	-23.38
2462	11	106	54	MCS9	11.24	30.00	-18.76	1.49	12.73	36.02	-23.29
2467	12	106	53	MCS9	9.07	30.00	-20.93	1.49	10.56	36.02	-25.46
2467	12	106	54	MCS9	9.18	30.00	-20.82	1.49	10.67	36.02	-25.35

Table 7-36. Average Conducted Output Power Measurements Antenna 1 Dedicated (RU106)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	242	61	MCS9	11.34	30.00	-18.66	1.49	12.83	36.02	-23.19
2417	2	242	61	MCS9	12.73	30.00	-17.27	1.49	14.22	36.02	-21.80
2422	3	242	61	MCS9	14.26	30.00	-15.74	1.49	15.75	36.02	-20.27
2427	4	242	61	MCS9	15.76	30.00	-14.24	1.49	17.25	36.02	-18.77
2432	5	242	61	MCS9	16.25	30.00	-13.75	1.49	17.74	36.02	-18.28
2437	6	242	61	MCS9	16.21	30.00	-13.80	1.49	17.70	36.02	-18.33
2442	7	242	61	MCS9	14.70	30.00	-15.30	1.49	16.19	36.02	-19.83
2447	8	242	61	MCS9	14.67	30.00	-15.33	1.49	16.16	36.02	-19.86
2452	9	242	61	MCS9	13.64	30.00	-16.36	1.49	15.13	36.02	-20.89
2457	10	242	61	MCS9	12.66	30.00	-17.34	1.49	14.15	36.02	-21.87
2462	11	242	61	MCS9	11.18	30.00	-18.82	1.49	12.67	36.02	-23.35
2467	12	242	61	MCS9	9.10	30.00	-20.90	1.49	10.59	36.02	-25.43

Table 7-37. Average Conducted Output Power Measurements Antenna 1 Dedicated (RU242)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 40 of 179

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Common	Summed						
2412	1	26	0	MCS9	8.85	6.96	11.02	30.00	-18.98	4.27	15.29	36.02	-20.73
2412	1	26	4	MCS9	8.47	7.00	10.80	30.00	-19.20	4.27	15.08	36.02	-20.95
2412	1	26	8	MCS9	8.63	6.61	10.75	30.00	-19.25	4.27	15.02	36.02	-21.00
2417	2	26	0	MCS9	8.86	6.53	10.86	30.00	-19.14	4.27	15.13	36.02	-20.89
2417	2	26	4	MCS9	8.45	6.58	10.62	30.00	-19.38	4.27	14.90	36.02	-21.12
2417	2	26	8	MCS9	8.86	6.57	10.87	30.00	-19.13	4.27	15.15	36.02	-20.88
2437	6	26	0	MCS9	8.48	6.89	10.77	30.00	-19.23	4.27	15.04	36.02	-20.98
2437	6	26	4	MCS9	8.88	6.67	10.92	30.00	-19.08	4.27	15.20	36.02	-20.82
2437	6	26	8	MCS9	8.91	6.92	11.04	30.00	-18.96	4.27	15.31	36.02	-20.71
2462	11	26	0	MCS9	8.72	6.75	10.85	30.00	-19.15	4.27	15.13	36.02	-20.89
2462	11	26	4	MCS9	8.86	6.74	10.94	30.00	-19.06	4.27	15.22	36.02	-20.81
2462	11	26	8	MCS9	8.72	6.75	10.86	30.00	-19.14	4.27	15.13	36.02	-20.89
2467	12	26	0	MCS9	8.79	6.35	10.75	30.00	-19.25	4.27	15.02	36.02	-21.00
2467	12	26	4	MCS9	8.67	6.27	10.64	30.00	-19.36	4.27	14.92	36.02	-21.10
2467	12	26	8	MCS9	8.68	6.42	10.71	30.00	-19.29	4.27	14.98	36.02	-21.04

Table 7-38. Average Conducted Output Power Measurements CDD Common (RU26)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Common	Summed						
2412	1	52	37	MCS9	9.72	7.56	11.78	30.00	-18.22	4.27	16.06	36.02	-19.96
2412	1	52	38	MCS9	9.88	7.71	11.94	30.00	-18.06	4.27	16.21	36.02	-19.81
2412	1	52	40	MCS9	9.89	7.50	11.87	30.00	-18.13	4.27	16.14	36.02	-19.88
2437	6	52	37	MCS9	9.42	7.59	11.61	30.00	-18.39	4.27	15.88	36.02	-20.14
2437	6	52	38	MCS9	9.89	7.98	12.05	30.00	-17.95	4.27	16.32	36.02	-19.70
2437	6	52	40	MCS9	9.88	7.72	11.94	30.00	-18.06	4.27	16.22	36.02	-19.80
2462	11	52	37	MCS9	9.77	7.70	11.87	30.00	-18.13	4.27	16.14	36.02	-19.88
2462	11	52	38	MCS9	9.85	7.52	11.85	30.00	-18.15	4.27	16.12	36.02	-19.90
2462	11	52	40	MCS9	9.77	7.69	11.86	30.00	-18.14	4.27	16.14	36.02	-19.88
2467	12	52	37	MCS9	8.78	6.32	10.73	30.00	-19.27	4.27	15.01	36.02	-21.02
2467	12	52	38	MCS9	8.65	6.32	10.65	30.00	-19.35	4.27	14.92	36.02	-21.10
2467	12	52	40	MCS9	8.73	6.43	10.74	30.00	-19.26	4.27	15.01	36.02	-21.01

Table 7-39. Average Conducted Output Power Measurements CDD Common (RU52)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Common	Summed						
2412	1	106	53	MCS9	10.93	7.96	12.70	30.00	-17.30	4.27	16.98	36.02	-19.04
2412	1	106	54	MCS9	10.84	7.85	12.61	30.00	-17.39	4.27	16.88	36.02	-19.14
2417	2	106	53	MCS9	10.94	8.78	13.00	30.00	-17.00	4.27	17.28	36.02	-18.74
2417	2	106	54	MCS9	10.76	8.78	12.89	30.00	-17.11	4.27	17.17	36.02	-18.86
2437	6	106	53	MCS9	10.86	8.90	13.00	30.00	-17.00	4.27	17.27	36.02	-18.75
2437	6	106	54	MCS9	10.85	8.85	12.97	30.00	-17.03	4.27	17.25	36.02	-18.77
2462	11	106	53	MCS9	10.68	8.53	12.75	30.00	-17.25	4.27	17.02	36.02	-19.00
2462	11	106	54	MCS9	10.70	8.53	12.76	30.00	-17.24	4.27	17.03	36.02	-18.99
2467	12	106	53	MCS9	8.74	5.98	10.59	30.00	-19.41	4.27	14.86	36.02	-21.16
2467	12	106	54	MCS9	8.76	6.01	10.61	30.00	-19.39	4.27	14.88	36.02	-21.14

Table 7-40. Average Conducted Output Power Measurements CDD Common (RU106)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Common	Summed						
2412	1	242	61	MCS9	10.75	7.80	12.53	30.00	-17.47	4.27	16.80	36.02	-19.22
2417	2	242	61	MCS9	12.22	10.17	14.32	30.00	-15.68	4.27	18.60	36.02	-17.42
2422	3	242	61	MCS9	13.82	10.72	15.55	30.00	-14.45	4.27	19.82	36.02	-16.20
2427	4	242	61	MCS9	15.71	12.32	17.35	30.00	-12.65	4.27	21.62	36.02	-14.40
2432	5	242	61	MCS9	15.68	12.87	17.50	30.00	-12.50	4.27	21.78	36.02	-14.24
2437	6	242	61	MCS9	15.78	13.24	17.70	30.00	-12.30	4.27	21.98	36.02	-14.04
2442	7	242	61	MCS9	14.80	13.23	17.09	30.00	-12.91	4.27	21.37	36.02	-14.65
2447	8	242	61	MCS9	14.00	12.83	16.46	30.00	-13.54	4.27	20.74	36.02	-15.28
2452	9	242	61	MCS9	13.12	11.34	15.33	30.00	-14.67	4.27	19.60	36.02	-16.42
2457	10	242	61	MCS9	12.07	10.38	14.32	30.00	-15.68	4.27	18.59	36.02	-17.43
2462	11	242	61	MCS9	11.18	8.54	13.07	30.00	-16.93	4.27	17.34	36.02	-18.68
2467	12	242	61	MCS9	8.98	6.47	10.91	30.00	-19.09	4.27	15.19	36.02	-20.83

Table 7-41. Average Conducted Output Power Measurements CDD Common (RU242)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 41 of 179

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Dedicated	Summed						
2412	1	26	0	MCS9	8.85	8.65	11.76	30.00	-18.24	4.27	16.04	36.02	-19.99
2412	1	26	4	MCS9	8.47	8.82	11.66	30.00	-18.34	4.27	15.93	36.02	-20.09
2412	1	26	8	MCS9	8.63	8.52	11.59	30.00	-18.41	4.27	15.86	36.02	-20.16
2437	6	26	0	MCS9	8.48	8.61	11.56	30.00	-18.44	4.27	15.83	36.02	-20.19
2437	6	26	4	MCS9	8.88	8.63	11.77	30.00	-18.23	4.27	16.04	36.02	-19.98
2437	6	26	8	MCS9	8.91	8.94	11.94	30.00	-18.06	4.27	16.21	36.02	-19.81
2462	11	26	0	MCS9	8.72	8.90	11.82	30.00	-18.18	4.27	16.10	36.02	-19.93
2462	11	26	4	MCS9	8.86	8.87	11.88	30.00	-18.12	4.27	16.15	36.02	-19.87
2462	11	26	8	MCS9	8.72	8.91	11.83	30.00	-18.17	4.27	16.10	36.02	-19.92
2467	12	26	0	MCS9	8.79	8.84	11.82	30.00	-18.18	4.27	16.10	36.02	-19.92
2467	12	26	4	MCS9	8.67	8.84	11.77	30.00	-18.23	4.27	16.04	36.02	-19.98
2467	12	26	8	MCS9	8.68	8.88	11.79	30.00	-18.21	4.27	16.06	36.02	-19.96

Table 7-42. Average Conducted Output Power Measurements CDD Dedicated (RU26)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Dedicated	Summed						
2412	1	52	37	MCS9	9.72	9.01	12.39	30.00	-17.61	4.27	16.66	36.02	-19.36
2412	1	52	38	MCS9	9.88	9.00	12.47	30.00	-17.53	4.27	16.75	36.02	-19.27
2412	1	52	40	MCS9	9.89	9.04	12.50	30.00	-17.50	4.27	16.77	36.02	-19.25
2437	6	52	37	MCS9	9.42	9.58	12.51	30.00	-17.49	4.27	16.78	36.02	-19.24
2437	6	52	38	MCS9	9.89	9.54	12.73	30.00	-17.27	4.27	17.00	36.02	-19.02
2437	6	52	40	MCS9	9.88	9.67	12.79	30.00	-17.21	4.27	17.06	36.02	-18.96
2462	11	52	37	MCS9	9.77	9.74	12.77	30.00	-17.23	4.27	17.04	36.02	-18.98
2462	11	52	38	MCS9	9.85	9.58	12.73	30.00	-17.27	4.27	17.00	36.02	-19.02
2462	11	52	40	MCS9	9.77	9.76	12.78	30.00	-17.22	4.27	17.05	36.02	-18.97
2467	12	52	37	MCS9	8.78	8.91	11.86	30.00	-18.14	4.27	16.13	36.02	-19.89
2467	12	52	38	MCS9	8.65	8.83	11.75	30.00	-18.25	4.27	16.02	36.02	-20.00
2467	12	52	40	MCS9	8.73	8.46	11.61	30.00	-18.39	4.27	15.88	36.02	-20.14

Table 7-43. Average Conducted Output Power Measurements CDD Dedicated (RU52)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Dedicated	Summed						
2412	1	106	53	MCS9	10.93	10.99	13.97	30.00	-16.03	4.27	18.24	36.02	-17.78
2412	1	106	54	MCS9	10.84	10.62	13.74	30.00	-16.26	4.27	18.02	36.02	-18.01
2417	2	106	53	MCS9	10.94	10.95	13.96	30.00	-16.04	4.27	18.23	36.02	-17.79
2417	2	106	54	MCS9	10.76	10.52	13.65	30.00	-16.35	4.27	17.93	36.02	-18.10
2437	6	106	53	MCS9	10.86	10.85	13.87	30.00	-16.13	4.27	18.14	36.02	-17.88
2437	6	106	54	MCS9	10.85	10.59	13.73	30.00	-16.27	4.27	18.01	36.02	-18.02
2462	11	106	53	MCS9	10.68	10.78	13.74	30.00	-16.26	4.27	18.01	36.02	-18.01
2462	11	106	54	MCS9	10.70	10.89	13.81	30.00	-16.19	4.27	18.08	36.02	-17.94
2467	12	106	53	MCS9	8.74	8.91	11.84	30.00	-18.16	4.27	16.11	36.02	-19.91
2467	12	106	54	MCS9	8.76	8.95	11.87	30.00	-18.13	4.27	16.14	36.02	-19.88

Table 7-44. Average Conducted Output Power Measurements CDD Dedicated (RU106)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Dedicated	Summed						
2412	1	242	61	MCS5	10.75	10.53	13.65	30.00	-16.35	4.27	17.92	36.02	-18.10
2417	2	242	61	MCS5	12.22	12.41	15.32	30.00	-14.68	4.27	19.60	36.02	-16.42
2422	3	242	61	MCS5	13.82	13.89	16.86	30.00	-13.14	4.27	21.14	36.02	-14.88
2427	4	242	61	MCS5	15.71	15.89	18.81	30.00	-11.19	4.27	23.08	36.02	-12.94
2432	5	242	61	MCS5	15.68	15.87	18.78	30.00	-11.22	4.27	23.06	36.02	-12.96
2437	6	242	61	MCS5	15.78	15.90	18.85	30.00	-11.15	4.27	23.12	36.02	-12.90
2442	7	242	61	MCS5	14.80	14.94	17.88	30.00	-12.12	4.27	22.15	36.02	-13.87
2447	8	242	61	MCS5	14.00	14.36	17.19	30.00	-12.81	4.27	21.47	36.02	-14.55
2452	9	242	61	MCS5	13.12	13.38	16.26	30.00	-13.74	4.27	20.53	36.02	-15.49
2457	10	242	61	MCS5	12.07	12.35	15.22	30.00	-14.78	4.27	19.50	36.02	-16.52
2462	11	242	61	MCS5	11.18	11.39	14.30	30.00	-15.70	4.27	18.57	36.02	-17.45
2467	12	242	61	MCS5	8.98	8.67	11.84	30.00	-18.16	4.27	16.11	36.02	-19.91

Table 7-45. Average Conducted Output Power Measurements CDD Dedicated (RU242)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 42 of 179

7.4.2 Peak Output Power Measurement

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	26	0	MCS9	17.49	30.00	-12.51	1.49	18.98	36.02	-17.04
2412	1	26	4	MCS9	18.03	30.00	-11.98	1.49	19.52	36.02	-16.51
2412	1	26	8	MCS9	17.00	30.00	-13.00	1.49	18.49	36.02	-17.53
2437	6	26	0	MCS9	17.63	30.00	-12.37	1.49	19.12	36.02	-16.90
2437	6	26	4	MCS9	18.79	30.00	-11.21	1.49	20.28	36.02	-15.74
2437	6	26	8	MCS9	17.33	30.00	-12.67	1.49	18.82	36.02	-17.20
2462	11	26	0	MCS9	17.52	30.00	-12.48	1.49	19.01	36.02	-17.01
2462	11	26	4	MCS9	17.30	30.00	-12.70	1.49	18.79	36.02	-17.23
2462	11	26	8	MCS9	17.41	30.00	-12.59	1.49	18.90	36.02	-17.12
2467	12	26	0	MCS9	17.47	30.00	-12.53	1.49	18.96	36.02	-17.06
2467	12	26	4	MCS9	17.80	30.00	-12.20	1.49	19.29	36.02	-16.73
2467	12	26	8	MCS9	15.75	30.00	-14.25	1.49	17.24	36.02	-18.78

Table 7-46. Peak Conducted Output Power Measurements Antenna 1 Common (RU26)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	52	37	MCS9	18.46	30.00	-11.54	1.49	19.95	36.02	-16.07
2412	1	52	38	MCS9	18.51	30.00	-11.49	1.49	20.00	36.02	-16.02
2412	1	52	40	MCS9	17.99	30.00	-12.01	1.49	19.48	36.02	-16.54
2417	2	52	37	MCS9	19.80	30.00	-10.20	1.49	21.29	36.02	-14.73
2417	2	52	38	MCS9	19.14	30.00	-10.86	1.49	20.63	36.02	-15.39
2417	2	52	40	MCS9	19.08	30.00	-10.93	1.49	20.57	36.02	-15.46
2437	6	52	37	MCS9	19.38	30.00	-10.62	1.49	20.87	36.02	-15.15
2437	6	52	38	MCS9	18.99	30.00	-11.01	1.49	20.48	36.02	-15.54
2437	6	52	40	MCS9	19.56	30.00	-10.44	1.49	21.05	36.02	-14.97
2462	11	52	37	MCS9	19.03	30.00	-10.97	1.49	20.52	36.02	-15.50
2462	11	52	38	MCS9	18.89	30.00	-11.11	1.49	20.38	36.02	-15.64
2462	11	52	40	MCS9	18.90	30.00	-11.10	1.49	20.39	36.02	-15.63
2467	12	52	37	MCS9	17.62	30.00	-12.38	1.49	19.11	36.02	-16.91
2467	12	52	38	MCS9	17.15	30.00	-12.85	1.49	18.64	36.02	-17.38
2467	12	52	40	MCS9	17.77	30.00	-12.23	1.49	19.26	36.02	-16.76

Table 7-47. Peak Conducted Output Power Measurements Antenna 1 Common (RU52)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	106	53	MCS9	19.03	30.00	-10.97	1.49	20.52	36.02	-15.50
2412	1	106	54	MCS9	18.39	30.00	-11.61	1.49	19.88	36.02	-16.14
2417	2	106	53	MCS9	19.66	30.00	-10.34	1.49	21.15	36.02	-14.87
2417	2	106	54	MCS9	19.72	30.00	-10.28	1.49	21.21	36.02	-14.81
2437	6	106	53	MCS9	19.68	30.00	-10.32	1.49	21.17	36.02	-14.85
2437	6	106	54	MCS9	19.64	30.00	-10.36	1.49	21.13	36.02	-14.89
2457	10	106	53	MCS9	19.62	30.00	-10.38	1.49	21.11	36.02	-14.91
2457	10	106	54	MCS9	19.59	30.00	-10.41	1.49	21.08	36.02	-14.94
2462	11	106	53	MCS9	19.60	30.00	-10.40	1.49	21.09	36.02	-14.93
2462	11	106	54	MCS9	19.50	30.00	-10.50	1.49	20.99	36.02	-15.03
2467	12	106	53	MCS9	17.01	30.00	-12.99	1.49	18.50	36.02	-17.52
2467	12	106	54	MCS9	17.24	30.00	-12.76	1.49	18.73	36.02	-17.29

Table 7-48. Peak Conducted Output Power Measurements Antenna 1 Common (RU106)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 43 of 179

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	242	61	MCS9	19.22	30.00	-10.78	1.49	20.71	36.02	-15.31
2417	2	242	61	MCS9	19.65	30.00	-10.35	1.49	21.14	36.02	-14.88
2422	3	242	61	MCS9	19.70	30.00	-10.30	1.49	21.19	36.02	-14.83
2427	4	242	61	MCS9	19.75	30.00	-10.25	1.49	21.24	36.02	-14.78
2432	5	242	61	MCS9	19.78	30.00	-10.22	1.49	21.27	36.02	-14.75
2437	6	242	61	MCS9	19.76	30.00	-10.24	1.49	21.25	36.02	-14.77
2442	7	242	61	MCS9	19.74	30.00	-10.26	1.49	21.23	36.02	-14.79
2447	8	242	61	MCS9	19.70	30.00	-10.30	1.49	21.19	36.02	-14.83
2452	9	242	61	MCS9	19.64	30.00	-10.36	1.49	21.13	36.02	-14.89
2457	10	242	61	MCS9	19.49	30.00	-10.51	1.49	20.98	36.02	-15.04
2462	11	242	61	MCS9	19.37	30.00	-10.63	1.49	20.86	36.02	-15.16
2467	12	242	61	MCS9	16.81	30.00	-13.19	1.49	18.30	36.02	-17.72

Table 7-49. Peak Conducted Output Power Measurements Antenna 1 Common (RU242)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	26	0	MCS9	20.29	30.00	-9.71	1.03	21.32	36.02	-14.70
2412	1	26	4	MCS9	19.62	30.00	-10.38	1.03	20.65	36.02	-15.37
2412	1	26	8	MCS9	20.07	30.00	-9.93	1.03	21.10	36.02	-14.92
2437	6	26	0	MCS9	19.49	30.00	-10.51	1.03	20.52	36.02	-15.50
2437	6	26	4	MCS9	19.32	30.00	-10.68	1.03	20.35	36.02	-15.67
2437	6	26	8	MCS9	19.51	30.00	-10.49	1.03	20.54	36.02	-15.48
2462	11	26	0	MCS9	19.51	30.00	-10.49	1.03	20.54	36.02	-15.48
2462	11	26	4	MCS9	19.74	30.00	-10.26	1.03	20.77	36.02	-15.25
2462	11	26	8	MCS9	19.71	30.00	-10.29	1.03	20.74	36.02	-15.28
2467	12	26	0	MCS9	18.46	30.00	-11.54	1.03	19.49	36.02	-16.53
2467	12	26	4	MCS9	18.83	30.00	-11.17	1.03	19.86	36.02	-16.16
2467	12	26	8	MCS9	19.09	30.00	-10.91	1.03	20.12	36.02	-15.90

Table 7-50. Peak Conducted Output Power Measurements Antenna 0 (RU26)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	52	37	MCS9	21.18	30.00	-8.82	1.49	22.67	36.02	-13.35
2412	1	52	38	MCS9	20.94	30.00	-9.06	1.49	22.43	36.02	-13.59
2412	1	52	40	MCS9	20.39	30.00	-9.61	1.49	21.88	36.02	-14.14
2437	6	52	37	MCS9	21.00	30.00	-9.00	1.49	22.49	36.02	-13.53
2437	6	52	38	MCS9	20.80	30.00	-9.20	1.49	22.29	36.02	-13.73
2437	6	52	40	MCS9	21.10	30.00	-8.90	1.49	22.59	36.02	-13.43
2462	11	52	37	MCS9	21.28	30.00	-8.72	1.49	22.77	36.02	-13.25
2462	11	52	38	MCS9	20.51	30.00	-9.49	1.49	22.00	36.02	-14.02
2462	11	52	40	MCS9	21.48	30.00	-8.52	1.49	22.97	36.02	-13.05
2467	12	52	37	MCS9	19.06	30.00	-10.94	1.49	20.55	36.02	-15.47
2467	12	52	38	MCS9	19.59	30.00	-10.41	1.49	21.08	36.02	-14.94
2467	12	52	40	MCS9	18.61	30.00	-11.39	1.49	20.10	36.02	-15.92

Table 7-51. Peak Conducted Output Power Measurements Antenna 0 (RU52)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	106	53	MCS9	22.17	30.00	-7.83	1.49	23.66	36.02	-12.36
2412	1	106	54	MCS9	21.82	30.00	-8.18	1.49	23.31	36.02	-12.71
2417	2	106	53	MCS9	21.68	30.00	-8.32	1.49	23.17	36.02	-12.85
2417	2	106	54	MCS9	21.94	30.00	-8.06	1.49	23.43	36.02	-12.59
2437	6	106	53	MCS9	21.87	30.00	-8.13	1.49	23.36	36.02	-12.66
2437	6	106	54	MCS9	21.82	30.00	-8.18	1.49	23.31	36.02	-12.71
2457	10	106	53	MCS9	21.17	30.00	-8.83	1.49	22.66	36.02	-13.36
2457	10	106	54	MCS9	21.76	30.00	-8.24	1.49	23.25	36.02	-12.77
2462	11	106	53	MCS9	21.15	30.00	-8.85	1.49	22.64	36.02	-13.38
2462	11	106	54	MCS9	22.23	30.00	-7.77	1.49	23.72	36.02	-12.30
2467	12	106	53	MCS9	19.02	30.00	-10.98	1.49	20.51	36.02	-15.51
2467	12	106	54	MCS9	20.16	30.00	-9.84	1.49	21.65	36.02	-14.37

Table 7-52. Peak Conducted Output Power Measurements Antenna 0 (RU106)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 44 of 179

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	242	61	MCS9	22.09	30.00	-7.91	1.03	23.12	36.02	-12.90
2417	2	242	61	MCS9	23.26	30.00	-6.74	1.03	24.29	36.02	-11.73
2422	3	242	61	MCS9	23.57	30.00	-6.43	1.03	24.60	36.02	-11.42
2427	4	242	61	MCS9	24.70	30.00	-5.31	1.03	25.73	36.02	-10.30
2432	5	242	61	MCS9	24.78	30.00	-5.22	1.03	25.81	36.02	-10.21
2437	6	242	61	MCS9	24.78	30.00	-5.22	1.03	25.81	36.02	-10.21
2442	7	242	61	MCS9	24.58	30.00	-5.42	1.03	25.61	36.02	-10.41
2447	8	242	61	MCS9	24.66	30.00	-5.34	1.03	25.69	36.02	-10.33
2452	9	242	61	MCS9	24.56	30.00	-5.44	1.03	25.59	36.02	-10.43
2457	10	242	61	MCS9	22.61	30.00	-7.39	1.03	23.64	36.02	-12.38
2462	11	242	61	MCS9	21.66	30.00	-8.34	1.03	22.69	36.02	-13.33
2467	12	242	61	MCS9	19.93	30.00	-10.07	1.03	20.96	36.02	-15.06

Table 7-53. Peak Conducted Output Power Measurements Antenna 0 (RU242)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	26	0	MCS9	19.46	30.00	-10.54	1.49	20.95	36.02	-15.07
2412	1	26	4	MCS9	20.38	30.00	-9.62	1.49	21.87	36.02	-14.15
2412	1	26	8	MCS9	19.37	30.00	-10.63	1.49	20.86	36.02	-15.16
2437	6	26	0	MCS9	19.71	30.00	-10.29	1.49	21.20	36.02	-14.82
2437	6	26	4	MCS9	19.93	30.00	-10.07	1.49	21.42	36.02	-14.60
2437	6	26	8	MCS9	19.88	30.00	-10.12	1.49	21.37	36.02	-14.65
2462	11	26	0	MCS9	19.07	30.00	-10.93	1.49	20.56	36.02	-15.46
2462	11	26	4	MCS9	20.19	30.00	-9.81	1.49	21.68	36.02	-14.34
2462	11	26	8	MCS9	20.34	30.00	-9.66	1.49	21.83	36.02	-14.19
2467	12	26	0	MCS9	20.37	30.00	-9.63	1.49	21.86	36.02	-14.16
2467	12	26	4	MCS9	19.35	30.00	-10.65	1.49	20.84	36.02	-15.18
2467	12	26	8	MCS9	18.90	30.00	-11.10	1.49	20.39	36.02	-15.63

Table 7-54. Peak Conducted Output Power Measurements Antenna 1 Dedicated (RU26)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	52	37	MCS9	20.86	30.00	-9.14	1.49	22.35	36.02	-13.67
2412	1	52	38	MCS9	21.31	30.00	-8.69	1.49	22.80	36.02	-13.22
2412	1	52	40	MCS9	21.67	30.00	-8.33	1.49	23.16	36.02	-12.86
2437	6	52	37	MCS9	21.28	30.00	-8.72	1.49	22.77	36.02	-13.25
2437	6	52	38	MCS9	20.78	30.00	-9.22	1.49	22.27	36.02	-13.75
2437	6	52	40	MCS9	21.06	30.00	-8.94	1.49	22.55	36.02	-13.47
2462	11	52	37	MCS9	20.24	30.00	-9.76	1.49	21.73	36.02	-14.29
2462	11	52	38	MCS9	20.73	30.00	-9.27	1.49	22.22	36.02	-13.80
2462	11	52	40	MCS9	20.88	30.00	-9.12	1.49	22.37	36.02	-13.65
2467	12	52	37	MCS9	19.98	30.00	-10.02	1.49	21.47	36.02	-14.55
2467	12	52	38	MCS9	19.53	30.00	-10.47	1.49	21.02	36.02	-15.00
2467	12	52	40	MCS9	19.86	30.00	-10.14	1.49	21.35	36.02	-14.67

Table 7-55. Peak Conducted Output Power Measurements Antenna 1 Dedicated (RU52)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 45 of 179

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	106	53	MCS9	21.95	30.00	-8.05	1.49	23.44	36.02	-12.58
2412	1	106	54	MCS9	21.77	30.00	-8.23	1.49	23.26	36.02	-12.76
2417	2	106	53	MCS9	22.62	30.00	-7.38	1.49	24.11	36.02	-11.91
2417	2	106	54	MCS9	23.13	30.00	-6.87	1.49	24.62	36.02	-11.40
2437	6	106	53	MCS9	22.39	30.00	-7.61	1.49	23.88	36.02	-12.14
2437	6	106	54	MCS9	22.67	30.00	-7.33	1.49	24.16	36.02	-11.86
2457	10	106	53	MCS9	22.18	30.00	-7.82	1.49	23.67	36.02	-12.35
2457	10	106	54	MCS9	22.77	30.00	-7.23	1.49	24.26	36.02	-11.76
2462	11	106	53	MCS9	21.39	30.00	-8.61	1.49	22.88	36.02	-13.14
2462	11	106	54	MCS9	22.61	30.00	-7.39	1.49	24.10	36.02	-11.92
2467	12	106	53	MCS9	19.30	30.00	-10.70	1.49	20.79	36.02	-15.23
2467	12	106	54	MCS9	19.01	30.00	-10.99	1.49	20.50	36.02	-15.52

Table 7-56. Peak Conducted Output Power Measurements Antenna 1 Dedicated (RU106)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Powers (dBm)	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
2412	1	242	61	MCS9	22.72	30.00	-7.28	1.49	24.21	36.02	-11.81
2417	2	242	61	MCS9	22.96	30.00	-7.04	1.49	24.45	36.02	-11.57
2422	3	242	61	MCS9	23.08	30.00	-6.92	1.49	24.57	36.02	-11.45
2427	4	242	61	MCS9	23.19	30.00	-6.81	1.49	24.68	36.02	-11.34
2432	5	242	61	MCS9	23.11	30.00	-6.89	1.49	24.60	36.02	-11.42
2437	6	242	61	MCS9	23.11	30.00	-6.89	1.49	24.60	36.02	-11.42
2442	7	242	61	MCS9	22.89	30.00	-7.11	1.49	24.38	36.02	-11.64
2447	8	242	61	MCS9	22.85	30.00	-7.15	1.49	24.34	36.02	-11.68
2452	9	242	61	MCS9	22.73	30.00	-7.27	1.49	24.22	36.02	-11.80
2457	10	242	61	MCS9	22.54	30.00	-7.46	1.49	24.03	36.02	-11.99
2462	11	242	61	MCS9	22.06	30.00	-7.94	1.49	23.55	36.02	-12.47
2467	12	242	61	MCS9	19.53	30.00	-10.48	1.49	21.02	36.02	-15.01

Table 7-57. Peak Conducted Output Power Measurements Antenna 1 Dedicated (RU242)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 46 of 179

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Common	Summed						
2412	1	26	0	MCS9	17.16	16.41	19.81	30.00	-10.19	4.27	24.08	36.02	-11.94
2412	1	26	4	MCS9	17.47	17.01	20.26	30.00	-9.74	4.27	24.53	36.02	-11.49
2412	1	26	8	MCS9	17.14	16.13	19.67	30.00	-10.33	4.27	23.95	36.02	-12.07
2437	6	26	0	MCS9	16.87	16.45	19.68	30.00	-10.32	4.27	23.95	36.02	-12.07
2437	6	26	4	MCS9	16.95	16.41	19.70	30.00	-10.30	4.27	23.97	36.02	-12.05
2437	6	26	8	MCS9	16.21	16.41	19.32	30.00	-10.68	4.27	23.60	36.02	-12.42
2462	11	26	0	MCS9	16.72	16.58	19.66	30.00	-10.34	4.27	23.94	36.02	-12.08
2462	11	26	4	MCS9	16.55	16.56	19.56	30.00	-10.44	4.27	23.84	36.02	-12.18
2462	11	26	8	MCS9	16.38	16.14	19.27	30.00	-10.73	4.27	23.55	36.02	-12.47
2467	12	26	0	MCS9	16.48	15.61	19.08	30.00	-10.92	4.27	23.35	36.02	-12.67
2467	12	26	4	MCS9	16.33	15.74	19.06	30.00	-10.94	4.27	23.33	36.02	-12.69
2467	12	26	8	MCS9	15.97	16.01	19.00	30.00	-11.00	4.27	23.27	36.02	-12.75

Table 7-58. Peak Conducted Output Power Measurements CDD Common (RU26)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Common	Summed						
2412	1	52	37	MCS9	18.85	17.19	21.11	30.00	-8.89	4.27	25.38	36.02	-10.64
2412	1	52	38	MCS9	18.72	17.47	21.15	30.00	-8.85	4.27	25.42	36.02	-10.60
2412	1	52	40	MCS9	18.20	17.21	20.74	30.00	-9.26	4.27	25.02	36.02	-11.00
2417	2	52	37	MCS9	17.92	18.46	21.21	30.00	-8.79	4.27	25.48	36.02	-10.54
2417	2	52	38	MCS9	18.44	17.51	21.01	30.00	-8.99	4.27	25.28	36.02	-10.74
2417	2	52	40	MCS9	18.44	17.55	21.03	30.00	-8.97	4.27	25.30	36.02	-10.72
2437	6	52	37	MCS9	18.03	17.63	20.84	30.00	-9.16	4.27	25.12	36.02	-10.90
2437	6	52	38	MCS9	18.30	18.73	21.53	30.00	-8.47	4.27	25.80	36.02	-10.22
2437	6	52	40	MCS9	18.00	17.89	20.96	30.00	-9.04	4.27	25.23	36.02	-10.79
2462	11	52	37	MCS9	18.15	16.81	20.54	30.00	-9.46	4.27	24.82	36.02	-11.21
2462	11	52	38	MCS9	18.00	17.68	20.85	30.00	-9.15	4.27	25.13	36.02	-10.89
2462	11	52	40	MCS9	17.59	18.03	20.83	30.00	-9.17	4.27	25.10	36.02	-10.92
2467	12	52	37	MCS9	15.77	16.73	19.29	30.00	-10.71	4.27	23.56	36.02	-12.46
2467	12	52	38	MCS9	16.18	16.00	19.10	30.00	-10.90	4.27	23.37	36.02	-12.65
2467	12	52	40	MCS9	16.32	16.06	19.20	30.00	-10.80	4.27	23.48	36.02	-12.55

Table 7-59. Peak Conducted Output Power Measurements CDD Common (RU52)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Common	Summed						
2412	1	106	53	MCS9	17.99	17.86	20.94	30.00	-9.06	4.27	25.21	36.02	-10.81
2412	1	106	54	MCS9	18.15	18.03	21.10	30.00	-8.90	4.27	25.37	36.02	-10.65
2417	2	106	53	MCS9	18.82	18.56	21.70	30.00	-8.30	4.27	25.98	36.02	-10.05
2417	2	106	54	MCS9	18.85	18.53	21.70	30.00	-8.30	4.27	25.98	36.02	-10.04
2437	6	106	53	MCS9	19.25	18.83	22.06	30.00	-7.94	4.27	26.33	36.02	-9.69
2437	6	106	54	MCS9	19.11	18.96	22.05	30.00	-7.95	4.27	26.32	36.02	-9.70
2457	10	106	53	MCS9	19.22	18.55	21.91	30.00	-8.09	4.27	26.18	36.02	-9.84
2457	10	106	54	MCS9	18.94	18.60	21.78	30.00	-8.22	4.27	26.06	36.02	-9.96
2462	11	106	53	MCS9	19.70	19.00	22.37	30.00	-7.63	4.27	26.65	36.02	-9.37
2462	11	106	54	MCS9	19.07	19.38	22.24	30.00	-7.76	4.27	26.51	36.02	-9.51
2467	12	106	53	MCS9	16.08	16.14	19.12	30.00	-10.88	4.27	23.39	36.02	-12.63
2467	12	106	54	MCS9	15.68	16.50	19.12	30.00	-10.88	4.27	23.39	36.02	-12.63

Table 7-60. Peak Conducted Output Power Measurements CDD Common (RU106)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Common	Summed						
2412	1	242	61	MCS9	18.26	17.91	21.10	30.00	-8.90	4.27	25.37	36.02	-10.65
2417	2	242	61	MCS9	21.16	19.52	23.43	30.00	-6.57	4.27	27.70	36.02	-8.32
2422	3	242	61	MCS9	21.51	19.73	23.72	30.00	-6.28	4.27	27.99	36.02	-8.03
2427	4	242	61	MCS9	22.37	20.18	24.42	30.00	-5.58	4.27	28.70	36.02	-7.33
2432	5	242	61	MCS9	23.19	20.22	24.96	30.00	-5.04	4.27	29.24	36.02	-6.78
2437	6	242	61	MCS9	23.20	20.18	24.96	30.00	-5.04	4.27	29.23	36.02	-6.79
2442	7	242	61	MCS9	23.59	20.28	25.25	30.00	-4.75	4.27	29.53	36.02	-6.49
2447	8	242	61	MCS9	22.57	20.09	24.51	30.00	-5.49	4.27	28.79	36.02	-7.23
2452	9	242	61	MCS9	21.41	19.71	23.65	30.00	-6.35	4.27	27.93	36.02	-8.09
2457	10	242	61	MCS9	20.96	19.52	23.31	30.00	-6.69	4.27	27.58	36.02	-8.44
2462	11	242	61	MCS9	18.36	19.12	21.77	30.00	-8.23	4.27	26.04	36.02	-9.98
2467	12	242	61	MCS9	16.30	17.44	19.92	30.00	-10.08	4.27	24.19	36.02	-11.83

Table 7-61. Peak Conducted Output Power Measurements CDD Common (RU242)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 47 of 179

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Dedicated	Summed						
2412	1	26	0	MCS5	19.07	18.01	21.58	30.00	-8.42	4.27	25.86	36.02	-10.16
2412	1	26	4	MCS5	18.44	18.76	21.61	30.00	-8.39	4.27	25.89	36.02	-10.13
2412	1	26	8	MCS5	18.28	18.60	21.45	30.00	-8.55	4.27	25.73	36.02	-10.29
2437	6	26	0	MCS5	18.23	18.88	21.58	30.00	-8.42	4.27	25.85	36.02	-10.17
2437	6	26	4	MCS5	17.98	19.07	21.57	30.00	-8.43	4.27	25.84	36.02	-10.18
2437	6	26	8	MCS5	18.25	18.52	21.40	30.00	-8.60	4.27	25.67	36.02	-10.35
2462	11	26	0	MCS5	17.93	18.43	21.20	30.00	-8.80	4.27	25.47	36.02	-10.55
2462	11	26	4	MCS5	19.29	18.75	22.04	30.00	-7.96	4.27	26.31	36.02	-9.71
2462	11	26	8	MCS5	19.19	18.55	21.89	30.00	-8.11	4.27	26.17	36.02	-9.86
2467	12	26	0	MCS5	19.35	18.85	22.12	30.00	-7.88	4.27	26.39	36.02	-9.63
2467	12	26	4	MCS5	18.76	18.23	21.51	30.00	-8.49	4.27	25.79	36.02	-10.23
2467	12	26	8	MCS5	19.16	19.31	22.25	30.00	-7.75	4.27	26.52	36.02	-9.50

Table 7-62. Peak Conducted Output Power Measurements CDD Dedicated (RU26)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Dedicated	Summed						
2412	1	52	37	MCS9	19.69	19.31	22.51	30.00	-7.49	4.27	26.79	36.02	-9.23
2412	1	52	38	MCS9	21.02	18.68	23.02	30.00	-6.98	4.27	27.29	36.02	-8.73
2412	1	52	40	MCS9	19.43	18.99	22.23	30.00	-7.77	4.27	26.50	36.02	-9.52
2437	6	52	37	MCS9	19.45	20.12	22.81	30.00	-7.19	4.27	27.08	36.02	-8.94
2437	6	52	38	MCS9	20.03	19.77	22.91	30.00	-7.09	4.27	27.19	36.02	-8.84
2437	6	52	40	MCS9	20.06	19.83	22.96	30.00	-7.04	4.27	27.23	36.02	-8.79
2462	11	52	37	MCS9	19.53	19.92	22.74	30.00	-7.26	4.27	27.01	36.02	-9.01
2462	11	52	38	MCS9	19.95	19.39	22.69	30.00	-7.31	4.27	26.96	36.02	-9.06
2462	11	52	40	MCS9	19.86	20.06	22.97	30.00	-7.03	4.27	27.24	36.02	-8.78
2467	12	52	37	MCS9	19.67	19.09	22.40	30.00	-7.60	4.27	26.67	36.02	-9.35
2467	12	52	38	MCS9	18.57	18.97	21.78	30.00	-8.22	4.27	26.06	36.02	-9.96
2467	12	52	40	MCS9	18.41	18.26	21.35	30.00	-8.65	4.27	25.62	36.02	-10.40

Table 7-63. Peak Conducted Output Power Measurements CDD Dedicated (RU52)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Dedicated	Summed						
2412	1	106	53	MCS9	21.12	21.49	24.32	30.00	-5.68	4.27	28.59	36.02	-7.43
2412	1	106	54	MCS9	20.83	20.71	23.78	30.00	-6.22	4.27	28.05	36.02	-7.97
2417	2	106	53	MCS9	21.43	21.17	24.31	30.00	-5.69	4.27	28.59	36.02	-7.44
2417	2	106	54	MCS9	20.69	21.01	23.86	30.00	-6.14	4.27	28.14	36.02	-7.88
2437	6	106	53	MCS9	21.05	20.59	23.84	30.00	-6.16	4.27	28.11	36.02	-7.91
2437	6	106	54	MCS9	21.19	20.91	24.06	30.00	-5.94	4.27	28.34	36.02	-7.68
2462	11	106	53	MCS9	20.88	21.27	24.09	30.00	-5.91	4.27	28.36	36.02	-7.66
2462	11	106	54	MCS9	22.12	21.05	24.63	30.00	-5.37	4.27	28.90	36.02	-7.12
2467	12	106	53	MCS9	18.68	19.48	22.11	30.00	-7.89	4.27	26.38	36.02	-9.64
2467	12	106	54	MCS9	19.14	19.23	22.20	30.00	-7.80	4.27	26.47	36.02	-9.55

Table 7-64. Peak Conducted Output Power Measurements CDD Dedicated (RU106)

Freq [MHz]	Channel	RU Size	RU Index	Data Rate	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 0	Antenna 1 Dedicated	Summed						
2412	1	242	61	MCS5	21.09	21.33	24.22	30.00	-5.78	4.27	28.50	36.02	-7.53
2417	2	242	61	MCS5	22.58	21.77	25.20	30.00	-4.80	4.27	29.48	36.02	-6.54
2422	3	242	61	MCS5	23.55	23.20	26.39	30.00	-3.61	4.27	30.66	36.02	-5.36
2427	4	242	61	MCS5	24.48	23.66	27.10	30.00	-2.90	4.27	31.37	36.02	-4.65
2432	5	242	61	MCS5	24.50	23.56	27.07	30.00	-2.93	4.27	31.34	36.02	-4.68
2437	6	242	61	MCS5	24.54	23.57	27.09	30.00	-2.91	4.27	31.37	36.02	-4.65
2442	7	242	61	MCS5	24.39	23.42	26.94	30.00	-3.06	4.27	31.22	36.02	-4.80
2447	8	242	61	MCS5	23.80	23.07	26.46	30.00	-3.54	4.27	30.73	36.02	-5.29
2452	9	242	61	MCS5	23.40	22.64	26.05	30.00	-3.95	4.27	30.32	36.02	-5.70
2457	10	242	61	MCS5	22.67	22.12	25.41	30.00	-4.59	4.27	29.69	36.02	-6.33
2462	11	242	61	MCS5	22.02	21.65	24.85	30.00	-5.15	4.27	29.12	36.02	-6.90
2467	12	242	61	MCS5	19.54	19.02	22.30	30.00	-7.70	4.27	26.57	36.02	-9.45

Table 7-65. Peak Conducted Output Power Measurements CDD Dedicated (RU242)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 48 of 179

Note:

Per ANSI C63.10-2020 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 0 and Antenna 1 Dedicated were first measured separately during CDD transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2020 Subclause 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample CDD Calculation:

At 2412MHz the average conducted output power was measured to be 8.85 dBm for Antenna 0 and 8.65 dBm for Antenna 1 Dedicated.

$$\text{Antenna 0} + \text{Antenna 1 Dedicated} = \text{CDD Dedicated}$$

$$(8.85 \text{ dBm} + 8.65 \text{ dBm}) = (7.674 \text{ mW} + 7.328 \text{ mW}) = 15.002 \text{ mW} = 11.76 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 2412MHz, the average conducted output power was calculated to be 11.76 dBm with directional gain of 4.27 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$11.76 \text{ dBm} + 4.27 \text{ dBi} = 16.03 \text{ dBm}$$

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 49 of 179

7.5 Power Spectral Density

Test Overview and Limit

The power spectral density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 – Subclause 11.10.3 & 11.10.5 Method AVGPDS-1 & AVGPDS-2

KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 – Subclause 14.5.2.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span > 1.5 times the OBW
3. RBW = 3kHz
4. VBW $\geq 3 \times$ RBW
5. Detector = power averaging (rms)
6. Number of sweep points $\geq 2 \times$ (span/RBW)
7. Sweep time = auto couple
8. Employ trace averaging (rms) mode over a minimum of 100 traces
9. Use the peak marker function to determine the maximum amplitude level

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. All data rates were investigated and only the worst case is reported.
2. All data rates were investigated, and tabular data has been reported. Only the worst-case plot was reported.
3. The duty cycle correction factor (DCCF) has been applied as an amplitude offset in the spectrum analyzer to ensure the required correction is accurately reflected in the measured Power Spectral Density (PSD). The offset value is indicated on each PSD plot.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 50 of 179

7.5.1 Antenna 1 Common Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	26	0	MCS9	-18.14	8.0	-26.14
			26	4	MCS9	-18.36	8.0	-26.36
			26	8	MCS9	-18.20	8.0	-26.20
2437	6	ax	26	0	MCS9	-18.80	8.0	-26.80
			26	4	MCS9	-18.23	8.0	-26.23
			26	8	MCS9	-18.74	8.0	-26.74
2462	11	ax	26	0	MCS9	-17.87	8.0	-25.87
			26	4	MCS9	-18.26	8.0	-26.26
			26	8	MCS9	-18.70	8.0	-26.70

Table 7-66. Conducted Power Density Measurements Antenna 1 Common – RU26

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	242	61	MCS9	-25.55	8.0	-33.55
2437	6	ax	242	61	MCS9	-21.13	8.0	-29.13
2462	11	ax	242	61	MCS9	-25.41	8.0	-33.41

Table 7-67. Conducted Power Density Measurements Antenna 1 Common – RU242


Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	52	37	MCS9	-19.91	8.0	-27.91
			52	39	MCS9	-20.13	8.0	-28.13
			52	40	MCS9	-19.41	8.0	-27.41
2437	6	ax	52	37	MCS9	-20.04	8.0	-28.04
			52	39	MCS9	-20.12	8.0	-28.12
			52	40	MCS9	-19.84	8.0	-27.84
2462	11	ax	52	37	MCS9	-19.73	8.0	-27.73
			52	39	MCS9	-20.44	8.0	-28.44
			52	40	MCS9	-20.45	8.0	-28.45

Table 7-68. Conducted Power Density Measurements Antenna 1 Common – RU52


Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	106	53	MCS9	-22.93	8.0	-30.93
			106	54	MCS9	-21.95	8.0	-29.95
2437	6	ax	106	53	MCS9	-21.43	8.0	-29.43
			106	54	MCS9	-20.53	8.0	-28.53
2462	11	ax	106	53	MCS9	-21.58	8.0	-29.58
			106	54	MCS9	-20.90	8.0	-28.90

Table 7-69. Conducted Power Density Measurements Antenna 1 Common – RU106


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 51 of 179

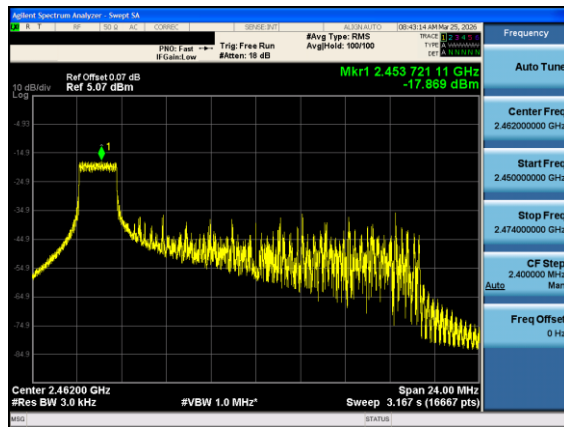


Plot 7-25. Power Spectral Density Plot Antenna 1 Common (802.11ax OFDMA – RU26 Index 0 – Ch. 11)

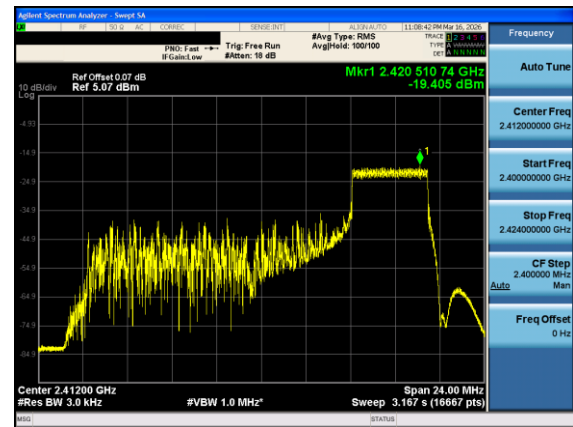

Plot 7-26. Power Spectral Density Plot Antenna 1 Common (802.11ax OFDMA – RU52 Index 40 – Ch. 1)

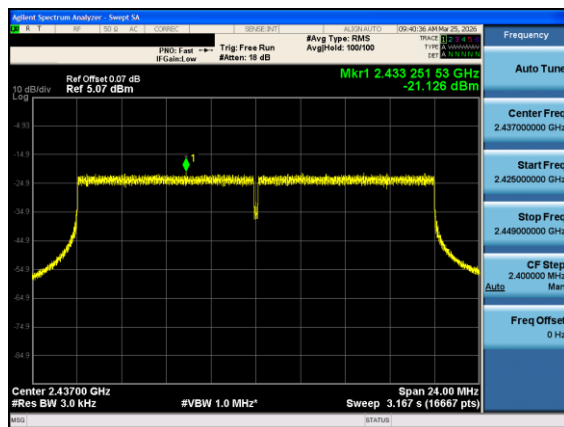

Plot 7-27. Power Spectral Density Plot Antenna 1 Common (802.11ax OFDMA – RU242 Index 61 – Ch. 6)

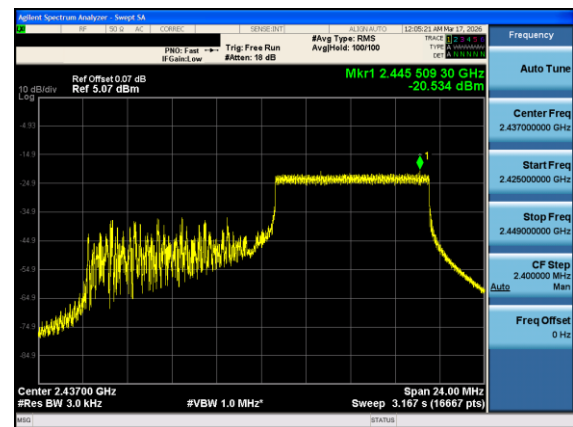

Plot 7-28. Power Spectral Density Plot Antenna 1 Common (802.11ax OFDMA – RU106 Index 54 – Ch. 6)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		

7.5.2 Antenna 0 Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	26	0	MCS9	-16.75	8.0	-24.75
			26	4	MCS9	-16.63	8.0	-24.63
			26	8	MCS9	-16.10	8.0	-24.10
2437	6	ax	26	0	MCS9	-16.67	8.0	-24.67
			26	4	MCS9	-16.78	8.0	-24.78
			26	8	MCS9	-16.72	8.0	-24.72
2462	11	ax	26	0	MCS9	-16.59	8.0	-24.59
			26	4	MCS9	-16.51	8.0	-24.51
			26	8	MCS9	-16.51	8.0	-24.51

Table 7-70. Conducted Power Density Measurements Antenna 0 – RU26

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	242	61	MCS9	-23.61	8.0	-31.61
2437	6	ax	242	61	MCS9	-18.04	8.0	-26.04
2462	11	ax	242	61	MCS9	-23.18	8.0	-31.18

Table 7-71. Conducted Power Density Measurements Antenna 0 – RU242


Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	52	37	MCS9	-17.01	8.0	-25.01
			52	39	MCS9	-18.77	8.0	-26.77
			52	40	MCS9	-17.42	8.0	-25.42
2437	6	ax	52	37	MCS9	-17.48	8.0	-25.48
			52	39	MCS9	-17.40	8.0	-25.40
			52	40	MCS9	-18.11	8.0	-26.11
2462	11	ax	52	37	MCS9	-17.87	8.0	-25.87
			52	39	MCS9	-17.77	8.0	-25.77
			52	40	MCS9	-17.67	8.0	-25.67

Table 7-72. Conducted Power Density Measurements Antenna 0 – RU52


Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	106	53	MCS9	-20.15	8.0	-28.15
			106	54	MCS9	-19.81	8.0	-27.81
2437	6	ax	106	53	MCS9	-20.28	8.0	-28.28
			106	54	MCS9	-19.74	8.0	-27.74
2462	11	ax	106	53	MCS9	-20.68	8.0	-28.68
			106	54	MCS9	-19.54	8.0	-27.54

Table 7-73. Conducted Power Density Measurements Antenna 0 – RU106


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 53 of 179

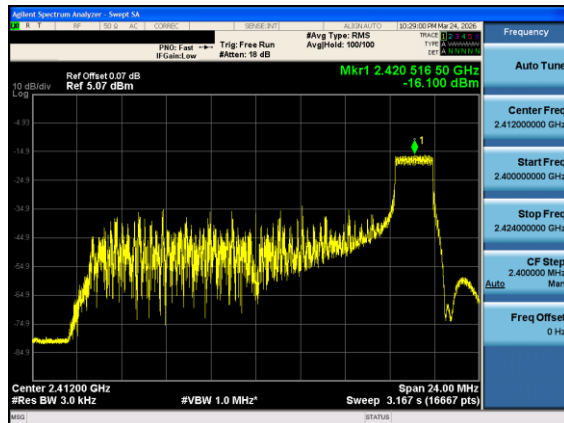


Plot 7-29. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA - RU26 Index 8 - Ch. 1)

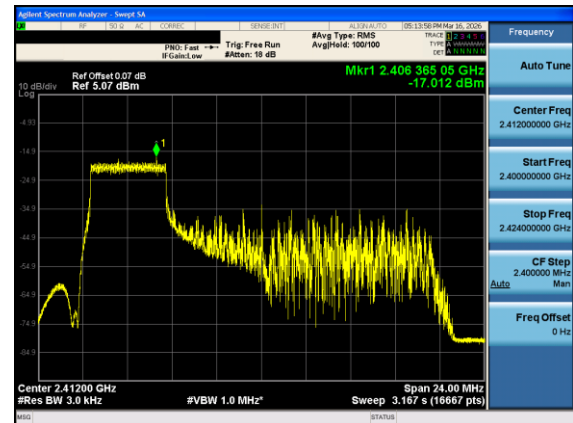

Plot 7-30. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA - RU52 Index 37 - Ch. 1)

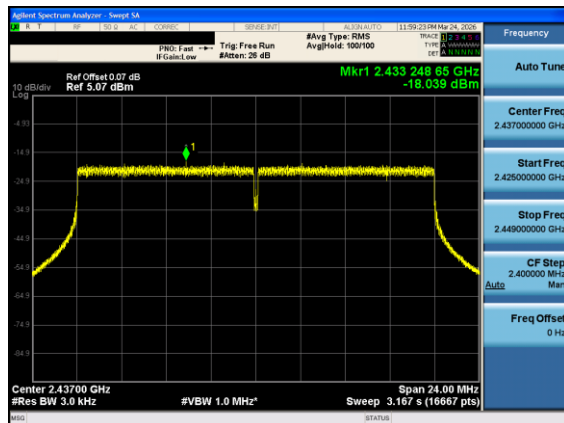

Plot 7-31. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA - RU242 Index 61 - Ch. 6)

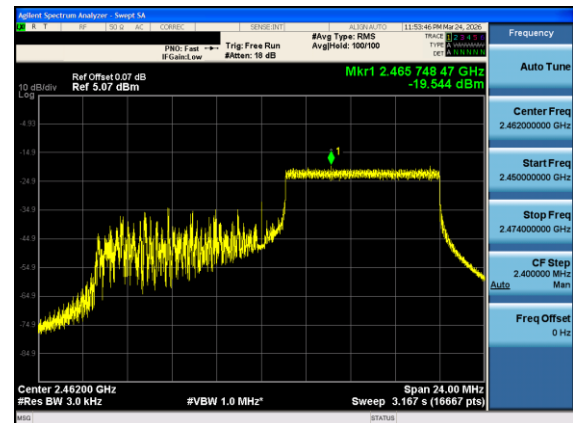

Plot 7-32. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA - RU106 Index 54 - Ch. 11)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 54 of 179

7.5.3 Antenna 1 Dedicated Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	26	0	MCS9	-15.35	8.0	-23.35
			26	4	MCS9	-15.45	8.0	-23.45
			26	8	MCS9	-15.30	8.0	-23.30
2437	6	ax	26	0	MCS9	-15.13	8.0	-23.13
			26	4	MCS9	-15.52	8.0	-23.52
			26	8	MCS9	-15.15	8.0	-23.15
2462	11	ax	26	0	MCS9	-15.22	8.0	-23.22
			26	4	MCS9	-15.20	8.0	-23.20
			26	8	MCS9	-15.13	8.0	-23.13

Table 7-74. Conducted Power Density Measurements Antenna 1 Dedicated – RU26

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	242	61	MCS9	-22.42	8.0	-30.42
2437	6	ax	242	61	MCS9	-17.34	8.0	-25.34
2462	11	ax	242	61	MCS9	-22.03	8.0	-30.03

Table 7-75. Conducted Power Density Measurements Antenna 1 Dedicated – RU242


Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	52	37	MCS9	-16.83	8.0	-24.83
			52	39	MCS9	-17.27	8.0	-25.27
			52	40	MCS9	-16.14	8.0	-24.14
2437	6	ax	52	37	MCS9	-16.00	8.0	-24.00
			52	39	MCS9	-17.14	8.0	-25.14
			52	40	MCS9	-16.29	8.0	-24.29
2462	11	ax	52	37	MCS9	-16.06	8.0	-24.06
			52	39	MCS9	-16.90	8.0	-24.90
			52	40	MCS9	-16.26	8.0	-24.26

Table 7-76. Conducted Power Density Measurements Antenna 1 Dedicated – RU52


Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	106	53	MCS9	-19.80	8.0	-27.80
			106	54	MCS9	-19.11	8.0	-27.11
2437	6	ax	106	53	MCS9	-18.80	8.0	-26.80
			106	54	MCS9	-18.43	8.0	-26.43
2462	11	ax	106	53	MCS9	-19.07	8.0	-27.07
			106	54	MCS9	-18.74	8.0	-26.74

Table 7-77. Conducted Power Density Measurements Antenna 1 Dedicated – RU106


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 55 of 179

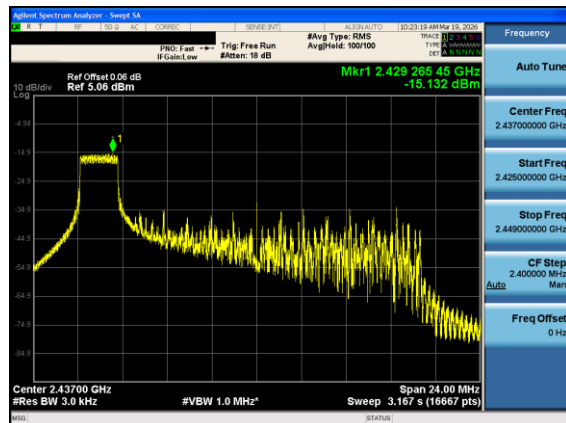


Plot 7-33. Power Spectral Density Plot Antenna 1 Dedicated (802.11ax OFDMA – RU26 Index 0 – Ch. 6)

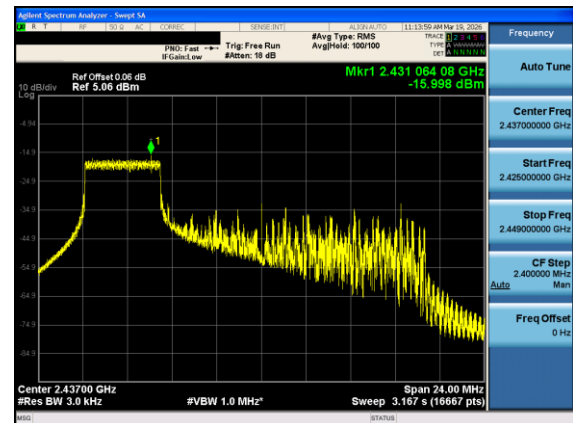

Plot 7-35. Power Spectral Density Plot Antenna 1 Dedicated (802.11ax OFDMA – RU52 Index 37 – Ch. 6)

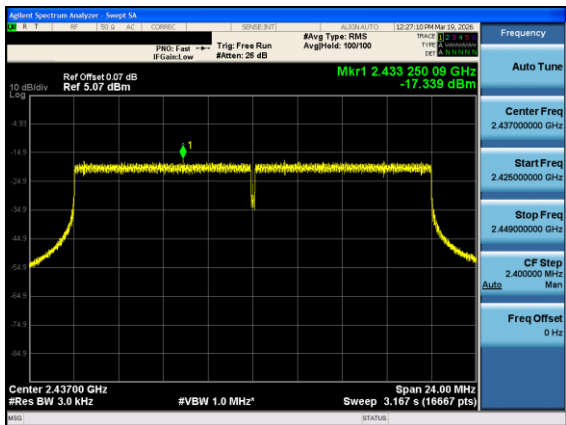

Plot 7-34. Power Spectral Density Plot Antenna 1 Dedicated (802.11ax OFDMA – RU242 Index 61 – Ch. 6)

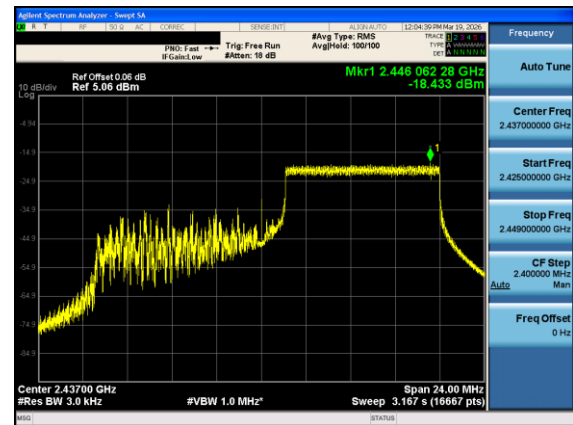

Plot 7-36. Power Spectral Density Plot Antenna 1 Dedicated (802.11ax OFDMA – RU106 Index 54 – Ch. 6)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 56 of 179

7.5.4 CDD Common Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Antenna 0 Power Density [dBm/3kHz]	Antenna 1 Common Power Density [dBm/3kHz]	Summed Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	26	0	MCS9	-16.45	-18.58	-14.38	8.0	-22.38
			26	4	MCS9	-17.57	-18.43	-14.97	8.0	-22.97
			26	8	MCS9	-16.58	-18.88	-14.57	8.0	-22.57
2437	6	ax	26	0	MCS9	-17.18	-18.38	-14.73	8.0	-22.73
			26	4	MCS9	-17.44	-18.33	-14.85	8.0	-22.85
			26	8	MCS9	-17.57	-18.24	-14.88	8.0	-22.88
2462	11	ax	26	0	MCS9	-17.53	-18.39	-14.93	8.0	-22.93
			26	4	MCS9	-17.40	-18.68	-14.98	8.0	-22.98
			26	8	MCS9	-17.34	-18.47	-14.86	8.0	-22.86

Table 7-78. Conducted Power Density Measurements CDD Common – RU26

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Antenna 0 Power Density [dBm/3kHz]	Antenna 1 Common Power Density [dBm/3kHz]	Summed Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	242	61	MCS9	-24.03	-25.69	-21.77	8.0	-29.77
2437	6	ax	242	61	MCS9	-19.11	-20.20	-16.61	8.0	-24.61
2462	11	ax	242	61	MCS9	-23.38	-25.14	-21.16	8.0	-29.16

Table 7-79. Conducted Power Density Measurements CDD Common – RU242


Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Antenna 0 Power Density [dBm/3kHz]	Antenna 1 Common Power Density [dBm/3kHz]	Summed Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	52	37	MCS9	-18.49	-20.93	-16.53	8.0	-24.53
			52	39	MCS9	-19.00	-20.49	-16.67	8.0	-24.67
			52	40	MCS9	-18.67	-20.05	-16.29	8.0	-24.29
2437	6	ax	52	37	MCS9	-17.51	-19.94	-15.55	8.0	-23.55
			52	39	MCS9	-19.57	-19.95	-16.75	8.0	-24.75
			52	40	MCS9	-18.62	-20.28	-16.36	8.0	-24.36
2462	11	ax	52	37	MCS9	-18.25	-19.35	-15.75	8.0	-23.75
			52	39	MCS9	-18.00	-20.18	-15.94	8.0	-23.94
			52	40	MCS9	-18.48	-19.96	-16.14	8.0	-24.14

Table 7-80. Conducted Power Density Measurements CDD Common – RU52


Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Antenna 0 Power Density [dBm/3kHz]	Antenna 1 Common Power Density [dBm/3kHz]	Summed Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	106	53	MCS9	-20.81	-22.74	-18.66	8.0	-26.66
			106	54	MCS9	-20.86	-22.66	-18.66	8.0	-26.66
2437	6	ax	106	53	MCS9	-21.39	-22.08	-18.71	8.0	-26.71
			106	54	MCS9	-20.49	-20.97	-17.71	8.0	-25.71
2462	11	ax	106	53	MCS9	-20.67	-21.89	-18.23	8.0	-26.23
			106	54	MCS9	-20.84	-21.32	-18.06	8.0	-26.06

Table 7-81. Conducted Power Density Measurements CDD Common – RU106


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 57 of 179

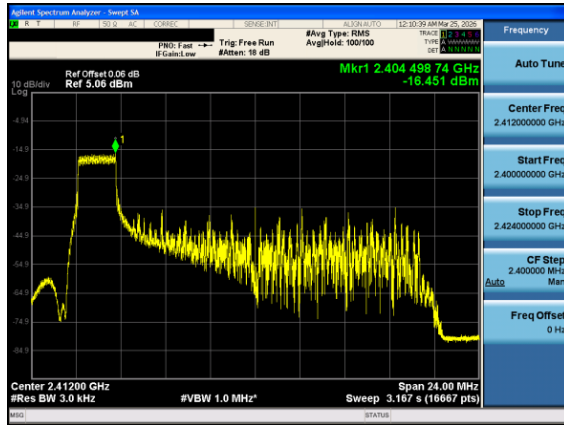


Plot 7-37. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

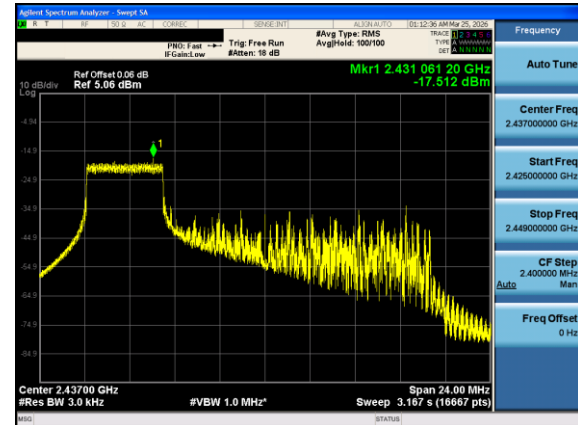


Plot 7-38. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA – RU52 Index 37 – Ch. 6)

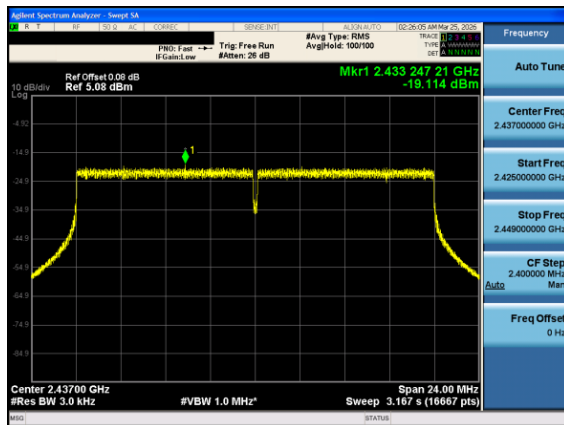


Plot 7-39. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA – RU242 Index 61 – Ch. 6)

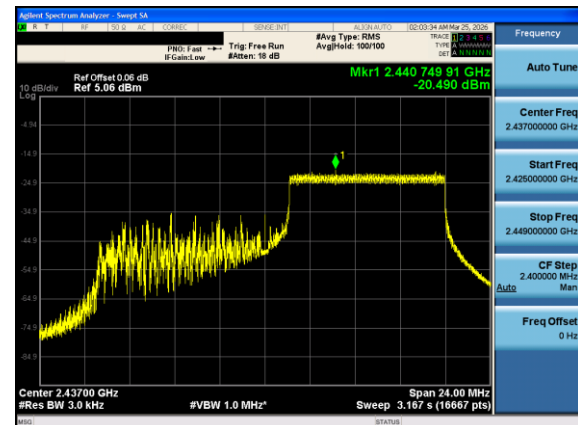

Plot 7-40. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA – RU106 Index 54 – Ch. 6)

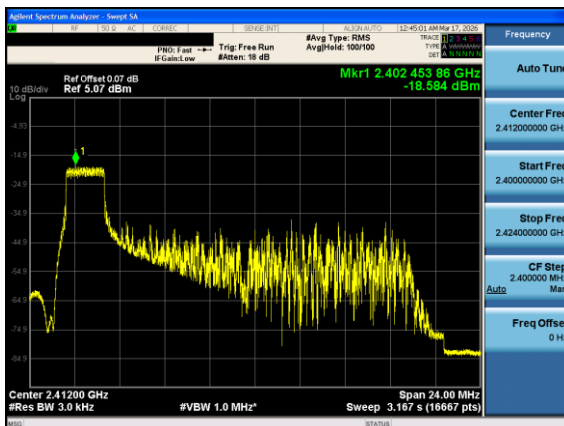


Plot 7-41. Power Spectral Density Plot Antenna 1 Common (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

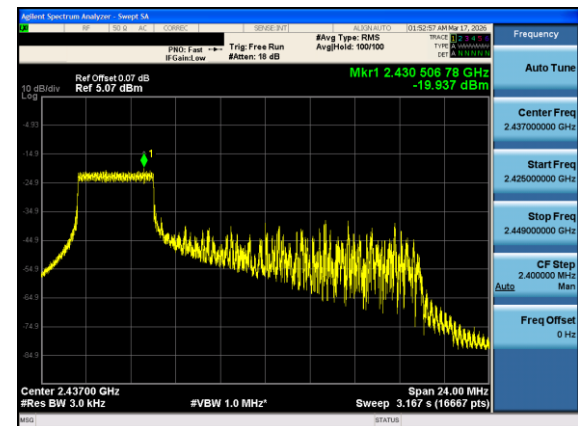


Plot 7-42. Power Spectral Density Plot Antenna 1 Common (802.11ax OFDMA – RU52 Index 37 – Ch. 6)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 58 of 179

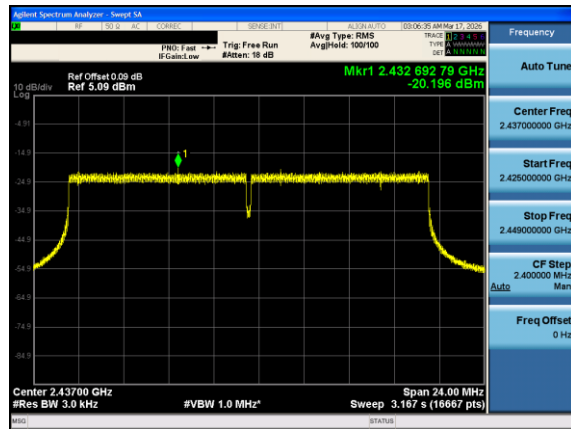

Plot 7-43. Power Spectral Density Plot Antenna 1 Common
(802.11ax OFDMA – RU242 Index 61 – Ch. 6)

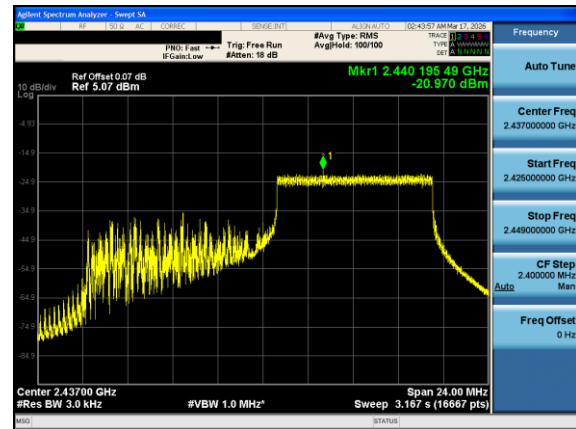

Plot 7-44. Power Spectral Density Plot Antenna 1 Common
(802.11ax OFDMA – RU106 Index 54 – Ch. 6)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 59 of 179

7.5.5 CDD Dedicated Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Antenna 0 Power Density [dBm/3kHz]	Antenna 1 Dedicated Power Density [dBm/3kHz]	Summed Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	26	0	MCS9	-16.45	-16.40	-13.42	8.0	-21.42
			26	4	MCS9	-17.57	-17.29	-14.42	8.0	-22.42
			26	8	MCS9	-16.58	-16.67	-13.62	8.0	-21.62
2437	6	ax	26	0	MCS9	-17.18	-17.09	-14.12	8.0	-22.12
			26	4	MCS9	-17.44	-16.28	-13.81	8.0	-21.81
			26	8	MCS9	-17.57	-17.64	-14.60	8.0	-22.60
2462	11	ax	26	0	MCS9	-17.53	-16.96	-14.22	8.0	-22.22
			26	4	MCS9	-17.40	-16.82	-14.09	8.0	-22.09
			26	8	MCS9	-17.34	-16.78	-14.04	8.0	-22.04

Table 7-82. Conducted Power Density Measurements CDD Dedicated – RU26

Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate	Antenna 0 Power Density [dBm/3kHz]	Antenna 1 Dedicated Power Density [dBm/3kHz]	Summed Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	242	61	MCS9	-24.03	-23.04	-20.50	8.0	-28.50
2437	6	ax	242	61	MCS9	-19.11	-17.69	-15.33	8.0	-23.33
2462	11	ax	242	61	MCS9	-23.38	-22.24	-19.77	8.0	-27.77

Table 7-83. Conducted Power Density Measurements CDD Dedicated – RU242


Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Antenna 0 Power Density [dBm/3kHz]	Antenna 1 Dedicated Power Density [dBm/3kHz]	Summed Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	52	37	MCS9	-18.49	-19.07	-15.76	8.0	-23.76
			52	39	MCS9	-19.00	-19.39	-16.18	8.0	-24.18
			52	40	MCS9	-18.67	-18.47	-15.56	8.0	-23.56
2437	6	ax	52	37	MCS9	-17.51	-17.95	-14.72	8.0	-22.72
			52	39	MCS9	-19.57	-18.17	-15.81	8.0	-23.81
			52	40	MCS9	-18.62	-17.72	-15.13	8.0	-23.13
2462	11	ax	52	37	MCS9	-18.25	-17.63	-14.92	8.0	-22.92
			52	39	MCS9	-18.00	-18.06	-15.02	8.0	-23.02
			52	40	MCS9	-18.48	-17.35	-14.87	8.0	-22.87

Table 7-84. Conducted Power Density Measurements CDD Dedicated – RU52


Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate	Antenna 0 Power Density [dBm/3kHz]	Antenna 1 Dedicated Power Density [dBm/3kHz]	Summed Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]
2412	1	ax	106	53	MCS9	-20.81	-20.07	-17.41	8.0	-25.41
			106	54	MCS9	-20.86	-20.34	-17.58	8.0	-25.58
2437	6	ax	106	53	MCS9	-21.39	-21.40	-18.39	8.0	-26.39
			106	54	MCS9	-20.49	-19.57	-16.99	8.0	-24.99
2462	11	ax	106	53	MCS9	-20.67	-19.99	-17.30	8.0	-25.30
			106	54	MCS9	-20.84	-19.39	-17.04	8.0	-25.04

Table 7-85. Conducted Power Density Measurements CDD Dedicated – RU106


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 60 of 179

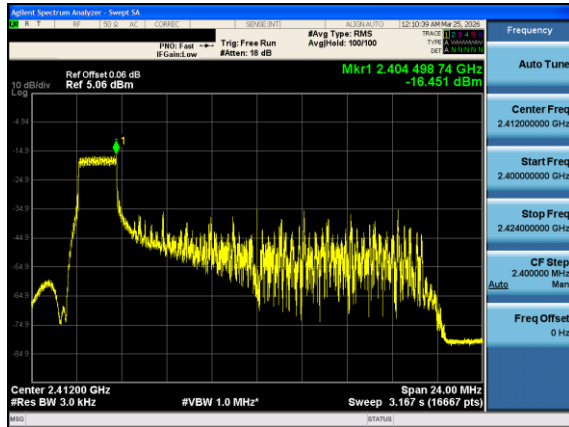


Plot 7-45. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

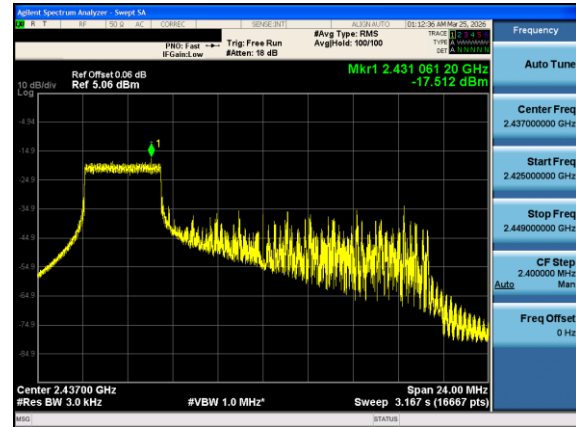


Plot 7-46. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA – RU52 Index 37 – Ch. 6)

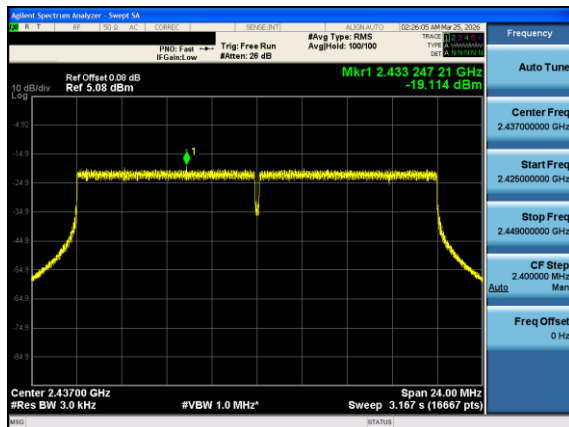


Plot 7-47. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA – RU242 Index 61 – Ch. 6)

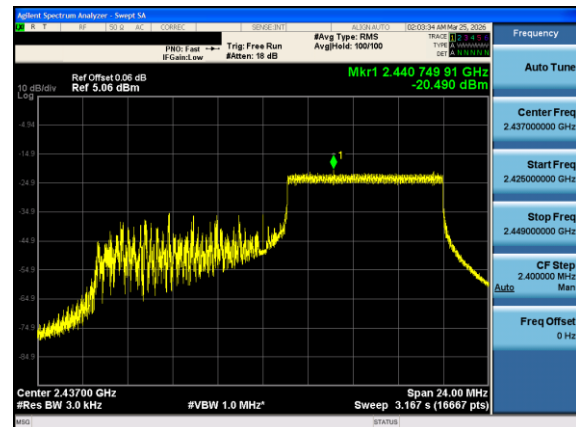

Plot 7-48. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA – RU106 Index 54 – Ch. 6)

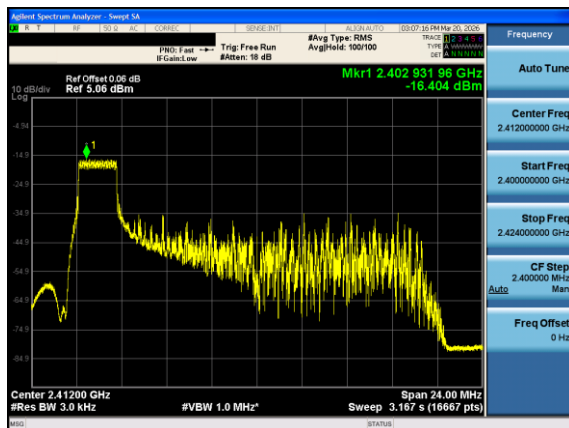


Plot 7-49. Power Spectral Density Plot Antenna 1 Dedicated (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

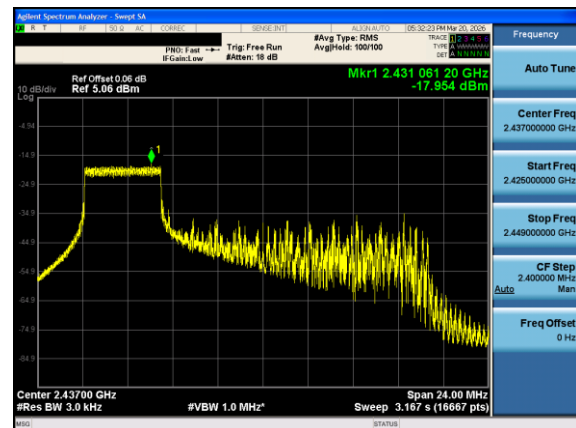


Plot 7-50. Power Spectral Density Plot Antenna 1 Dedicated (802.11ax OFDMA – RU52 Index 37 – Ch. 6)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 61 of 179

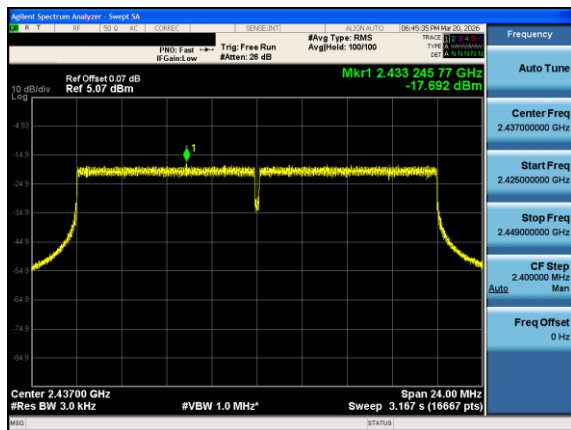

Plot 7-51. Power Spectral Density Plot Antenna 1 Dedicated
(802.11ax OFDMA – RU242 Index 61 – Ch. 6)

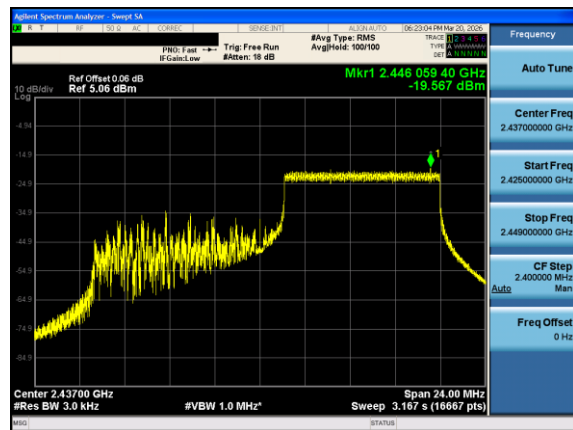

Plot 7-52. Power Spectral Density Plot Antenna 1 Dedicated
(802.11ax OFDMA – RU106 Index 54 – Ch. 6)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 62 of 179

Note:

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Subclause 14.6.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log [(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Section 14.5.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna 0 and Antenna 1 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample CDD Dedicated Calculation:

At 2412MHz the average conducted power spectral density was measured to be -16.45 dBm for Antenna 0 and -16.40 dBm for Antenna 1 Dedicated.

$$\text{Antenna 0} + \text{Antenna 1} = \text{CDD Dedicated}$$

$$((-16.45 \text{ dBm}) + (-16.40 \text{ dBm})) = (0.023 \text{ mW} + 0.023 \text{ mW}) = 0.046 \text{ mW} = -13.42 \text{ dBm}$$

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 63 of 179

7.6 Conducted Authorized Band Edge

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.5).

Test Procedure Used

ANSI C63.10:2020 + COR. 1:2023 + C63.10A:2024 + ERRATA TO C63.10A:2024 – Subclause 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW $\geq 3 \times$ RBW
5. Detector = Peak
6. Number of sweep points $\geq 2 \times$ Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-5. Test Instrument & Measurement Setup

Test Notes


1. All antenna configurations and data rates were investigated and only the worst case are reported.
2. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's worst case are reported.

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 64 of 179

7.6.1 Antenna 1 Common Conducted Emissions at the Band Edge

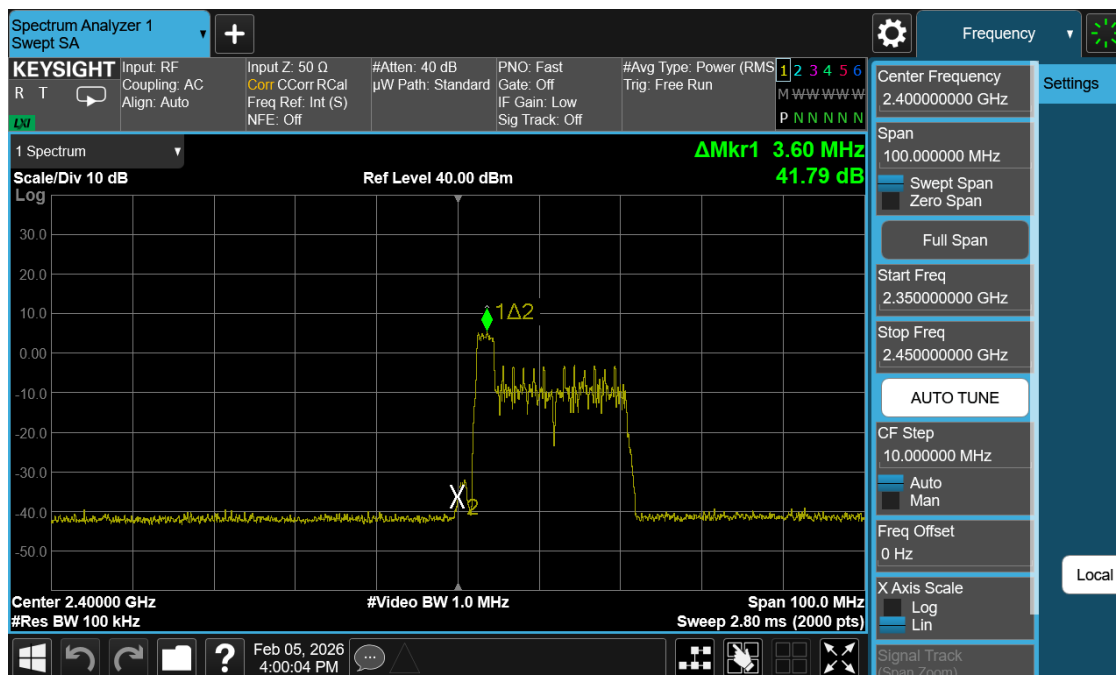

Plot 7-53. Band Edge Antenna 1 Common (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

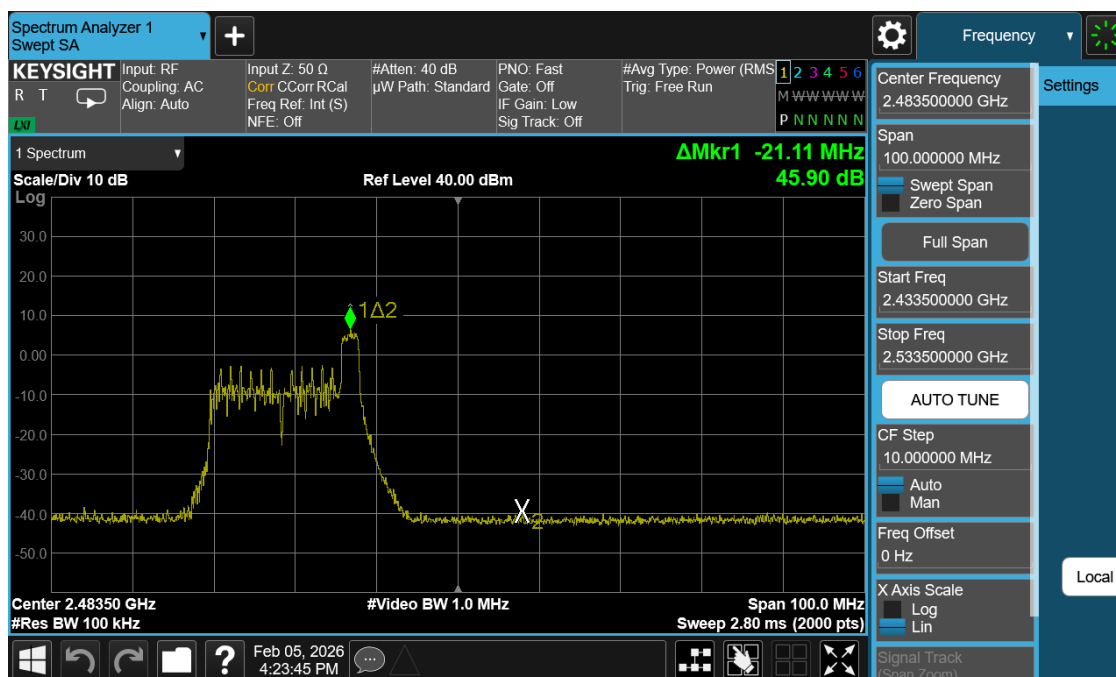


Plot 7-54. Band Edge Antenna 1 Common (802.11ax OFDMA – RU26 Index 8 – Ch. 11)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 65 of 179

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

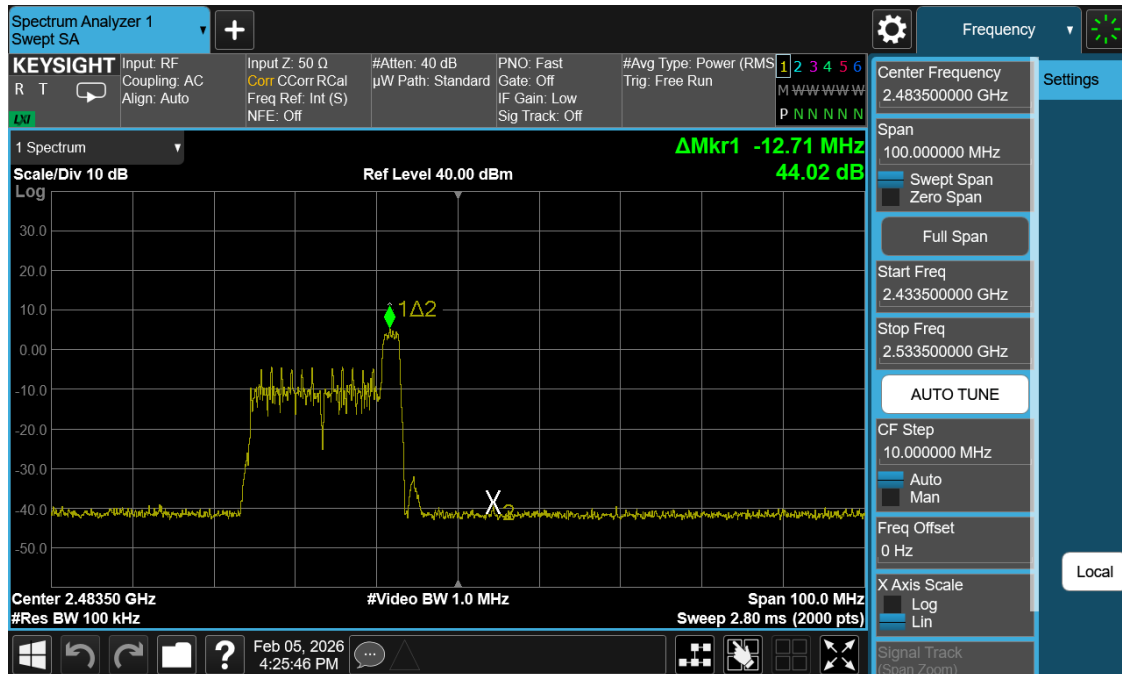


Plot 7-55. Band Edge Antenna 1 Common (802.11ax OFDMA – RU26 Index 8 – Ch. 12)

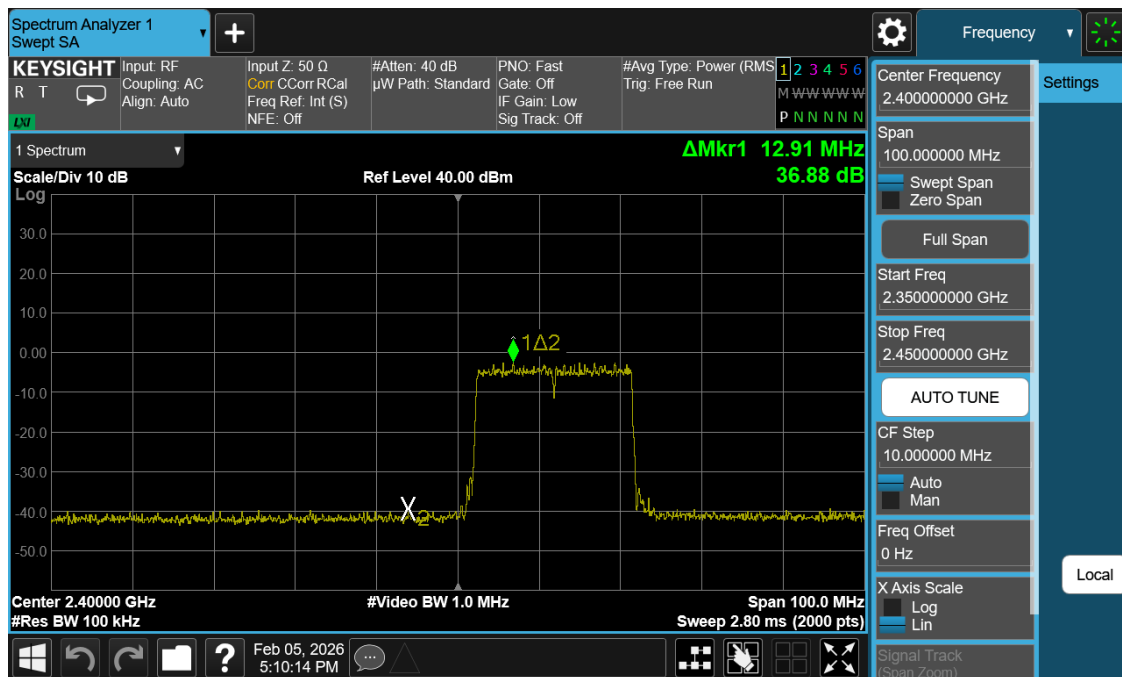


Plot 7-56. Band Edge Antenna 1 Common (802.11ax OFDMA – RU242 – Ch. 1)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 66 of 179

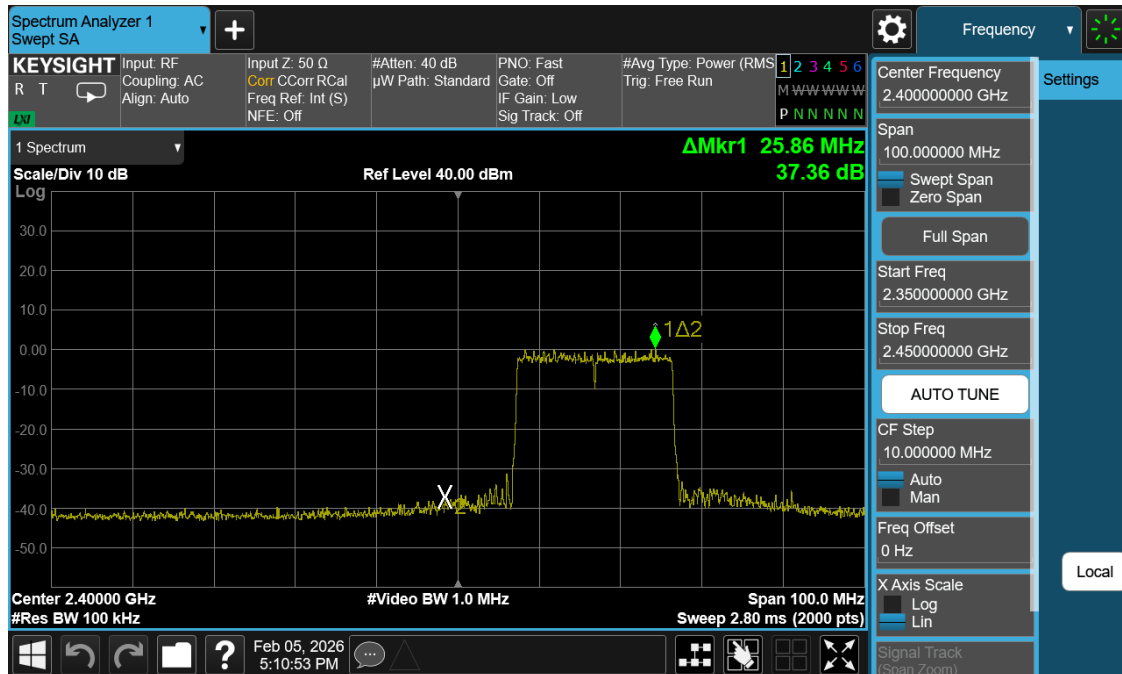


Plot 7-57. Band Edge Antenna 1 Common (802.11ax OFDMA – RU242 – Ch. 2)

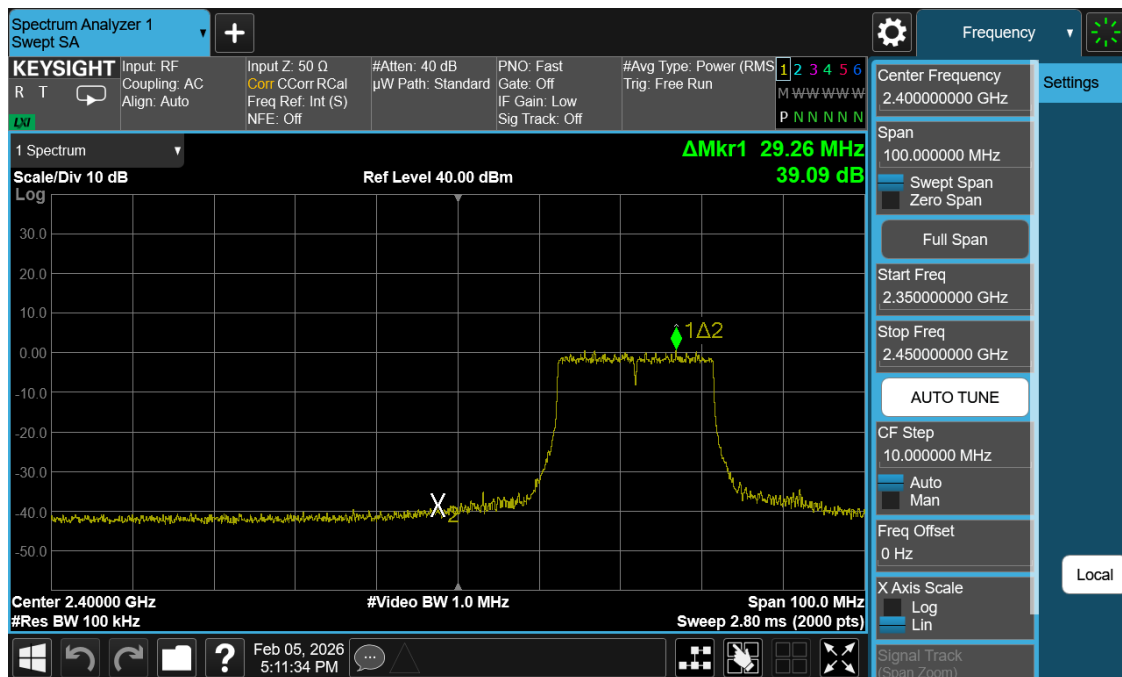


Plot 7-58. Band Edge Antenna 1 Common (802.11ax OFDMA – RU242 – Ch. 3)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 67 of 179

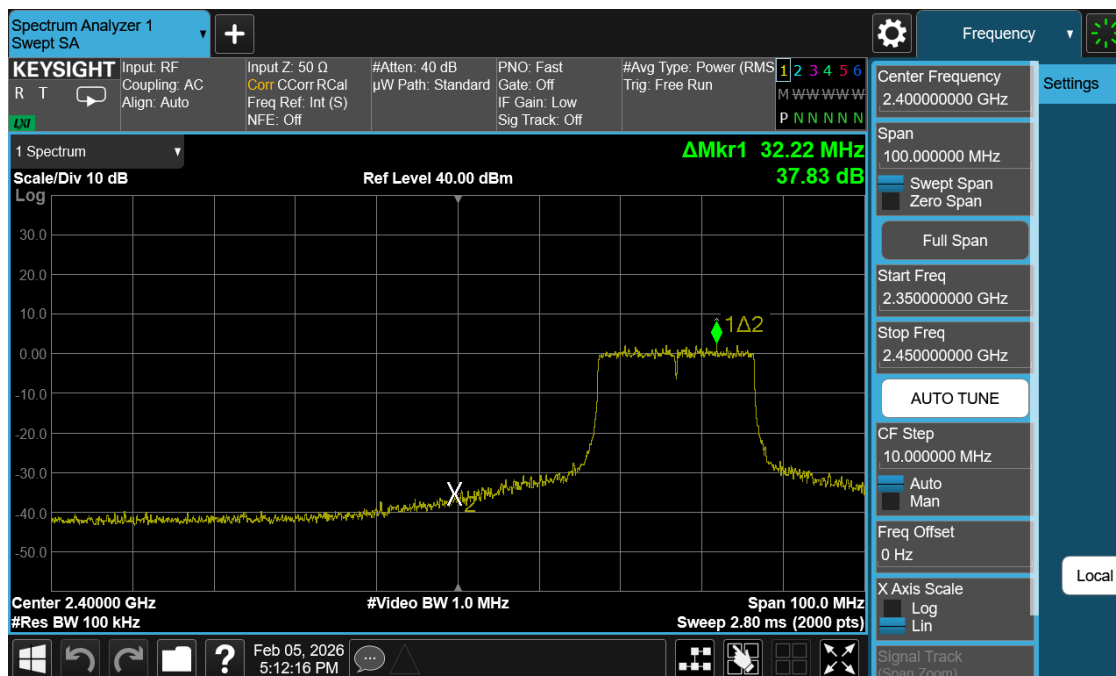

Plot 7-59. Band Edge Antenna 1 Common (802.11ax OFDMA – RU242 – Ch. 4)


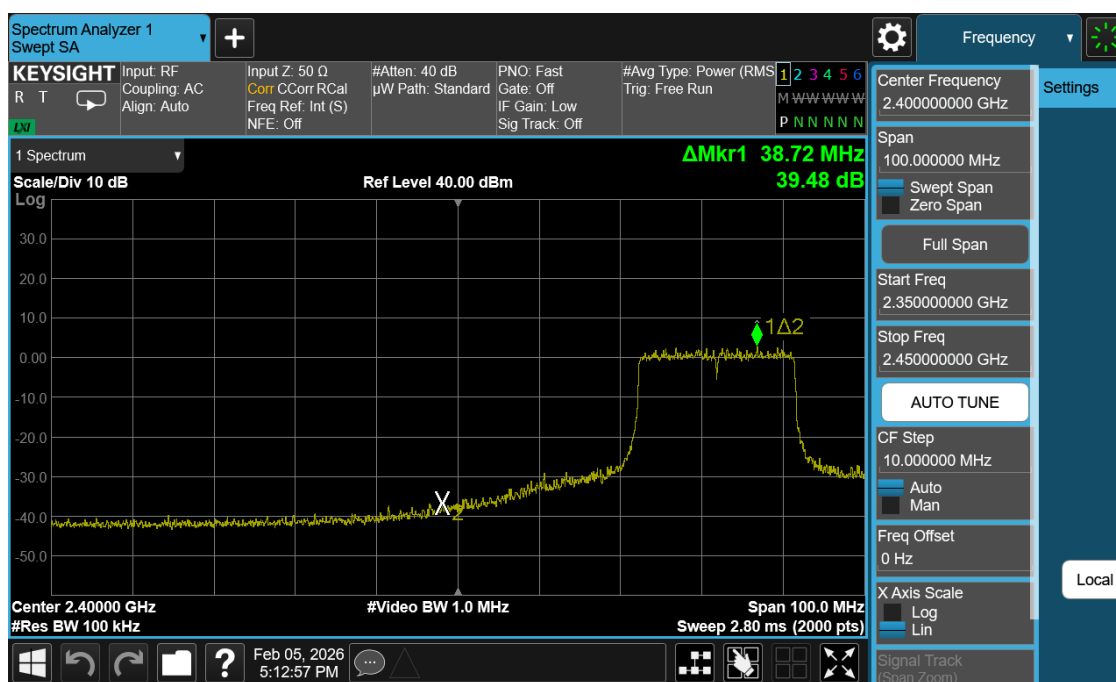


Plot 7-60. Band Edge Antenna 1 Common (802.11ax OFDMA – RU242 – Ch. 5)



FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 68 of 179

V 12.0 03/03/2026


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

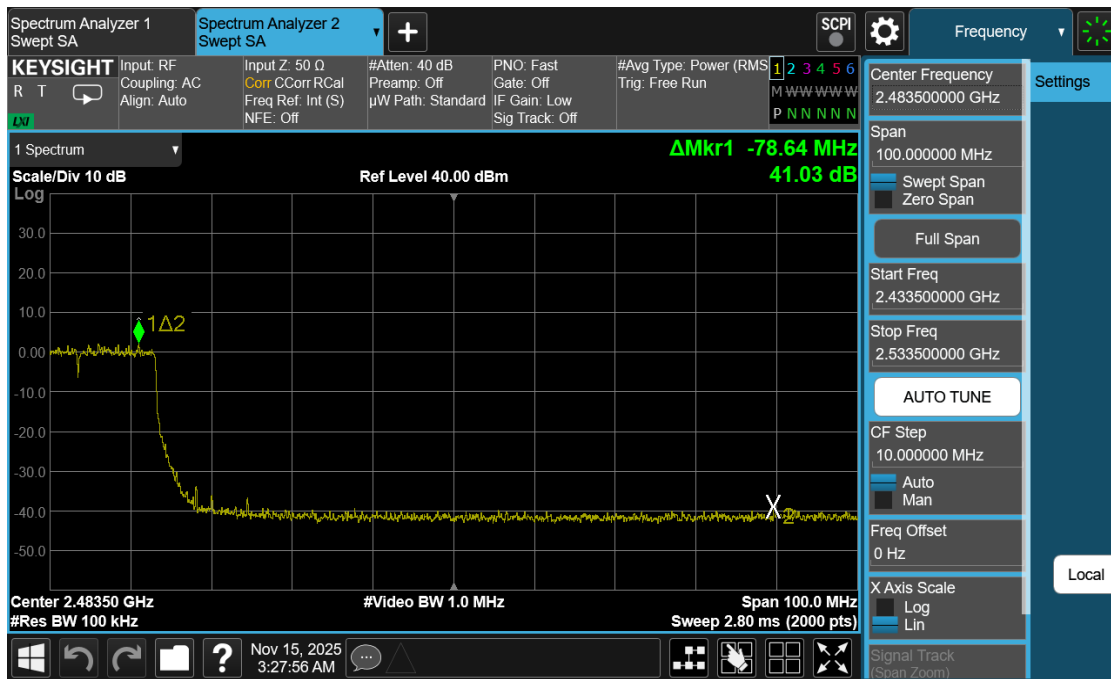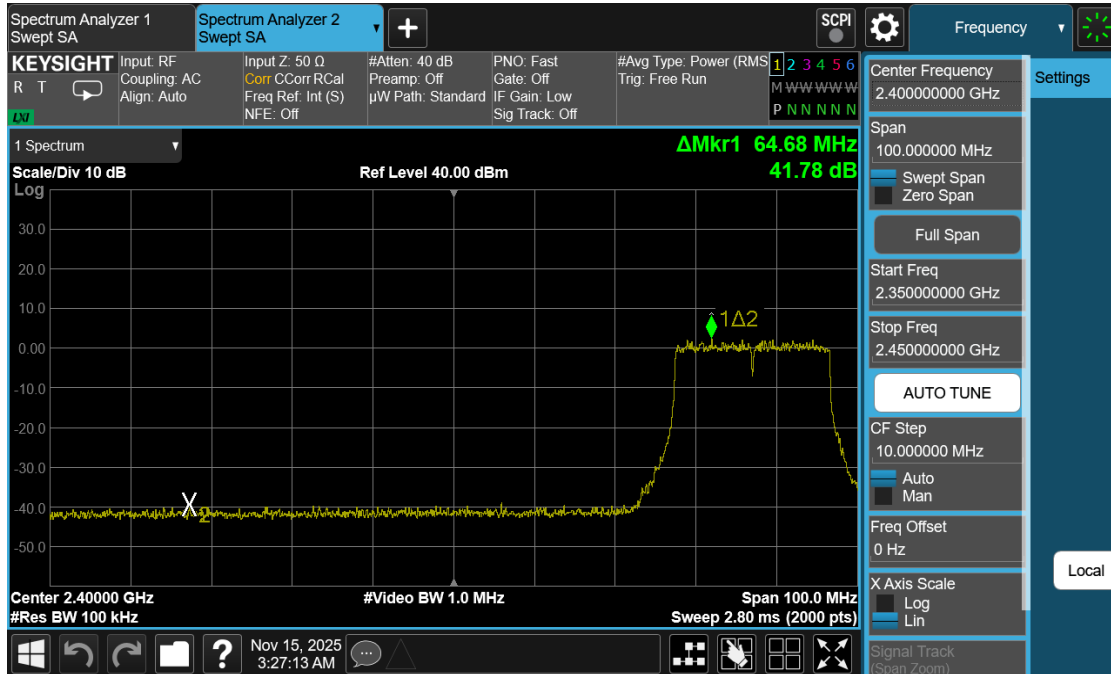


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 69 of 179

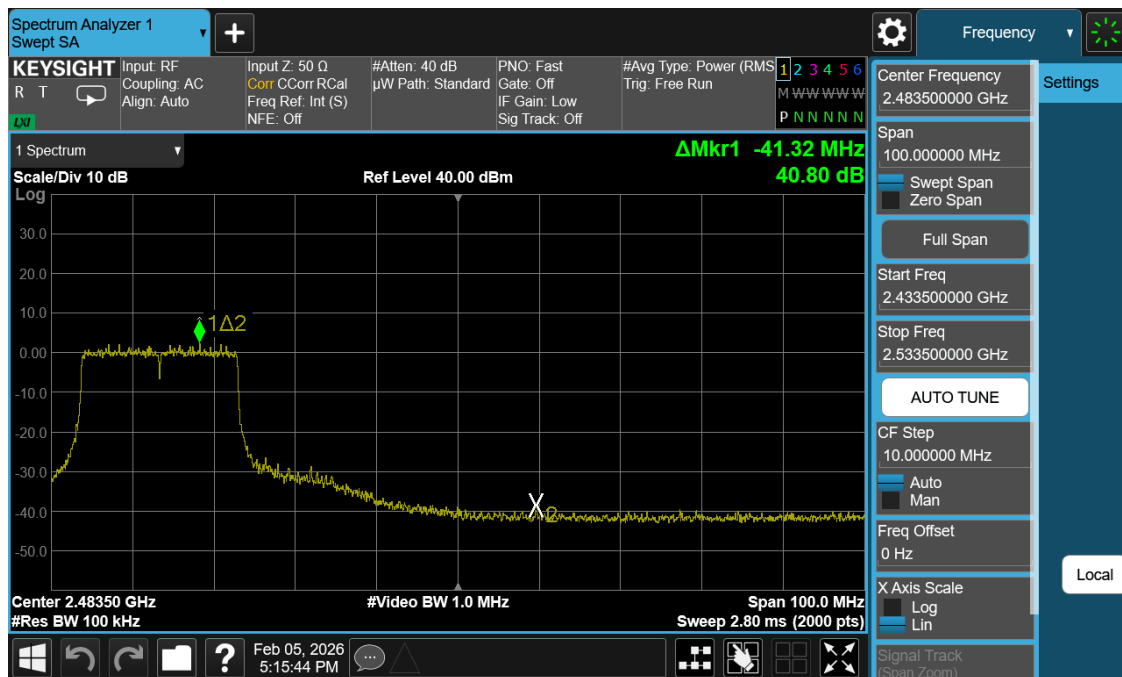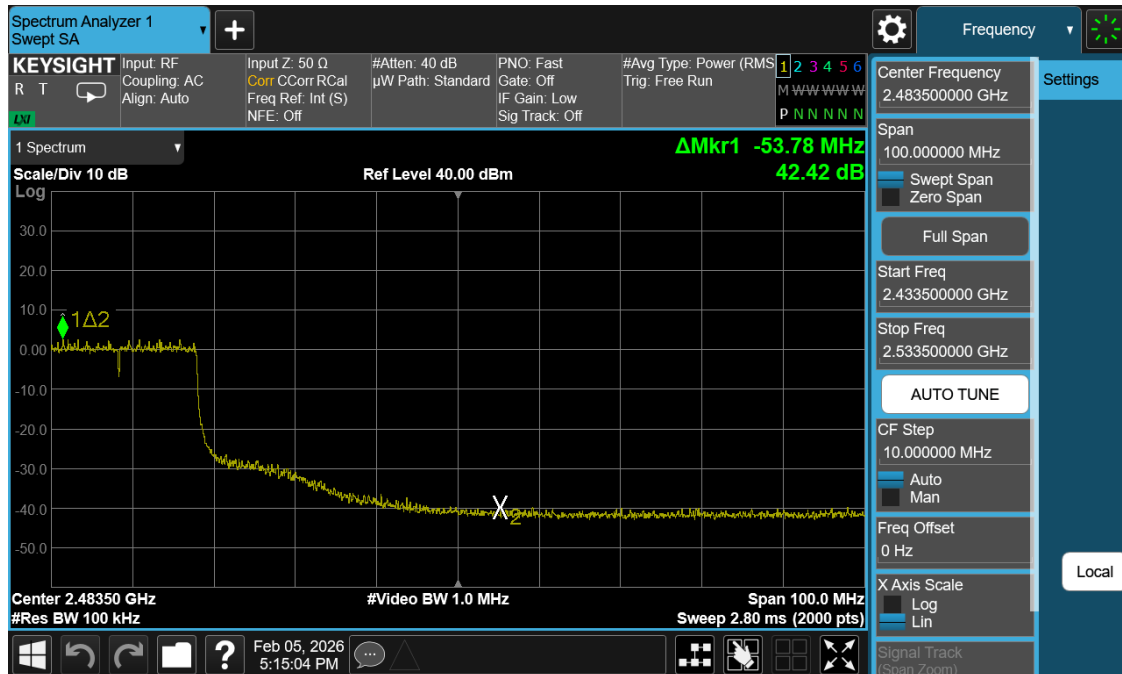

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 70 of 179

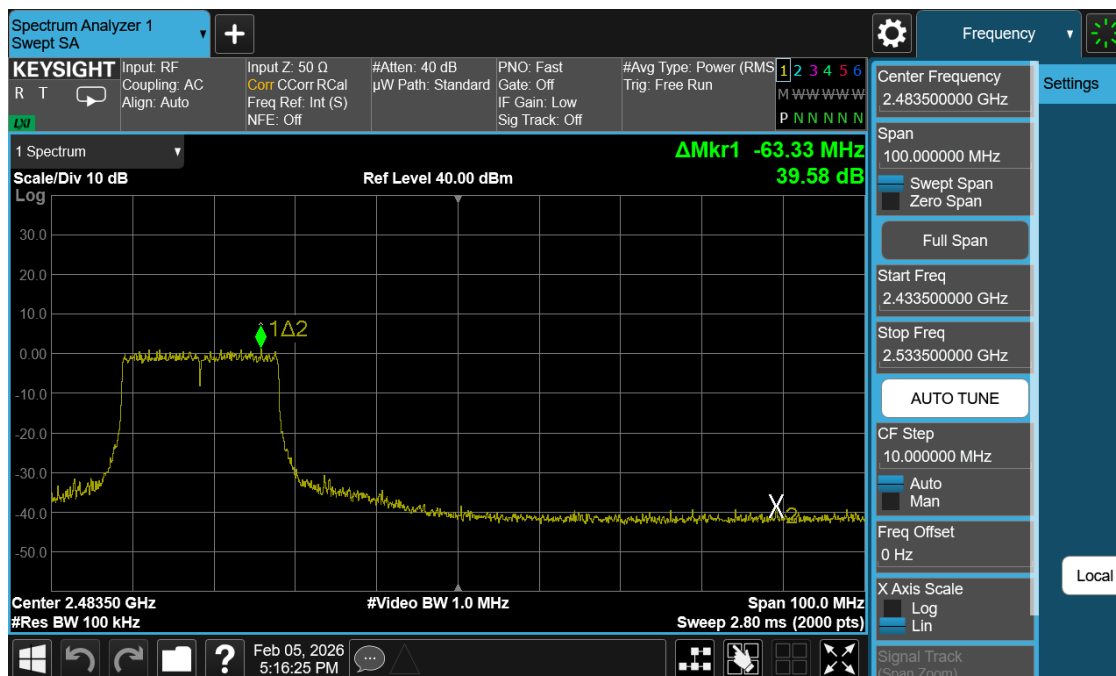

Plot 7-65. Band Edge Antenna 1 Common (802.11ax OFDMA – RU242 – Ch. 9)

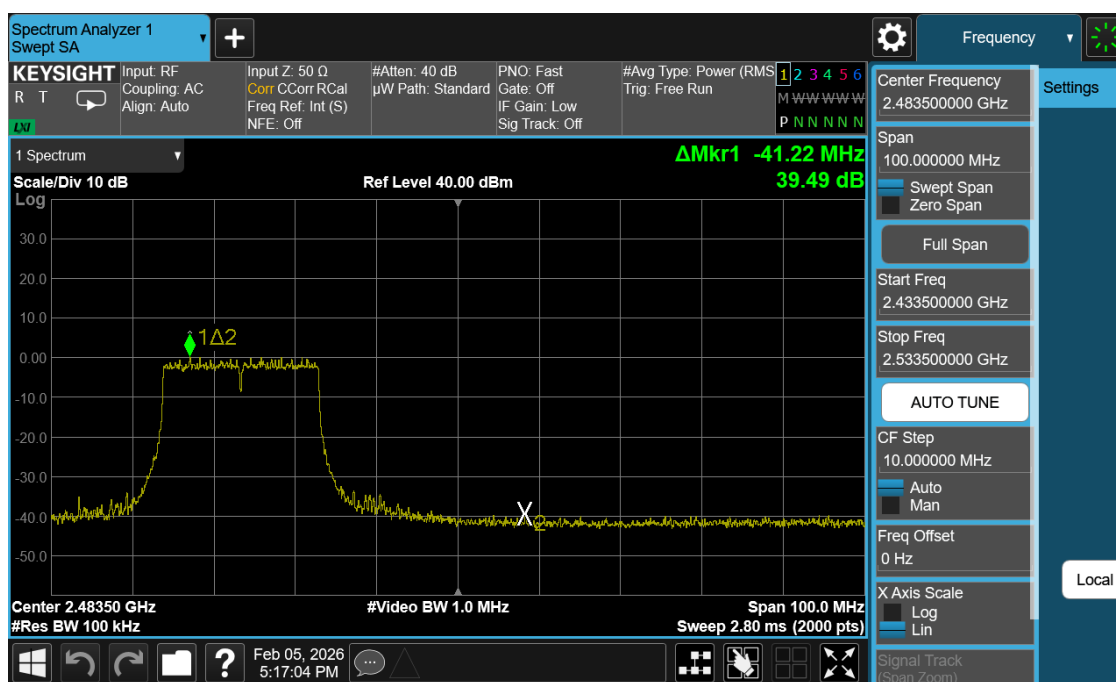


Plot 7-66. Band Edge Antenna 1 Common (802.11ax OFDMA – RU242 – Ch. 10)


FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 71 of 179

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

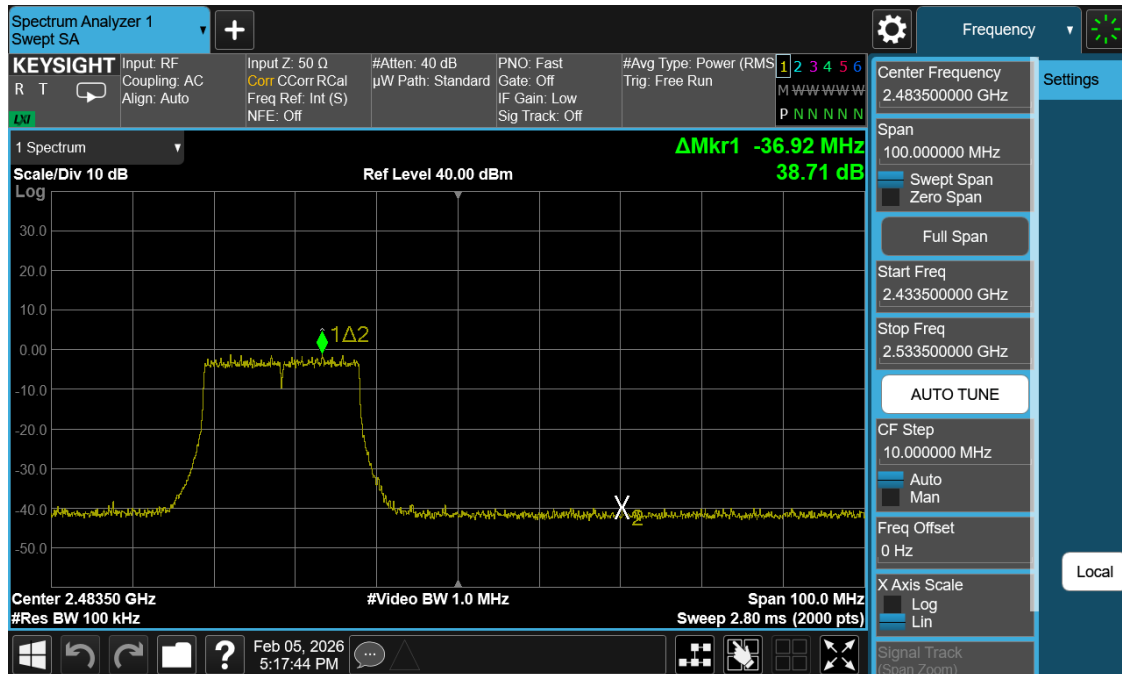


Plot 7-67. Band Edge Antenna 1 Common (802.11ax OFDMA – RU242 – Ch. 11)

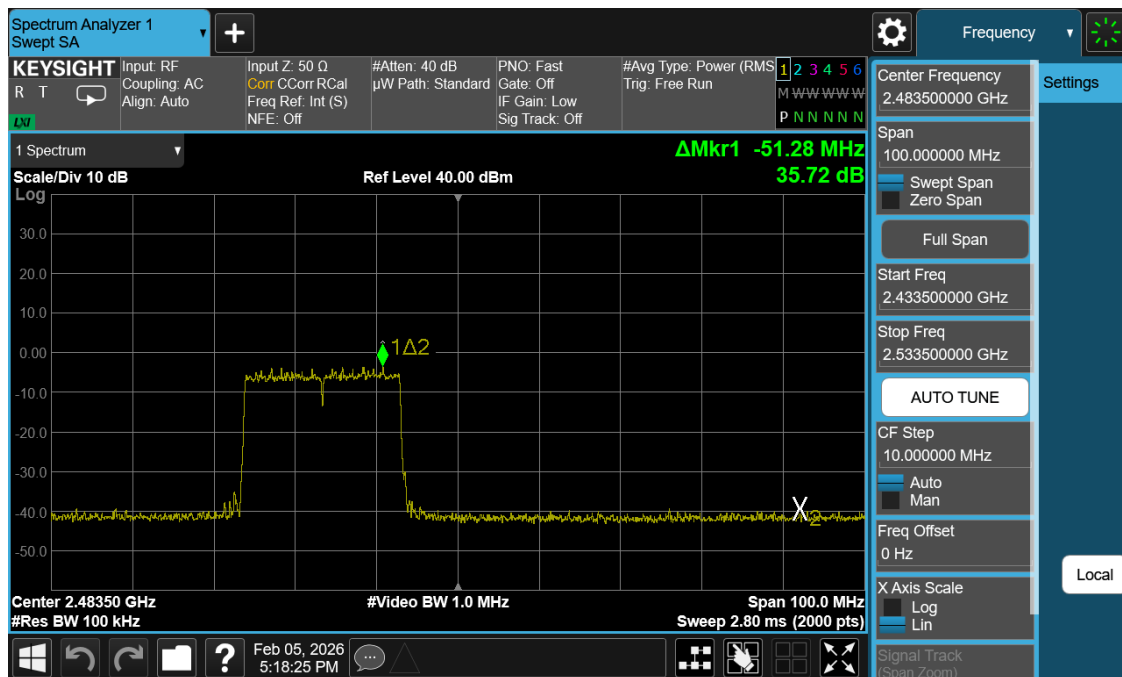


Plot 7-68. Band Edge Antenna 1 Common (802.11ax OFDMA – RU242 – Ch. 12)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 72 of 179

7.6.2 Antenna 0 Conducted Emissions at the Band Edge

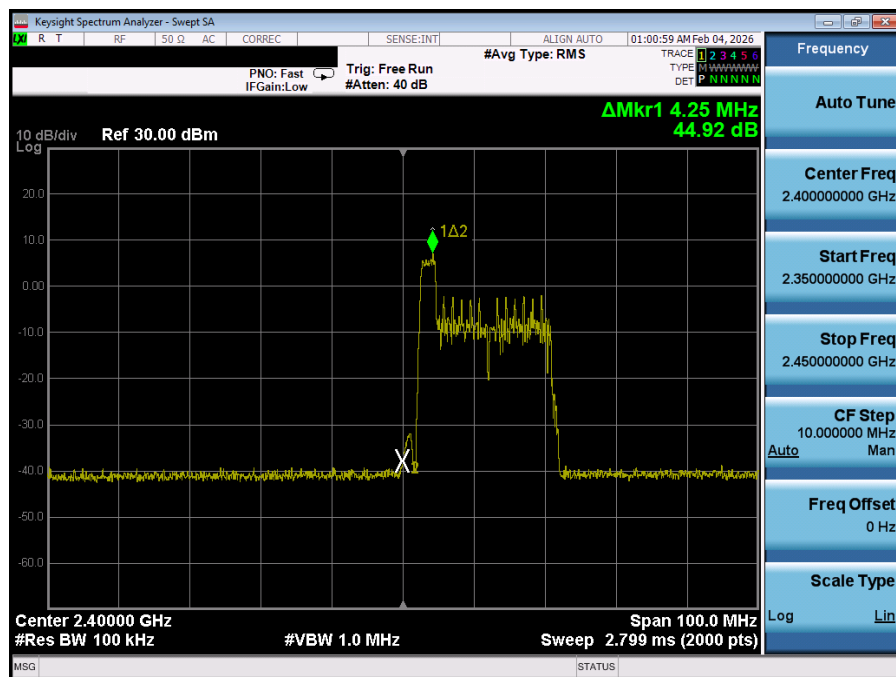

Plot 7-69. Band Edge Antenna 0 (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

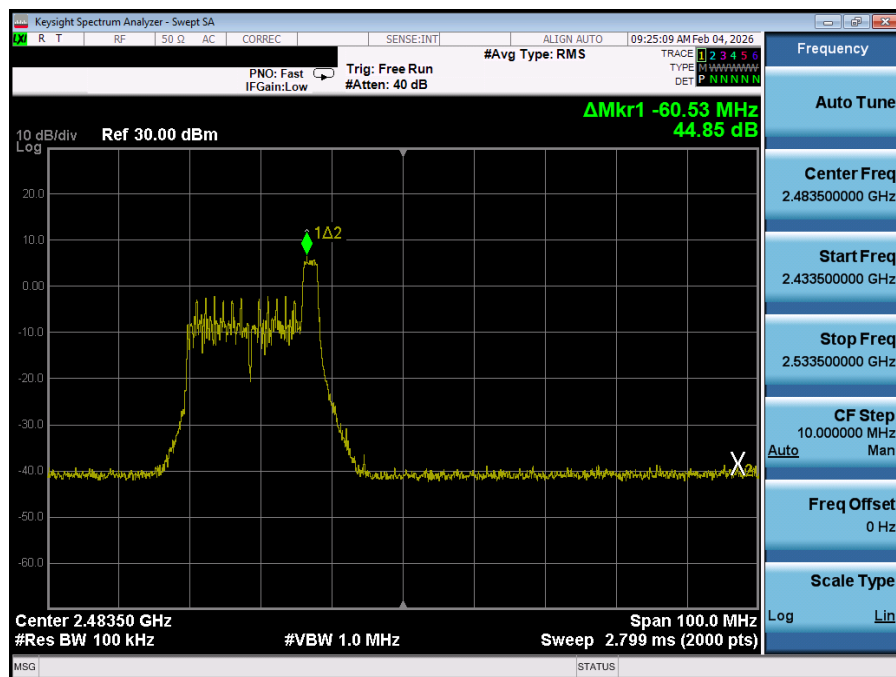

Plot 7-70. Band Edge Antenna 0 (802.11ax OFDMA – RU26 Index 8 – Ch. 11)

FCC ID: BCGA3374 IC: 579C-A3374		Test Dates: 09/15/2025 - 3/27/2026	EUT Type: Smart Speaker	Approved by: Technical Manager
Test Report S/N: 1C2505300067-06-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 73 of 179