

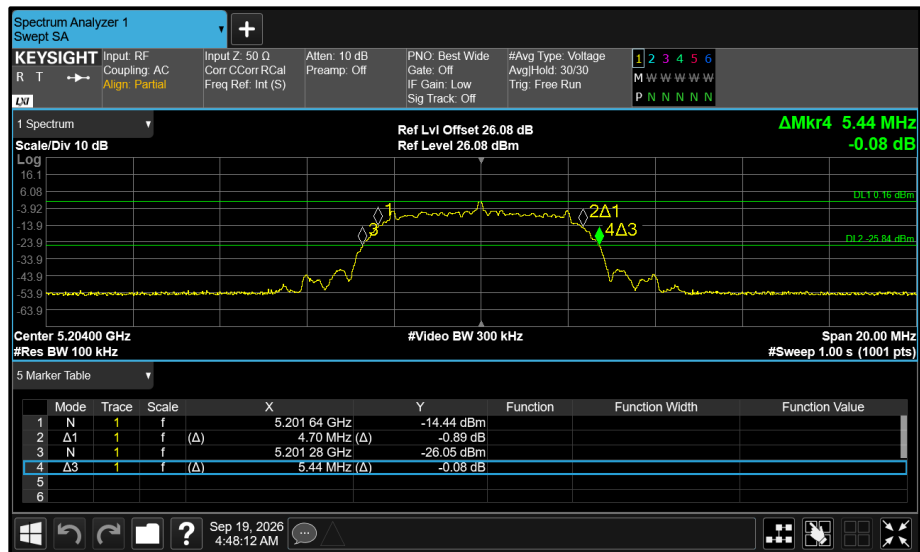


Figure 227 - Core 1 (B) 5204 MHz (CH54) 26 dB and 99% Bandwidth

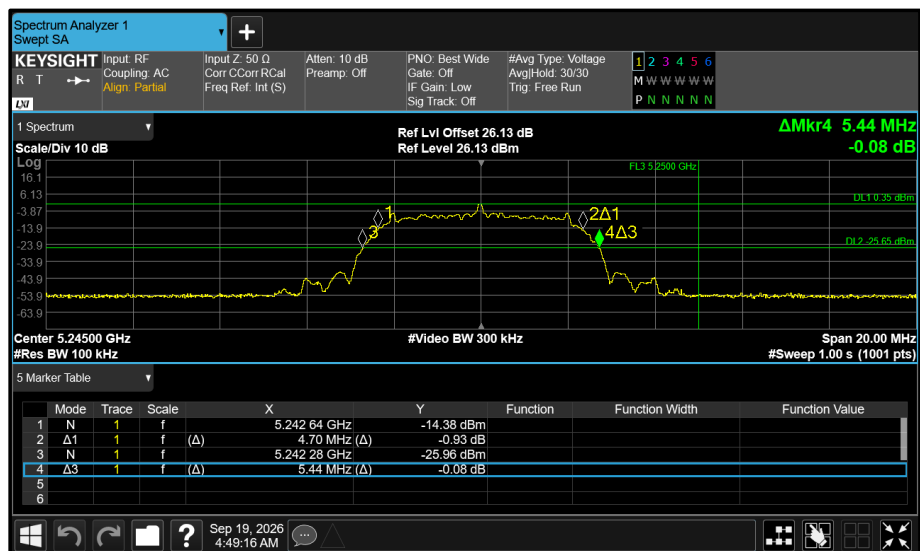


Figure 228 - Core 1 (B) 5245 MHz (CH95) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA HDRP (HDRPL8)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5165	-	10.830	-	-	-
5204	-	10.830	-	-	-
5242	-	10.830	-	-	-

Table 215 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5165	-	9.450	-	-	-
5204	-	9.450	-	-	-
5242	-	9.450	-	-	-

Table 216 - 99% Bandwidth Results

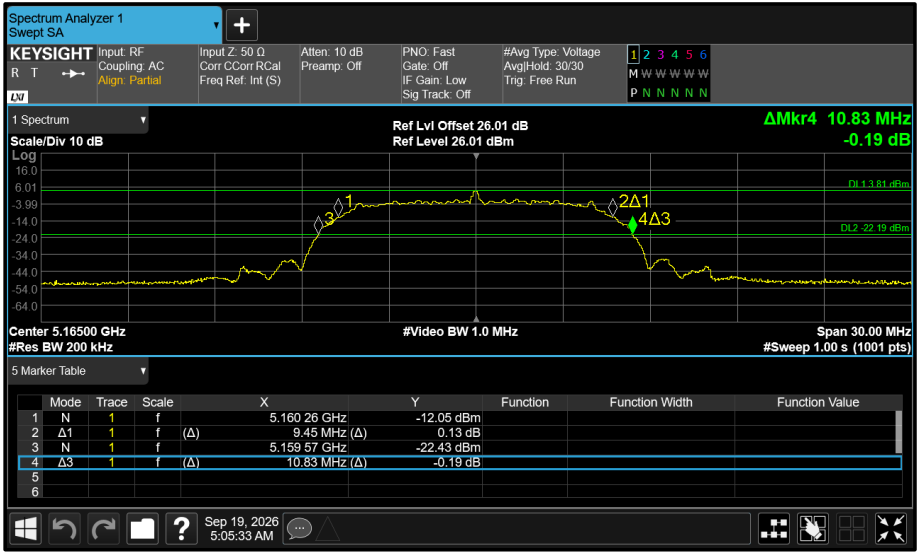


Figure 229 - Core 1 (B) 5165 MHz (CH15) 26 dB and 99% Bandwidth

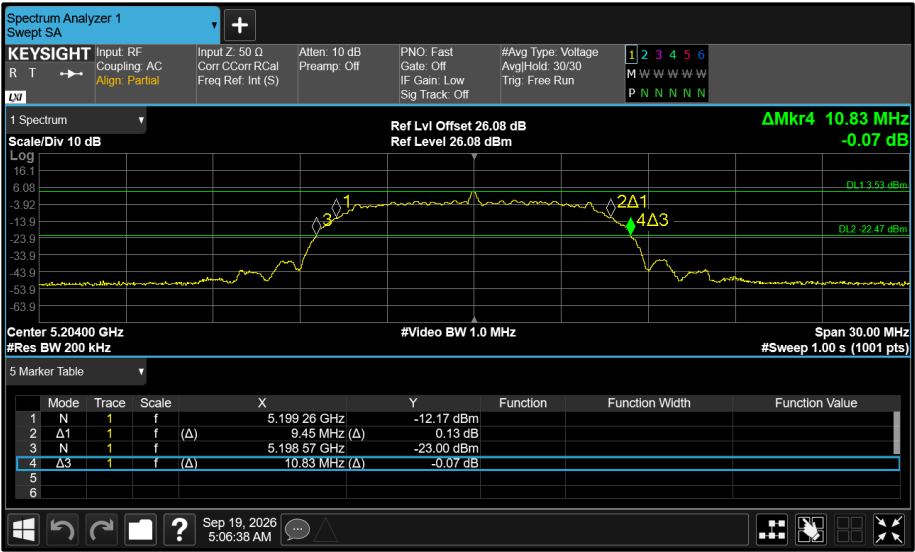


Figure 230 - Core 1 (B) 5204 MHz (CH54) 26 dB and 99% Bandwidth

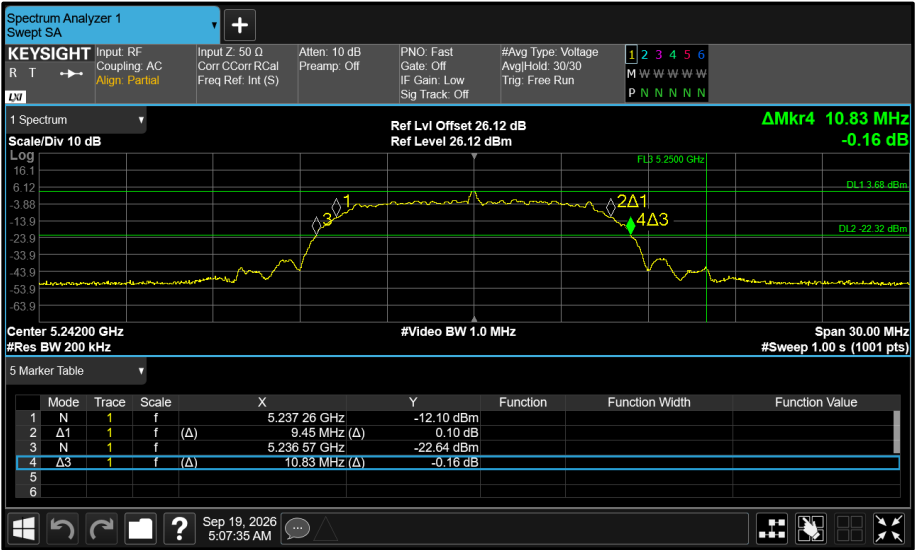
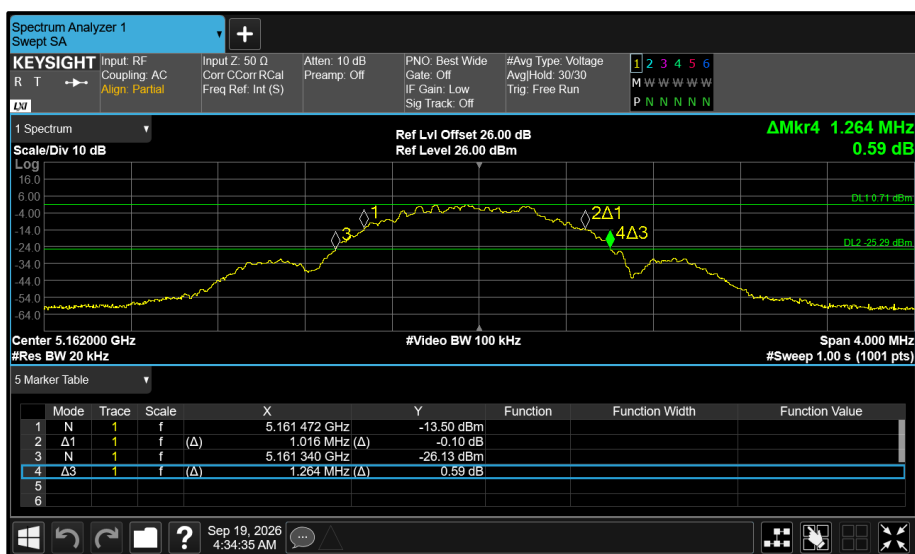


Figure 231 - Core 1 (B) 5242 MHz (CH92) 26 dB and 99% Bandwidth

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	-	1.264	-	-	-
5204	-	1.264	-	-	-
5245	-	1.264	-	-	-

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	-	1.016	-	-	-
5204	-	1.016	-	-	-
5245	-	1.016	-	-	-



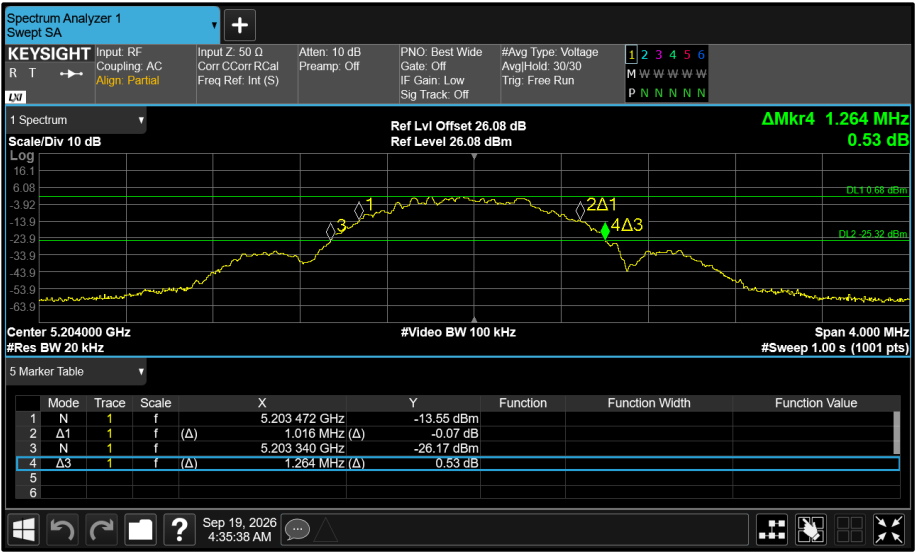


Figure 233 - Core 1 (B) 5204 MHz (CH54) 26 dB and 99% Bandwidth

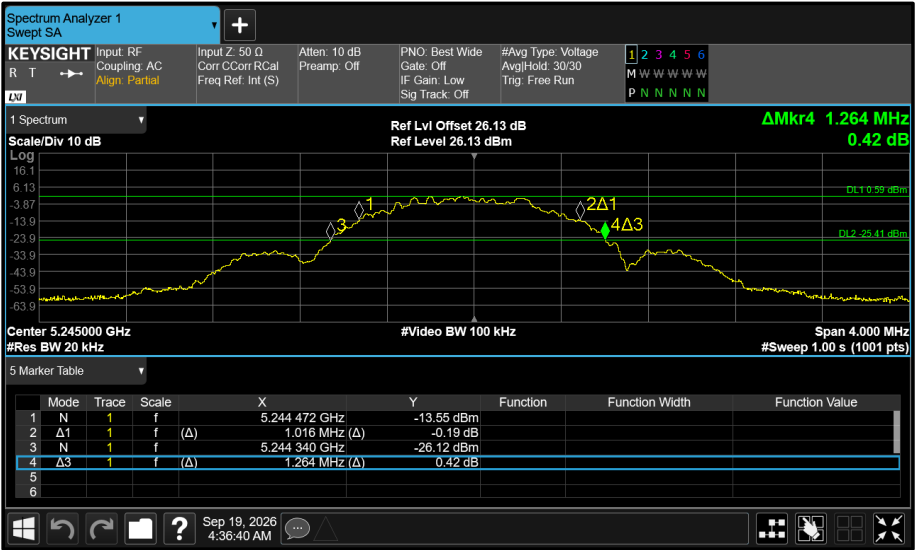


Figure 234 - Core 1 (B) 5245 MHz (CH95) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA BDR (DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	1.256	1.256	-	-	-
5204	1.256	1.256	-	-	-
5245	1.252	1.256	-	-	-

Table 219 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	0.928	0.932	-	-	-
5204	0.932	0.932	-	-	-
5245	0.928	0.928	-	-	-

Table 220 - 99% Bandwidth Results

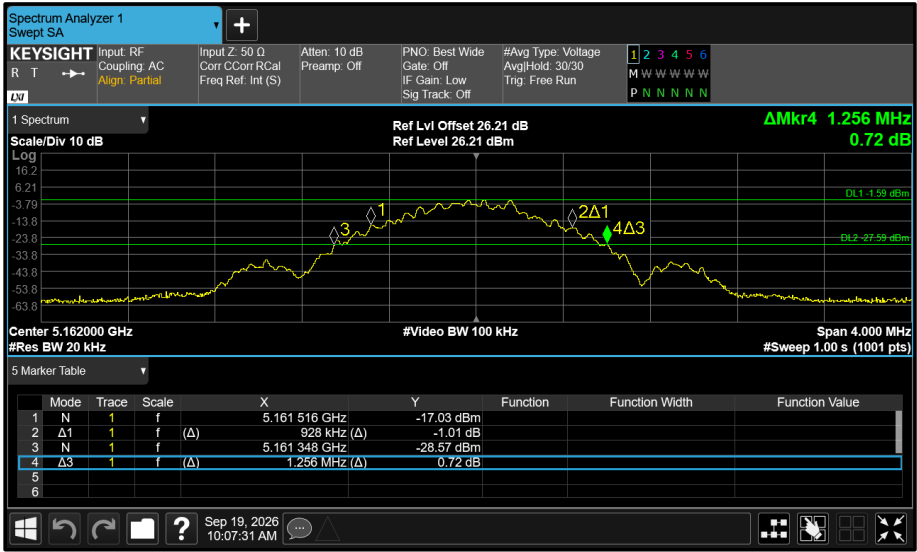


Figure 235 - Core 0 (A) 5162 MHz (CH12) 26 dB and 99% Bandwidth

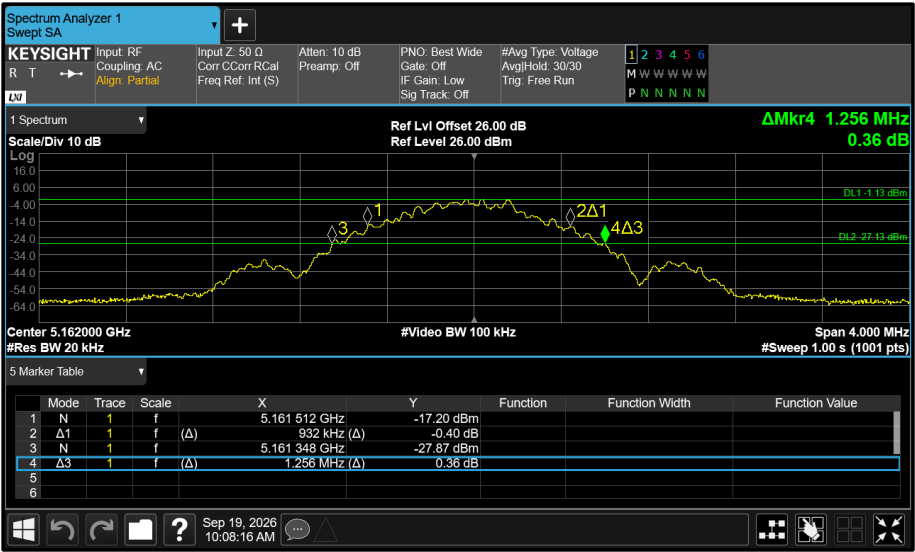


Figure 236 - Core 1 (B) 5162 MHz (CH12) 26 dB and 99% Bandwidth

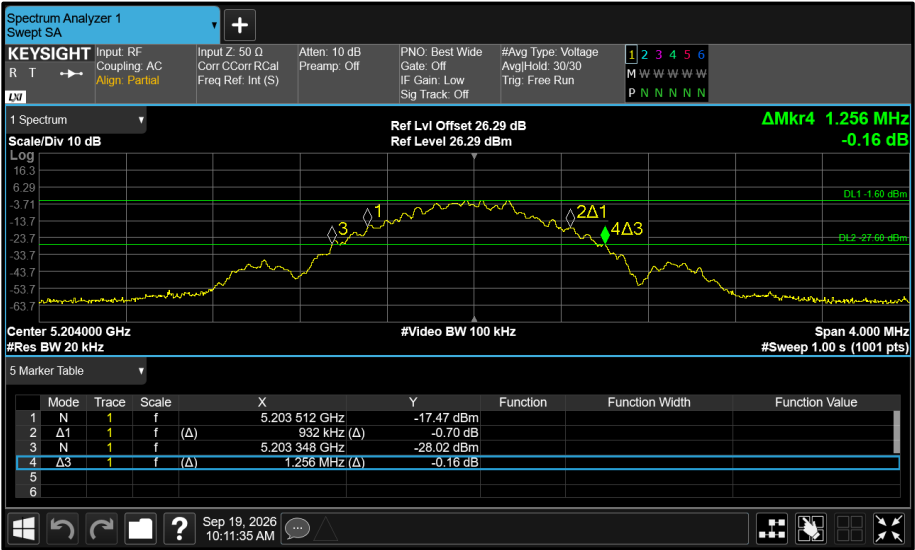


Figure 237 - Core 0 (A) 5204 MHz (CH54) 26 dB and 99% Bandwidth

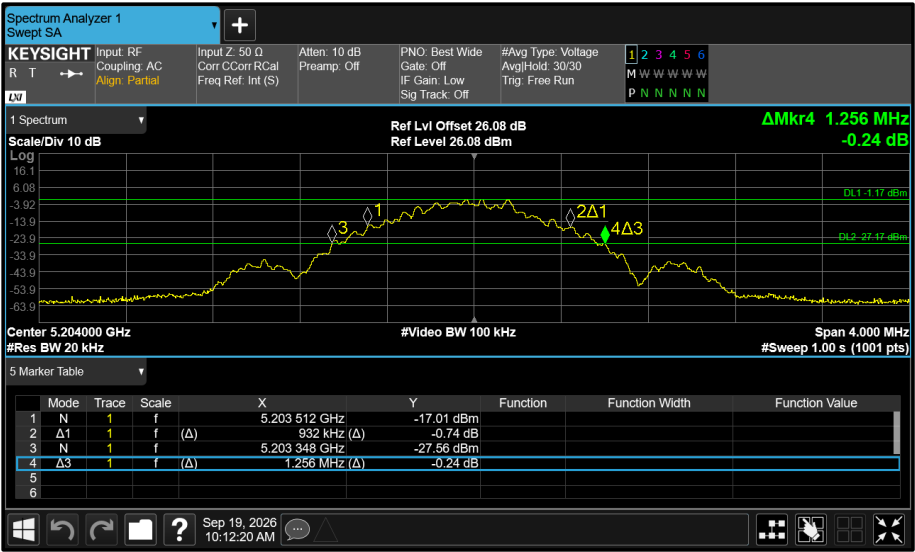


Figure 238 - Core 1 (B) 5204 MHz (CH54) 26 dB and 99% Bandwidth

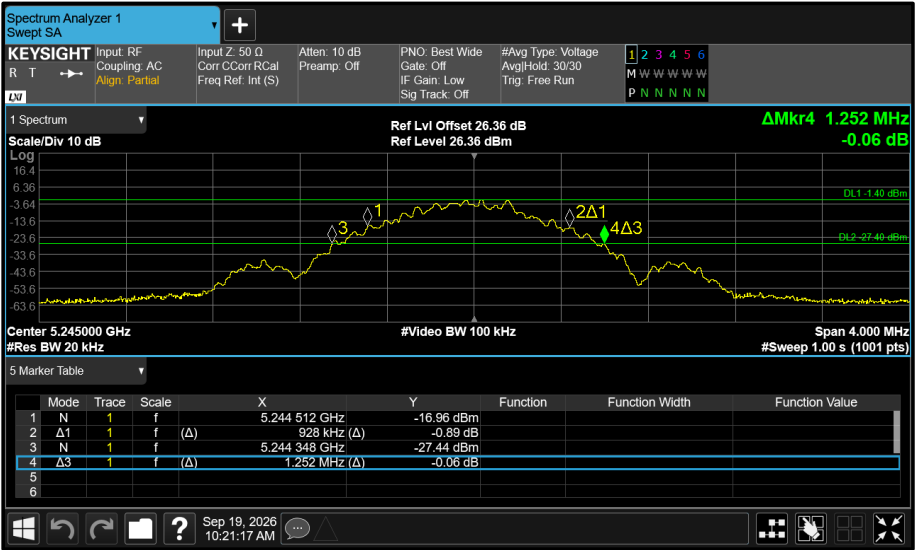


Figure 239 - Core 0 (A) 5245 MHz (CH95) 26 dB and 99% Bandwidth

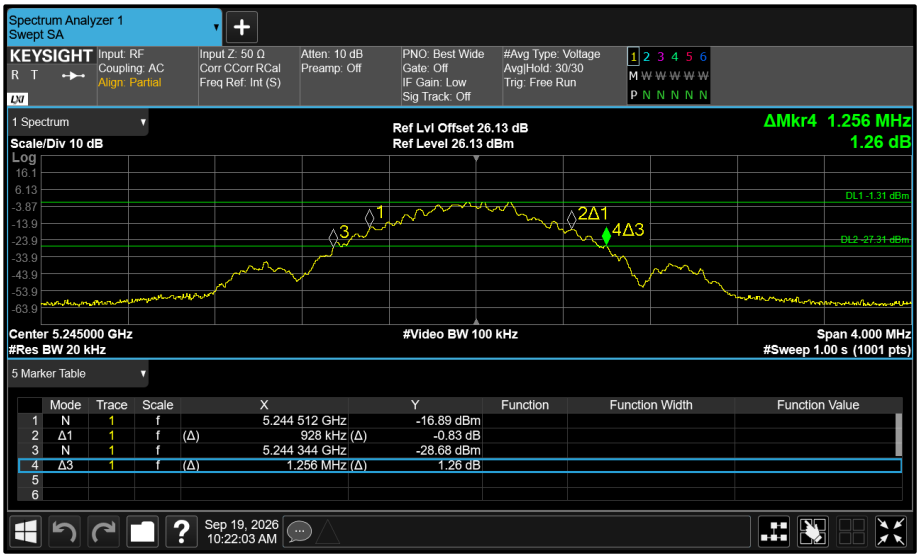


Figure 240 - Core 1 (B) 5245 MHz (CH95) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA HDT (HDT4)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	2.816	2.824	-	-	-
5204	2.824	2.816	-	-	-
5245	2.824	2.824	-	-	-

Table 221 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	2.360	2.360	-	-	-
5204	2.360	2.360	-	-	-
5245	2.360	2.360	-	-	-

Table 222 - 99% Bandwidth Results

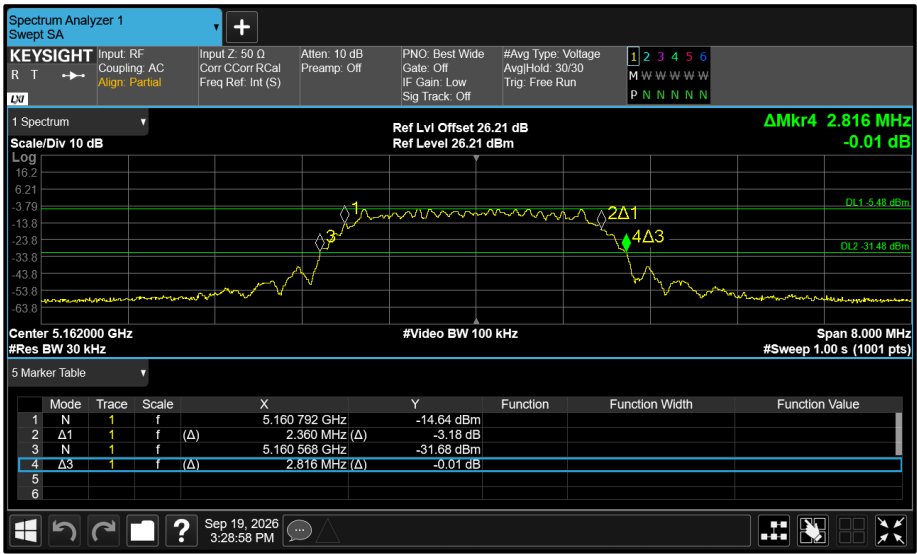


Figure 241 - Core 0 (A) 5162 MHz (CH12) 26 dB and 99% Bandwidth

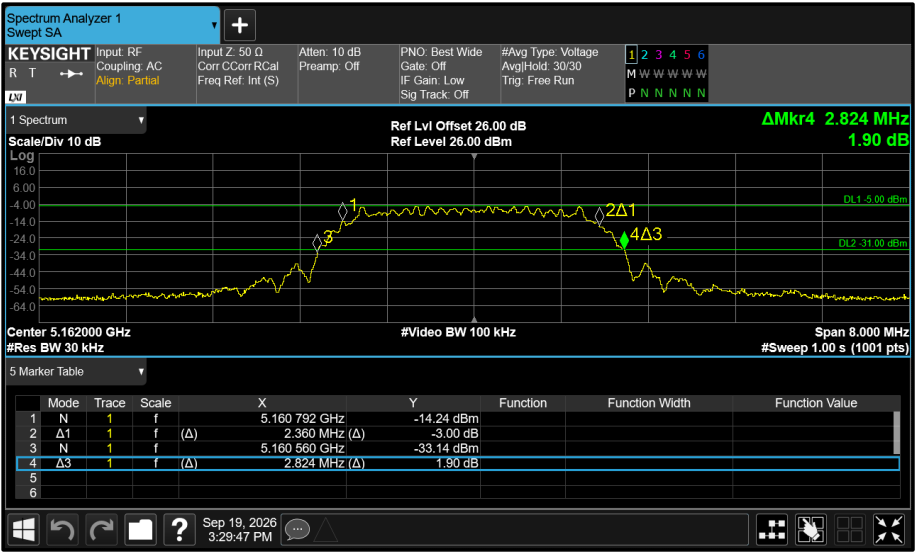


Figure 242 - Core 1 (B) 5162 MHz (CH12) 26 dB and 99% Bandwidth

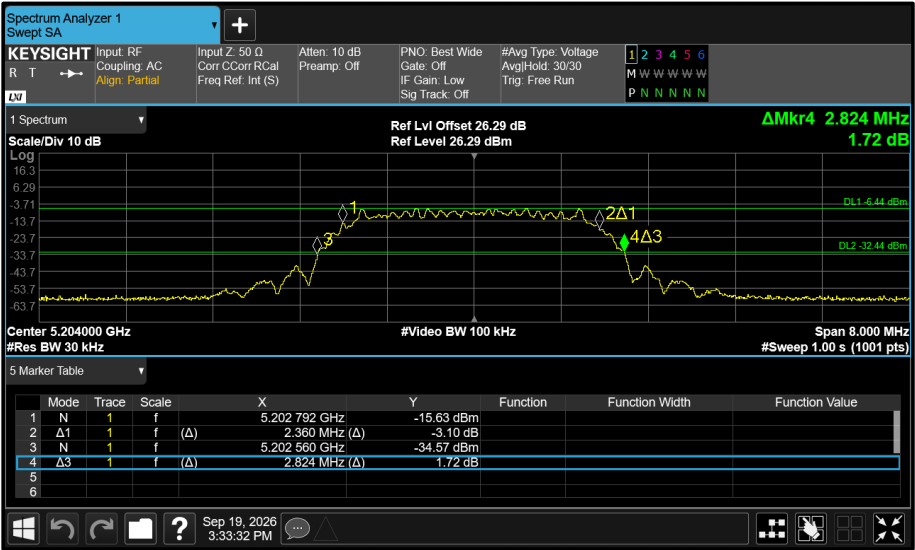


Figure 243 - Core 0 (A) 5204 MHz (CH54) 26 dB and 99% Bandwidth

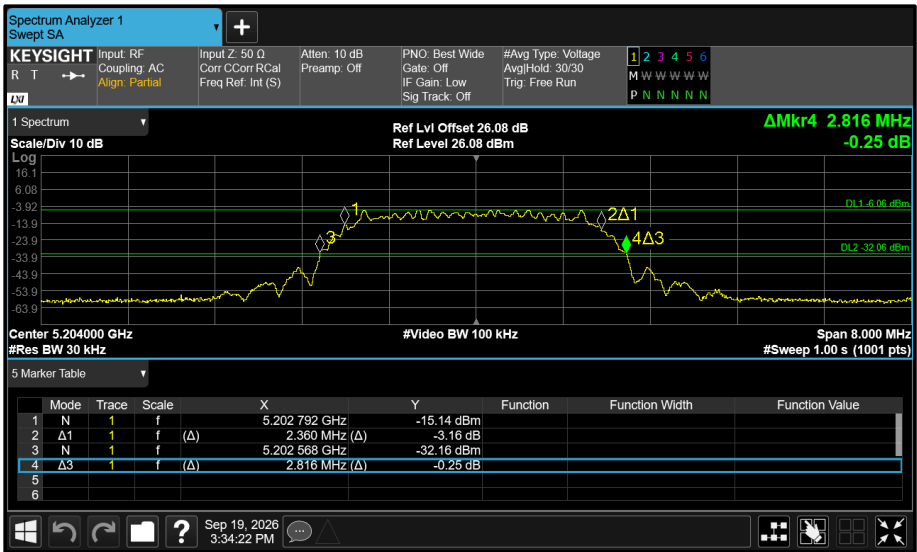


Figure 244 - Core 1 (B) 5204 MHz (CH54) 26 dB and 99% Bandwidth

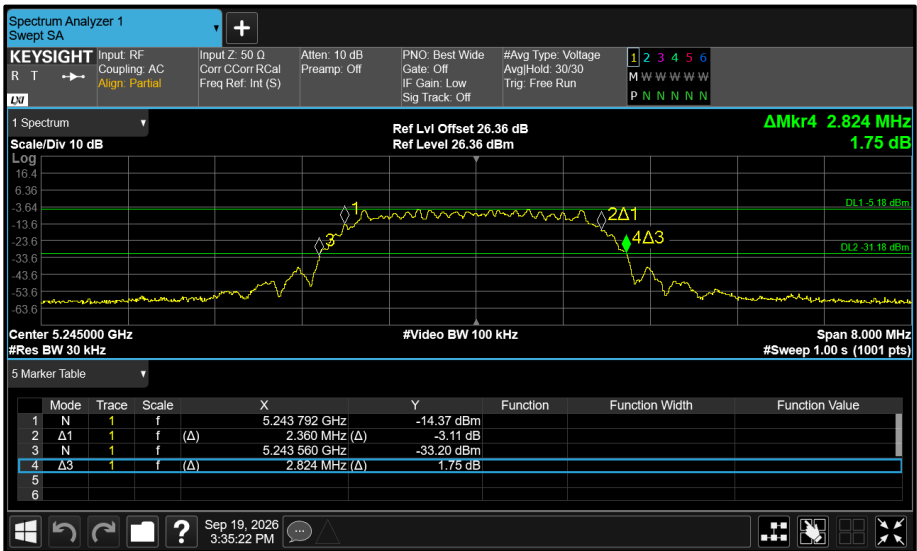


Figure 245 - Core 0 (A) 5245 MHz (CH95) 26 dB and 99% Bandwidth

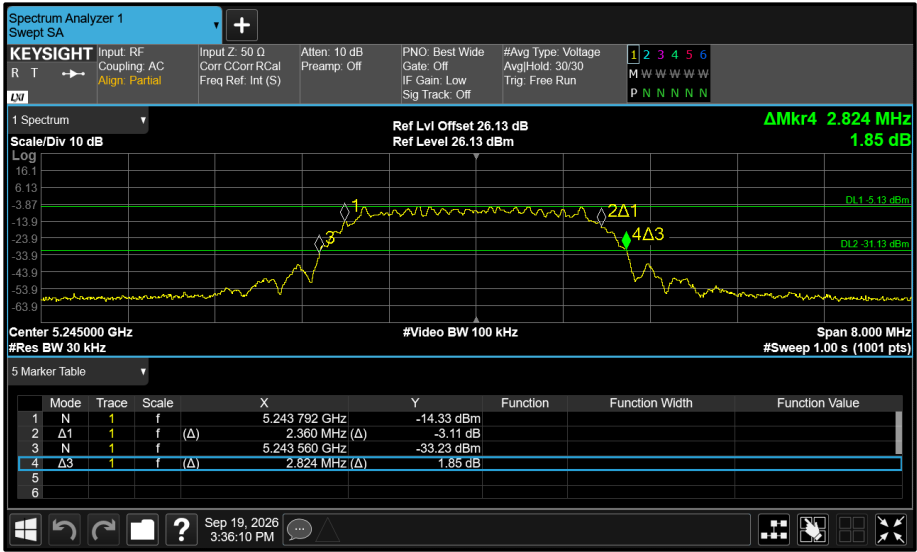


Figure 246 - Core 1 (B) 5245 MHz (CH95) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA HDR (8-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	5.415	5.415	-	-	-
5204	5.415	5.415	-	-	-
5245	5.415	5.430	-	-	-

Table 223 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	4.665	4.665	-	-	-
5204	4.665	4.665	-	-	-
5245	4.665	4.665	-	-	-

Table 224 - 99% Bandwidth Results

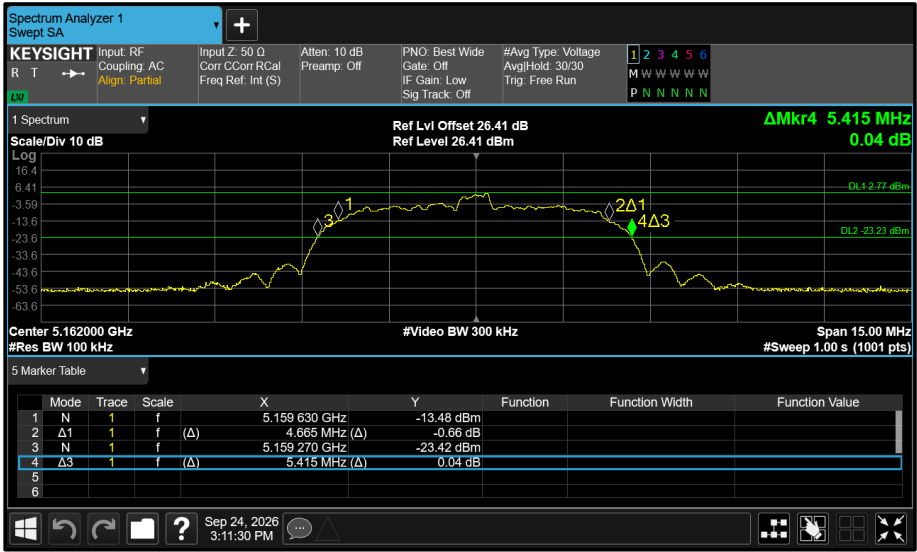


Figure 247 - Core 0 (A) 5162 MHz (CH12) 26 dB and 99% Bandwidth

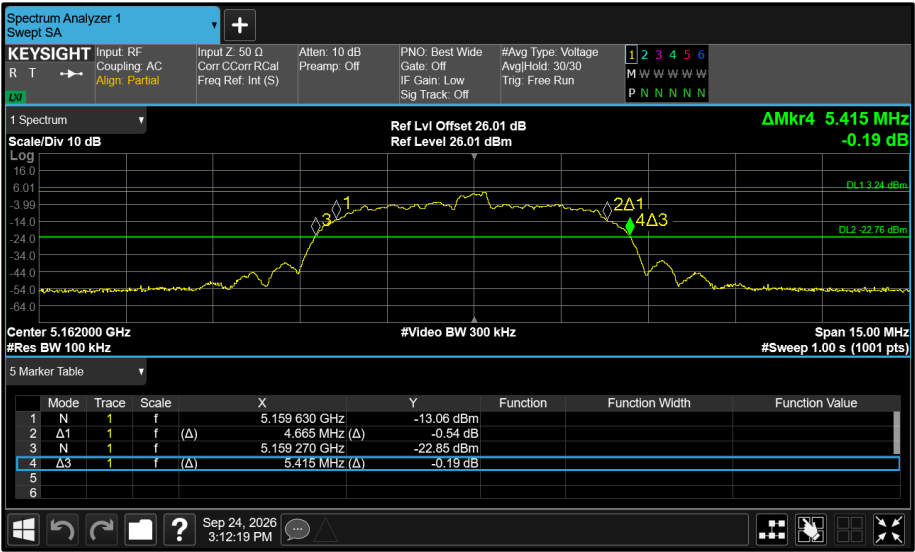


Figure 248 - Core 1 (B) 5162 MHz (CH12) 26 dB and 99% Bandwidth

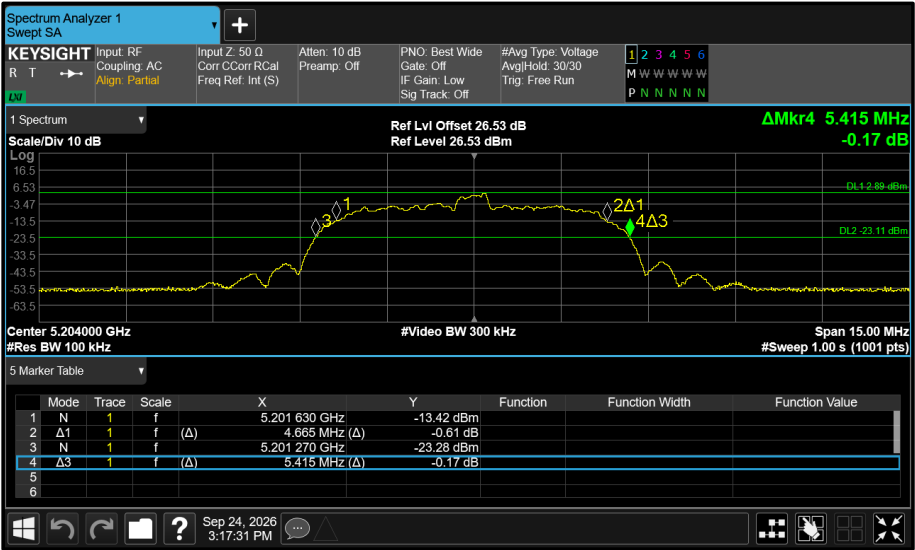


Figure 249 - Core 0 (A) 5204 MHz (CH54) 26 dB and 99% Bandwidth

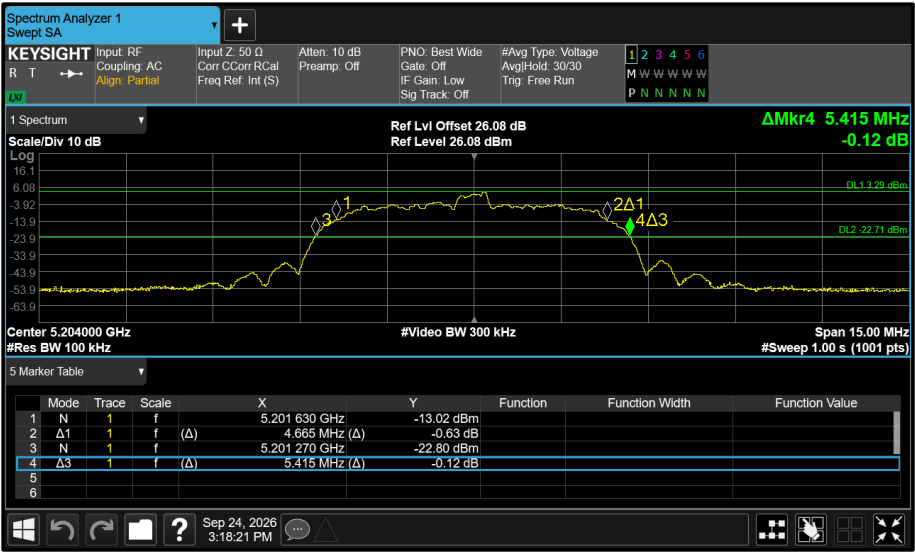


Figure 250 - Core 1 (B) 5204 MHz (CH54) 26 dB and 99% Bandwidth

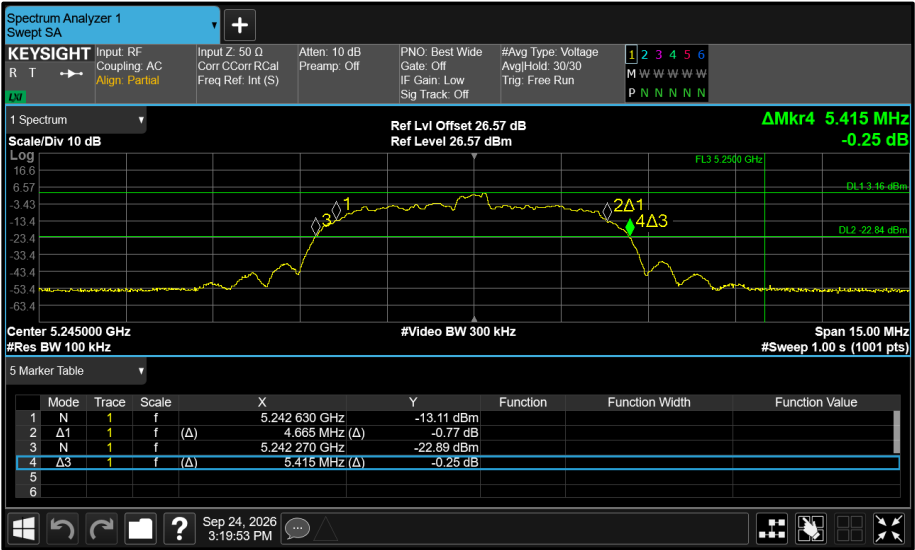


Figure 251 - Core 0 (A) 5245 MHz (CH95) 26 dB and 99% Bandwidth

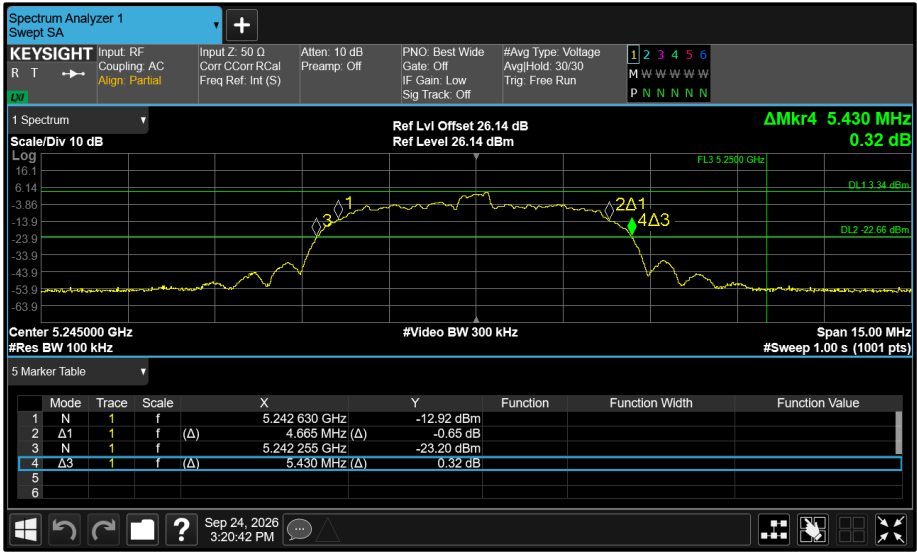


Figure 252 - Core 1 (B) 5245 MHz (CH95) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA HDRP (HDRPM4)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5163	5.440	5.440	-	-	-
5204	5.440	5.440	-	-	-
5245	5.440	5.440	-	-	-

Table 225 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5163	4.760	4.780	-	-	-
5204	4.780	4.780	-	-	-
5245	4.780	4.760	-	-	-

Table 226 - 99% Bandwidth Results

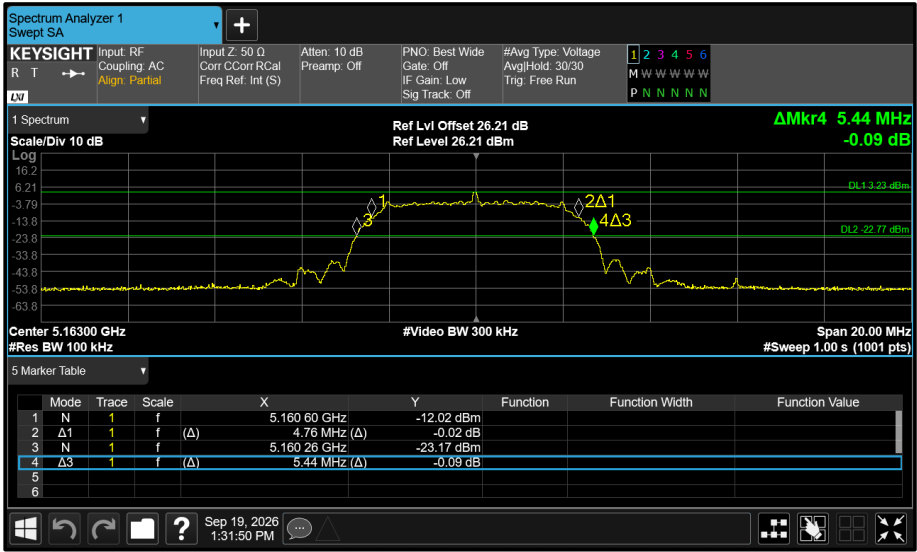


Figure 253 - Core 0 (A) 5163 MHz (CH13) 26 dB and 99% Bandwidth

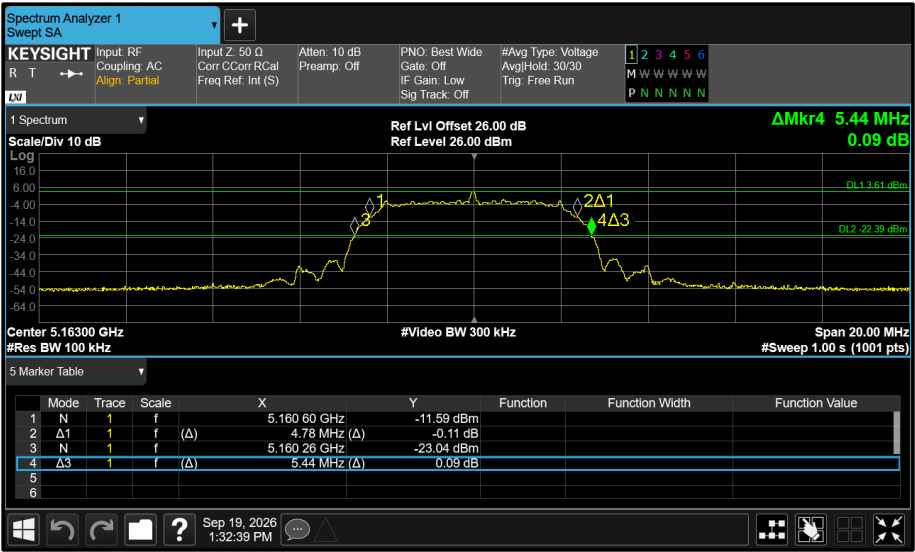


Figure 254 - Core 1 (B) 5163 MHz (CH13) 26 dB and 99% Bandwidth

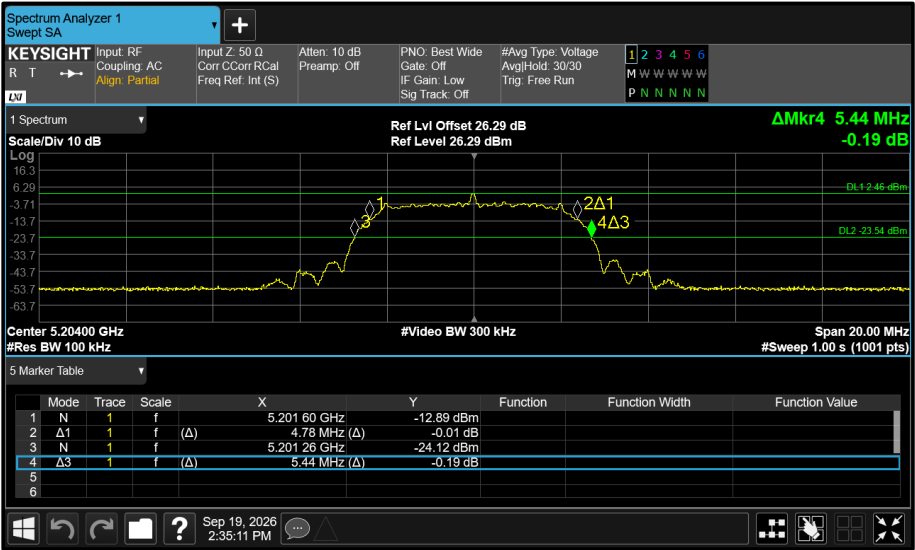


Figure 255 - Core 0 (A) 5204 MHz (CH54) 26 dB and 99% Bandwidth

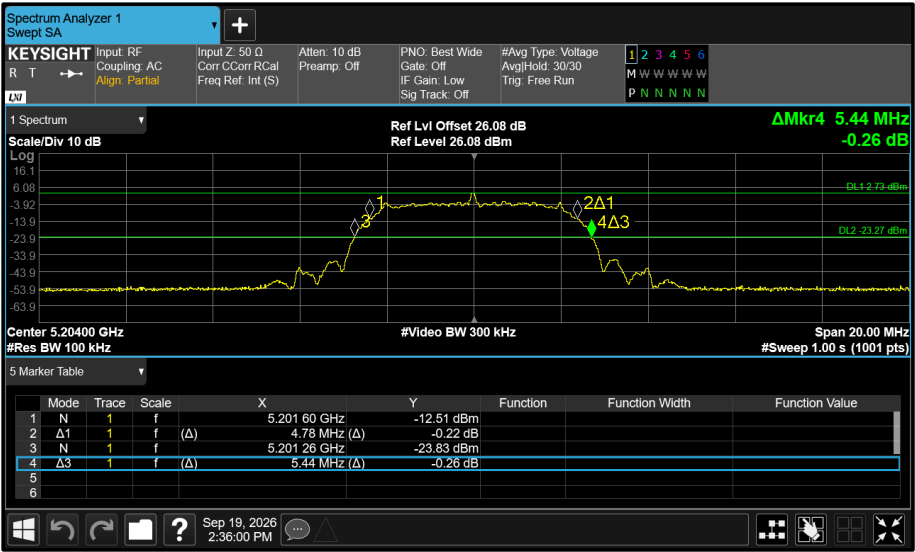


Figure 256 - Core 1 (B) 5204 MHz (CH54) 26 dB and 99% Bandwidth

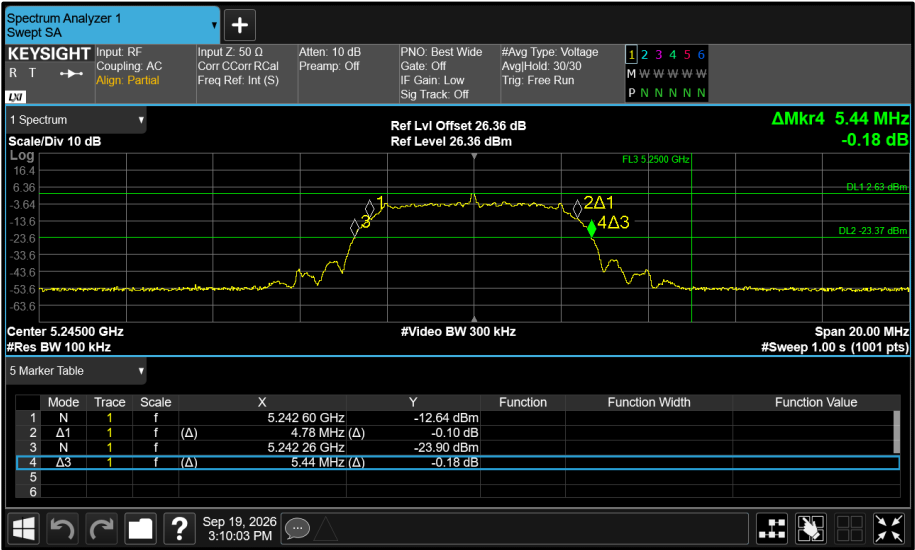


Figure 257 - Core 0 (A) 5245 MHz (CH95) 26 dB and 99% Bandwidth

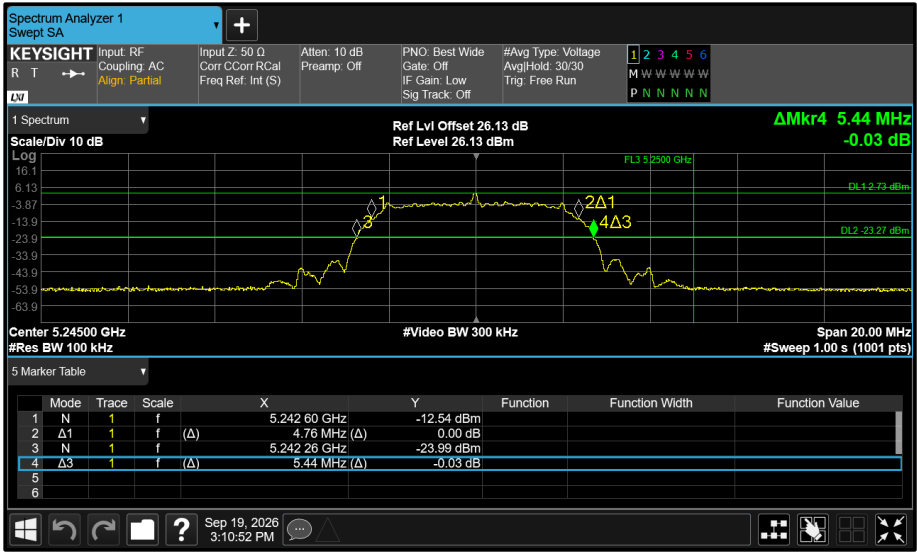


Figure 258 - Core 1 (B) 5245 MHz (CH95) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA HDRP (HDRPM12)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5163	5.440	5.440	-	-	-
5204	5.440	5.460	-	-	-
5245	5.440	5.440	-	-	-

Table 227 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5163	4.720	4.720	-	-	-
5204	4.720	4.720	-	-	-
5245	4.700	4.720	-	-	-

Table 228 - 99% Bandwidth Results

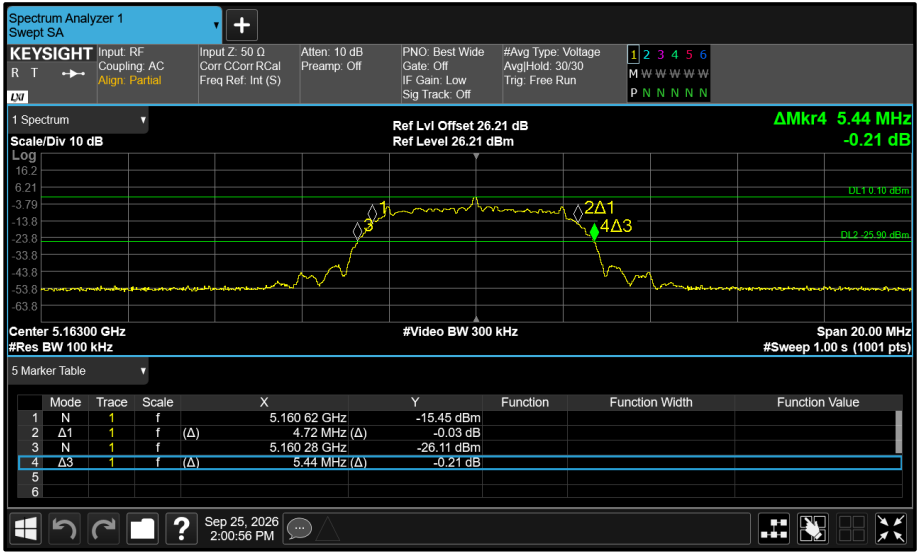


Figure 259 - Core 0 (A) 5163 MHz (CH13) 26 dB and 99% Bandwidth

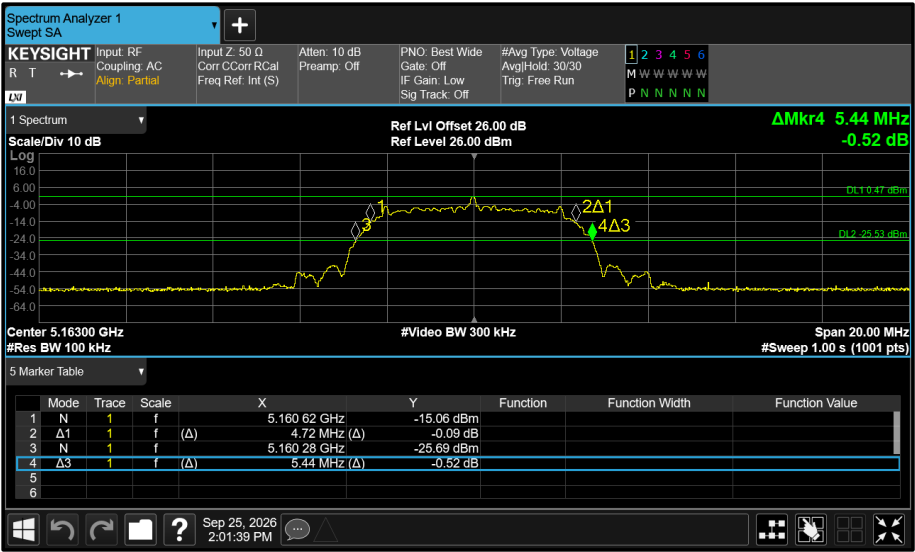


Figure 260 - Core 1 (B) 5163 MHz (CH13) 26 dB and 99% Bandwidth

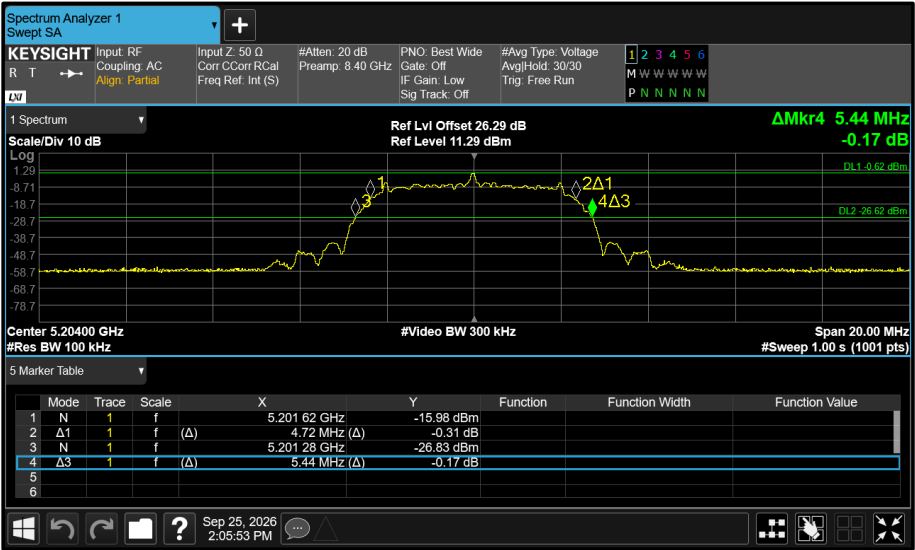


Figure 261 - Core 0 (A) 5204 MHz (CH54) 26 dB and 99% Bandwidth

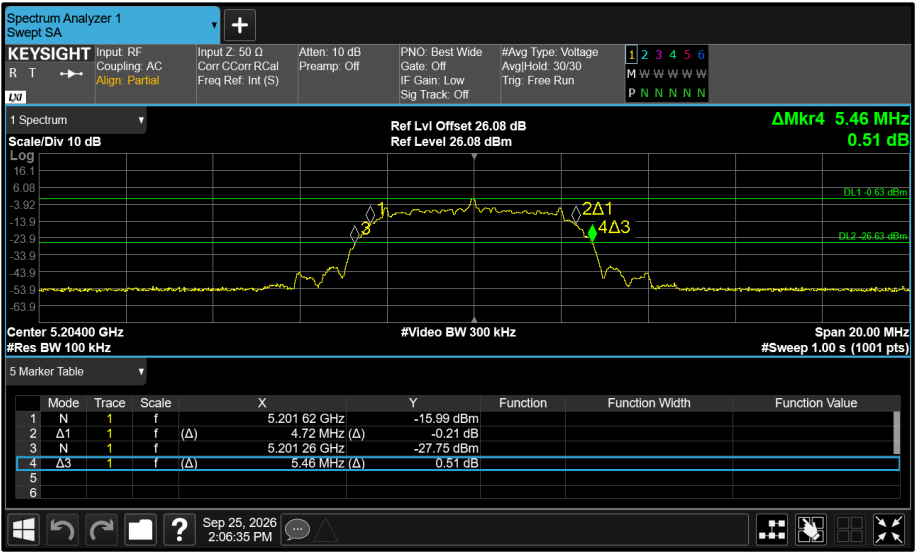


Figure 262 - Core 1 (B) 5204 MHz (CH54) 26 dB and 99% Bandwidth

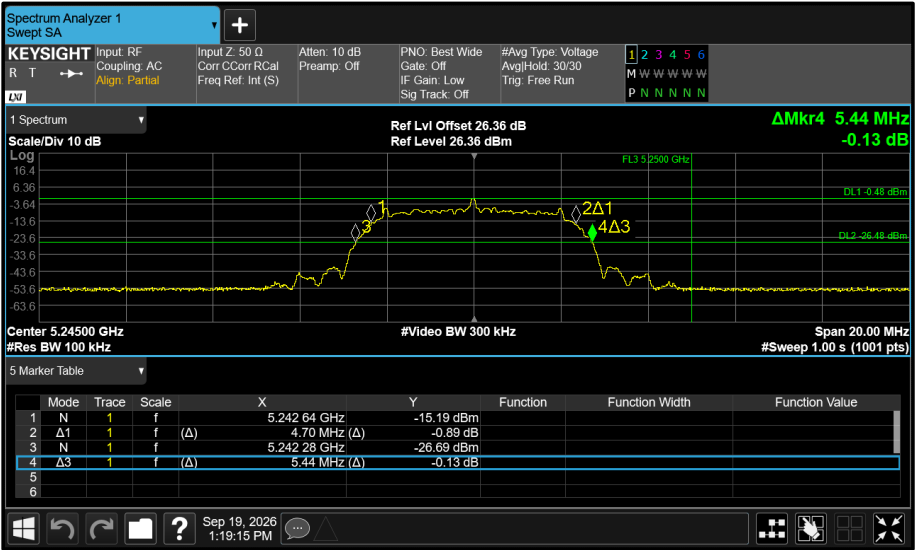


Figure 263 - Core 0 (A) 5245 MHz (CH95) 26 dB and 99% Bandwidth

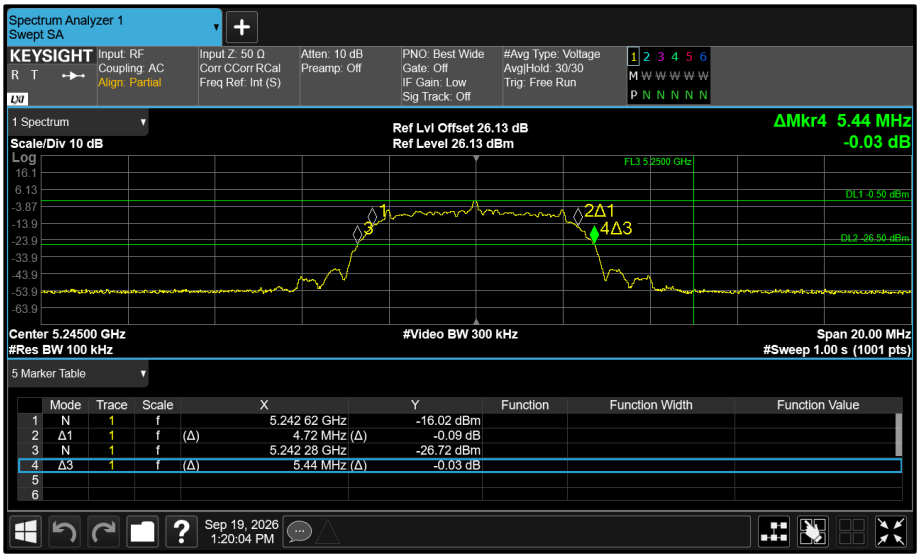


Figure 264 - Core 1 (B) 5245 MHz (CH95) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA HDRP (HDRPL8)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5165	10.830	10.830	-	-	-
5204	10.830	10.830	-	-	-
5242	10.830	10.830	-	-	-

Table 229 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5165	9.450	9.450	-	-	-
5204	9.450	9.450	-	-	-
5242	9.450	9.450	-	-	-

Table 230 - 99% Bandwidth Results

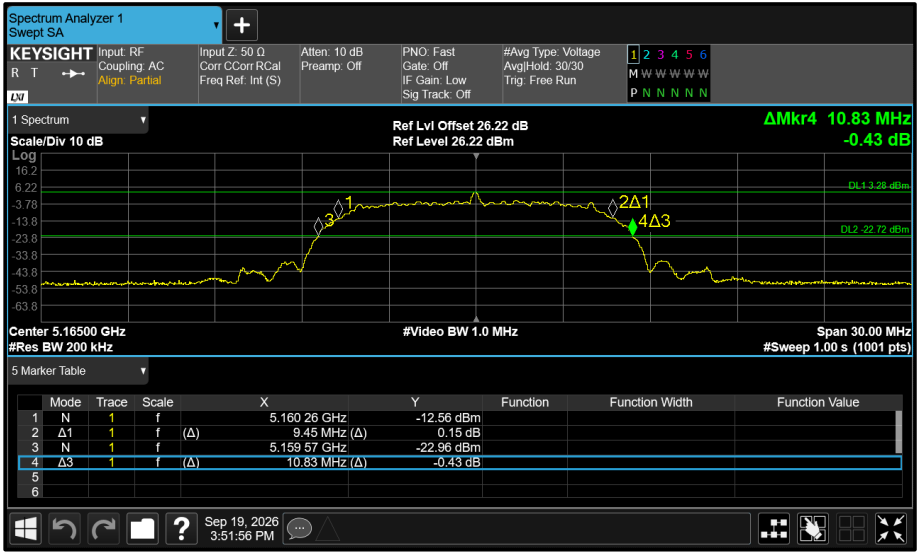




Figure 265 - Core 0 (A) 5165 MHz (CH15) 26 dB and 99% Bandwidth



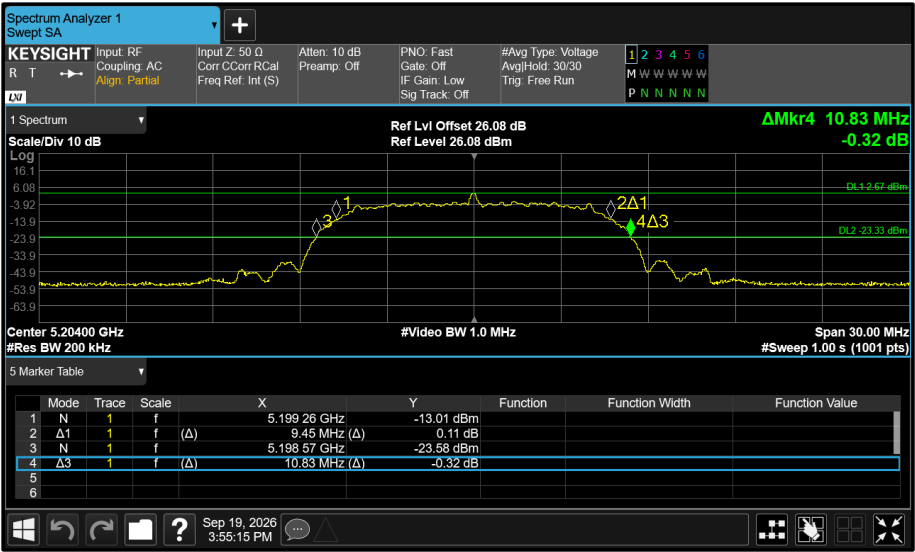


Figure 268 - Core 1 (B) 5204 MHz (CH54) 26 dB and 99% Bandwidth

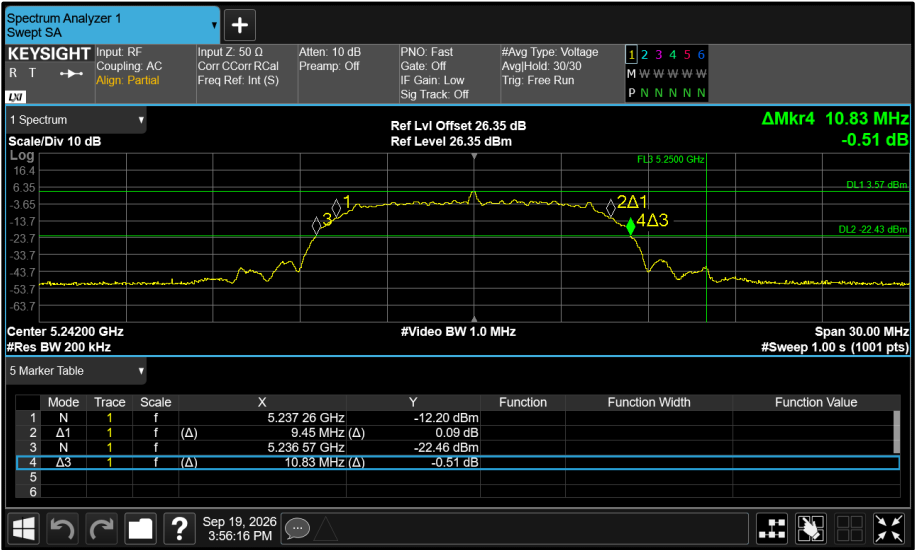


Figure 269 - Core 0 (A) 5242 MHz (CH92) 26 dB and 99% Bandwidth

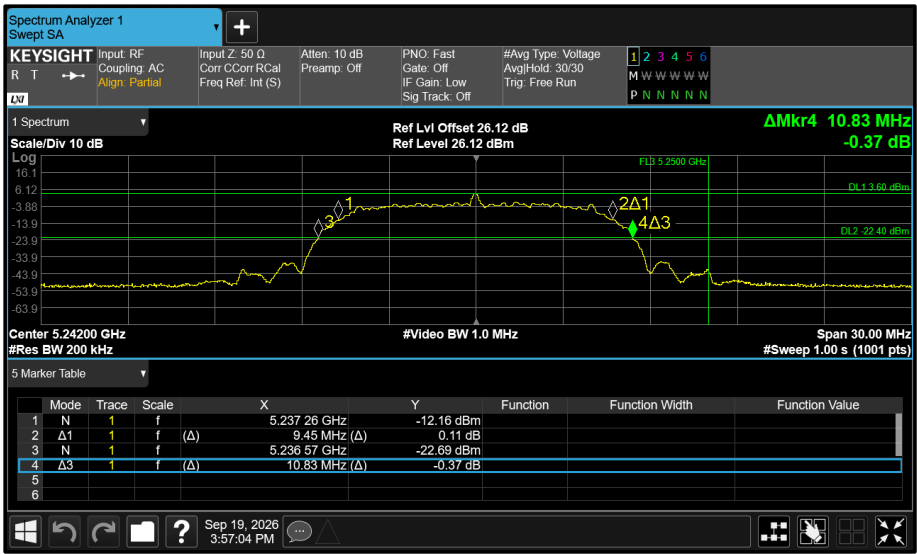


Figure 270 - Core 1 (B) 5242 MHz (CH92) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA LE (LE 2M)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	2.520	2.520	-	-	-
5204	2.520	2.520	-	-	-
5245	2.520	2.520	-	-	-

Table 231 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	2.032	2.032	-	-	-
5204	2.032	2.032	-	-	-
5245	2.032	2.032	-	-	-

Table 232 - 99% Bandwidth Results

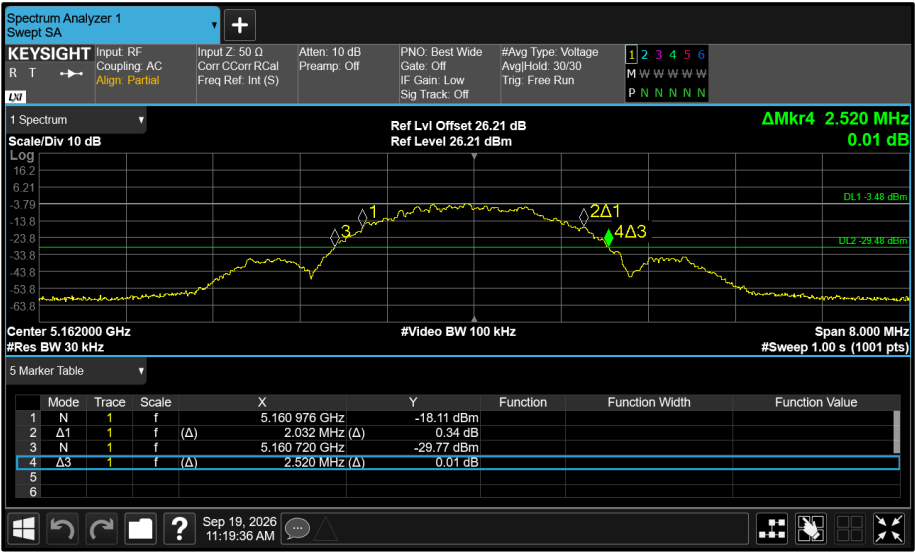


Figure 271 - Core 0 (A) 5162 MHz (CH12) 26 dB and 99% Bandwidth

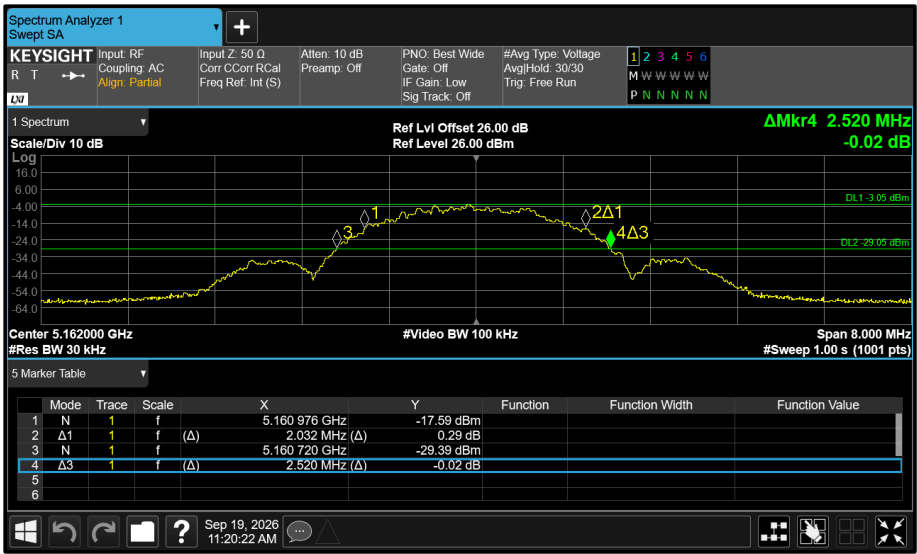


Figure 272 - Core 1 (B) 5162 MHz (CH12) 26 dB and 99% Bandwidth

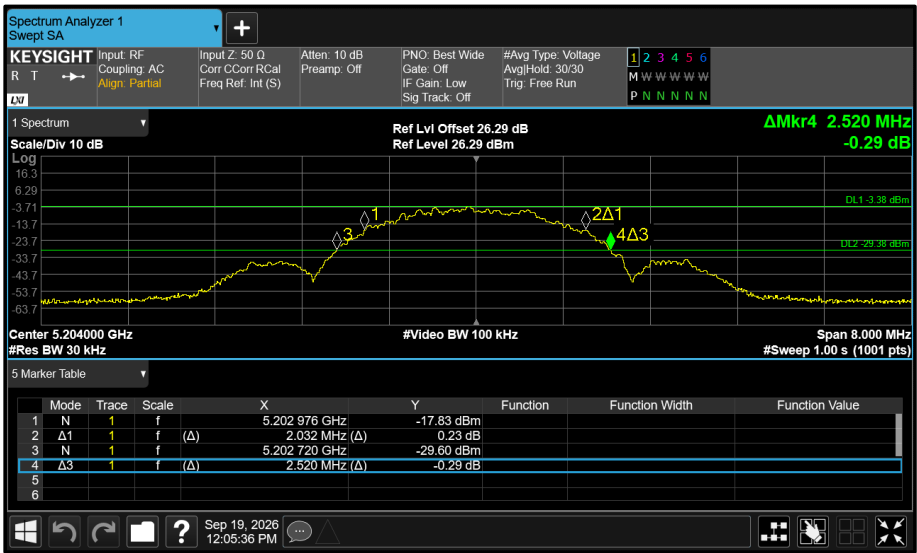


Figure 273 - Core 0 (A) 5204 MHz (CH54) 26 dB and 99% Bandwidth

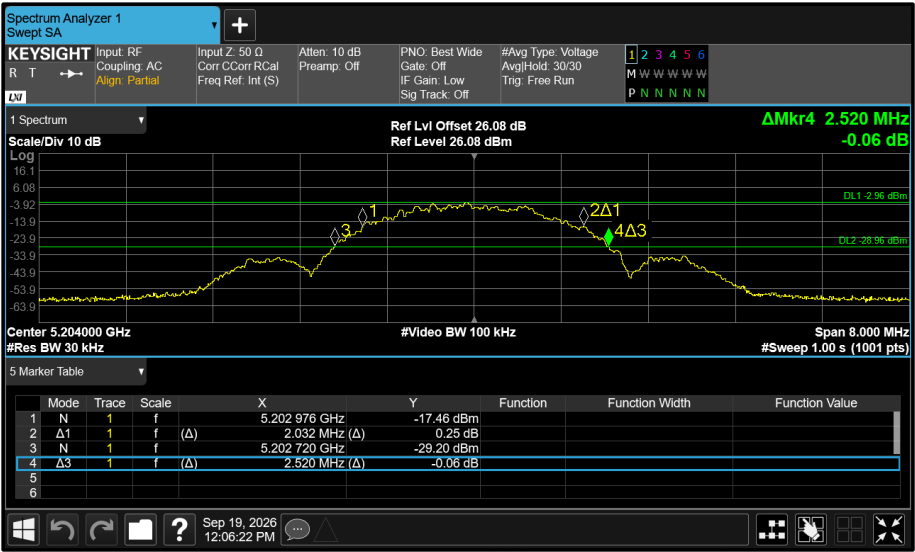


Figure 274 - Core 1 (B) 5204 MHz (CH54) 26 dB and 99% Bandwidth

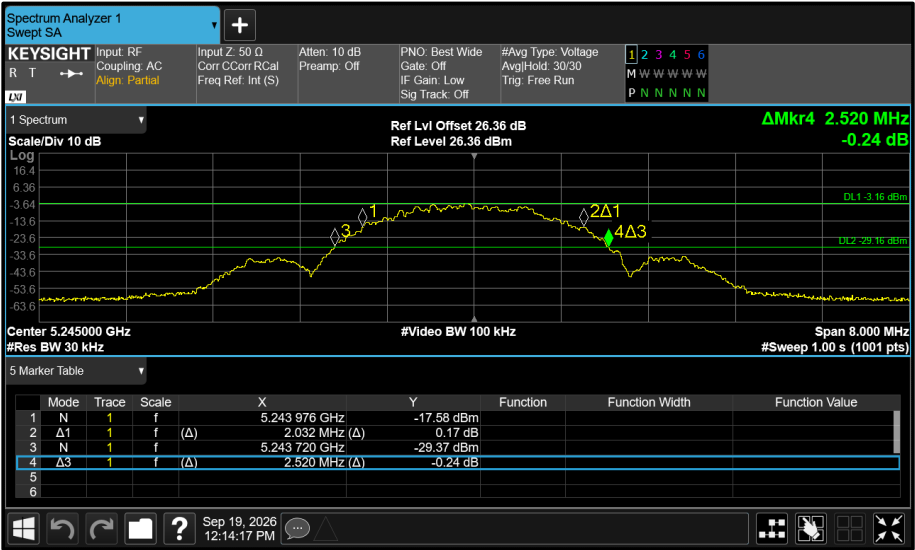


Figure 275 - Core 0 (A) 5245 MHz (CH95) 26 dB and 99% Bandwidth

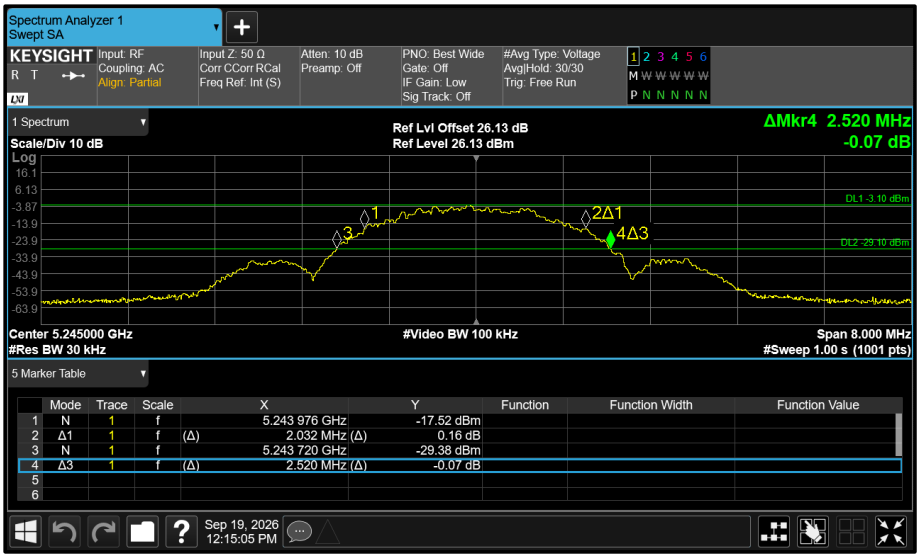


Figure 276 - Core 1 (B) 5245 MHz (CH95) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA BDR (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	1.256	-	-	-	-
5204	1.216	-	-	-	-
5245	1.215	-	-	-	-

Table 233 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	0.928	-	-	-	-
5204	0.928	-	-	-	-
5245	0.930	-	-	-	-

Table 234 - 99% Bandwidth Results

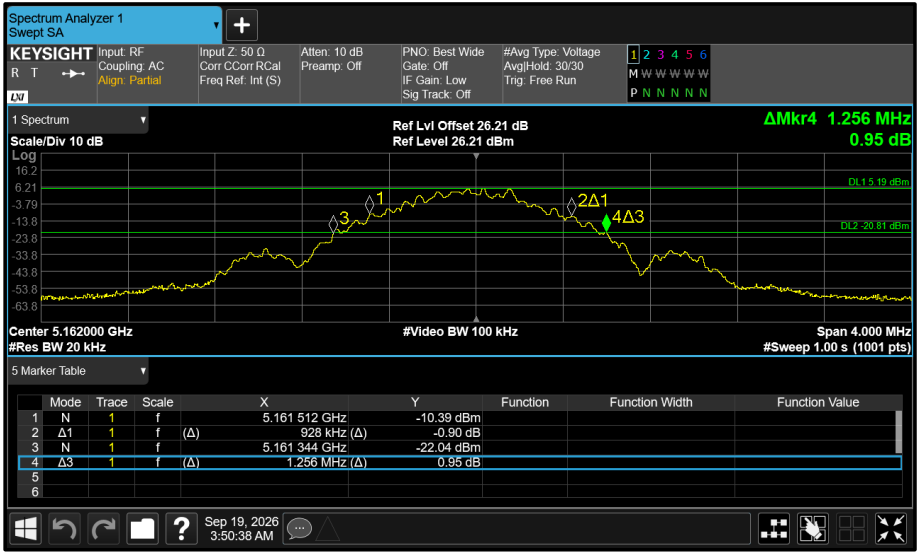


Figure 277 - Core 0 (A) 5162 MHz (CH12) 26 dB and 99% Bandwidth

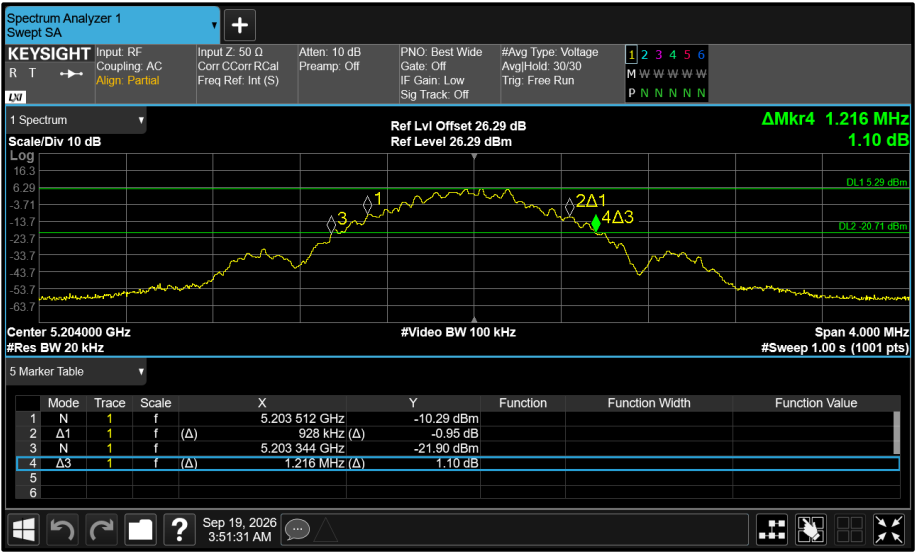


Figure 278 - Core 0 (A) 5204 MHz (CH54) 26 dB and 99% Bandwidth

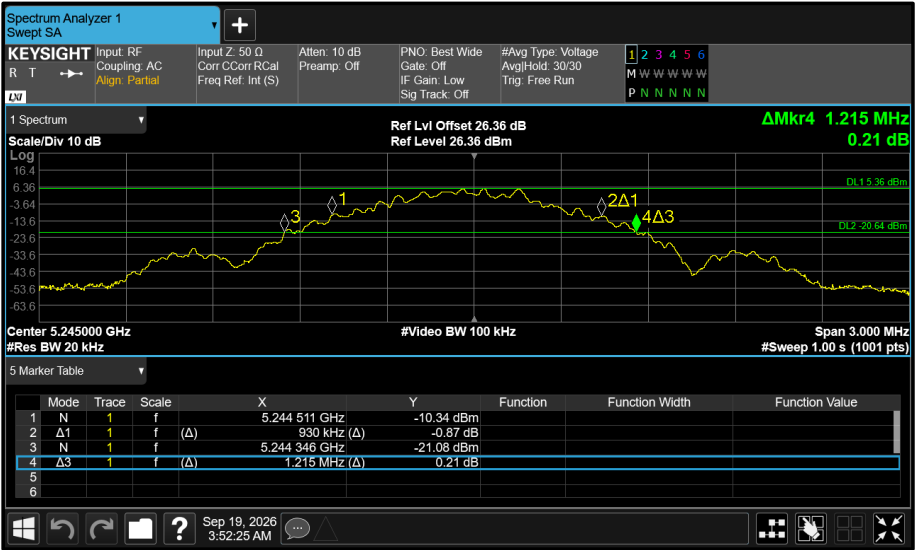


Figure 279 - Core 0 (A) 5245 MHz (CH95) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA HDT (HDT4)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	2.816	-	-	-	-
5204	2.816	-	-	-	-
5245	2.816	-	-	-	-

Table 235 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	2.360	-	-	-	-
5204	2.352	-	-	-	-
5245	2.352	-	-	-	-

Table 236 - 99% Bandwidth Results



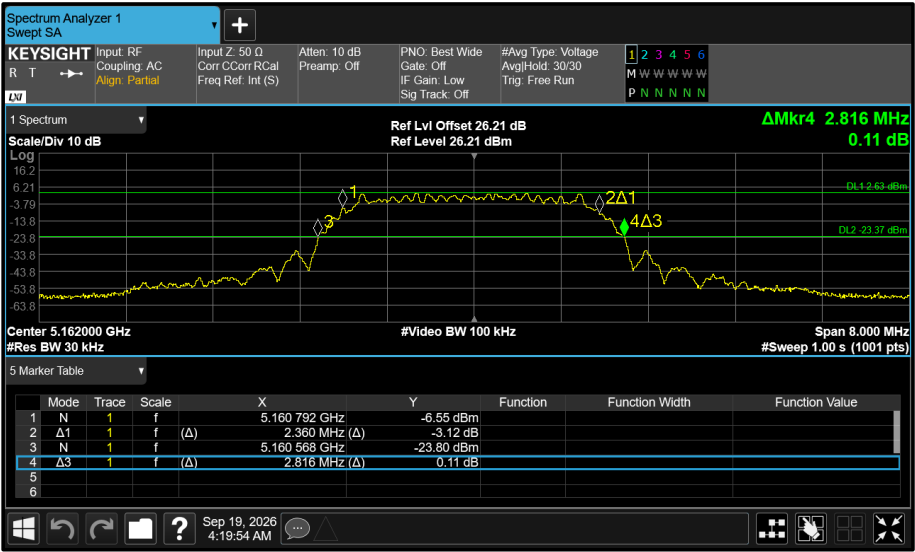


Figure 280 - Core 0 (A) 5162 MHz (CH12) 26 dB and 99% Bandwidth

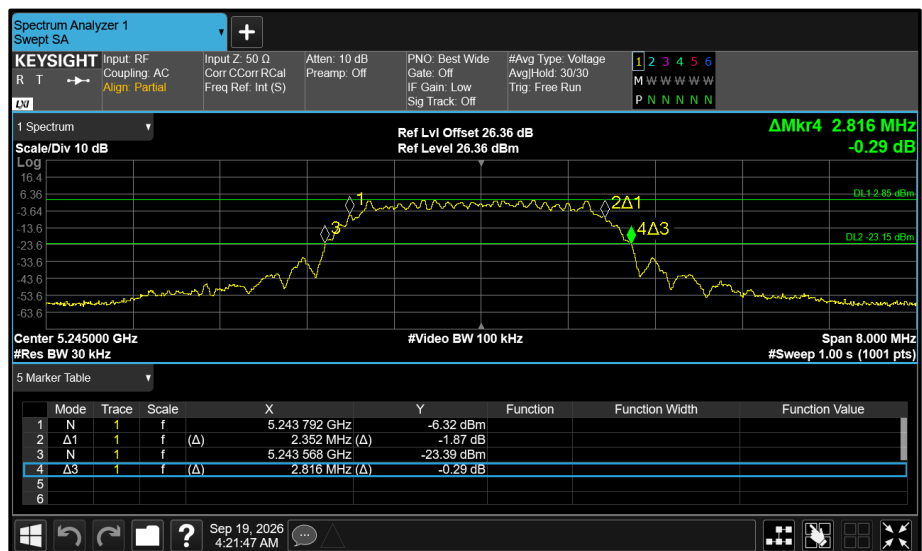

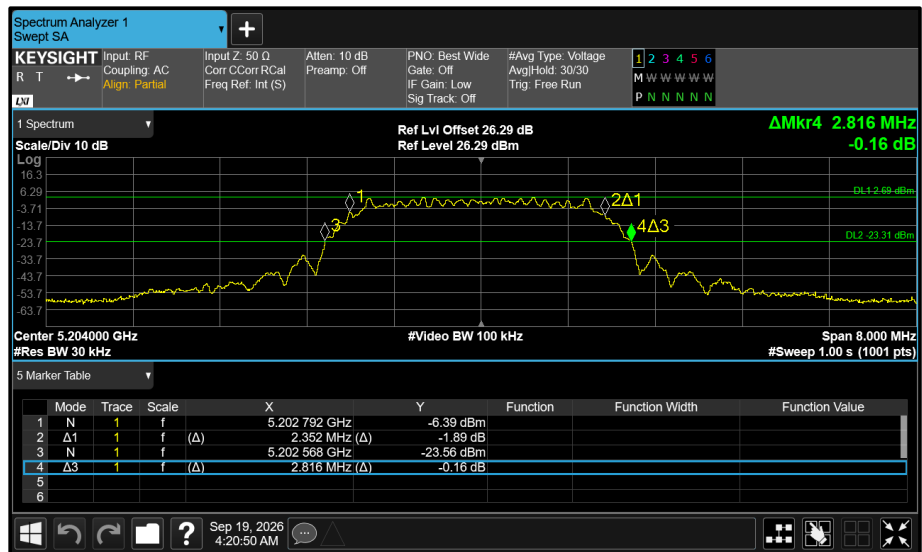

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA HDR (8-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	5.385	-	-	-	-
5204	5.400	-	-	-	-
5245	5.385	-	-	-	-

Table 237 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	4.635	-	-	-	-
5204	4.635	-	-	-	-
5245	4.635	-	-	-	-

Table 238 - 99% Bandwidth Results

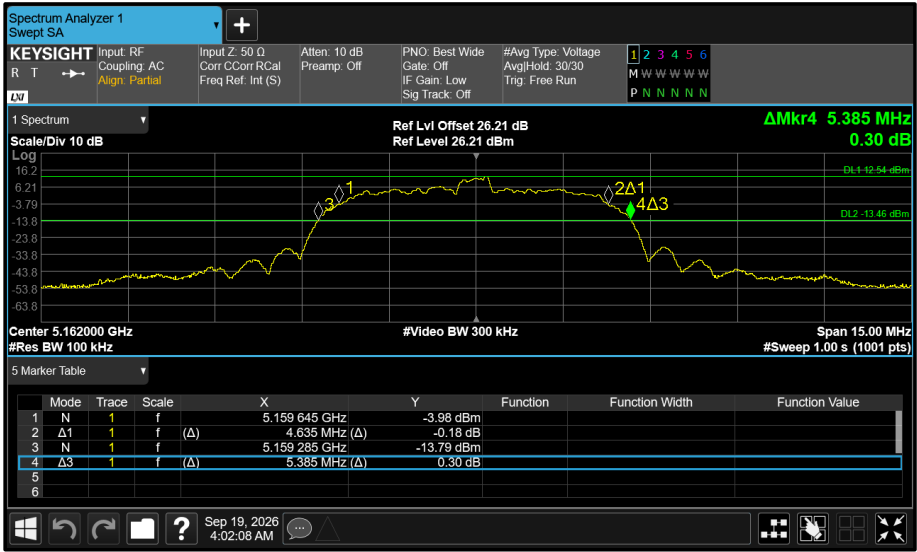


Figure 283 - Core 0 (A) 5162 MHz (CH12) 26 dB and 99% Bandwidth

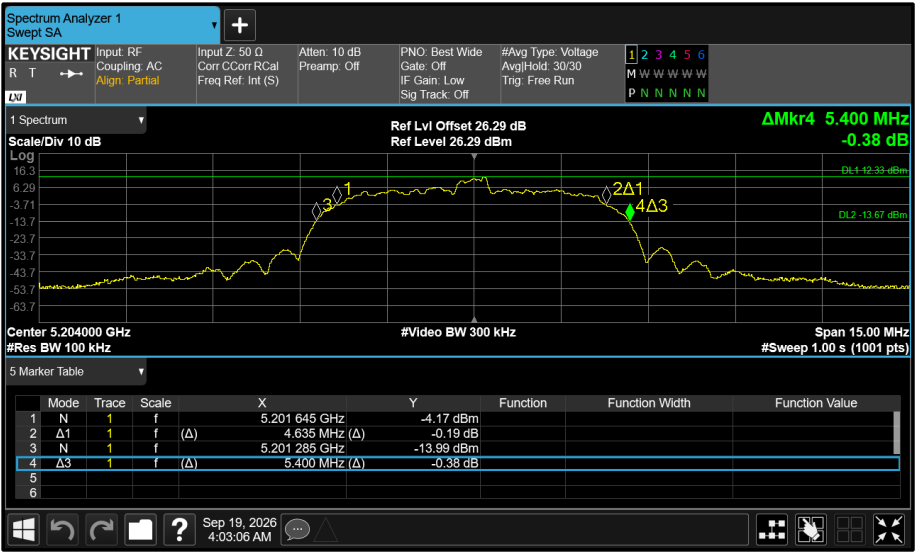


Figure 284 - Core 0 (A) 5204 MHz (CH54) 26 dB and 99% Bandwidth

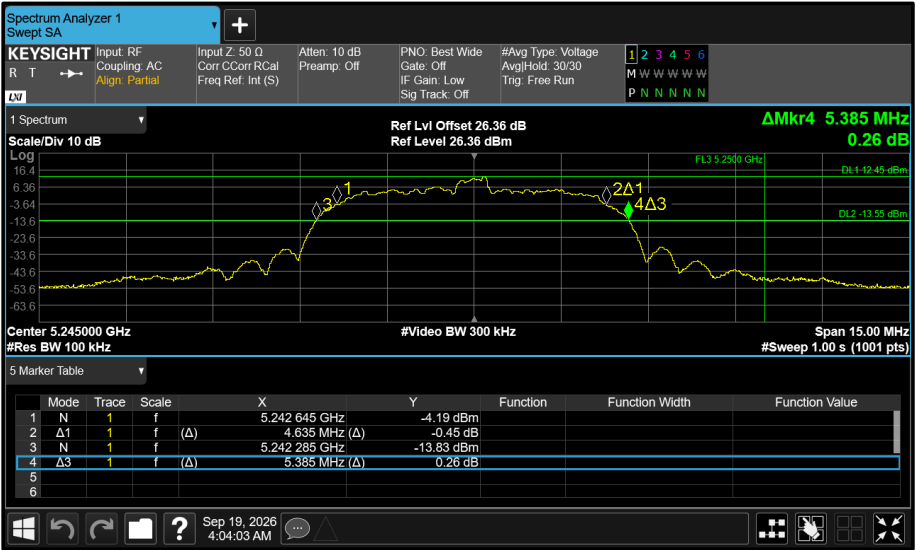


Figure 285 - Core 0 (A) 5245 MHz (CH95) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA HDRP (HDRPM4)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5163	5.440	-	-	-	-
5204	5.420	-	-	-	-
5245	5.420	-	-	-	-

Table 239 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5163	4.740	-	-	-	-
5204	4.740	-	-	-	-
5245	4.740	-	-	-	-

Table 240 - 99% Bandwidth Results

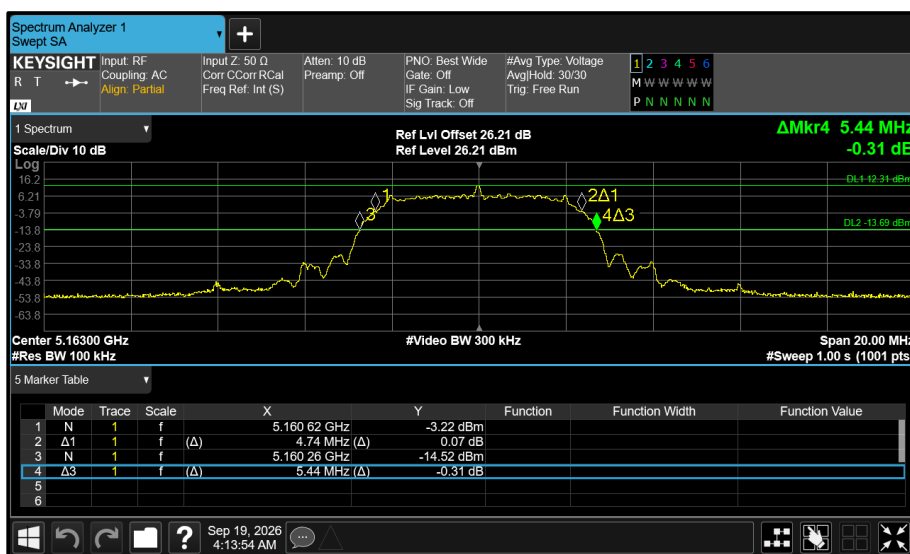


Figure 286 - Core 0 (A) 5163 MHz (CH13) 26 dB and 99% Bandwidth

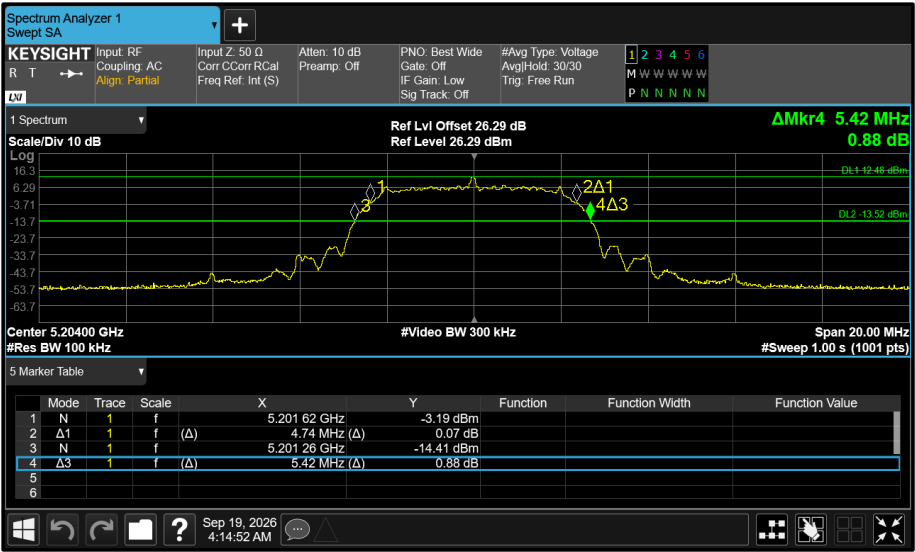


Figure 287 - Core 0 (A) 5204 MHz (CH54) 26 dB and 99% Bandwidth

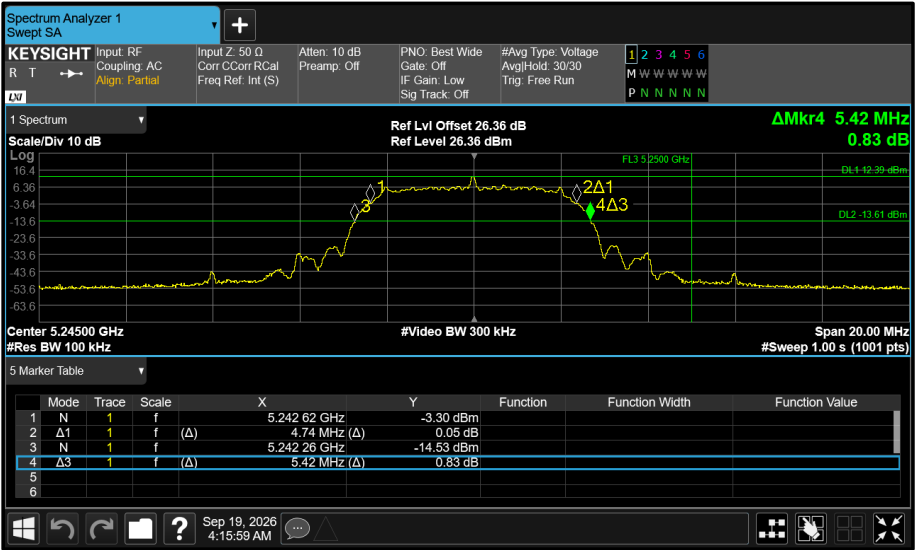


Figure 288 - Core 0 (A) 5245 MHz (CH95) 26 dB and 99% Bandwidth

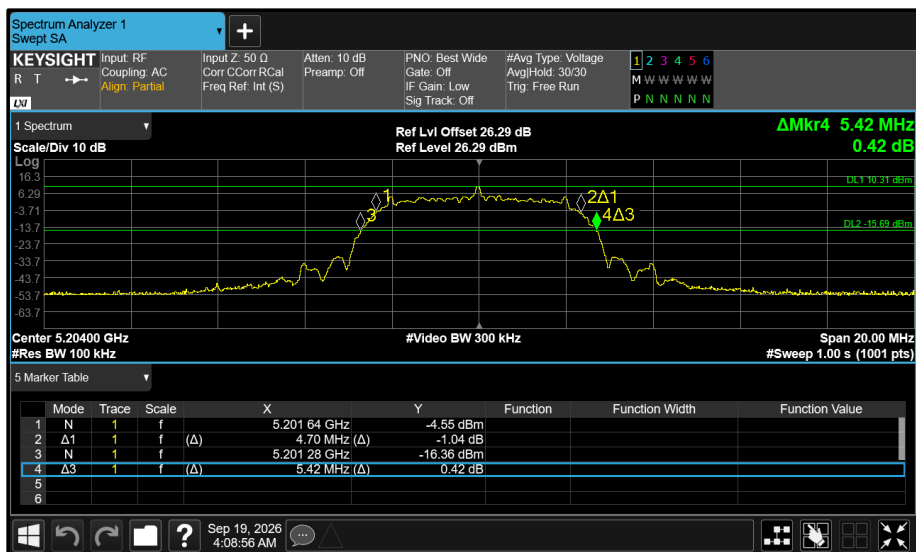


Figure 290 - Core 0 (A) 5204 MHz (CH54) 26 dB and 99% Bandwidth

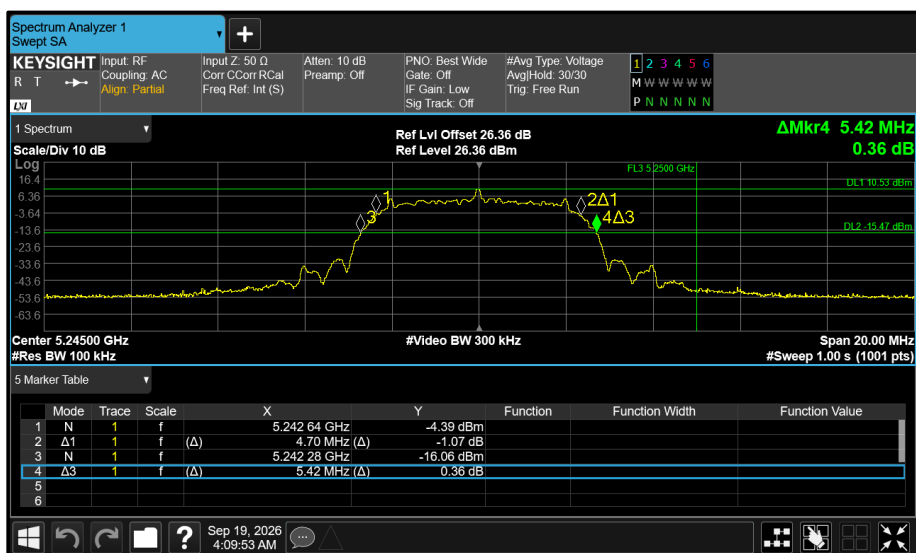


Figure 291 - Core 0 (A) 5245 MHz (CH95) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA HDRP (HDRPL8)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5165	10.830	-	-	-	-
5204	10.830	-	-	-	-
5242	10.830	-	-	-	-

Table 243 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5165	9.390	-	-	-	-
5204	9.390	-	-	-	-
5242	9.390	-	-	-	-

Table 244 - 99% Bandwidth Results

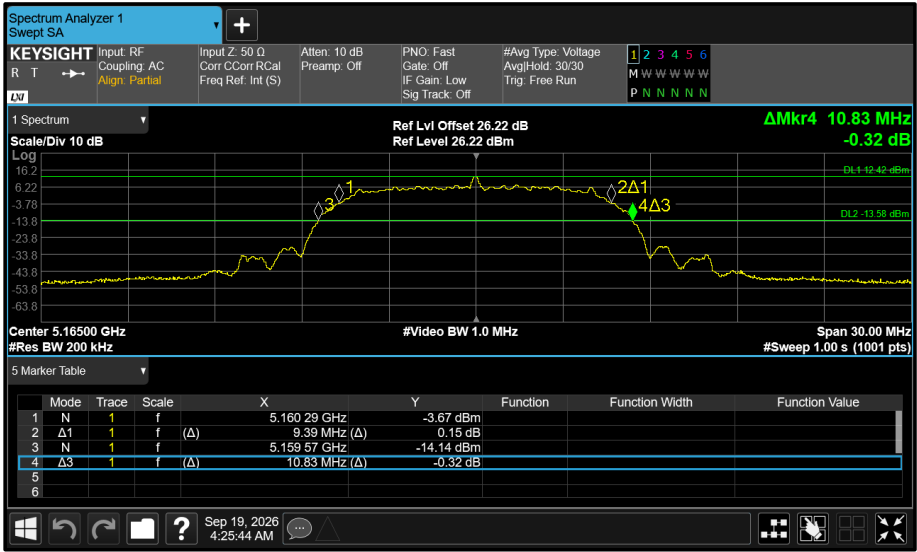


Figure 292 - Core 0 (A) 5165 MHz (CH15) 26 dB and 99% Bandwidth

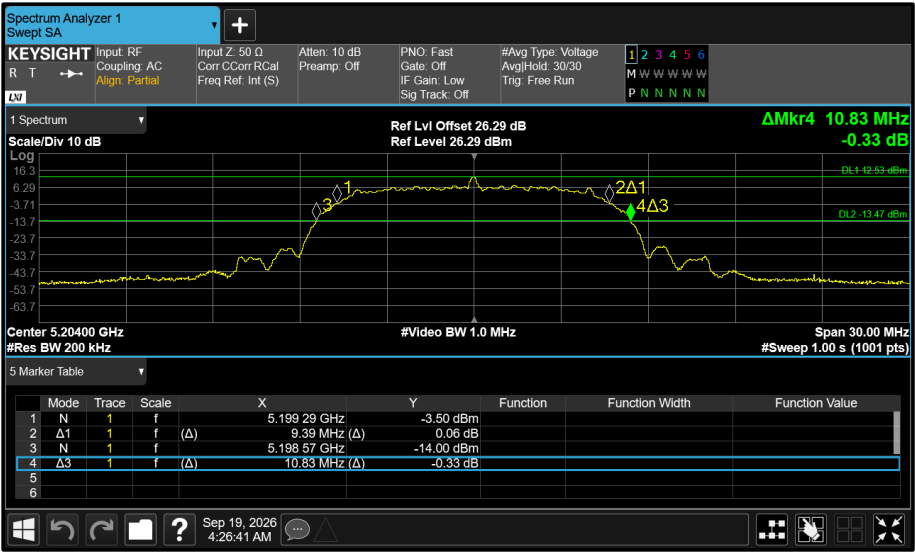


Figure 293 - Core 0 (A) 5204 MHz (CH54) 26 dB and 99% Bandwidth

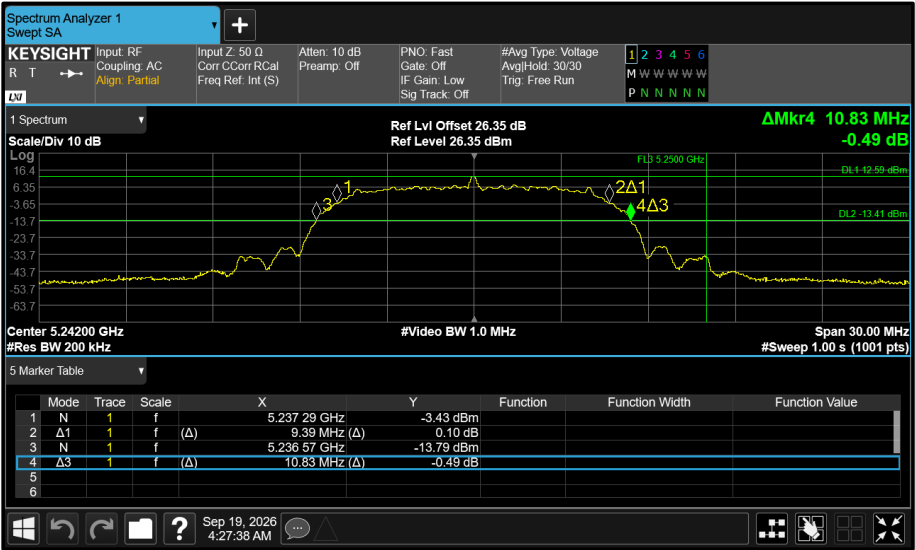


Figure 294 - Core 0 (A) 5242 MHz (CH92) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		


DUT Configuration			
Mode:	ePA LE (LE 2M)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	2.520	-	-	-	-
5204	2.520	-	-	-	-
5245	2.520	-	-	-	-

Table 245 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	2.032	-	-	-	-
5204	2.032	-	-	-	-
5245	2.032	-	-	-	-

Table 246 - 99% Bandwidth Results

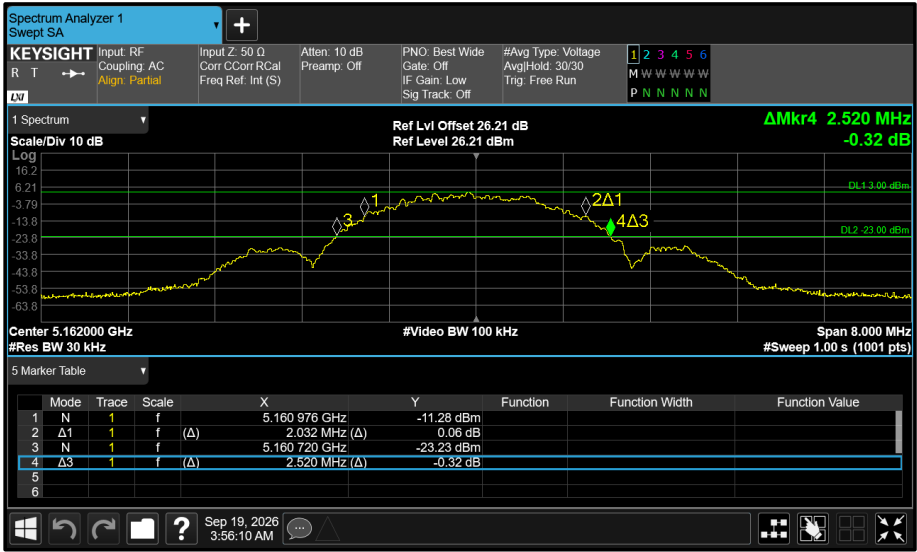

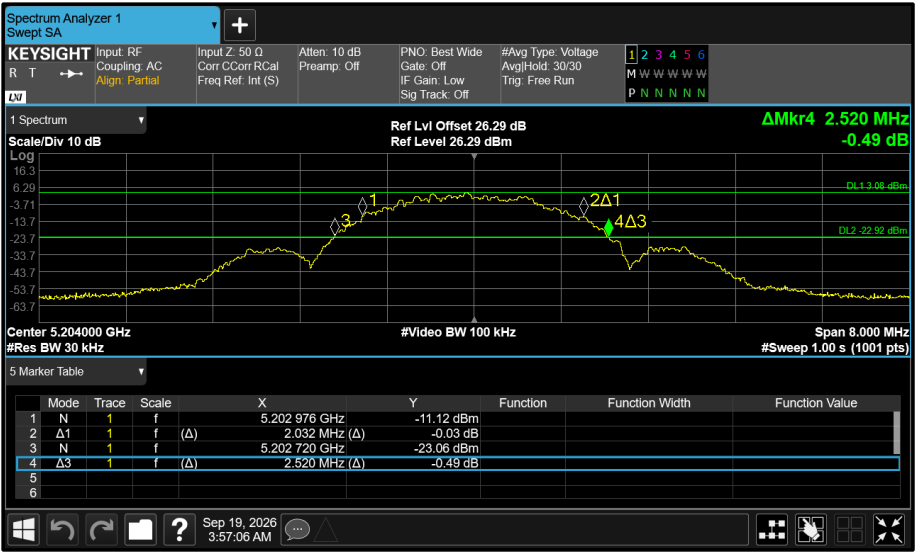


Figure 296 - Core 0 (A) 5204 MHz (CH54) 26 dB and 99% Bandwidth

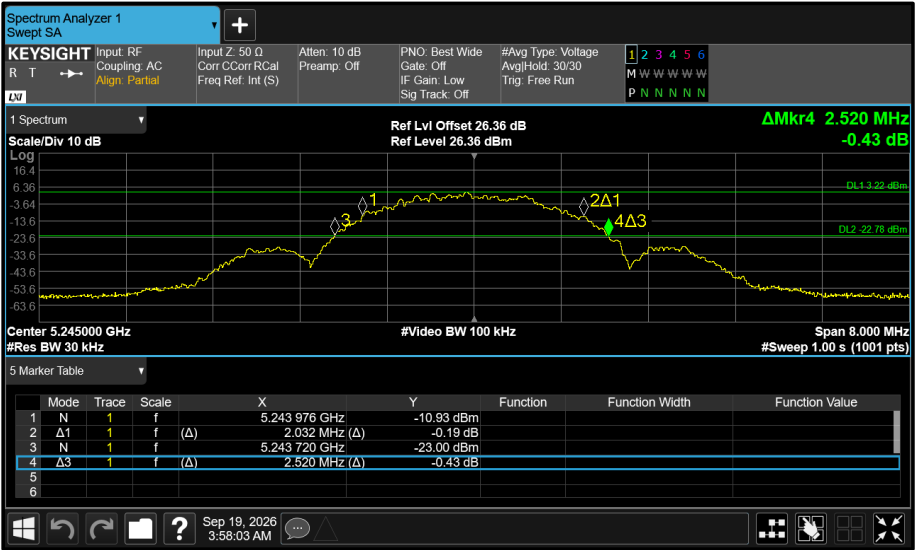


Figure 297 - Core 0 (A) 5245 MHz (CH95) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA BDR (DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	-	1.252	-	-	-
5204	-	1.256	-	-	-
5245	-	1.254	-	-	-

Table 247 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5162	-	0.928	-	-	-
5204	-	0.928	-	-	-
5245	-	0.930	-	-	-

Table 248 - 99% Bandwidth Results

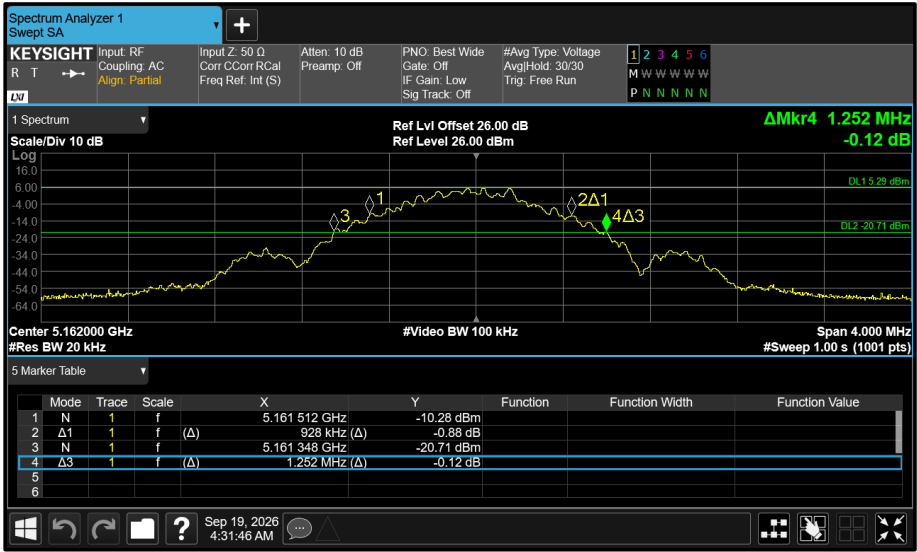


Figure 298 - Core 1 (B) 5162 MHz (CH12) 26 dB and 99% Bandwidth