



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.45	-9.69	-	-	-6.56	11.00	-17.56

Table 998 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.05	-10.21	-	-	-7.12	11.00	-18.12

Table 999 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.13	-10.20	-	-	-7.16	11.00	-18.16

Table 1000 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-7.34	-7.67	-	-	-4.49	11.00	-15.49

Table 1001 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.95)	-7.25	-7.21	-	-	-4.22	11.00	-15.22

Table 1002 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-8.33	-8.16	-	-	-5.24	11.00	-16.24
5250 (RU Size 996 + RU Size 484.95)	-7.68	-7.72	-	-	-4.69	11.00	-15.69

Table 1003 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.89	-8.72	-	-	-5.79	11.00	-16.79
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-8.59	-8.57	-	-	-5.57	11.00	-16.57
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-8.47	-8.58	-	-	-5.52	11.00	-16.52
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.41	-8.70	-	-	-5.54	11.00	-16.54

Table 1004 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.85	-9.30	-	-	-6.06	11.00	-17.06

Table 1005 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.73	2.67	-	-	5.71	7.44	-1.73
5600	3.12	2.53	-	-	5.85	7.44	-1.59
5640	3.06	2.65	-	-	5.87	7.44	-1.56
5700	2.53	2.24	-	-	5.40	7.44	-2.04
5720	2.83	2.24	-	-	5.56	7.44	-1.88

Table 1006 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.73	2.67	-	-	5.71	11.00	-5.29
5600	3.12	2.53	-	-	5.85	11.00	-5.15
5640	3.06	2.65	-	-	5.87	11.00	-5.13
5700	2.53	2.24	-	-	5.40	11.00	-5.60
5720	2.83	2.24	-	-	5.56	11.00	-5.44

Table 1007 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-1.88	-2.26	-	-	0.94	7.44	-6.49
5590	2.78	2.28	-	-	5.55	7.44	-1.89
5670	0.59	0.22	-	-	3.42	7.44	-4.02
5710	3.08	2.63	-	-	5.87	7.44	-1.56

Table 1008 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-1.88	-2.26	-	-	0.94	11.00	-10.06
5590	2.78	2.28	-	-	5.55	11.00	-5.45
5670	0.59	0.22	-	-	3.42	11.00	-7.58
5710	3.08	2.63	-	-	5.87	11.00	-5.13

Table 1009 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.40	-4.75	-	-	-1.56	7.44	-9.00
5610	-0.71	-1.07	-	-	2.13	7.44	-5.31
5690	2.66	2.14	-	-	5.42	7.44	-2.02

Table 1010 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.40	-4.75	-	-	-1.56	11.00	-12.56
5610	-0.71	-1.07	-	-	2.13	11.00	-8.87
5690	2.66	2.14	-	-	5.42	11.00	-5.58

Table 1011 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.5
Data Rate:	12 Mbps	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-9.79	-10.33	-	-	-7.04	7.44	-14.48

Table 1012 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-9.79	-10.33	-	-	-7.04	11.00	-18.04

Table 1013 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.64	2.26	-	-	5.47	7.44	-1.97
5600	2.32	1.98	-	-	5.17	7.44	-2.27
5700	2.38	2.17	-	-	5.29	7.44	-2.15
5720	2.40	2.13	-	-	5.28	7.44	-2.16

Table 1014 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.64	2.26	-	-	5.47	11.00	-5.53
5600	2.32	1.98	-	-	5.17	11.00	-5.83
5700	2.38	2.17	-	-	5.29	11.00	-5.71
5720	2.40	2.13	-	-	5.28	11.00	-5.72

Table 1015 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.30	-0.14	-	-	3.10	7.44	-4.34
5590	2.30	1.62	-	-	4.98	7.44	-2.45
5670	2.44	2.12	-	-	5.30	7.44	-2.14
5710	2.37	2.17	-	-	5.28	7.44	-2.15

Table 1016 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.30	-0.14	-	-	3.10	11.00	-7.90
5590	2.30	1.62	-	-	4.98	11.00	-6.02
5670	2.44	2.12	-	-	5.30	11.00	-5.70
5710	2.37	2.17	-	-	5.28	11.00	-5.72

Table 1017 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.90	-3.99	-	-	-0.94	7.44	-8.37
5610	1.48	0.68	-	-	4.10	7.44	-3.33
5690	2.16	1.74	-	-	4.96	7.44	-2.47

Table 1018 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.90	-3.99	-	-	-0.94	11.00	-11.94
5610	1.48	0.68	-	-	4.10	11.00	-6.90
5690	2.16	1.74	-	-	4.96	11.00	-6.04

Table 1019 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-9.06	-9.47	-	-	-6.25	7.44	-13.68

Table 1020 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-9.06	-9.47	-	-	-6.25	11.00	-17.25

Table 1021 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.58	2.29	-	-	5.45	7.44	-1.99
5600	2.60	2.35	-	-	5.49	7.44	-1.95
5700	2.56	2.11	-	-	5.35	7.44	-2.09
5720	2.63	2.18	-	-	5.42	7.44	-2.02

Table 1022 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.58	2.29	-	-	5.45	11.00	-5.55
5600	2.60	2.35	-	-	5.49	11.00	-5.51
5700	2.56	2.11	-	-	5.35	11.00	-5.65
5720	2.63	2.18	-	-	5.42	11.00	-5.58

Table 1023 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.08	-0.40	-	-	2.86	7.44	-4.58
5590	2.57	2.19	-	-	5.40	7.44	-2.04
5670	2.67	2.30	-	-	5.50	7.44	-1.93
5710	2.79	2.56	-	-	5.68	7.44	-1.75

Table 1024 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.08	-0.40	-	-	2.86	11.00	-8.14
5590	2.57	2.19	-	-	5.40	11.00	-5.60
5670	2.67	2.30	-	-	5.50	11.00	-5.50
5710	2.79	2.56	-	-	5.68	11.00	-5.32

Table 1025 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.88	-4.11	-	-	-0.98	7.44	-8.42
5610	0.99	0.55	-	-	3.78	7.44	-3.65
5690	2.31	1.78	-	-	5.07	7.44	-2.37

Table 1026 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.88	-4.11	-	-	-0.98	11.00	-11.98
5610	0.99	0.55	-	-	3.78	11.00	-7.22
5690	2.31	1.78	-	-	5.07	11.00	-5.93

Table 1027 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.27	-8.81	-	-	-5.52	7.44	-12.96

Table 1028 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.27	-8.81	-	-	-5.52	11.00	-16.52

Table 1029 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	2.57	2.44	-	-	5.52	7.44	-1.92
5600 (RU52.37)	2.84	2.44	-	-	5.66	7.44	-1.78
5620 (RU52.37)	2.53	2.32	-	-	5.43	7.44	-2.00
5700 (RU52.40)	2.78	2.39	-	-	5.60	7.44	-1.84
5720 (RU52.39)	2.38	1.81	-	-	5.11	7.44	-2.32
5720 (RU52.40)	-6.21	-6.52	-	-	-3.35	7.44	-10.79

Table 1030 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	2.57	2.44	-	-	5.52	11.00	-5.48
5600 (RU52.37)	2.84	2.44	-	-	5.66	11.00	-5.34
5620 (RU52.37)	2.53	2.32	-	-	5.43	11.00	-5.57
5700 (RU52.40)	2.78	2.39	-	-	5.60	11.00	-5.40
5720 (RU52.39)	2.38	1.81	-	-	5.11	11.00	-5.89
5720 (RU52.40)	-6.21	-6.52	-	-	-3.35	11.00	-14.35

Table 1031 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	3.03	2.45	-	-	5.76	7.44	-1.68
5600 (RU106.53)	2.94	2.36	-	-	5.67	7.44	-1.77
5700 (RU106.54)	2.66	2.45	-	-	5.57	7.44	-1.87
5720 (RU106.53)	2.83	2.74	-	-	5.80	7.44	-1.64
5720 (RU106.54)	2.89	2.70	-	-	5.80	7.44	-1.63

Table 1032 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	3.03	2.45	-	-	5.76	11.00	-5.24
5600 (RU106.53)	2.94	2.36	-	-	5.67	11.00	-5.33
5700 (RU106.54)	2.66	2.45	-	-	5.57	11.00	-5.43
5720 (RU106.53)	2.83	2.74	-	-	5.80	11.00	-5.20
5720 (RU106.54)	2.89	2.70	-	-	5.80	11.00	-5.20

Table 1033 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 52 + RU Size 26.70)	2.42	2.36	-	-	5.40	7.44	-2.04
5580 (RU Size 52 + RU Size 26.70)	2.87	2.69	-	-	5.79	7.44	-1.65
5600 (RU Size 52 + RU Size 26.70)	2.85	2.25	-	-	5.57	7.44	-1.87
5700 (RU Size 52 + RU Size 26.72)	2.53	2.29	-	-	5.42	7.44	-2.02
5720 (RU Size 52 + RU Size 26.71)	2.33	1.76	-	-	5.06	7.44	-2.37
5720 (RU Size 52 + RU Size 26.72)	2.83	2.44	-	-	5.65	7.44	-1.79

Table 1034 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 52 + RU Size 26.70)	2.42	2.36	-	-	5.40	11.00	-5.60
5580 (RU Size 52 + RU Size 26.70)	2.87	2.69	-	-	5.79	11.00	-5.21
5600 (RU Size 52 + RU Size 26.70)	2.85	2.25	-	-	5.57	11.00	-5.43
5700 (RU Size 52 + RU Size 26.72)	2.53	2.29	-	-	5.42	11.00	-5.58
5720 (RU Size 52 + RU Size 26.71)	2.33	1.76	-	-	5.06	11.00	-5.94
5720 (RU Size 52 + RU Size 26.72)	2.83	2.44	-	-	5.65	11.00	-5.35

Table 1035 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 106 + RU Size 26.82)	2.99	2.39	-	-	5.71	7.44	-1.73
5580 (RU Size 106 + RU Size 26.82)	2.71	2.60	-	-	5.66	7.44	-1.77
5600 (RU Size 106 + RU Size 26.82)	2.66	2.13	-	-	5.42	7.44	-2.02
5700 (RU Size 106 + RU Size 26.83)	2.74	2.62	-	-	5.69	7.44	-1.75
5720 (RU Size 106 + RU Size 26.82)	2.98	2.43	-	-	5.72	7.44	-1.71
5720 (RU Size 106 + RU Size 26.83)	2.88	2.73	-	-	5.82	7.44	-1.62

Table 1036 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 106 + RU Size 26.82)	2.99	2.39	-	-	5.71	11.00	-5.29
5580 (RU Size 106 + RU Size 26.82)	2.71	2.60	-	-	5.66	11.00	-5.34
5600 (RU Size 106 + RU Size 26.82)	2.66	2.13	-	-	5.42	11.00	-5.58
5700 (RU Size 106 + RU Size 26.83)	2.74	2.62	-	-	5.69	11.00	-5.31
5720 (RU Size 106 + RU Size 26.82)	2.98	2.43	-	-	5.72	11.00	-5.28
5720 (RU Size 106 + RU Size 26.83)	2.88	2.73	-	-	5.82	11.00	-5.18

Table 1037 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530 (RU Size 484 + RU Size 242.93)	-5.19	-5.44	-	-	-2.31	7.44	-9.74
5610 (RU Size 484 + RU Size 242.90)	-1.40	-2.07	-	-	1.29	7.44	-6.15
5690 (RU Size 484 + RU Size 242.90)	2.10	1.85	-	-	4.99	7.44	-2.45
5690 (RU Size 484 + RU Size 242.93)	2.18	2.31	-	-	5.26	7.44	-2.18

Table 1038 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530 (RU Size 484 + RU Size 242.93)	-5.19	-5.44	-	-	-2.31	11.00	-13.31
5610 (RU Size 484 + RU Size 242.90)	-1.40	-2.07	-	-	1.29	11.00	-9.71
5690 (RU Size 484 + RU Size 242.90)	2.10	1.85	-	-	4.99	11.00	-6.01
5690 (RU Size 484 + RU Size 242.93)	2.18	2.31	-	-	5.26	11.00	-5.74

Table 1039 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.94)	-7.36	-7.60	-	-	-4.47	7.44	-11.90

Table 1040 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.94)	-7.36	-7.60	-	-	-4.47	11.00	-15.47

Table 1041 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.95)	-7.47	-7.75	-	-	-4.60	7.44	-12.03

Table 1042 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.95)	-7.47	-7.75	-	-	-4.60	11.00	-15.60

Table 1043 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.78	-8.09	-	-	-4.92	7.44	-12.36

Table 1044 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.78	-8.09	-	-	-4.92	11.00	-15.92

Table 1045 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.66	-8.16	-	-	-4.89	7.44	-12.33

Table 1046 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.66	-8.16	-	-	-4.89	11.00	-15.89

Table 1047 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-1.89	-2.05	-	-	1.04	26.44	-25.40
5745	6.63	6.34	-	-	9.50	26.64	-17.14
5785	6.76	6.09	-	-	9.45	26.64	-17.19
5825	6.34	6.36	-	-	9.36	26.64	-17.28

Table 1048 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-3.00	-3.01	-	-	0.01	26.44	-26.43
5755	4.24	3.13	-	-	6.73	26.64	-19.90
5795	3.52	3.31	-	-	6.43	26.64	-20.21

Table 1049 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.15	-4.48	-	-	-1.30	26.44	-27.74
5775	-0.20	-0.62	-	-	2.61	26.64	-24.03

Table 1050 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-1.84	-2.40	-	-	0.90	26.44	-25.54
5745	6.19	5.99	-	-	9.10	26.64	-17.54
5785	6.30	5.89	-	-	9.11	26.64	-17.53
5825	6.01	5.91	-	-	8.97	26.64	-17.67

Table 1051 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-3.59	-3.16	-	-	-0.36	26.44	-26.79
5755	3.46	3.16	-	-	6.32	26.64	-20.32
5795	3.22	3.04	-	-	6.14	26.64	-20.50

Table 1052 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.62	-4.95	-	-	-1.77	26.44	-28.21
5775	-0.85	-1.27	-	-	1.96	26.64	-24.68

Table 1053 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-1.70	-2.06	-	-	1.13	26.44	-25.30
5745	6.46	5.75	-	-	9.13	26.64	-17.51
5785	6.28	5.96	-	-	9.13	26.64	-17.50
5825	6.48	6.12	-	-	9.32	26.64	-17.32

Table 1054 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-3.02	-3.51	-	-	-0.25	26.44	-26.68
5755	3.26	3.06	-	-	6.17	26.64	-20.47
5795	3.39	3.12	-	-	6.26	26.64	-20.37

Table 1055 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.73	-4.70	-	-	-1.70	26.44	-28.14
5775	-1.43	-1.52	-	-	1.53	26.64	-25.10

Table 1056 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	6.37	6.46	-	-	9.42	26.64	-17.22
5785 (RU26.0)	6.46	6.29	-	-	9.39	26.64	-17.25
5825 (RU26.8)	6.48	5.94	-	-	9.23	26.64	-17.41

Table 1057 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.39)	-2.47	-2.78	-	-	0.39	26.44	-26.05
5720 (RU52.40)	-0.18	-0.54	-	-	2.65	26.44	-23.78
5745 (RU52.37)	7.24	6.89	-	-	10.08	26.64	-16.56
5785 (RU52.37)	6.64	6.53	-	-	9.60	26.64	-17.04
5825 (RU52.40)	6.82	6.72	-	-	9.78	26.64	-16.86

Table 1058 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.53)	-21.04	-23.20	-	-	-18.98	26.44	-45.41
5720 (RU106.54)	-0.98	-1.45	-	-	1.81	26.44	-24.63
5745 (RU106.53)	7.43	6.65	-	-	10.07	26.64	-16.57
5785 (RU106.53)	7.02	6.52	-	-	9.79	26.64	-16.85
5825 (RU106.54)	7.03	7.14	-	-	10.10	26.64	-16.54

Table 1059 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 52 + RU Size 26.71)	-19.50	-21.61	-	-	-17.41	26.44	-43.85
5720 (RU Size 52 + RU Size 26.72)	-1.09	-1.99	-	-	1.49	26.44	-24.94
5745 (RU Size 52 + RU Size 26.70)	7.20	6.59	-	-	9.92	26.64	-16.72
5785 (RU Size 52 + RU Size 26.70)	6.75	6.31	-	-	9.55	26.64	-17.09
5825 (RU Size 52 + RU Size 26.72)	6.47	6.48	-	-	9.48	26.64	-17.15

Table 1060 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 106 + RU Size 26.82)	-14.64	-14.38	-	-	-11.50	26.44	-37.93
5720 (RU Size 106 + RU Size 26.83)	-1.37	-1.43	-	-	1.61	26.44	-24.83
5745 (RU Size 106 + RU Size 26.82)	6.33	6.41	-	-	9.38	26.64	-17.26
5785 (RU Size 106 + RU Size 26.82)	6.74	6.24	-	-	9.51	26.64	-17.13
5825 (RU Size 106 + RU Size 26.83)	6.59	6.91	-	-	9.76	26.64	-16.88

Table 1061 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690 (RU Size 484 + RU Size 242.90)	-3.10	-3.08	-	-	-0.08	26.44	-26.52
5690 (RU Size 484 + RU Size 242.93)	-48.82	-44.53	-	-	-43.15	26.44	-69.59
5775 (RU Size 484 + RU Size 242.90)	-2.38	-2.94	-	-	0.36	26.64	-26.28
5775 (RU Size 484 + RU Size 242.93)	-2.34	-2.48	-	-	0.60	26.64	-26.04

Table 1062 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	6.44	5.91	-	-	9.19	11.00	-1.81
5200	6.33	5.98	-	-	9.17	11.00	-1.83
5220	6.16	5.96	-	-	9.07	11.00	-1.93
5240	5.91	5.68	-	-	8.81	11.00	-2.19

Table 1063 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-0.22	-0.20	-	-	2.80	11.00	-8.20
5230	5.93	5.88	-	-	8.91	11.00	-2.09

Table 1064 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-4.36	-4.79	-	-	-1.56	11.00	-12.56

Table 1065 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.46	-9.74	-	-	-6.59	11.00	-17.59

Table 1066 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	5.85	5.70	-	-	8.79	11.00	-2.21
5200	6.49	6.16	-	-	9.34	11.00	-1.66
5220	5.98	5.79	-	-	8.90	11.00	-2.10
5240	5.83	5.79	-	-	8.82	11.00	-2.18

Table 1067 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-0.22	-0.27	-	-	2.77	11.00	-8.23
5230	5.60	5.45	-	-	8.53	11.00	-2.47

Table 1068 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-4.54	-4.80	-	-	-1.66	11.00	-12.66

Table 1069 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.71	-10.00	-	-	-6.84	11.00	-17.84

Table 1070 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU26.0)	6.18	5.56	-	-	8.89	11.00	-2.11
5220 (RU26.0)	5.84	5.61	-	-	8.74	11.00	-2.26
5240 (RU26.8)	5.82	5.79	-	-	8.81	11.00	-2.19

Table 1071 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU52.37)	6.34	6.05	-	-	9.21	11.00	-1.79
5220 (RU52.37)	5.95	5.86	-	-	8.91	11.00	-2.09
5240 (RU52.40)	6.05	5.59	-	-	8.84	11.00	-2.16

Table 1072 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU106.53)	6.43	5.97	-	-	9.22	11.00	-1.78
5220 (RU106.53)	6.48	6.22	-	-	9.36	11.00	-1.64
5240 (RU106.54)	6.39	6.38	-	-	9.40	11.00	-1.60

Table 1073 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU Size 52 + RU Size 26.70)	6.29	6.21	-	-	9.26	11.00	-1.74
5220 (RU Size 52 + RU Size 26.70)	6.05	6.11	-	-	9.09	11.00	-1.91
5240 (RU Size 52 + RU Size 26.72)	6.16	5.58	-	-	8.89	11.00	-2.11

Table 1074 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU Size 106 + RU Size 26.82)	6.38	6.46	-	-	9.43	11.00	-1.57
5220 (RU Size 106 + RU Size 26.82)	6.44	6.39	-	-	9.43	11.00	-1.57
5240 (RU Size 106 + RU Size 26.83)	6.16	5.94	-	-	9.06	11.00	-1.94

Table 1075 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210 (RU Size 484 + RU Size 242.90)	-4.30	-4.70	-	-	-1.48	11.00	-12.48
5210 (RU Size 484 + RU Size 242.91)	-3.30	-3.55	-	-	-0.42	11.00	-11.42
5210 (RU Size 484 + RU Size 242.92)	-3.57	-3.98	-	-	-0.76	11.00	-11.76
5210 (RU Size 484 + RU Size 242.93)	-4.02	-4.28	-	-	-1.14	11.00	-12.14

Table 1076 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-7.04	-7.23	-	-	-4.12	11.00	-15.12
5250 (RU Size 996 + RU Size 484.95)	-7.36	-7.72	-	-	-4.53	11.00	-15.53

Table 1077 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-6.05	-6.22	-	-	-3.12	11.00	-14.12
5250 (RU Size 996 + RU Size 484.95)	-6.81	-6.86	-	-	-3.83	11.00	-14.83

Table 1078 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.93	-7.99	-	-	-4.95	11.00	-15.95
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-7.65	-8.23	-	-	-4.92	11.00	-15.92
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-7.41	-7.57	-	-	-4.48	11.00	-15.48
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.10	-8.30	-	-	-5.19	11.00	-16.19

Table 1079 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.80	-7.93	-	-	-4.85	11.00	-15.85

Table 1080 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-0.64	-0.61	-	-	2.38	5.90	8.29	10.00	-1.71
5220	-1.03	-1.11	-	-	1.94	5.90	7.84	10.00	-2.16
5240	-0.80	-0.82	-	-	2.20	5.90	8.10	10.00	-1.90

Table 1081 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-1.03	-1.20	-	-	1.90	5.90	7.80	10.00	-2.20
5230	-0.92	-1.04	-	-	2.03	5.90	7.93	10.00	-2.07

Table 1082 - ISD Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-4.44	-4.74	-	-	-1.57	5.90	4.33	10.00	-5.67

Table 1083 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-9.49	-9.63	-	-	-6.55	5.90	-0.65	10.00	-10.65

Table 1084 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-0.72	-0.76	-	-	2.27	5.90	8.17	10.00	-1.83
5200	-0.33	-0.79	-	-	2.46	5.90	8.36	10.00	-1.64
5220	-0.56	-0.80	-	-	2.34	5.90	8.24	10.00	-1.76
5240	-0.80	-1.22	-	-	2.01	5.90	7.91	10.00	-2.09

Table 1085 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-1.29	-1.32	-	-	1.71	5.90	7.61	10.00	-2.39
5230	-1.08	-0.95	-	-	2.00	5.90	7.90	10.00	-2.10

Table 1086 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-4.43	-4.67	-	-	-1.54	5.90	4.36	10.00	-5.64

Table 1087 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-9.47	-9.87	-	-	-6.66	5.90	-0.76	10.00	-10.76

Table 1088 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU26.0)	-0.92	-1.34	-	-	1.88	5.90	7.79	10.00	-2.21
5220 (RU26.0)	-1.16	-1.30	-	-	1.78	5.90	7.68	10.00	-2.32
5240 (RU26.8)	-1.49	-1.07	-	-	1.74	5.90	7.64	10.00	-2.36

Table 1089 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU52.37)	-0.79	-1.05	-	-	2.09	5.90	7.99	10.00	-2.01
5200 (RU52.37)	-0.86	-0.75	-	-	2.21	5.90	8.11	10.00	-1.89
5220 (RU52.37)	-0.70	-0.77	-	-	2.28	5.90	8.18	10.00	-1.82
5240 (RU52.40)	-0.98	-1.15	-	-	1.94	5.90	7.85	10.00	-2.15

Table 1090 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU106.53)	-0.64	-0.74	-	-	2.32	5.90	8.22	10.00	-1.78
5220 (RU106.53)	-0.78	-0.80	-	-	2.22	5.90	8.12	10.00	-1.88
5240 (RU106.54)	-0.36	-0.54	-	-	2.56	5.90	8.46	10.00	-1.54

Table 1091 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU Size 52 + RU Size 26.70)	-0.69	-0.85	-	-	2.24	5.90	8.14	10.00	-1.86
5220 (RU Size 52 + RU Size 26.70)	-0.83	-0.94	-	-	2.13	5.90	8.03	10.00	-1.97
5240 (RU Size 52 + RU Size 26.72)	-1.12	-0.98	-	-	1.96	5.90	7.86	10.00	-2.14

Table 1092 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU Size 106 + RU Size 26.82)	-0.36	-0.58	-	-	2.54	5.90	8.45	10.00	-1.55
5220 (RU Size 106 + RU Size 26.82)	-0.67	-0.35	-	-	2.51	5.90	8.41	10.00	-1.59
5240 (RU Size 106 + RU Size 26.83)	-0.70	-0.63	-	-	2.34	5.90	8.24	10.00	-1.76

Table 1093 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210 (RU Size 484 + RU Size 242.90)	-4.44	-4.34	-	-	-1.38	5.90	4.52	10.00	-5.48
5210 (RU Size 484 + RU Size 242.91)	-3.46	-3.68	-	-	-0.56	5.90	5.34	10.00	-4.66
5210 (RU Size 484 + RU Size 242.92)	-3.33	-3.80	-	-	-0.55	5.90	5.35	10.00	-4.65
5210 (RU Size 484 + RU Size 242.93)	-4.22	-4.39	-	-	-1.29	5.90	4.61	10.00	-5.39

Table 1094 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484.94)	-7.15	-7.30	-	-	-4.22	5.90	1.68	10.00	-8.32
5250 (RU Size 996 + RU Size 484.95)	-7.42	-7.76	-	-	-4.58	5.90	1.33	10.00	-8.67

Table 1095 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484.94)	-5.74	-5.92	-	-	-2.82	5.90	3.08	10.00	-6.92
5250 (RU Size 996 + RU Size 484.95)	-6.74	-6.53	-	-	-3.62	5.90	2.28	10.00	-7.72

Table 1096 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.78	-7.93	-	-	-4.84	5.90	1.06	10.00	-8.94
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-7.84	-8.00	-	-	-4.91	5.90	0.99	10.00	-9.01
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-7.71	-7.55	-	-	-4.62	5.90	1.29	10.00	-8.71
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.08	-7.97	-	-	-5.01	5.90	0.89	10.00	-9.11

Table 1097 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.81	-8.04	-	-	-4.92	5.90	0.99	10.00	-9.01

Table 1098 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	5.89	5.77	-	-	8.84	10.80	-1.96
5300	5.86	5.58	-	-	8.73	10.80	-2.07
5320	5.96	5.88	-	-	8.93	10.80	-1.87

Table 1099 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	5.89	5.77	-	-	8.84	11.00	-2.16
5300	5.86	5.58	-	-	8.73	11.00	-2.27
5320	5.96	5.88	-	-	8.93	11.00	-2.07

Table 1100 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	5.61	5.61	-	-	8.62	10.80	-2.18
5310	0.83	0.64	-	-	3.75	10.80	-7.05

Table 1101 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	5.61	5.61	-	-	8.62	11.00	-2.38
5310	0.83	0.64	-	-	3.75	11.00	-7.25

Table 1102 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.15	-4.17	-	-	-1.15	10.80	-11.95

Table 1103 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.15	-4.17	-	-	-1.15	11.00	-12.15

Table 1104 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.68	-9.83	-	-	-6.74	10.80	-17.54

Table 1105 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	6.39	6.00	-	-	9.21	10.80	-1.59
5300	5.73	5.77	-	-	8.76	10.80	-2.04
5320	6.01	5.71	-	-	8.88	10.80	-1.92

Table 1106 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	6.39	6.00	-	-	9.21	11.00	-1.79
5300	5.73	5.77	-	-	8.76	11.00	-2.24
5320	6.01	5.71	-	-	8.88	11.00	-2.12

Table 1107 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	5.73	5.74	-	-	8.74	10.80	-2.05
5310	-0.21	-0.32	-	-	2.74	10.80	-8.06

Table 1108 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	5.73	5.74	-	-	8.74	11.00	-2.26
5310	-0.21	-0.32	-	-	2.74	11.00	-8.26

Table 1109 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.64	-4.67	-	-	-1.64	10.80	-12.44

Table 1110 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.64	-4.67	-	-	-1.64	11.00	-12.64

Table 1111 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.74	-9.83	-	-	-6.78	10.80	-17.58

Table 1112 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	6.05	5.94	-	-	9.01	10.80	-1.79
5280 (RU52.37)	5.98	6.06	-	-	9.03	10.80	-1.77
5300 (RU52.37)	5.81	5.96	-	-	8.90	10.80	-1.90
5320 (RU52.40)	5.46	5.47	-	-	8.48	10.80	-2.32

Table 1113 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	6.05	5.94	-	-	9.01	11.00	-1.99
5280 (RU52.37)	5.98	6.06	-	-	9.03	11.00	-1.97
5300 (RU52.37)	5.81	5.96	-	-	8.90	11.00	-2.10
5320 (RU52.40)	5.46	5.47	-	-	8.48	11.00	-2.52

Table 1114 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	6.30	6.43	-	-	9.38	10.80	-1.42
5300 (RU106.53)	5.90	6.21	-	-	9.07	10.80	-1.73
5320 (RU106.54)	6.13	6.01	-	-	9.08	10.80	-1.72

Table 1115 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	6.30	6.43	-	-	9.38	11.00	-1.62
5300 (RU106.53)	5.90	6.21	-	-	9.07	11.00	-1.93
5320 (RU106.54)	6.13	6.01	-	-	9.08	11.00	-1.92

Table 1116 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 52 + RU Size 26.70)	5.97	5.83	-	-	8.91	10.80	-1.89
5300 (RU Size 52 + RU Size 26.70)	5.81	5.75	-	-	8.79	10.80	-2.01
5320 (RU Size 52 + RU Size 26.72)	5.84	5.79	-	-	8.83	10.80	-1.97

Table 1117 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 52 + RU Size 26.70)	5.97	5.83	-	-	8.91	11.00	-2.09
5300 (RU Size 52 + RU Size 26.70)	5.81	5.75	-	-	8.79	11.00	-2.21
5320 (RU Size 52 + RU Size 26.72)	5.84	5.79	-	-	8.83	11.00	-2.17

Table 1118 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 106 + RU Size 26.82)	5.98	5.95	-	-	8.97	10.80	-1.82
5300 (RU Size 106 + RU Size 26.82)	6.17	6.10	-	-	9.14	10.80	-1.65
5320 (RU Size 106 + RU Size 26.83)	6.16	6.00	-	-	9.09	10.80	-1.71

Table 1119 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 106 + RU Size 26.82)	5.98	5.95	-	-	8.97	11.00	-2.03
5300 (RU Size 106 + RU Size 26.82)	6.17	6.10	-	-	9.14	11.00	-1.86
5320 (RU Size 106 + RU Size 26.83)	6.16	6.00	-	-	9.09	11.00	-1.91

Table 1120 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290 (RU Size 484 + RU Size 242.90)	-5.03	-5.26	-	-	-2.13	10.80	-12.93
5290 (RU Size 484 + RU Size 242.93)	-5.14	-5.32	-	-	-2.22	10.80	-13.02

Table 1121 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290 (RU Size 484 + RU Size 242.90)	-5.03	-5.26	-	-	-2.13	11.00	-13.13
5290 (RU Size 484 + RU Size 242.93)	-5.14	-5.32	-	-	-2.22	11.00	-13.22

Table 1122 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-7.08	-7.06	-	-	-4.06	10.80	-14.86
5250 (RU Size 996 + RU Size 484.95)	-6.17	-6.01	-	-	-3.08	10.80	-13.88

Table 1123 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-7.39	-7.44	-	-	-4.40	10.80	-15.20
5250 (RU Size 996 + RU Size 484.95)	-7.14	-7.03	-	-	-4.07	10.80	-14.87

Table 1124 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.07	-8.19	-	-	-5.12	10.80	-15.92
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-7.81	-7.99	-	-	-4.89	10.80	-15.69
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-7.76	-7.66	-	-	-4.70	10.80	-15.50
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.51	-7.49	-	-	-4.49	10.80	-15.29

Table 1125 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.96	-8.03	-	-	-4.98	10.80	-15.78

Table 1126 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.54	-9.66	-	-	-6.59	11.00	-17.59

Table 1127 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.52	-9.69	-	-	-6.59	11.00	-17.59

Table 1128 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-6.97	-6.91	-	-	-3.93	11.00	-14.93
5250 (RU Size 996 + RU Size 484.95)	-6.02	-6.23	-	-	-3.11	11.00	-14.11

Table 1129 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-7.15	-7.12	-	-	-4.13	11.00	-15.13
5250 (RU Size 996 + RU Size 484.95)	-7.01	-6.95	-	-	-3.97	11.00	-14.97

Table 1130 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.08	-8.31	-	-	-5.18	11.00	-16.18
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-7.73	-7.66	-	-	-4.69	11.00	-15.69
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-7.41	-7.55	-	-	-4.47	11.00	-15.47
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.50	-7.33	-	-	-4.41	11.00	-15.41

Table 1131 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.81	-7.91	-	-	-4.85	11.00	-15.85

Table 1132 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	5.39	5.04	-	-	8.23	10.44	-2.21
5600	5.69	5.40	-	-	8.56	10.44	-1.88
5700	5.45	5.44	-	-	8.45	10.44	-1.99
5720	5.79	5.52	-	-	8.66	10.44	-1.78

Table 1133 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	5.39	5.04	-	-	8.23	11.00	-2.77
5600	5.69	5.40	-	-	8.56	11.00	-2.44
5700	5.45	5.44	-	-	8.45	11.00	-2.55
5720	5.79	5.52	-	-	8.66	11.00	-2.34

Table 1134 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.18	-0.59	-	-	2.63	10.44	-7.81
5590	4.62	4.42	-	-	7.53	10.44	-2.92
5670	3.72	3.71	-	-	6.73	10.44	-3.71
5710	5.21	5.16	-	-	8.20	10.44	-2.25

Table 1135 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.18	-0.59	-	-	2.63	11.00	-8.37
5590	4.62	4.42	-	-	7.53	11.00	-3.47
5670	3.72	3.71	-	-	6.73	11.00	-4.27
5710	5.21	5.16	-	-	8.20	11.00	-2.80

Table 1136 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.13	-4.38	-	-	-1.24	10.44	-11.69
5610	1.58	1.28	-	-	4.45	10.44	-6.00
5690	2.31	2.22	-	-	5.28	10.44	-5.17

Table 1137 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.13	-4.38	-	-	-1.24	11.00	-12.24
5610	1.58	1.28	-	-	4.45	11.00	-6.55
5690	2.31	2.22	-	-	5.28	11.00	-5.72

Table 1138 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-9.92	-10.29	-	-	-7.09	10.44	-17.53

Table 1139 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-9.92	-10.29	-	-	-7.09	11.00	-18.09

Table 1140 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	5.59	5.55	-	-	8.58	10.44	-1.86
5600	5.44	5.21	-	-	8.34	10.44	-2.11
5640	5.87	5.40	-	-	8.65	10.44	-1.79
5700	2.78	2.62	-	-	5.71	10.44	-4.73
5720	5.38	5.30	-	-	8.35	10.44	-2.09

Table 1141 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	5.59	5.55	-	-	8.58	11.00	-2.42
5600	5.44	5.21	-	-	8.34	11.00	-2.66
5640	5.87	5.40	-	-	8.65	11.00	-2.35
5700	2.78	2.62	-	-	5.71	11.00	-5.29
5720	5.38	5.30	-	-	8.35	11.00	-2.65

Table 1142 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.64	0.06	-	-	3.37	10.44	-7.07
5590	4.23	4.55	-	-	7.41	10.44	-3.04
5670	3.35	3.11	-	-	6.25	10.44	-4.20
5710	5.03	5.03	-	-	8.04	10.44	-2.41

Table 1143 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.64	0.06	-	-	3.37	11.00	-7.63
5590	4.23	4.55	-	-	7.41	11.00	-3.59
5670	3.35	3.11	-	-	6.25	11.00	-4.75
5710	5.03	5.03	-	-	8.04	11.00	-2.96

Table 1144 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.33	-3.45	-	-	-0.38	10.44	-10.82
5610	1.65	1.47	-	-	4.57	10.44	-5.87
5690	2.34	2.46	-	-	5.41	10.44	-5.03

Table 1145 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.33	-3.45	-	-	-0.38	11.00	-11.38
5610	1.65	1.47	-	-	4.57	11.00	-6.43
5690	2.34	2.46	-	-	5.41	11.00	-5.59

Table 1146 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-9.41	-9.66	-	-	-6.52	10.44	-16.96

Table 1147 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-9.41	-9.66	-	-	-6.52	11.00	-17.52

Table 1148 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	5.66	5.64	-	-	8.66	10.44	-1.78
5600 (RU52.37)	6.09	5.57	-	-	8.85	10.44	-1.59
5620 (RU52.37)	6.10	5.80	-	-	8.96	10.44	-1.48
5700 (RU52.40)	4.45	4.50	-	-	7.48	10.44	-2.96
5720 (RU52.39)	5.10	5.14	-	-	8.13	10.44	-2.31
5720 (RU52.40)	-2.88	-3.26	-	-	-0.06	10.44	-10.50

Table 1149 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	5.66	5.64	-	-	8.66	11.00	-2.34
5600 (RU52.37)	6.09	5.57	-	-	8.85	11.00	-2.15
5620 (RU52.37)	6.10	5.80	-	-	8.96	11.00	-2.04
5700 (RU52.40)	4.45	4.50	-	-	7.48	11.00	-3.52
5720 (RU52.39)	5.10	5.14	-	-	8.13	11.00	-2.87
5720 (RU52.40)	-2.88	-3.26	-	-	-0.06	11.00	-11.06

Table 1150 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	6.08	5.62	-	-	8.87	10.44	-1.57
5600 (RU106.53)	5.95	5.62	-	-	8.80	10.44	-1.65
5700 (RU106.54)	5.49	5.80	-	-	8.66	10.44	-1.79
5720 (RU106.53)	5.94	5.71	-	-	8.84	10.44	-1.61
5720 (RU106.54)	5.82	5.64	-	-	8.74	10.44	-1.70

Table 1151 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	6.08	5.62	-	-	8.87	11.00	-2.13
5600 (RU106.53)	5.95	5.62	-	-	8.80	11.00	-2.20
5700 (RU106.54)	5.49	5.80	-	-	8.66	11.00	-2.34
5720 (RU106.53)	5.94	5.71	-	-	8.84	11.00	-2.16
5720 (RU106.54)	5.82	5.64	-	-	8.74	11.00	-2.26

Table 1152 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 52 + RU Size 26.70)	5.55	5.51	-	-	8.54	10.44	-1.90
5580 (RU Size 52 + RU Size 26.70)	5.83	5.86	-	-	8.85	10.44	-1.59
5600 (RU Size 52 + RU Size 26.70)	5.63	5.45	-	-	8.55	10.44	-1.89
5700 (RU Size 52 + RU Size 26.72)	2.54	2.64	-	-	5.60	10.44	-4.84
5720 (RU Size 52 + RU Size 26.71)	5.13	4.63	-	-	7.90	10.44	-2.55
5720 (RU Size 52 + RU Size 26.72)	5.77	5.56	-	-	8.68	10.44	-1.77

Table 1153 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 52 + RU Size 26.70)	5.55	5.51	-	-	8.54	11.00	-2.46
5580 (RU Size 52 + RU Size 26.70)	5.83	5.86	-	-	8.85	11.00	-2.15
5600 (RU Size 52 + RU Size 26.70)	5.63	5.45	-	-	8.55	11.00	-2.45
5700 (RU Size 52 + RU Size 26.72)	2.54	2.64	-	-	5.60	11.00	-5.40
5720 (RU Size 52 + RU Size 26.71)	5.13	4.63	-	-	7.90	11.00	-3.10
5720 (RU Size 52 + RU Size 26.72)	5.77	5.56	-	-	8.68	11.00	-2.32

Table 1154 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 106 + RU Size 26.82)	5.99	5.52	-	-	8.77	10.44	-1.67
5580 (RU Size 106 + RU Size 26.82)	5.94	5.88	-	-	8.92	10.44	-1.52
5600 (RU Size 106 + RU Size 26.82)	5.83	5.20	-	-	8.54	10.44	-1.90
5700 (RU Size 106 + RU Size 26.83)	5.80	5.90	-	-	8.86	10.44	-1.58
5720 (RU Size 106 + RU Size 26.82)	5.78	5.66	-	-	8.73	10.44	-1.72
5720 (RU Size 106 + RU Size 26.83)	6.18	5.91	-	-	9.06	10.44	-1.39

Table 1155 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 106 + RU Size 26.82)	5.99	5.52	-	-	8.77	11.00	-2.23
5580 (RU Size 106 + RU Size 26.82)	5.94	5.88	-	-	8.92	11.00	-2.08
5600 (RU Size 106 + RU Size 26.82)	5.83	5.20	-	-	8.54	11.00	-2.46
5700 (RU Size 106 + RU Size 26.83)	5.80	5.90	-	-	8.86	11.00	-2.14
5720 (RU Size 106 + RU Size 26.82)	5.78	5.66	-	-	8.73	11.00	-2.27
5720 (RU Size 106 + RU Size 26.83)	6.18	5.91	-	-	9.06	11.00	-1.94

Table 1156 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530 (RU Size 484 + RU Size 242.93)	-5.76	-6.07	-	-	-2.90	10.44	-13.34
5610 (RU Size 484 + RU Size 242.90)	-2.53	-2.92	-	-	0.29	10.44	-10.16
5690 (RU Size 484 + RU Size 242.90)	2.21	2.13	-	-	5.18	10.44	-5.26
5690 (RU Size 484 + RU Size 242.93)	2.24	2.03	-	-	5.15	10.44	-5.29

Table 1157 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530 (RU Size 484 + RU Size 242.93)	-5.76	-6.07	-	-	-2.90	11.00	-13.90
5610 (RU Size 484 + RU Size 242.90)	-2.53	-2.92	-	-	0.29	11.00	-10.71
5690 (RU Size 484 + RU Size 242.90)	2.21	2.13	-	-	5.18	11.00	-5.82
5690 (RU Size 484 + RU Size 242.93)	2.24	2.03	-	-	5.15	11.00	-5.85

Table 1158 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.94)	-7.18	-7.38	-	-	-4.27	10.44	-14.71

Table 1159 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.94)	-7.18	-7.38	-	-	-4.27	11.00	-15.27

Table 1160 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.95)	-7.08	-7.68	-	-	-4.36	10.44	-14.80

Table 1161 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.95)	-7.08	-7.68	-	-	-4.36	11.00	-15.36

Table 1162 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.85	-8.47	-	-	-5.14	10.44	-15.58

Table 1163 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.85	-8.47	-	-	-5.14	11.00	-16.14

Table 1164 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.76	-8.40	-	-	-5.06	10.44	-15.50

Table 1165 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.76	-8.40	-	-	-5.06	11.00	-16.06

Table 1166 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	1.52	1.29	-	-	4.41	29.44	-25.03
5745	6.61	6.14	-	-	9.39	29.65	-20.26
5785	6.38	6.77	-	-	9.59	29.65	-20.06
5825	6.63	6.24	-	-	9.45	29.65	-20.20

Table 1167 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-0.11	-0.32	-	-	2.80	29.44	-26.64
5755	3.61	3.20	-	-	6.42	29.65	-23.22
5795	3.39	3.35	-	-	6.38	29.65	-23.27

Table 1168 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.55	-4.46	-	-	-1.49	29.44	-30.94
5775	-1.65	-1.67	-	-	1.35	29.65	-28.30

Table 1169 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	1.38	1.17	-	-	4.29	29.44	-25.16
5745	6.24	6.52	-	-	9.39	29.65	-20.25
5785	6.12	6.19	-	-	9.16	29.65	-20.48
5825	6.29	5.95	-	-	9.13	29.65	-20.51

Table 1170 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-0.50	-0.70	-	-	2.41	29.44	-27.04
5755	3.32	3.29	-	-	6.31	29.65	-23.33
5795	3.42	3.14	-	-	6.29	29.65	-23.35

Table 1171 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.14	-4.56	-	-	-1.34	29.44	-30.78
5775	-0.75	-1.20	-	-	2.04	29.65	-27.61

Table 1172 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	6.42	6.35	-	-	9.40	29.65	-20.25
5785 (RU26.0)	6.47	6.31	-	-	9.40	29.65	-20.24
5825 (RU26.8)	6.19	6.15	-	-	9.18	29.65	-20.47

Table 1173 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.39)	0.56	0.22	-	-	3.40	29.44	-26.04
5720 (RU52.40)	2.91	2.65	-	-	5.79	29.44	-23.65
5745 (RU52.37)	7.08	6.56	-	-	9.84	29.65	-19.81
5785 (RU52.37)	6.58	6.25	-	-	9.43	29.65	-20.22
5825 (RU52.40)	6.58	6.84	-	-	9.72	29.65	-19.93

Table 1174 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.53)	-17.85	-17.95	-	-	-14.89	29.44	-44.33
5720 (RU106.54)	2.24	1.46	-	-	4.88	29.44	-24.56
5745 (RU106.53)	7.12	6.91	-	-	10.03	29.65	-19.62
5785 (RU106.53)	7.26	7.06	-	-	10.17	29.65	-19.48
5825 (RU106.54)	6.90	7.14	-	-	10.03	29.65	-19.61

Table 1175 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 52 + RU Size 26.71)	-22.01	-13.76	-	-	-13.16	29.44	-42.60
5720 (RU Size 52 + RU Size 26.72)	1.57	1.26	-	-	4.43	29.44	-25.02
5745 (RU Size 52 + RU Size 26.70)	6.53	6.55	-	-	9.55	29.65	-20.10
5785 (RU Size 52 + RU Size 26.70)	6.99	6.51	-	-	9.77	29.65	-19.88
5825 (RU Size 52 + RU Size 26.72)	6.37	6.43	-	-	9.41	29.65	-20.24

Table 1176 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 106 + RU Size 26.82)	-14.05	-11.95	-	-	-9.86	29.44	-39.30
5720 (RU Size 106 + RU Size 26.83)	1.68	1.55	-	-	4.62	29.44	-24.82
5745 (RU Size 106 + RU Size 26.82)	7.19	6.89	-	-	10.06	29.65	-19.59
5785 (RU Size 106 + RU Size 26.82)	6.76	6.52	-	-	9.65	29.65	-20.00
5825 (RU Size 106 + RU Size 26.83)	6.42	6.53	-	-	9.48	29.65	-20.16

Table 1177 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690 (RU Size 484 + RU Size 242.90)	-2.73	-3.25	-	-	0.03	29.44	-29.42
5690 (RU Size 484 + RU Size 242.93)	-49.73	-44.94	-	-	-43.70	29.44	-73.14
5775 (RU Size 484 + RU Size 242.90)	-2.22	-2.47	-	-	0.67	29.65	-28.98
5775 (RU Size 484 + RU Size 242.93)	-2.39	-2.65	-	-	0.49	29.65	-29.16

Table 1178 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	3.43	3.13	-	-	6.29	8.09	-1.80
5220	3.08	2.98	-	-	6.04	8.09	-2.05
5240	3.18	3.07	-	-	6.14	8.09	-1.95

Table 1179 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-1.21	-1.43	-	-	1.69	8.09	-6.40
5230	2.95	2.84	-	-	5.90	8.09	-2.18

Table 1180 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-5.27	-5.70	-	-	-2.47	8.09	-10.56

Table 1181 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.68	-10.26	-	-	-6.95	8.09	-15.04

Table 1182 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	3.09	2.93	-	-	6.02	8.09	-2.07
5220	3.18	2.86	-	-	6.03	8.09	-2.06
5240	2.85	2.82	-	-	5.84	8.09	-2.25

Table 1183 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-2.00	-2.14	-	-	0.94	8.09	-7.15
5230	3.12	2.90	-	-	6.02	8.09	-2.07

Table 1184 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-6.24	-6.47	-	-	-3.34	8.09	-11.43

Table 1185 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.35	-10.59	-	-	-7.46	8.09	-15.55

Table 1186 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-3.81	-3.78	-	-	-0.78	8.91	8.13	10.00	-1.87
5220	-3.82	-4.05	-	-	-0.92	8.91	7.99	10.00	-2.01
5240	-3.92	-4.01	-	-	-0.96	8.91	7.95	10.00	-2.05

Table 1187 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-4.17	-4.62	-	-	-1.38	8.91	7.53	10.00	-2.47
5230	-4.08	-4.20	-	-	-1.13	8.91	7.78	10.00	-2.22

Table 1188 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-7.17	-7.35	-	-	-4.25	8.91	4.66	10.00	-5.34

Table 1189 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-10.45	-10.64	-	-	-7.53	8.91	1.38	10.00	-8.62

Table 1190 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-4.20	-4.10	-	-	-1.14	8.91	7.77	10.00	-2.23
5220	-3.86	-4.01	-	-	-0.93	8.91	7.99	10.00	-2.01
5240	-4.06	-4.06	-	-	-1.05	8.91	7.86	10.00	-2.14

Table 1191 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-4.30	-4.63	-	-	-1.45	8.91	7.46	10.00	-2.54
5230	-4.13	-4.44	-	-	-1.28	8.91	7.64	10.00	-2.36

Table 1192 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-7.22	-7.36	-	-	-4.28	8.91	4.63	10.00	-5.37

Table 1193 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.91
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-9.74	-10.03	-	-	-6.87	8.91	2.04	10.00	-7.96

Table 1194 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	3.06	3.10	-	-	6.09	7.79	-1.70
5300	2.81	2.45	-	-	5.64	7.79	-2.14
5320	2.89	2.52	-	-	5.72	7.79	-2.07

Table 1195 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	3.06	3.10	-	-	6.09	11.00	-4.91
5300	2.81	2.45	-	-	5.64	11.00	-5.36
5320	2.89	2.52	-	-	5.72	11.00	-5.28

Table 1196 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.54	2.12	-	-	5.35	7.79	-2.44
5310	-0.74	-1.11	-	-	2.09	7.79	-5.70

Table 1197 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.54	2.12	-	-	5.35	11.00	-5.65
5310	-0.74	-1.11	-	-	2.09	11.00	-8.91

Table 1198 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-5.24	-5.56	-	-	-2.39	7.79	-10.18

Table 1199 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-5.24	-5.56	-	-	-2.39	11.00	-13.39

Table 1200 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.95	-10.29	-	-	-7.10	7.79	-14.89

Table 1201 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	3.15	2.63	-	-	5.91	7.79	-1.88
5300	2.85	2.68	-	-	5.78	7.79	-2.01
5320	3.11	2.69	-	-	5.92	7.79	-1.87

Table 1202 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	3.15	2.63	-	-	5.91	11.00	-5.09
5300	2.85	2.68	-	-	5.78	11.00	-5.22
5320	3.11	2.69	-	-	5.92	11.00	-5.08

Table 1203 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.64	1.94	-	-	5.31	7.79	-2.47
5310	-2.34	-2.63	-	-	0.53	7.79	-7.26

Table 1204 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.64	1.94	-	-	5.31	11.00	-5.69
5310	-2.34	-2.63	-	-	0.53	11.00	-10.47

Table 1205 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.02
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-6.68	-6.91	-	-	-3.78	7.79	-11.57

Table 1206 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-6.68	-6.91	-	-	-3.78	11.00	-14.78

Table 1207 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.28	-10.66	-	-	-7.46	7.79	-15.25

Table 1208 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.29	-10.63	-	-	-7.45	11.00	-18.45

Table 1209 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.86	-9.84	-	-	-6.84	11.00	-17.84

Table 1210 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.61	2.01	-	-	5.33	7.44	-2.11
5600	2.72	2.18	-	-	5.47	7.44	-1.97
5700	2.58	2.25	-	-	5.43	7.44	-2.00
5720	2.60	2.35	-	-	5.48	7.44	-1.95

Table 1211 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.61	2.01	-	-	5.33	11.00	-5.67
5600	2.72	2.18	-	-	5.47	11.00	-5.53
5700	2.58	2.25	-	-	5.43	11.00	-5.57
5720	2.60	2.35	-	-	5.48	11.00	-5.52

Table 1212 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.27	-1.04	-	-	2.37	7.44	-5.06
5590	1.62	0.61	-	-	4.16	7.44	-3.28
5670	1.93	1.74	-	-	4.85	7.44	-2.59
5710	2.07	1.76	-	-	4.93	7.44	-2.50

Table 1213 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.27	-1.04	-	-	2.37	11.00	-8.63
5590	1.62	0.61	-	-	4.16	11.00	-6.84
5670	1.93	1.74	-	-	4.85	11.00	-6.15
5710	2.07	1.76	-	-	4.93	11.00	-6.07

Table 1214 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.60	-4.76	-	-	-1.67	7.44	-9.10
5610	-1.49	-1.91	-	-	1.32	7.44	-6.12
5690	-0.58	-0.93	-	-	2.26	7.44	-5.18

Table 1215 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.60	-4.76	-	-	-1.67	11.00	-12.67
5610	-1.49	-1.91	-	-	1.32	11.00	-9.68
5690	-0.58	-0.93	-	-	2.26	11.00	-8.74

Table 1216 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-10.01	-10.56	-	-	-7.27	7.44	-14.70

Table 1217 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-10.01	-10.56	-	-	-7.27	11.00	-18.27

Table 1218 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.56	2.13	-	-	5.36	7.44	-2.07
5600	2.46	1.92	-	-	5.21	7.44	-2.23
5700	1.42	1.27	-	-	4.36	7.44	-3.08
5720	2.35	2.15	-	-	5.26	7.44	-2.18

Table 1219 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.56	2.13	-	-	5.36	11.00	-5.64
5600	2.46	1.92	-	-	5.21	11.00	-5.79
5700	1.42	1.27	-	-	4.36	11.00	-6.64
5720	2.35	2.15	-	-	5.26	11.00	-5.74

Table 1220 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-1.25	-2.04	-	-	1.38	7.44	-6.05
5590	1.55	0.44	-	-	4.04	7.44	-3.40
5670	1.68	1.66	-	-	4.68	7.44	-2.76
5710	1.97	1.74	-	-	4.87	7.44	-2.57

Table 1221 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-1.25	-2.04	-	-	1.38	11.00	-9.62
5590	1.55	0.44	-	-	4.04	11.00	-6.96
5670	1.68	1.66	-	-	4.68	11.00	-6.32
5710	1.97	1.74	-	-	4.87	11.00	-6.13

Table 1222 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.56	-5.32	-	-	-1.92	7.44	-9.35
5610	-1.41	-2.41	-	-	1.13	7.44	-6.31
5690	-0.64	-1.23	-	-	2.08	7.44	-5.35

Table 1223 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.56	-5.32	-	-	-1.92	11.00	-12.92
5610	-1.41	-2.41	-	-	1.13	11.00	-9.87
5690	-0.64	-1.23	-	-	2.08	11.00	-8.92

Table 1224 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-9.27	-9.94	-	-	-6.59	7.44	-14.02

Table 1225 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-9.27	-9.94	-	-	-6.59	11.00	-17.59

Table 1226 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-1.60	-2.02	-	-	1.21	26.44	-25.23
5745	6.35	6.29	-	-	9.33	26.64	-17.31
5785	6.17	5.86	-	-	9.03	26.64	-17.61
5825	6.10	5.99	-	-	9.06	26.64	-17.58

Table 1227 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-3.64	-3.91	-	-	-0.76	26.44	-27.20
5755	3.49	2.96	-	-	6.24	26.64	-20.40
5795	3.39	2.86	-	-	6.14	26.64	-20.50

Table 1228 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-7.03	-7.67	-	-	-4.33	26.44	-30.76
5775	-2.64	-2.99	-	-	0.20	26.64	-26.44

Table 1229 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-1.48	-2.27	-	-	1.15	26.44	-25.28
5745	6.40	6.04	-	-	9.23	26.64	-17.41
5785	6.46	5.89	-	-	9.19	26.64	-17.45
5825	6.08	6.02	-	-	9.06	26.64	-17.58

Table 1230 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-3.62	-3.96	-	-	-0.78	26.44	-27.21
5755	3.46	3.04	-	-	6.26	26.64	-20.37
5795	3.19	2.86	-	-	6.04	26.64	-20.60

Table 1231 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.56
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-7.51	-7.75	-	-	-4.62	26.44	-31.05
5775	-3.41	-3.72	-	-	-0.55	26.64	-27.19

Table 1232 - Maximum Power Spectral Density Results



FCC 47 CFR Part 15E, Limit Clause 15.407(a)

Condition of Operation	Frequency Range (MHz)			
	5150-5250	5250-5350	5470-5725	5725-5850
Max Conducted Power Spectral Density	17 dBm/MHz for master device 11 dBm/MHz for mobile/portable client device	11 dBm/MHz		30 dBm/500 kHz

Table 1233

ISED RSS-247, Limit Clause 7.3.1.2, 7.3.2.2, 7.3.3.2, 7.3.4.3 and 7.3.5.3

Device	Frequency Range (MHz)				
	5150-5250	5250-5350	5470-5725	5725-5850	5850-5895
OEM installed in vehicles	-	-	-	-	-
Other	≤10 dBm/MHz*	≤11 dBm/MHz	≤11 dBm/MHz	≤30 dBm/500kHz	Fixed Outdoor Access Point: 23 dBm/MHz* Fixed Outdoor Client: 17 dBm/MHz Indoor Access Point: 20 dBm/MHz Indoor Subordinate: 20 dBm/MHz Indoor Client: 14 dBm/MHz

Table 1234

*Maximum power spectral density specified as EIRP.



2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
1500VA AC Power Supply	iTech	IT7324	5907	-	O/P Mon
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5921	12	29-Nov-2026
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5922	12	29-Nov-2026
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5923	12	29-Nov-2026
Modular Power System Mainframe	Keysight Technologies	N6701C	5969	-	O/P Mon
DC Power Module 60V 20A 300W	Keysight Technologies	N6754A	5970	-	O/P Mon
Digital Multimeter	Fluke	115	6147	12	03-Jun-2027
Humidity and Temperature Meter	R.S Components	1364	6346	12	31-Mar-2027
MXA Signal Analyzer	Keysight Technologies	N9020B	6416	24	07-May-2027
MXA Signal Analyser	Keysight Technologies	N9020B	6417	24	14-Oct-2027
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6518	12	25-Feb-2027
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6519	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6520	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6521	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6522	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6529	12	25-Feb-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6530	12	25-Feb-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6531	12	25-Feb-2027
USB Wideband Power Sensor	Boonton	RTP5008	6587	12	25-Feb-2027
USB Wideband Power Sensor	Boonton	RTP5008	6588	12	25-Feb-2027
USB Wideband Power Sensor	Boonton	RTP5008	6589	12	25-Feb-2027
DC Power Module	Keysight Technologies	N6754A	6663	-	O/P Mon
Modular Power System Mainframe	Keysight Technologies	N6701C	6664	-	O/P Mon
Digital Thermometer	R.S Components	RS 5511	6739	12	02-Mar-2027
Thermostatic Chamber	Weiss Technik	LabEvent T/500/50/3	7315	24	O/P Mon

Table 1235

O/P Mon - Output Monitored using calibrated equipment



2.4 Emission Bandwidth

2.4.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)
FCC 47 CFR Part 15E, Clause 15.407 (e)
ISED RSS-247, Clause 7.3

2.4.2 Equipment Under Test and Modification State

A3375, S/N: CH6Q14YF9N - Modification State 0
A3375, S/N: CX4D4WHY7Q - Modification State 0

2.4.3 Date of Test

10-September-2026 to 24-September-2026

2.4.4 Test Method

The test was performed in accordance with ANSI C63.10 clause 6.9.3 for FCC measurements and ANSI C63.10 clause 12.5.2 for ISED measurements.

For modes of operation using multiple cores, measurements were made on each core but only the worst case results are reported. Worst case was considered as the narrowest results for 6 dB bandwidth and the widest result for 26 dB bandwidth and 99% occupied bandwidth.

2.4.5 Environmental Conditions

Ambient Temperature	20.9 - 24.0 °C
Relative Humidity	46.2 - 59.2 %



2.4.6 Test Results

5 GHz WLAN

Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	17.526	17.922
802.11n HT40	36.120	36.648
802.11ac VHT80	75.064	75.922
802.11ac VHT160	153.804	153.804
802.11ax HE20 SU	18.786	19.080
802.11ax HE40 SU	37.584	38.016
802.11ax HE80 SU	76.670	77.440
802.11ax HE160 SU	155.484	155.484
802.11a20	16.356	16.770
802.11a40	36.190	37.044
802.11a80	75.416	77.896
802.11a160	154.350	154.350

Table 1236 - 99% Bandwidth Summary Results - SISO

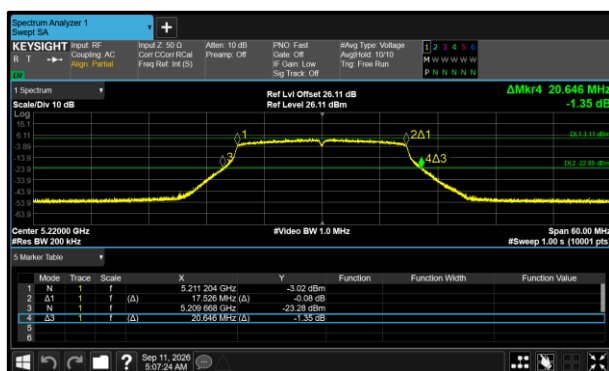


Figure 392 - 802.11n HT20 Minimum 99% OBW

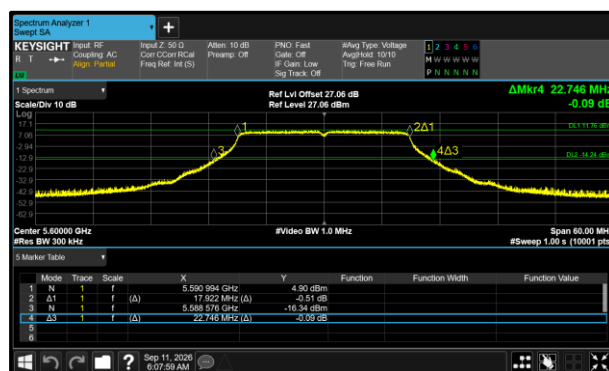


Figure 393 - 802.11n HT20 Maximum 99% OBW

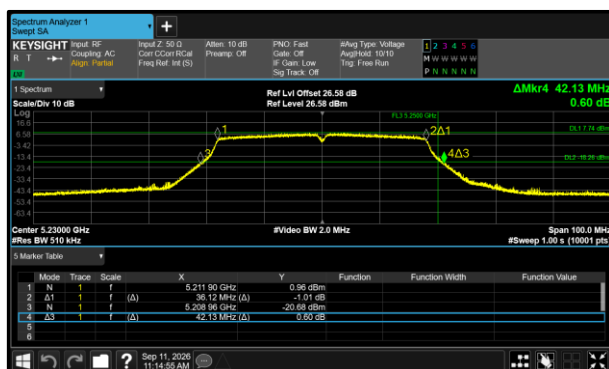


Figure 394 - 802.11n HT40 Minimum 99% OBW

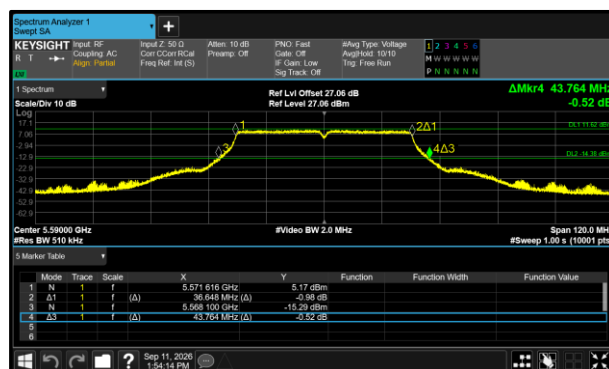


Figure 395 - 802.11n HT40 Maximum 99% OBW

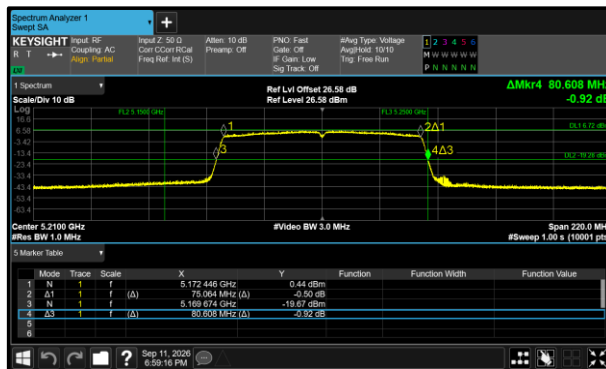


Figure 396 - 802.11ac VHT80 Minimum 99% OBW

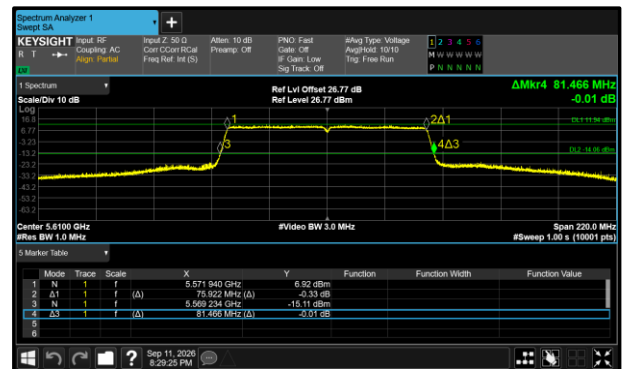


Figure 397 - 802.11ac VHT80 Maximum 99% OBW

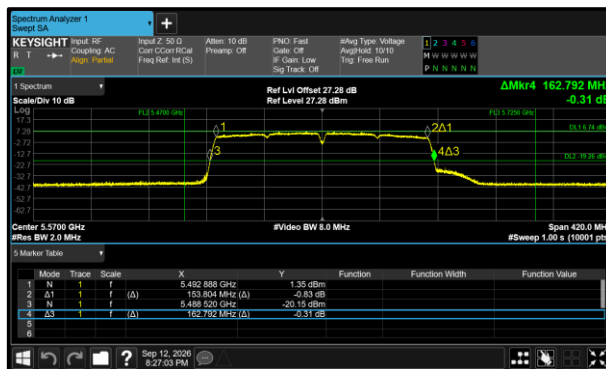


Figure 398 - 802.11ac VHT160 Minimum 99% OBW

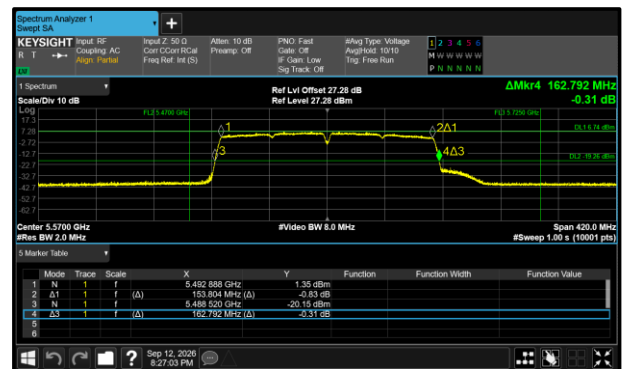


Figure 399 - 802.11ac VHT160 Maximum 99% OBW

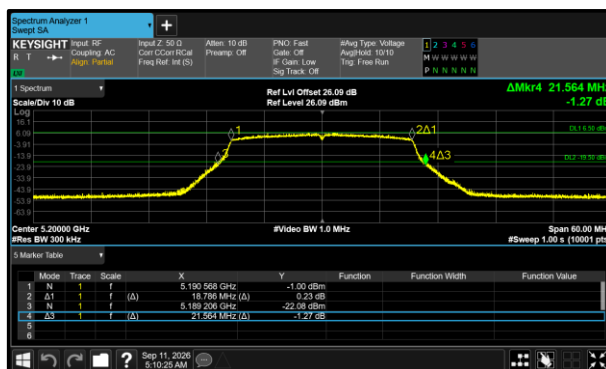


Figure 400 - 802.11ax HE20 SU Minimum 99% OBW

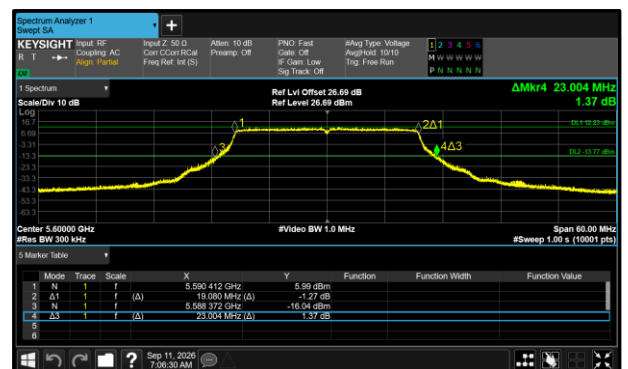


Figure 401 - 802.11ax HE20 SU Maximum 99% OBW

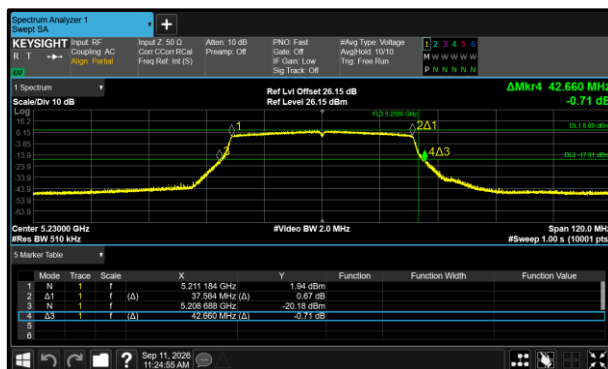


Figure 402 - 802.11ax HE40 SU Minimum 99% OBW

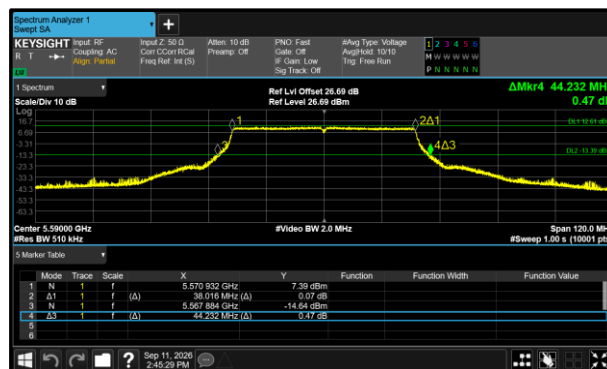


Figure 403 - 802.11ax HE40 SU Maximum 99% OBW

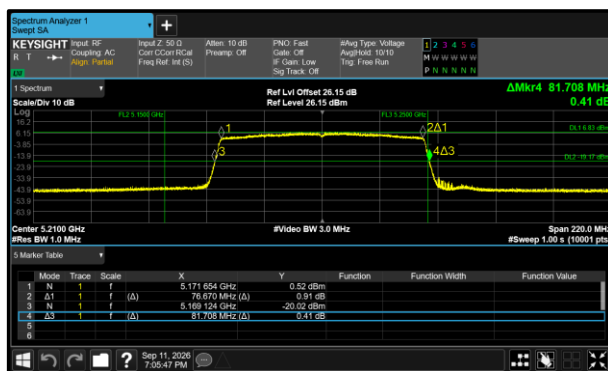


Figure 404 - 802.11ax HE80 SU Minimum 99% OBW

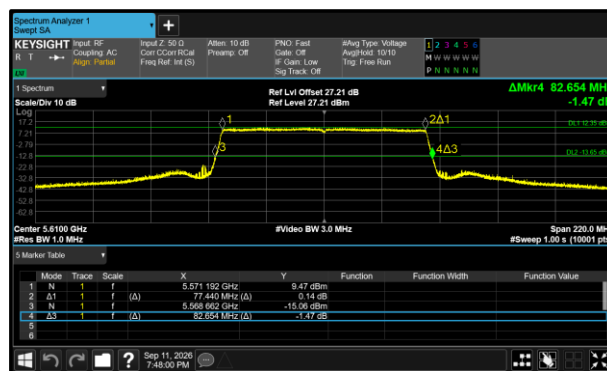


Figure 405 - 802.11ax HE80 SU Maximum 99% OBW

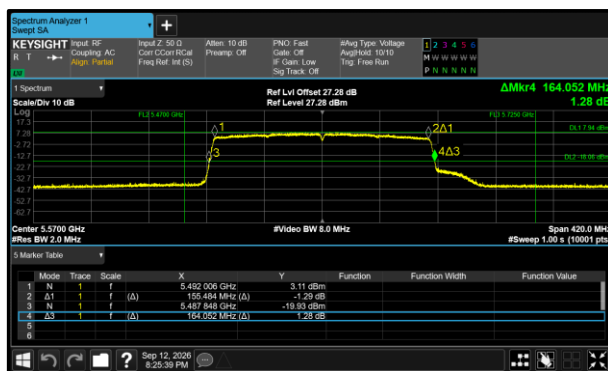


Figure 406 - 802.11ax HE160 SU Minimum 99% OBW

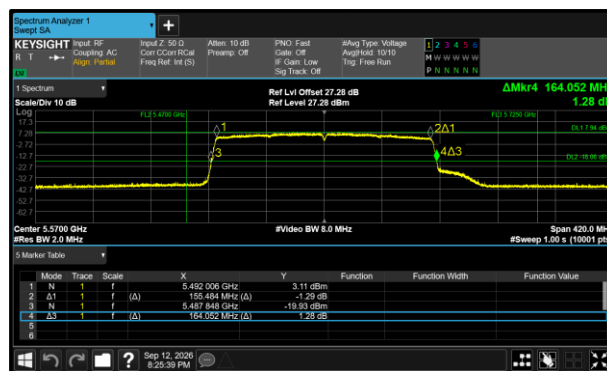
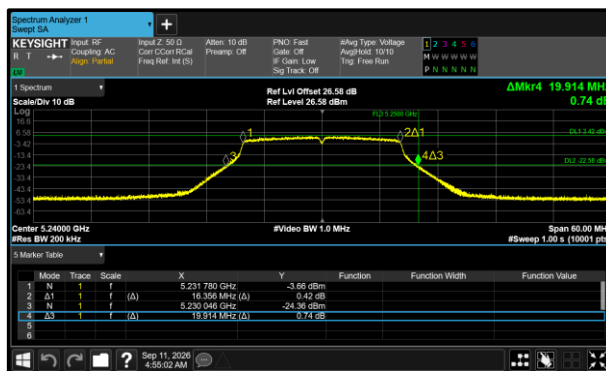


Figure 407 - 802.11ax HE160 SU Maximum 99% OBW



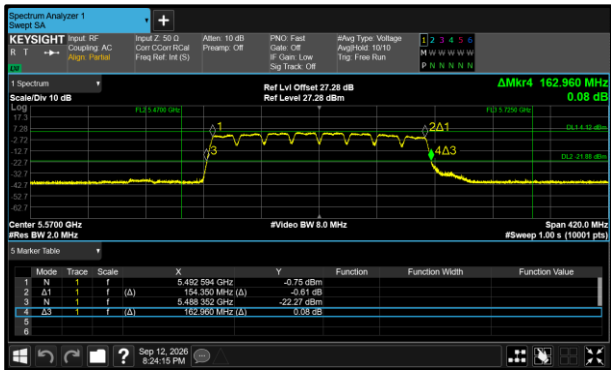


Figure 414 - 802.11a160 Minimum 99% OBW

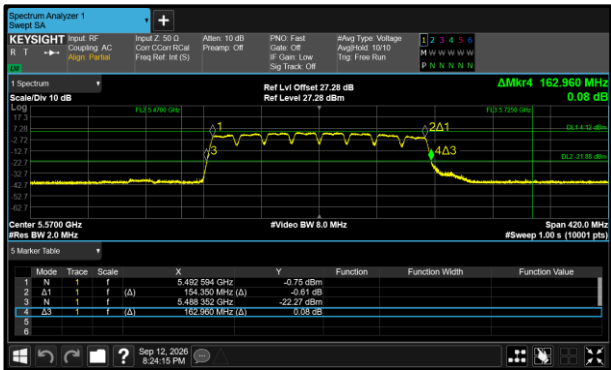


Figure 415 - 802.11a160 Maximum 99% OBW