

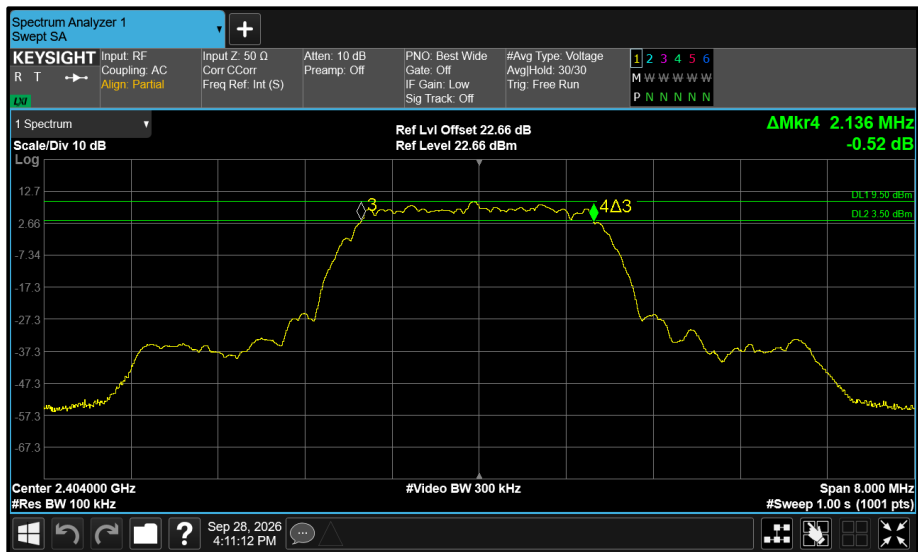


Figure 428 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

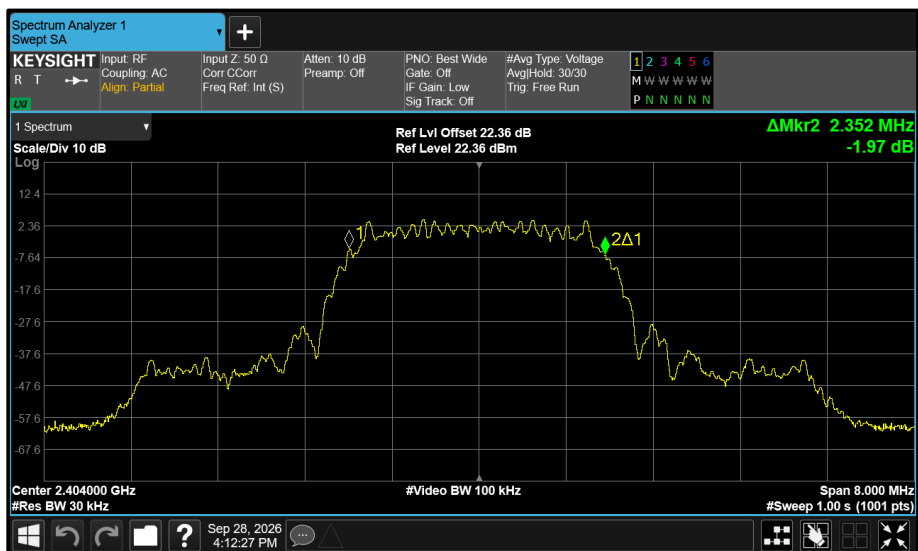


Figure 429 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

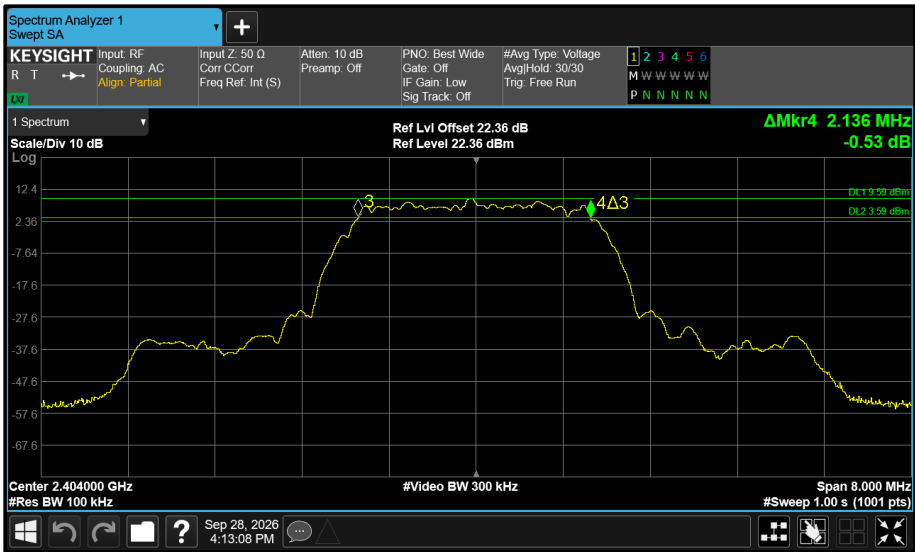


Figure 430 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

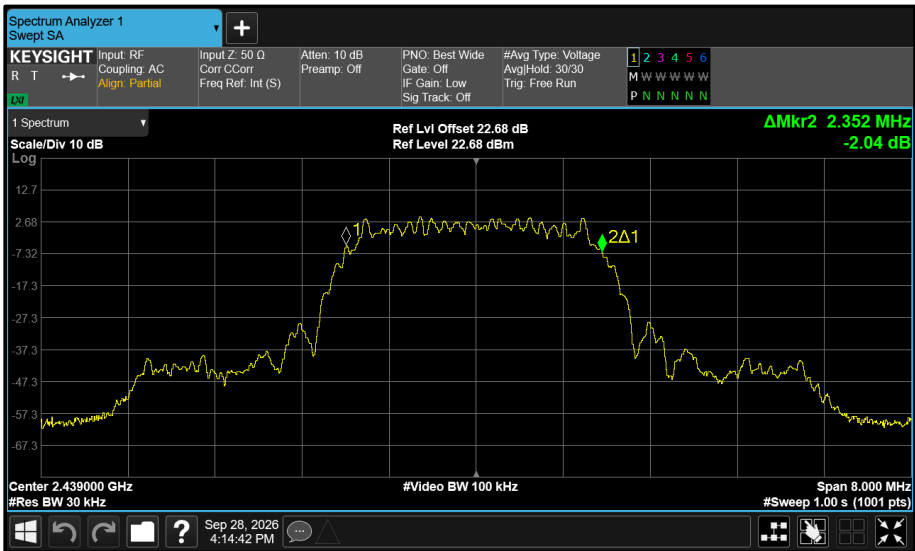
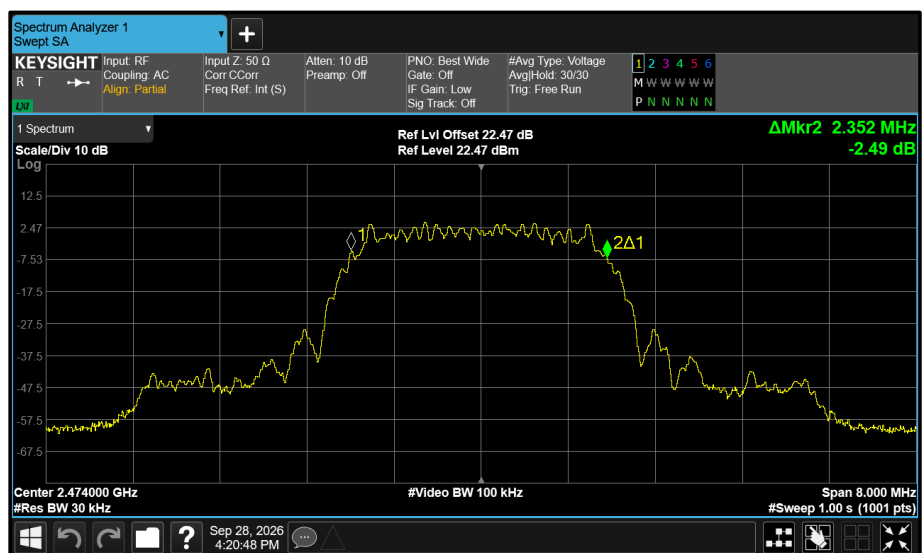
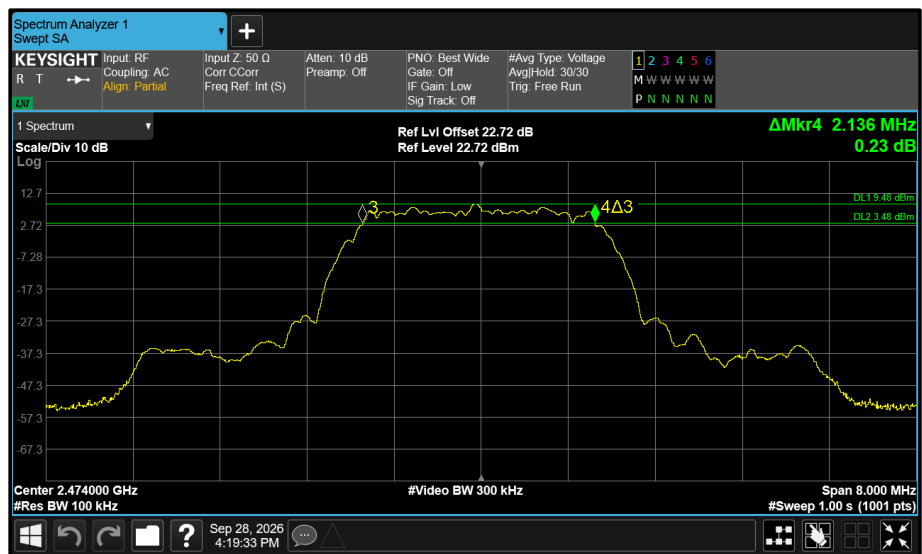


Figure 431 - Core 0 (A) 2439 MHz (CH37) 99% Bandwidth







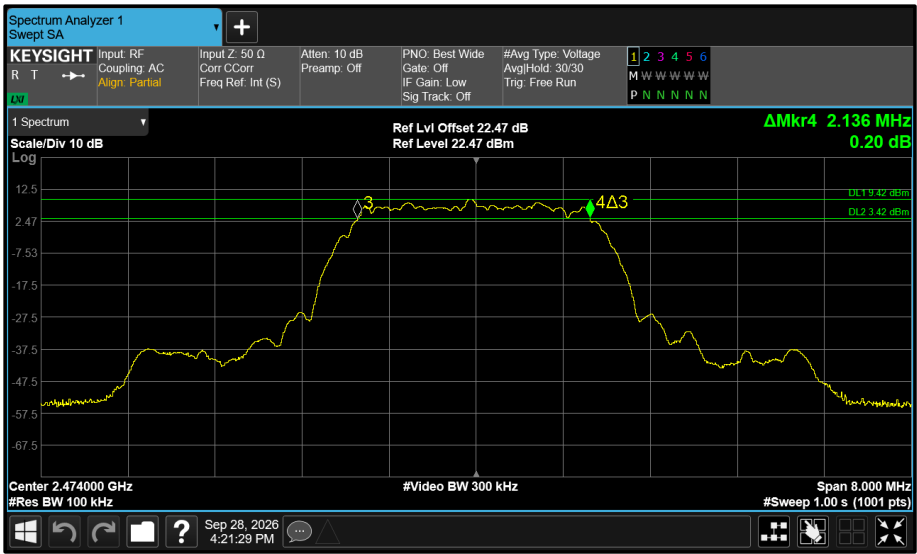


Figure 438 - Core 1 (B) 2474 MHz (CH72) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 6.3.1 (a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa HDR (8-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	0.570	0.570	-	-	≥500.0
2440	0.570	0.570	-	-	≥500.0
2476	0.570	0.570	-	-	≥500.0

Table 81 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	4.635	4.635	-	-	-
2440	4.635	4.650	-	-	-
2476	4.650	4.650	-	-	-

Table 82 - 99% Bandwidth Results

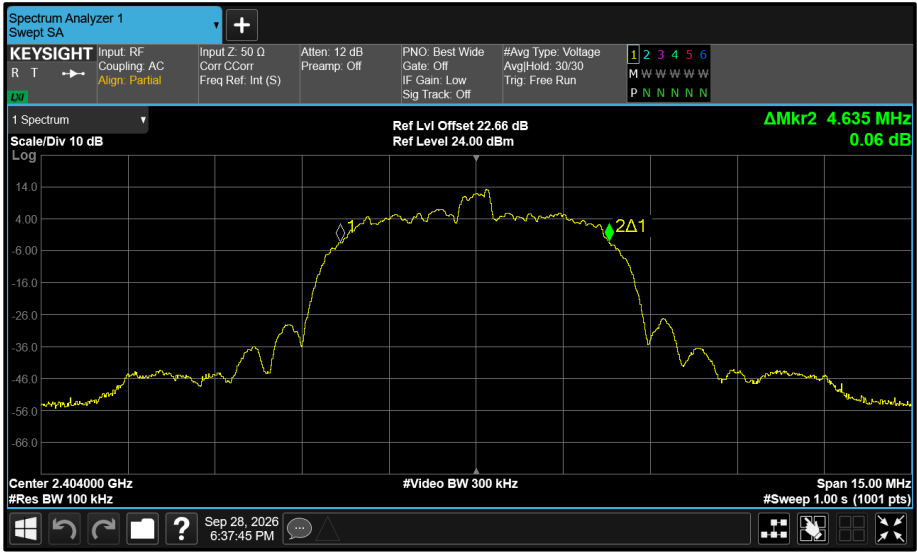


Figure 439 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

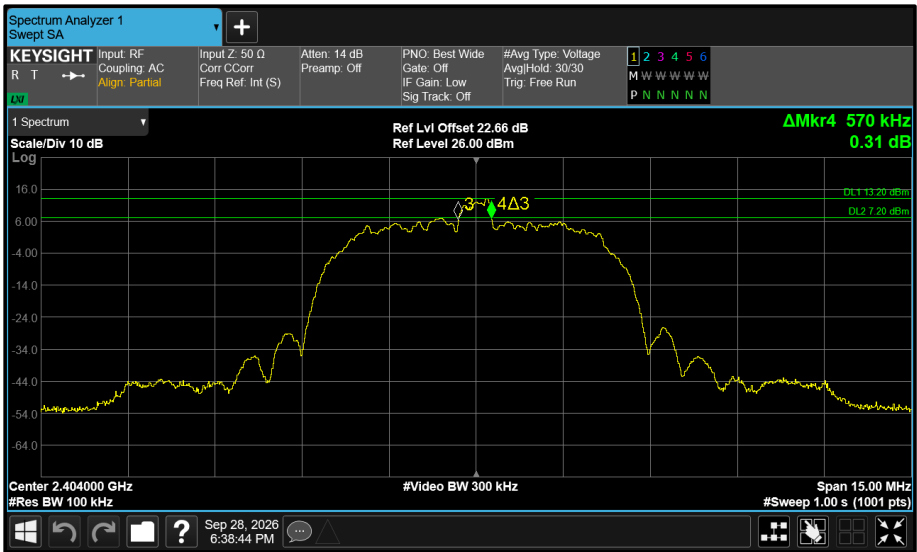


Figure 440 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

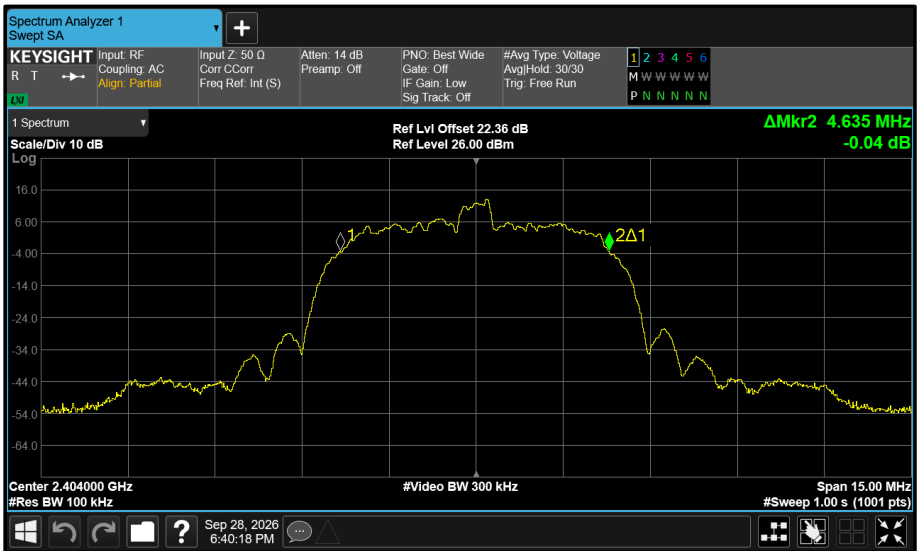


Figure 441 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

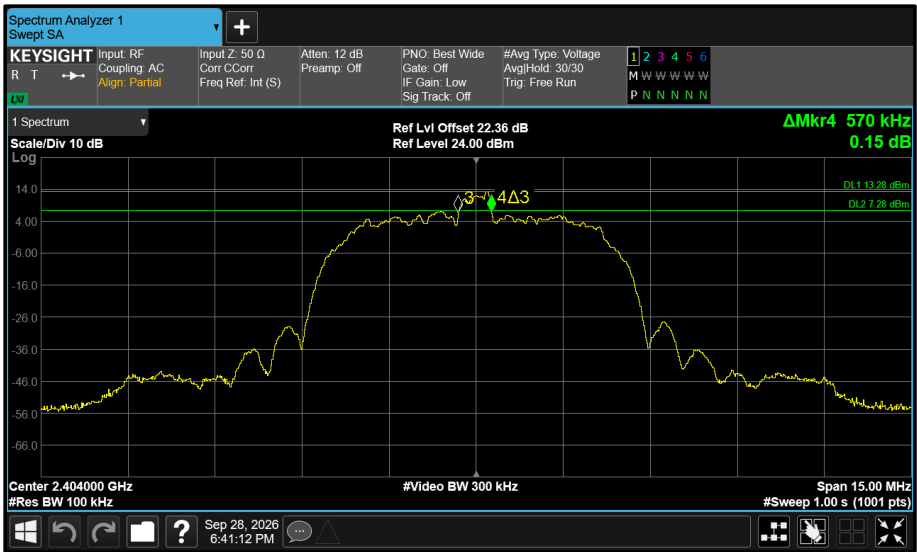


Figure 442 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

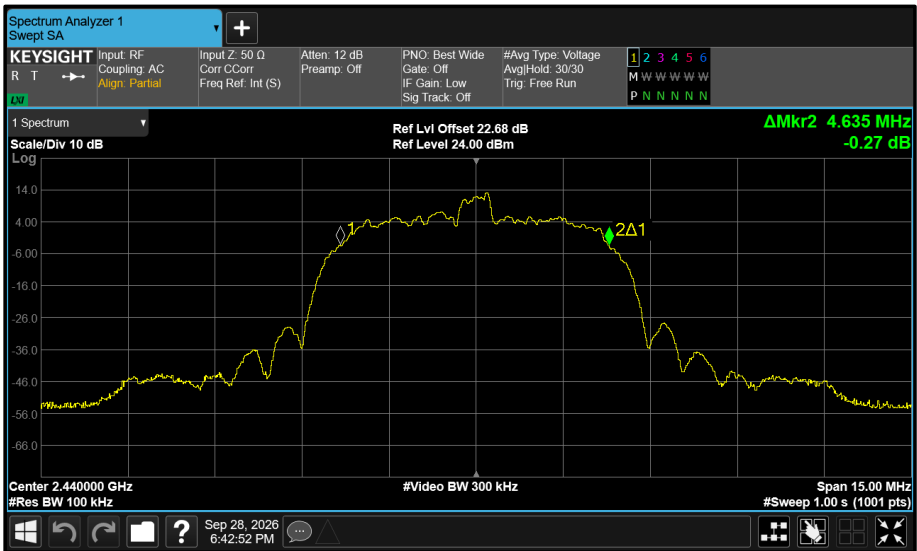


Figure 443 - Core 0 (A) 2440 MHz (CH38) 99% Bandwidth

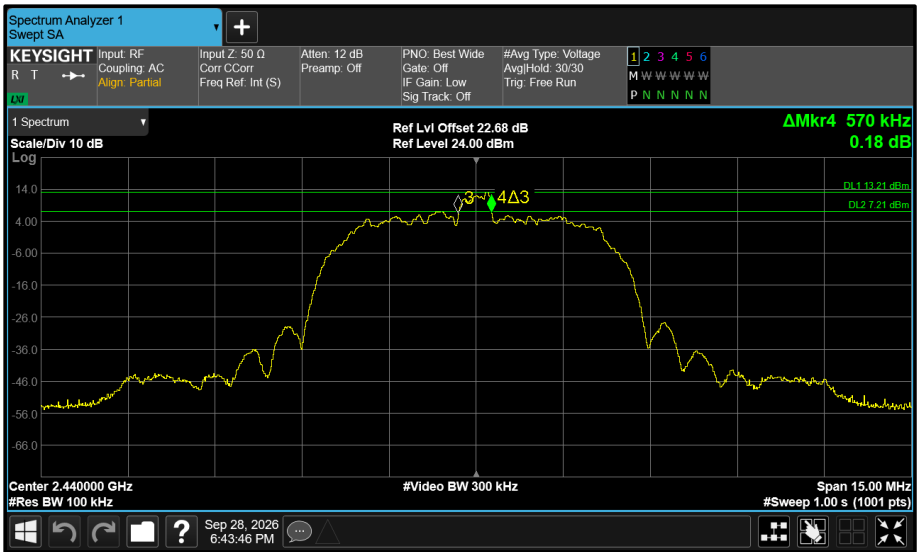


Figure 444 - Core 0 (A) 2440 MHz (CH38) 6 dB Bandwidth

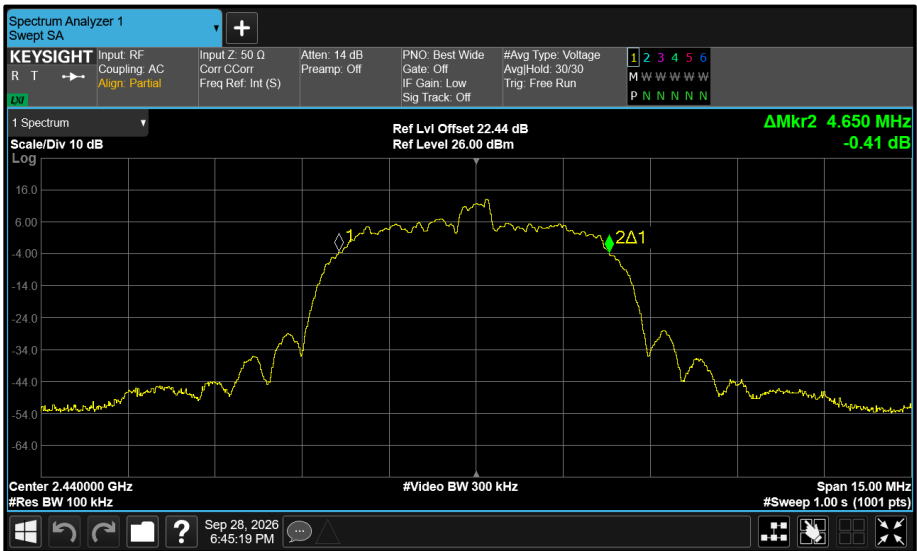


Figure 445 - Core 1 (B) 2440 MHz (CH38) 99% Bandwidth

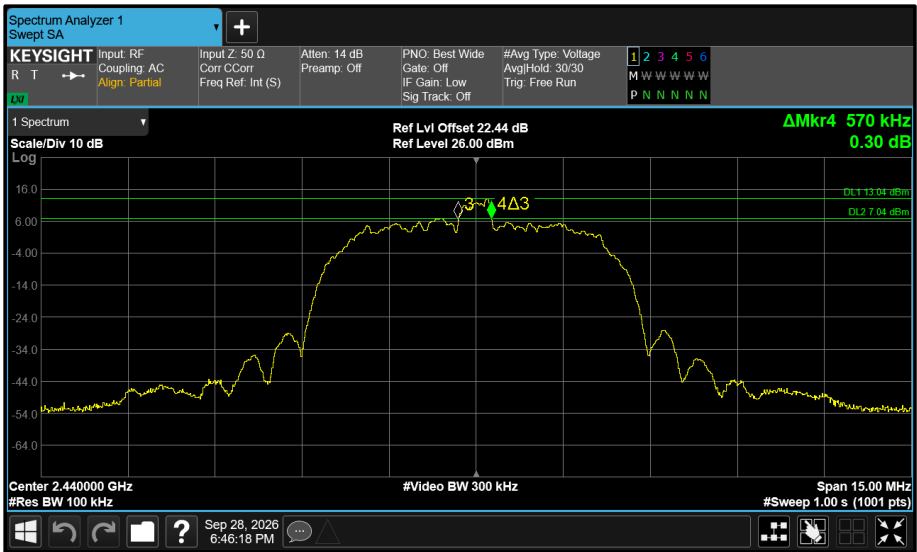


Figure 446 - Core 1 (B) 2440 MHz (CH38) 6 dB Bandwidth

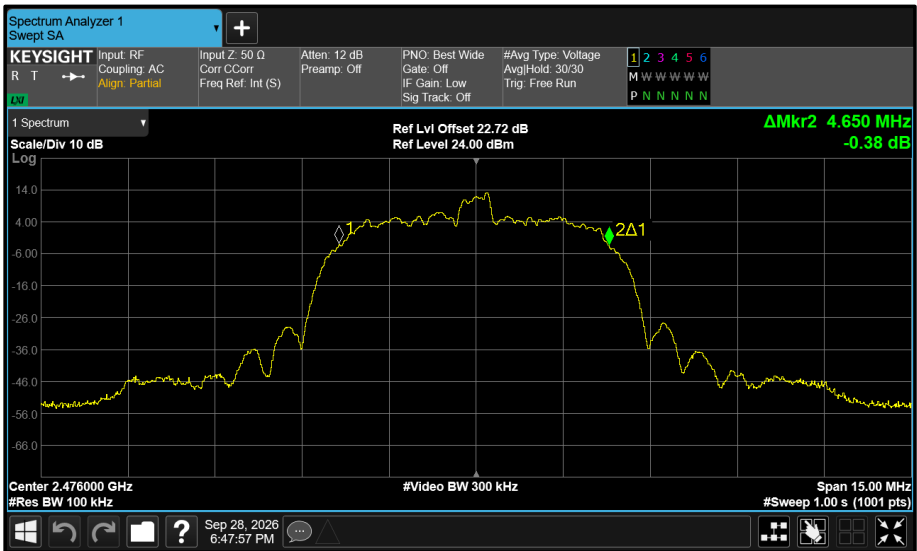


Figure 447 - Core 0 (A) 2476 MHz (CH74) 99% Bandwidth



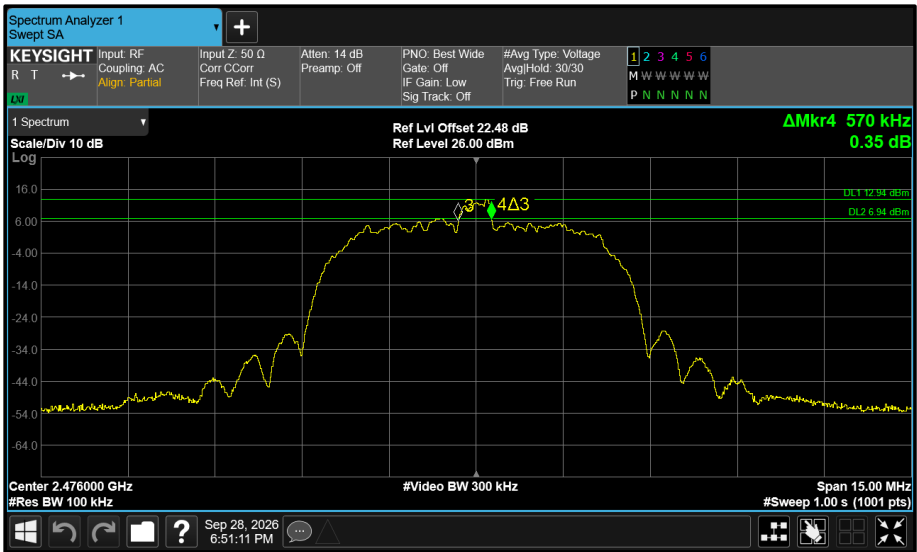


Figure 450 - Core 1 (B) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 6.3.1 (a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa HDRP (HDRPM4)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	3.040	4.040	-	-	≥500.0
2440	4.060	3.460	-	-	≥500.0
2475	4.040	3.460	-	-	≥500.0

Table 83 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	4.740	4.740	-	-	-
2440	4.740	4.740	-	-	-
2475	4.740	4.740	-	-	-

Table 84 - 99% Bandwidth Results

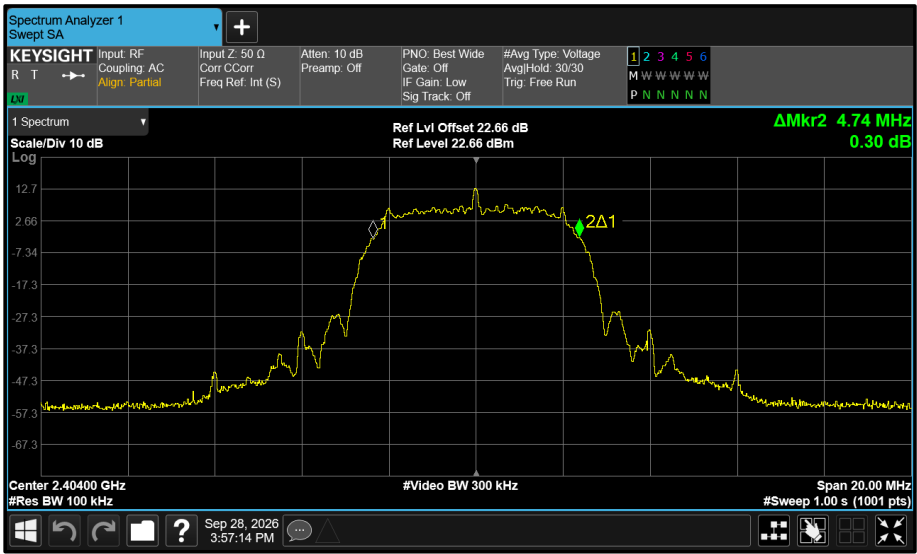


Figure 451 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

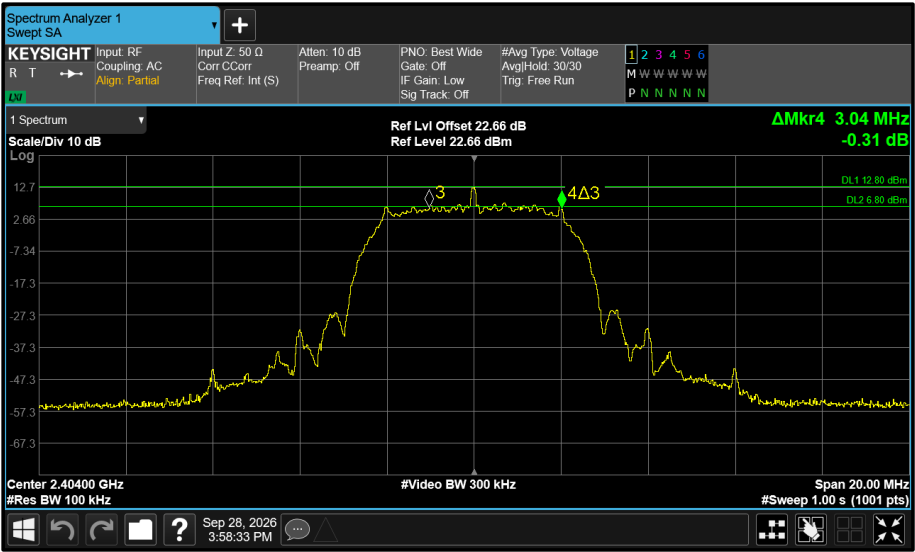


Figure 452 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

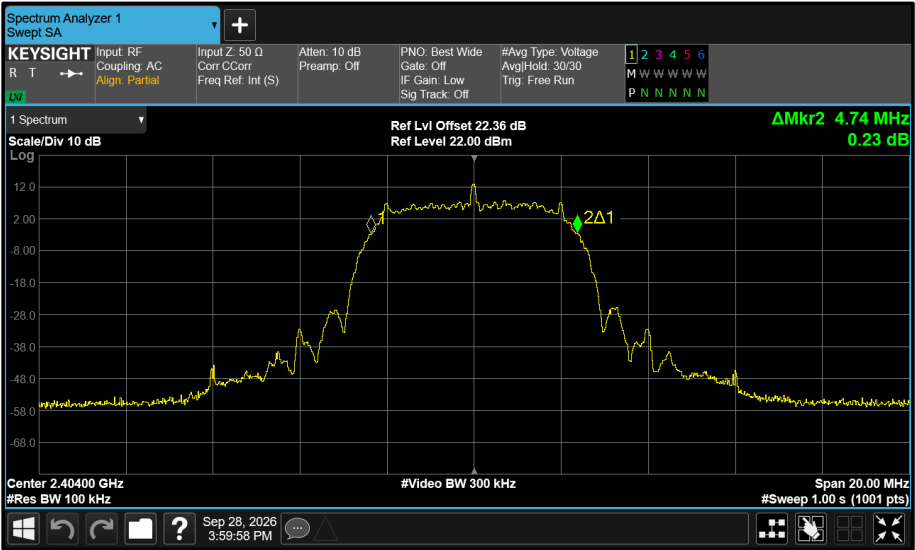


Figure 453 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

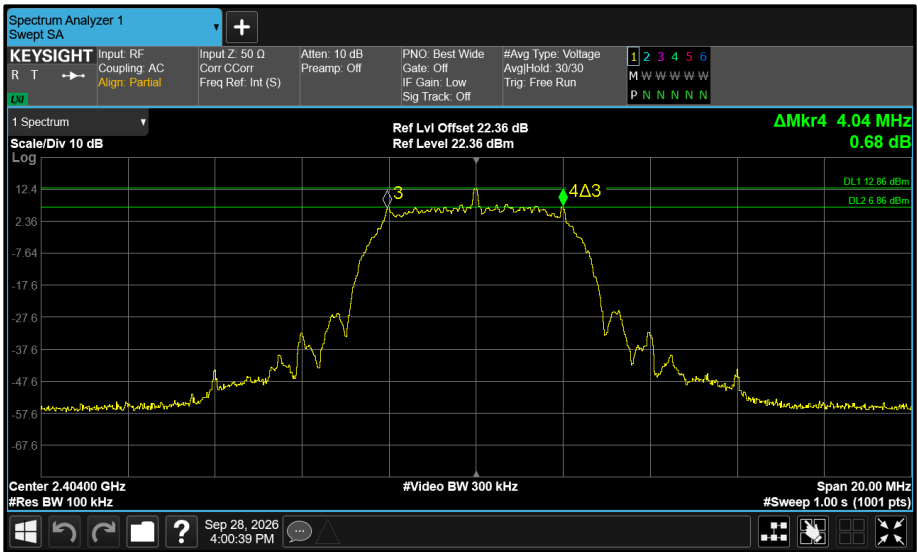


Figure 454 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

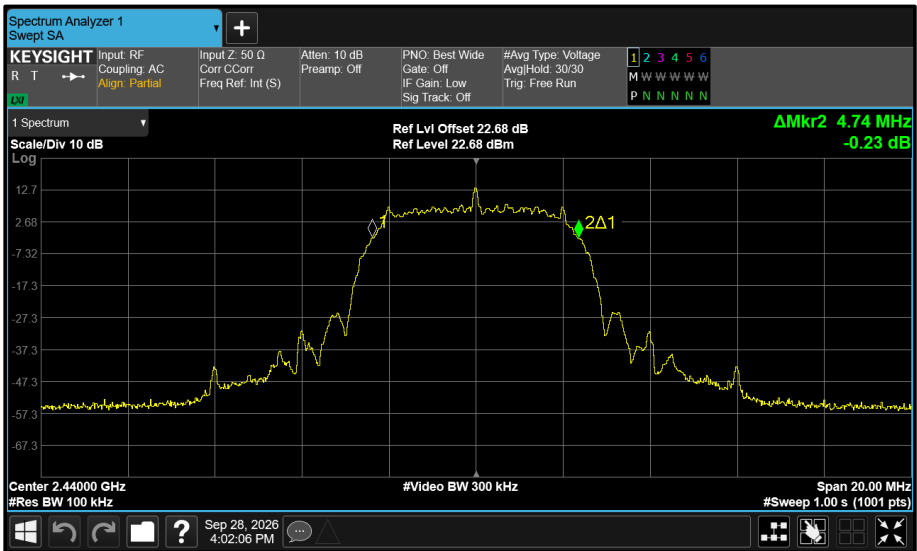


Figure 455 - Core 0 (A) 2440 MHz (CH38) 99% Bandwidth

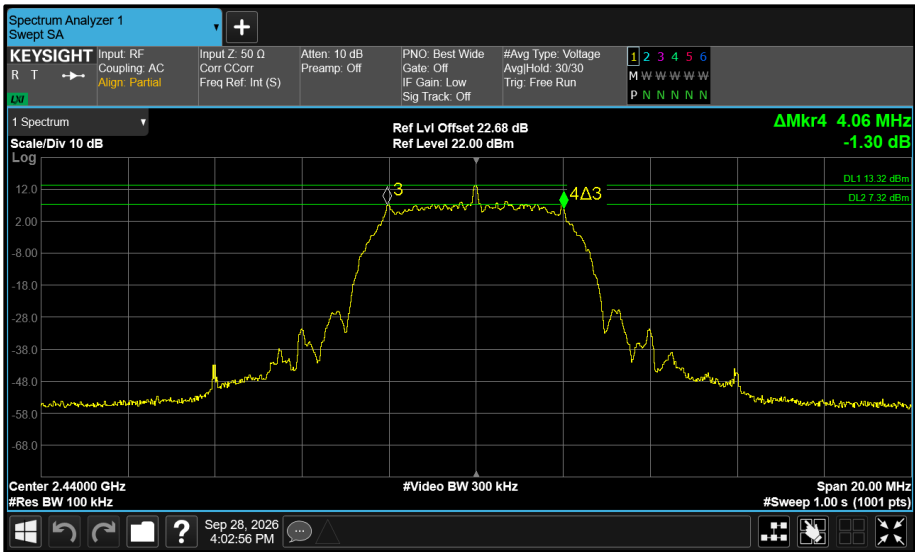


Figure 456 - Core 0 (A) 2440 MHz (CH38) 6 dB Bandwidth

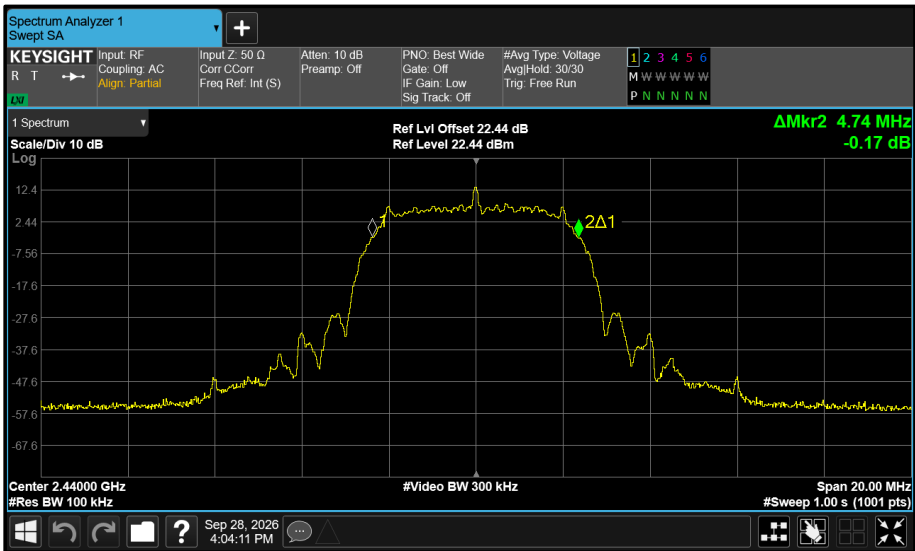


Figure 457 - Core 1 (B) 2440 MHz (CH38) 99% Bandwidth

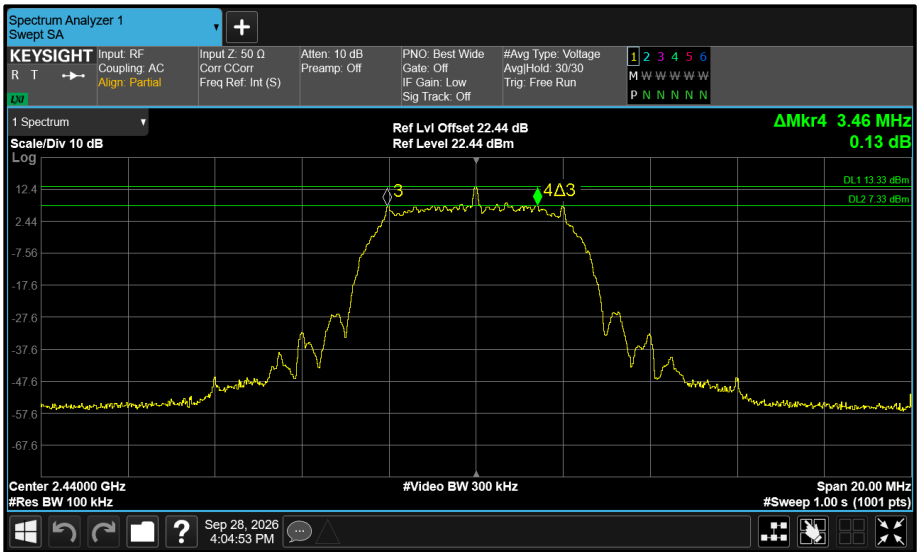


Figure 458 - Core 1 (B) 2440 MHz (CH38) 6 dB Bandwidth

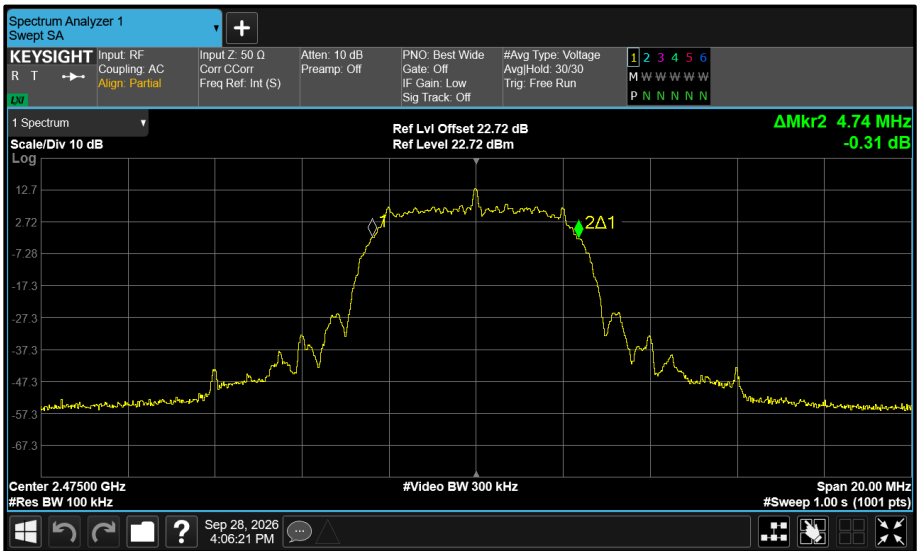


Figure 459 - Core 0 (A) 2475 MHz (CH73) 99% Bandwidth

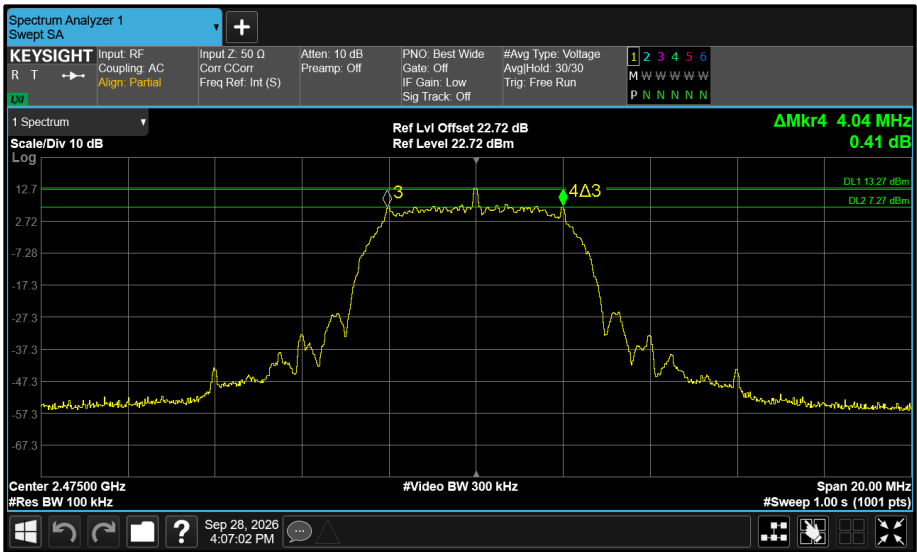


Figure 460 - Core 0 (A) 2475 MHz (CH73) 6 dB Bandwidth

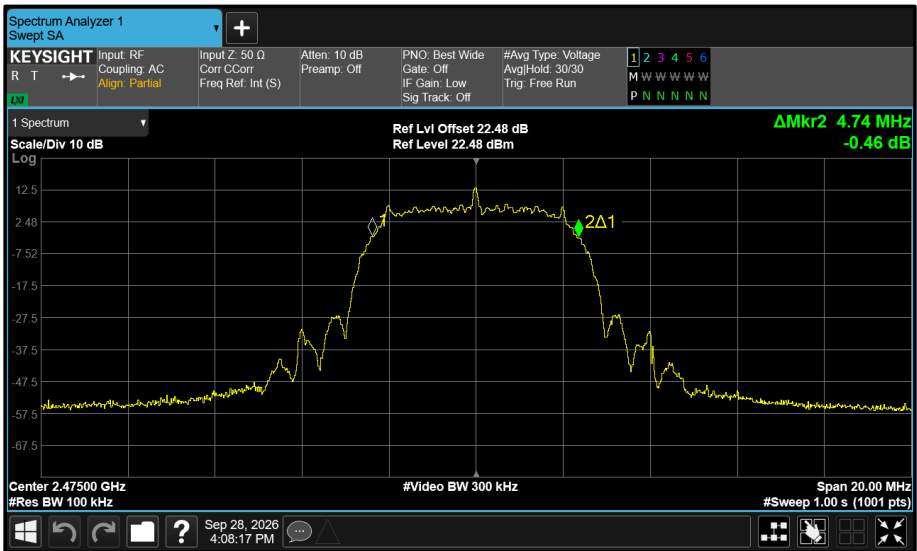


Figure 461 - Core 1 (B) 2475 MHz (CH73) 99% Bandwidth

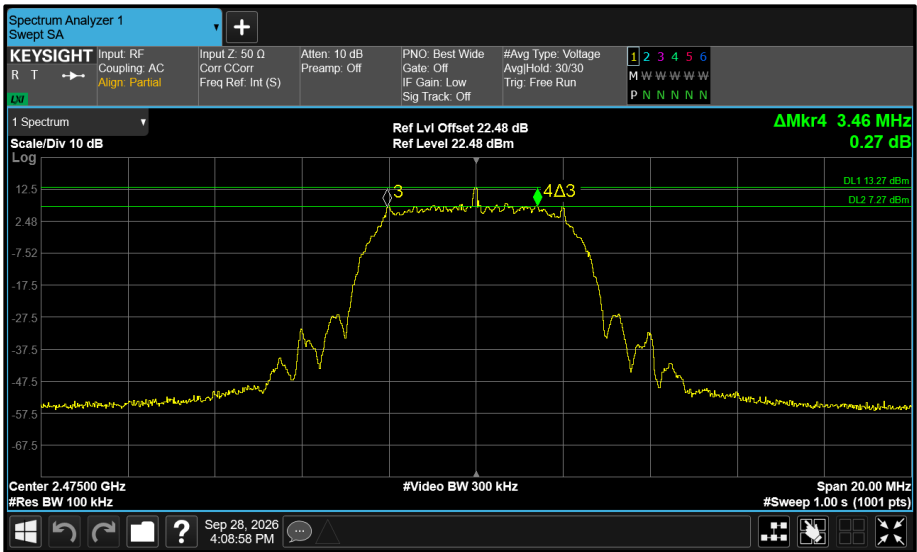


Figure 462 - Core 1 (B) 2475 MHz (CH73) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 6.3.1 (a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		
Note(s):	TxBF cores were tested independently whilst transmitting at the cores respective powers and summed after test		

DUT Configuration			
Mode:	ePa LE (LE 1M)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	0.668	0.668	-	-	≥500.0
2440	0.668	0.668	-	-	≥500.0
2480	0.664	0.668	-	-	≥500.0

Table 85 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	1.012	1.016	-	-	-
2440	1.016	1.016	-	-	-
2480	1.012	1.016	-	-	-

Table 86 - 99% Bandwidth Results

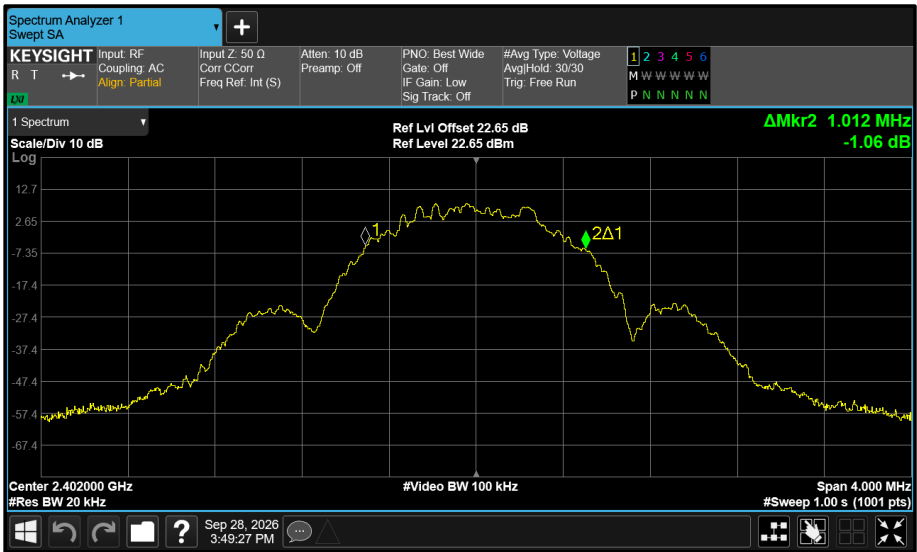


Figure 463 - Core 0 (A) 2402 MHz (CH37) 99% Bandwidth

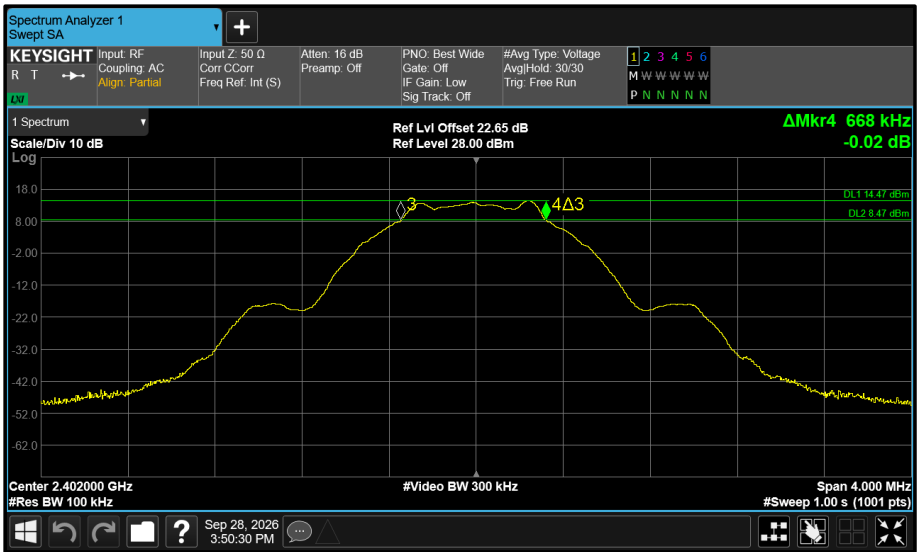


Figure 464 - Core 0 (A) 2402 MHz (CH37) 6 dB Bandwidth

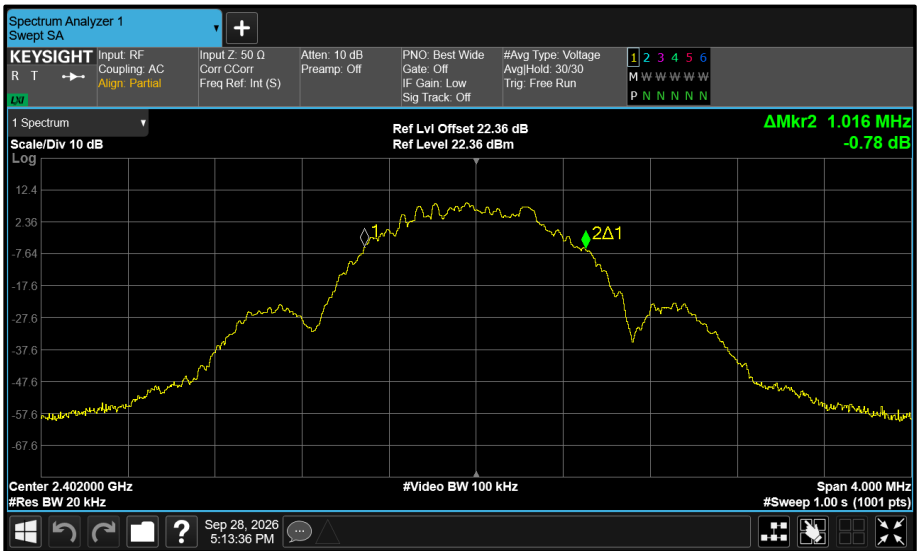


Figure 465 - Core 1 (B) 2402 MHz (CH37) 99% Bandwidth

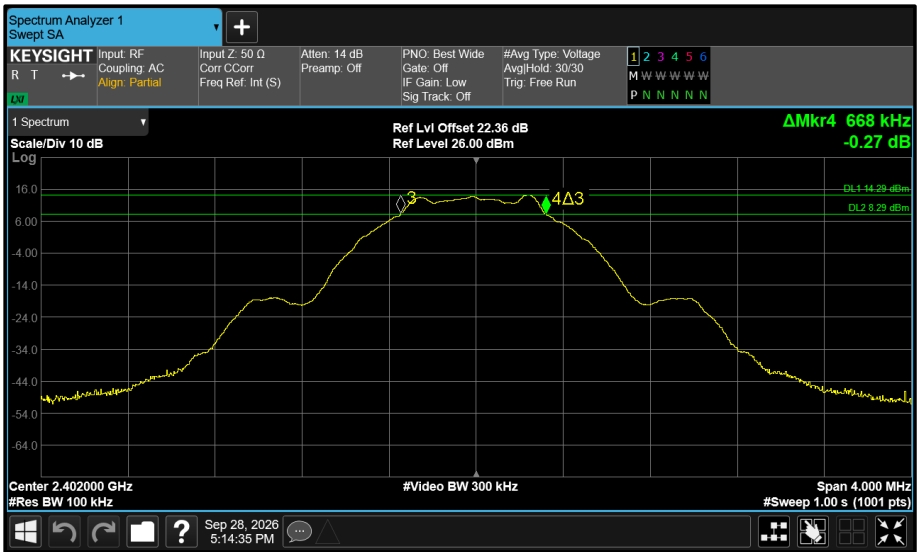


Figure 466 - Core 1 (B) 2402 MHz (CH37) 6 dB Bandwidth

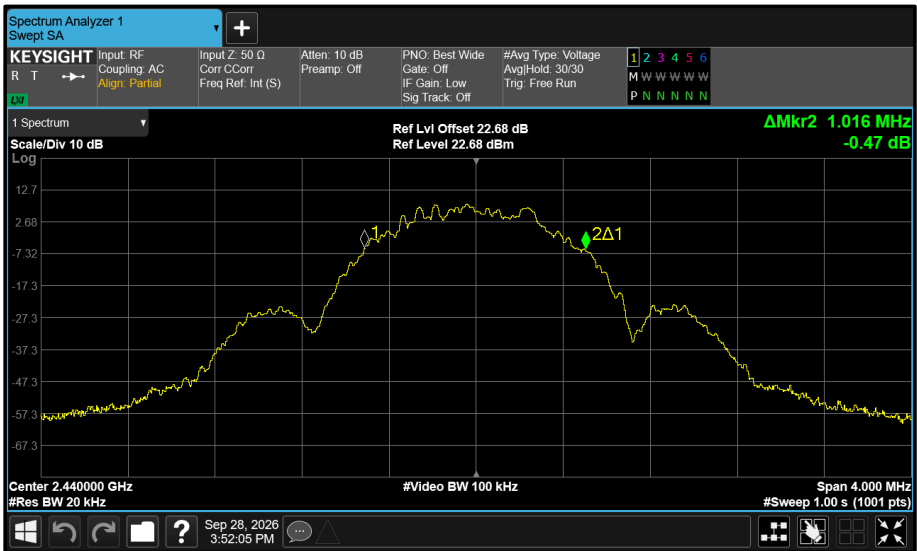


Figure 467 - Core 0 (A) 2440 MHz (CH17) 99% Bandwidth

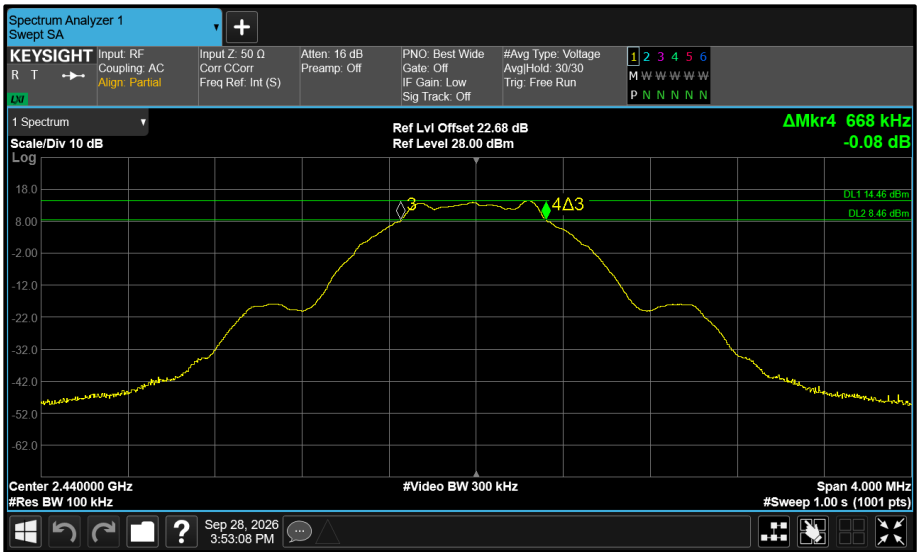


Figure 468 - Core 0 (A) 2440 MHz (CH17) 6 dB Bandwidth

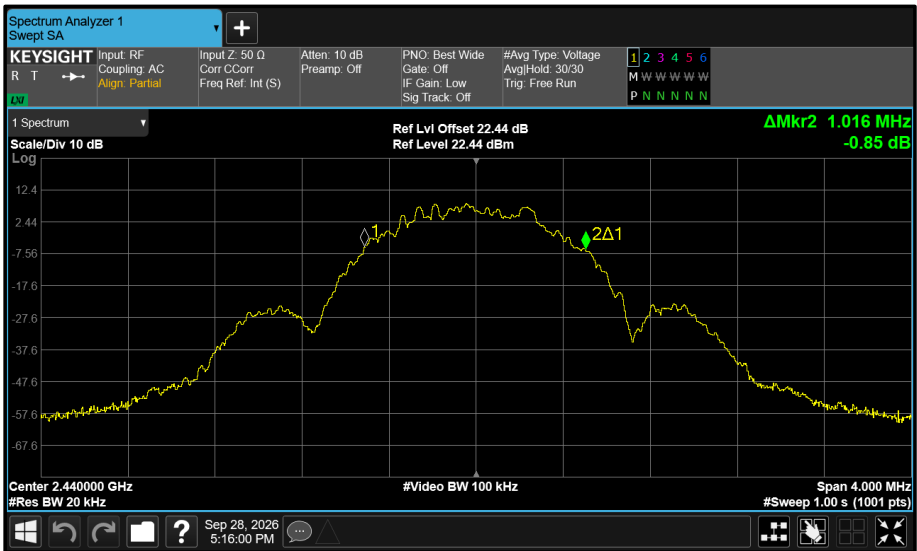


Figure 469 - Core 1 (B) 2440 MHz (CH17) 99% Bandwidth

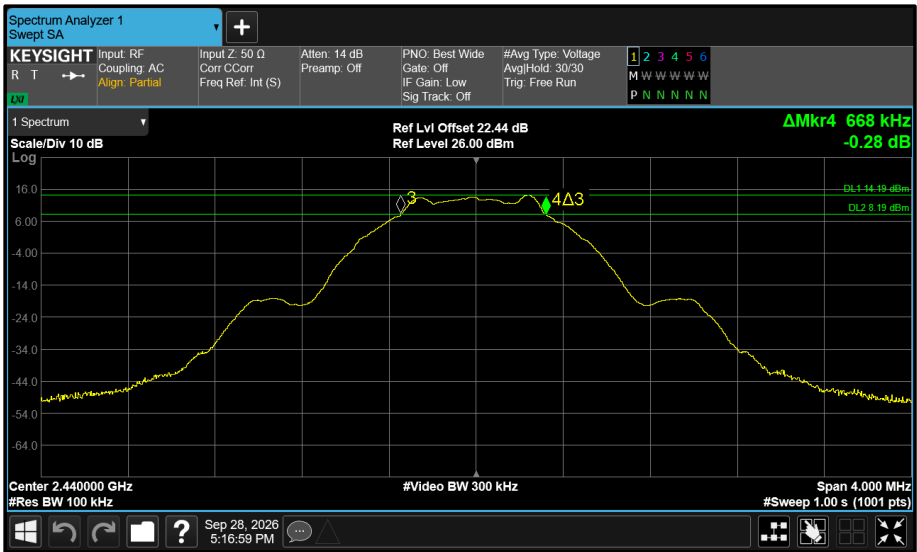


Figure 470 - Core 1 (B) 2440 MHz (CH17) 6 dB Bandwidth

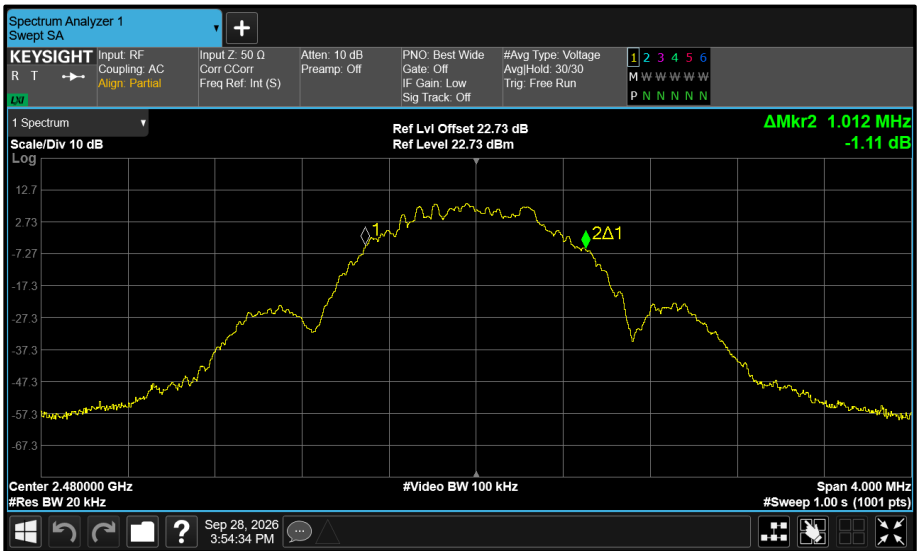


Figure 471 - Core 0 (A) 2480 MHz (CH39) 99% Bandwidth



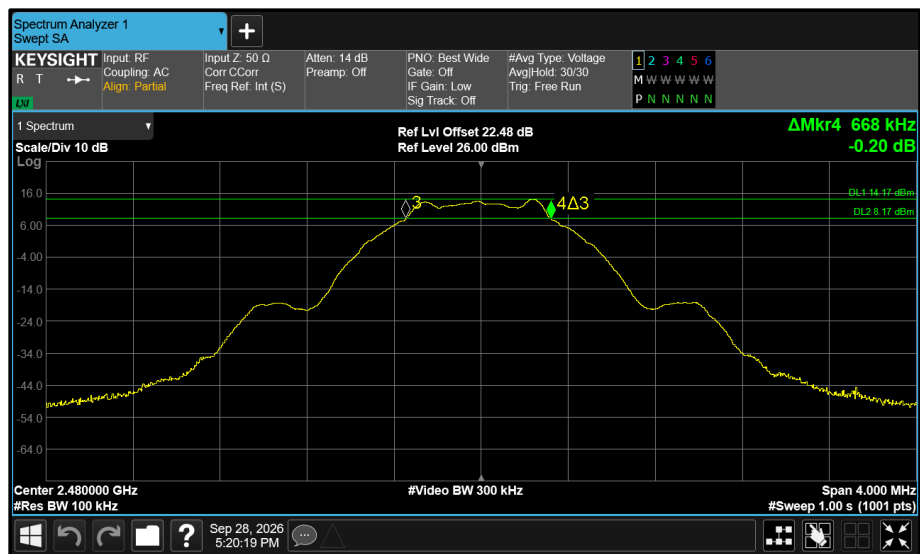


Figure 474 - Core 1 (B) 2480 MHz (CH39) 6 dB Bandwidth

FCC 47 CFR Part 15, Limit Clause 15.247(a)(2) and ISSED RSS-247, Clause 6.3.1(a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	02-Jan-2027
USB Power Sensor	Boonton	RTP5008	5820	12	16-Mar-2027
USB Power Sensor	Boonton	RTP5008	5821	12	16-Mar-2027
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5924	12	27-Feb-2027
Digital Multimeter	Fluke	115	6147	12	03-Jun-2027
Modular Power System mainframe	Keysight Technologies	N6701C	6151	-	O/P Mon
DC Power Module	Keysight Technologies	N6754A	6152	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	6419	24	16-Jun-2028
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6426	12	16-Mar-2027
Humidity and Temperature Meter	R.S Components	1364	6486	12	23-Jul-2027
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	25-Feb-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	25-Feb-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	25-Feb-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6528	12	25-Feb-2027
USB Wideband Power Sensor	Boonton	RTP5008	6585	12	27-Feb-2027
USB Wideband Power Sensor	Boonton	RTP5008	6586	12	27-Feb-2027
USB Wideband Power Sensor	Boonton	RTP5008	6591	12	16-Mar-2027
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon
DC Power Module	Keysight Technologies	N6754A	6666	-	O/P Mon
Modular Power System Mainframe	Keysight Technologies	N6701C	6667	-	O/P Mon
Digital Thermometer	R.S Components	RS 5511	6739	12	02-Mar-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6752	12	16-Mar-2027



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6753	12	16-Mar-2027
SCU Cable Assembly SCU	TUV SUD	SPECTRUM_SCU_CA	6754	0	16-Mar-2027
Thermostatic Chamber	Weiss Technik	LabEvent T/500/50/3	7316	24	O/P Mon
Thermostatic Chamber	Weiss Technik	LabEvent T/500/50/3	7317	24	O/P Mon

Table 87

O/P Mon - Output Monitored using calibrated equipment



2.3 Maximum Conducted Output Power

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)(3)
ISED RSS-247, Clause 6.3.2
ISED RSS-GEN, Clause 6.12

2.3.2 Equipment Under Test and Modification State

A3375, S/N: CX4D4WHY7Q - Modification State 0

2.3.3 Date of Test

28-September-2026 to 01-October-2026

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10 clause 11.9.1.2 Method PKPM1.

MIMO output port summing was performed in accordance with KDB 662911 D01.

2.3.5 Environmental Conditions

Ambient Temperature	21.8 - 22.7°C
Relative Humidity	45.8 - 49.5%



2.3.6 Test Results

2.4 GHz Bluetooth - DTS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa HDT (HDT4)	Duty Cycle (%):	93.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.10

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	9.32	-	-	-	9.32	30.00	-20.68
2439	9.14	-	-	-	9.14	30.00	-20.86
2474	8.95	-	-	-	8.95	30.00	-21.05

Table 88 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	9.32	-	-	-	9.32	30.00	-20.68	13.42	36.00	-22.58
2439	9.14	-	-	-	9.14	30.00	-20.86	13.24	36.00	-22.76
2474	8.95	-	-	-	8.95	30.00	-21.05	13.05	36.00	-22.95

Table 89 - ISSED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa HDR (8-DH5)	Duty Cycle (%):	77.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.10

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	8.86	-	-	-	8.86	30.00	-21.14
2440	8.56	-	-	-	8.56	30.00	-21.44
2476	8.61	-	-	-	8.61	30.00	-21.39

Table 90 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	8.86	-	-	-	8.86	30.00	-21.14	12.96	36.00	-23.04
2440	8.56	-	-	-	8.56	30.00	-21.44	12.66	36.00	-23.34
2476	8.61	-	-	-	8.61	30.00	-21.39	12.71	36.00	-23.29

Table 91 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa HDRP (HDRPM4)	Duty Cycle (%):	92.5
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.10

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	9.30	-	-	-	9.30	30.00	-20.70
2440	9.05	-	-	-	9.05	30.00	-20.95
2475	9.12	-	-	-	9.12	30.00	-20.88

Table 92 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	9.30	-	-	-	9.30	30.00	-20.70	13.40	36.00	-22.60
2440	9.05	-	-	-	9.05	30.00	-20.95	13.15	36.00	-22.85
2475	9.12	-	-	-	9.12	30.00	-20.88	13.22	36.00	-22.78

Table 93 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa LE (LE 1M)	Duty Cycle (%):	84.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.10

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	6.50	-	-	-	6.50	30.00	-23.50
2440	6.52	-	-	-	6.52	30.00	-23.48
2480	6.41	-	-	-	6.41	30.00	-23.59

Table 94 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	6.50	-	-	-	6.50	30.00	-23.50	10.60	36.00	-25.40
2440	6.52	-	-	-	6.52	30.00	-23.48	10.62	36.00	-25.38
2480	6.41	-	-	-	6.41	30.00	-23.59	10.51	36.00	-25.49

Table 95 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa LE (LELR125K)	Duty Cycle (%):	100.0
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.10

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	6.66	-	-	-	6.66	30.00	-23.34
2440	6.24	-	-	-	6.24	30.00	-23.76
2480	6.51	-	-	-	6.51	30.00	-23.49

Table 96 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	6.66	-	-	-	6.66	30.00	-23.34	10.76	36.00	-25.24
2440	6.24	-	-	-	6.24	30.00	-23.76	10.34	36.00	-25.66
2480	6.51	-	-	-	6.51	30.00	-23.49	10.61	36.00	-25.39

Table 97 - ISSED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa HDT (HDT4)	Duty Cycle (%):	93.5
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	9.12	-	-	9.12	30.00	-20.88
2439	-	9.18	-	-	9.18	30.00	-20.82
2474	-	8.87	-	-	8.87	30.00	-21.13

Table 98 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	9.12	-	-	9.12	30.00	-20.88	13.52	36.00	-22.48
2439	-	9.18	-	-	9.18	30.00	-20.82	13.58	36.00	-22.42
2474	-	8.87	-	-	8.87	30.00	-21.13	13.27	36.00	-22.73

Table 99 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa HDR (8-DH5)	Duty Cycle (%):	78.3
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	8.63	-	-	8.63	30.00	-21.37
2440	-	8.54	-	-	8.54	30.00	-21.46
2476	-	8.89	-	-	8.89	30.00	-21.11

Table 100 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	8.63	-	-	8.63	30.00	-21.37	13.03	36.00	-22.97
2440	-	8.54	-	-	8.54	30.00	-21.46	12.94	36.00	-23.06
2476	-	8.89	-	-	8.89	30.00	-21.11	13.29	36.00	-22.71

Table 101 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa HDRP (HDRPM4)	Duty Cycle (%):	92.5
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	9.08	-	-	9.08	30.00	-20.92
2440	-	9.08	-	-	9.08	30.00	-20.92
2475	-	8.87	-	-	8.87	30.00	-21.13

Table 102 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	9.08	-	-	9.08	30.00	-20.92	13.48	36.00	-22.52
2440	-	9.08	-	-	9.08	30.00	-20.92	13.48	36.00	-22.52
2475	-	8.87	-	-	8.87	30.00	-21.13	13.27	36.00	-22.73

Table 103 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa LE (LE 1M)	Duty Cycle (%):	84.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	6.34	-	-	6.34	30.00	-23.66
2440	-	6.38	-	-	6.38	30.00	-23.62
2480	-	6.30	-	-	6.30	30.00	-23.70

Table 104 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	6.34	-	-	6.34	30.00	-23.66	10.74	36.00	-25.26
2440	-	6.38	-	-	6.38	30.00	-23.62	10.78	36.00	-25.22
2480	-	6.30	-	-	6.30	30.00	-23.70	10.70	36.00	-25.30

Table 105 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa LE (LELR125K)	Duty Cycle (%):	100.0
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	6.68	-	-	6.68	30.00	-23.32
2440	-	6.23	-	-	6.23	30.00	-23.77
2480	-	6.53	-	-	6.53	30.00	-23.47

Table 106 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	6.68	-	-	6.68	30.00	-23.32	11.08	36.00	-24.92
2440	-	6.23	-	-	6.23	30.00	-23.77	10.63	36.00	-25.37
2480	-	6.53	-	-	6.53	30.00	-23.47	10.93	36.00	-25.07

Table 107 - ISSED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa EDR (2-DH5)	Duty Cycle (%):	76.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	5.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	12.73	-	12.73	30.00	-17.27
2441	-	-	12.50	-	12.50	30.00	-17.50
2480	-	-	12.62	-	12.62	30.00	-17.38

Table 108 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	-	12.73	-	12.73	30.00	-17.27	18.13	36.00	-17.87
2441	-	-	12.50	-	12.50	30.00	-17.50	17.90	36.00	-18.10
2480	-	-	12.62	-	12.62	30.00	-17.38	18.02	36.00	-17.98

Table 109 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa HDT (HDT4)	Duty Cycle (%):	93.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	5.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	-	13.20	-	13.20	30.00	-16.80
2439	-	-	12.87	-	12.87	30.00	-17.13
2474	-	-	12.93	-	12.93	30.00	-17.07

Table 110 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	-	13.20	-	13.20	30.00	-16.80	18.60	36.00	-17.40
2439	-	-	12.87	-	12.87	30.00	-17.13	18.27	36.00	-17.73
2474	-	-	12.93	-	12.93	30.00	-17.07	18.33	36.00	-17.67

Table 111 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa HDR (8-DH5)	Duty Cycle (%):	77.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	5.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	-	12.73	-	12.73	30.00	-17.27
2440	-	-	12.42	-	12.42	30.00	-17.58
2476	-	-	12.38	-	12.38	30.00	-17.62

Table 112 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	-	12.73	-	12.73	30.00	-17.27	18.13	36.00	-17.87
2440	-	-	12.42	-	12.42	30.00	-17.58	17.82	36.00	-18.18
2476	-	-	12.38	-	12.38	30.00	-17.62	17.78	36.00	-18.22

Table 113 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa HDRP (HDRPM4)	Duty Cycle (%):	92.5
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	5.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	-	12.72	-	12.72	30.00	-17.28
2440	-	-	12.85	-	12.85	30.00	-17.15
2475	-	-	12.88	-	12.88	30.00	-17.12

Table 114 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	-	12.72	-	12.72	30.00	-17.28	18.12	36.00	-17.88
2440	-	-	12.85	-	12.85	30.00	-17.15	18.25	36.00	-17.75
2475	-	-	12.88	-	12.88	30.00	-17.12	18.28	36.00	-17.72

Table 115 - ISSED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPa LE (LE 1M)	Duty Cycle (%):	84.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	5.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	6.13	-	6.13	30.00	-23.87
2440	-	-	6.27	-	6.27	30.00	-23.73
2480	-	-	6.35	-	6.35	30.00	-23.65

Table 116 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	-	6.13	-	6.13	30.00	-23.87	11.53	36.00	-24.47
2440	-	-	6.27	-	6.27	30.00	-23.73	11.67	36.00	-24.33
2480	-	-	6.35	-	6.35	30.00	-23.65	11.75	36.00	-24.25

Table 117 - ISSED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPa HDT (HDT4)	Duty Cycle (%):	93.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.26

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	9.35	9.13	-	-	12.25	28.74	-16.49
2439	9.24	9.27	-	-	12.26	28.74	-16.48
2474	9.02	8.96	-	-	12.00	28.74	-16.74

Table 118 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	9.35	9.13	-	-	12.25	30.00	-17.75	19.51	36.00	-16.49
2439	9.24	9.27	-	-	12.26	30.00	-17.74	19.52	36.00	-16.48
2474	9.02	8.96	-	-	12.00	30.00	-18.00	19.26	36.00	-16.74

Table 119 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPa HDR (8-DH5)	Duty Cycle (%):	77.9
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.26

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	8.84	8.70	-	-	11.78	28.74	-16.96
2440	8.55	8.65	-	-	11.61	28.74	-17.13
2476	8.63	8.48	-	-	11.56	28.74	-17.17

Table 120 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	8.84	8.70	-	-	11.78	30.00	-18.22	19.04	36.00	-16.96
2440	8.55	8.65	-	-	11.61	30.00	-18.39	18.87	36.00	-17.13
2476	8.63	8.48	-	-	11.56	30.00	-18.44	18.83	36.00	-17.17

Table 121 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPa HDRP (HDRPM4)	Duty Cycle (%):	92.5
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.26

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	9.23	9.16	-	-	12.20	28.74	-16.53
2440	9.05	9.15	-	-	12.11	28.74	-16.63
2475	9.15	8.99	-	-	12.08	28.74	-16.66

Table 122 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	9.23	9.16	-	-	12.20	30.00	-17.80	19.47	36.00	-16.53
2440	9.05	9.15	-	-	12.11	30.00	-17.89	19.37	36.00	-16.63
2475	9.15	8.99	-	-	12.08	30.00	-17.92	19.34	36.00	-16.66

Table 123 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPa LE (LE 1M)	Duty Cycle (%):	84.6
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.26

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	6.57	6.42	-	-	9.51	28.74	-19.23
2440	6.52	6.46	-	-	9.50	28.74	-19.24
2480	6.37	6.24	-	-	9.31	28.74	-19.42

Table 124 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	6.57	6.42	-	-	9.51	30.00	-20.49	16.77	36.00	-19.23
2440	6.52	6.46	-	-	9.50	30.00	-20.50	16.76	36.00	-19.24
2480	6.37	6.24	-	-	9.31	30.00	-20.69	16.58	36.00	-19.42

Table 125 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPa LE (LELR125K)	Duty Cycle (%):	100.0
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.26

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	6.71	6.68	-	-	9.71	28.74	-19.03
2440	6.28	6.27	-	-	9.28	28.74	-19.45
2480	6.56	6.51	-	-	9.55	28.74	-19.19

Table 126 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	6.71	6.68	-	-	9.71	30.00	-20.29	16.97	36.00	-19.03
2440	6.28	6.27	-	-	9.28	30.00	-20.72	16.55	36.00	-19.45
2480	6.56	6.51	-	-	9.55	30.00	-20.45	16.81	36.00	-19.19

Table 127 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa EDR (2-DH5)	Duty Cycle (%):	76.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.10

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	19.27	-	-	-	19.27	30.00	-10.73
2441	19.22	-	-	-	19.22	30.00	-10.78
2480	19.12	-	-	-	19.12	30.00	-10.88

Table 128 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	19.27	-	-	-	19.27	30.00	-10.73	23.37	36.00	-12.63
2441	19.22	-	-	-	19.22	30.00	-10.78	23.32	36.00	-12.68
2480	19.12	-	-	-	19.12	30.00	-10.88	23.22	36.00	-12.78

Table 129 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa HDT (HDT4)	Duty Cycle (%):	93.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.10

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	16.80	-	-	-	16.80	30.00	-13.20
2439	16.69	-	-	-	16.69	30.00	-13.31
2474	16.68	-	-	-	16.68	30.00	-13.32

Table 130 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	16.80	-	-	-	16.80	30.00	-13.20	20.90	36.00	-15.10
2439	16.69	-	-	-	16.69	30.00	-13.31	20.79	36.00	-15.21
2474	16.68	-	-	-	16.68	30.00	-13.32	20.78	36.00	-15.22

Table 131 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa HDR (8-DH5)	Duty Cycle (%):	77.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.10

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	16.16	-	-	-	16.16	30.00	-13.84
2440	16.02	-	-	-	16.02	30.00	-13.98
2476	16.04	-	-	-	16.04	30.00	-13.96

Table 132 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	16.16	-	-	-	16.16	30.00	-13.84	20.26	36.00	-15.74
2440	16.02	-	-	-	16.02	30.00	-13.98	20.12	36.00	-15.88
2476	16.04	-	-	-	16.04	30.00	-13.96	20.14	36.00	-15.86

Table 133 - ISSED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa HDRP (HDRPM4)	Duty Cycle (%):	92.5
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.10

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	16.39	-	-	-	16.39	30.00	-13.61
2440	16.78	-	-	-	16.78	30.00	-13.22
2475	16.76	-	-	-	16.76	30.00	-13.24

Table 134 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	16.39	-	-	-	16.39	30.00	-13.61	20.49	36.00	-15.51
2440	16.78	-	-	-	16.78	30.00	-13.22	20.88	36.00	-15.12
2475	16.76	-	-	-	16.76	30.00	-13.24	20.86	36.00	-15.14

Table 135 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa LE (LE 1M)	Duty Cycle (%):	84.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	4.10

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	14.89	-	-	-	14.89	30.00	-15.11
2440	14.81	-	-	-	14.81	30.00	-15.19
2480	15.20	-	-	-	15.20	30.00	-14.80

Table 136 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	14.89	-	-	-	14.89	30.00	-15.11	18.99	36.00	-17.01
2440	14.81	-	-	-	14.81	30.00	-15.19	18.91	36.00	-17.09
2480	15.20	-	-	-	15.20	30.00	-14.80	19.30	36.00	-16.70

Table 137 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa EDR (2-DH5)	Duty Cycle (%):	76.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	19.29	-	-	19.29	30.00	-10.71
2441	-	19.20	-	-	19.20	30.00	-10.80
2480	-	19.11	-	-	19.11	30.00	-10.89

Table 138 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	19.29	-	-	19.29	30.00	-10.71	23.69	36.00	-12.31
2441	-	19.20	-	-	19.20	30.00	-10.80	23.60	36.00	-12.40
2480	-	19.11	-	-	19.11	30.00	-10.89	23.51	36.00	-12.49

Table 139 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa HDT (HDT4)	Duty Cycle (%):	93.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	16.84	-	-	16.84	30.00	-13.16
2439	-	16.63	-	-	16.63	30.00	-13.37
2474	-	16.51	-	-	16.51	30.00	-13.49

Table 140 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	16.84	-	-	16.84	30.00	-13.16	21.24	36.00	-14.76
2439	-	16.63	-	-	16.63	30.00	-13.37	21.03	36.00	-14.97
2474	-	16.51	-	-	16.51	30.00	-13.49	20.91	36.00	-15.09

Table 141 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa HDR (8-DH5)	Duty Cycle (%):	78.0
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	16.17	-	-	16.17	30.00	-13.83
2440	-	15.94	-	-	15.94	30.00	-14.06
2476	-	15.92	-	-	15.92	30.00	-14.08

Table 142 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	16.17	-	-	16.17	30.00	-13.83	20.57	36.00	-15.43
2440	-	15.94	-	-	15.94	30.00	-14.06	20.34	36.00	-15.66
2476	-	15.92	-	-	15.92	30.00	-14.08	20.32	36.00	-15.68

Table 143 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa HDRP (HDRPM4)	Duty Cycle (%):	92.5
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	16.45	-	-	16.45	30.00	-13.55
2440	-	16.77	-	-	16.77	30.00	-13.23
2475	-	16.64	-	-	16.64	30.00	-13.36

Table 144 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	16.45	-	-	16.45	30.00	-13.55	20.85	36.00	-15.15
2440	-	16.77	-	-	16.77	30.00	-13.23	21.17	36.00	-14.83
2475	-	16.64	-	-	16.64	30.00	-13.36	21.04	36.00	-14.96

Table 145 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePa LE (LE 1M)	Duty Cycle (%):	84.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	4.40

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	14.94	-	-	14.94	30.00	-15.06
2440	-	14.78	-	-	14.78	30.00	-15.22
2480	-	14.71	-	-	14.71	30.00	-15.29

Table 146 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	14.94	-	-	14.94	30.00	-15.06	19.34	36.00	-16.66
2440	-	14.78	-	-	14.78	30.00	-15.22	19.18	36.00	-16.82
2480	-	14.71	-	-	14.71	30.00	-15.29	19.11	36.00	-16.89

Table 147 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePa EDR (2-DH5)	Duty Cycle (%):	76.6
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.26

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	16.21	16.27	-	-	19.25	28.74	-9.49
2441	16.10	16.20	-	-	19.16	28.74	-9.58
2480	16.02	16.05	-	-	19.05	28.74	-9.69

Table 148 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	16.21	16.27	-	-	19.25	30.00	-10.75	26.51	36.00	-9.49
2441	16.10	16.20	-	-	19.16	30.00	-10.84	26.42	36.00	-9.58
2480	16.02	16.05	-	-	19.05	30.00	-10.95	26.31	36.00	-9.69

Table 149 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePa HDT (HDT4)	Duty Cycle (%):	93.4
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.26

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	16.78	16.86	-	-	19.83	28.74	-8.91
2439	16.66	16.71	-	-	19.69	28.74	-9.04
2474	16.65	16.56	-	-	19.61	28.74	-9.13

Table 150 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	16.78	16.86	-	-	19.83	30.00	-10.17	27.09	36.00	-8.91
2439	16.66	16.71	-	-	19.69	30.00	-10.31	26.96	36.00	-9.04
2474	16.65	16.56	-	-	19.61	30.00	-10.39	26.87	36.00	-9.13

Table 151 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePa HDR (8-DH5)	Duty Cycle (%):	77.9
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.26

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	16.16	16.25	-	-	19.21	28.74	-9.52
2440	15.99	16.07	-	-	19.04	28.74	-9.70
2476	16.04	15.94	-	-	19.00	28.74	-9.74

Table 152 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	16.16	16.25	-	-	19.21	30.00	-10.79	26.48	36.00	-9.52
2440	15.99	16.07	-	-	19.04	30.00	-10.96	26.30	36.00	-9.70
2476	16.04	15.94	-	-	19.00	30.00	-11.00	26.26	36.00	-9.74

Table 153 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePa HDRP (HDRPM4)	Duty Cycle (%):	92.5
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.26

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	16.42	16.45	-	-	19.44	28.74	-9.30
2440	16.74	16.80	-	-	19.78	28.74	-8.96
2475	16.77	16.69	-	-	19.74	28.74	-9.00

Table 154 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	16.42	16.45	-	-	19.44	30.00	-10.56	26.70	36.00	-9.30
2440	16.74	16.80	-	-	19.78	30.00	-10.22	27.04	36.00	-8.96
2475	16.77	16.69	-	-	19.74	30.00	-10.26	27.00	36.00	-9.00

Table 155 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		
Note(s):	TxBF cores were tested independently whilst transmitting at the cores respective powers and summed after test		

DUT Configuration			
Mode:	ePa LE (LE 1M)	Duty Cycle (%):	84.6
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.26

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	14.88	14.93	-	-	17.91	28.74	-10.83
2440	14.80	14.76	-	-	17.79	28.74	-10.95
2480	15.20	14.72	-	-	17.98	28.74	-10.76

Table 156 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	14.88	14.93	-	-	17.91	30.00	-12.09	25.17	36.00	-10.83
2440	14.80	14.76	-	-	17.79	30.00	-12.21	25.05	36.00	-10.95
2480	15.20	14.72	-	-	17.98	30.00	-12.02	25.24	36.00	-10.76

Table 157 - ISSED Maximum Conducted (peak) Output Power Results



FCC 47 CFR Part 15, Limit Clause 15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

ISED RSS-247, Limit Clause 6.3.2

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 6.5 a) and b).

2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	02-Jan-2027
USB Power Sensor	Boonton	RTP5008	5820	12	16-Mar-2027
USB Power Sensor	Boonton	RTP5008	5821	12	16-Mar-2027
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5924	12	27-Feb-2027
Digital Multimeter	Fluke	115	6147	12	03-Jun-2027
Modular Power System mainframe	Keysight Technologies	N6701C	6151	-	O/P Mon
DC Power Module	Keysight Technologies	N6754A	6152	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	6419	24	16-Jun-2028
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6426	12	16-Mar-2027
Humidity and Temperature Meter	R.S Components	1364	6486	12	23-Jul-2027
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	25-Feb-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	25-Feb-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	25-Feb-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6528	12	25-Feb-2027



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
USB Wideband Power Sensor	Boonton	RTP5008	6585	12	27-Feb-2027
USB Wideband Power Sensor	Boonton	RTP5008	6586	12	27-Feb-2027
USB Wideband Power Sensor	Boonton	RTP5008	6591	12	16-Mar-2027
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon
DC Power Module	Keysight Technologies	N6754A	6666	-	O/P Mon
Modular Power System Mainframe	Keysight Technologies	N6701C	6667	-	O/P Mon
Digital Thermometer	R.S Components	RS 5511	6739	12	02-Mar-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6752	12	16-Mar-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6753	12	16-Mar-2027
SCU Cable Assembly SCU	TUV SUD	SPECTRUM_SCU_CA	6754	0	16-Mar-2027
Thermostatic Chamber	Weiss Technik	LabEvent T/500/50/3	7316	24	O/P Mon
Thermostatic Chamber	Weiss Technik	LabEvent T/500/50/3	7317	24	O/P Mon

Table 158

O/P Mon - Output Monitored using calibrated equipment



2.4 Authorised Band Edges

2.4.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d)
ISED RSS-247, Clause 6.6

2.4.2 Equipment Under Test and Modification State

A3375, S/N: DC0W09G7MW - Modification State 0

2.4.3 Date of Test

17-July-2026 to 23-July-2026

2.4.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

2.4.5 Environmental Conditions

Ambient Temperature	19.4 - 22.6 °C
Relative Humidity	35.9 - 45.6 %

2.4.6 Test Results

2.4 GHz Bluetooth - DTS

iPA - Core 0 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	2DH5	2402	2400	-53.33
Static	3DH5	2402	2400	-52.78
Static	HDR4	2404	2400	-58.21
Static	HDR8	2404	2400	-50.36
Static	LE1M	2402	2400	-57.51
Static	LE2M	2404	2400	-58.03
Static	HDT3	2404	2400	-28.18
Static	HDT4	2404	2400	-27.77
Static	HDT6	2404	2400	-26.87
Static	HDRPS2	2404	2400	-58.79
Static	HDRPM12	2404	2400	-44.50
Static	XHDRPM8	2404	2400	-44.32
Static	CS1LE1M	2402	2400	-41.82
Static	CS1LE2M	2404	2400	-41.30

Table 159 - SISO Authorised Band Edge Results

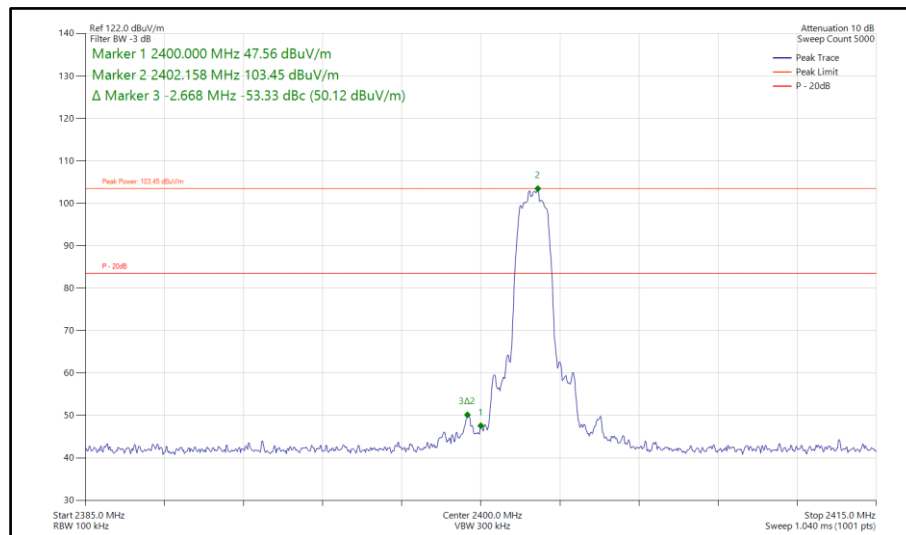


**Figure 475 - Bluetooth 2DH5, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2400 MHz**



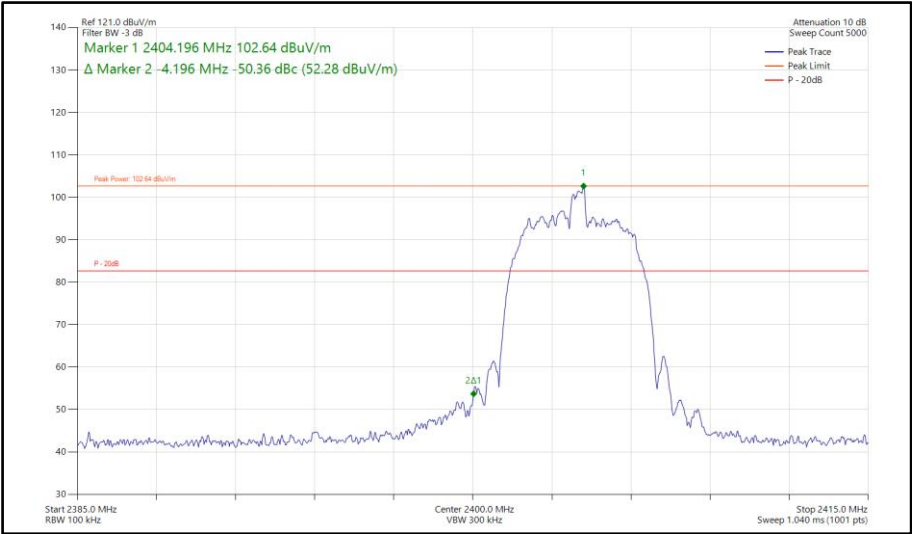


Figure 478 - Bluetooth HDR8, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

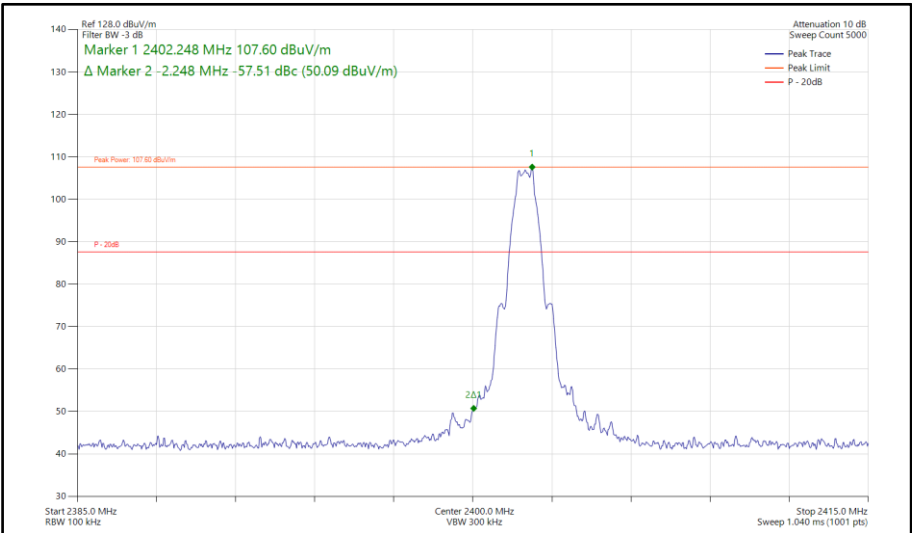


Figure 479 - Bluetooth LE1M, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2400 MHz

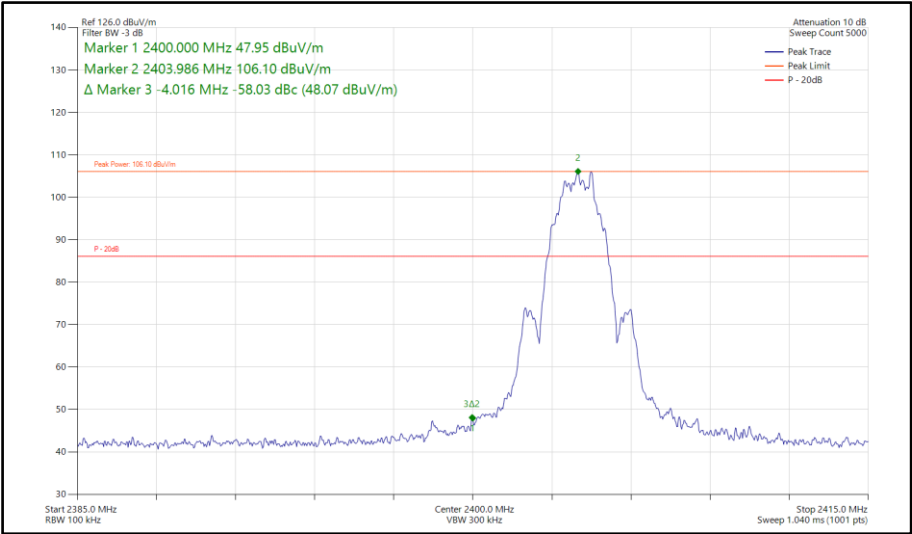


Figure 480 - Bluetooth LE2M, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

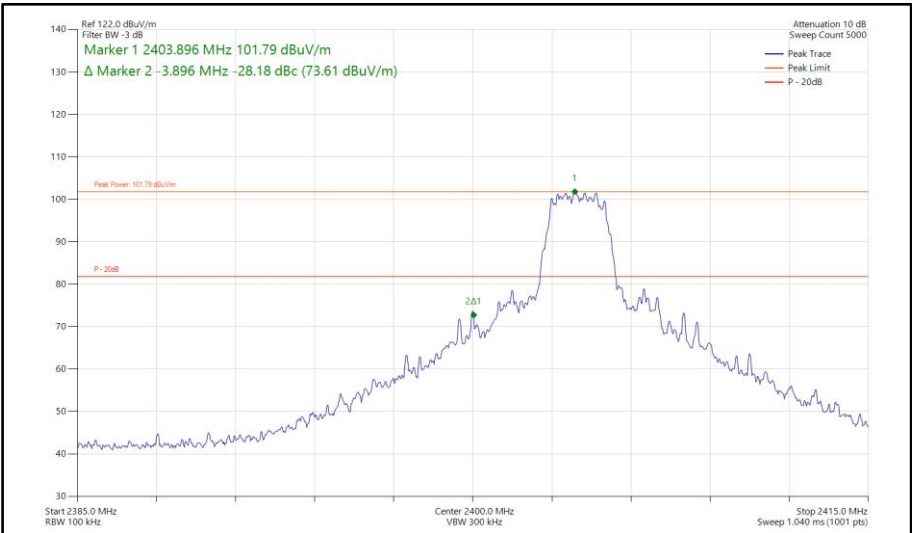


Figure 481 - Bluetooth HDT3, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

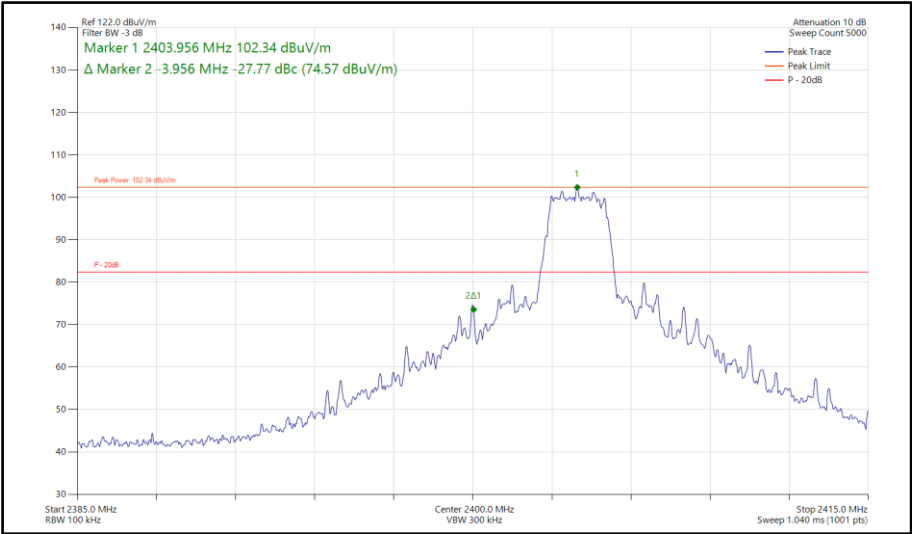


Figure 482 - Bluetooth HDT4, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

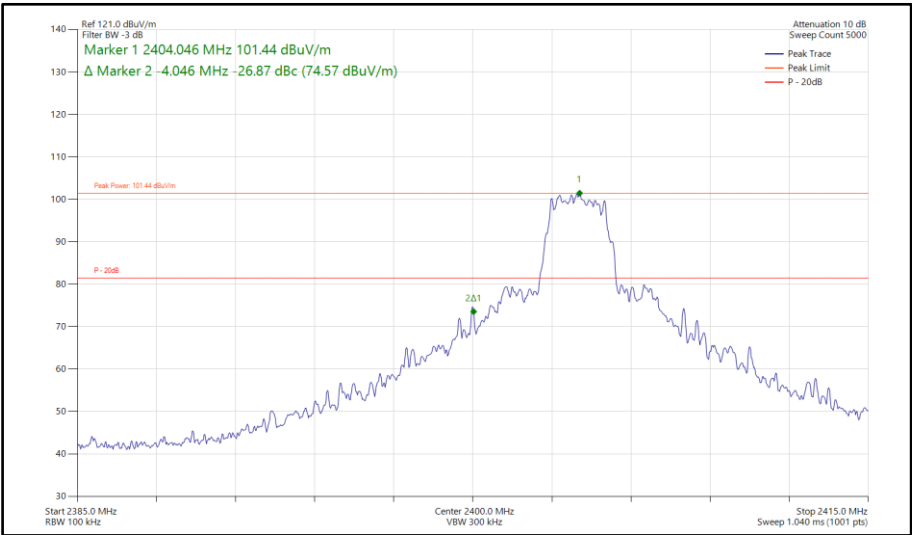


Figure 483 - Bluetooth HDT6, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

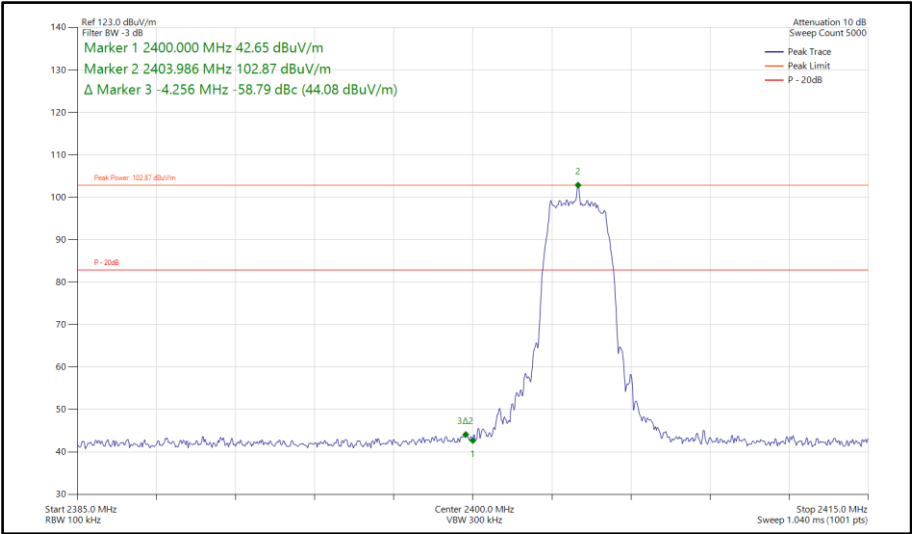


Figure 484 - Bluetooth HDRPS2, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

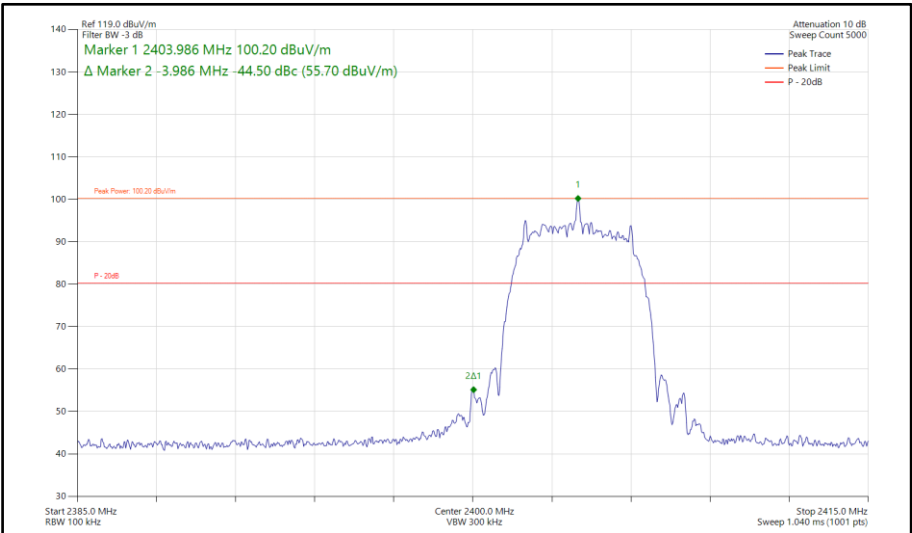


Figure 485 - Bluetooth HDRPM12, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

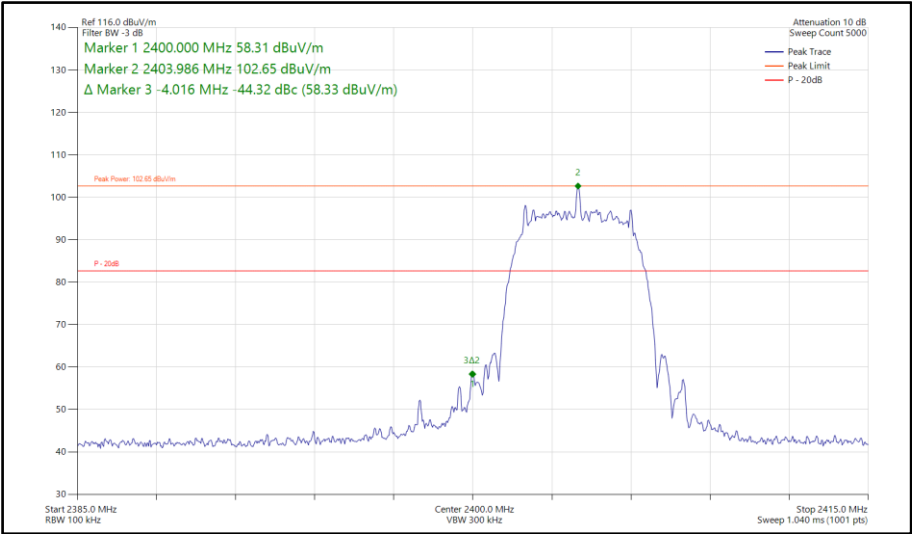


Figure 486 - Bluetooth XHDRPM8, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

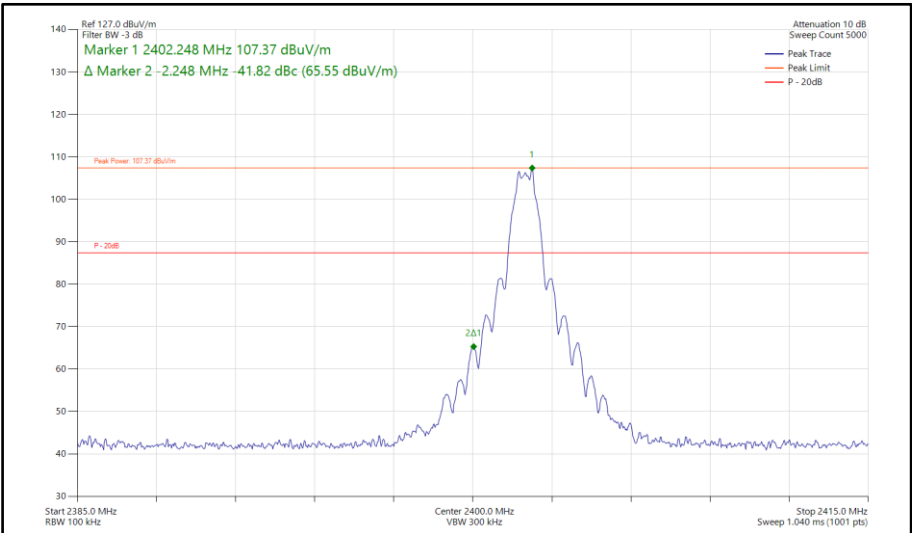


Figure 487 - Bluetooth CS1LE1M, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2400 MHz

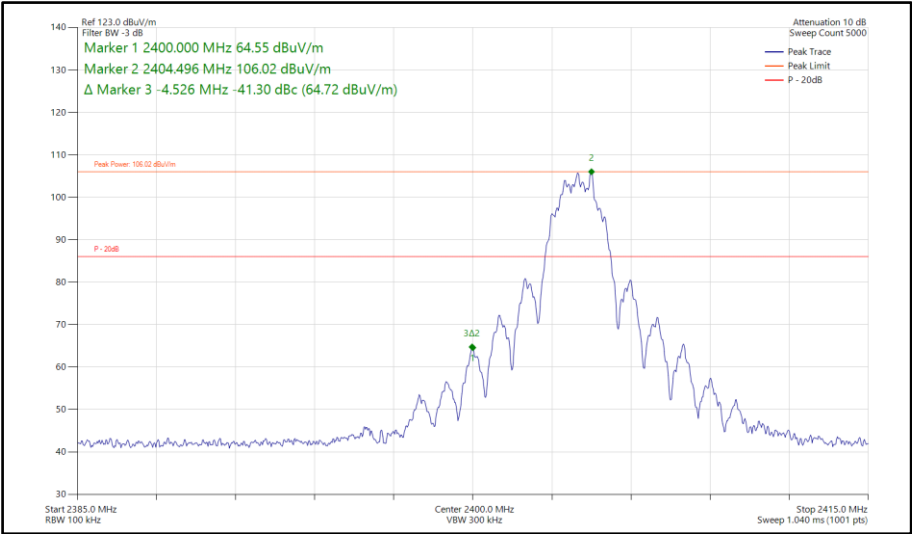


Figure 488 - Bluetooth CS1LE2M, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

iPA - Core 1 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	2DH5	2402	2400	-55.94
Static	3DH5	2402	2400	-54.04
Static	HDR4	2404	2400	-58.42
Static	HDR8	2404	2400	-49.25
Static	LE1M	2402	2400	-57.66
Static	LE2M	2404	2400	-60.94
Static	HDT3	2404	2400	-33.12
Static	HDT4	2404	2400	-32.90
Static	HDT6	2404	2400	-32.03
Static	HDRPS2	2404	2400	-57.55
Static	HDRPM12	2404	2400	-43.68
Static	XHDRPM8	2404	2400	-43.55
Static	CS1LE1M	2402	2400	-40.62
Static	CS1LE2M	2404	2400	-40.57

Table 160 - SISO Authorised Band Edge Results

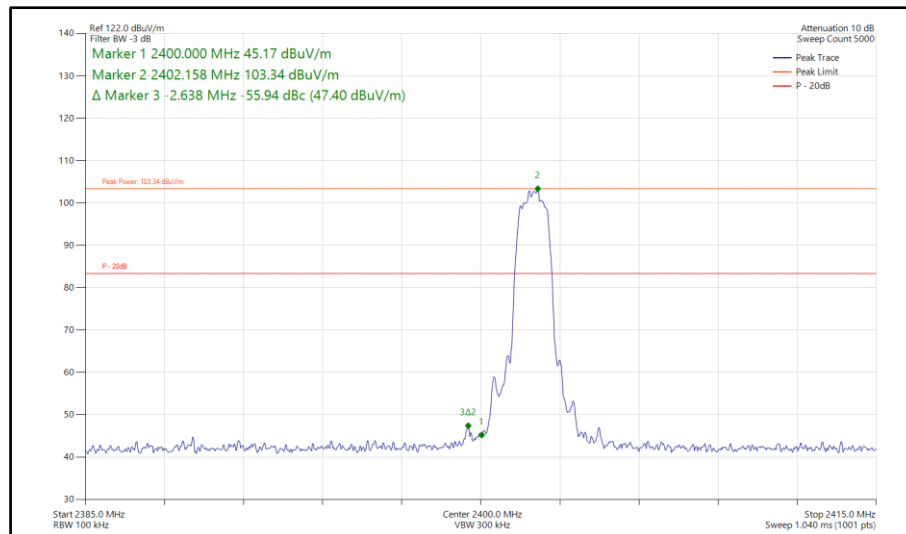


Figure 489 - Bluetooth 2DH5, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2400 MHz

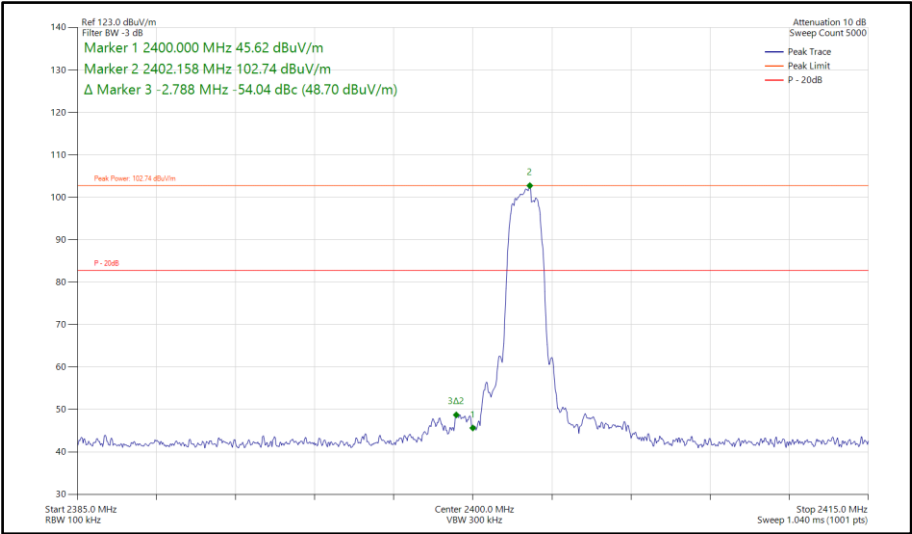


Figure 490 - Bluetooth 3DH5, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2400 MHz

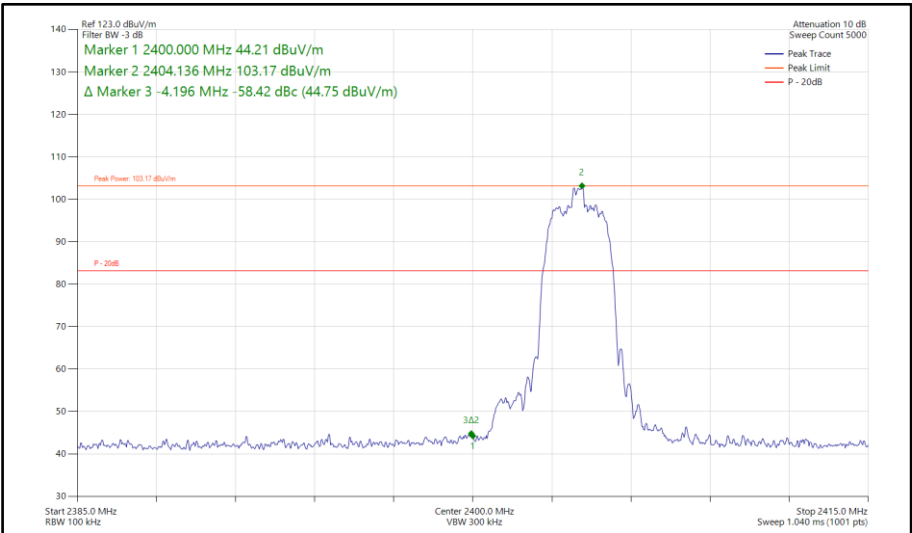


Figure 491 - Bluetooth HDR4, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

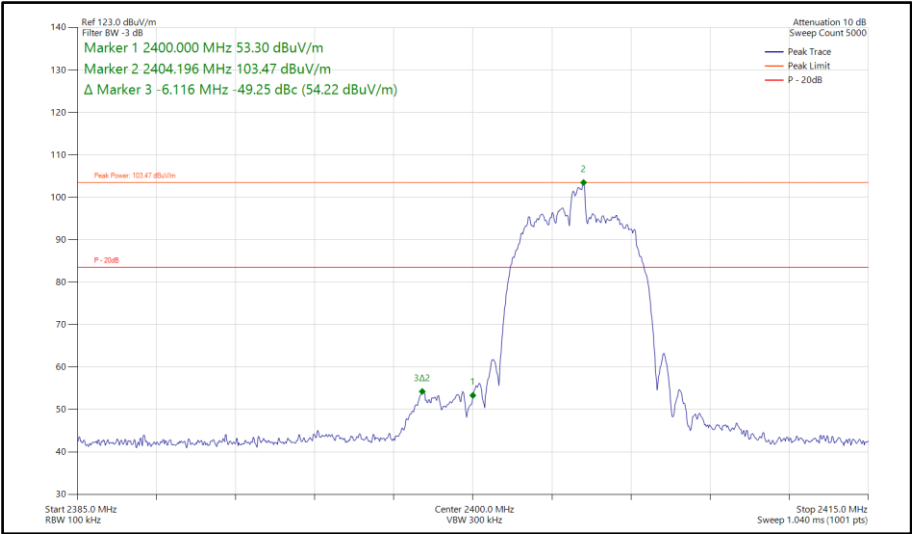


Figure 492 - Bluetooth HDR8, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

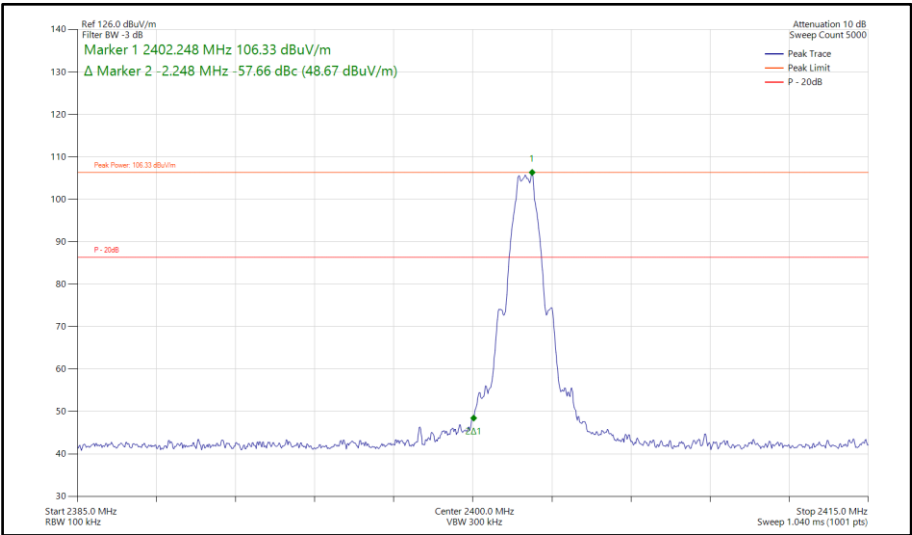


Figure 493 - Bluetooth LE1M, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2400 MHz

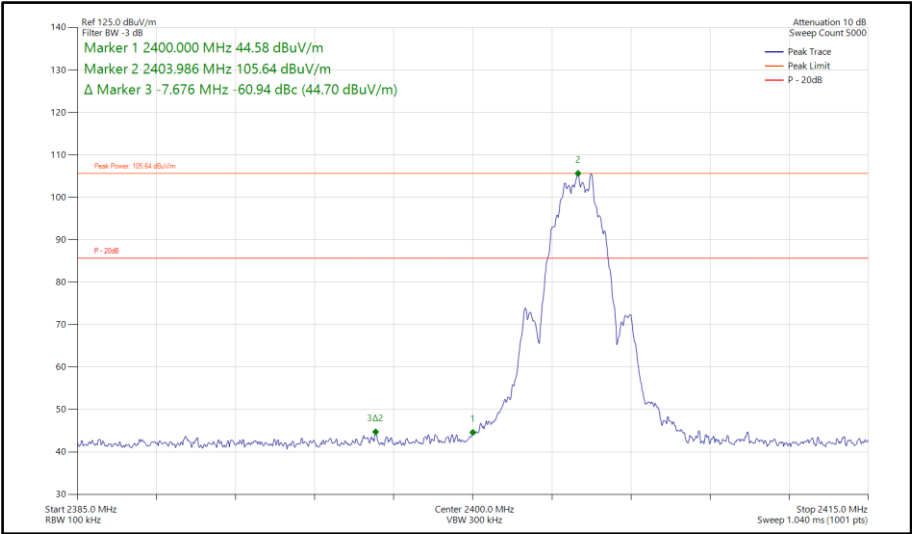


Figure 494 - Bluetooth LE2M, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

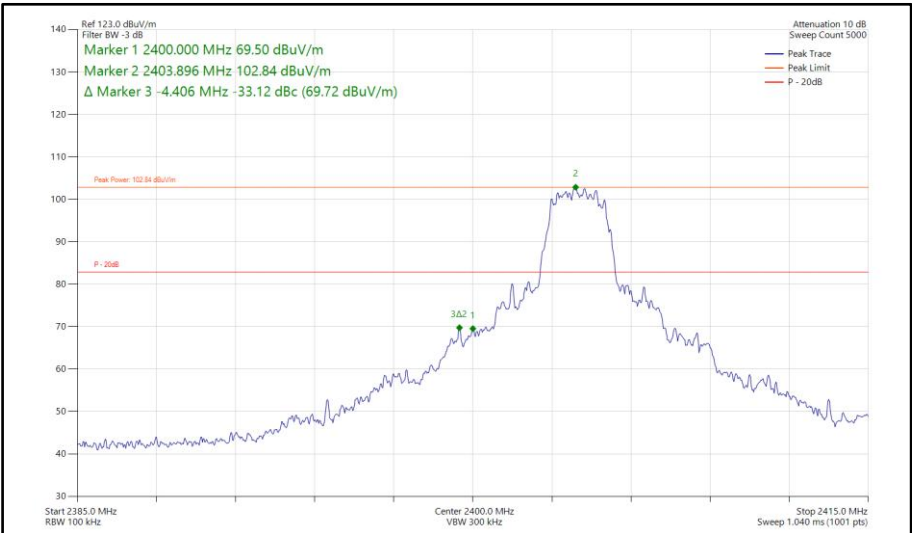


Figure 495 - Bluetooth HDT3, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

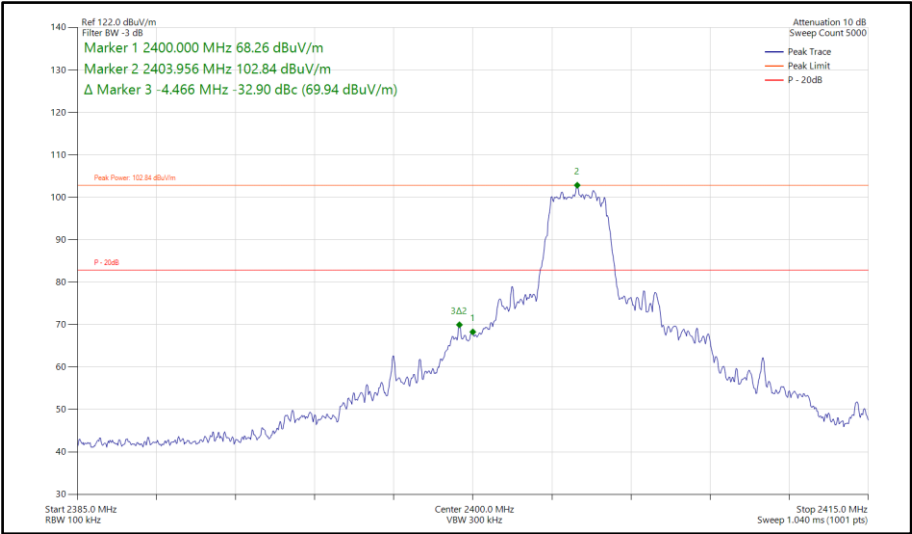


Figure 496 - Bluetooth HDT4, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

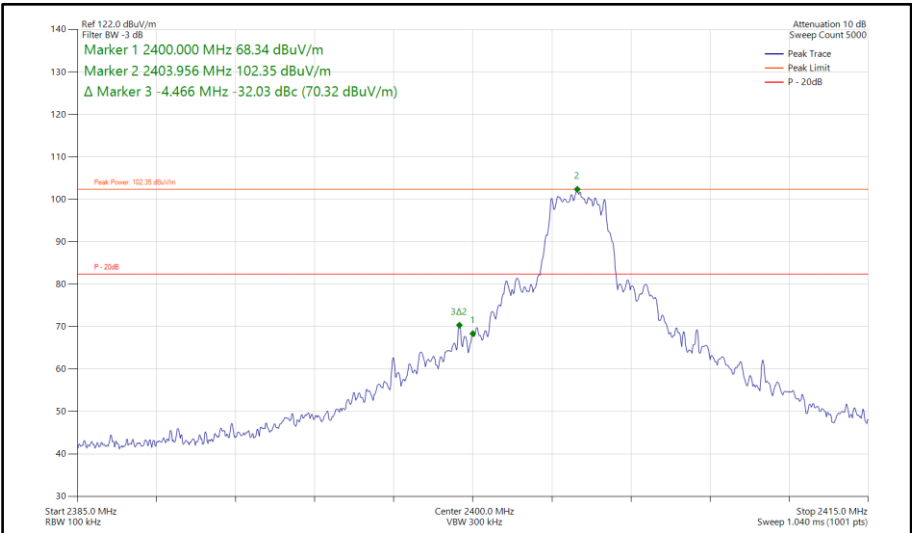


Figure 497 - Bluetooth HDT6, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

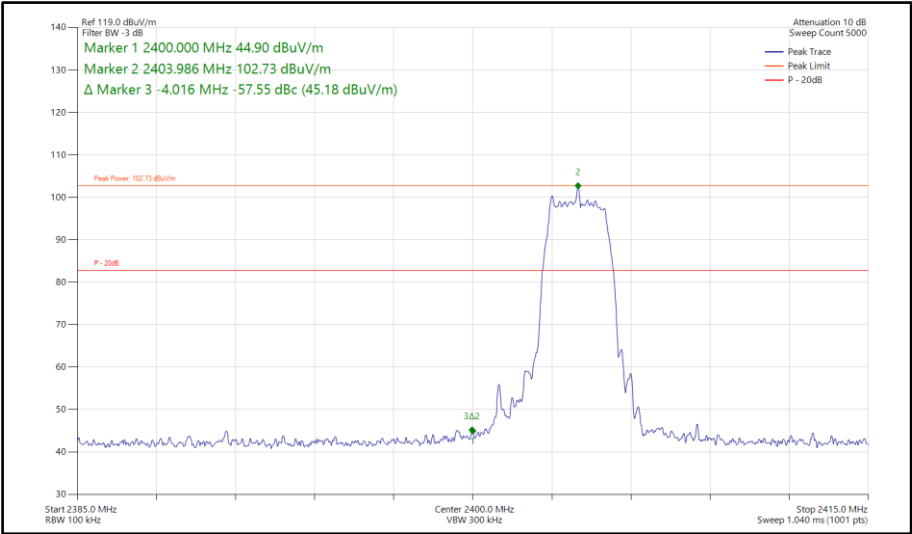


Figure 498 - Bluetooth HDRPS2, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

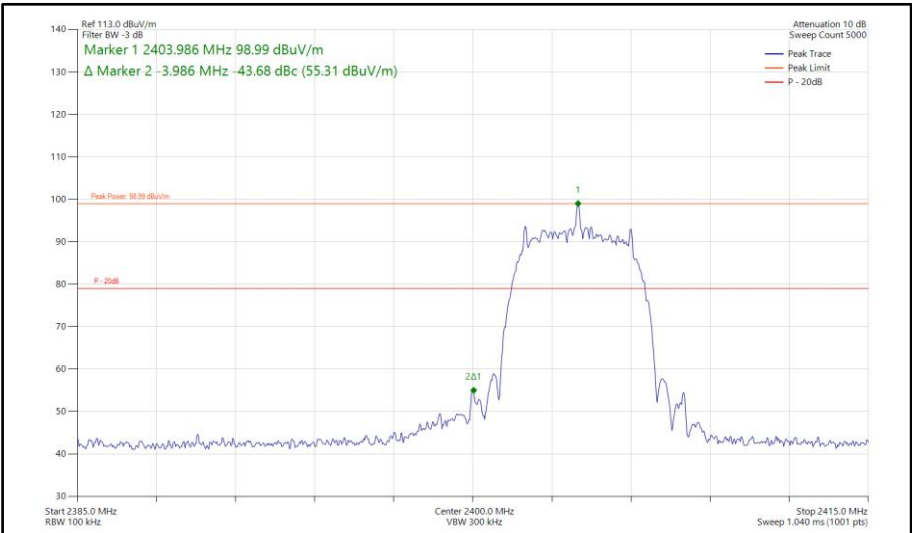


Figure 499 - Bluetooth HDRPM12, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz