

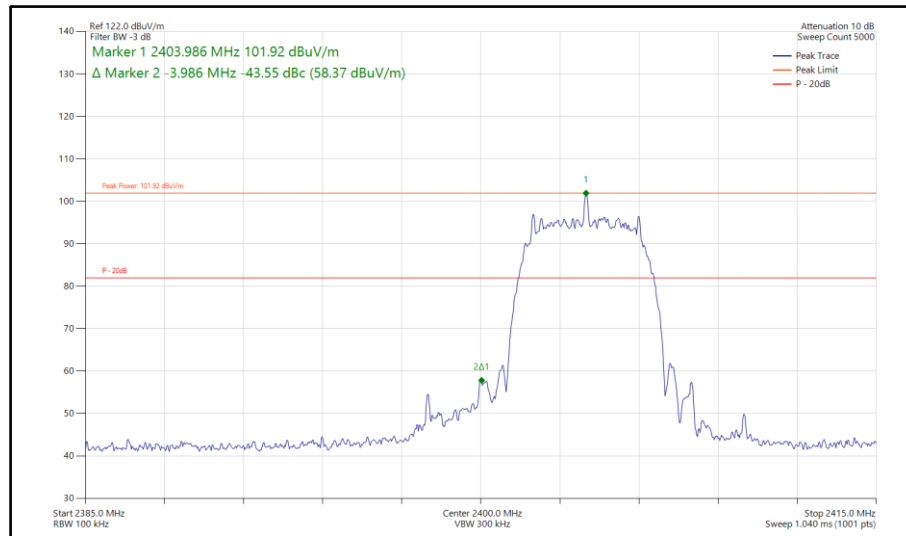


**Figure 500 - Bluetooth XHDRPM8, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz**

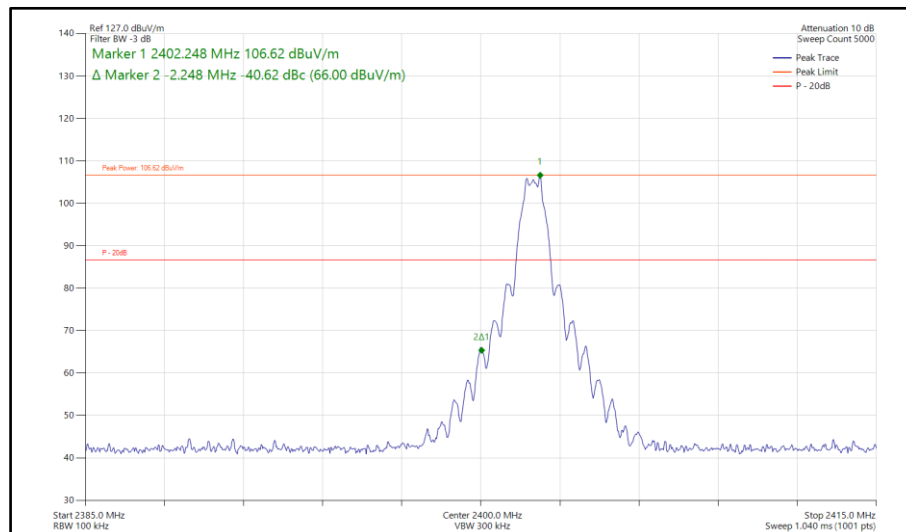


**Figure 501 - Bluetooth CS1LE1M, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2400 MHz**

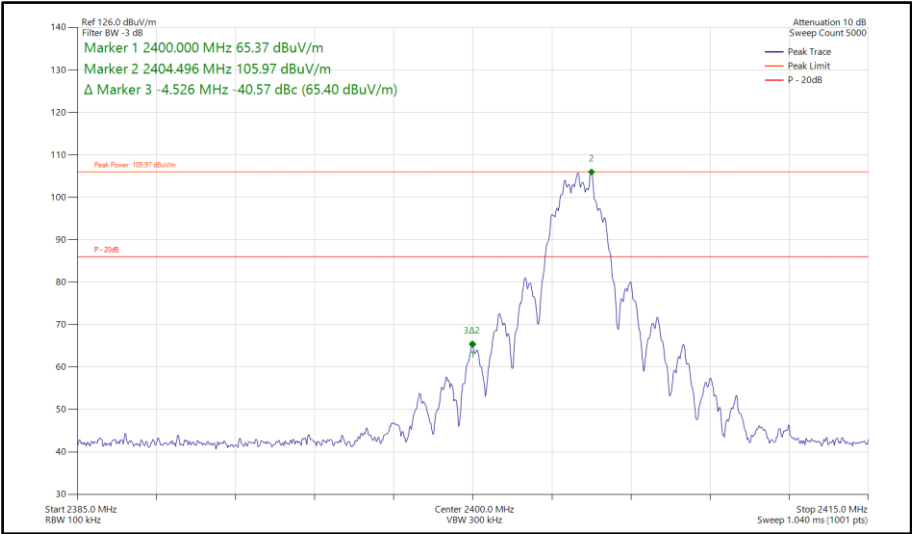


**Figure 502 - Bluetooth CS1LE2M, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz**

iPA - Core 2 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	2DH5	2402	2400	-47.55
Static	3DH5	2402	2400	-47.43
Static	HDR4	2404	2400	-58.32
Static	HDR8	2404	2400	-47.28
Static	LE1M	2402	2400	-60.34
Static	LE2M	2404	2400	-65.79
Static	HDT3	2404	2400	-32.65
Static	HDT4	2404	2400	-31.34
Static	HDT6	2404	2400	-30.85
Static	HDRPS2	2404	2400	-54.49
Static	HDRPM12	2404	2400	-46.38
Static	XHDRPM8	2404	2400	-45.61
Static	CS1LE1M	2402	2400	-41.93
Static	CS1LE2M	2404	2400	-42.83

Table 161 - SISO Authorised Band Edge Results

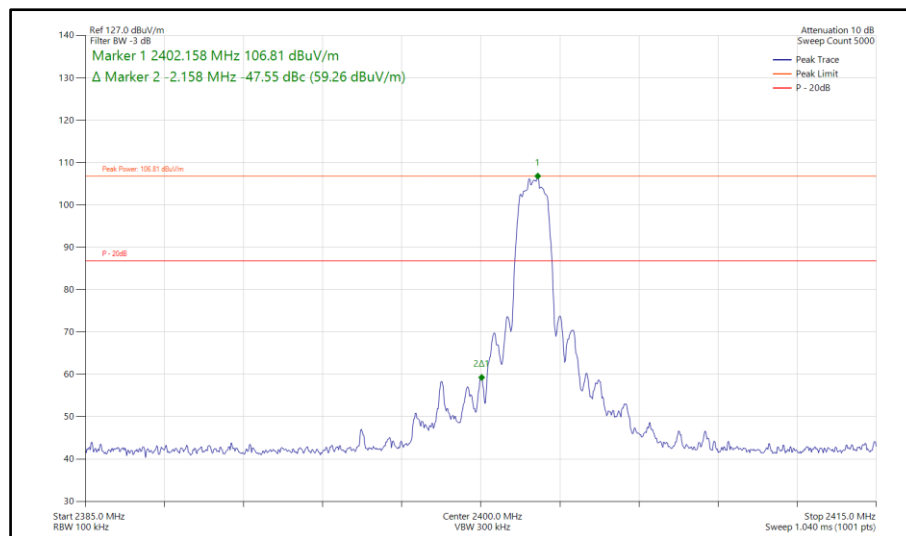


**Figure 503 - Bluetooth 2DH5, SISO, Core 2 - 2402 MHz
Band Edge Frequency 2400 MHz**

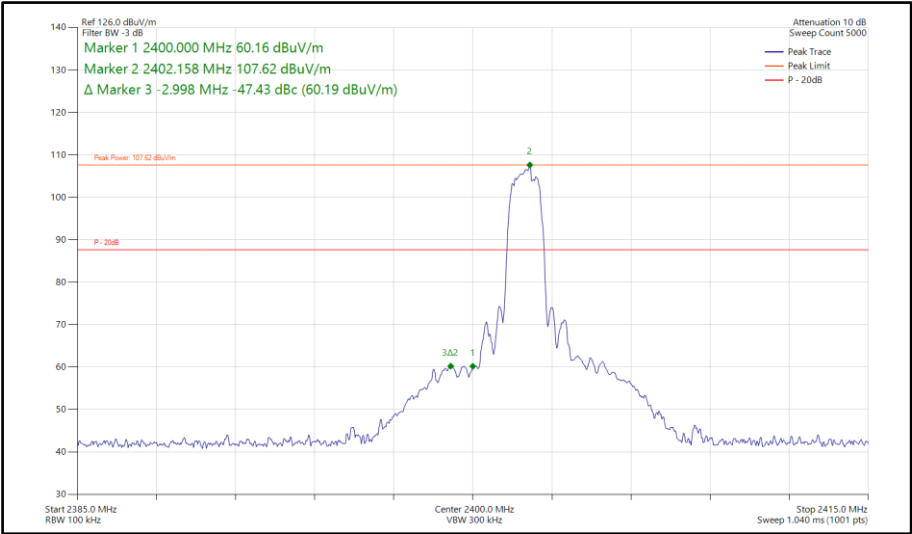


Figure 504 - Bluetooth 3DH5, SISO, Core 2 - 2402 MHz
Band Edge Frequency 2400 MHz

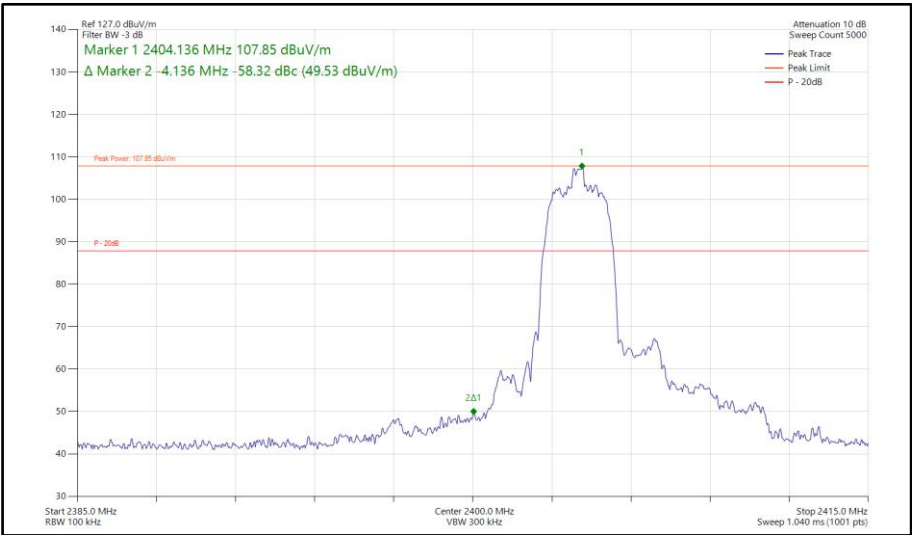


Figure 505 - Bluetooth HDR4, SISO, Core 2 - 2404 MHz
Band Edge Frequency 2400 MHz

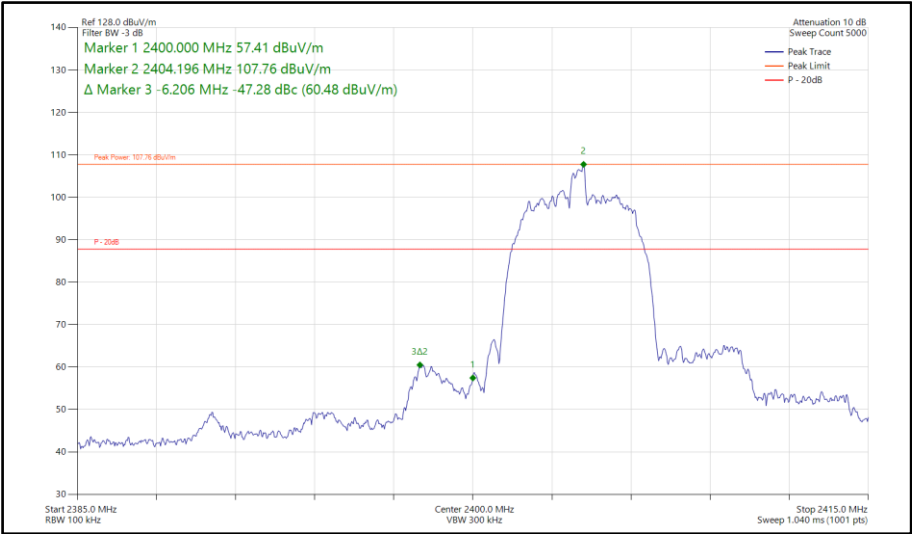


Figure 506 - Bluetooth HDR8, SISO, Core 2 - 2404 MHz
Band Edge Frequency 2400 MHz

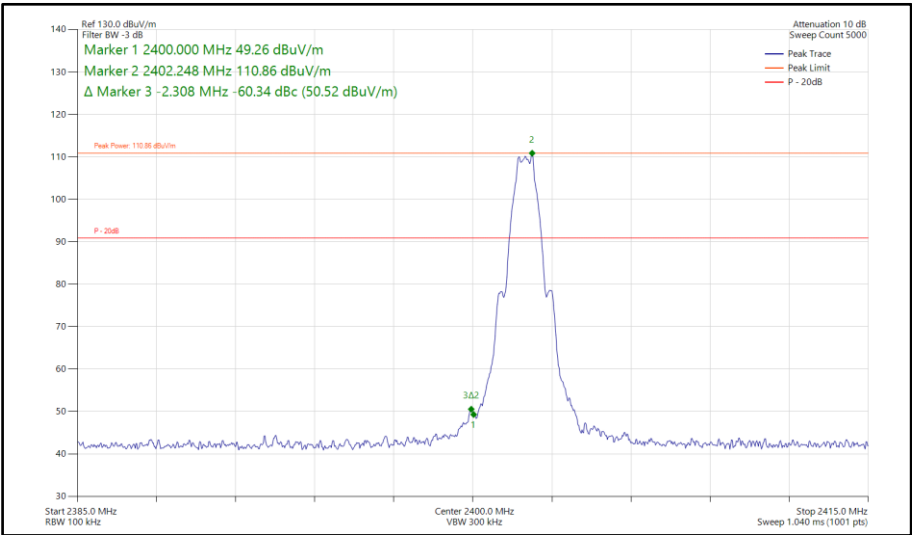


Figure 507 - Bluetooth LE1M, SISO, Core 2 - 2402 MHz
Band Edge Frequency 2400 MHz

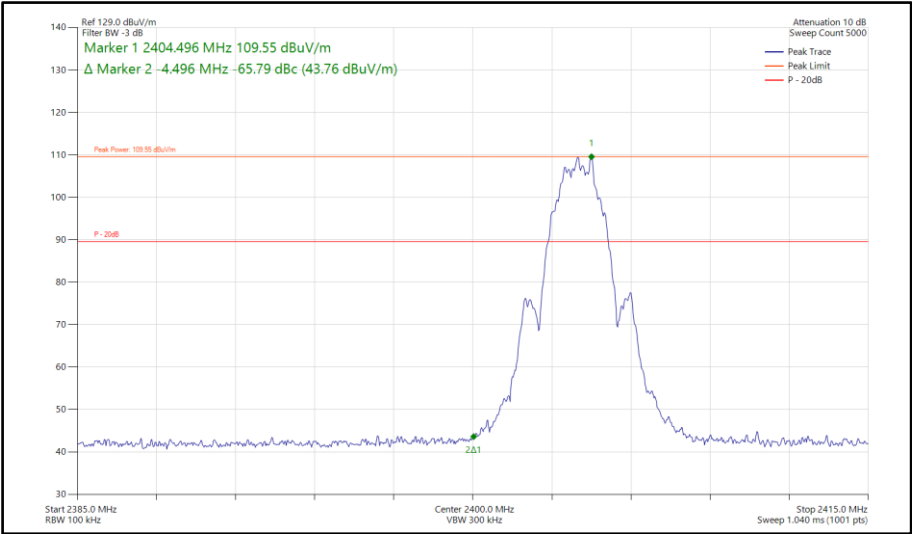


Figure 508 - Bluetooth LE2M, SISO, Core 2 - 2404 MHz
Band Edge Frequency 2400 MHz

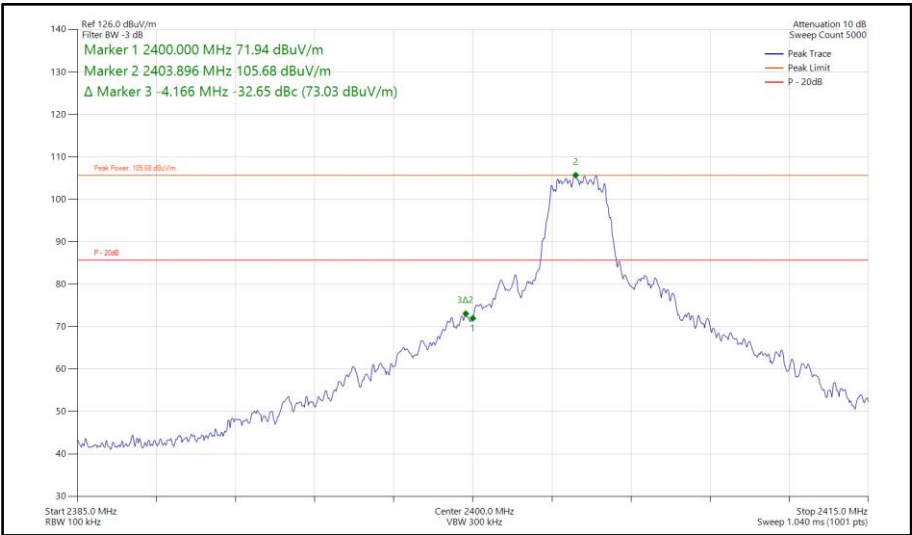


Figure 509 - Bluetooth HDT3, SISO, Core 2 - 2404 MHz
Band Edge Frequency 2400 MHz

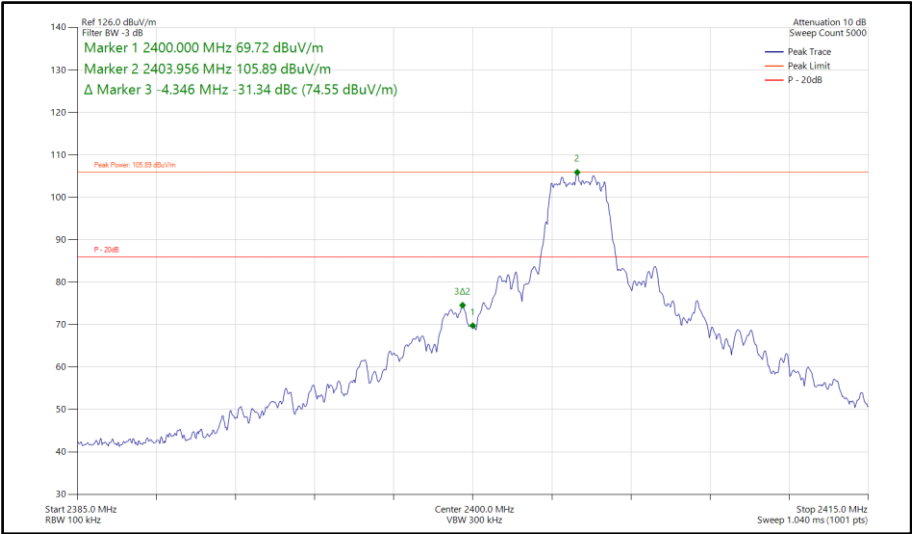


Figure 510 - Bluetooth HDT4, SISO, Core 2 - 2404 MHz
Band Edge Frequency 2400 MHz

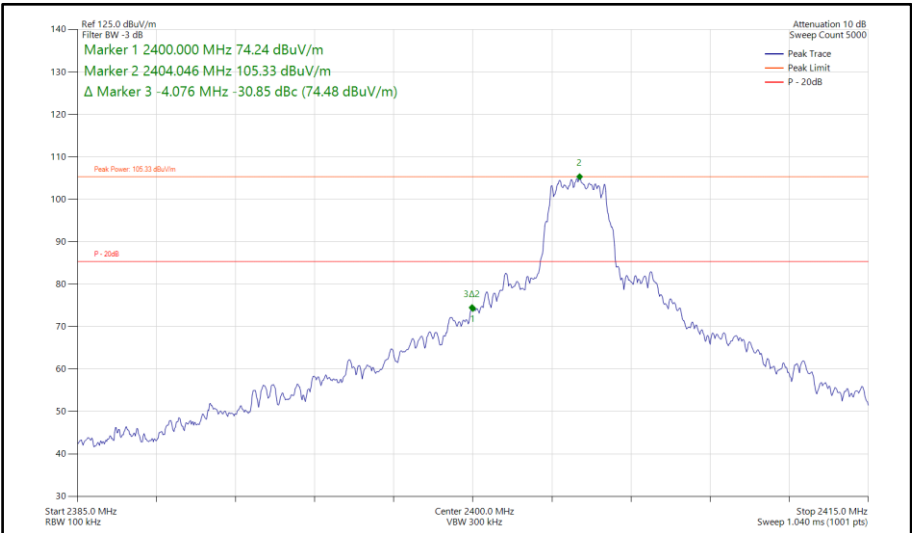


Figure 511 - Bluetooth HDT6, SISO, Core 2 - 2404 MHz
Band Edge Frequency 2400 MHz

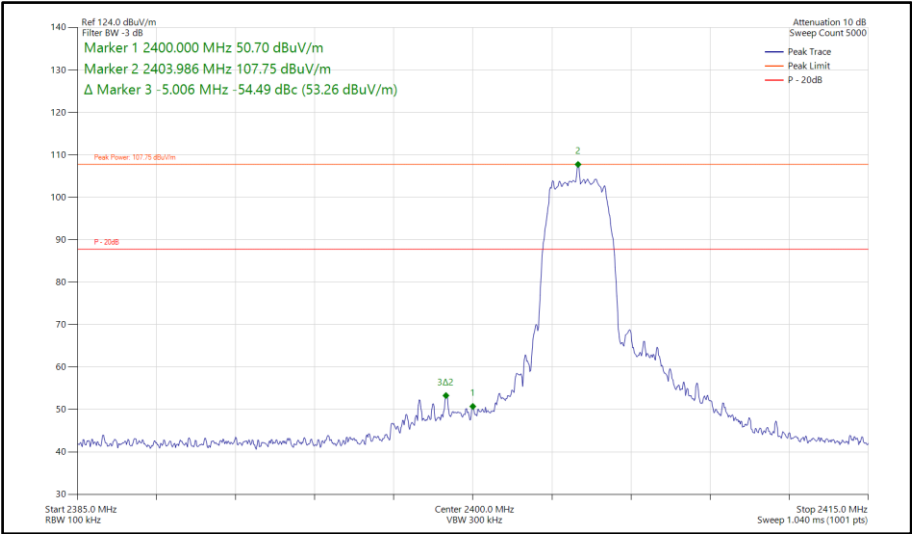


Figure 512 - Bluetooth HDRPS2, SISO, Core 2 - 2404 MHz
Band Edge Frequency 2400 MHz

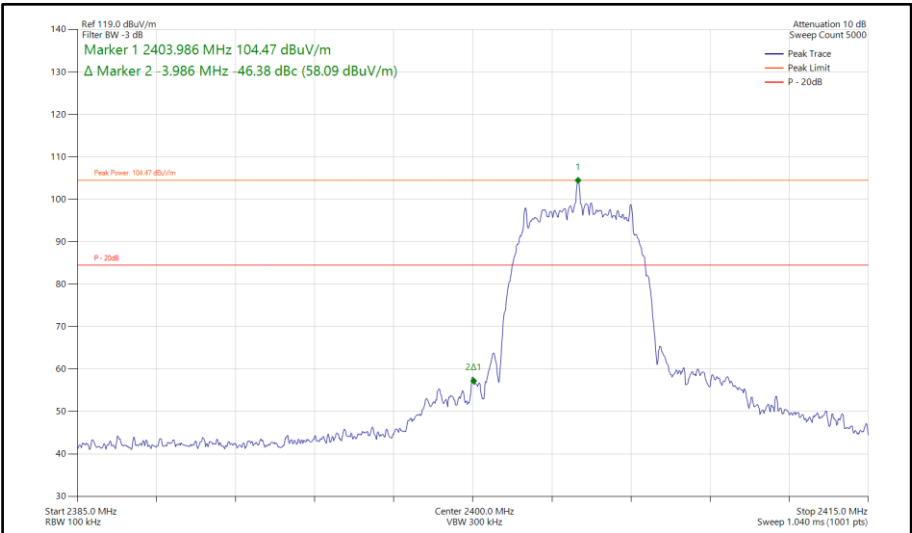


Figure 513 - Bluetooth HDRPM12, SISO, Core 2 - 2404 MHz
Band Edge Frequency 2400 MHz



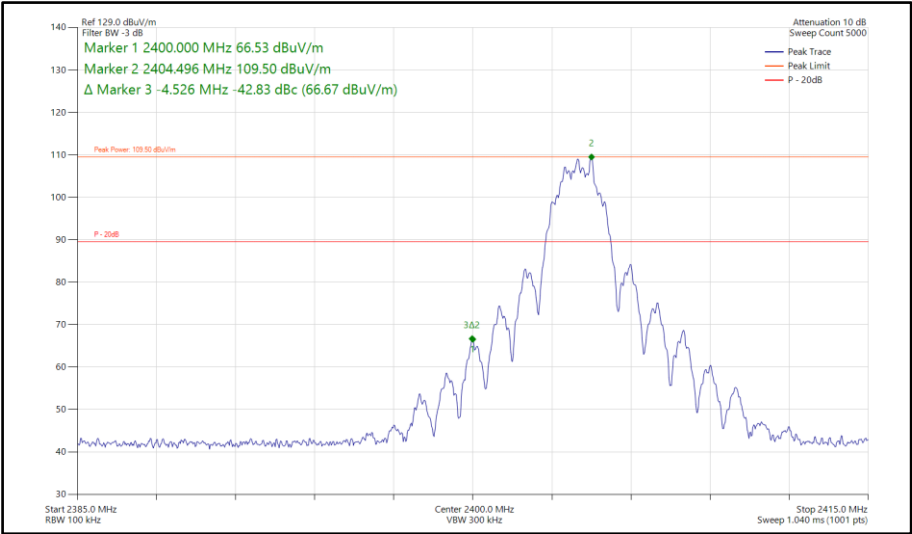


Figure 516 - Bluetooth CS1LE2M, SISO, Core 2 - 2404 MHz
Band Edge Frequency 2400 MHz

iPA - Core 0-1 (MIMO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	2DH5	2402	2400	-57.59
Static	3DH5	2402	2400	-54.82
Static	HDR4	2404	2400	-62.29
Static	HDR8	2404	2400	-51.05
Static	LE1M	2402	2400	-53.96
Static	LE2M	2404	2400	-56.30
Static	HDT3	2404	2400	-27.87
Static	HDT4	2404	2400	-26.12
Static	HDT6	2404	2400	-24.66
Static	HDRPS2	2404	2400	-59.57
Static	HDRPM12	2404	2400	-44.49
Static	XHDRPM8	2404	2400	-44.43
Static	CS1LE1M	2402	2400	-41.00
Static	CS1LE2M	2404	2400	-41.55

Table 162 - MIMO Authorised Band Edge Results

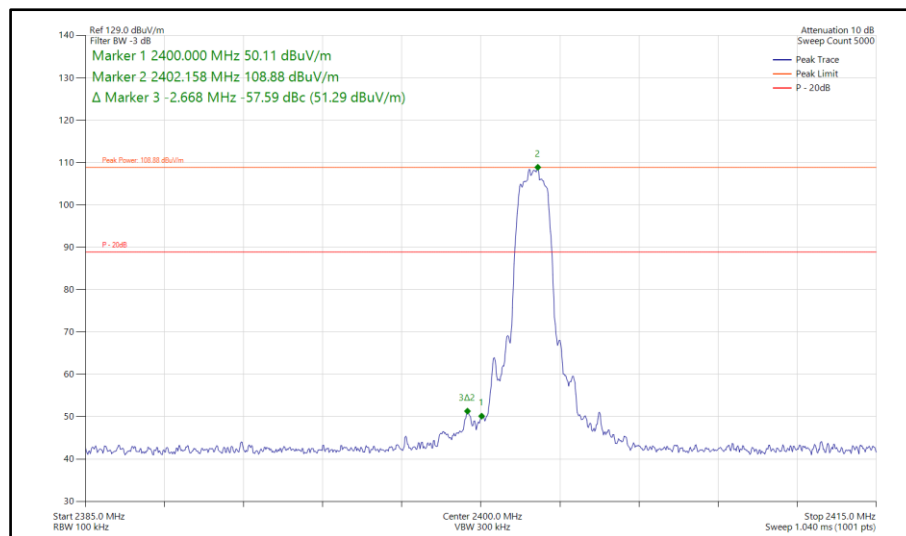


Figure 517 - Bluetooth 2DH5, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2400 MHz

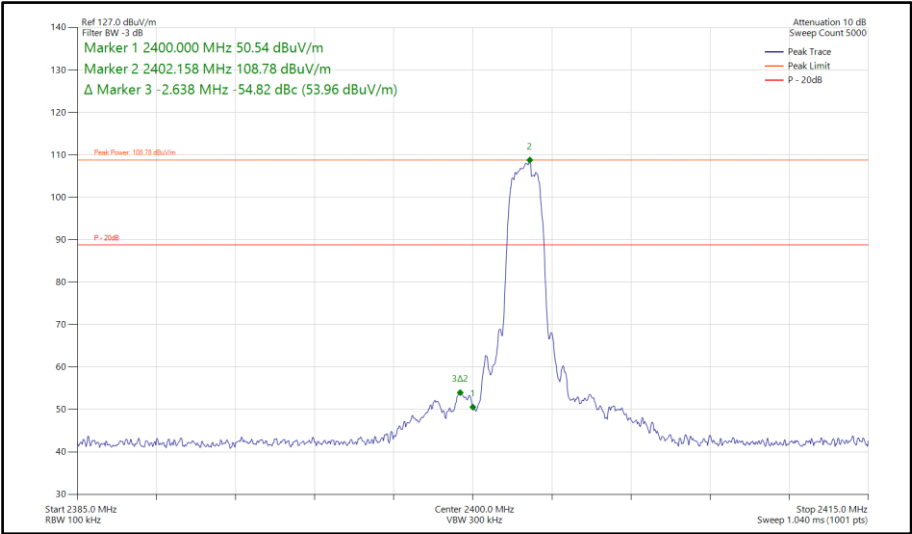


Figure 518 - Bluetooth 3DH5, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2400 MHz

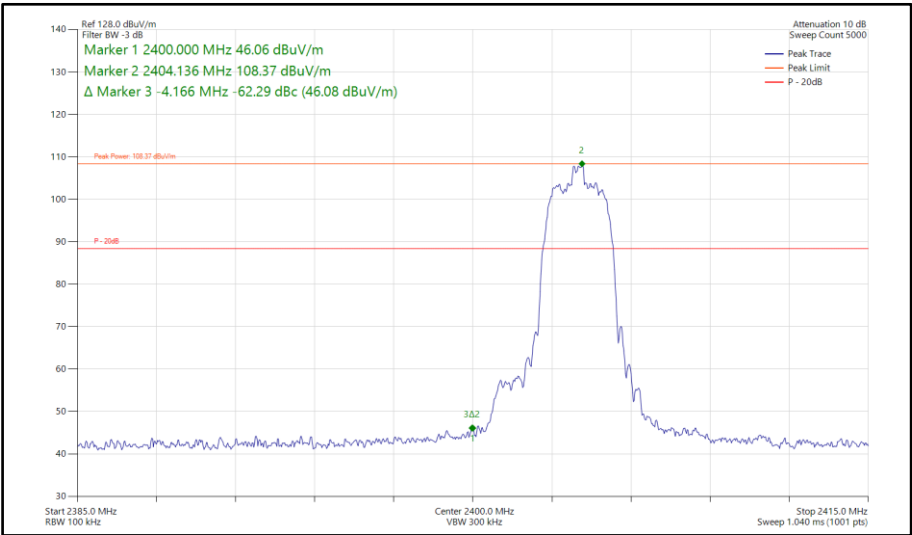


Figure 519 - Bluetooth HDR4, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

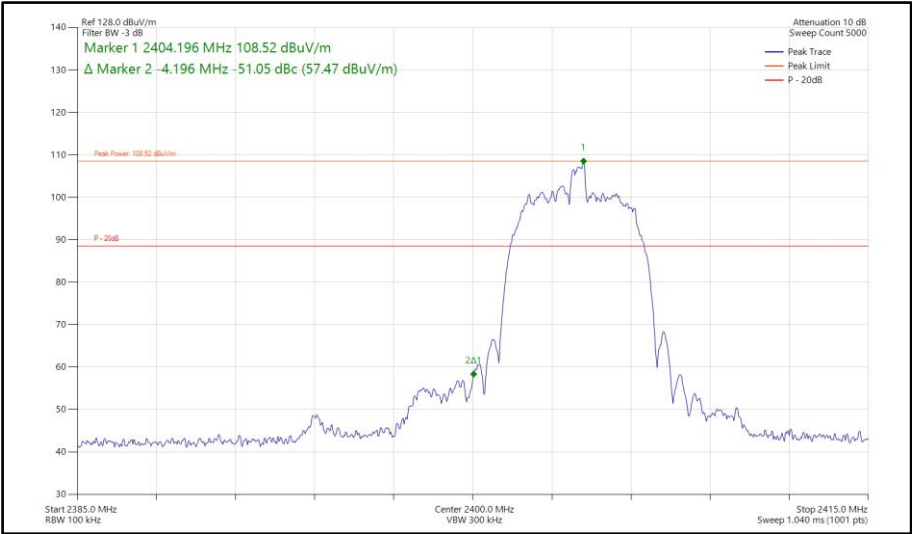


Figure 520 - Bluetooth HDR8, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

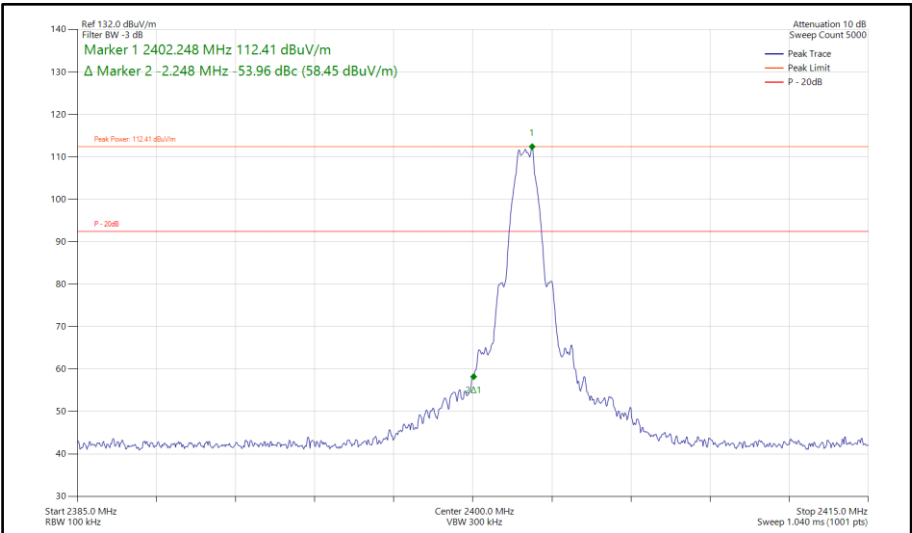



Figure 521 - Bluetooth LE1M, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2400 MHz



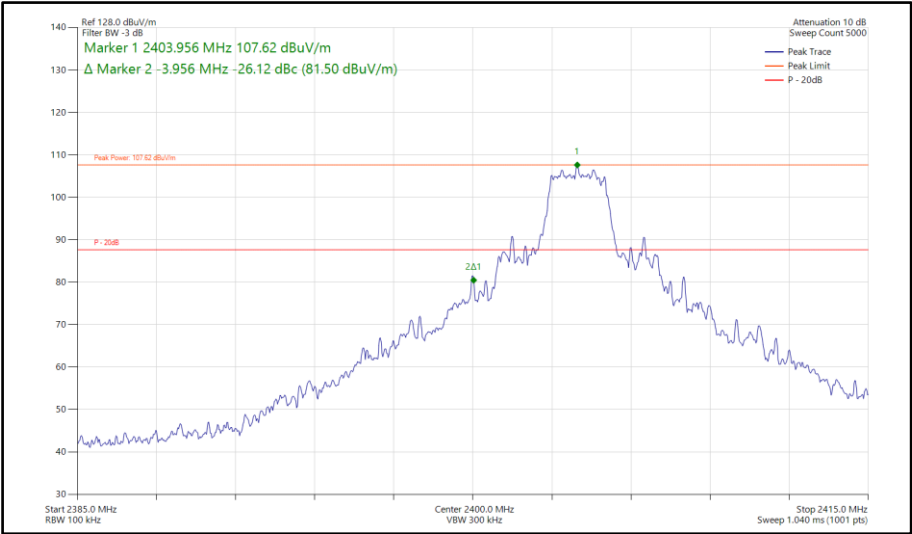


Figure 524 - Bluetooth HDT4, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

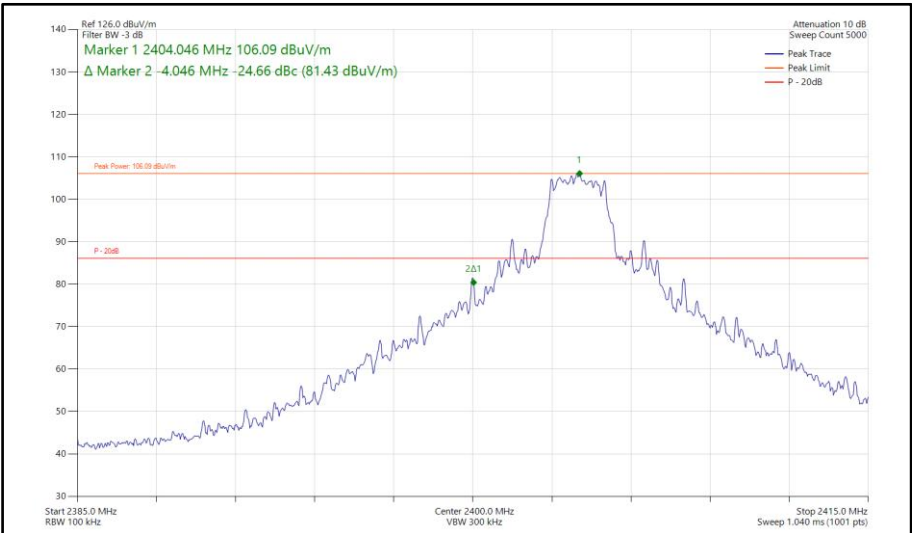


Figure 525 - Bluetooth HDT6, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

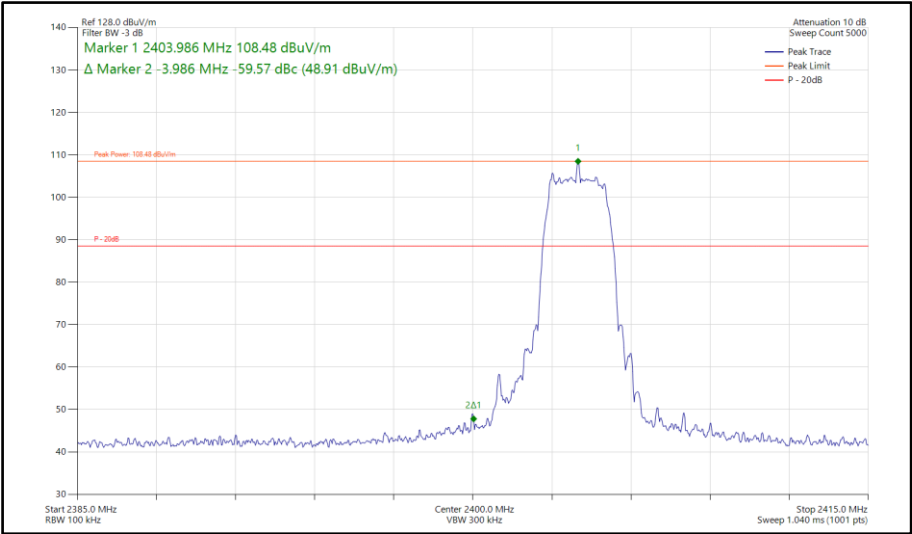


Figure 526 - Bluetooth HDRPS2, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

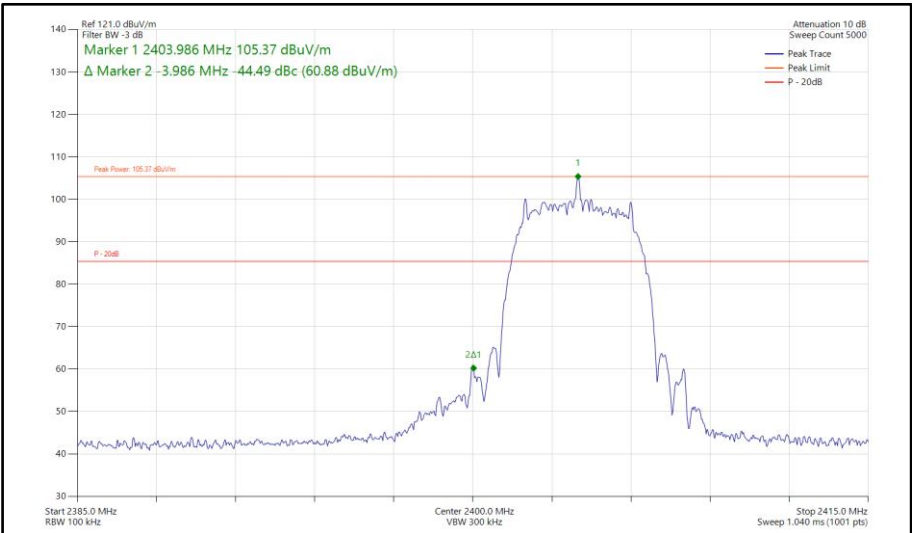


Figure 527 - Bluetooth HDRPM12, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

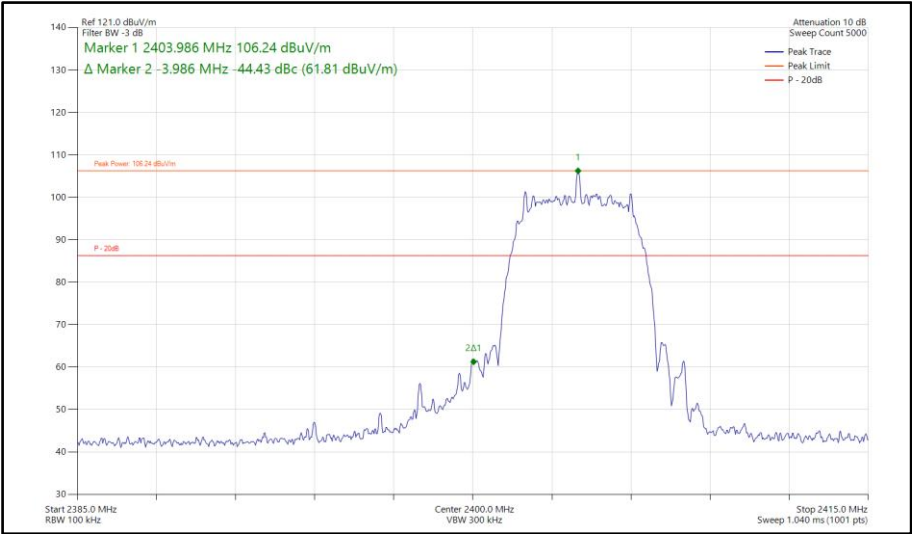


Figure 528 - Bluetooth XHDRPM8, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

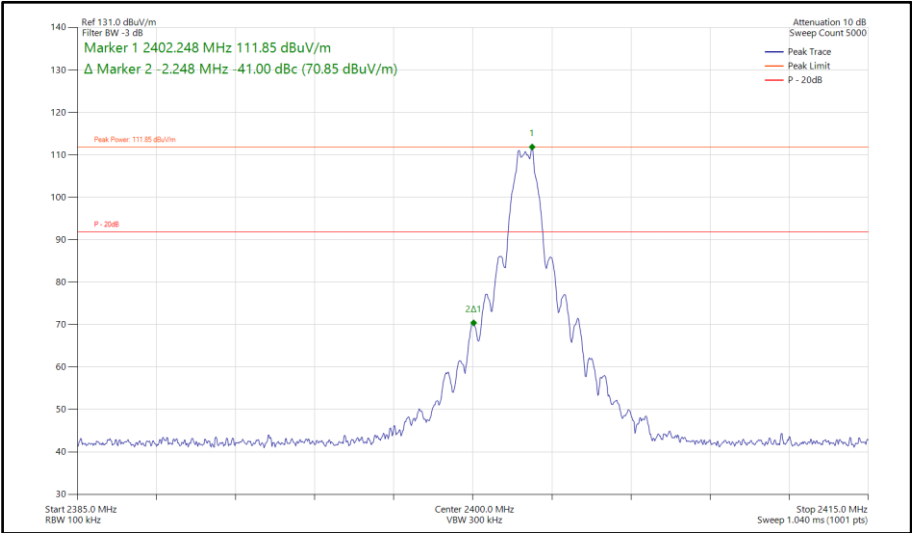


Figure 529 - Bluetooth CS1LE1M, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2400 MHz

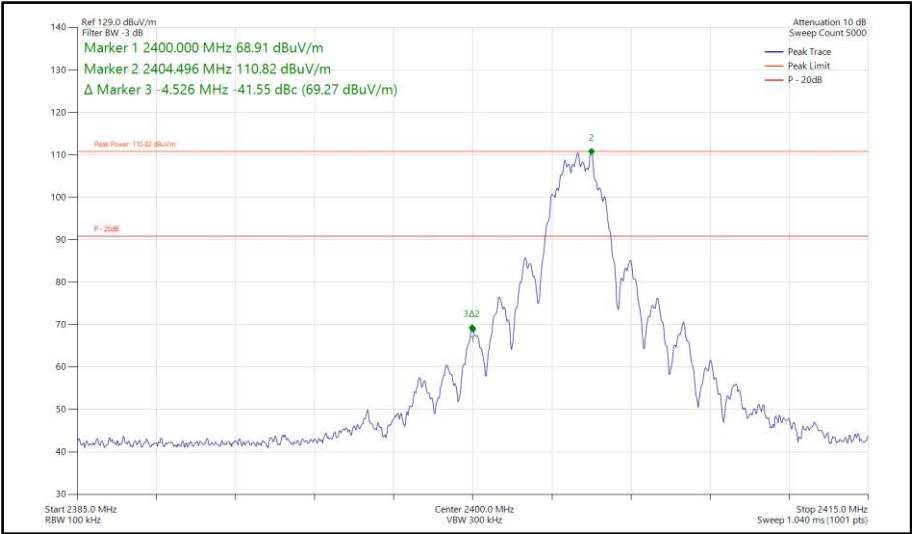


Figure 530 - Bluetooth CS1LE2M, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

ePA - Core 0 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	2DH5	2402	2400	-61.76
Static	3DH5	2402	2400	-61.86
Static	HDR4	2404	2400	-66.37
Static	HDR8	2404	2400	-46.95
Static	LE1M	2402	2400	-65.06
Static	LE2M	2404	2400	-66.79
Static	HDT3	2404	2400	-57.88
Static	HDT4	2404	2400	-57.74
Static	HDT6	2404	2400	-51.19
Static	HDRPS2	2404	2400	-62.47
Static	HDRPM12	2404	2400	-44.18
Static	XHDRPM8	2404	2400	-43.99
Static	CS1LE1M	2402	2400	-41.76
Static	CS1LE2M	2404	2400	-41.29

Table 163 - SISO Authorised Band Edge Results

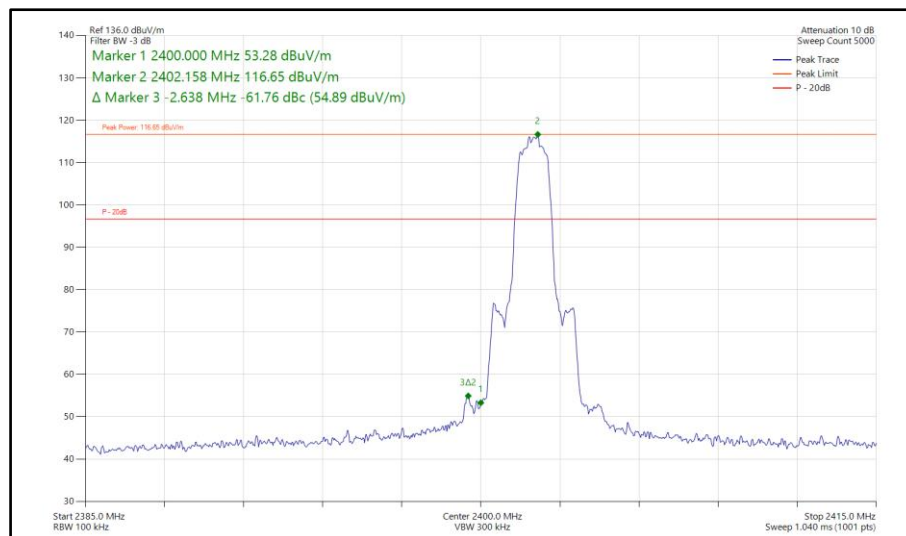


Figure 531 - Bluetooth 2DH5, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2400 MHz

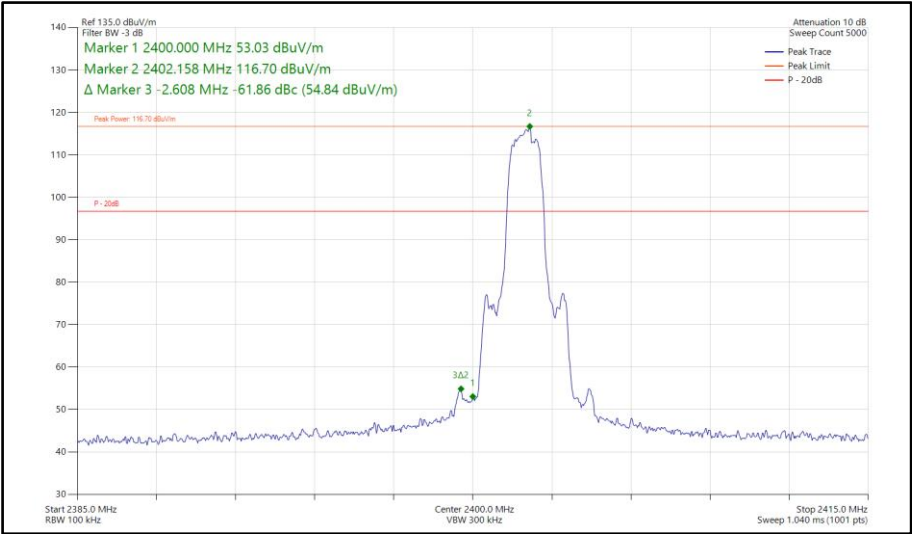


Figure 532 - Bluetooth 3DH5, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2400 MHz

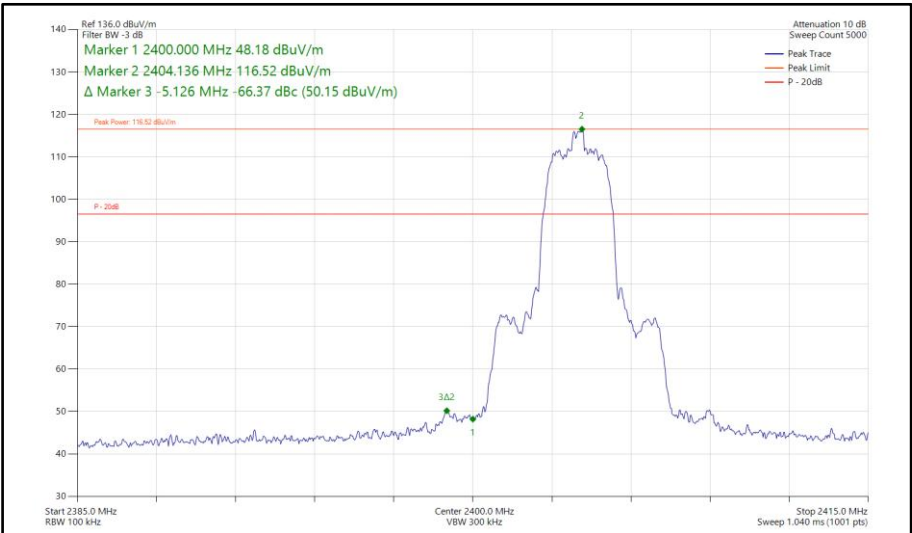


Figure 533 - Bluetooth HDR4, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

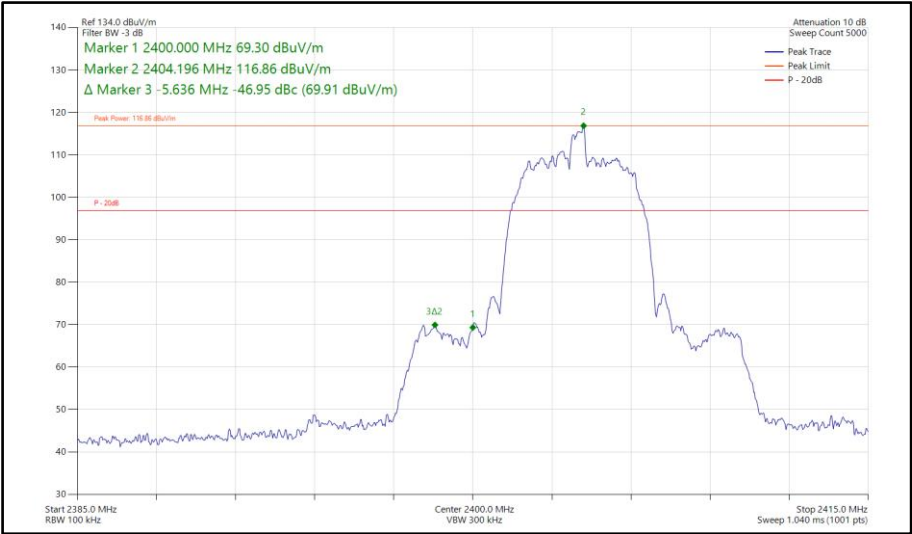


Figure 534 - Bluetooth HDR8, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

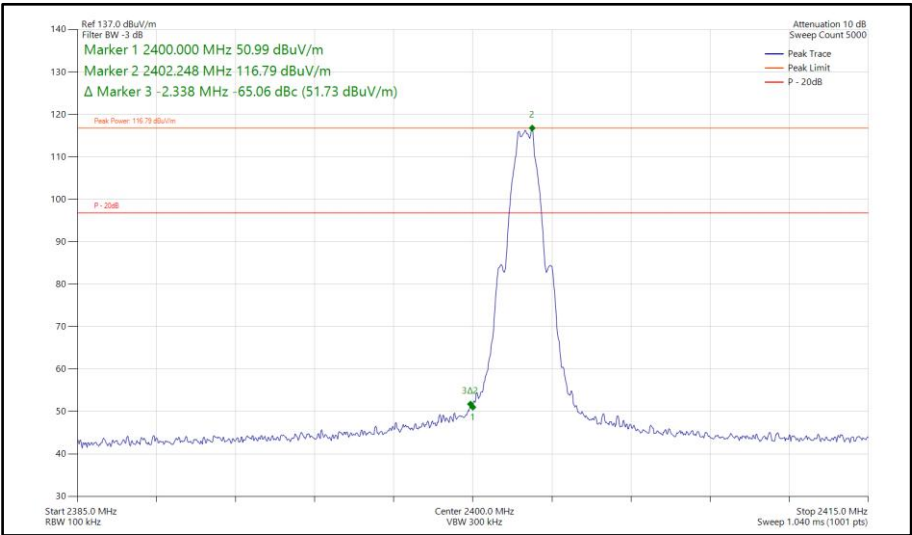


Figure 535 - Bluetooth LE1M, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2400 MHz

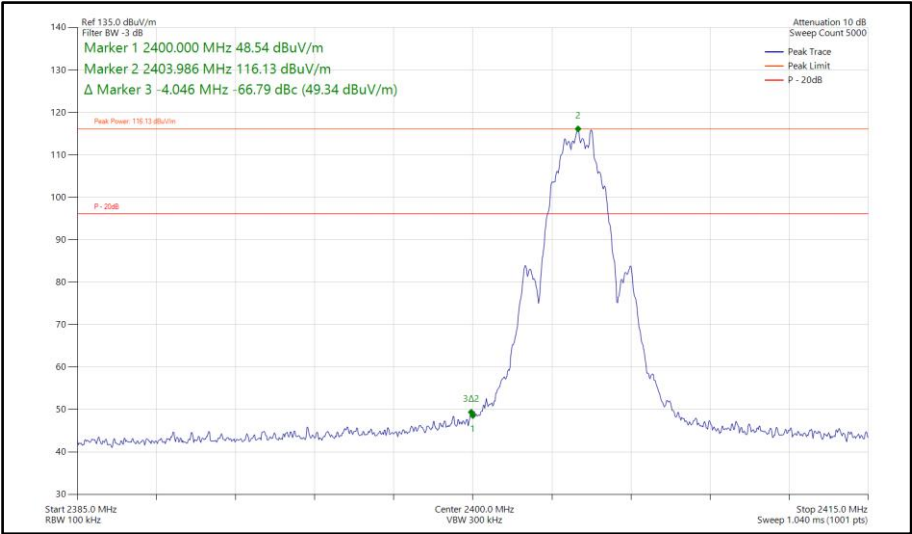


Figure 536 - Bluetooth LE2M, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

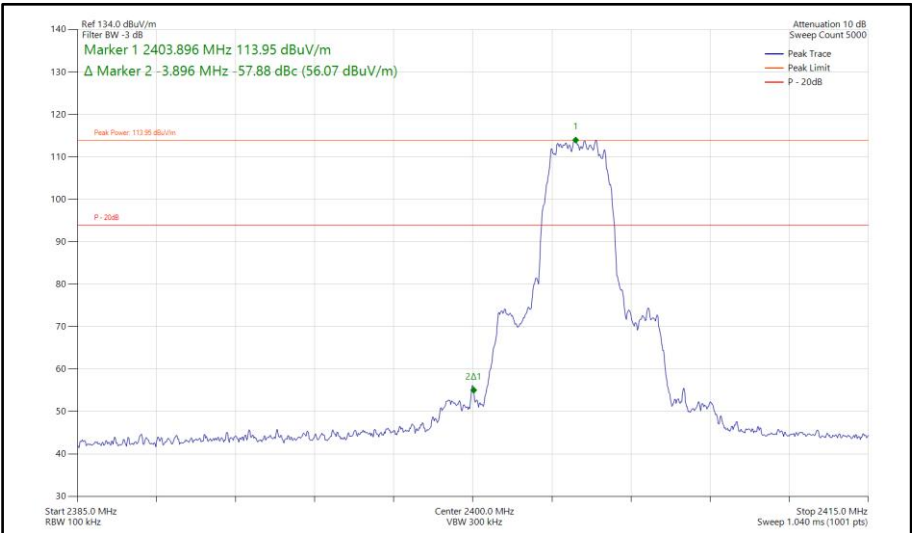


Figure 537 - Bluetooth HDT3, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

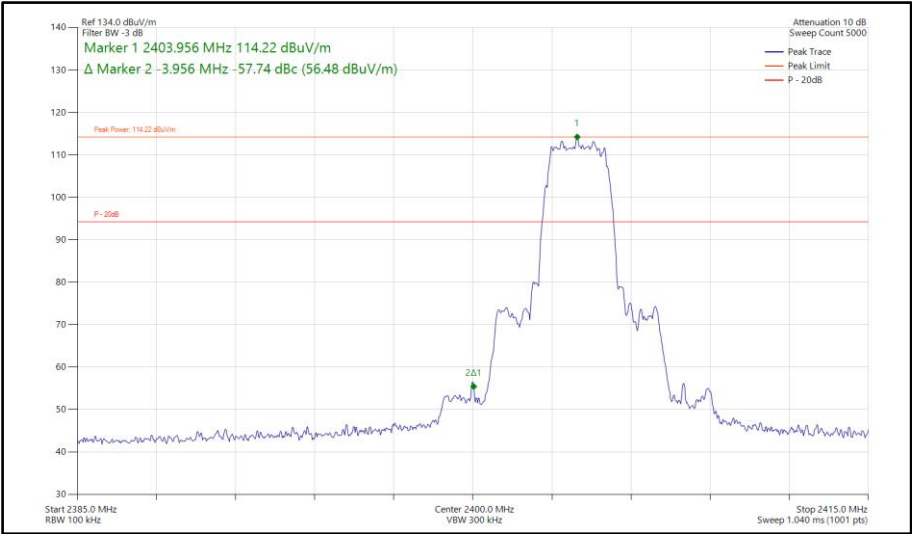


Figure 538 - Bluetooth HDT4, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

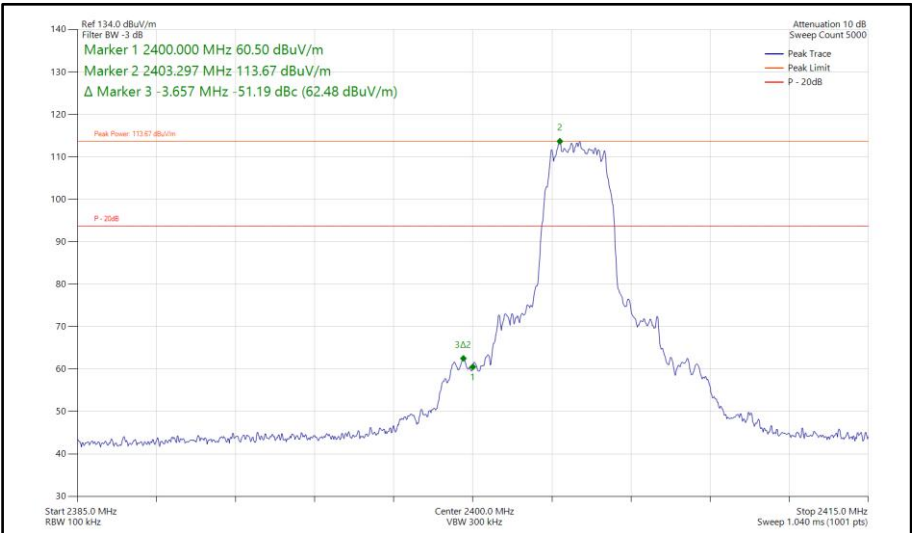


Figure 539 - Bluetooth HDT6, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

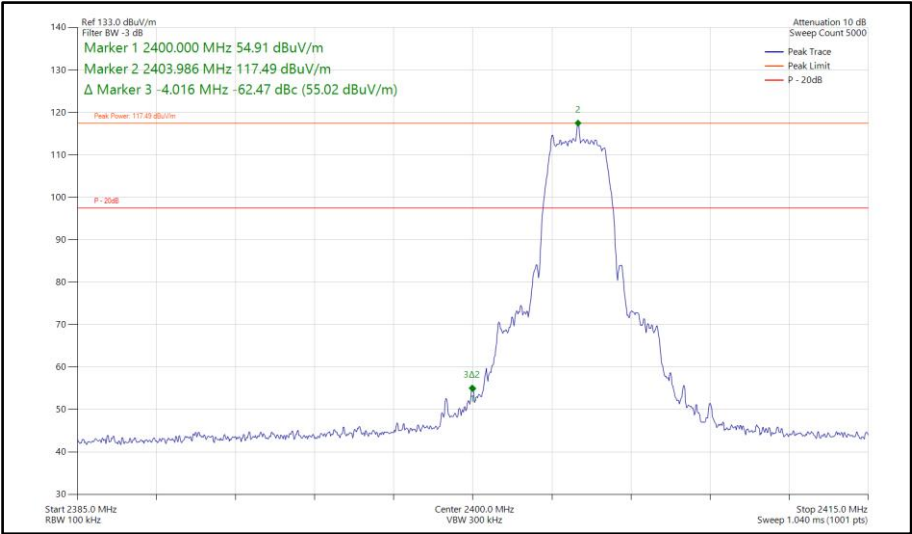


Figure 540 - Bluetooth HDRPS2, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

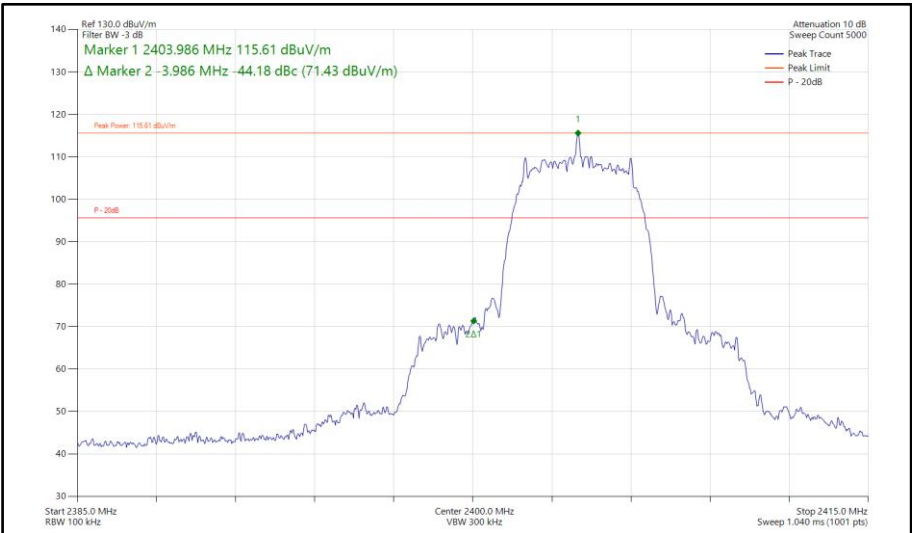


Figure 541 - Bluetooth HDRPM12, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

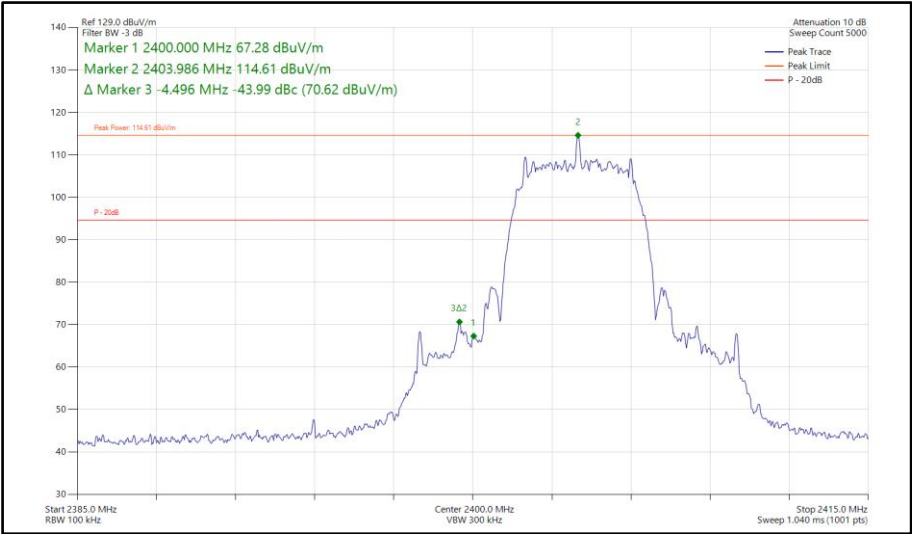


Figure 542 - Bluetooth XHDRPM8, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

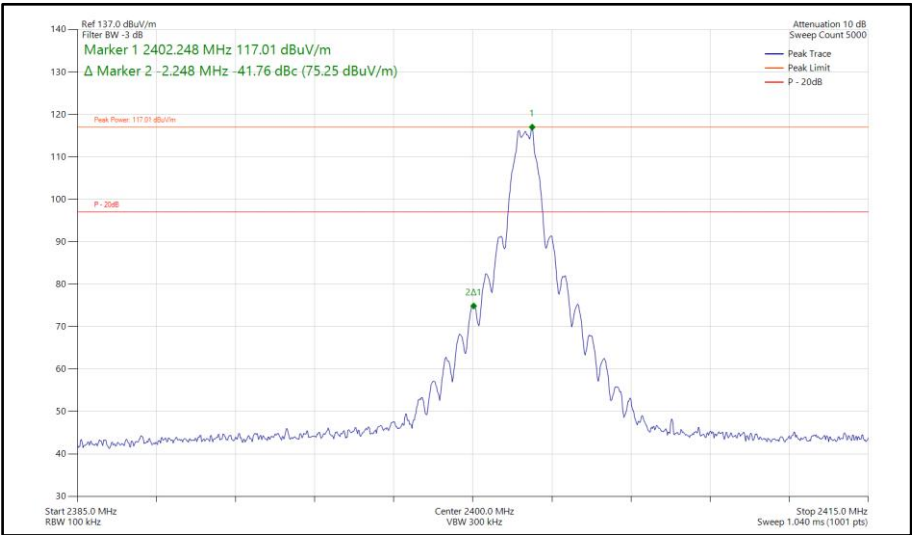


Figure 543 - Bluetooth CS1LE1M, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2400 MHz

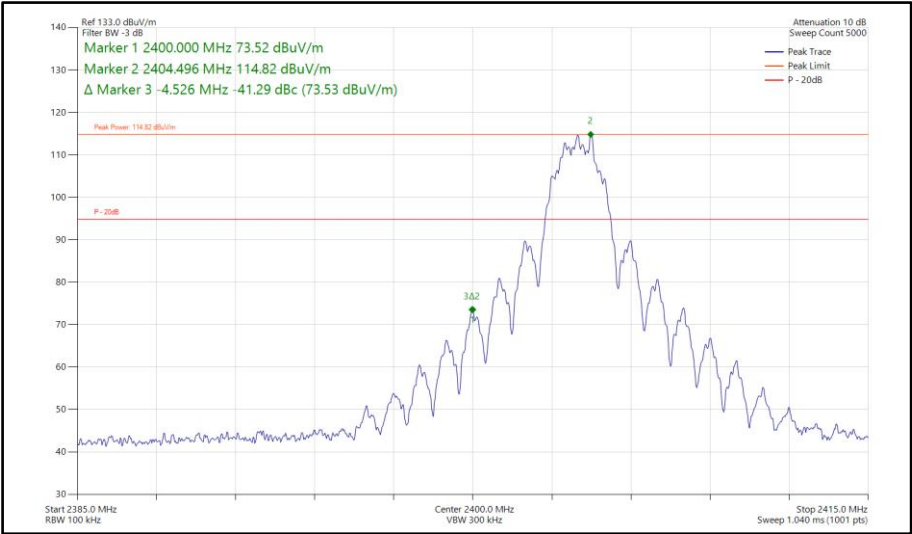


Figure 544 - Bluetooth CS1LE2M, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz



ePA - Core 1 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	2DH5	2402	2400	-54.93
Static	3DH5	2402	2400	-54.80
Static	HDR4	2404	2400	-61.06
Static	HDR8	2404	2400	-44.32
Static	LE1M	2402	2400	-66.04
Static	LE2M	2404	2400	-66.91
Static	HDT3	2404	2400	-53.21
Static	HDT4	2404	2400	-52.98
Static	HDT6	2404	2400	-47.96
Static	HDRPS2	2404	2400	-56.49
Static	HDRPM12	2404	2400	-42.53
Static	XHDRPM8	2404	2400	-42.26
Static	CS1LE1M	2402	2400	-41.74
Static	CS1LE2M	2404	2400	-41.19

Table 164 - SISO Authorised Band Edge Results

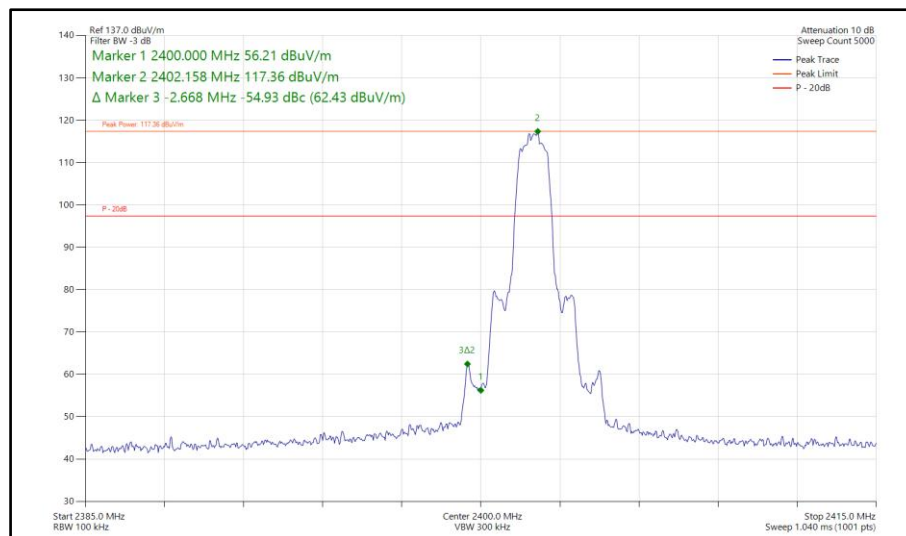


Figure 545 - Bluetooth 2DH5, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2400 MHz

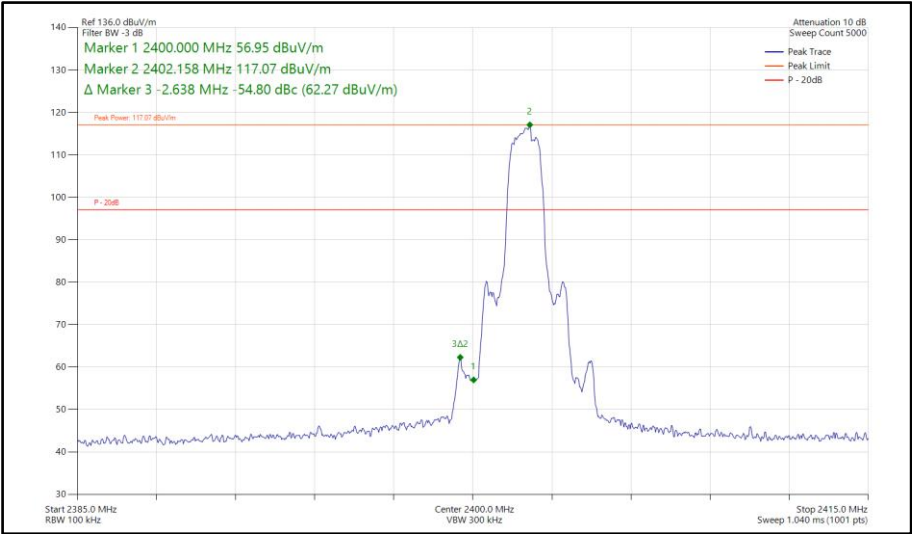


Figure 546 - Bluetooth 3DH5, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2400 MHz

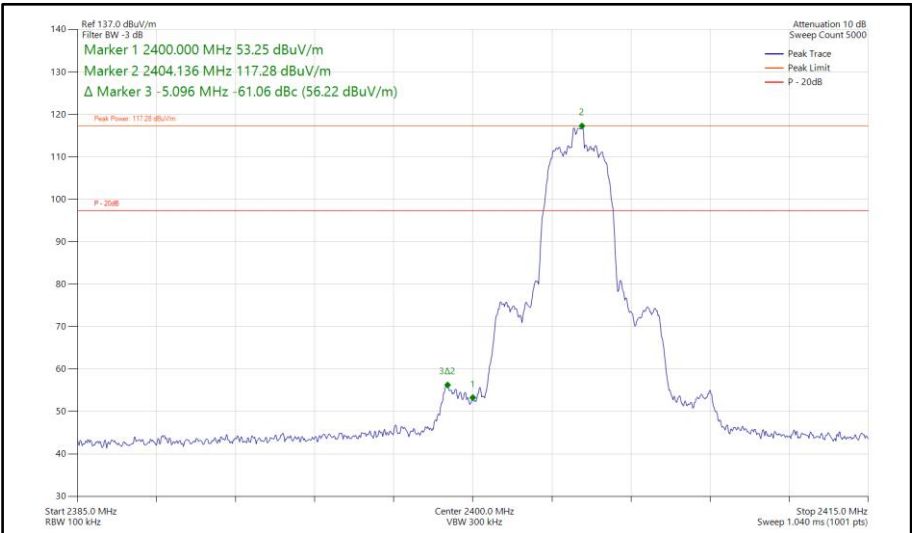


Figure 547 - Bluetooth HDR4, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

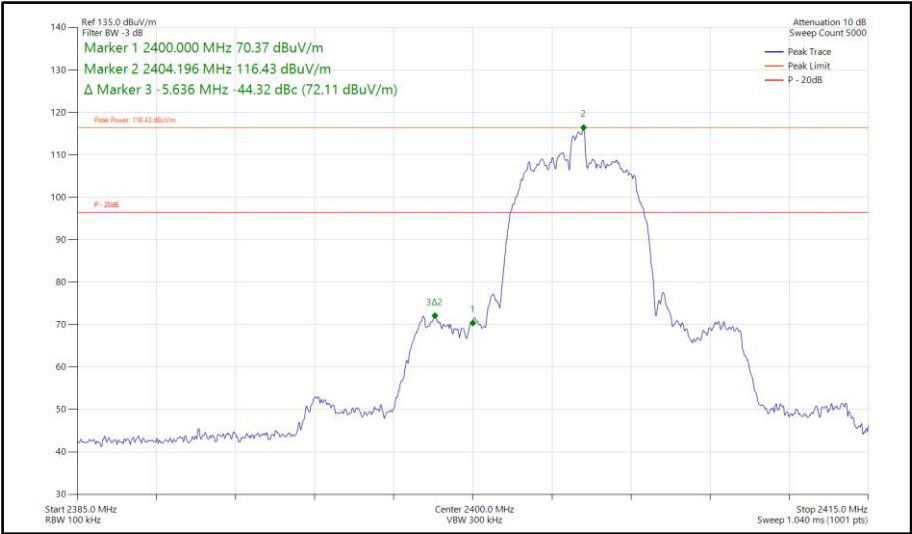


Figure 548 - Bluetooth HDR8, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

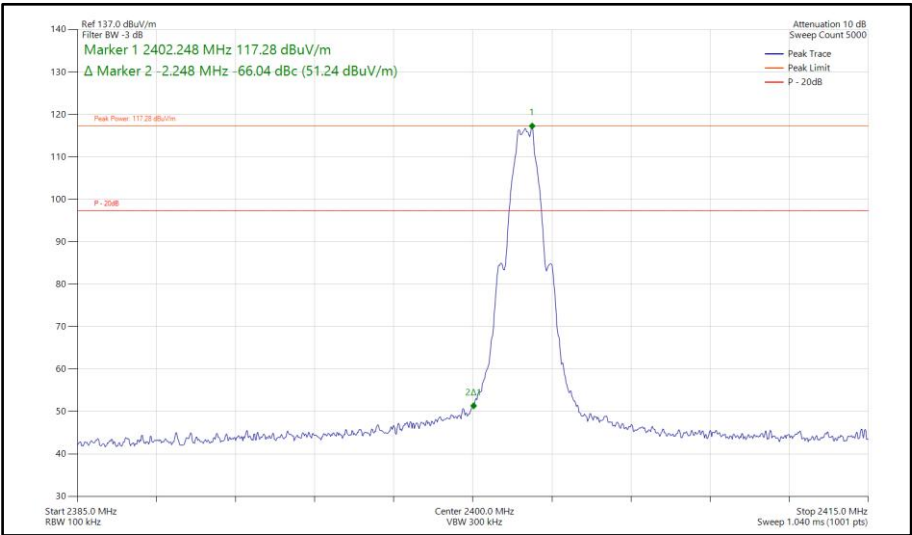


Figure 549 - Bluetooth LE1M, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2400 MHz

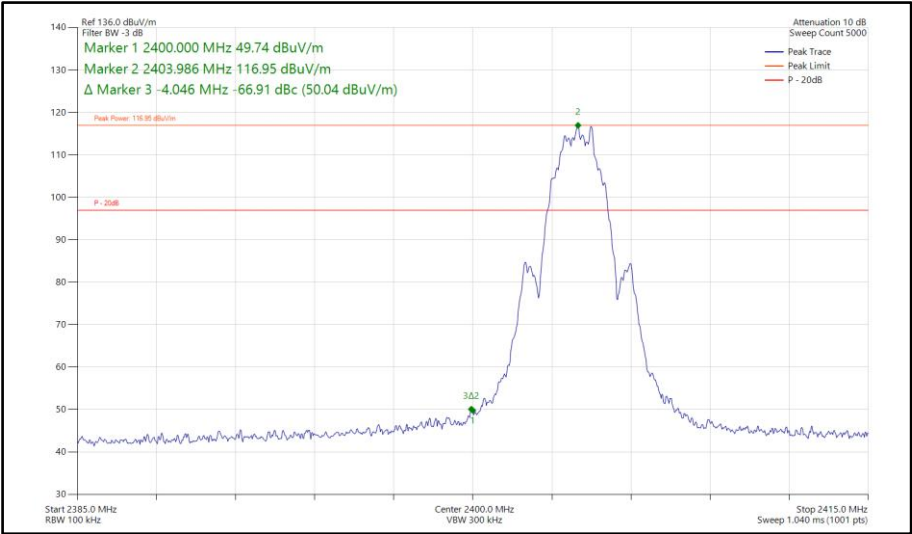


Figure 550 - Bluetooth LE2M, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

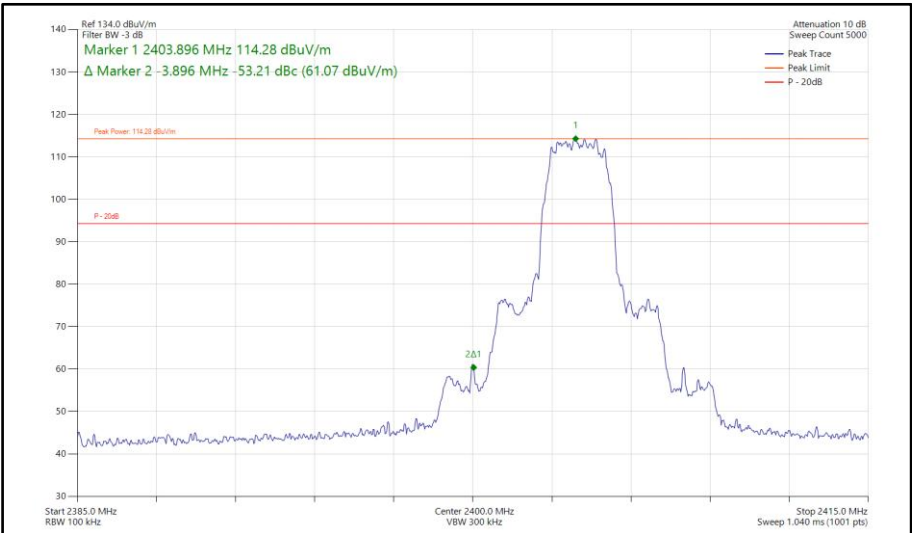


Figure 551 - Bluetooth HDT3, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

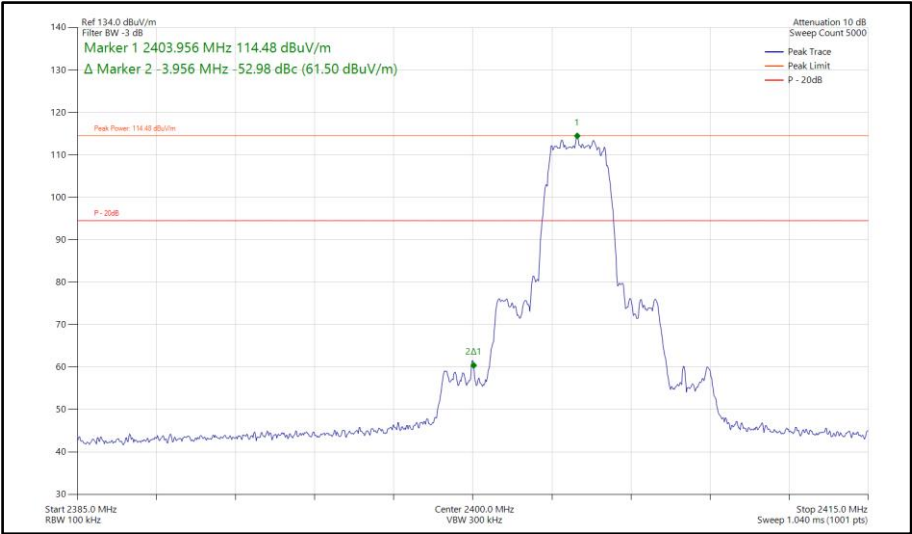


Figure 552 - Bluetooth HDT4, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

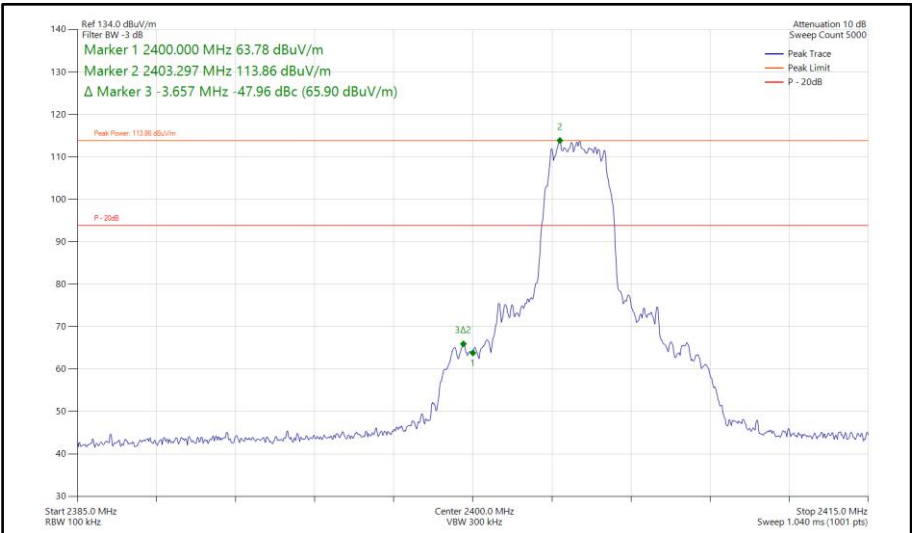


Figure 553 - Bluetooth HDT6, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

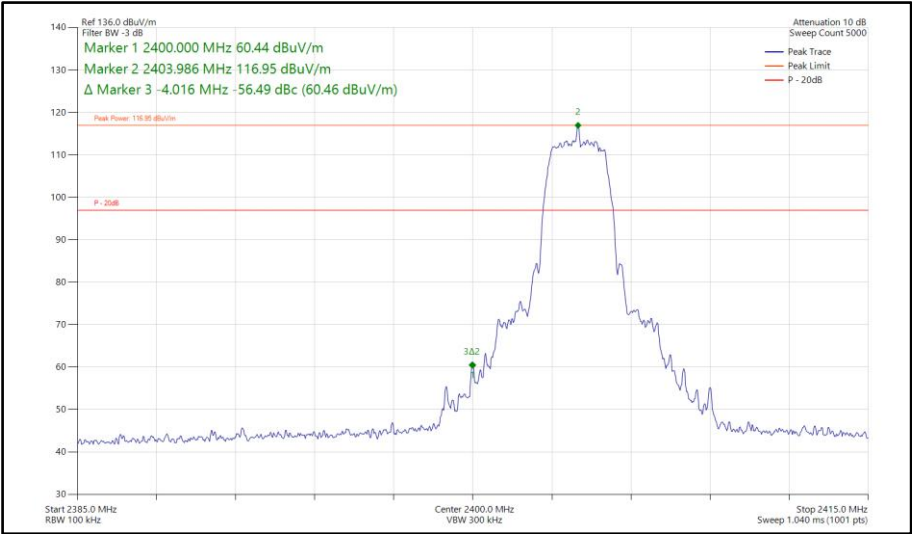


Figure 554 - Bluetooth HDRPS2, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

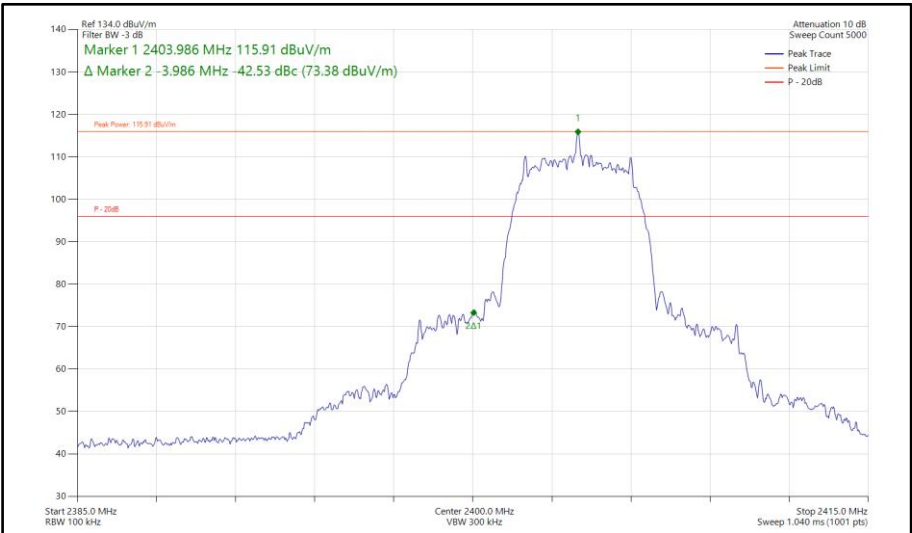


Figure 555 - Bluetooth HDRPM12, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

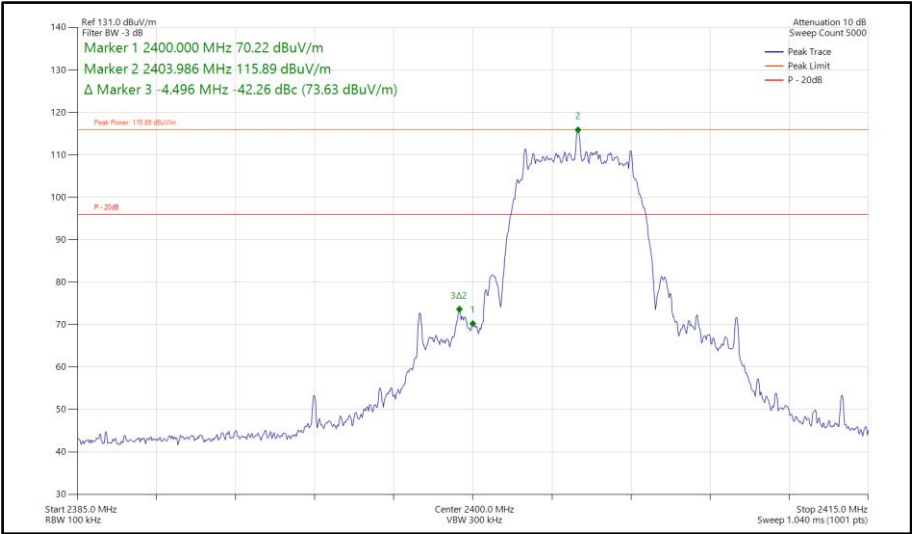


Figure 556 - Bluetooth XHDRPM8, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

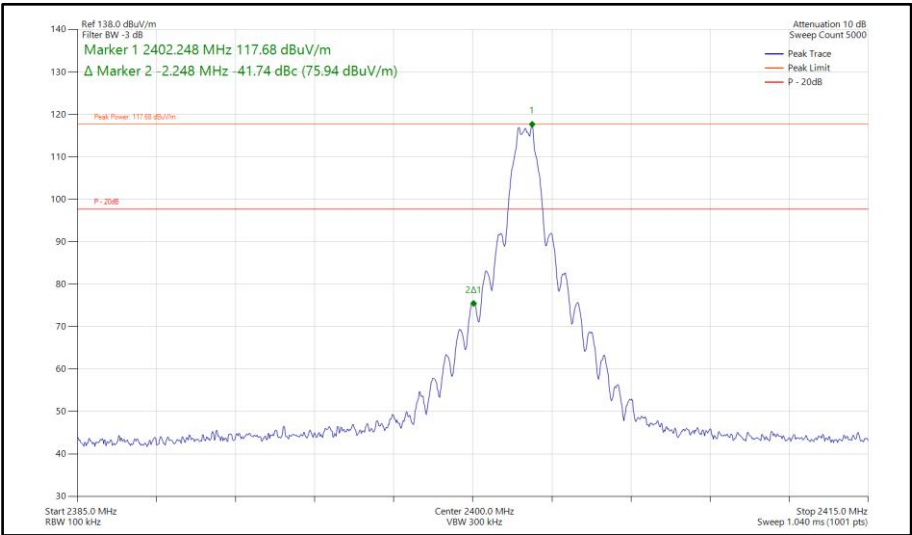


Figure 557 - Bluetooth CS1LE1M, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2400 MHz

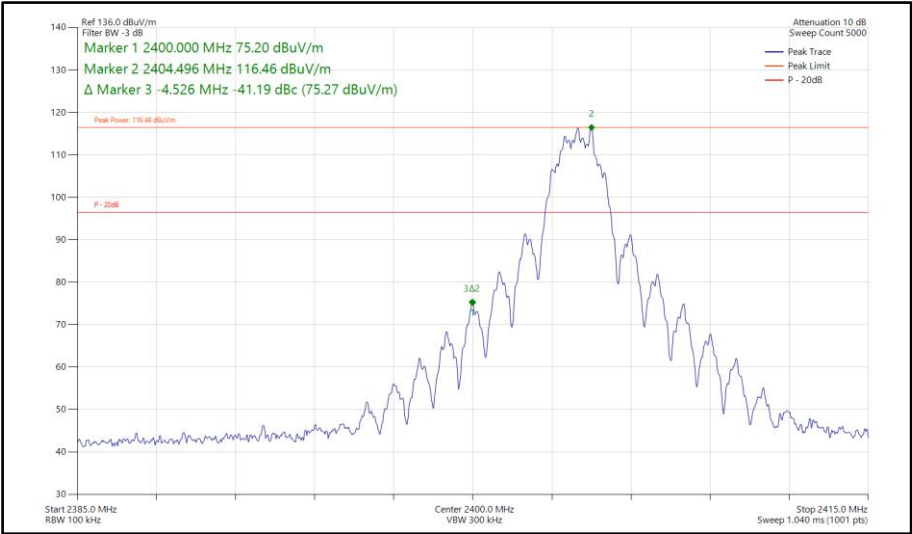


Figure 558 - Bluetooth CS1LE2M, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

ePA - Core 0-1 (MIMO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	2DH5	2402	2400	-49.47
Static	3DH5	2402	2400	-49.53
Static	HDR4	2404	2400	-63.04
Static	HDR8	2404	2400	-46.35
Static	LE1M	2402	2400	-65.70
Static	LE2M	2404	2400	-67.59
Static	HDT3	2404	2400	-54.87
Static	HDT4	2404	2400	-55.68
Static	HDT6	2404	2400	-49.07
Static	HDRPS2	2404	2400	-59.13
Static	HDRPM12	2404	2400	-44.14
Static	XHDRPM8	2404	2400	-44.16
Static	CS1LE1M	2402	2400	-41.84
Static	CS1LE2M	2404	2400	-41.24

Table 165 - MIMO Authorised Band Edge Results

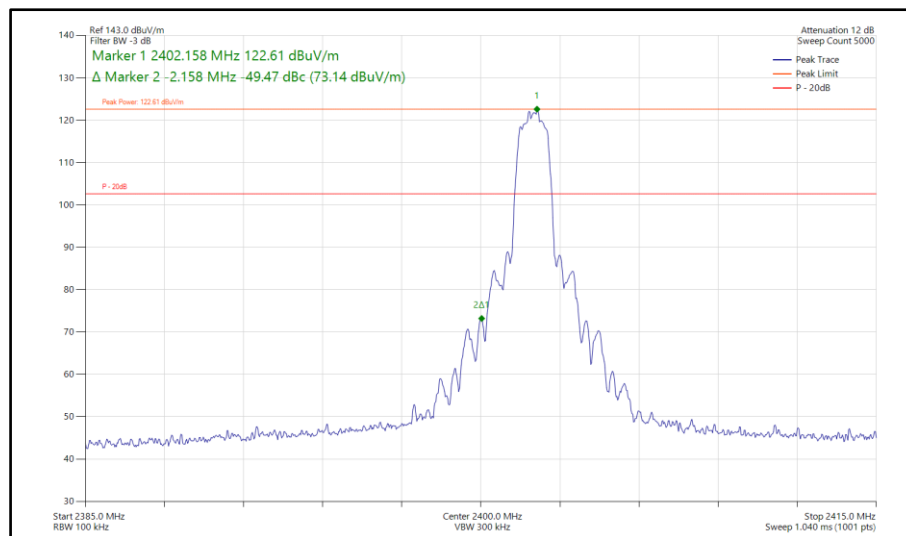


Figure 559 - Bluetooth 2DH5, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2400 MHz

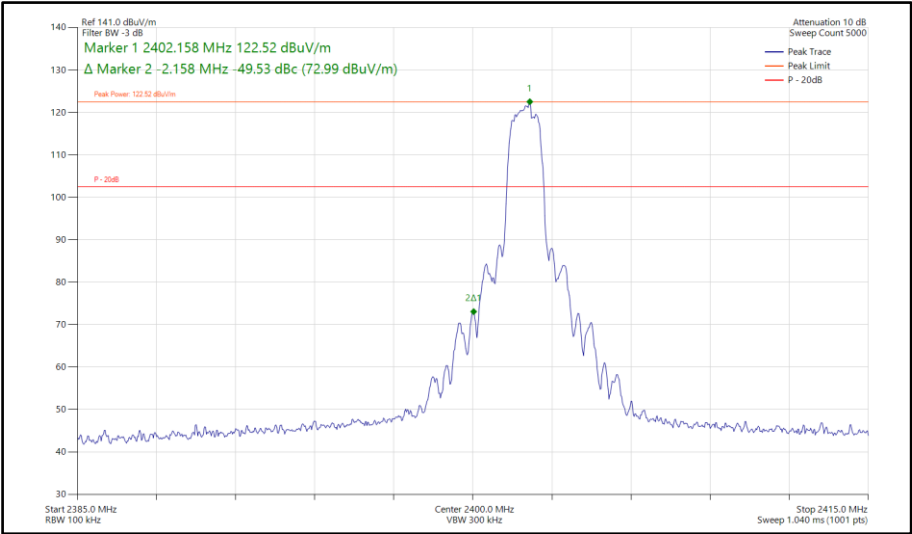


Figure 560 - Bluetooth 3DH5, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2400 MHz

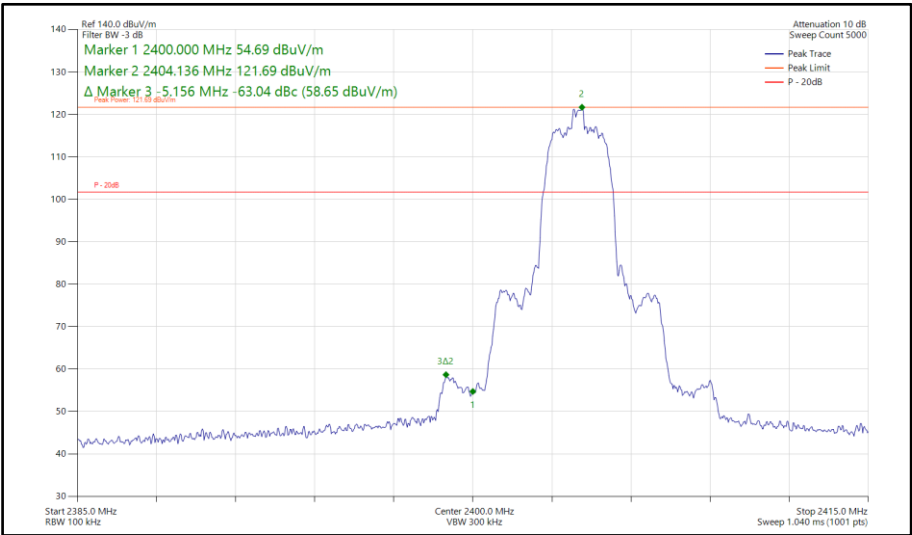


Figure 561 - Bluetooth HDR4, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

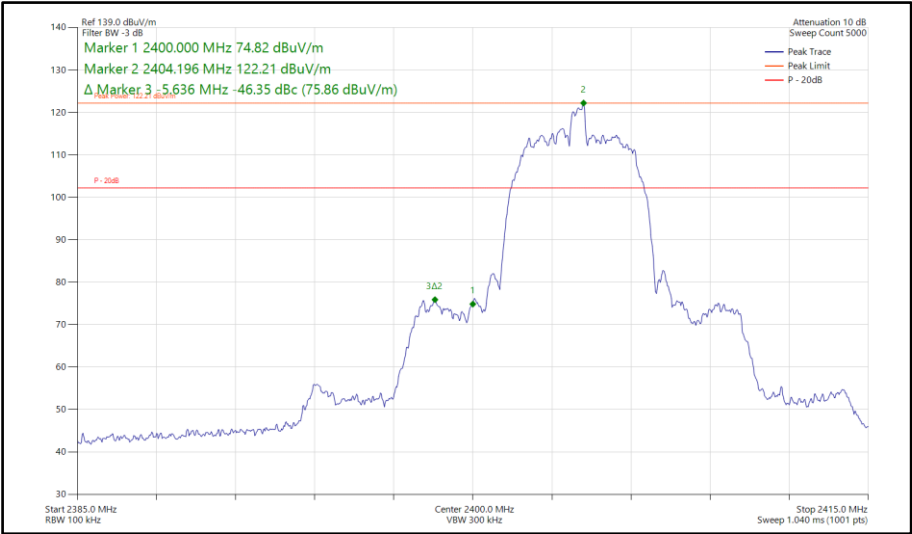


**Figure 562 - Bluetooth HDR8, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz**

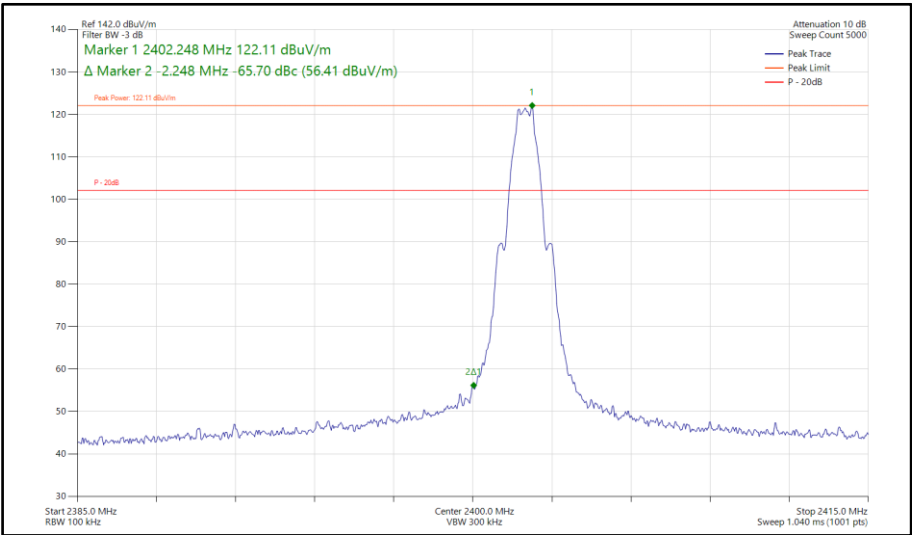


**Figure 563 - Bluetooth LE1M, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2400 MHz**

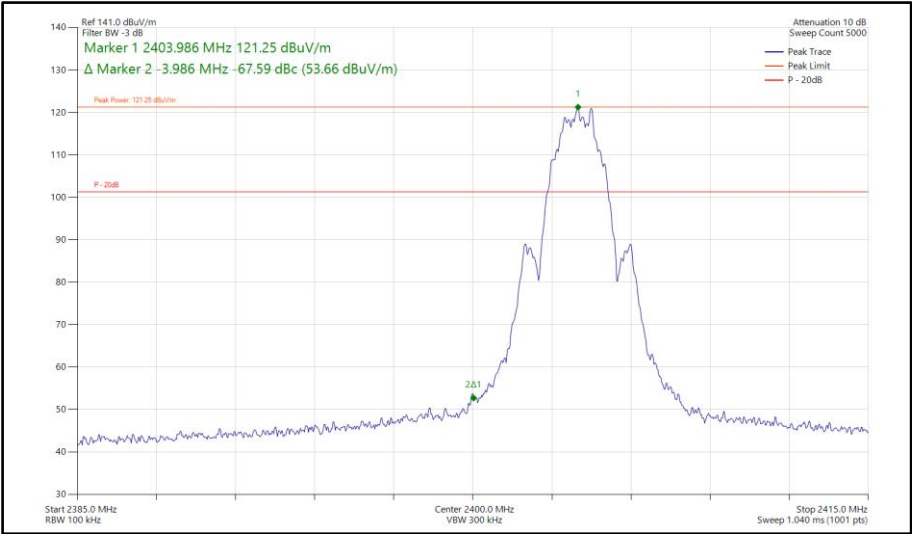


Figure 564 - Bluetooth LE2M, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

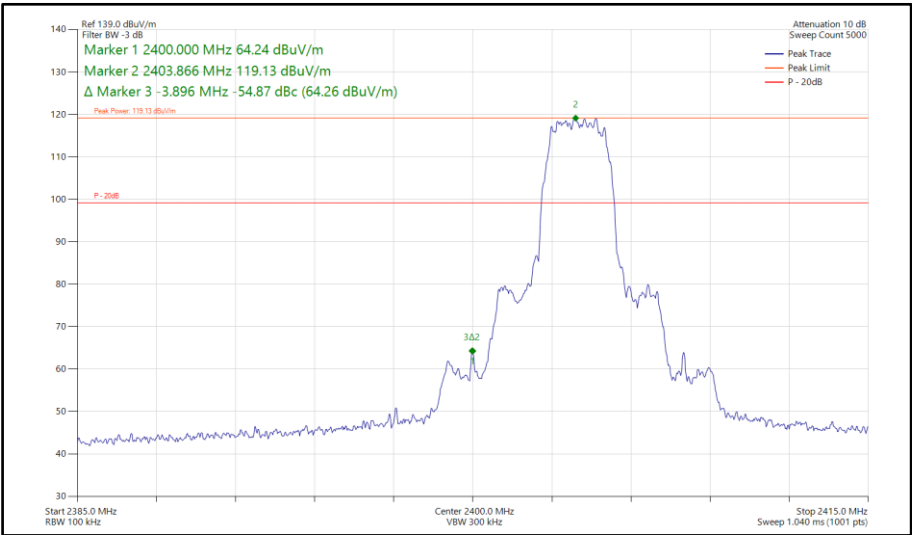


Figure 565 - Bluetooth HDT3, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

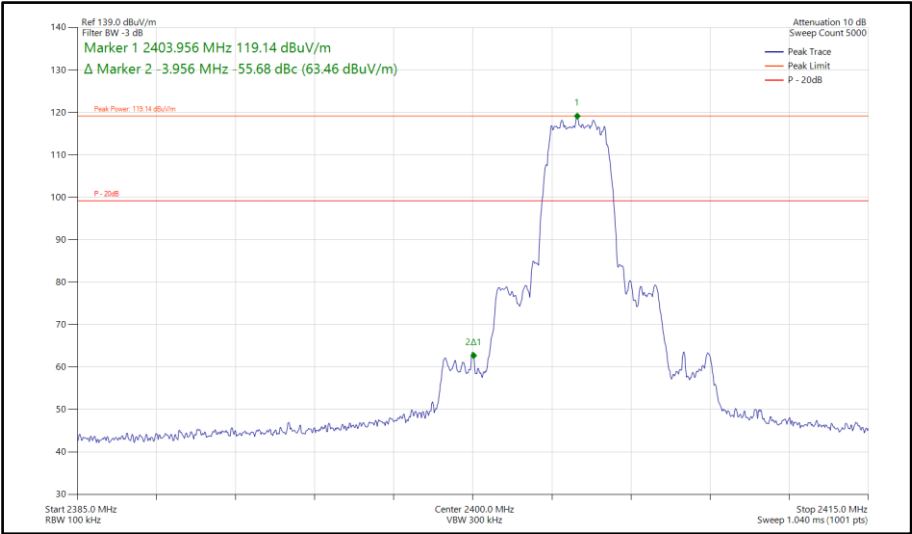


Figure 566 - Bluetooth HDT4, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

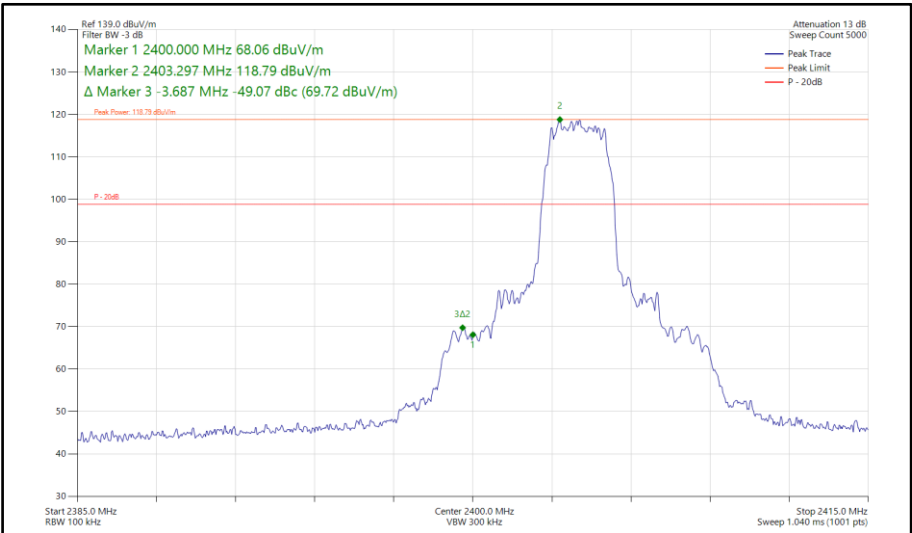


Figure 567 - Bluetooth HDT6, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

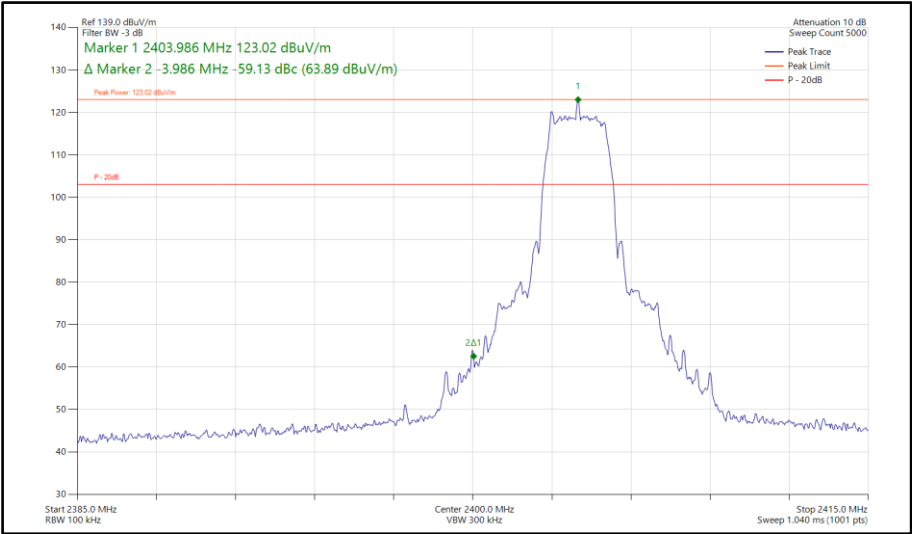


Figure 568 - Bluetooth HDRPS2, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

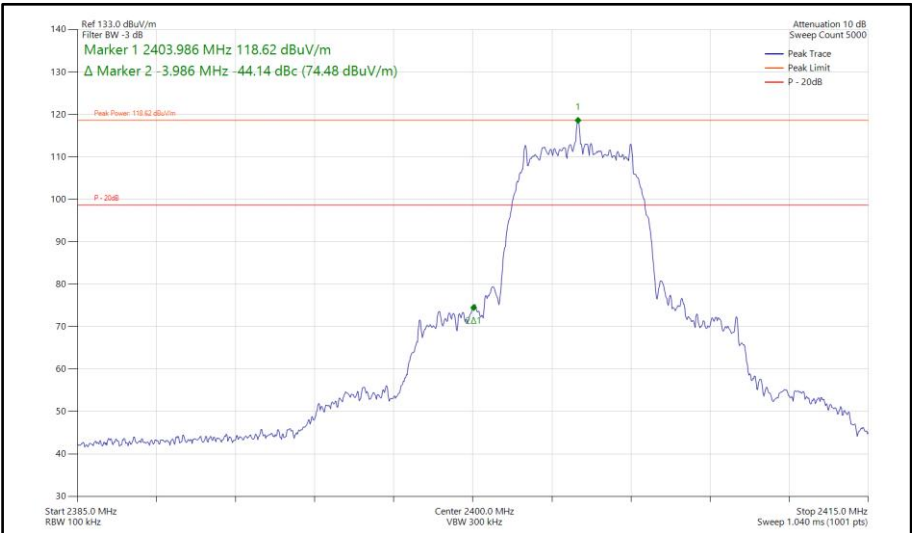


Figure 569 - Bluetooth HDRPM12, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

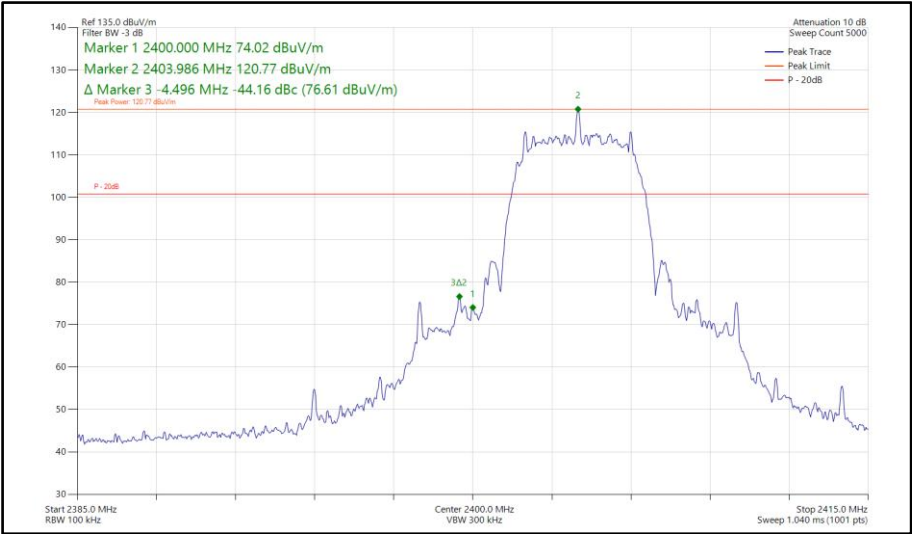


Figure 570 - Bluetooth XHDRPM8, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz

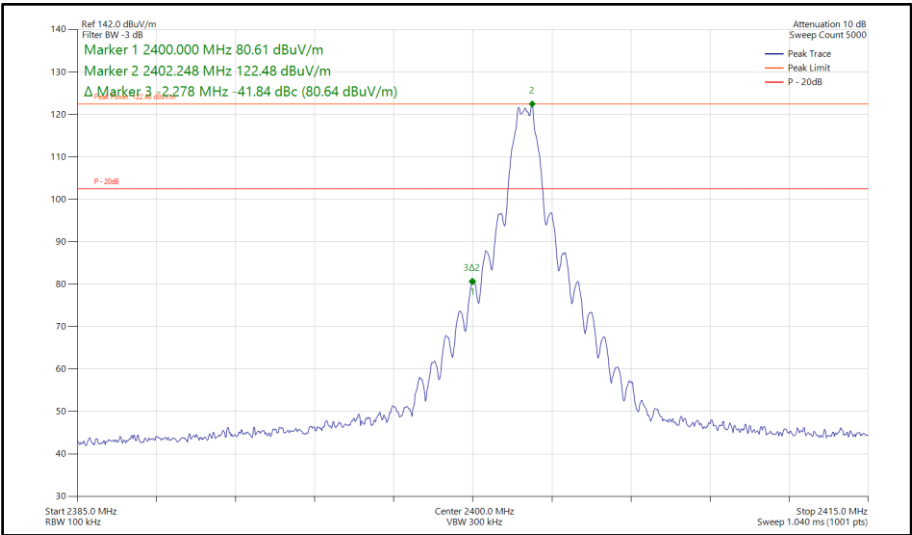


Figure 571 - Bluetooth CS1LE1M, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2400 MHz

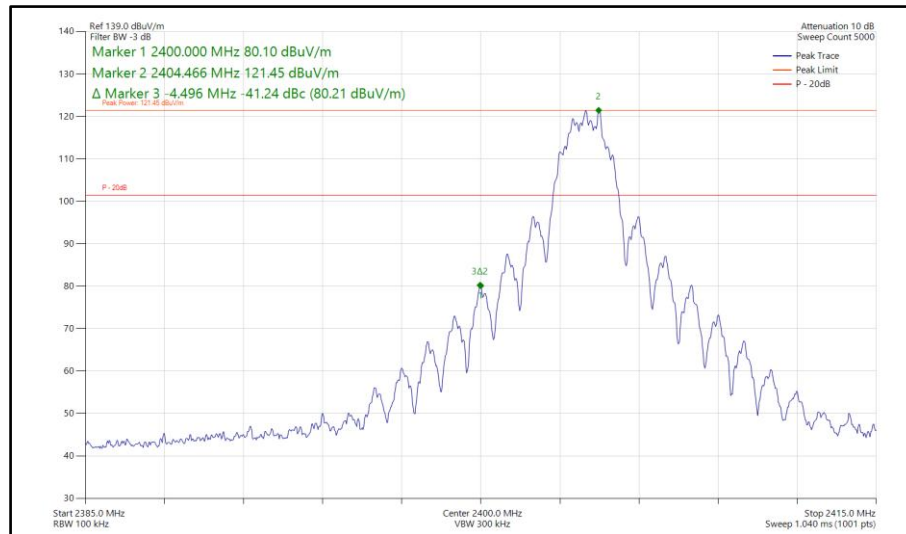


**Figure 572 - Bluetooth CS1LE2M, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2400 MHz**

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

ISED RSS-247, Limit Clause 6.6

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



2.4.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14 & RF Chamber 17.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.6.3 V.	5125	-	O/P Mon
EMI Test Receiver	Rohde & Schwarz	ESW44	5912	12	17-Sep-2027
1500W (300V 12A) AC Power Supply	iTech	IT7324	5955	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 14	5958	36	23-Apr-2028
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5959	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5962	-	TU
Horn Antenna (1-10.5 GHz)	Schwarzbeck	BBHA9120B	6140	12	12-Sep-2027
Digital Multimeter	Fluke	115	6145	12	02-Jun-2027
Digital Multimeter	Fluke	115	6147	12	03-Jun-2027
SAC Switch Unit	TUV SUD	TUV_SSU_001	6190	12	11-Dec-2026
EMI Test Receiver	Rohde & Schwarz	ESW44	6294	12	23-Mar-2027
Cable (SMA to SMA 1m)	Junkosha	MWX221/B	6305	12	19-May-2027
SAC Switch Unit	TUV SUD	TUV_SSU_004 PLC	6349	12	18-May-2027
Horn Antenna (1-10.5 GHz)	Schwarzbeck	BBHA 9120 B	6457	12	12-Sep-2027
AC Power Supply	iTech	IT7324	6657	-	O/P Mon
3m Semi-Anechoic Chamber	Albatross Projects	RF Chamber 17	6658	36	07-May-2028
Mast and Turntable Controller	Maturo Gmbh	FCU3.0	6659	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6660	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6661	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	6795	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6796	-	TU
Handheld Hygrometer	Fluke	971	6838	12	16-Sep-2026
1m SMA-Type Cable	Junkosha	MWX221-01000AMSAMS/B	6842	12	23-Sep-2026
1m SMA-Type Cable	Junkosha	MWX221-01000AMSAMS/B	6843	12	14-Sep-2027
8m SMA-Type Cable	Junkosha	MWX221-08000AMSAMS/B	6848	12	23-Oct-2026
8m SMA-Type Cable	Junkosha	MWX221-08000AMSAMS/B	6851	12	06-Nov-20

Table 166

TU - Traceability Unscheduled

O/P Mon - Output Monitored using calibrated equipment



2.5 Spurious Radiated Emissions

2.5.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.209 and 15.247 (d)
ISED RSS-247, Clause 2.4 and 6.6
ISED RSS-GEN, Clause 6.13 and 8.9

2.5.2 Equipment Under Test and Modification State

A3375, S/N: D57W4X0N2R - Modification State 0

2.5.3 Date of Test

18-August-2026 to 29-August-2026

2.5.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6.

The EUT was placed on the non-conducting platform in a manner typical of a normal installation.

Pre-scans in the 30 MHz to 1 GHz & 18 GHz to 26GHz range were limited to mid channel (2440 MHz).

The plots shown are the characterisation of the EUT. The limits on the plots represent the most stringent case for restricted bands, (74/54 dB μ V/m) when compared to 20 dBc outside restricted bands. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 10 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

Ports on the EUT were terminated with loads as described in ANSI C63.4 clause 6.2.4. For EUT's with multiple connectors of the same type, additional interconnecting cables were connected, and pre-scans performed to determine whether the level of the emissions were increased by >2 dB.

The following conversion can be applied to convert from dB μ V/m to μ V/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$.

Above 18 GHz, the measurement distance was reduced to 1 m. The limit line was increased by $20 \times \text{LOG}(3/1) = 9.54$ dB.

Where formal measurements have been necessary, the results have been presented in the emissions table.

A reduced frequency range for testing was employed on some of the test modes within this test section, based on the manufacturers RSE test plan. With any reduction based on their pre-assessment of the device, to determine the ranges and test channels that were most likely to produce emissions.

2.5.5 Example Test Setup Diagram

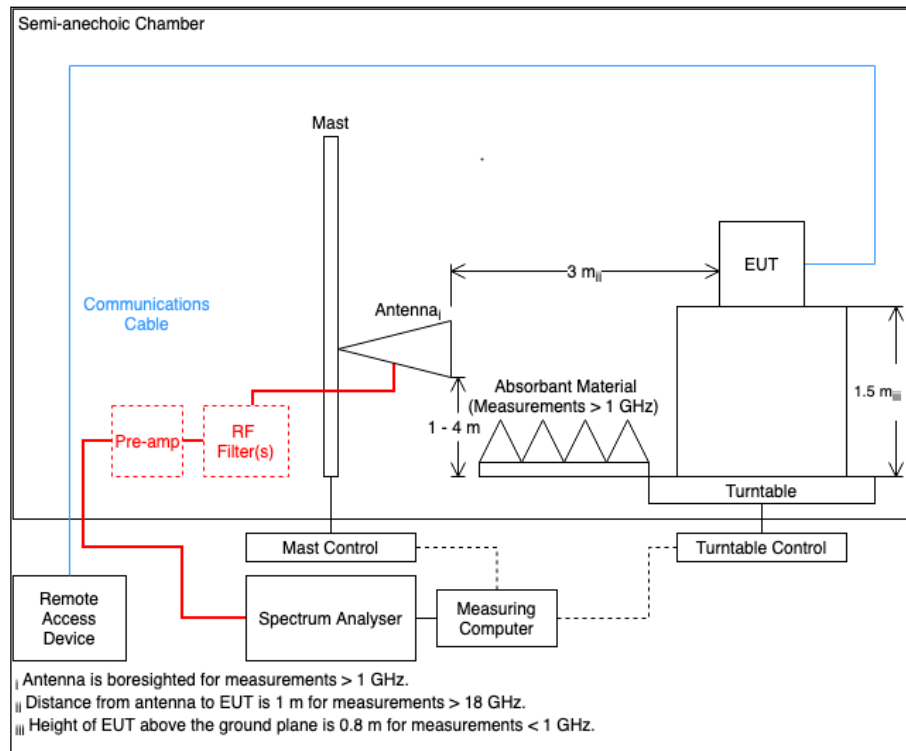


Figure 573

2.5.6 Environmental Conditions

Ambient Temperature	20.2 - 23.6 °C
Relative Humidity	37.4 - 49.2 %



2.5.7 Test Results

2.4 GHz Bluetooth - DTS

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 167 - 2402 MHz, LE1M, iPA, Core 0 + Core 1, 1 to 18 GHz

*No emissions found within 20 dB of the limit.

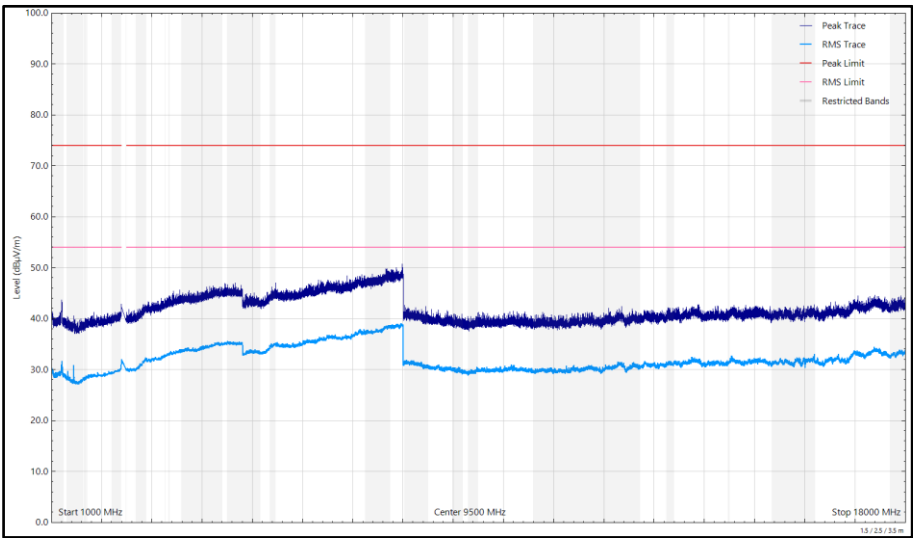


Figure 574 - 2402 MHz, LE1M, iPA, Core 0 + Core 1, 1 GHz to 18 GHz, Horizontal

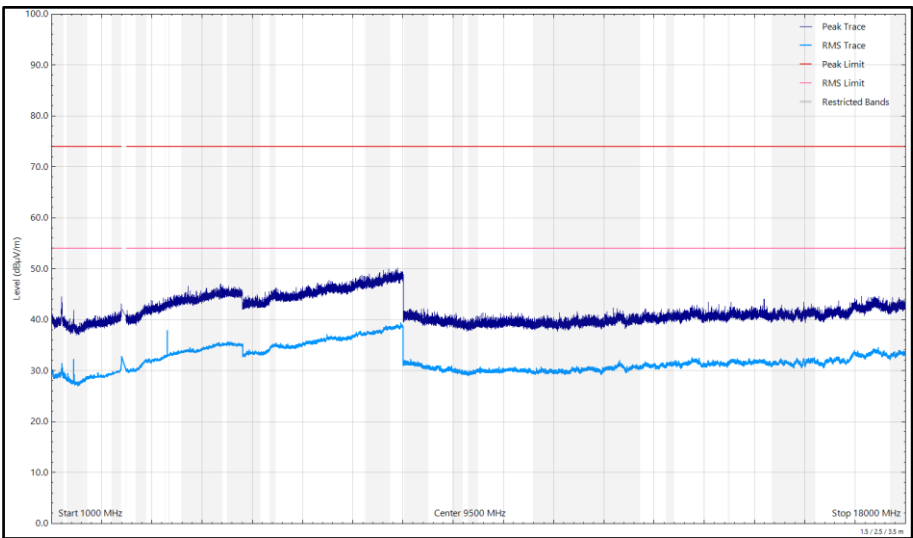


Figure 575 - 2402 MHz, LE1M, iPA, Core 0 + Core 1, 1 GHz to 18 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 168 - 2440 MHz, LE1M, iPA, Core 0 + Core 1, 30 MHz to 26 GHz

*No emissions found within 20 dB of the limit.

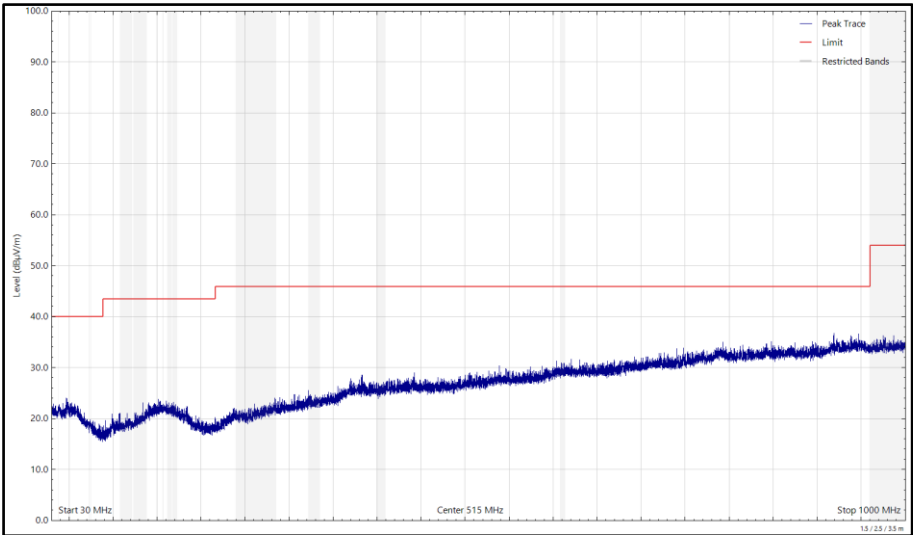


Figure 576 - 2440 MHz, LE1M, iPA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

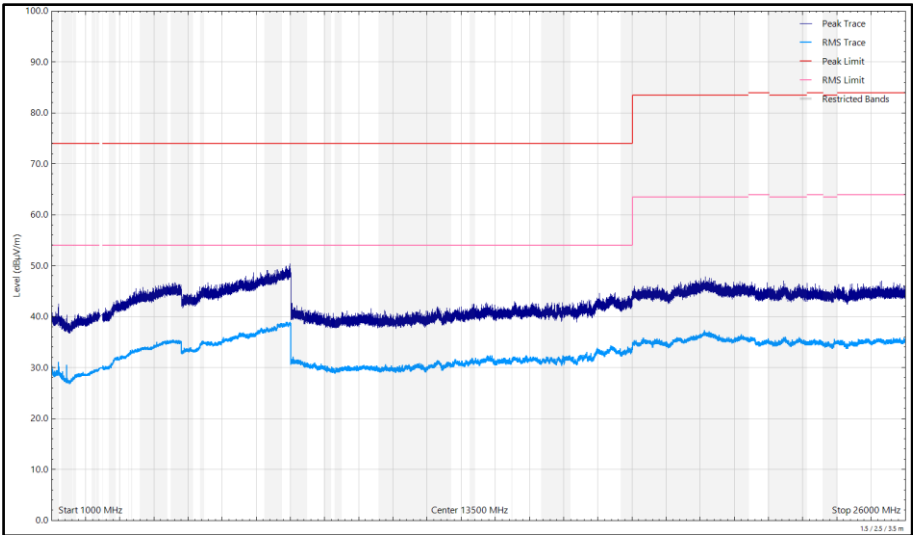


Figure 577 - 2440 MHz, LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

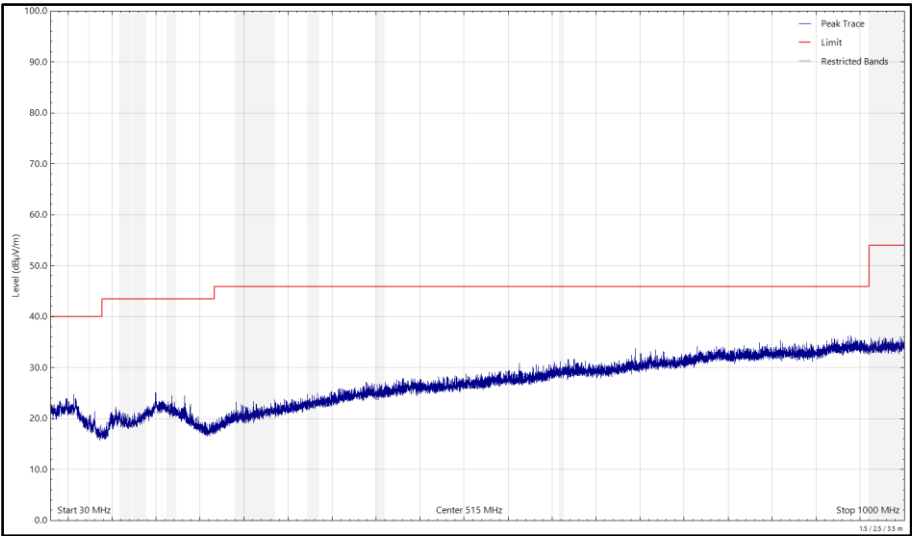


Figure 578 - 2440 MHz, LE1M, iPA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

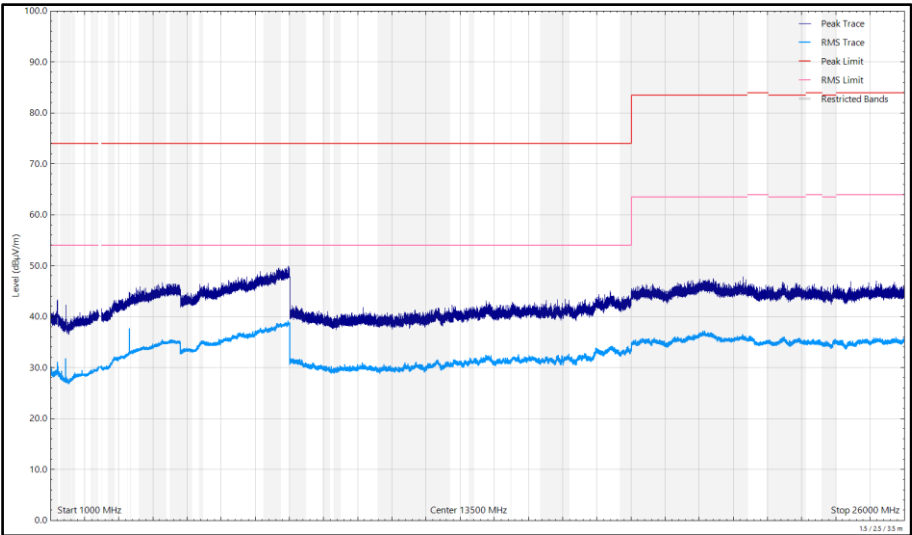


Figure 579 - 2440 MHz, LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 169 - 2480 MHz, LE1M, iPA, Core 0 + Core 1, 1 GHz to 18 GHz

*No emissions found within 20 dB of the limit.

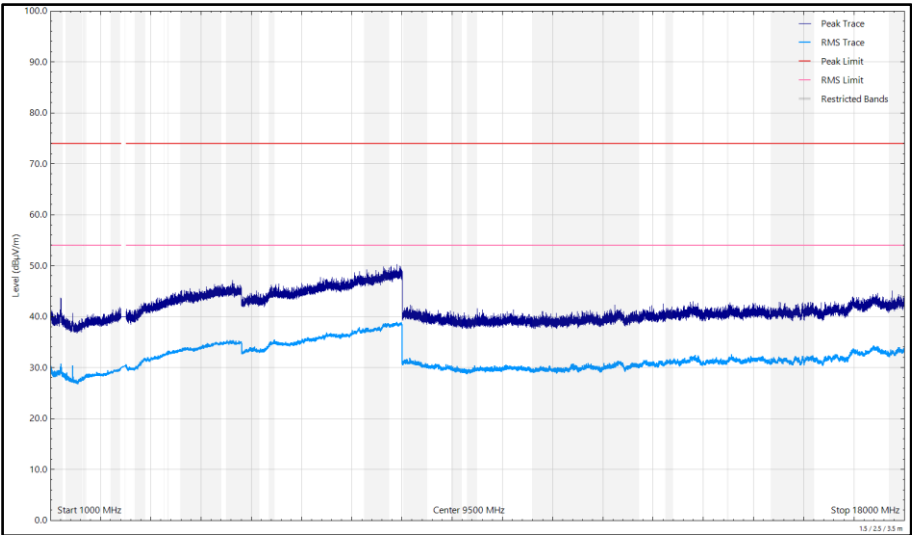


Figure 580 - 2480 MHz, LE1M, iPA, Core 0 + Core 1, 1 GHz to 18 GHz, Horizontal

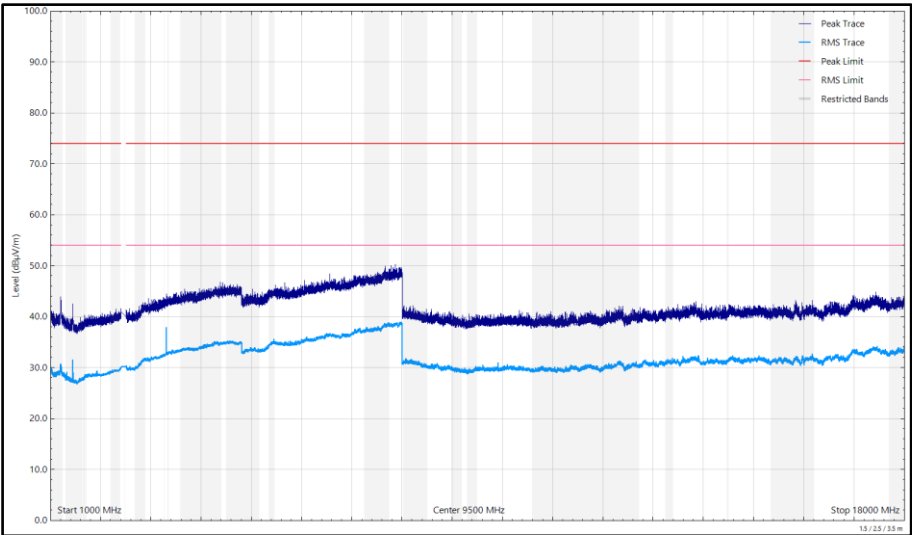


Figure 581 - 2480 MHz, LE1M, iPA, Core 0 + Core 1, 1 GHz to 18 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 170 - 2402 MHz, LE1M, iPA, Core 2, 1 to 18 GHz

*No emissions found within 20 dB of the limit.

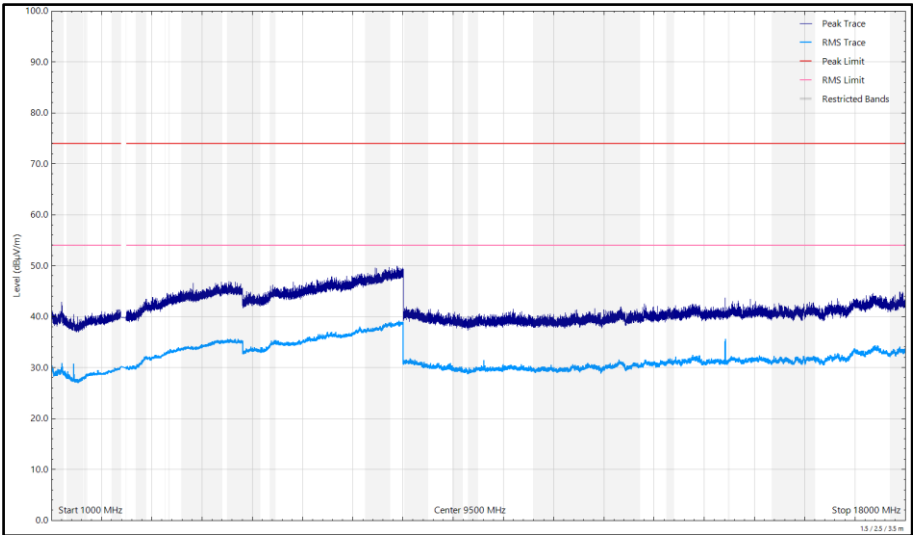


Figure 582 - 2402 MHz, LE1M, iPA, Core 2, 1 GHz to 18 GHz, Horizontal

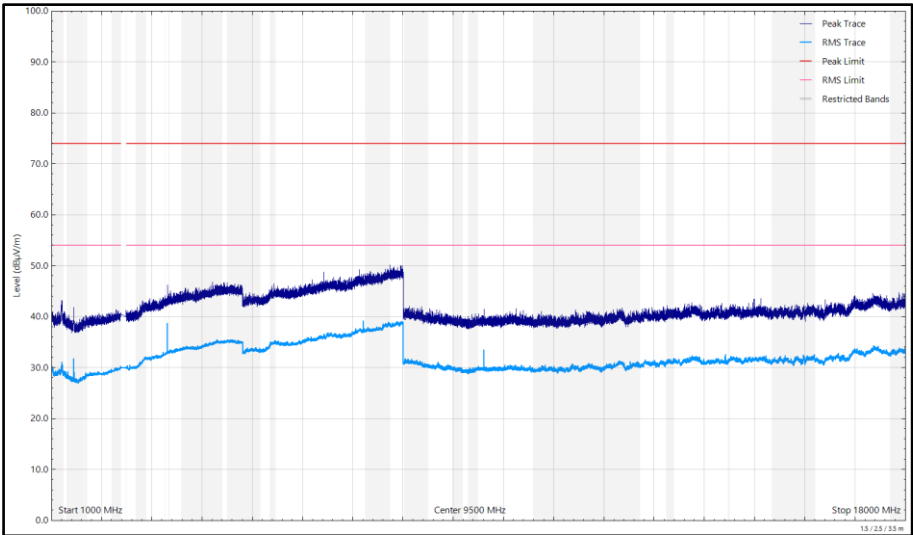


Figure 583 - 2402 MHz, LE1M, iPA, Core 2, 1 GHz to 18 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 171 - 2440 MHz, LE1M, iPA, Core 2, 30 MHz to 26 GHz

*No emissions found within 20 dB of the limit.

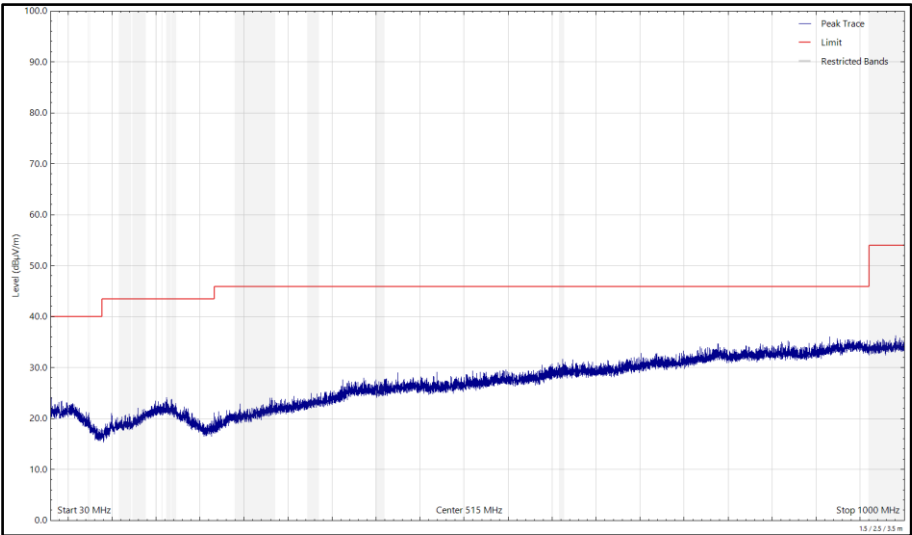


Figure 584 - 2440 MHz, LE1M, iPA, Core 2, 30 MHz to 1 GHz, Horizontal (Peak)

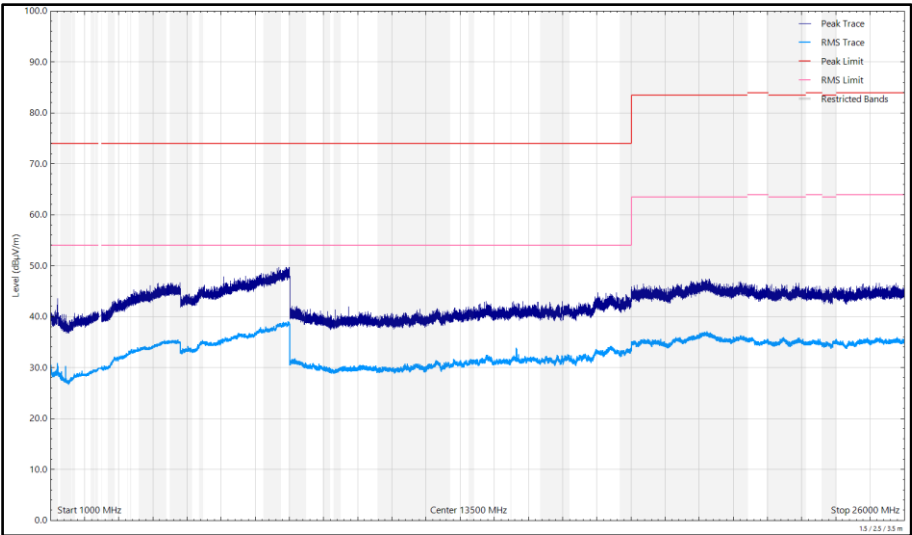


Figure 585 - 2440 MHz, LE1M, iPA, Core 2, 1 GHz to 26 GHz, Horizontal

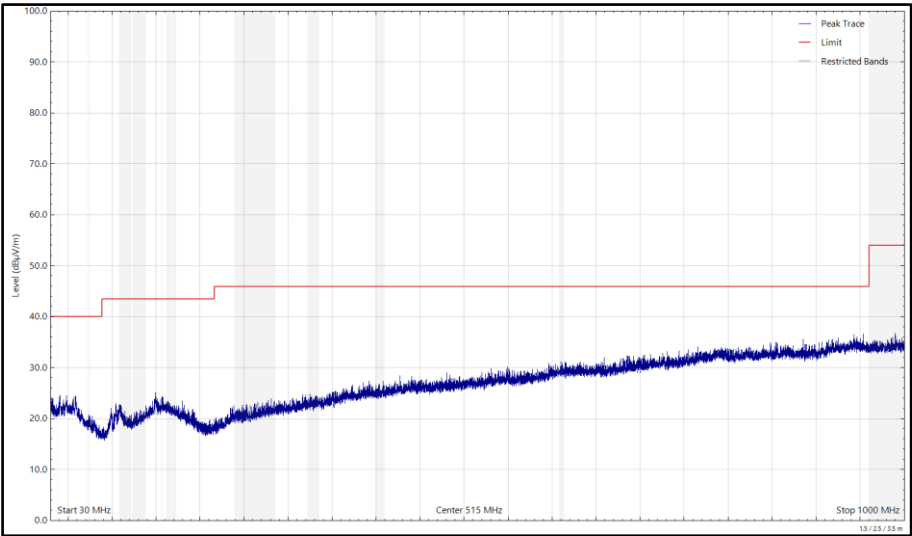


Figure 586 - 2440 MHz, LE1M, iPA, Core 2, 30 MHz to 1 GHz, Vertical (Peak)

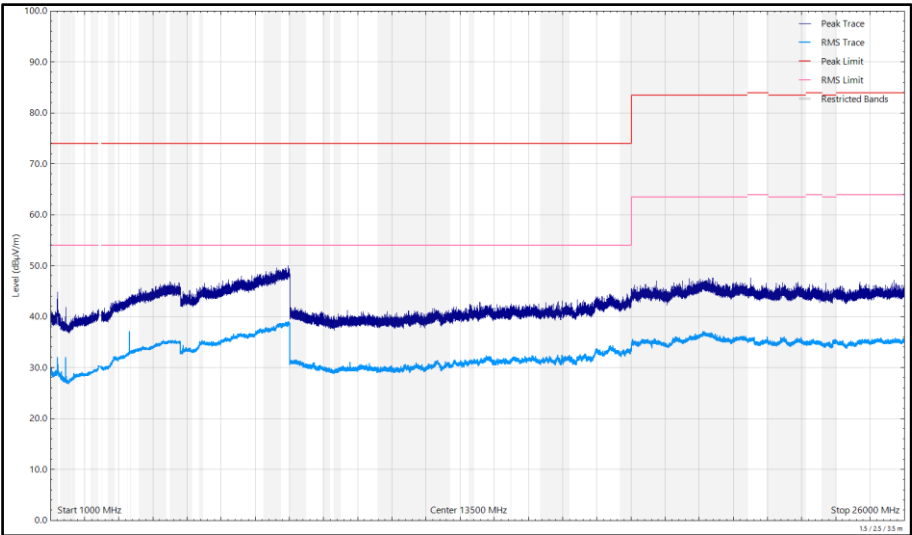


Figure 587 - 2440 MHz, LE1M, iPA, Core 2, 1 GHz to 26 GHz, Vertical