



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210 (RU Size 484 + RU Size 242.90)	-5.69	-5.84	-	-	-2.76	10.16	7.40	10.00	-2.60
5210 (RU Size 484 + RU Size 242.91)	-5.04	-5.12	-	-	-2.07	10.16	8.09	10.00	-1.91
5210 (RU Size 484 + RU Size 242.92)	-4.69	-5.21	-	-	-1.93	10.16	8.23	10.00	-1.77
5210 (RU Size 484 + RU Size 242.93)	-5.48	-5.65	-	-	-2.55	10.16	7.61	10.00	-2.39

Table 915 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484.94)	-8.11	-8.31	-	-	-5.20	10.16	4.96	10.00	-5.04
5250 (RU Size 996 + RU Size 484.95)	-8.36	-8.96	-	-	-5.64	10.16	4.52	10.00	-5.48

Table 916 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484.94)	-7.36	-7.51	-	-	-4.42	10.16	5.74	10.00	-4.26
5250 (RU Size 996 + RU Size 484.95)	-7.79	-8.30	-	-	-5.03	10.16	5.13	10.00	-4.87

Table 917 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.51	-9.24	-	-	-5.85	10.16	4.31	10.00	-5.69
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-8.24	-9.03	-	-	-5.61	10.16	4.55	10.00	-5.45
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-7.94	-8.54	-	-	-5.22	10.16	4.94	10.00	-5.06
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.38	-8.98	-	-	-5.65	10.16	4.51	10.00	-5.49

Table 918 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.55	-8.86	-	-	-5.69	10.16	4.47	10.00	-5.53

Table 919 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.00	2.09	-	-	5.06	6.64	-1.58
5300	1.90	1.92	-	-	4.92	6.64	-1.72
5320	1.82	1.71	-	-	4.77	6.64	-1.87

Table 920 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.00	2.09	-	-	5.06	11.00	-5.94
5300	1.90	1.92	-	-	4.92	11.00	-6.08
5320	1.82	1.71	-	-	4.77	11.00	-6.23

Table 921 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.28	1.85	-	-	5.08	6.64	-1.56
5310	0.10	-0.64	-	-	2.75	6.64	-3.88

Table 922 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.28	1.85	-	-	5.08	11.00	-5.92
5310	0.10	-0.64	-	-	2.75	11.00	-8.25

Table 923 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.54	-3.43	-	-	-0.47	6.64	-7.11

Table 924 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.54	-3.43	-	-	-0.47	11.00	-11.47

Table 925 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.5
Data Rate:	12 Mbps	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.73	-10.98	-	-	-7.84	6.64	-14.48

Table 926 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	1.53	1.45	-	-	4.50	6.64	-2.14
5300	1.32	1.51	-	-	4.43	6.64	-2.21
5320	1.62	1.57	-	-	4.61	6.64	-2.03

Table 927 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	1.53	1.45	-	-	4.50	11.00	-6.50
5300	1.32	1.51	-	-	4.43	11.00	-6.57
5320	1.62	1.57	-	-	4.61	11.00	-6.39

Table 928 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	1.65	1.15	-	-	4.41	6.64	-2.22
5310	0.82	0.13	-	-	3.50	6.64	-3.14

Table 929 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	1.65	1.15	-	-	4.41	11.00	-6.59
5310	0.82	0.13	-	-	3.50	11.00	-7.50

Table 930 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.41	-3.44	-	-	-0.42	6.64	-7.06

Table 931 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.41	-3.44	-	-	-0.42	11.00	-11.42

Table 932 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.65	-9.15	-	-	-5.88	6.64	-12.52

Table 933 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	1.86	1.65	-	-	4.77	6.64	-1.87
5300	1.61	1.83	-	-	4.73	6.64	-1.91
5320	1.81	1.68	-	-	4.76	6.64	-1.88

Table 934 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	1.86	1.65	-	-	4.77	11.00	-6.23
5300	1.61	1.83	-	-	4.73	11.00	-6.27
5320	1.81	1.68	-	-	4.76	11.00	-6.24

Table 935 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.07	1.56	-	-	4.83	6.64	-1.81
5310	0.43	-0.15	-	-	3.16	6.64	-3.48

Table 936 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.07	1.56	-	-	4.83	11.00	-6.17
5310	0.43	-0.15	-	-	3.16	11.00	-7.84

Table 937 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.50	-3.58	-	-	-0.53	6.64	-7.17

Table 938 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.50	-3.58	-	-	-0.53	11.00	-11.53

Table 939 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.90	-9.33	-	-	-6.10	6.64	-12.74

Table 940 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	1.53	1.94	-	-	4.75	6.64	-1.89
5280 (RU52.37)	1.47	1.81	-	-	4.66	6.64	-1.98
5300 (RU52.37)	1.66	1.51	-	-	4.60	6.64	-2.04
5320 (RU52.40)	1.78	1.39	-	-	4.60	6.64	-2.04

Table 941 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	1.53	1.94	-	-	4.75	11.00	-6.25
5280 (RU52.37)	1.47	1.81	-	-	4.66	11.00	-6.34
5300 (RU52.37)	1.66	1.51	-	-	4.60	11.00	-6.40
5320 (RU52.40)	1.78	1.39	-	-	4.60	11.00	-6.40

Table 942 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	2.05	2.09	-	-	5.08	6.64	-1.56
5300 (RU106.53)	2.05	1.97	-	-	5.02	6.64	-1.62
5320 (RU106.54)	2.07	1.83	-	-	4.96	6.64	-1.67

Table 943 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	2.05	2.09	-	-	5.08	11.00	-5.92
5300 (RU106.53)	2.05	1.97	-	-	5.02	11.00	-5.98
5320 (RU106.54)	2.07	1.83	-	-	4.96	11.00	-6.04

Table 944 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 52 + RU Size 26.70)	2.01	1.82	-	-	4.93	6.64	-1.71
5300 (RU Size 52 + RU Size 26.70)	1.61	1.97	-	-	4.80	6.64	-1.84
5320 (RU Size 52 + RU Size 26.72)	1.36	1.73	-	-	4.56	6.64	-2.08

Table 945 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 52 + RU Size 26.70)	2.01	1.82	-	-	4.93	11.00	-6.07
5300 (RU Size 52 + RU Size 26.70)	1.61	1.97	-	-	4.80	11.00	-6.20
5320 (RU Size 52 + RU Size 26.72)	1.36	1.73	-	-	4.56	11.00	-6.44

Table 946 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 106 + RU Size 26.82)	1.96	1.94	-	-	4.96	6.64	-1.68
5300 (RU Size 106 + RU Size 26.82)	2.17	1.70	-	-	4.95	6.64	-1.69
5320 (RU Size 106 + RU Size 26.83)	1.71	1.58	-	-	4.66	6.64	-1.98

Table 947 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 106 + RU Size 26.82)	1.96	1.94	-	-	4.96	11.00	-6.04
5300 (RU Size 106 + RU Size 26.82)	2.17	1.70	-	-	4.95	11.00	-6.05
5320 (RU Size 106 + RU Size 26.83)	1.71	1.58	-	-	4.66	11.00	-6.34

Table 948 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290 (RU Size 484 + RU Size 242.90)	-5.43	-5.59	-	-	-2.50	6.64	-9.14
5290 (RU Size 484 + RU Size 242.93)	-5.14	-5.22	-	-	-2.17	6.64	-8.81

Table 949 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290 (RU Size 484 + RU Size 242.90)	-5.43	-5.59	-	-	-2.50	11.00	-13.50
5290 (RU Size 484 + RU Size 242.93)	-5.14	-5.22	-	-	-2.17	11.00	-13.17

Table 950 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-7.76	-8.50	-	-	-5.10	6.64	-11.74
5250 (RU Size 996 + RU Size 484.95)	-7.26	-7.97	-	-	-4.59	6.64	-11.23

Table 951 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-8.64	-8.84	-	-	-5.73	6.64	-12.37
5250 (RU Size 996 + RU Size 484.95)	-8.28	-8.67	-	-	-5.46	6.64	-12.10

Table 952 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.49	-9.22	-	-	-5.83	6.64	-12.47
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-8.47	-8.85	-	-	-5.64	6.64	-12.28
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-8.12	-8.43	-	-	-5.26	6.64	-11.90
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.02	-8.59	-	-	-5.28	6.64	-11.92

Table 953 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.83	-8.83	-	-	-5.82	6.64	-12.46

Table 954 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.7
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.68	-10.90	-	-	-7.78	11.00	-18.78

Table 955 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.89	-8.89	-	-	-5.88	11.00	-16.88

Table 956 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.80	-9.65	-	-	-6.19	11.00	-17.19

Table 957 - ISSED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-7.92	-8.55	-	-	-5.21	11.00	-16.21
5250 (RU Size 996 + RU Size 484.95)	-7.39	-7.68	-	-	-4.53	11.00	-15.53

Table 958 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-8.51	-9.10	-	-	-5.79	11.00	-16.79
5250 (RU Size 996 + RU Size 484.95)	-8.34	-8.64	-	-	-5.48	11.00	-16.48

Table 959 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.51	-8.85	-	-	-5.67	11.00	-16.67
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-8.31	-8.73	-	-	-5.50	11.00	-16.50
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-8.18	-8.71	-	-	-5.43	11.00	-16.43
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.13	-8.52	-	-	-5.31	11.00	-16.31

Table 960 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.40	-9.01	-	-	-5.69	11.00	-16.69

Table 961 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.65	2.19	-	-	5.44	7.29	-1.85
5600	2.99	2.22	-	-	5.63	7.29	-1.66
5700	2.63	2.29	-	-	5.47	7.29	-1.81
5720	2.39	2.16	-	-	5.29	7.29	-2.00

Table 962 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.65	2.19	-	-	5.44	11.00	-5.56
5600	2.99	2.22	-	-	5.63	11.00	-5.37
5700	2.63	2.29	-	-	5.47	11.00	-5.53
5720	2.39	2.16	-	-	5.29	11.00	-5.71

Table 963 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.92	-1.61	-	-	1.76	7.29	-5.53
5590	2.81	2.07	-	-	5.47	7.29	-1.82
5670	0.93	0.33	-	-	3.65	7.29	-3.64
5710	2.87	2.27	-	-	5.59	7.29	-1.69

Table 964 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.92	-1.61	-	-	1.76	11.00	-9.24
5590	2.81	2.07	-	-	5.47	11.00	-5.53
5670	0.93	0.33	-	-	3.65	11.00	-7.35
5710	2.87	2.27	-	-	5.59	11.00	-5.41

Table 965 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.2
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.01	-4.40	-	-	-1.19	7.29	-8.48
5610	0.01	-0.79	-	-	2.64	7.29	-4.65
5690	2.58	2.26	-	-	5.44	7.29	-1.85

Table 966 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.01	-4.40	-	-	-1.19	11.00	-12.19
5610	0.01	-0.79	-	-	2.64	11.00	-8.36
5690	2.58	2.26	-	-	5.44	11.00	-5.56

Table 967 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a160	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.43	-9.07	-	-	-5.73	7.29	-13.02

Table 968 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.43	-9.07	-	-	-5.73	11.00	-16.73

Table 969 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.40	1.97	-	-	5.20	7.29	-2.09
5600	2.48	1.98	-	-	5.25	7.29	-2.04
5700	2.37	2.20	-	-	5.30	7.29	-1.99
5720	2.72	2.01	-	-	5.39	7.29	-1.90

Table 970 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.40	1.97	-	-	5.20	11.00	-5.80
5600	2.48	1.98	-	-	5.25	11.00	-5.75
5700	2.37	2.20	-	-	5.30	11.00	-5.70
5720	2.72	2.01	-	-	5.39	11.00	-5.61

Table 971 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.39	-0.11	-	-	3.16	7.29	-4.13
5590	2.45	1.56	-	-	5.04	7.29	-2.25
5630	2.55	1.74	-	-	5.17	7.29	-2.11
5670	2.69	1.88	-	-	5.31	7.29	-1.98
5710	2.56	2.00	-	-	5.30	7.29	-1.99

Table 972 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.39	-0.11	-	-	3.16	11.00	-7.84
5590	2.45	1.56	-	-	5.04	11.00	-5.96
5630	2.55	1.74	-	-	5.17	11.00	-5.83
5670	2.69	1.88	-	-	5.31	11.00	-5.69
5710	2.56	2.00	-	-	5.30	11.00	-5.70

Table 973 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-5.06	-5.42	-	-	-2.23	7.29	-9.51
5610	1.20	0.54	-	-	3.89	7.29	-3.40
5690	1.89	1.59	-	-	4.76	7.29	-2.53

Table 974 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-5.06	-5.42	-	-	-2.23	11.00	-13.23
5610	1.20	0.54	-	-	3.89	11.00	-7.11
5690	1.89	1.59	-	-	4.76	11.00	-6.24

Table 975 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-7.69	-8.57	-	-	-5.10	7.29	-12.39

Table 976 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-7.69	-8.57	-	-	-5.10	11.00	-16.10

Table 977 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.19	1.75	-	-	4.98	7.29	-2.30
5600	2.42	2.04	-	-	5.24	7.29	-2.05
5640	2.43	1.98	-	-	5.22	7.29	-2.07
5700	2.46	2.24	-	-	5.36	7.29	-1.92
5720	2.32	1.95	-	-	5.15	7.29	-2.14

Table 978 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.19	1.75	-	-	4.98	11.00	-6.02
5600	2.42	2.04	-	-	5.24	11.00	-5.76
5640	2.43	1.98	-	-	5.22	11.00	-5.78
5700	2.46	2.24	-	-	5.36	11.00	-5.64
5720	2.32	1.95	-	-	5.15	11.00	-5.85

Table 979 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.61	-0.98	-	-	2.22	7.29	-5.07
5590	3.00	2.20	-	-	5.63	7.29	-1.66
5670	2.65	2.32	-	-	5.50	7.29	-1.79
5710	2.67	2.13	-	-	5.42	7.29	-1.87

Table 980 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.61	-0.98	-	-	2.22	11.00	-8.78
5590	3.00	2.20	-	-	5.63	11.00	-5.37
5670	2.65	2.32	-	-	5.50	11.00	-5.50
5710	2.67	2.13	-	-	5.42	11.00	-5.58

Table 981 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.75	-5.73	-	-	-2.20	7.29	-9.49
5610	1.41	0.19	-	-	3.85	7.29	-3.43
5690	2.26	1.63	-	-	4.97	7.29	-2.32

Table 982 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.75	-5.73	-	-	-2.20	11.00	-13.20
5610	1.41	0.19	-	-	3.85	11.00	-7.15
5690	2.26	1.63	-	-	4.97	11.00	-6.03

Table 983 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.19	-9.03	-	-	-5.58	7.29	-12.87

Table 984 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.19	-9.03	-	-	-5.58	11.00	-16.58

Table 985 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	2.60	2.31	-	-	5.47	7.29	-1.82
5600 (RU52.37)	2.92	2.33	-	-	5.65	7.29	-1.64
5620 (RU52.37)	2.59	2.11	-	-	5.37	7.29	-1.92
5700 (RU52.40)	2.59	2.27	-	-	5.44	7.29	-1.85
5720 (RU52.39)	1.81	1.65	-	-	4.74	7.29	-2.55
5720 (RU52.40)	-5.31	-6.98	-	-	-3.06	7.29	-10.34

Table 986 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	2.60	2.31	-	-	5.47	11.00	-5.53
5600 (RU52.37)	2.92	2.33	-	-	5.65	11.00	-5.35
5620 (RU52.37)	2.59	2.11	-	-	5.37	11.00	-5.63
5700 (RU52.40)	2.59	2.27	-	-	5.44	11.00	-5.56
5720 (RU52.39)	1.81	1.65	-	-	4.74	11.00	-6.26
5720 (RU52.40)	-5.31	-6.98	-	-	-3.06	11.00	-14.06

Table 987 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	2.85	2.43	-	-	5.66	7.29	-1.63
5600 (RU106.53)	2.54	1.94	-	-	5.26	7.29	-2.03
5700 (RU106.54)	2.71	2.32	-	-	5.53	7.29	-1.76
5720 (RU106.53)	2.86	2.38	-	-	5.64	7.29	-1.65
5720 (RU106.54)	2.94	2.51	-	-	5.74	7.29	-1.55

Table 988 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	2.85	2.43	-	-	5.66	11.00	-5.34
5600 (RU106.53)	2.54	1.94	-	-	5.26	11.00	-5.74
5700 (RU106.54)	2.71	2.32	-	-	5.53	11.00	-5.47
5720 (RU106.53)	2.86	2.38	-	-	5.64	11.00	-5.36
5720 (RU106.54)	2.94	2.51	-	-	5.74	11.00	-5.26

Table 989 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 52 + RU Size 26.70)	2.28	2.12	-	-	5.21	7.29	-2.08
5580 (RU Size 52 + RU Size 26.70)	2.77	2.03	-	-	5.42	7.29	-1.86
5600 (RU Size 52 + RU Size 26.70)	2.55	1.88	-	-	5.24	7.29	-2.05
5700 (RU Size 52 + RU Size 26.72)	2.35	2.31	-	-	5.34	7.29	-1.94
5720 (RU Size 52 + RU Size 26.71)	1.79	1.15	-	-	4.49	7.29	-2.80
5720 (RU Size 52 + RU Size 26.72)	2.29	1.97	-	-	5.14	7.29	-2.15

Table 990 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 52 + RU Size 26.70)	2.28	2.12	-	-	5.21	11.00	-5.79
5580 (RU Size 52 + RU Size 26.70)	2.77	2.03	-	-	5.42	11.00	-5.58
5600 (RU Size 52 + RU Size 26.70)	2.55	1.88	-	-	5.24	11.00	-5.76
5700 (RU Size 52 + RU Size 26.72)	2.35	2.31	-	-	5.34	11.00	-5.66
5720 (RU Size 52 + RU Size 26.71)	1.79	1.15	-	-	4.49	11.00	-6.51
5720 (RU Size 52 + RU Size 26.72)	2.29	1.97	-	-	5.14	11.00	-5.86

Table 991 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 106 + RU Size 26.82)	2.59	2.02	-	-	5.32	7.29	-1.96
5580 (RU Size 106 + RU Size 26.82)	2.51	2.24	-	-	5.39	7.29	-1.90
5600 (RU Size 106 + RU Size 26.82)	2.15	1.46	-	-	4.83	7.29	-2.46
5700 (RU Size 106 + RU Size 26.83)	2.74	2.65	-	-	5.71	7.29	-1.58
5720 (RU Size 106 + RU Size 26.82)	2.73	2.05	-	-	5.42	7.29	-1.87
5720 (RU Size 106 + RU Size 26.83)	2.83	2.57	-	-	5.71	7.29	-1.57

Table 992 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 106 + RU Size 26.82)	2.59	2.02	-	-	5.32	11.00	-5.68
5580 (RU Size 106 + RU Size 26.82)	2.51	2.24	-	-	5.39	11.00	-5.61
5600 (RU Size 106 + RU Size 26.82)	2.15	1.46	-	-	4.83	11.00	-6.17
5700 (RU Size 106 + RU Size 26.83)	2.74	2.65	-	-	5.71	11.00	-5.29
5720 (RU Size 106 + RU Size 26.82)	2.73	2.05	-	-	5.42	11.00	-5.58
5720 (RU Size 106 + RU Size 26.83)	2.83	2.57	-	-	5.71	11.00	-5.29

Table 993 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530 (RU Size 484 + RU Size 242.93)	-6.50	-7.35	-	-	-3.89	7.29	-11.18
5610 (RU Size 484 + RU Size 242.90)	-2.50	-3.37	-	-	0.10	7.29	-7.19
5690 (RU Size 484 + RU Size 242.90)	2.24	1.87	-	-	5.07	7.29	-2.22
5690 (RU Size 484 + RU Size 242.93)	2.35	2.29	-	-	5.33	7.29	-1.96

Table 994 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530 (RU Size 484 + RU Size 242.93)	-6.50	-7.35	-	-	-3.89	11.00	-14.89
5610 (RU Size 484 + RU Size 242.90)	-2.50	-3.37	-	-	0.10	11.00	-10.90
5690 (RU Size 484 + RU Size 242.90)	2.24	1.87	-	-	5.07	11.00	-5.93
5690 (RU Size 484 + RU Size 242.93)	2.35	2.29	-	-	5.33	11.00	-5.67

Table 995 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.94)	-8.99	-9.89	-	-	-6.41	7.29	-13.69

Table 996 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.94)	-8.99	-9.89	-	-	-6.41	11.00	-17.41

Table 997 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.95)	-9.24	-9.93	-	-	-6.57	7.29	-13.85

Table 998 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.95)	-9.24	-9.93	-	-	-6.57	11.00	-17.57

Table 999 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.21	-9.43	-	-	-5.77	7.29	-13.05

Table 1000 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.21	-9.43	-	-	-5.77	11.00	-16.77

Table 1001 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.25	-9.31	-	-	-5.74	7.29	-13.02

Table 1002 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.25	-9.31	-	-	-5.74	11.00	-16.74

Table 1003 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a20	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-1.91	-2.07	-	-	1.02	25.79	-24.77
5745	6.88	6.24	-	-	9.58	25.79	-16.21
5785	6.43	6.32	-	-	9.38	25.79	-16.41
5825	6.25	6.05	-	-	9.16	25.79	-16.63

Table 1004 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a40	Duty Cycle (%):	97.5
Data Rate:	12 Mbps	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-2.70	-3.48	-	-	-0.06	25.79	-25.85
5755	3.72	2.51	-	-	6.17	25.79	-19.62
5795	4.27	3.74	-	-	7.02	25.79	-18.77

Table 1005 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a80	Duty Cycle (%):	97.3
Data Rate:	12 Mbps	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.57	-4.75	-	-	-1.65	26.29	-27.94
5775	-0.44	-0.81	-	-	2.39	25.79	-23.40

Table 1006 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-1.67	-2.12	-	-	1.12	25.79	-24.67
5745	6.27	5.89	-	-	9.09	25.79	-16.70
5785	6.04	6.15	-	-	9.10	25.79	-16.69
5825	6.08	6.09	-	-	9.09	25.79	-16.70

Table 1007 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-3.19	-3.82	-	-	-0.48	25.79	-26.27
5755	3.51	2.94	-	-	6.25	25.79	-19.54
5795	3.65	3.48	-	-	6.57	25.79	-19.22

Table 1008 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.83	-5.39	-	-	-2.09	26.29	-28.38
5775	-0.38	-0.53	-	-	2.56	25.79	-23.23

Table 1009 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-1.89	-2.05	-	-	1.04	25.79	-24.75
5745	6.31	5.93	-	-	9.13	25.79	-16.65
5785	6.54	6.06	-	-	9.31	25.79	-16.47
5825	6.12	6.00	-	-	9.07	25.79	-16.72

Table 1010 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-3.08	-3.47	-	-	-0.26	25.79	-26.05
5755	3.73	3.31	-	-	6.53	25.79	-19.26
5795	3.55	3.44	-	-	6.50	25.79	-19.29

Table 1011 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.84	-5.03	-	-	-1.92	26.29	-28.21
5775	-1.08	-1.29	-	-	1.83	25.79	-23.96

Table 1012 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	6.74	6.55	-	-	9.66	25.79	-16.13
5785 (RU26.0)	6.40	5.91	-	-	9.17	25.79	-16.62
5825 (RU26.8)	6.70	6.29	-	-	9.51	25.79	-16.28

Table 1013 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.39)	-2.42	-3.05	-	-	0.29	25.79	-25.50
5720 (RU52.40)	-0.55	-0.80	-	-	2.34	25.79	-23.45
5745 (RU52.37)	6.97	6.70	-	-	9.85	25.79	-15.94
5785 (RU52.37)	6.53	6.29	-	-	9.42	25.79	-16.37
5825 (RU52.40)	6.81	6.97	-	-	9.90	25.79	-15.89

Table 1014 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.06
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.53)	-21.63	-42.47	-	-	-21.59	25.79	-47.38
5720 (RU106.54)	-1.02	-1.11	-	-	1.95	25.79	-23.84
5745 (RU106.53)	6.79	6.82	-	-	9.82	25.79	-15.97
5785 (RU106.53)	7.14	7.18	-	-	10.17	25.79	-15.62
5825 (RU106.54)	7.04	7.38	-	-	10.23	25.79	-15.56

Table 1015 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 52 + RU Size 26.71)	-21.71	-22.02	-	-	-18.85	25.79	-44.64
5720 (RU Size 52 + RU Size 26.72)	-1.82	-2.05	-	-	1.07	25.79	-24.72
5745 (RU Size 52 + RU Size 26.70)	6.96	6.28	-	-	9.65	25.79	-16.14
5785 (RU Size 52 + RU Size 26.70)	6.66	6.75	-	-	9.71	25.79	-16.07
5825 (RU Size 52 + RU Size 26.72)	6.46	6.50	-	-	9.49	25.79	-16.30

Table 1016 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 106 + RU Size 26.82)	-19.00	-16.56	-	-	-14.60	25.79	-40.39
5720 (RU Size 106 + RU Size 26.83)	-1.61	-1.63	-	-	1.39	25.79	-24.40
5745 (RU Size 106 + RU Size 26.82)	6.75	6.32	-	-	9.55	25.79	-16.24
5785 (RU Size 106 + RU Size 26.82)	6.81	6.80	-	-	9.82	25.79	-15.97
5825 (RU Size 106 + RU Size 26.83)	6.52	6.79	-	-	9.66	25.79	-16.13

Table 1017 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690 (RU Size 484 + RU Size 242.90)	-2.58	-3.56	-	-	-0.03	26.29	-26.32
5690 (RU Size 484 + RU Size 242.93)	-49.19	-44.29	-	-	-43.07	26.29	-69.36
5775 (RU Size 484 + RU Size 242.90)	-4.09	-3.97	-	-	-1.02	25.79	-26.81
5775 (RU Size 484 + RU Size 242.93)	-3.77	-4.03	-	-	-0.89	25.79	-26.68

Table 1018 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	5.62	5.34	-	-	8.49	9.85	-1.36
5220	5.54	5.39	-	-	8.48	9.85	-1.37
5240	5.17	4.82	-	-	8.01	9.85	-1.84

Table 1019 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-0.60	-0.88	-	-	2.27	9.85	-7.58
5230	4.80	4.47	-	-	7.65	9.85	-2.20

Table 1020 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-5.23	-5.39	-	-	-2.30	9.85	-12.15

Table 1021 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.37	-8.83	-	-	-5.58	9.85	-15.43

Table 1022 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	5.13	4.74	-	-	7.95	9.85	-1.90
5200	5.42	5.09	-	-	8.27	9.85	-1.58
5220	4.94	4.94	-	-	7.95	9.85	-1.90
5240	5.12	5.01	-	-	8.08	9.85	-1.77

Table 1023 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-0.78	-1.17	-	-	2.04	9.85	-7.81
5230	5.08	4.40	-	-	7.76	9.85	-2.09

Table 1024 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-5.17	-5.46	-	-	-2.30	9.85	-12.15

Table 1025 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.95	-9.46	-	-	-6.19	9.85	-16.03

Table 1026 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU26.0)	5.31	4.98	-	-	8.16	9.85	-1.69
5220 (RU26.0)	5.25	5.28	-	-	8.27	9.85	-1.58
5240 (RU26.8)	5.43	5.25	-	-	8.35	9.85	-1.50

Table 1027 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU52.37)	5.09	5.19	-	-	8.15	9.85	-1.70
5200 (RU52.37)	5.32	5.61	-	-	8.48	9.85	-1.37
5220 (RU52.37)	5.31	5.53	-	-	8.43	9.85	-1.42
5240 (RU52.40)	5.01	4.90	-	-	7.96	9.85	-1.88

Table 1028 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU106.53)	5.15	5.33	-	-	8.25	9.85	-1.60
5220 (RU106.53)	5.81	5.25	-	-	8.55	9.85	-1.30
5240 (RU106.54)	5.82	5.31	-	-	8.58	9.85	-1.27

Table 1029 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU Size 52 + RU Size 26.70)	5.23	5.30	-	-	8.28	9.85	-1.57
5220 (RU Size 52 + RU Size 26.70)	4.97	5.17	-	-	8.08	9.85	-1.76
5240 (RU Size 52 + RU Size 26.72)	5.17	5.16	-	-	8.18	9.85	-1.67

Table 1030 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU Size 106 + RU Size 26.82)	5.43	5.64	-	-	8.54	9.85	-1.31
5220 (RU Size 106 + RU Size 26.82)	5.47	5.28	-	-	8.39	9.85	-1.46
5240 (RU Size 106 + RU Size 26.83)	5.64	5.11	-	-	8.39	9.85	-1.46

Table 1031 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210 (RU Size 484 + RU Size 242.90)	-4.68	-4.68	-	-	-1.67	9.85	-11.52
5210 (RU Size 484 + RU Size 242.91)	-3.98	-4.39	-	-	-1.17	9.85	-11.02
5210 (RU Size 484 + RU Size 242.92)	-3.88	-3.96	-	-	-0.91	9.85	-10.76
5210 (RU Size 484 + RU Size 242.93)	-4.71	-5.07	-	-	-1.88	9.85	-11.73

Table 1032 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-9.04	-9.45	-	-	-6.23	9.85	-16.08
5250 (RU Size 996 + RU Size 484.95)	-9.23	-9.49	-	-	-6.35	9.85	-16.20

Table 1033 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-7.63	-8.14	-	-	-4.87	9.85	-14.72
5250 (RU Size 996 + RU Size 484.95)	-8.39	-8.64	-	-	-5.50	9.85	-15.35

Table 1034 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-9.02	-9.27	-	-	-6.14	9.85	-15.99
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-8.68	-9.07	-	-	-5.86	9.85	-15.71
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-8.59	-8.82	-	-	-5.69	9.85	-15.54
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-9.05	-9.37	-	-	-6.20	9.85	-16.05

Table 1035 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.71	-9.07	-	-	-5.87	9.85	-15.72

Table 1036 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-1.54	-1.86	-	-	1.31	7.15	8.46	10.00	-1.54
5220	-1.84	-1.91	-	-	1.14	7.15	8.29	10.00	-1.71
5240	-1.78	-1.85	-	-	1.20	7.15	8.35	10.00	-1.65

Table 1037 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	99.3
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.03
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-2.02	-2.23	-	-	0.89	7.15	8.04	10.00	-1.96
5230	-2.01	-2.23	-	-	0.89	7.15	8.04	10.00	-1.96

Table 1038 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-5.33	-5.14	-	-	-2.22	7.15	4.93	10.00	-5.07

Table 1039 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-8.51	-8.89	-	-	-5.69	7.15	1.47	10.00	-8.53

Table 1040 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-2.01	-2.07	-	-	0.97	7.15	8.12	10.00	-1.88
5220	-1.99	-2.21	-	-	0.91	7.15	8.06	10.00	-1.94
5240	-2.02	-2.35	-	-	0.83	7.15	7.98	10.00	-2.02

Table 1041 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-2.05	-2.66	-	-	0.66	7.15	7.82	10.00	-2.18
5230	-2.33	-2.67	-	-	0.51	7.15	7.66	10.00	-2.34

Table 1042 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-4.96	-5.38	-	-	-2.16	7.15	4.99	10.00	-5.01

Table 1043 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-8.75	-9.25	-	-	-5.98	7.15	1.17	10.00	-8.83

Table 1044 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU26.0)	-1.97	-2.27	-	-	0.89	7.15	8.04	10.00	-1.96
5220 (RU26.0)	-1.98	-1.96	-	-	1.04	7.15	8.19	10.00	-1.81
5240 (RU26.8)	-2.65	-2.08	-	-	0.66	7.15	7.81	10.00	-2.19

Table 1045 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU52.37)	-1.87	-2.12	-	-	1.02	7.15	8.17	10.00	-1.83
5200 (RU52.37)	-1.75	-1.75	-	-	1.26	7.15	8.41	10.00	-1.59
5220 (RU52.37)	-1.79	-1.83	-	-	1.20	7.15	8.35	10.00	-1.65
5240 (RU52.40)	-1.55	-2.12	-	-	1.18	7.15	8.33	10.00	-1.67

Table 1046 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU106.53)	-1.66	-2.14	-	-	1.12	7.15	8.27	10.00	-1.73
5220 (RU106.53)	-1.72	-1.77	-	-	1.27	7.15	8.42	10.00	-1.58
5240 (RU106.54)	-1.57	-1.55	-	-	1.45	7.15	8.60	10.00	-1.40

Table 1047 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU Size 52 + RU Size 26.70)	-1.63	-1.61	-	-	1.39	7.15	8.54	10.00	-1.46
5220 (RU Size 52 + RU Size 26.70)	-1.79	-1.80	-	-	1.22	7.15	8.37	10.00	-1.63
5240 (RU Size 52 + RU Size 26.72)	-1.30	-1.91	-	-	1.41	7.15	8.56	10.00	-1.44

Table 1048 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU Size 106 + RU Size 26.82)	-1.34	-1.18	-	-	1.75	7.15	8.90	10.00	-1.10
5220 (RU Size 106 + RU Size 26.82)	-1.90	-1.61	-	-	1.26	7.15	8.41	10.00	-1.59
5240 (RU Size 106 + RU Size 26.83)	-1.58	-1.89	-	-	1.28	7.15	8.43	10.00	-1.57

Table 1049 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210 (RU Size 484 + RU Size 242.90)	-4.71	-4.99	-	-	-1.84	7.15	5.31	10.00	-4.69
5210 (RU Size 484 + RU Size 242.91)	-3.99	-4.31	-	-	-1.13	7.15	6.02	10.00	-3.98
5210 (RU Size 484 + RU Size 242.92)	-3.85	-4.20	-	-	-1.01	7.15	6.14	10.00	-3.86
5210 (RU Size 484 + RU Size 242.93)	-4.88	-5.20	-	-	-2.03	7.15	5.12	10.00	-4.88

Table 1050 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484.94)	-8.75	-9.14	-	-	-5.93	7.15	1.22	10.00	-8.78
5250 (RU Size 996 + RU Size 484.95)	-8.71	-9.13	-	-	-5.90	7.15	1.25	10.00	-8.75

Table 1051 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484.94)	-7.66	-8.20	-	-	-4.91	7.15	2.24	10.00	-7.76
5250 (RU Size 996 + RU Size 484.95)	-8.55	-8.90	-	-	-5.71	7.15	1.44	10.00	-8.56

Table 1052 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.78	-9.18	-	-	-5.97	7.15	1.18	10.00	-8.82
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-8.28	-8.95	-	-	-5.59	7.15	1.56	10.00	-8.44
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-8.62	-9.02	-	-	-5.80	7.15	1.35	10.00	-8.65
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.12	-9.22	-	-	-5.62	7.15	1.53	10.00	-8.47

Table 1053 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.15
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.41	-8.92	-	-	-5.65	7.15	1.50	10.00	-8.50

Table 1054 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	4.83	4.71	-	-	7.78	9.65	-1.87
5300	5.00	4.69	-	-	7.86	9.65	-1.79
5320	5.35	5.35	-	-	8.36	9.65	-1.29

Table 1055 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	4.83	4.71	-	-	7.78	11.00	-3.22
5300	5.00	4.69	-	-	7.86	11.00	-3.14
5320	5.35	5.35	-	-	8.36	11.00	-2.64

Table 1056 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	4.81	4.59	-	-	7.71	9.65	-1.94
5310	0.46	0.37	-	-	3.43	9.65	-6.22

Table 1057 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	4.81	4.59	-	-	7.71	11.00	-3.29
5310	0.46	0.37	-	-	3.43	11.00	-7.57

Table 1058 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.55	-3.70	-	-	-0.61	9.65	-10.26

Table 1059 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.55	-3.70	-	-	-0.61	11.00	-11.61

Table 1060 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.11	-8.70	-	-	-5.38	9.65	-15.03

Table 1061 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	4.78	4.75	-	-	7.77	9.65	-1.88
5300	5.01	4.71	-	-	7.87	9.65	-1.78
5320	4.92	4.90	-	-	7.92	9.65	-1.73

Table 1062 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	4.78	4.75	-	-	7.77	11.00	-3.23
5300	5.01	4.71	-	-	7.87	11.00	-3.13
5320	4.92	4.90	-	-	7.92	11.00	-3.08

Table 1063 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	4.88	4.35	-	-	7.64	9.65	-2.01
5310	0.45	0.48	-	-	3.48	9.65	-6.17

Table 1064 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	4.88	4.35	-	-	7.64	11.00	-3.36
5310	0.45	0.48	-	-	3.48	11.00	-7.52

Table 1065 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.88	-4.19	-	-	-1.02	9.65	-10.67

Table 1066 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.88	-4.19	-	-	-1.02	11.00	-12.02

Table 1067 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.72	-9.18	-	-	-5.93	9.65	-15.58

Table 1068 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	5.27	4.93	-	-	8.11	9.65	-1.54
5280 (RU52.37)	5.06	5.15	-	-	8.12	9.65	-1.53
5300 (RU52.37)	5.12	5.11	-	-	8.12	9.65	-1.53
5320 (RU52.40)	5.24	4.91	-	-	8.09	9.65	-1.56

Table 1069 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	5.27	4.93	-	-	8.11	11.00	-2.89
5280 (RU52.37)	5.06	5.15	-	-	8.12	11.00	-2.88
5300 (RU52.37)	5.12	5.11	-	-	8.12	11.00	-2.88
5320 (RU52.40)	5.24	4.91	-	-	8.09	11.00	-2.91

Table 1070 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	5.36	5.24	-	-	8.31	9.65	-1.34
5300 (RU106.53)	5.10	5.23	-	-	8.17	9.65	-1.48
5320 (RU106.54)	5.27	5.23	-	-	8.26	9.65	-1.39

Table 1071 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	5.36	5.24	-	-	8.31	11.00	-2.69
5300 (RU106.53)	5.10	5.23	-	-	8.17	11.00	-2.83
5320 (RU106.54)	5.27	5.23	-	-	8.26	11.00	-2.74

Table 1072 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 52 + RU Size 26.70)	5.04	4.66	-	-	7.86	9.65	-1.79
5300 (RU Size 52 + RU Size 26.70)	5.27	5.32	-	-	8.31	9.65	-1.34
5320 (RU Size 52 + RU Size 26.72)	5.04	4.99	-	-	8.03	9.65	-1.62

Table 1073 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 52 + RU Size 26.70)	5.04	4.66	-	-	7.86	11.00	-3.14
5300 (RU Size 52 + RU Size 26.70)	5.27	5.32	-	-	8.31	11.00	-2.69
5320 (RU Size 52 + RU Size 26.72)	5.04	4.99	-	-	8.03	11.00	-2.97

Table 1074 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 106 + RU Size 26.82)	5.35	4.98	-	-	8.18	9.65	-1.47
5300 (RU Size 106 + RU Size 26.82)	5.33	5.12	-	-	8.24	9.65	-1.41
5320 (RU Size 106 + RU Size 26.83)	5.47	5.50	-	-	8.50	9.65	-1.15

Table 1075 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU Size 106 + RU Size 26.82)	5.35	4.98	-	-	8.18	11.00	-2.82
5300 (RU Size 106 + RU Size 26.82)	5.33	5.12	-	-	8.24	11.00	-2.76
5320 (RU Size 106 + RU Size 26.83)	5.47	5.50	-	-	8.50	11.00	-2.50

Table 1076 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290 (RU Size 484 + RU Size 242.90)	-5.05	-5.23	-	-	-2.13	9.65	-11.78
5290 (RU Size 484 + RU Size 242.93)	-5.09	-5.66	-	-	-2.36	9.65	-12.00

Table 1077 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290 (RU Size 484 + RU Size 242.90)	-5.05	-5.23	-	-	-2.13	11.00	-13.13
5290 (RU Size 484 + RU Size 242.93)	-5.09	-5.66	-	-	-2.36	11.00	-13.36

Table 1078 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-8.59	-8.97	-	-	-5.77	9.65	-15.42
5250 (RU Size 996 + RU Size 484.95)	-7.87	-7.96	-	-	-4.90	9.65	-14.55

Table 1079 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-9.34	-9.14	-	-	-6.23	9.65	-15.88
5250 (RU Size 996 + RU Size 484.95)	-8.96	-8.78	-	-	-5.86	9.65	-15.51

Table 1080 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.70	-9.23	-	-	-5.95	9.65	-15.60
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-8.80	-9.11	-	-	-5.94	9.65	-15.59
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-8.82	-8.99	-	-	-5.89	9.65	-15.54
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.50	-8.62	-	-	-5.55	9.65	-15.20

Table 1081 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.81	-9.14	-	-	-5.96	9.65	-15.61

Table 1082 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.52	-8.73	-	-	-5.62	11.00	-16.62

Table 1083 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.96	-9.20	-	-	-6.07	11.00	-17.07

Table 1084 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-8.72	-8.81	-	-	-5.75	11.00	-16.75
5250 (RU Size 996 + RU Size 484.95)	-7.54	-7.91	-	-	-4.71	11.00	-15.71

Table 1085 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484.94)	-9.36	-9.29	-	-	-6.31	11.00	-17.31
5250 (RU Size 996 + RU Size 484.95)	-8.83	-9.12	-	-	-5.96	11.00	-16.96

Table 1086 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.93	-9.31	-	-	-6.11	11.00	-17.11
5250 (RU Size 996 + RU Size 484 + RU Size 242.97)	-8.65	-8.88	-	-	-5.75	11.00	-16.75
5250 (RU Size 996 + RU Size 484 + RU Size 242.98)	-8.58	-8.89	-	-	-5.72	11.00	-16.72
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.39	-8.41	-	-	-5.39	11.00	-16.39

Table 1087 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.35
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.91	-8.93	-	-	-5.91	11.00	-16.91

Table 1088 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	5.65	5.41	-	-	8.54	10.30	-1.76
5600	5.61	4.97	-	-	8.31	10.30	-1.98
5700	5.23	5.13	-	-	8.19	10.30	-2.10
5720	5.90	5.45	-	-	8.69	10.30	-1.60

Table 1089 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	5.65	5.41	-	-	8.54	11.00	-2.46
5600	5.61	4.97	-	-	8.31	11.00	-2.69
5700	5.23	5.13	-	-	8.19	11.00	-2.81
5720	5.90	5.45	-	-	8.69	11.00	-2.31

Table 1090 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.03	-0.67	-	-	2.67	10.30	-7.63
5590	4.55	3.67	-	-	7.14	10.30	-3.15
5670	4.93	4.29	-	-	7.63	10.30	-2.66
5710	5.13	4.80	-	-	7.98	10.30	-2.32

Table 1091 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.03	-0.67	-	-	2.67	11.00	-8.33
5590	4.55	3.67	-	-	7.14	11.00	-3.86
5670	4.93	4.29	-	-	7.63	11.00	-3.37
5710	5.13	4.80	-	-	7.98	11.00	-3.02

Table 1092 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.05	-4.73	-	-	-1.37	10.30	-11.66
5610	1.76	0.92	-	-	4.37	10.30	-5.93
5690	2.29	1.63	-	-	4.99	10.30	-5.31

Table 1093 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.05	-4.73	-	-	-1.37	11.00	-12.37
5610	1.76	0.92	-	-	4.37	11.00	-6.63
5690	2.29	1.63	-	-	4.99	11.00	-6.01

Table 1094 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	98.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.07
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-7.55	-7.97	-	-	-4.74	10.30	-15.04

Table 1095 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-7.55	-7.97	-	-	-4.74	11.00	-15.74

Table 1096 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	5.44	4.83	-	-	8.15	10.30	-2.14
5600	5.74	4.83	-	-	8.32	10.30	-1.98
5640	5.36	5.24	-	-	8.31	10.30	-1.98
5700	4.87	4.60	-	-	7.75	10.30	-2.55
5720	5.76	5.23	-	-	8.52	10.30	-1.78

Table 1097 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	5.44	4.83	-	-	8.15	11.00	-2.85
5600	5.74	4.83	-	-	8.32	11.00	-2.68
5640	5.36	5.24	-	-	8.31	11.00	-2.69
5700	4.87	4.60	-	-	7.75	11.00	-3.25
5720	5.76	5.23	-	-	8.52	11.00	-2.48

Table 1098 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.35	-0.29	-	-	3.05	10.30	-7.24
5590	4.15	3.53	-	-	6.86	10.30	-3.43
5670	4.09	3.54	-	-	6.83	10.30	-3.46
5710	5.20	4.63	-	-	7.93	10.30	-2.36

Table 1099 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.35	-0.29	-	-	3.05	11.00	-7.95
5590	4.15	3.53	-	-	6.86	11.00	-4.14
5670	4.09	3.54	-	-	6.83	11.00	-4.17
5710	5.20	4.63	-	-	7.93	11.00	-3.07

Table 1100 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.77	-4.48	-	-	-1.10	10.30	-11.39
5610	1.71	0.89	-	-	4.32	10.30	-5.97
5690	2.21	1.62	-	-	4.94	10.30	-5.36

Table 1101 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.77	-4.48	-	-	-1.10	11.00	-12.10
5610	1.71	0.89	-	-	4.32	11.00	-6.68
5690	2.21	1.62	-	-	4.94	11.00	-6.06

Table 1102 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.08
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-7.72	-8.72	-	-	-5.18	10.30	-15.48

Table 1103 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-7.72	-8.72	-	-	-5.18	11.00	-16.18

Table 1104 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	6.07	5.59	-	-	8.84	10.30	-1.45
5600 (RU52.37)	5.67	5.20	-	-	8.45	10.30	-1.84
5620 (RU52.37)	6.03	5.21	-	-	8.65	10.30	-1.65
5700 (RU52.40)	5.84	5.60	-	-	8.73	10.30	-1.56
5720 (RU52.39)	5.29	4.85	-	-	8.08	10.30	-2.21
5720 (RU52.40)	-3.66	-3.47	-	-	-0.56	10.30	-10.85

Table 1105 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	6.07	5.59	-	-	8.84	11.00	-2.16
5600 (RU52.37)	5.67	5.20	-	-	8.45	11.00	-2.55
5620 (RU52.37)	6.03	5.21	-	-	8.65	11.00	-2.35
5700 (RU52.40)	5.84	5.60	-	-	8.73	11.00	-2.27
5720 (RU52.39)	5.29	4.85	-	-	8.08	11.00	-2.92
5720 (RU52.40)	-3.66	-3.47	-	-	-0.56	11.00	-11.56

Table 1106 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	5.90	5.61	-	-	8.77	10.30	-1.53
5600 (RU106.53)	6.26	5.69	-	-	9.00	10.30	-1.30
5700 (RU106.54)	6.42	5.64	-	-	9.06	10.30	-1.24
5720 (RU106.53)	6.09	5.53	-	-	8.83	10.30	-1.47
5720 (RU106.54)	5.82	5.56	-	-	8.70	10.30	-1.59

Table 1107 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	5.90	5.61	-	-	8.77	11.00	-2.23
5600 (RU106.53)	6.26	5.69	-	-	9.00	11.00	-2.00
5700 (RU106.54)	6.42	5.64	-	-	9.06	11.00	-1.94
5720 (RU106.53)	6.09	5.53	-	-	8.83	11.00	-2.17
5720 (RU106.54)	5.82	5.56	-	-	8.70	11.00	-2.30

Table 1108 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 52 + RU Size 26.70)	5.96	5.66	-	-	8.82	10.30	-1.47
5580 (RU Size 52 + RU Size 26.70)	6.29	5.52	-	-	8.93	10.30	-1.36
5600 (RU Size 52 + RU Size 26.70)	5.86	5.26	-	-	8.58	10.30	-1.71
5700 (RU Size 52 + RU Size 26.72)	4.10	3.06	-	-	6.62	10.30	-3.68
5720 (RU Size 52 + RU Size 26.71)	5.47	4.62	-	-	8.08	10.30	-2.22
5720 (RU Size 52 + RU Size 26.72)	5.98	5.31	-	-	8.67	10.30	-1.63

Table 1109 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 52 + RU Size 26.70)	5.96	5.66	-	-	8.82	11.00	-2.18
5580 (RU Size 52 + RU Size 26.70)	6.29	5.52	-	-	8.93	11.00	-2.07
5600 (RU Size 52 + RU Size 26.70)	5.86	5.26	-	-	8.58	11.00	-2.42
5700 (RU Size 52 + RU Size 26.72)	4.10	3.06	-	-	6.62	11.00	-4.38
5720 (RU Size 52 + RU Size 26.71)	5.47	4.62	-	-	8.08	11.00	-2.92
5720 (RU Size 52 + RU Size 26.72)	5.98	5.31	-	-	8.67	11.00	-2.33

Table 1110 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 106 + RU Size 26.82)	5.68	5.80	-	-	8.75	10.30	-1.54
5580 (RU Size 106 + RU Size 26.82)	6.10	5.36	-	-	8.76	10.30	-1.54
5600 (RU Size 106 + RU Size 26.82)	5.66	4.93	-	-	8.32	10.30	-1.97
5700 (RU Size 106 + RU Size 26.83)	5.74	5.43	-	-	8.60	10.30	-1.70
5720 (RU Size 106 + RU Size 26.82)	6.13	5.69	-	-	8.93	10.30	-1.37
5720 (RU Size 106 + RU Size 26.83)	6.21	5.69	-	-	8.97	10.30	-1.33

Table 1111 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU Size 106 + RU Size 26.82)	5.68	5.80	-	-	8.75	11.00	-2.25
5580 (RU Size 106 + RU Size 26.82)	6.10	5.36	-	-	8.76	11.00	-2.24
5600 (RU Size 106 + RU Size 26.82)	5.66	4.93	-	-	8.32	11.00	-2.68
5700 (RU Size 106 + RU Size 26.83)	5.74	5.43	-	-	8.60	11.00	-2.40
5720 (RU Size 106 + RU Size 26.82)	6.13	5.69	-	-	8.93	11.00	-2.07
5720 (RU Size 106 + RU Size 26.83)	6.21	5.69	-	-	8.97	11.00	-2.03

Table 1112 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530 (RU Size 484 + RU Size 242.93)	-7.06	-7.82	-	-	-4.41	10.30	-14.71
5610 (RU Size 484 + RU Size 242.90)	-2.27	-2.70	-	-	0.53	10.30	-9.77
5690 (RU Size 484 + RU Size 242.90)	2.44	1.78	-	-	5.13	10.30	-5.16
5690 (RU Size 484 + RU Size 242.93)	2.64	1.92	-	-	5.30	10.30	-4.99

Table 1113 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530 (RU Size 484 + RU Size 242.93)	-7.06	-7.82	-	-	-4.41	11.00	-15.41
5610 (RU Size 484 + RU Size 242.90)	-2.27	-2.70	-	-	0.53	11.00	-10.47
5690 (RU Size 484 + RU Size 242.90)	2.44	1.78	-	-	5.13	11.00	-5.87
5690 (RU Size 484 + RU Size 242.93)	2.64	1.92	-	-	5.30	11.00	-5.70

Table 1114 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.94)	-9.24	-9.79	-	-	-6.50	10.30	-16.79

Table 1115 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.94)	-9.24	-9.79	-	-	-6.50	11.00	-17.50

Table 1116 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 (Secondary)	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.95)	-9.38	-10.01	-	-	-6.67	10.30	-16.97

Table 1117 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484.95)	-9.38	-10.01	-	-	-6.67	11.00	-17.67

Table 1118 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Primary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.96)	-9.38	-10.42	-	-	-6.86	10.30	-17.15

Table 1119 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.96)	-9.38	-10.42	-	-	-6.86	11.00	-17.86

Table 1120 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 (Secondary)	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.70
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.99)	-9.38	-10.10	-	-	-6.72	10.30	-17.01

Table 1121 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570 (RU Size 996 + RU Size 484 + RU Size 242.99)	-9.38	-10.10	-	-	-6.72	11.00	-17.72

Table 1122 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	1.54	1.26	-	-	4.41	28.80	-24.39
5745	6.61	5.98	-	-	9.31	28.80	-19.48
5785	6.64	6.39	-	-	9.53	28.80	-19.27
5825	6.47	6.28	-	-	9.39	28.80	-19.41

Table 1123 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	98.8
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-0.31	-1.03	-	-	2.35	28.80	-26.45
5755	3.99	3.07	-	-	6.57	28.80	-22.23
5795	3.77	3.40	-	-	6.60	28.80	-22.20

Table 1124 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.65	-5.13	-	-	-1.88	29.30	-31.17
5775	-0.84	-1.16	-	-	2.02	28.80	-26.78

Table 1125 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	1.22	0.90	-	-	4.07	28.80	-24.73
5745	6.59	6.11	-	-	9.37	28.80	-19.43
5785	6.78	6.62	-	-	9.71	28.80	-19.09
5825	6.47	6.44	-	-	9.46	28.80	-19.34

Table 1126 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.04
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-0.68	-1.01	-	-	2.17	28.80	-26.63
5755	3.57	2.94	-	-	6.28	28.80	-22.52
5795	3.69	3.16	-	-	6.45	28.80	-22.35

Table 1127 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-4.90	-5.01	-	-	-1.94	29.30	-31.24
5775	-1.07	-1.25	-	-	1.85	28.80	-26.95

Table 1128 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.05
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	7.01	6.64	-	-	9.84	28.80	-18.96
5785 (RU26.0)	6.90	6.85	-	-	9.89	28.80	-18.91
5825 (RU26.8)	6.93	6.90	-	-	9.92	28.80	-18.88

Table 1129 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.39)	0.73	-0.14	-	-	3.32	28.80	-25.47
5720 (RU52.40)	2.89	2.49	-	-	5.70	28.80	-23.09
5745 (RU52.37)	7.09	6.82	-	-	9.97	28.80	-18.83
5785 (RU52.37)	7.30	7.09	-	-	10.21	28.80	-18.59
5825 (RU52.40)	7.24	7.27	-	-	10.27	28.80	-18.53

Table 1130 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.06
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.53)	-15.52	-14.32	-	-	-11.87	28.80	-40.67
5720 (RU106.54)	2.15	1.39	-	-	4.80	28.80	-24.00
5745 (RU106.53)	7.30	6.97	-	-	10.15	28.80	-18.65
5785 (RU106.53)	7.90	7.35	-	-	10.65	28.80	-18.15
5825 (RU106.54)	7.34	7.66	-	-	10.51	28.80	-18.29

Table 1131 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 52 + RU Size 26.71)	-13.01	-17.33	-	-	-11.64	28.80	-40.44
5720 (RU Size 52 + RU Size 26.72)	1.44	1.14	-	-	4.30	28.80	-24.50
5745 (RU Size 52 + RU Size 26.70)	6.95	6.58	-	-	9.78	28.80	-19.02
5785 (RU Size 52 + RU Size 26.70)	7.13	7.24	-	-	10.19	28.80	-18.61
5825 (RU Size 52 + RU Size 26.72)	6.85	6.78	-	-	9.82	28.80	-18.97

Table 1132 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU Size 106 + RU Size 26.82)	-20.30	-13.12	-	-	-12.36	28.80	-41.16
5720 (RU Size 106 + RU Size 26.83)	2.06	1.34	-	-	4.73	28.80	-24.07
5745 (RU Size 106 + RU Size 26.82)	6.94	6.48	-	-	9.73	28.80	-19.07
5785 (RU Size 106 + RU Size 26.82)	7.07	7.00	-	-	10.05	28.80	-18.75
5825 (RU Size 106 + RU Size 26.83)	7.01	6.94	-	-	9.98	28.80	-18.82

Table 1133 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	7.20
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690 (RU Size 484 + RU Size 242.90)	-3.19	-3.26	-	-	-0.21	29.30	-29.51
5690 (RU Size 484 + RU Size 242.93)	-49.28	-44.75	-	-	-43.44	29.30	-72.74
5775 (RU Size 484 + RU Size 242.90)	-4.26	-4.14	-	-	-1.19	28.80	-29.99
5775 (RU Size 484 + RU Size 242.93)	-4.15	-4.07	-	-	-1.10	28.80	-29.90

Table 1134 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	2.28	2.13	-	-	5.22	6.84	-1.62
5220	1.87	1.65	-	-	4.77	6.84	-2.07
5240	2.10	1.77	-	-	4.95	6.84	-1.89

Table 1135 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-1.67	-2.05	-	-	1.15	6.84	-5.69
5230	1.72	1.24	-	-	4.50	6.84	-2.34

Table 1136 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

<TableCaption render = "no">

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

<TableCaption render = "no">

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-4.84	-5.74	-	-	-2.26	6.84	-9.10

<TableCaption> - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-11.18	-11.76	-	-	-8.45	6.84	-15.29

Table 1137 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	1.91	1.70	-	-	4.82	6.84	-2.02
5220	2.01	1.77	-	-	4.90	6.84	-1.94
5240	1.87	1.64	-	-	4.76	6.84	-2.08

Table 1138 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-2.81	-3.19	-	-	0.01	6.84	-6.83
5230	1.65	1.17	-	-	4.43	6.84	-2.41

Table 1139 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-6.80	-6.69	-	-	-3.73	6.84	-10.57

Table 1140 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.90	-10.37	-	-	-7.12	6.84	-13.96

Table 1141 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-5.05	-5.22	-	-	-2.13	10.16	8.03	10.00	-1.97
5220	-5.30	-5.27	-	-	-2.27	10.16	7.89	10.00	-2.11
5240	-5.12	-5.14	-	-	-2.12	10.16	8.04	10.00	-1.96

Table 1142 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-5.52	-5.71	-	-	-2.60	10.16	7.56	10.00	-2.44
5230	-5.47	-5.49	-	-	-2.47	10.16	7.69	10.00	-2.31

Table 1143 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.02
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-8.13	-8.52	-	-	-5.31	10.16	4.85	10.00	-5.15

Table 1144 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-10.98	-11.28	-	-	-8.12	10.16	2.04	10.00	-7.96

Table 1145 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-5.21	-5.12	-	-	-2.16	10.16	8.00	10.00	-2.00
5220	-4.86	-4.95	-	-	-1.90	10.16	8.26	10.00	-1.74
5240	-4.93	-5.06	-	-	-1.99	10.16	8.17	10.00	-1.83

Table 1146 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-5.67	-5.84	-	-	-2.74	10.16	7.42	10.00	-2.58
5230	-5.44	-5.66	-	-	-2.54	10.16	7.62	10.00	-2.38

Table 1147 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.03
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-8.57	-8.71	-	-	-5.63	10.16	4.53	10.00	-5.47

Table 1148 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 7.3.1.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-11.09	-11.32	-	-	-8.19	10.16	1.97	10.00	-8.03

Table 1149 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	1.67	1.67	-	-	4.68	6.64	-1.96
5300	1.62	1.50	-	-	4.57	6.64	-2.07
5320	1.73	1.62	-	-	4.69	6.64	-1.95

Table 1150 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	1.67	1.67	-	-	4.68	11.00	-6.32
5300	1.62	1.50	-	-	4.57	11.00	-6.43
5320	1.73	1.62	-	-	4.69	11.00	-6.31

Table 1151 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	1.52	1.16	-	-	4.36	6.64	-2.28
5310	-0.12	-0.38	-	-	2.77	6.64	-3.87

Table 1152 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	1.52	1.16	-	-	4.36	11.00	-6.64
5310	-0.12	-0.38	-	-	2.77	11.00	-8.23

Table 1153 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.48	-5.04	-	-	-1.74	6.64	-8.38

Table 1154 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.48	-5.04	-	-	-1.74	11.00	-12.74

Table 1155 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-11.26	-11.61	-	-	-8.42	6.64	-15.06

Table 1156 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	1.83	1.62	-	-	4.74	6.64	-1.90
5300	1.64	1.76	-	-	4.71	6.64	-1.93
5320	2.01	1.53	-	-	4.79	6.64	-1.85

Table 1157 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	1.83	1.62	-	-	4.74	11.00	-6.26
5300	1.64	1.76	-	-	4.71	11.00	-6.29
5320	2.01	1.53	-	-	4.79	11.00	-6.21

Table 1158 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	1.41	0.89	-	-	4.17	6.64	-2.47
5310	-0.31	-0.37	-	-	2.67	6.64	-3.97

Table 1159 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	1.41	0.89	-	-	4.17	11.00	-6.83
5310	-0.31	-0.37	-	-	2.67	11.00	-8.33

Table 1160 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-5.22	-5.38	-	-	-2.29	6.64	-8.93

Table 1161 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-5.22	-5.38	-	-	-2.29	11.00	-13.29

Table 1162 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.13	-10.55	-	-	-7.33	6.64	-13.97

Table 1163 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-11.24	-11.49	-	-	-8.36	11.00	-19.36

Table 1164 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	RSS-247 7.3.2.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.36
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-10.64	-11.41	-	-	-8.00	11.00	-19.00

Table 1165 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.31	1.43	-	-	4.90	7.29	-2.39
5600	2.67	1.50	-	-	5.14	7.29	-2.15
5700	2.16	1.76	-	-	4.98	7.29	-2.31
5720	2.55	1.98	-	-	5.28	7.29	-2.00

Table 1166 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.31	1.43	-	-	4.90	11.00	-6.10
5600	2.67	1.50	-	-	5.14	11.00	-5.86
5700	2.16	1.76	-	-	4.98	11.00	-6.02
5720	2.55	1.98	-	-	5.28	11.00	-5.72

Table 1167 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-1.08	-1.83	-	-	1.57	7.29	-5.72
5590	1.31	0.24	-	-	3.82	7.29	-3.47
5670	1.99	1.37	-	-	4.70	7.29	-2.59
5710	2.18	1.60	-	-	4.91	7.29	-2.38

Table 1168 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-1.08	-1.83	-	-	1.57	11.00	-9.43
5590	1.31	0.24	-	-	3.82	11.00	-7.18
5670	1.99	1.37	-	-	4.70	11.00	-6.30
5710	2.18	1.60	-	-	4.91	11.00	-6.09

Table 1169 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.63	-5.71	-	-	-2.13	7.29	-9.41
5610	-1.50	-2.49	-	-	1.04	7.29	-6.24
5690	-0.77	-1.75	-	-	1.78	7.29	-5.51

Table 1170 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-4.63	-5.71	-	-	-2.13	11.00	-13.13
5610	-1.50	-2.49	-	-	1.04	11.00	-9.96
5690	-0.77	-1.75	-	-	1.78	11.00	-9.22

Table 1171 - ISED Maximum Power Spectral Density Results





Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.12	-8.99	-	-	-5.52	7.29	-12.81

Table 1172 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.12	-8.99	-	-	-5.52	11.00	-16.52

Table 1173 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.51	1.63	-	-	5.10	7.29	-2.19
5600	2.34	1.44	-	-	4.92	7.29	-2.37
5640	2.37	1.68	-	-	5.05	7.29	-2.24
5700	2.49	1.78	-	-	5.16	7.29	-2.13
5720	2.59	1.84	-	-	5.24	7.29	-2.04

Table 1174 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.51	1.63	-	-	5.10	11.00	-5.90
5600	2.34	1.44	-	-	4.92	11.00	-6.08
5640	2.37	1.68	-	-	5.05	11.00	-5.95
5700	2.49	1.78	-	-	5.16	11.00	-5.84
5720	2.59	1.84	-	-	5.24	11.00	-5.76

Table 1175 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-2.03	-2.75	-	-	0.64	7.29	-6.65
5590	1.30	0.24	-	-	3.81	7.29	-3.48
5670	2.18	1.49	-	-	4.86	7.29	-2.43
5710	1.98	1.58	-	-	4.80	7.29	-2.49

Table 1176 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-2.03	-2.75	-	-	0.64	11.00	-10.36
5590	1.30	0.24	-	-	3.81	11.00	-7.19
5670	2.18	1.49	-	-	4.86	11.00	-6.14
5710	1.98	1.58	-	-	4.80	11.00	-6.20

Table 1177 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-6.11	-7.32	-	-	-3.66	7.29	-10.95
5610	-1.65	-2.74	-	-	0.85	7.29	-6.44
5690	-0.99	-1.21	-	-	1.91	7.29	-5.38

Table 1178 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-6.11	-7.32	-	-	-3.66	11.00	-14.66
5610	-1.65	-2.74	-	-	0.85	11.00	-10.15
5690	-0.99	-1.21	-	-	1.91	11.00	-9.09

Table 1179 - ISD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 7.3.3.2	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	98.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.05
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.72	-9.86	-	-	-6.24	7.29	-13.53

Table 1180 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-8.72	-9.86	-	-	-6.24	11.00	-17.24

Table 1181 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-1.56	-2.15	-	-	1.16	25.79	-24.62
5745	6.36	5.89	-	-	9.14	25.79	-16.64
5785	6.41	6.14	-	-	9.29	25.79	-16.50
5825	5.98	6.09	-	-	9.04	25.79	-16.75

Table 1182 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-3.49	-4.01	-	-	-0.73	25.79	-26.52
5755	3.44	2.67	-	-	6.08	25.79	-19.71
5795	3.57	3.25	-	-	6.42	25.79	-19.37

Table 1183 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 7.3.4.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	99.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-7.31	-8.26	-	-	-4.75	26.29	-31.04
5775	-1.33	-2.32	-	-	1.21	25.79	-24.58

Table 1179 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-2.04	-2.53	-	-	0.73	25.79	-25.06
5745	6.13	5.92	-	-	9.03	25.79	-16.75
5785	6.16	6.16	-	-	9.17	25.79	-16.62
5825	5.93	6.24	-	-	9.10	25.79	-16.69

Table 1184 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-3.84	-3.98	-	-	-0.90	25.79	-26.69
5755	3.82	3.11	-	-	6.49	25.79	-19.30
5795	3.40	3.14	-	-	6.28	25.79	-19.51

Table 1185 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	99.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.04
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	10.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-7.81	-8.17	-	-	-4.98	26.29	-31.26
5775	-1.77	-1.81	-	-	1.22	25.79	-24.57

Table 1186 - Maximum Power Spectral Density Results



FCC 47 CFR Part 15E, Limit Clause 15.407(a)

Condition of Operation	Frequency Range (MHz)			
	5150-5250	5250-5350	5470-5725	5725-5850
Max Conducted Power Spectral Density	17 dBm/MHz for master device 11 dBm/MHz for mobile/portable client device	11 dBm/MHz		30 dBm/500 kHz

Table 1187

ISED RSS-247, Limit Clause 7.3.1.2, 7.3.2.2, 7.3.3.2, 7.3.4.3 and 7.3.5.3

Device	Frequency Range (MHz)				
	5150-5250	5250-5350	5470-5725	5725-5850	5850-5895
OEM installed in vehicles	-	-	-	-	-
Other	≤10 dBm/MHz*	≤11 dBm/MHz	≤11 dBm/MHz	≤30 dBm/500kHz	Fixed Outdoor Access Point: 23 dBm/MHz* Fixed Outdoor Client: 17 dBm/MHz Indoor Access Point: 20 dBm/MHz Indoor Subordinate: 20 dBm/MHz Indoor Client: 14 dBm/MHz

Table 1188

*Maximum power spectral density specified as EIRP.



2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 14 and RF Laboratory 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
1500VA AC Power Supply	iTech	IT7324	5907	-	O/P Mon
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5921	12	29-Nov-2026
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5922	12	29-Nov-2026
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5923	12	29-Nov-2026
Modular Power System Mainframe	Keysight Technologies	N6701C	5969	-	O/P Mon
DC Power Module 60V 20A 300W	Keysight Technologies	N6754A	5970	-	O/P Mon
Digital Multimeter	Fluke	115	6147	12	03-Jun-2027
Humidity and Temperature Meter	R.S Components	1364	6346	12	31-Mar-2027
MXA Signal Analyzer	Keysight Technologies	N9020B	6416	24	07-May-2027
MXA Signal Analyser	Keysight Technologies	N9020B	6417	24	14-Oct-2027
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6518	12	25-Feb-2027
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6519	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6520	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6521	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6522	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6529	12	25-Feb-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6530	12	25-Feb-2027
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6531	12	25-Feb-2027
USB Wideband Power Sensor	Boonton	RTP5008	6587	12	25-Feb-2027
USB Wideband Power Sensor	Boonton	RTP5008	6588	12	25-Feb-2027
USB Wideband Power Sensor	Boonton	RTP5008	6589	12	25-Feb-2027
AC Programmable Power Supply	iTech	IT7324	6662	-	O/P Mon
DC Power Module	Keysight Technologies	N6754A	6663	-	O/P Mon
Modular Power System Mainframe	Keysight Technologies	N6701C	6664	-	O/P Mon
Digital Thermometer	R.S Components	RS 5511	6739	12	02-Mar-2027
Thermostatic Chamber	Weiss Technik	LabEvent T/500/50/3	7315	24	O/P Mon

Table 1189

O/P Mon - Output Monitored using calibrated equipment



2.4 Emission Bandwidth

2.4.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)
FCC 47 CFR Part 15E, Clause 15.407 (e)
ISED RSS-247, Clause 7.3

2.4.2 Equipment Under Test and Modification State

A3376, S/N: CLXX067RCX - Modification State 0

2.4.3 Date of Test

13-September-2026 to 01-October-2026

2.4.4 Test Method

The test was performed in accordance with ANSI C63.10 2013 clause 12.4.1 for FCC measurements and ANSI C63.10 2020 clause 12.5.2 for ISED measurements.

For modes of operation using multiple cores, measurements were made on each core but only the worst case results are reported. Worst case was considered as the narrowest results for 6 dB bandwidth and the widest result for 26 dB bandwidth and 99% occupied bandwidth.

2.4.5 Environmental Conditions

Ambient Temperature	21.5 - 21.7 °C
Relative Humidity	45.2 - 64.3 %

2.4.6 Test Results

5 GHz WLAN

Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	17.520	17.922
802.11n HT40	36.120	36.648
802.11ac VHT80	75.086	75.922
802.11ac VHT160	153.804	153.888
802.11ax HE20 SU	18.786	19.068
802.11ax HE40 SU	37.584	38.028
802.11ax HE80 SU	76.648	77.440
802.11ax HE160 SU	155.526	155.694
802.11a20	16.356	16.776
802.11a40	36.190	37.236
802.11a80	75.416	77.856
802.11a160	154.434	154.434

Table 1190 - 99% Bandwidth Summary Results - SISO

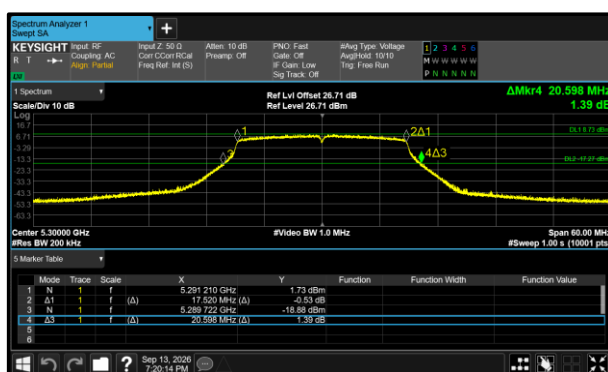


Figure 352 - 802.11n HT20 Minimum 99% OBW

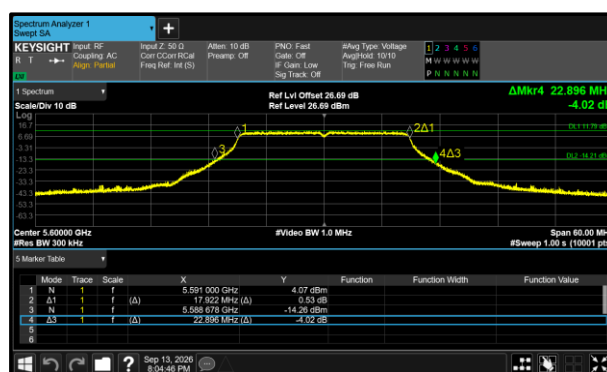


Figure 353 - 802.11n HT20 Maximum 99% OBW

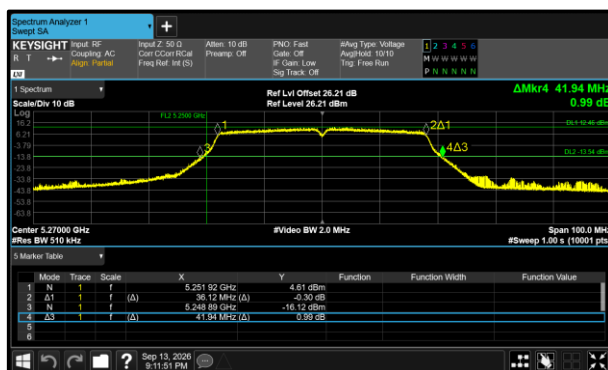


Figure 354 - 802.11n HT40 Minimum 99% OBW

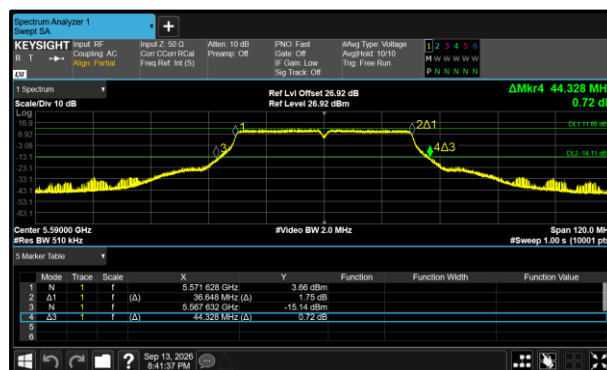


Figure 355 - 802.11n HT40 Maximum 99% OBW

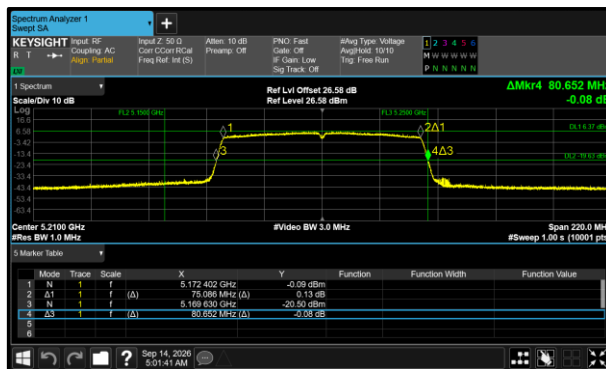


Figure 356 - 802.11ac VHT80 Minimum 99% OBW

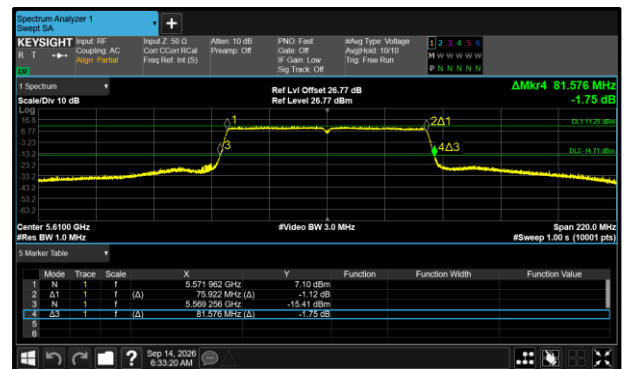


Figure 357 - 802.11ac VHT80 Maximum 99% OBW

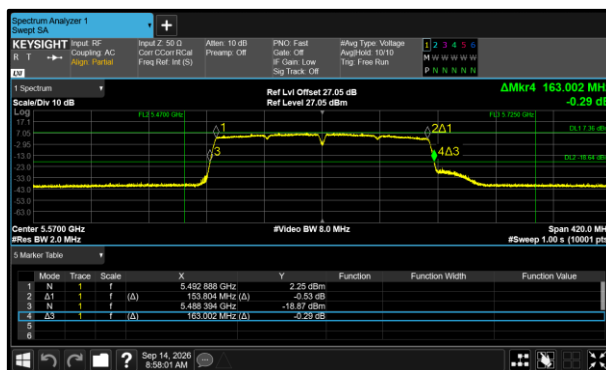


Figure 358 - 802.11ac VHT160 Minimum 99% OBW

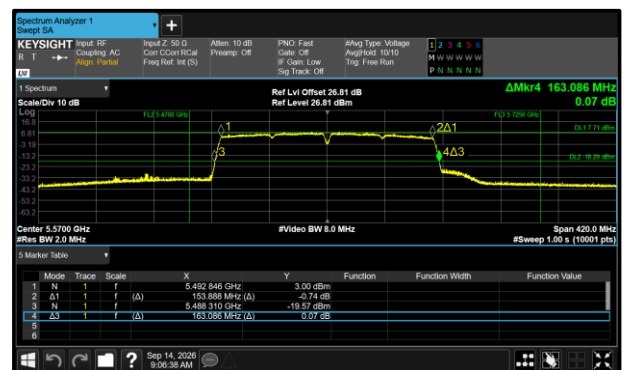


Figure 359 - 802.11ac VHT160 Maximum 99% OBW

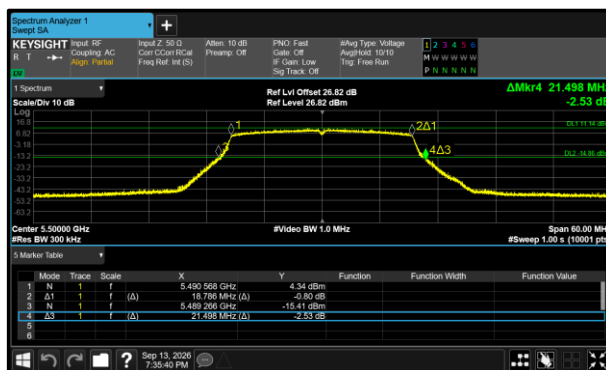


Figure 360 - 802.11ax HE20 SU Minimum 99% OBW

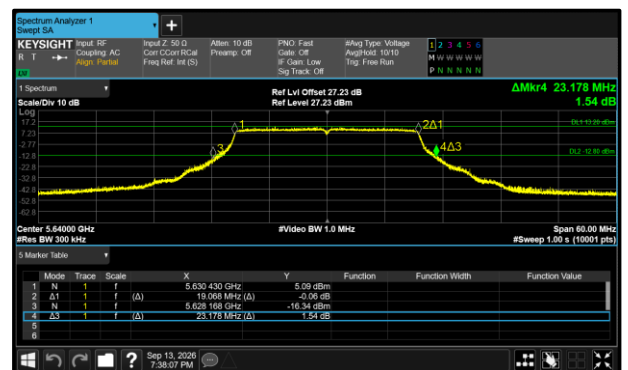


Figure 361 - 802.11ax HE20 SU Maximum 99% OBW