

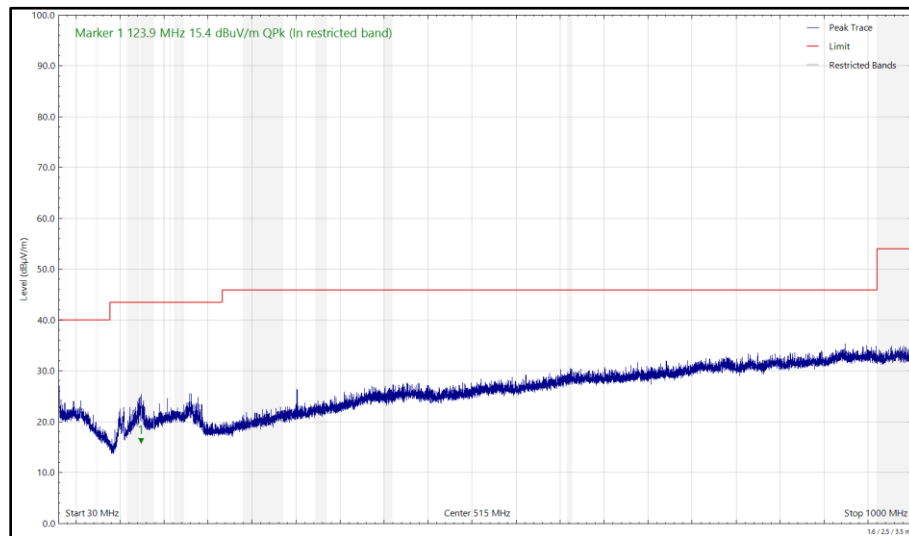


Figure 112 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

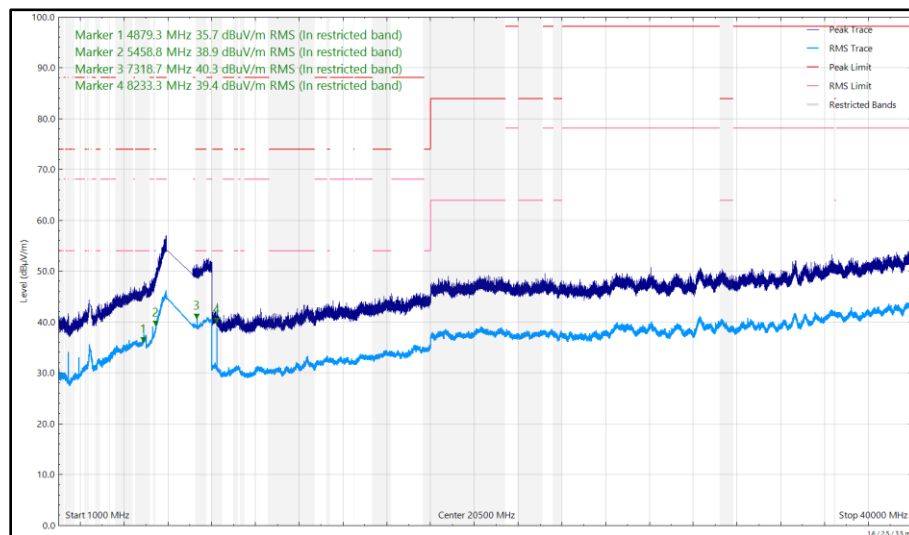


Figure 113 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Vertical



Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
124.861	15.07	43.50	-28.43	Q-Peak	285	358	Vertical
125.036	24.91	43.50	-18.59	Q-Peak	358	256	Horizontal
280.012	23.41	46.00	-22.59	Q-Peak	88	106	Horizontal
2483.619	34.14	54.00	-19.86	RMS	18	385	Vertical
4880.803	37.93	54.00	-16.07	RMS	8	342	Vertical
5432.258	38.93	54.00	-15.07	RMS	4	393	Vertical
5432.537	38.50	54.00	-15.50	RMS	5	341	Horizontal
5884.208	47.93	68.20	-20.27	RMS	85	243	Horizontal
5884.552	48.08	68.20	-20.12	RMS	359	175	Vertical
7250.725	40.56	54.00	-13.44	RMS	74	390	Horizontal
7321.160	40.90	54.00	-13.10	RMS	317	269	Vertical

Table 38 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

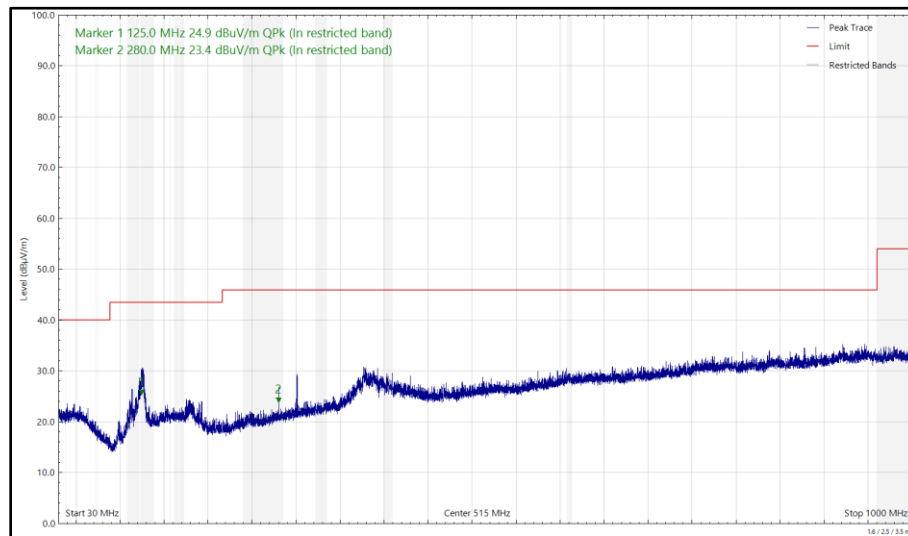


Figure 114 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

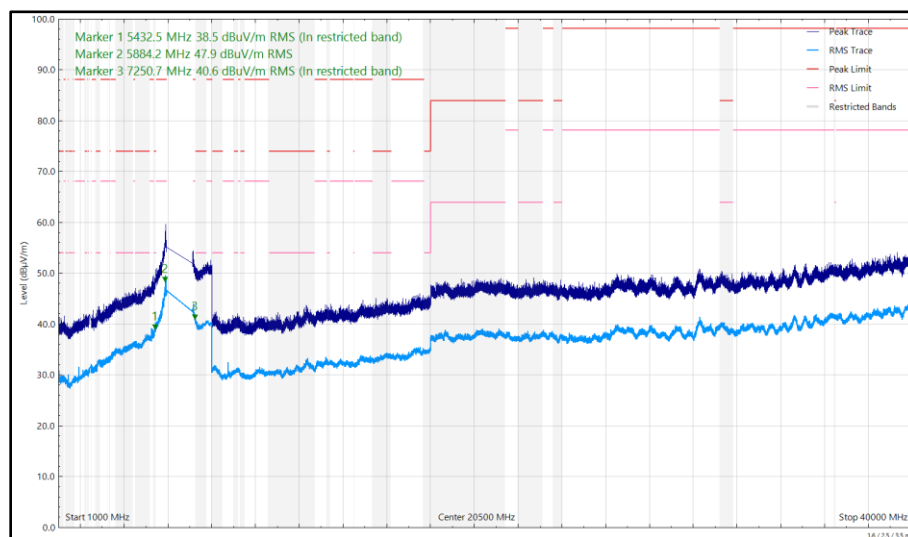


Figure 115 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Horizontal

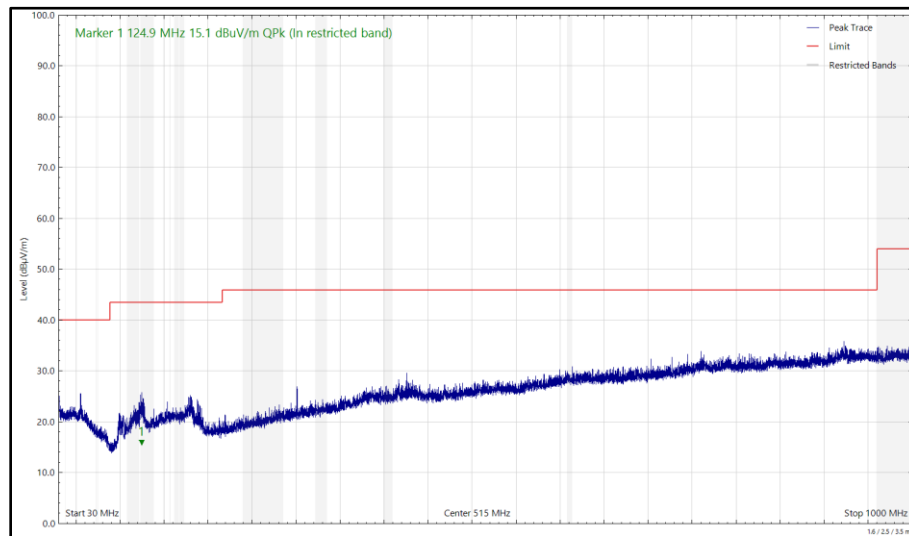


Figure 116 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

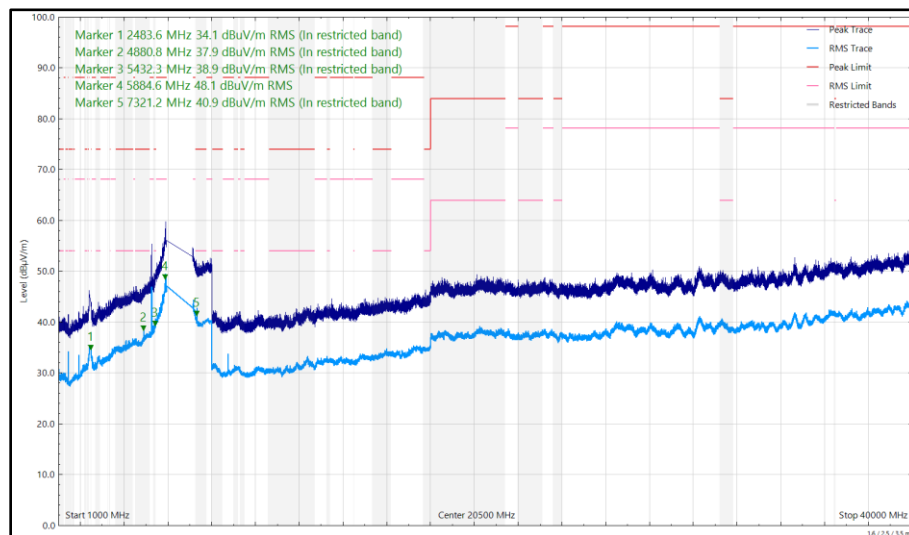


Figure 117 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Vertical

FCC 47 CFR Part 15

The least stringent limit from the applicable rule parts was used to determine compliance for Radiated Emissions testing of multiple transmission sources.

The least stringent applicable limit was:

Clause	Limit
Part 15 247 (d)	-20 dBc
Part 15.407 (b)	Peak: -7 dBm/MHz e.i.r.p, Average: -27 dBm/MHz e.i.r.p.
Part 15.209	Peak: 74 dBμV/m at 3m, Average 54 dBμV/m at 3m (Restricted bands > 1 GHz)

Table 39



2.1.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 16 and RF Chamber 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Cable 2.92m	Junkosha	MWX241-01000KMS	5413	12	23-May-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	5912	12	07-Aug-2025
Test Receiver	Rohde & Schwarz	ESW44	5914	12	24-May-2025
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	5933	12	10-Jun-2025
1500W (300V 12A) AC Power Supply	iTech	IT7324	5957	-	O/P Mon
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
3m Semi-Anechoic Chamber, Chamber16	Albatross Projects	RF Chamber 16	5972	36	24-May-2025
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5973	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5974	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5975	-	TU
Cable (N to N 7m)	Junkosha	MWX221-07000NMSNMS/B	6005	12	20-May-2025
Cable (N to N 1m)	Junkosha	MWX221-01000AMSAMS/B	6009	12	20-May-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6142	12	05-May-2025
SAC Switch Unit	TUV SUD	TUV_SSU_001	6144	12	11-Dec-2024
Digital Multimeter	Fluke	115	6147	12	06-Jun-2025
Humidity & Temperature meter	R.S Components	1364	6148	12	29-Jul-2025
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6188	24	31-Jul-2026
8GHz Highpass Filter	Wainwright	WHKX 7150 8000 18000 50SS	6194	12	23-Apr-2025
Pre Amp 8 - 18 GHz	Wright Technologies	APS06 0061	6200	12	03-Jun-2025
Attenuator 4dB	Pasternack	PE7074-4	6204	24	20-Jun-2026
Cable (SMA to SMA 20cm)	TUV SUD	MH-FH 8-18	6215	12	23-Apr-2025
USB Spectrum Analyser	Signal Hound	SA124B	6295	-	TU
Cable (SMA to SMA 8m)	Junkosha	MWX221-08000AMSAMS/B	6318	12	18-Feb-2025
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	6323	12	04-Feb-2025
Digital Multimeter	Fluke	115	6345	12	24-Jul-2025
SAC Switch Unit	TUV SUD	TUV_SSU_004 PLC	6349	12	07-May-2025
USB Spectrum Analyser	Signal Hound	SA124B	6383	-	TU



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	6456	24	10-Feb-2025
DRG Horn Antenna (8-18 GHz)	Schwarzbeck	HWRD750	6458	12	05-May-2025
Humidity and Temperature Meter	R.S Components	1364	6486	12	04-Jun-2025
3m Semi-Anechoic Chamber	Albatross Projects	Chamber 18	6597	36	07-Feb-2026
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6771	24	17-Jan-2025
Turntable	Maturo Gmbh	TT1.5SI	6797	-	TU
AC Programmable Power Supply	iTech	IT7324	6812	-	O/P Mon
Broad-Band Horn Antenna 1-10GHz N	Schwarzbeck	BBHA9120B	6825	12	18-Jul-2025
8M SMA Cable	Junkosha	MWX221-08000AMSAMS/B	6833	12	14-Aug-2025
Cable Assembly	SpecTech	PE300-60	6861	-	TU
Cable Assembly	SpecTech	PE300-60	6862	-	TU
Cable Assembly	SpecTech	PE300-60	6863	-	TU

Table 40

TU - Traceability Unscheduled
O/P Mon - Output Monitored using calibrated equipment



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Radiated Spurious Emissions (Simultaneous Transmission)	30 MHz to 1 GHz: ± 5.2 dB
	1 GHz to 40 GHz: ± 6.3 dB

Table 41

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.