

FCC and ISED Test Report

Apple Inc
Model: A3404



In accordance with FCC 47 CFR Part 15E and
ISED RSS-248 and ISED RSS-GEN
(6 GHz WLAN)

Prepared for: Apple Inc
One Apple Park Way
Cupertino
California
95014
USA

TUV SUD
SERVICES
(UK) LIMITED

Digitally signed by
TUV SUD SERVICES
(UK) LIMITED
Date: 2026.02.19
18:47:21 Z

FCC ID: BCGA3404

IC: 579C-A3404

COMMERCIAL-IN-CONFIDENCE

Document 75963993-67 Issue 02



SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Matthew Russell	Chief Engineer, RF	Authorised Signatory	19 February 2026

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15E, ISED RSS-248 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generation	Rachael Watkins	19 February 2026	

FCC Accreditation

553713/UK2026 Concorde Park, Fareham Test Laboratory

ISED Accreditation

28798/UK0003 Concorde Park, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15E: 2024, ISED RSS-248: Issue 3 (2024-10) and ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2026 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited). Results of tests covered by our Flexible UKAS Accreditation Schedule are marked FS (Flexible Scope).

TÜV SÜD
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom

TÜV SÜD

TÜV®



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	7
1.6	Identification of the EUT	7
1.7	EUT Modification Record	8
1.8	Test Location	9
2	Test Details	10
2.1	Emission Bandwidth	10
2.2	Dual Client Test.....	96
2.3	Maximum Conducted Output Power	99
2.4	Maximum Conducted Power Spectral Density.....	157
2.5	Authorised Band Edges	215
2.6	Spurious Radiated Emissions	291
2.7	Unwanted Emissions within the 5925-7125 MHz band.....	315
2.8	Contention Based Protocol	392
2.9	Transmit Power Control; Very Low Power Devices	428
3	Measurement Uncertainty	433



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	10 February 2026
2	Update to Section 2.7	19 February 2026

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
EUT/Sample Identification	Refer to section 1.6
Test Specification/Issue/Date	FCC 47 CFR Part 15E: 2024 ISED RSS-248: Issue 3 (2024-10) ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02)
Start of Test	31-August-2025
Finish of Test	18-February-2026
Name of Engineer(s)	Thomas Randall, Ioan-Alexandru Bogatu, Tony Baby, Morsalin Hossain, Colin Brain, Dulanjan Witharamalage, Ahmed Al Derdiri, Babitha Babu, Manohar Thota, Akhil Rajendran Bhaskaran Nair, Marius Vasii, Joshua O'Donnell, Chowdhury Mahmud, James Woods
Related Document(s)	ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 662911 D01 v02r01 KDB 789033 D02 v02r01 KDB 987594 D02 v03



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15E, ISSED RSS-248 and ISSED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15E	RSS-248	RSS-GEN			
Configuration and Mode: 6 GHz WLAN						
-	15.203	-	-	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.407 (a)	4.4	6.7	Emission Bandwidth	Pass	KDB 789033 D02 v02r01
2.2	15.407 (a)	4.5	6.12	Dual Client Test	Pass	KDB 987594 D02 v03
2.3	15.407 (a)	4.5	6.12	Maximum Conducted Output Power	Pass	KDB 662911 D01 v02r01 KDB 789033 D02 v02r01
2.4	15.407 (a)	4.5	-	Maximum Conducted Power Spectral Density	Pass	KDB 662911 D01 v02r01 KDB 789033 D02 v02r01
2.5	15.407 (b)	4.6	6.13	Authorised Band Edges	Pass	ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01
2.6	15.209 and 15.407 (b)	4.6	6.13 and 8.9	Spurious Radiated Emissions	Pass	ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01
2.7	15.407 (b)	4.6	6.13	Unwanted Emissions within the 5925-7125 MHz band	Pass	KDB 987594 D02 v03
2.8	15.407 (d)(6)	4.7	-	Contention Based Protocol	Pass	KDB 987594 D02 v03
2.9	15.407 (d)(10)	4.5.6	-	Transmit Power Control	Pass	KDB 987594 D02 v03

Table 2



1.4 Product Information

1.4.1 Technical Description

The equipment under test (EUT) was a portable laptop computer.

1.4.2 Test Modes

The EUT's 6 GHz 802.11 radio supported SISO (Single Input/Single Output) and 2x2 MIMO (Multiple Input/Multiple Output) modes. 802.11a supports 20 MHz bandwidth and 802.11ax supports 20 MHz, 40 MHz, 80 MHz and 160 MHz bandwidths.

802.11a mode supports SISO and Cyclic Delay Diversity (CDD) operation only. 802.11ax supports SISO, Cyclic Delay Diversity (CDD), Space Division Multiplexing (SDM) and Space Time Block Coding (STBC). The EUT supported 802.11ax Single User (SU) and Multi-User (MU) with all Resource Unit (RU) sizes from 26 subcarriers, up to the maximum allowed, dependent on channel bandwidth.

The EUT is categorized as a Standard Power/Low Power (6CD) Dual Client & (6VL) Very Low Power device in the 5.925-7.125 GHz bands by region, as described below.

Region	U-NII-5 (5925 - 6425 MHz)	U-NII-6 (6425 - 6525MHz)	U-NII-7 (6525 - 6875 MHz)	U-NII-8 (6875 - 7125 MHz)
Canada (ISED)	SP/LP/VLP*	SP/LP/VLP	SP/LP/VLP	LP/VLP
US (FCC)	SP/LP/VLP*	LP/VLP	SP/LP/VLP	LP/VLP

*The device prioritises operation above 6105 MHz during VLP operation by not supporting channels below channel 33 in this mode.

The EUT uses different output powers per core dependent on how many cores are used. The EUT also uses different power tables for Cyclic Delay Diversity (CDD), Space Division Multiplexing (SDM) and Transmit Beamforming (TxBF) modes. It uses the same conducted power across all cores in any given mode, but due to the different antenna gains the radiated powers per core differ.

After preliminary investigations were performed to find worst-case operation, the EUT was tested in the following modes:

SISO Modes (Core 0 other than 6135 MHz which was Core 1)

- 802.11a - 12 Mbps
- 802.11ax HE20 SU - MCS2x1
- 802.11ax HE40 SU - MCS2x1
- 802.11ax HE80 SU - MCS2x1
- 802.11ax HE160 SU - MCS2x1
- 802.11ax HE20 MU RU26/52/106 - MCS2x1*



2x2 MIMO Modes (Core 0 + Core 1):

- 802.11a - CDD - 12 Mbps
- 802.11ax HE20 SU - CDD (MCS2x1), SDM (MCS2x2) and TxBF (MCS2x1)
- 802.11ax HE40 SU - CDD (MCS2x1), SDM (MCS2x2) and TxBF (MCS2x1)
- 802.11ax HE80 SU - CDD (MCS2x1), SDM (MCS2x2) and TxBF (MCS2x1)
- 802.11ax HE160 SU - CDD (MCS2x1) and SDM (MCS2x2)
- 802.11ax HE20 MU RU26/52/106 - CDD (MCS2x1) and SDM (MCS2x2)*

*Note: The RU offset for bottom and middle channels were placed in the lowest position and on the top channel, the offset was placed in the upper most position.

1.4.3 Test Setup

For conducted tests the EUT antennas were disconnected and replaced with U.FL to SMA test cables to enable conducted testing on each core. The loss of these test cables were known and compensated for in any conducted measurements.

For all testing except Contention Based Protocol, Dual Client & TPC tests the EUT was put into a continuous transmit test mode with the chipset manufacturer's test commands. The EUT then transmitted the required type of packeted 802.11 data frames of fixed length, containing the standard headers and with pseudo-random data content, ensuring the measured signals were representative and contained all the symbols at the highest power control level.

The test setup used for Contention Based Protocol, Dual Client & TPC tests are described in the relevant test result sections of the present document.



1.4.4 Antenna Gain Table

Antenna Port	Frequency (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
Core 0 (WF2)	5955	7.4	1.15
	6075	6.8	1.15
	6135	6.5	1.17
	6255	7.3	1.17
	6375	7.6	1.21
	6435	6.8	1.27
	6555	6.7	1.25
	6675	6.1	1.25
	6735	5.9	1.25
	6855	7.0	1.25
	6975	7.6	1.26
	7035	7.1	1.26
	7115	7.1	1.26
Core 1 (WF1)	5955	8.2	1.15
	6075	7.3	1.15
	6135	6.7	1.17
	6255	6.7	1.17
	6375	7.7	1.21
	6435	7.5	1.27
	6555	7.1	1.25
	6675	6.8	1.25
	6735	7.7	1.25
	6855	8.5	1.25
	6975	7.9	1.26
	7035	7.8	1.26
	7115	7.8	1.26

Table 3



1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 Identification of the EUT

The table below details identification of the EUT(s) that have been used to carry out the testing within this report.

Model: A3404		
Serial Number	Hardware Version	Software Version
GR7MN20VT3	REV1.0	25A92880q
DK9CMV9X2C	REV1.0	25A92880q
LTJGK16JDF	REV1.0	25A92880q
DXLWDVXK00	REV1.0	25A92880q
G7GJ4614T5	REV1.0	25D2110
FF267P32M4	REV1.0	25A92880q
L37L9N2F9N	REV1.0	25A92880q
HWH7MHKN3X	REV1.0	25A92880q
GGJ459HGJ6	REV1.0	25A92880q

Table 4



1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A3404, Serial Number: FF267P32M4			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3404, Serial Number: L37L9N2F9N			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3404, Serial Number: DXLWDVXK00			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3404, Serial Number: LTJGK16JDF			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3404, Serial Number: GR7MN20VT3			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3404, Serial Number: DK9CMV9X2C			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3404, Serial Number: G7GJ4614T5			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3404, Serial Number: HWH7MHKN3X			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3404, Serial Number: GGJ459HGJ6			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3404, Serial Number: G7GJ4614T5			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 5



1.8 Test Location

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 6 GHz WLAN		
Emission Bandwidth	Joshua O'Donnell, Chowdhury Mahmud	UKAS
Dual Client Test	Babitha Babu	UKAS
Maximum Conducted Output Power	Joshua O'Donnell, Chowdhury Mahmud	UKAS
Maximum Conducted Power Spectral Density	Joshua O'Donnell, Chowdhury Mahmud	UKAS
Authorised Band Edges	Thomas Randall, Ioan-Alexandru Bogatu, Tony Baby, Morsalin Hossain, Manohar Thota, Colin Brain, Dulanjan Witharamalage, Ahmed Al Dirdiri	UKAS
Spurious Radiated Emissions	Manohar Thota, Akhil Rajendran Bhaskaran Nair, Colin Brain, Marius Vasii	UKAS
Unwanted Emissions within the 5925-7125 MHz band	Joshua O'Donnell, Chowdhury Mahmud	UKAS
Contention Based Protocol	Babitha Babu	UKAS
Transmit Power Control	Babitha Babu	UKAS

Table 6

Office Address:

TÜV SÜD
Concorde Park
Concorde Way
Fareham
Hampshire
PO15 5FG
United Kingdom



2 Test Details

2.1 Emission Bandwidth

2.1.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)(11)
ISED RSS-248, Clause 4.4
ISED RSS-GEN, Clause 6.7

2.1.2 Equipment Under Test and Modification State

A3404, S/N: HWH7MHKN3X - Modification State 0
A3404, S/N: GGJ459HGJ6 - Modification State 0

2.1.3 Date of Test

05-January-2026 to 28-January-2026

2.1.4 Test Method

The test was performed in accordance with KDB 789033, clause C.1 for 26 dB bandwidth and clause D for 99% occupied bandwidth.

2.1.5 Environmental Conditions

Ambient Temperature	23.8 - 25.3 °C
Relative Humidity	35.5 - 46.5 %



2.1.6 Test Results

6GHz WLAN

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	21.594	22.512
802.11ax HE40 SU LPI	39.612	39.840
802.11ax HE80 SU LPI	80.366	81.576
802.11ax HE160 SU LPI	161.868	162.582
802.11ax HE20 SU SP	21.816	34.400
802.11ax HE40 SU SP	39.636	63.812
802.11ax HE80 SU SP	80.388	122.640
802.11ax HE160 SU SP	161.910	250.936
802.11ax HE20 SU VLP	21.636	22.218
802.11ax HE40 SU VLP	39.600	39.852
802.11ax HE80 SU VLP	80.388	81.488
802.11ax HE160 SU VLP	161.784	162.204
802.11a20 SP	21.042	35.250
802.11a20 VLP	20.262	21.216
802.11a20 LPI	20.274	21.024

Table 7 - 26 dB Bandwidth Summary Results - SISO

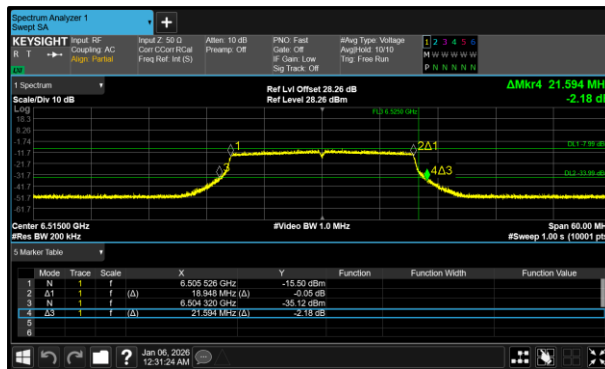


Figure 1 - 802.11ax HE20 SU LPI Minimum 26 dB EBW

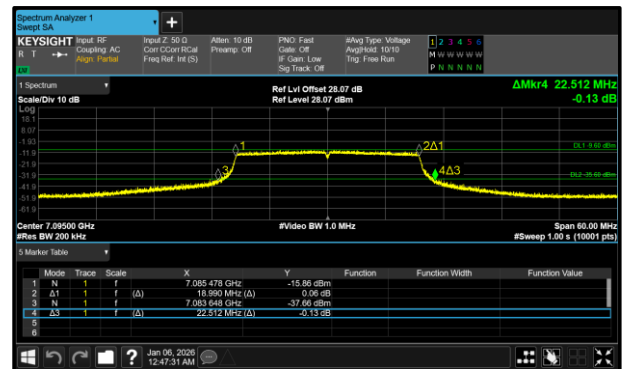


Figure 2 - 802.11ax HE20 SU LPI Maximum 26 dB EBW

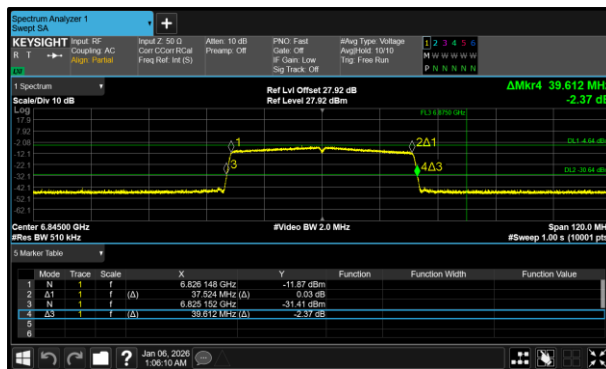


Figure 3 - 802.11ax HE40 SU LPI Minimum 26 dB EBW

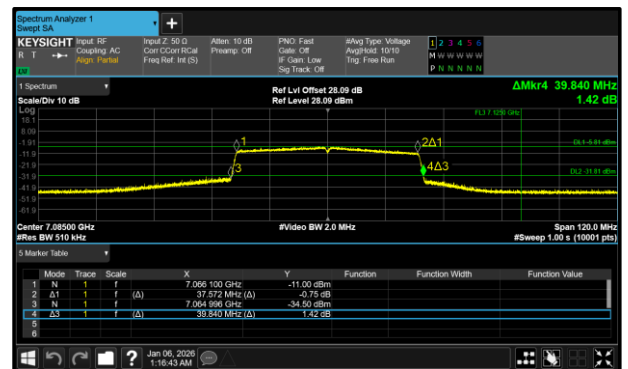


Figure 4 - 802.11ax HE40 SU LPI Maximum 26 dB EBW

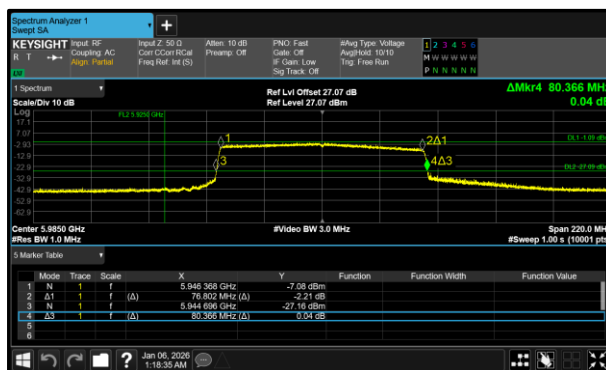


Figure 5 - 802.11ax HE80 SU LPI Minimum 26 dB EBW

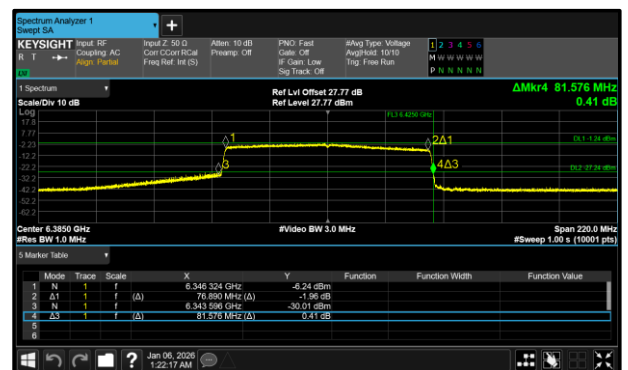


Figure 6 - 802.11ax HE80 SU LPI Maximum 26 dB EBW

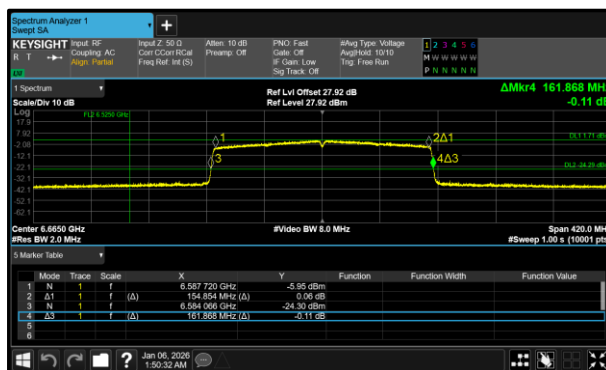


Figure 7 - 802.11ax HE160 SU LPI Minimum 26 dB EBW

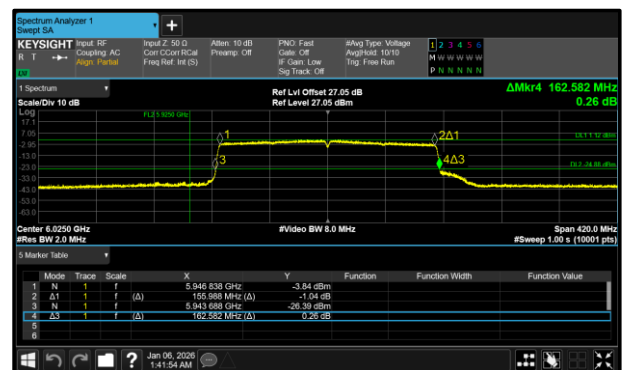
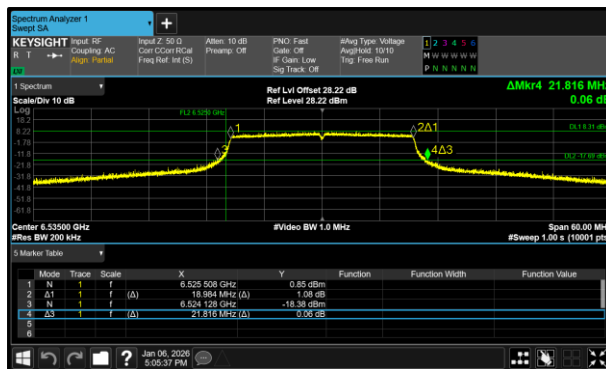
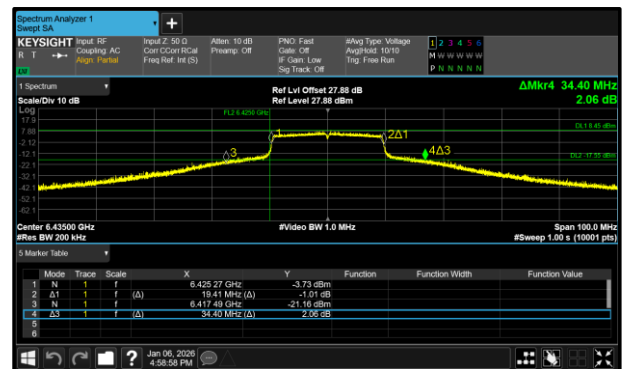
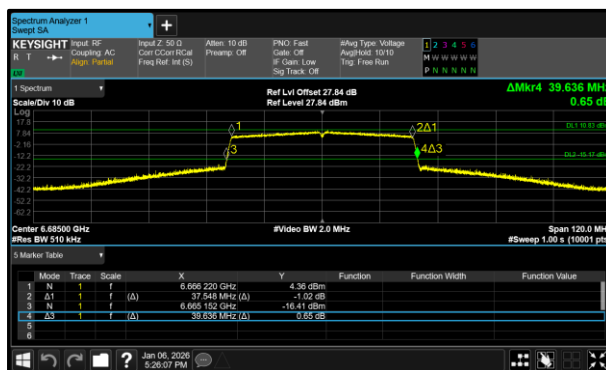
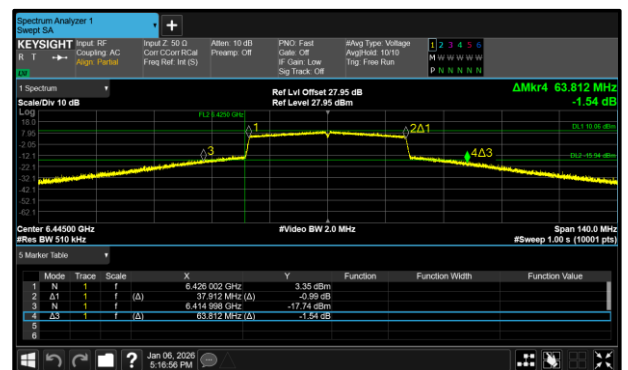
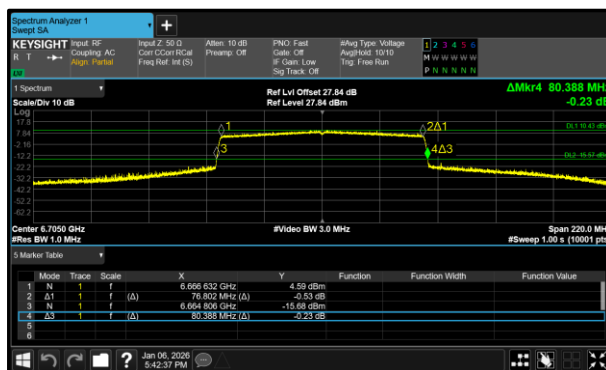
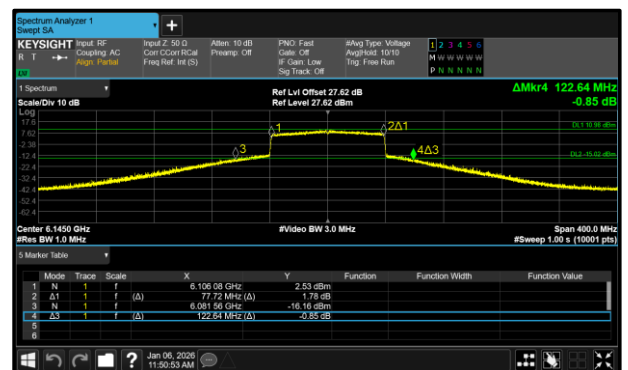


Figure 8 - 802.11ax HE160 SU LPI Maximum 26 dB EBW



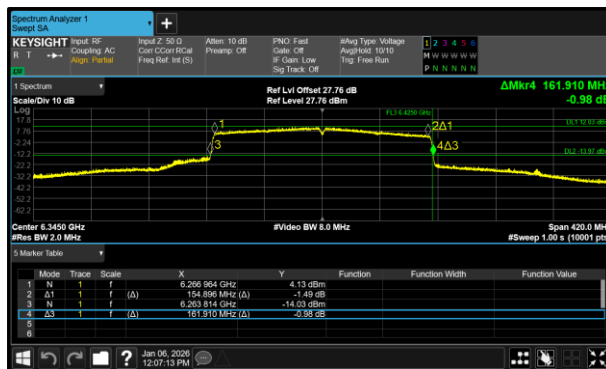


Figure 15 - 802.11ax HE160 SU SP Minimum 26 dB EBW

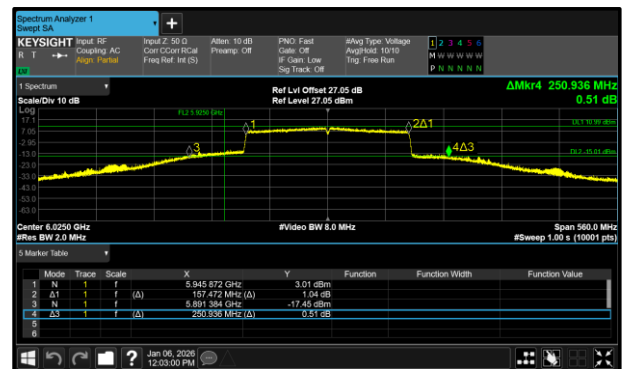


Figure 16 - 802.11ax HE160 SU SP Maximum 26 dB EBW

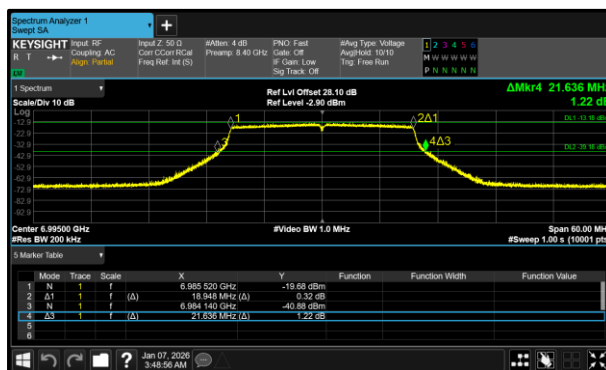


Figure 17 - 802.11ax HE20 SU VLP Minimum 26 dB EBW

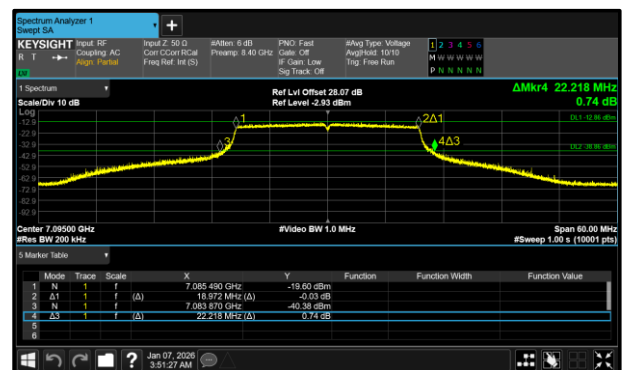


Figure 18 - 802.11ax HE20 SU VLP Maximum 26 dB EBW

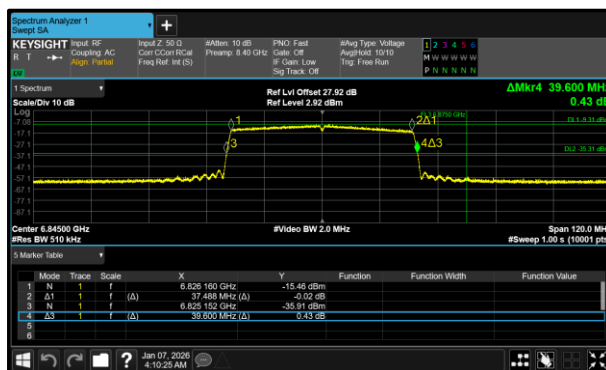


Figure 19 - 802.11ax HE40 SU VLP Minimum 26 dB EBW

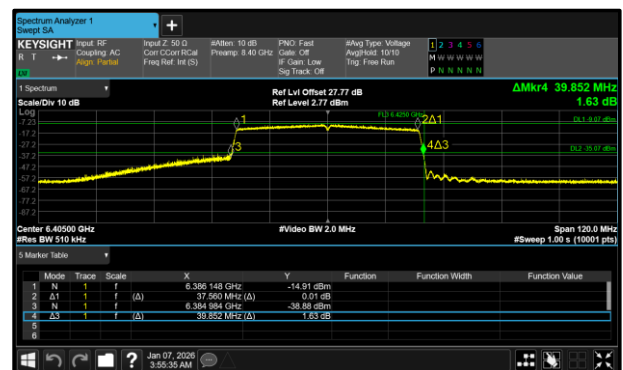


Figure 20 - 802.11ax HE40 SU VLP Maximum 26 dB EBW

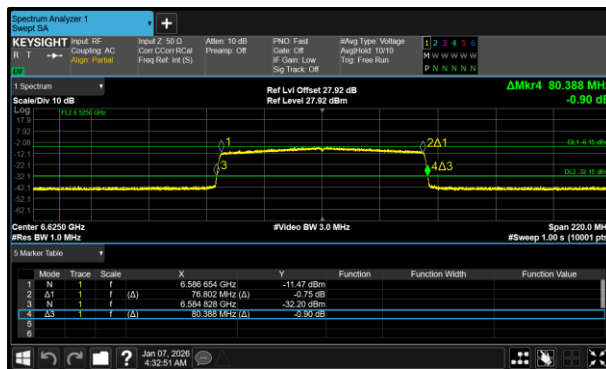


Figure 21 - 802.11ax HE80 SU VLP Minimum 26 dB EBW

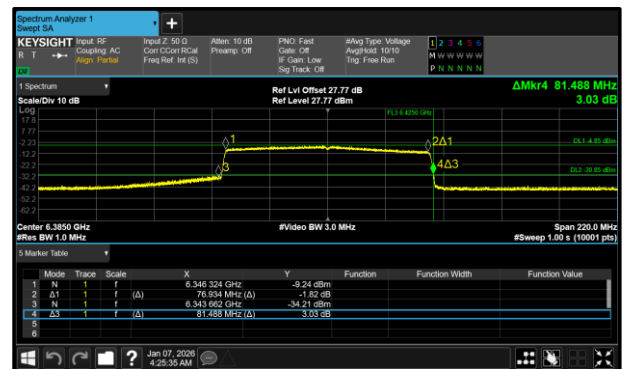


Figure 22 - 802.11ax HE80 SU VLP Maximum 26 dB EBW

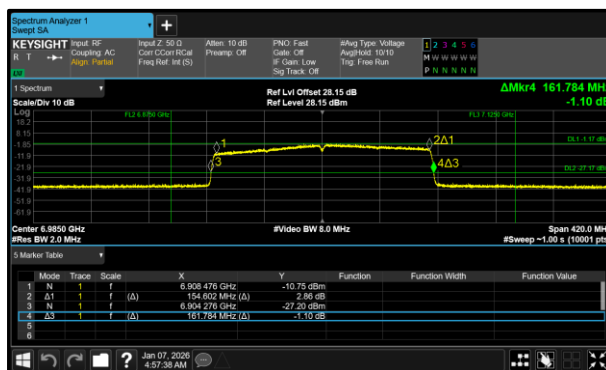


Figure 23 - 802.11ax HE160 SU VLP Minimum 26 dB EBW

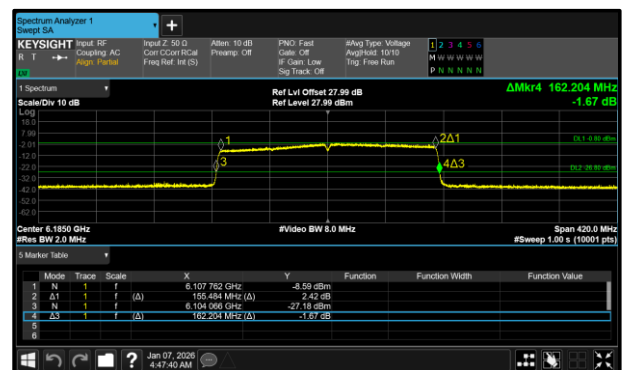


Figure 24 - 802.11ax HE160 SU VLP Maximum 26 dB EBW

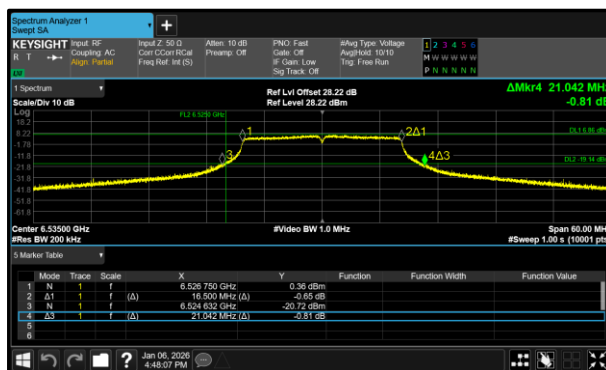


Figure 25 - 802.11a20 SP Minimum 26 dB EBW

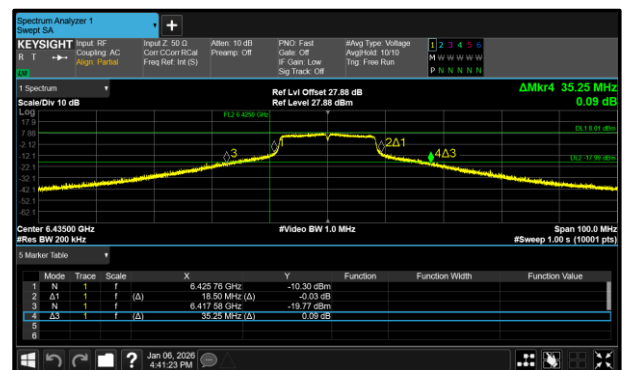


Figure 26 - 802.11a20 SP Maximum 26 dB EBW

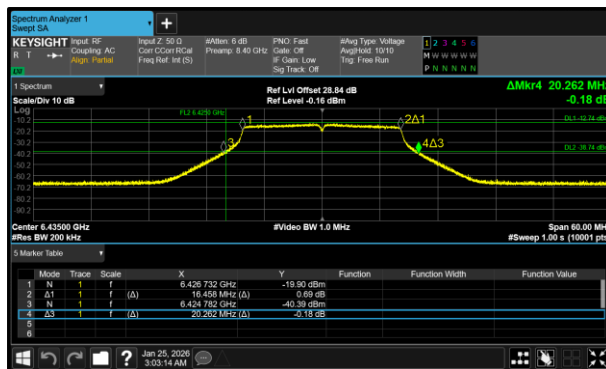


Figure 27 - 802.11a20 VLP Minimum 26 dB EBW

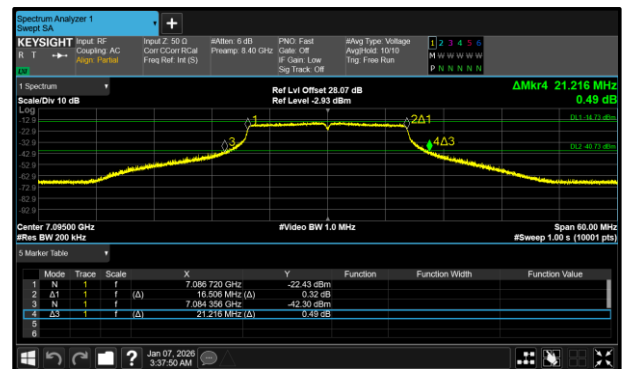


Figure 28 - 802.11a20 VLP Maximum 26 dB EBW

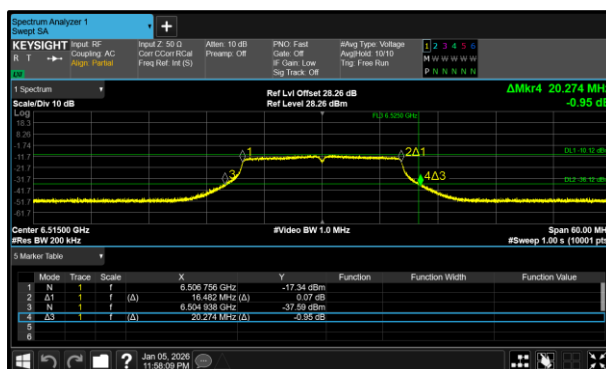


Figure 29 - 802.11a20 LPI Minimum 26 dB EBW

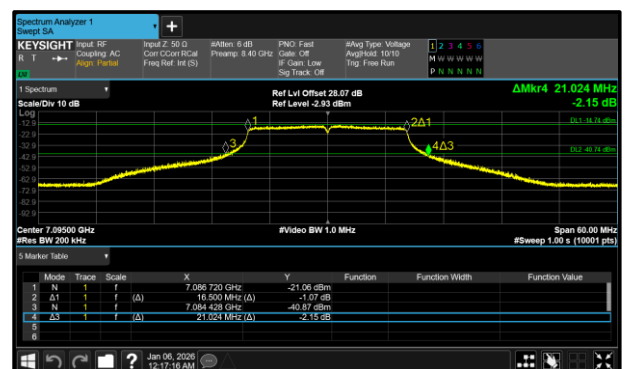


Figure 30 - 802.11a20 LPI Maximum 26 dB EBW

Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	18.948	18.990
802.11ax HE40 SU LPI	37.500	37.572
802.11ax HE80 SU LPI	76.714	77.000
802.11ax HE160 SU LPI	154.518	155.988
802.11ax HE20 SU SP	18.972	19.410
802.11ax HE40 SU SP	37.512	37.912
802.11ax HE80 SU SP	76.714	77.720
802.11ax HE160 SU SP	154.854	157.472
802.11ax HE20 SU VLP	18.942	18.978
802.11ax HE40 SU VLP	37.488	37.560
802.11ax HE80 SU VLP	76.758	77.000
802.11ax HE160 SU VLP	154.602	155.568
802.11a20 LPI	16.458	16.500
802.11a20 VLP	16.458	16.506
802.11a20 SP	16.500	18.500

Table 8 - 99% Bandwidth Summary Results - SISO

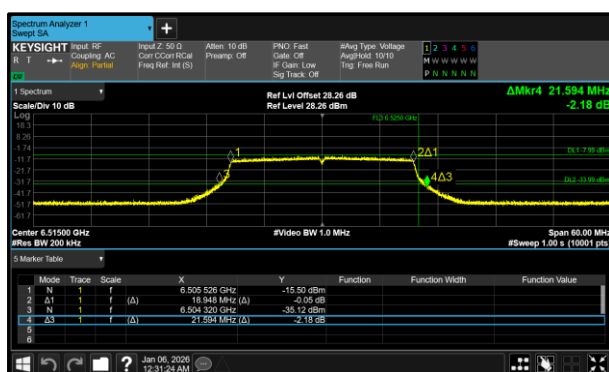


Figure 31 - 802.11ax HE20 SU LPI Minimum 99% OBW

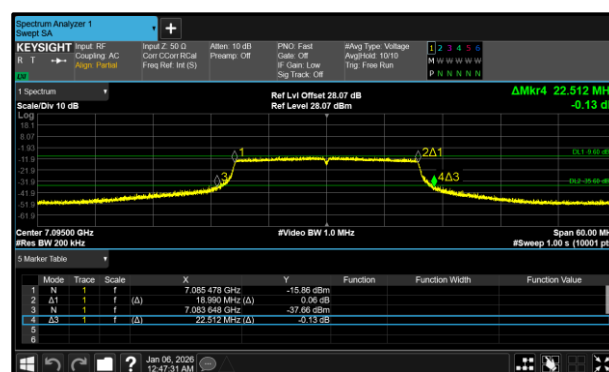


Figure 32 - 802.11ax HE20 SU LPI Maximum 99% OBW

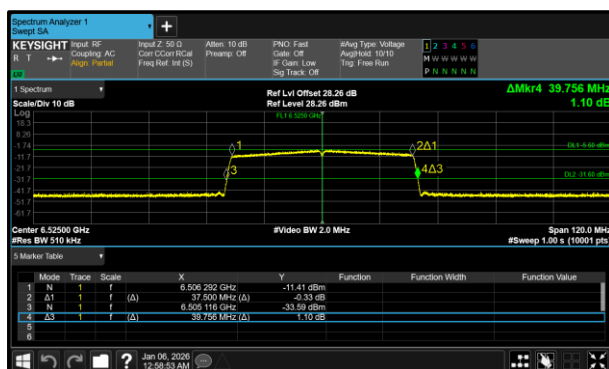


Figure 33 - 802.11ax HE40 SU LPI Minimum 99% OBW

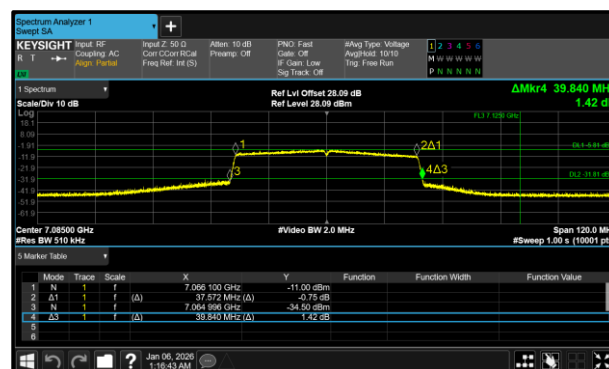


Figure 34 - 802.11ax HE40 SU LPI Maximum 99% OBW

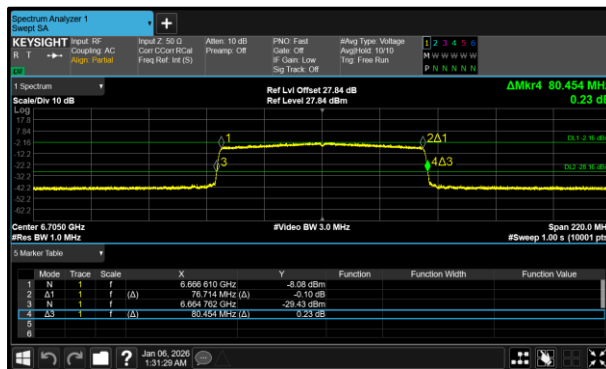


Figure 35 - 802.11ax HE80 SU LPI Minimum 99% OBW



Figure 36 - 802.11ax HE80 SU LPI Maximum 99% OBW

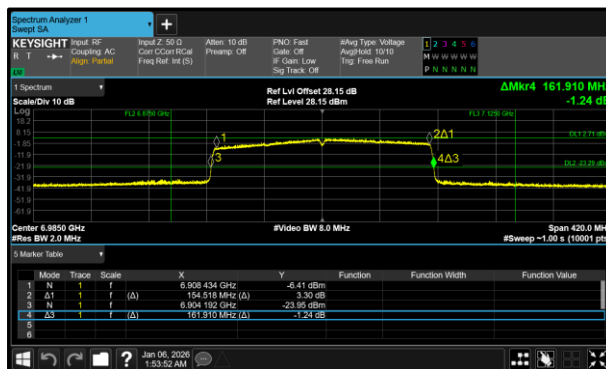


Figure 37 - 802.11ax HE160 SU LPI Minimum 99% OBW

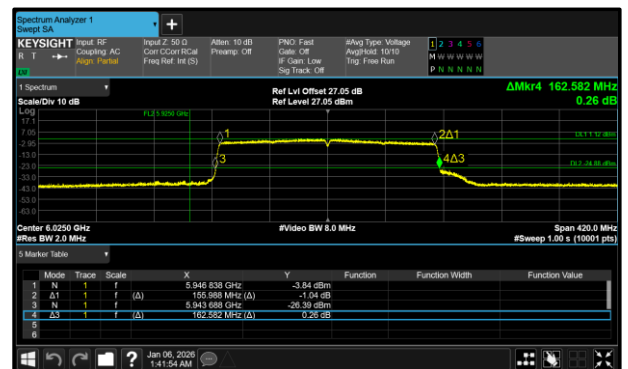


Figure 38 - 802.11ax HE160 SU LPI Maximum 99% OBW

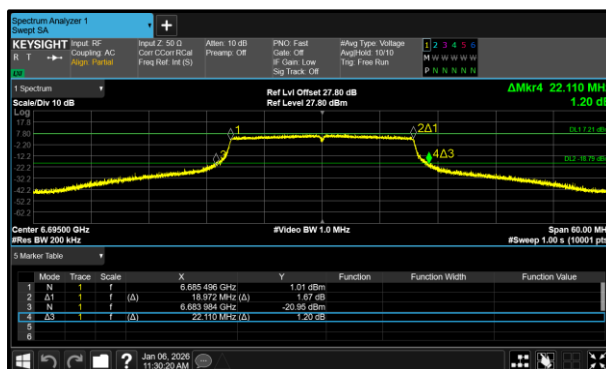


Figure 39 - 802.11ax HE20 SU SP Minimum 99% OBW

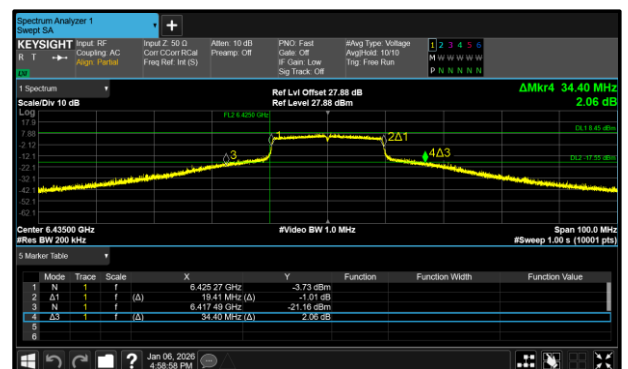


Figure 40 - 802.11ax HE20 SU SP Maximum 99% OBW

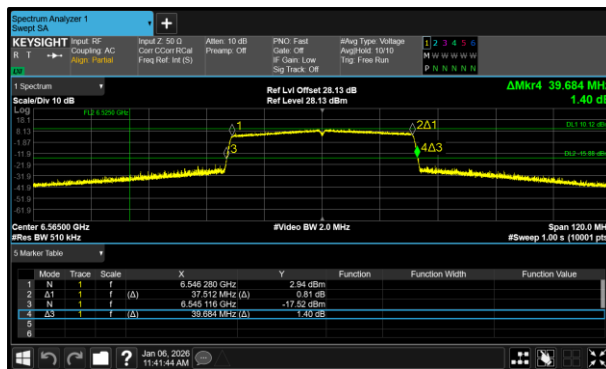


Figure 41 - 802.11ax HE40 SU SP Minimum 99% OBW

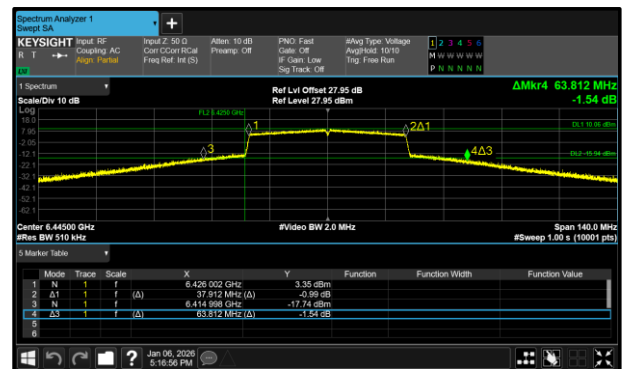


Figure 42 - 802.11ax HE40 SU SP Maximum 99% OBW

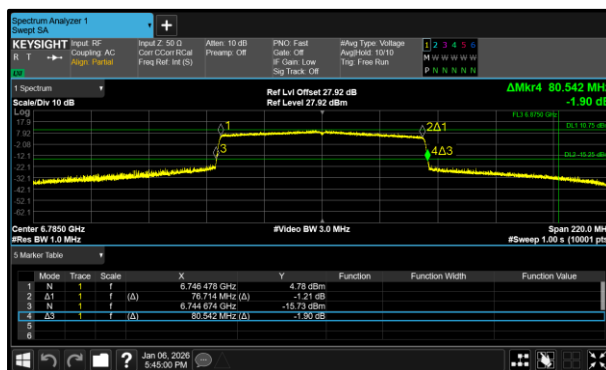


Figure 43 - 802.11ax HE80 SU SP Minimum 99% OBW

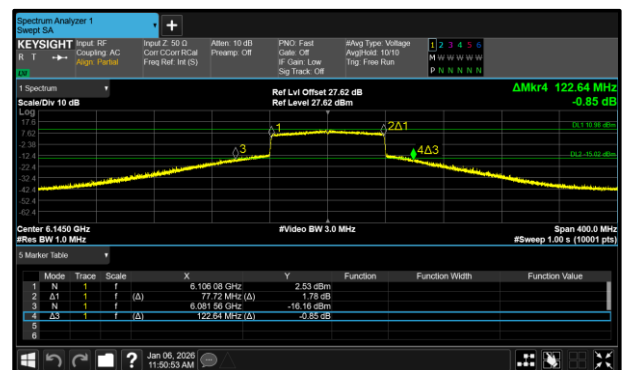


Figure 44 - 802.11ax HE80 SU SP Maximum 99% OBW

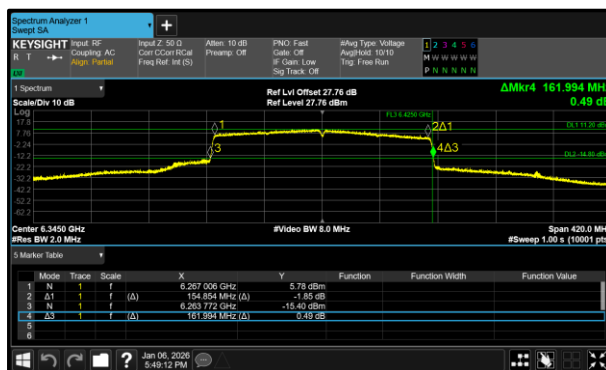


Figure 45 - 802.11ax HE160 SU SP Minimum 99% OBW

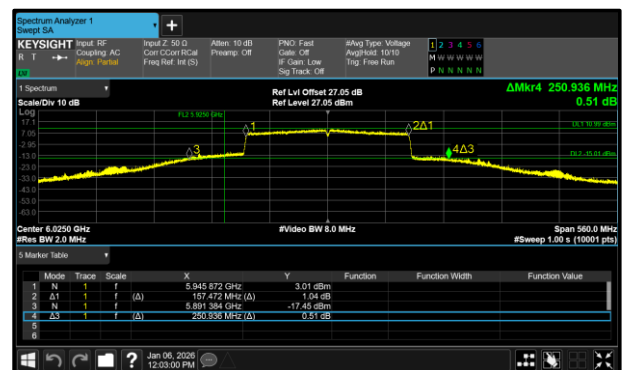


Figure 46 - 802.11ax HE160 SU SP Maximum 99% OBW

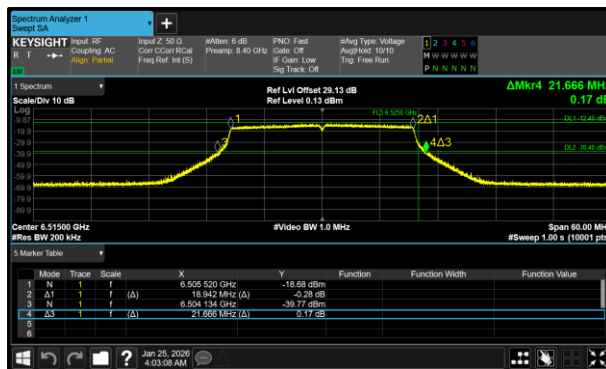


Figure 47 - 802.11ax HE20 SU VLP Minimum 99% OBW

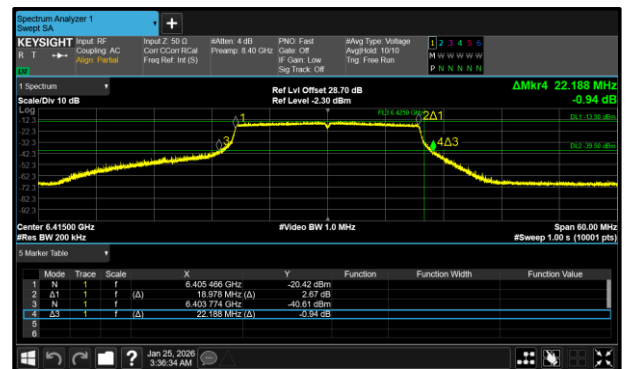


Figure 48 - 802.11ax HE20 SU VLP Maximum 99% OBW

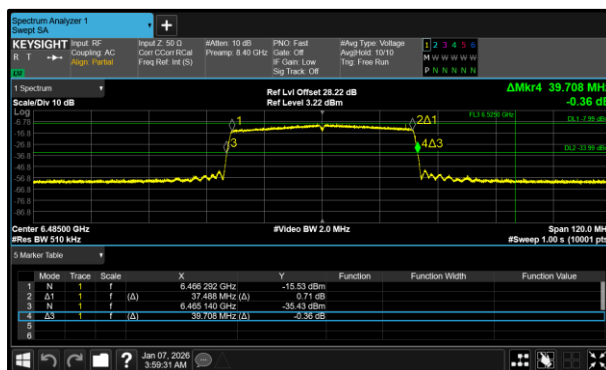


Figure 49 - 802.11ax HE40 SU VLP Minimum 99% OBW

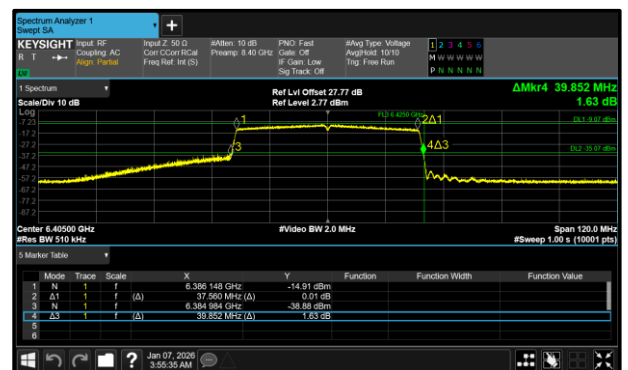


Figure 50 - 802.11ax HE40 SU VLP Maximum 99% OBW

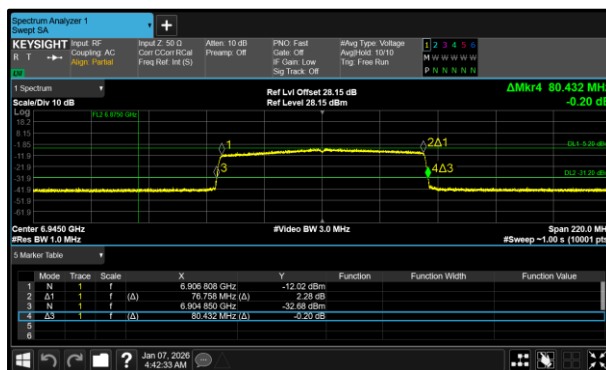


Figure 51 - 802.11ax HE80 SU VLP Minimum 99% OBW

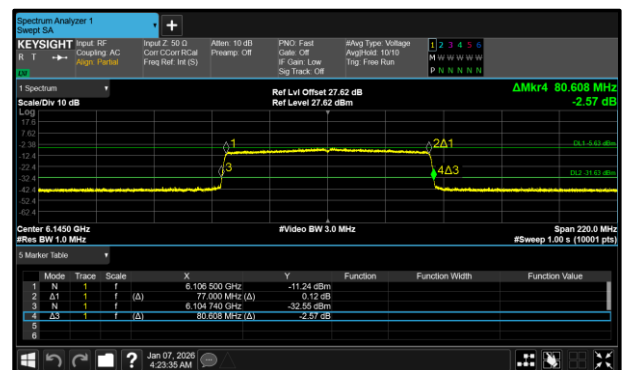


Figure 52 - 802.11ax HE80 SU VLP Maximum 99% OBW

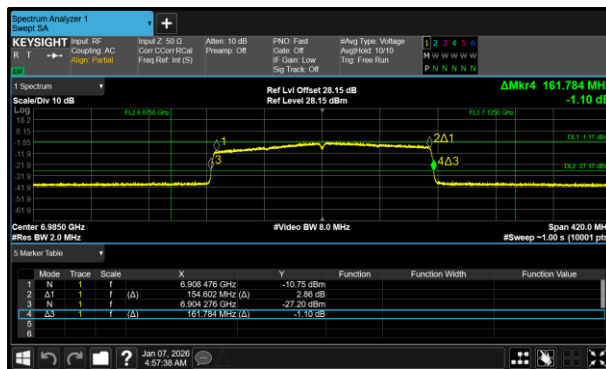


Figure 53 - 802.11ax HE160 SU VLP Minimum 99% OBW

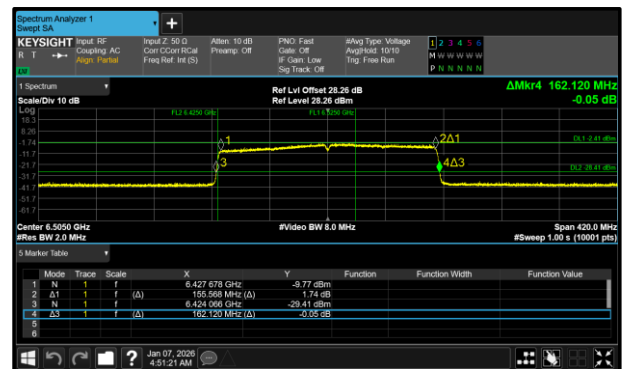


Figure 54 - 802.11ax HE160 SU VLP Maximum 99% OBW

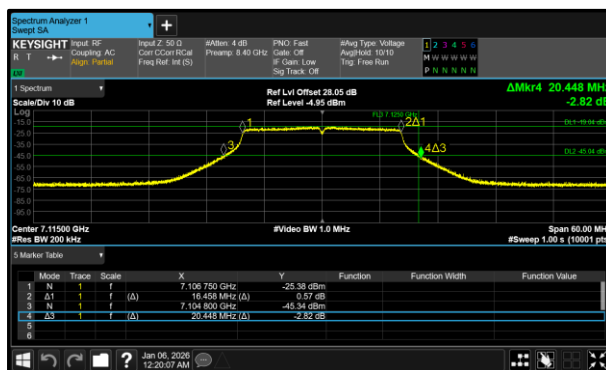


Figure 55 - 802.11a20 LPI Minimum 99% OBW

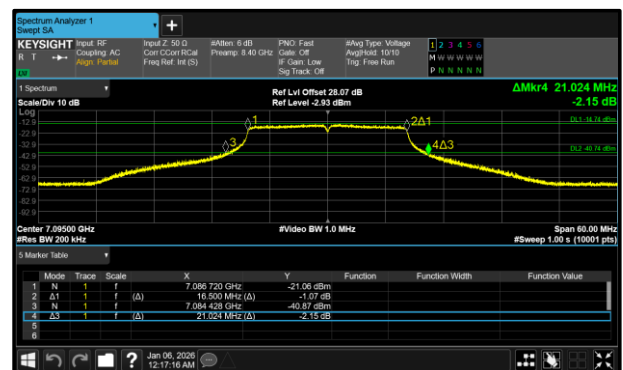


Figure 56 - 802.11a20 LPI Maximum 99% OBW

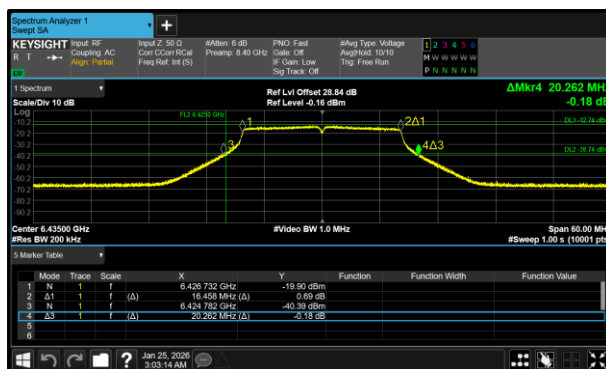


Figure 57 - 802.11a20 VLP Minimum 99% OBW

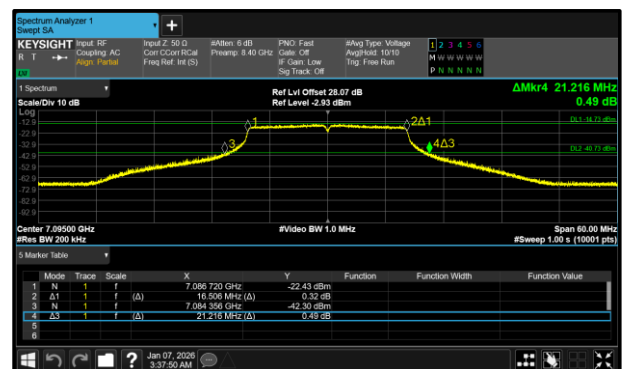


Figure 58 - 802.11a20 VLP Maximum 99% OBW

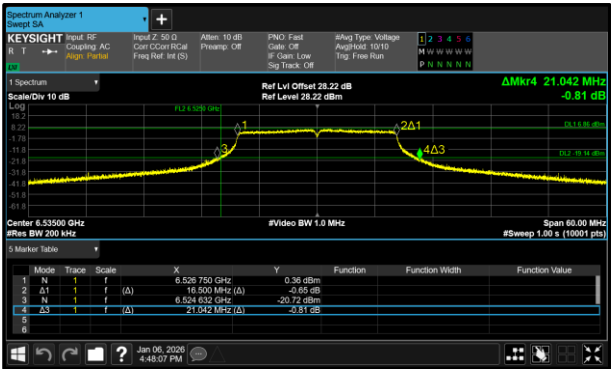


Figure 59 - 802.11a20 SP Minimum 99% OBW

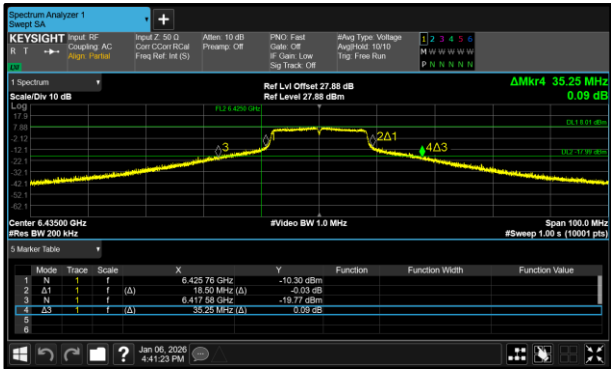


Figure 60 - 802.11a20 SP Maximum 99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	20.592	-	-	320.0
6175	20.472	-	-	-	320.0
6415	-	21.000	-	-	320.0
6435	-	20.388	-	-	320.0
6475	-	20.778	-	-	320.0
6515	-	20.274	-	-	320.0
6535	-	20.586	-	-	320.0
6695	-	20.736	-	-	320.0
6855	-	20.406	-	-	320.0
6875	-	20.346	-	-	320.0
6895	-	20.640	-	-	320.0
6995	-	20.472	-	-	320.0
7095	-	21.024	-	-	320.0
7115	-	20.448	-	-	320.0

Table 9 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	16.488	-	-	320.0
6175	16.482	-	-	-	320.0
6415	-	16.494	-	-	320.0
6435	-	16.488	-	-	320.0
6475	-	16.488	-	-	320.0
6515	-	16.482	-	-	320.0
6535	-	16.470	-	-	320.0
6695	-	16.470	-	-	320.0
6855	-	16.470	-	-	320.0
6875	-	16.470	-	-	320.0
6895	-	16.476	-	-	320.0
6995	-	16.470	-	-	320.0
7095	-	16.500	-	-	320.0
7115	-	16.458	-	-	320.0

Table 10 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	22.182	-	-	320.0
6175	21.936	-	-	-	320.0
6415	-	21.984	-	-	320.0
6435	-	22.116	-	-	320.0
6475	-	21.768	-	-	320.0
6515	-	21.594	-	-	320.0
6535	-	21.708	-	-	320.0
6695	-	21.708	-	-	320.0
6855	-	21.966	-	-	320.0
6875	-	21.756	-	-	320.0
6895	-	21.810	-	-	320.0
6995	-	21.906	-	-	320.0
7095	-	22.512	-	-	320.0

Table 11 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	18.966	-	-	320.0
6175	18.960	-	-	-	320.0
6415	-	18.972	-	-	320.0
6435	-	18.960	-	-	320.0
6475	-	18.972	-	-	320.0
6515	-	18.948	-	-	320.0
6535	-	18.960	-	-	320.0
6695	-	18.960	-	-	320.0
6855	-	18.948	-	-	320.0
6875	-	18.954	-	-	320.0
6895	-	18.966	-	-	320.0
6995	-	18.966	-	-	320.0
7095	-	18.990	-	-	320.0

Table 12 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	39.768	-	-	320.0
6165	39.720	-	-	-	320.0
6405	-	39.768	-	-	320.0
6445	-	39.624	-	-	320.0
6485	-	39.720	-	-	320.0
6525	-	39.756	-	-	320.0
6565	-	39.756	-	-	320.0
6685	-	39.720	-	-	320.0
6845	-	39.612	-	-	320.0
6885	-	39.696	-	-	320.0
6925	-	39.708	-	-	320.0
7005	-	39.684	-	-	320.0
7085	-	39.840	-	-	320.0

Table 13 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	37.548	-	-	320.0
6165	37.524	-	-	-	320.0
6405	-	37.560	-	-	320.0
6445	-	37.536	-	-	320.0
6485	-	37.512	-	-	320.0
6525	-	37.500	-	-	320.0
6565	-	37.512	-	-	320.0
6685	-	37.512	-	-	320.0
6845	-	37.524	-	-	320.0
6885	-	37.560	-	-	320.0
6925	-	37.524	-	-	320.0
7005	-	37.512	-	-	320.0
7085	-	37.572	-	-	320.0

Table 14 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	80.366	-	-	320.0
6145	80.498	-	-	-	320.0
6385	-	81.576	-	-	320.0
6465	-	80.564	-	-	320.0
6545	-	80.388	-	-	320.0
6625	-	80.410	-	-	320.0
6705	-	80.454	-	-	320.0
6785	-	80.454	-	-	320.0
6865	-	80.476	-	-	320.0
6945	-	80.410	-	-	320.0
7025	-	80.542	-	-	320.0

Table 15 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	76.802	-	-	320.0
6145	77.000	-	-	-	320.0
6385	-	76.890	-	-	320.0
6465	-	76.956	-	-	320.0
6545	-	76.736	-	-	320.0
6625	-	76.736	-	-	320.0
6705	-	76.714	-	-	320.0
6785	-	76.780	-	-	320.0
6865	-	76.890	-	-	320.0
6945	-	76.758	-	-	320.0
7025	-	76.846	-	-	320.0

Table 16 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	162.582	-	-	320.0
6185	162.120	-	-	-	320.0
6345	-	162.036	-	-	320.0
6505	-	162.204	-	-	320.0
6665	-	161.868	-	-	320.0
6825	-	161.910	-	-	320.0
6985	-	161.910	-	-	320.0

Table 17 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	155.988	-	-	320.0
6185	155.358	-	-	-	320.0
6345	-	154.938	-	-	320.0
6505	-	155.526	-	-	320.0
6665	-	154.854	-	-	320.0
6825	-	154.770	-	-	320.0
6985	-	154.518	-	-	320.0

Table 18 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	21.552	-	-	320.0
6175	33.448	-	-	-	320.0
6415	-	31.120	-	-	320.0
6435	-	35.250	-	-	320.0
6475	-	28.866	-	-	320.0
6515	-	21.384	-	-	320.0
6535	-	21.288	-	-	320.0
6695	-	21.072	-	-	320.0
6855	-	23.916	-	-	320.0

Table 19 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	16.536	-	-	320.0
6175	17.096	-	-	-	320.0
6415	-	16.976	-	-	320.0
6435	-	18.500	-	-	320.0
6475	-	16.806	-	-	320.0
6515	-	16.524	-	-	320.0
6535	-	16.500	-	-	320.0
6695	-	16.500	-	-	320.0
6855	-	16.620	-	-	320.0

Table 20 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	22.386	-	-	320.0
6175	31.328	-	-	-	320.0
6415	-	32.648	-	-	320.0
6435	-	34.400	-	-	320.0
6475	-	24.852	-	-	320.0
6515	-	22.104	-	-	320.0
6535	-	22.386	-	-	320.0
6695	-	22.110	-	-	320.0
6855	-	23.142	-	-	320.0

Table 21 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	-	18.996	-	-	320.0
6175	19.184	-	-	-	320.0
6415	-	19.168	-	-	320.0
6435	-	19.410	-	-	320.0
6475	-	19.116	-	-	320.0
6515	-	18.984	-	-	320.0
6535	-	18.990	-	-	320.0
6695	-	18.972	-	-	320.0
6855	-	19.038	-	-	320.0

Table 22 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	39.816	-	-	320.0
6165	55.068	-	-	-	320.0
6405	-	51.684	-	-	320.0
6445	-	63.812	-	-	320.0
6485	-	40.752	-	-	320.0
6525	-	39.780	-	-	320.0
6565	-	39.684	-	-	320.0
6685	-	39.768	-	-	320.0
6845	-	39.792	-	-	320.0

Table 23 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	-	37.560	-	-	320.0
6165	37.788	-	-	-	320.0
6405	-	37.752	-	-	320.0
6445	-	37.912	-	-	320.0
6485	-	37.680	-	-	320.0
6525	-	37.536	-	-	320.0
6565	-	37.512	-	-	320.0
6685	-	37.572	-	-	320.0
6845	-	37.620	-	-	320.0

Table 24 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	80.586	-	-	320.0
6145	122.640	-	-	-	320.0
6385	-	81.752	-	-	320.0
6465	-	100.256	-	-	320.0
6625	-	80.564	-	-	320.0
6705	-	80.498	-	-	320.0
6785	-	80.432	-	-	320.0

Table 25 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	-	76.956	-	-	320.0
6145	77.720	-	-	-	320.0
6385	-	76.890	-	-	320.0
6465	-	77.376	-	-	320.0
6545	-	76.736	-	-	320.0
6625	-	76.780	-	-	320.0
6705	-	76.802	-	-	320.0
6785	-	76.714	-	-	320.0

Table 26 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	250.936	-	-	320.0
6185	162.624	-	-	-	320.0
6345	-	161.910	-	-	320.0
6505	-	162.246	-	-	320.0
6665	-	161.910	-	-	320.0

Table 27 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	-	157.472	-	-	320.0
6185	155.820	-	-	-	320.0
6345	-	154.854	-	-	320.0
6505	-	155.778	-	-	320.0
6665	-	155.064	-	-	320.0

Table 28 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	20.394	-	-	-	320.0
6255	20.340	-	-	-	320.0
6415	-	20.940	-	-	320.0
6435	-	20.262	-	-	320.0
6475	-	20.454	-	-	320.0
6515	-	20.514	-	-	320.0
6535	-	20.484	-	-	320.0
6695	-	20.544	-	-	320.0
6855	-	20.574	-	-	320.0
6875	-	20.568	-	-	320.0
6895	-	20.778	-	-	320.0
6995	-	20.376	-	-	320.0
7095	-	21.216	-	-	320.0

Table 29 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	16.470	-	-	-	320.0
6255	16.470	-	-	-	320.0
6415	-	16.488	-	-	320.0
6435	-	16.458	-	-	320.0
6475	-	16.482	-	-	320.0
6515	-	16.464	-	-	320.0
6535	-	16.476	-	-	320.0
6695	-	16.464	-	-	320.0
6855	-	16.470	-	-	320.0
6875	-	16.470	-	-	320.0
6895	-	16.464	-	-	320.0
6995	-	16.464	-	-	320.0
7095	-	16.506	-	-	320.0

Table 30 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	21.936	-	-	-	320.0
6255	21.876	-	-	-	320.0
6415	-	22.188	-	-	320.0
6435	-	21.936	-	-	320.0
6475	-	21.696	-	-	320.0
6515	-	21.666	-	-	320.0
6535	-	22.056	-	-	320.0
6695	-	21.870	-	-	320.0
6855	-	21.750	-	-	320.0
6875	-	21.858	-	-	320.0
6895	-	21.996	-	-	320.0
6995	-	21.636	-	-	320.0
7095	-	22.218	-	-	320.0

Table 31 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	18.948	-	-	-	320.0
6255	18.966	-	-	-	320.0
6415	-	18.978	-	-	320.0
6435	-	18.948	-	-	320.0
6475	-	18.960	-	-	320.0
6515	-	18.942	-	-	320.0
6535	-	18.948	-	-	320.0
6695	-	18.948	-	-	320.0
6855	-	18.948	-	-	320.0
6875	-	18.960	-	-	320.0
6895	-	18.960	-	-	320.0
6995	-	18.948	-	-	320.0
7095	-	18.972	-	-	320.0

Table 32 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	39.756	-	-	-	320.0
6285	-	39.708	-	-	320.0
6405	-	39.852	-	-	320.0
6445	-	39.756	-	-	320.0
6485	-	39.708	-	-	320.0
6525	-	39.780	-	-	320.0
6565	-	39.708	-	-	320.0
6685	-	39.660	-	-	320.0
6845	-	39.600	-	-	320.0
6885	-	39.708	-	-	320.0
6925	-	39.732	-	-	320.0
7005	-	39.720	-	-	320.0
7085	-	39.756	-	-	320.0

Table 33 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	37.560	-	-	-	320.0
6285	-	37.512	-	-	320.0
6405	-	37.560	-	-	320.0
6445	-	37.512	-	-	320.0
6485	-	37.488	-	-	320.0
6525	-	37.500	-	-	320.0
6565	-	37.488	-	-	320.0
6685	-	37.512	-	-	320.0
6845	-	37.488	-	-	320.0
6885	-	37.536	-	-	320.0
6925	-	37.500	-	-	320.0
7005	-	37.500	-	-	320.0
7085	-	37.560	-	-	320.0

Table 34 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	80.608	-	-	-	320.0
6385	-	81.488	-	-	320.0
6465	-	80.608	-	-	320.0
6545	-	80.410	-	-	320.0
6625	-	80.388	-	-	320.0
6705	-	80.410	-	-	320.0
6785	-	80.432	-	-	320.0
6865	-	80.586	-	-	320.0
6945	-	80.432	-	-	320.0
7025	-	80.586	-	-	320.0

Table 35 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	77.000	-	-	-	320.0
6385	-	76.934	-	-	320.0
6465	-	76.956	-	-	320.0
6545	-	76.802	-	-	320.0
6625	-	76.802	-	-	320.0
6705	-	76.846	-	-	320.0
6785	-	76.780	-	-	320.0
6865	-	77.000	-	-	320.0
6945	-	76.758	-	-	320.0
7025	-	76.868	-	-	320.0

Table 36 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0) B (Core 1)	Active Chain(s):	0 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	162.204	-	-	-	320.0
6345	-	161.868	-	-	320.0
6505	-	162.120	-	-	320.0
6665	-	161.868	-	-	320.0
6825	-	162.078	-	-	320.0
6985	-	161.784	-	-	320.0

Table 37 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	155.484	-	-	-	320.0
6345	-	154.980	-	-	320.0
6505	-	155.568	-	-	320.0
6665	-	155.022	-	-	320.0
6825	-	155.064	-	-	320.0
6985	-	154.602	-	-	320.0

Table 38 - 99% Bandwidth Results



Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	21.516	22.578
802.11ax HE40 SU LPI	39.636	40.368
802.11ax HE80 SU LPI	80.278	80.652
802.11ax HE160 SU LPI	161.700	162.456
802.11ax HE20 SU SP	21.576	23.016
802.11ax HE40 SU SP	39.648	54.720
802.11ax HE80 SU SP	80.300	128.680
802.11ax HE160 SU SP	161.826	220.836
802.11ax HE80 SU VLP	80.322	80.542
802.11ax HE160 SU VLP	161.658	162.120

Table 39 - 26 dB Bandwidth Summary Results - MIMO CDD

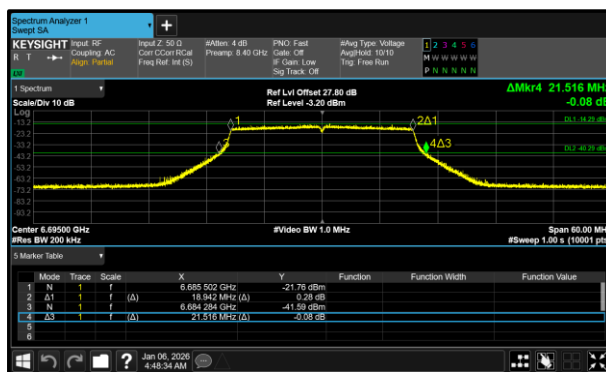


Figure 61 - 802.11ax HE20 SU LPI Minimum 26 dB EBW

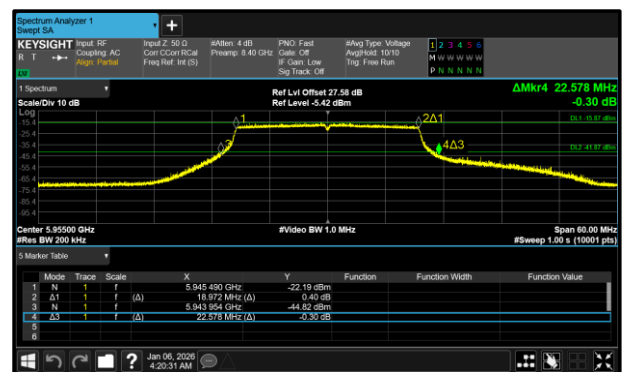


Figure 62 - 802.11ax HE20 SU LPI Maximum 26 dB EBW

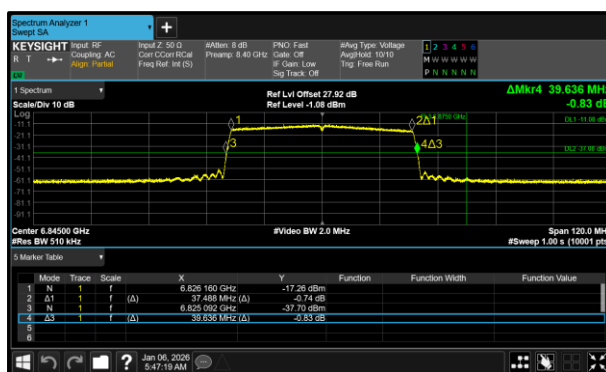


Figure 63 - 802.11ax HE40 SU LPI Minimum 26 dB EBW

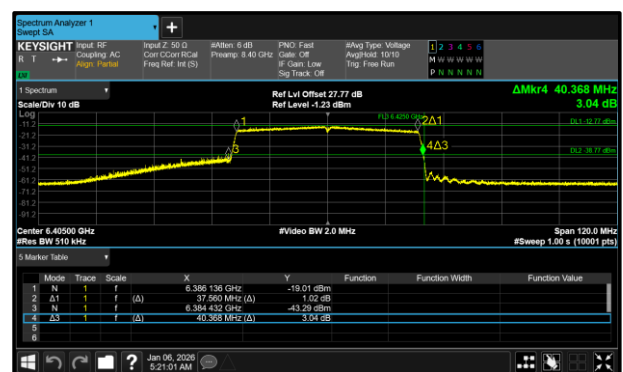


Figure 64 - 802.11ax HE40 SU LPI Maximum 26 dB EBW

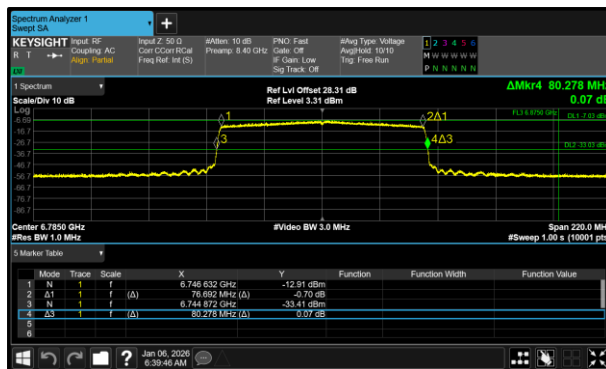


Figure 65 - 802.11ax HE80 SU LPI Minimum 26 dB EBW

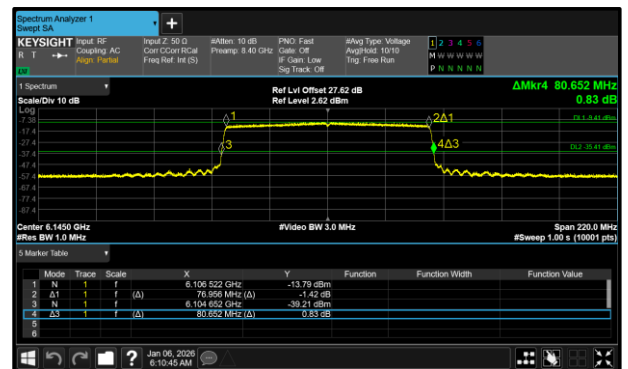


Figure 66 - 802.11ax HE80 SU LPI Maximum 26 dB EBW

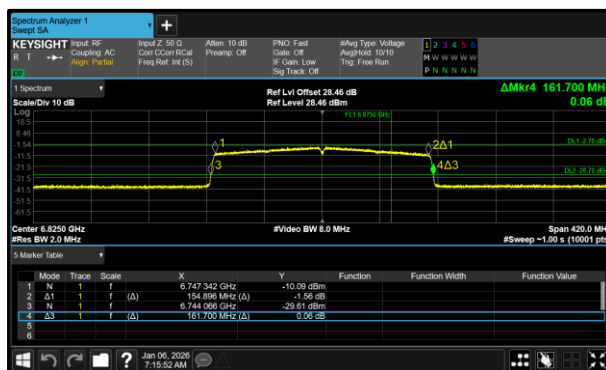


Figure 67 - 802.11ax HE160 SU LPI Minimum 26 dB EBW

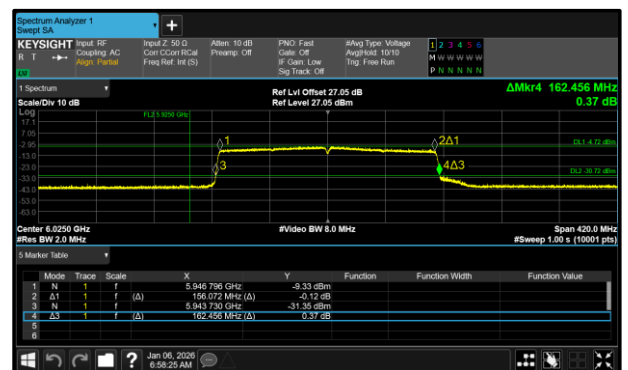


Figure 68 - 802.11ax HE160 SU LPI Maximum 26 dB EBW

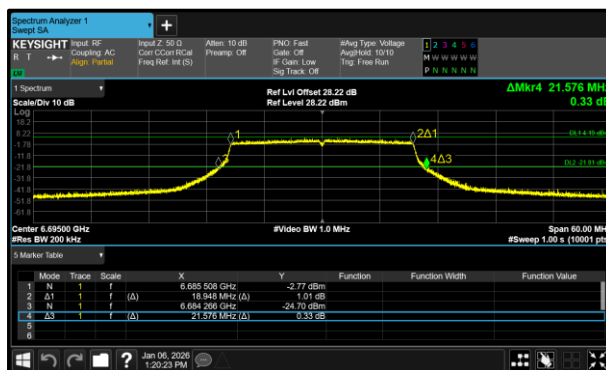


Figure 69 - 802.11ax HE20 SU SP Minimum 26 dB EBW

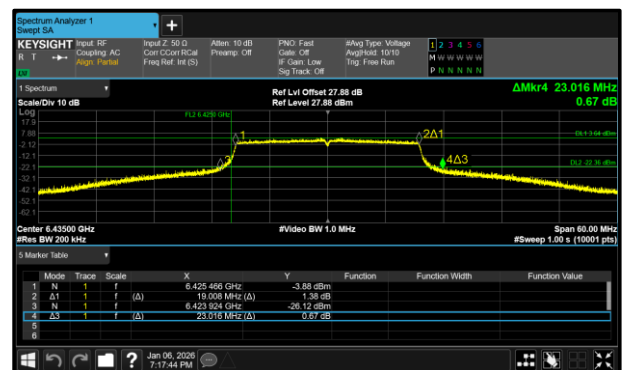


Figure 70 - 802.11ax HE20 SU SP Maximum 26 dB EBW

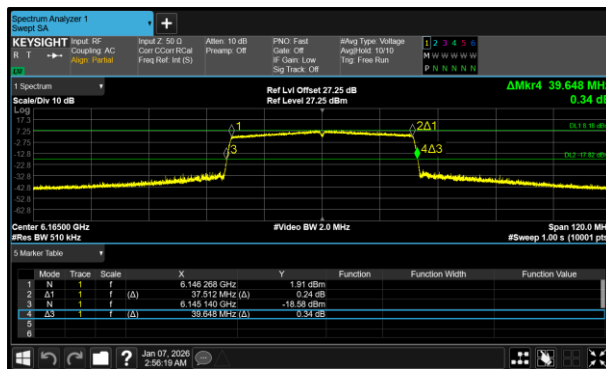


Figure 71 - 802.11ax HE40 SU SP Minimum 26 dB EBW

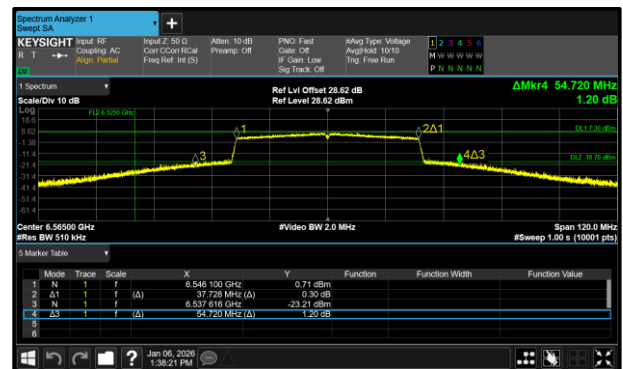


Figure 72 - 802.11ax HE40 SU SP Maximum 26 dB EBW

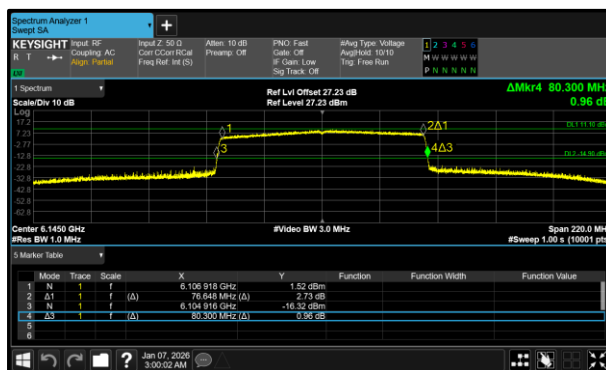


Figure 73 - 802.11ax HE80 SU SP Minimum 26 dB EBW

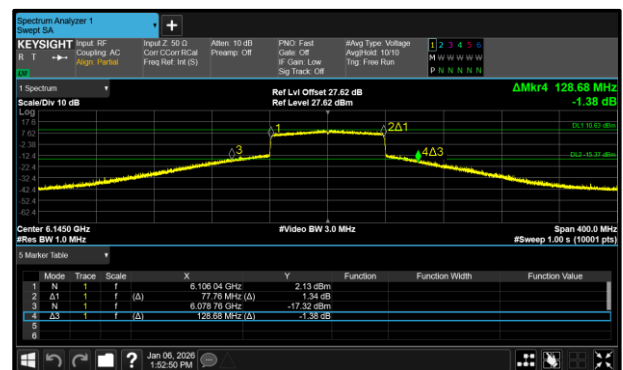


Figure 74 - 802.11ax HE80 SU SP Maximum 26 dB EBW

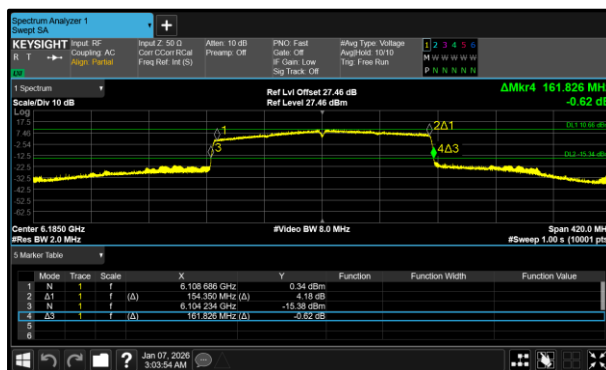


Figure 75 - 802.11ax HE160 SU SP Minimum 26 dB EBW

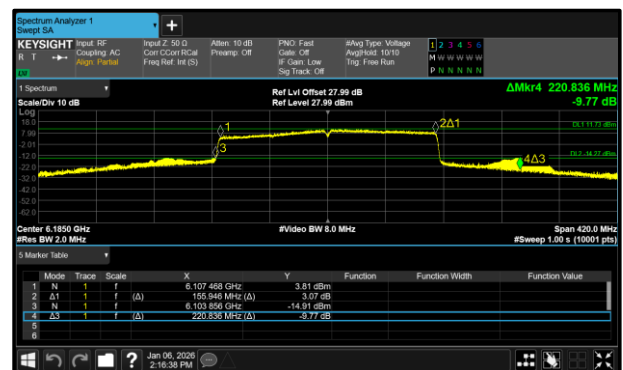


Figure 76 - 802.11ax HE160 SU SP Maximum 26 dB EBW

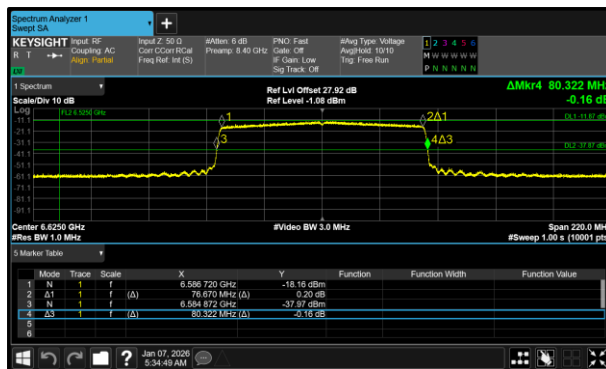


Figure 77 - 802.11ax HE80 SU VLP Minimum 26 dB EBW

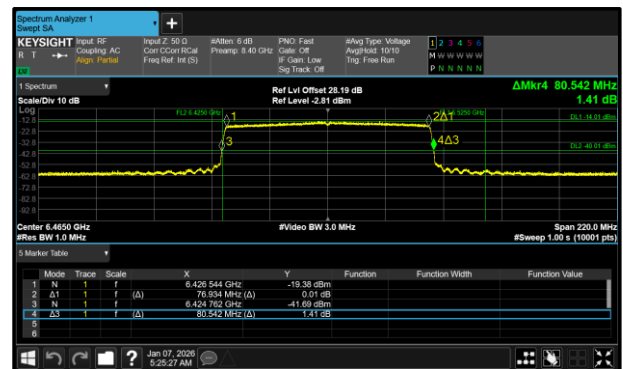


Figure 78 - 802.11ax HE80 SU VLP Maximum 26 dB EBW

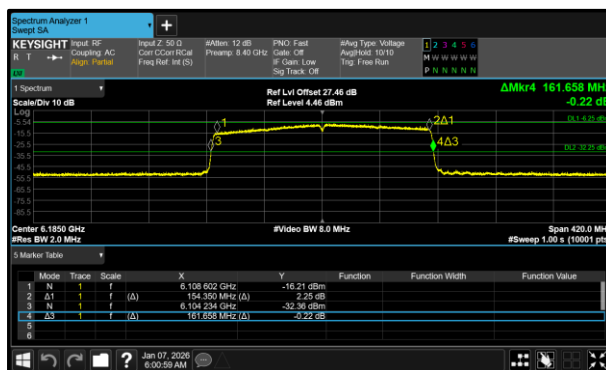


Figure 79 - 802.11ax HE160 SU VLP Minimum 26 dB EBW

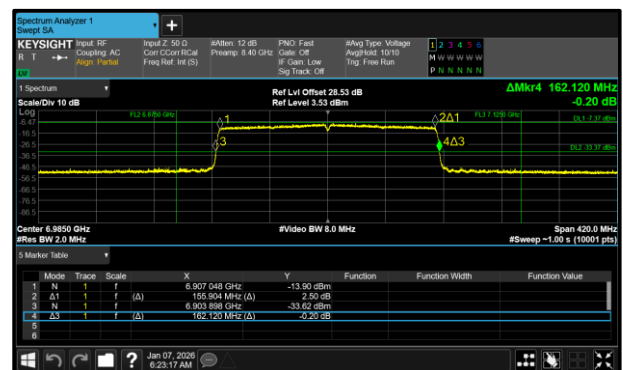


Figure 80 - 802.11ax HE160 SU VLP Maximum 26 dB EBW