



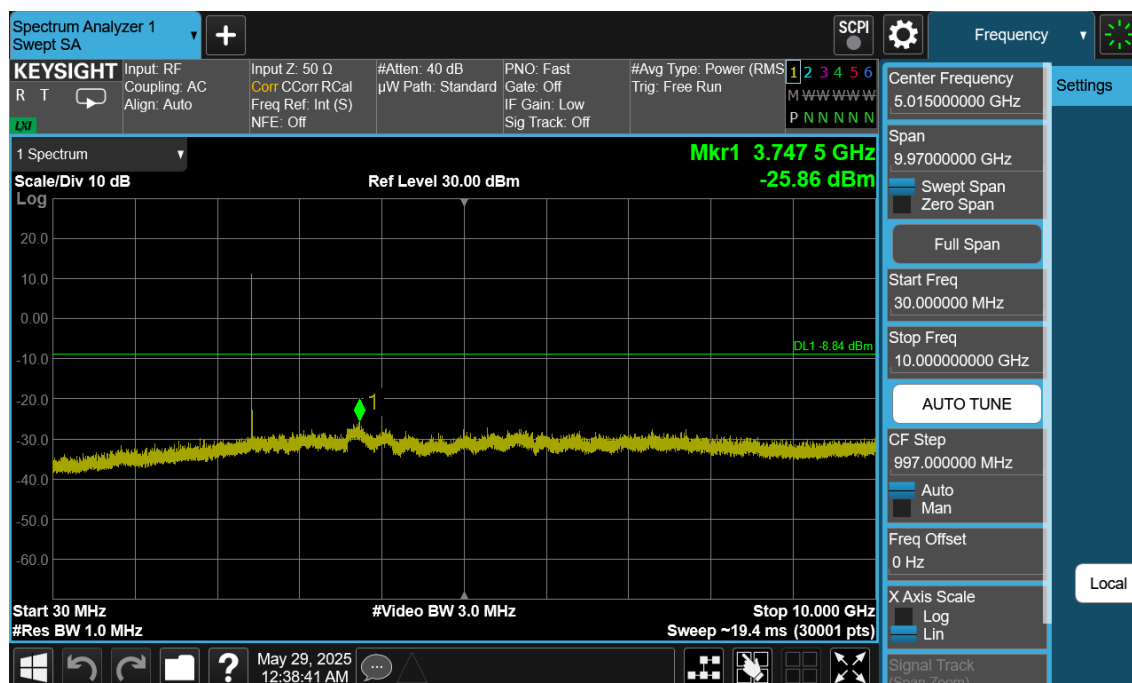

Plot 7-87. Conducted Spurious Plot Ant1 (Bluetooth (LE), 1Mbps, ePA – Ch. 19)

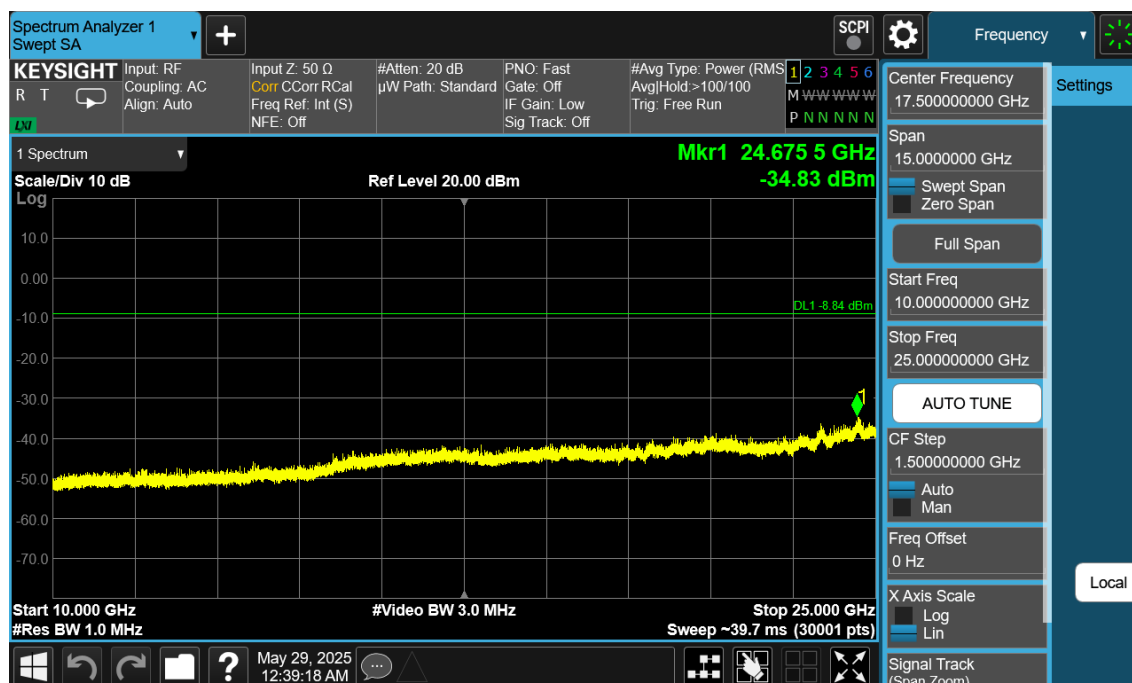


Plot 7-88. Conducted Spurious Plot Ant1 (Bluetooth (LE), 1Mbps, ePA – Ch. 19)


FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 74 of 108

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

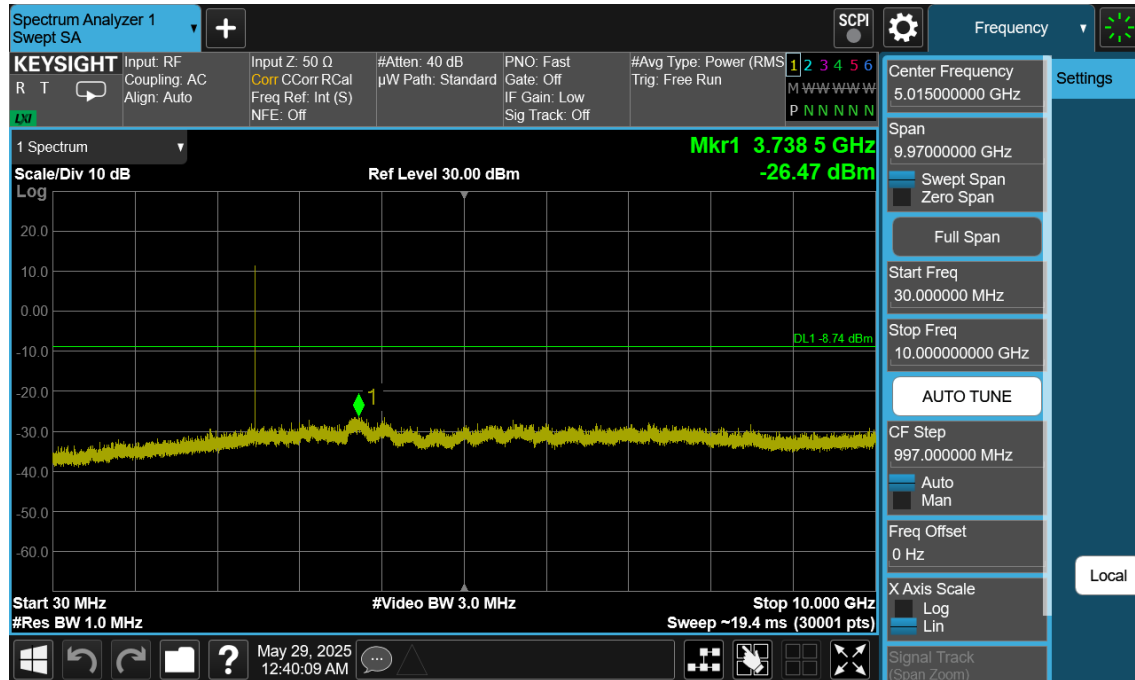

Plot 7-89. Conducted Spurious Plot Ant1 (Bluetooth (LE), 1Mbps, ePA – Ch. 39)

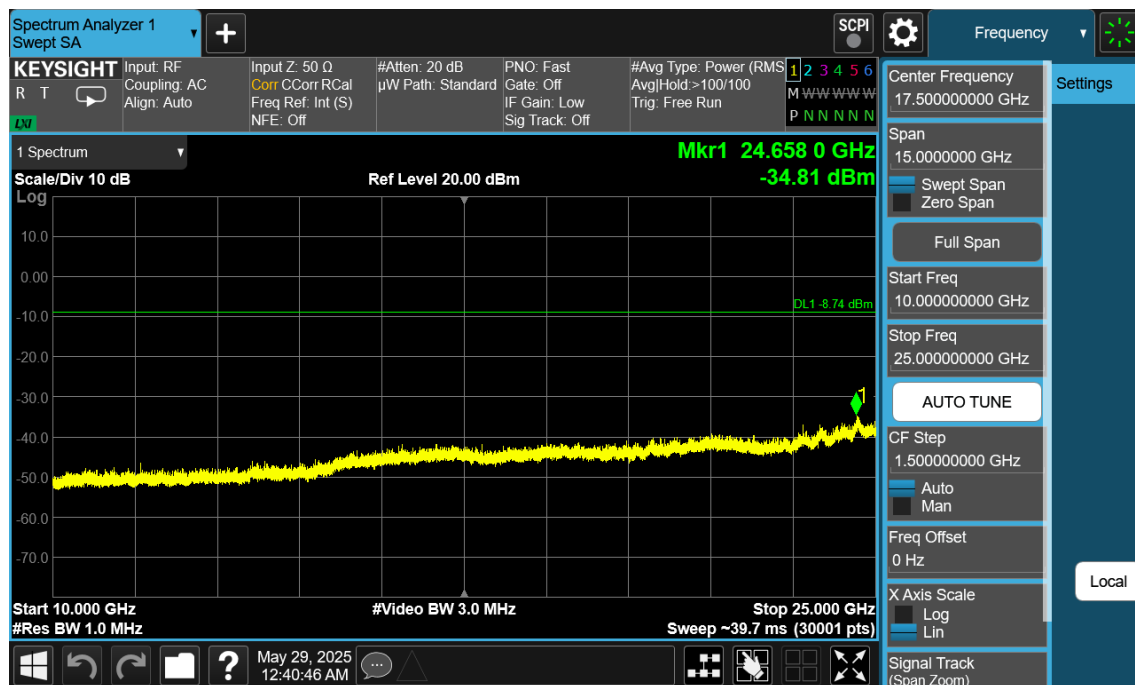



Plot 7-90. Conducted Spurious Plot Ant1 (Bluetooth (LE), 1Mbps, ePA – Ch. 39)

FCC ID: BCGA3416 IC: 579C-A3416	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 75 of 108

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.6.2 Ant2

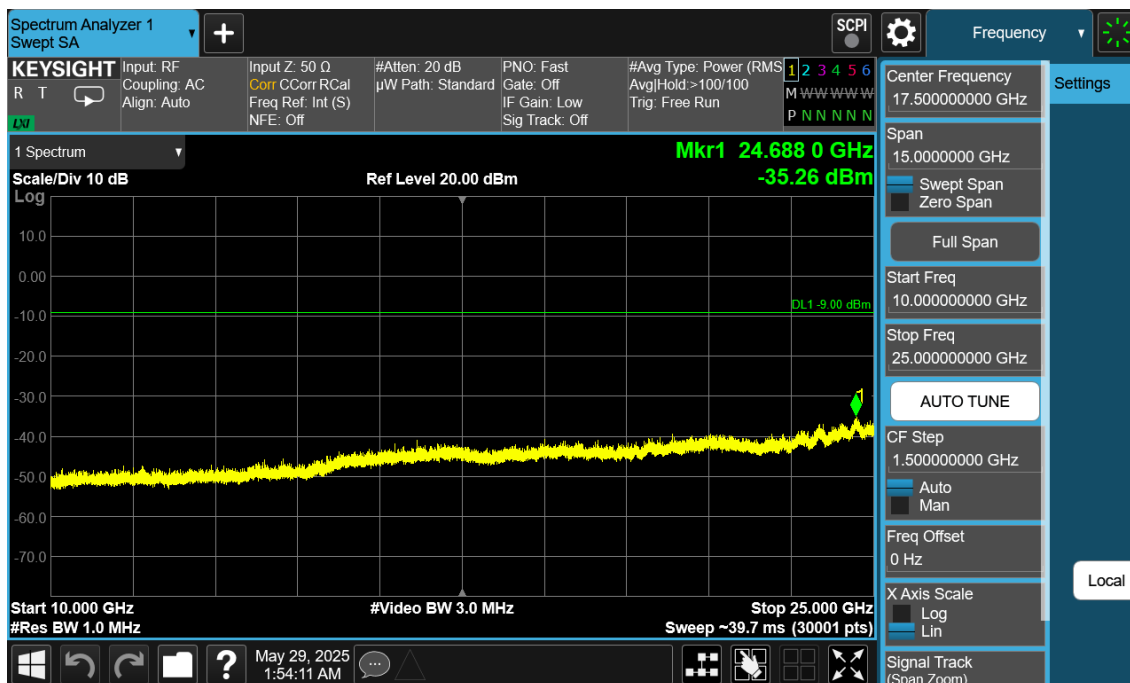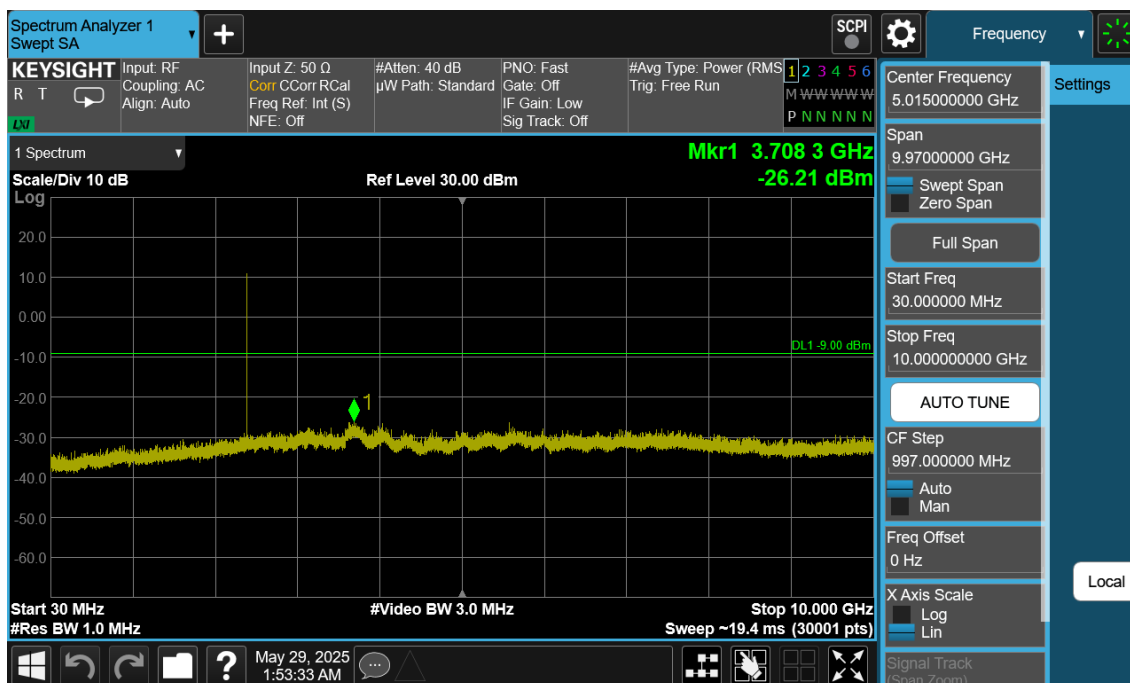


FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 76 of 108

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

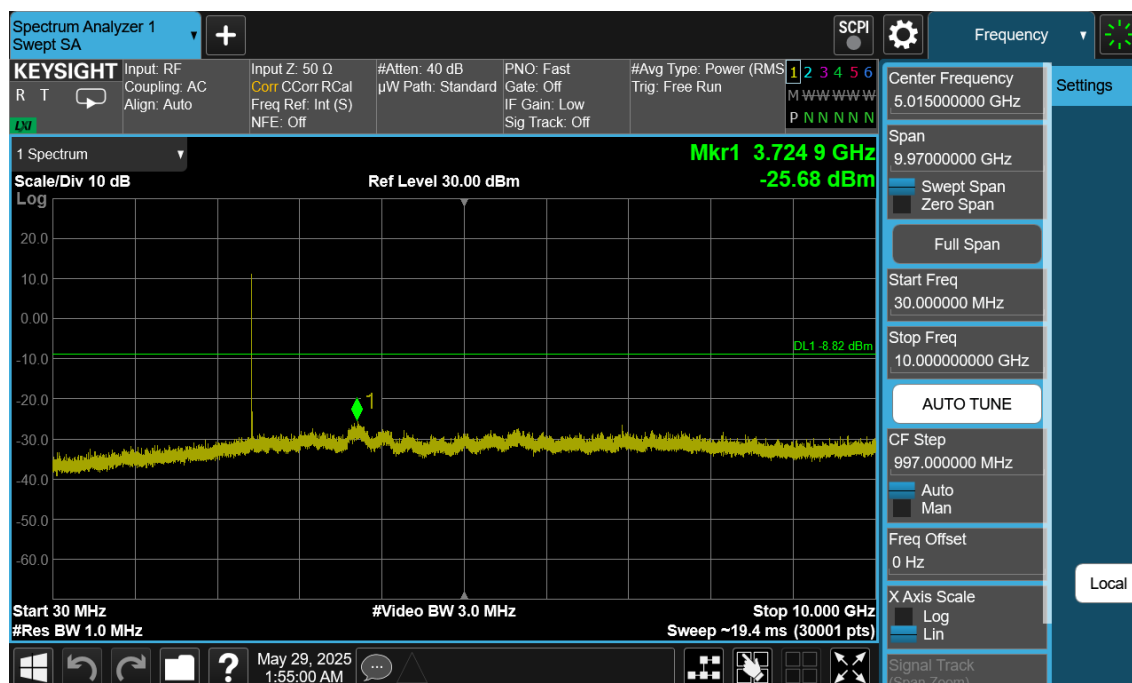

Plot 7-93. Conducted Spurious Plot Ant2 (Bluetooth (LE), 1Mbps, ePA – Ch. 19)

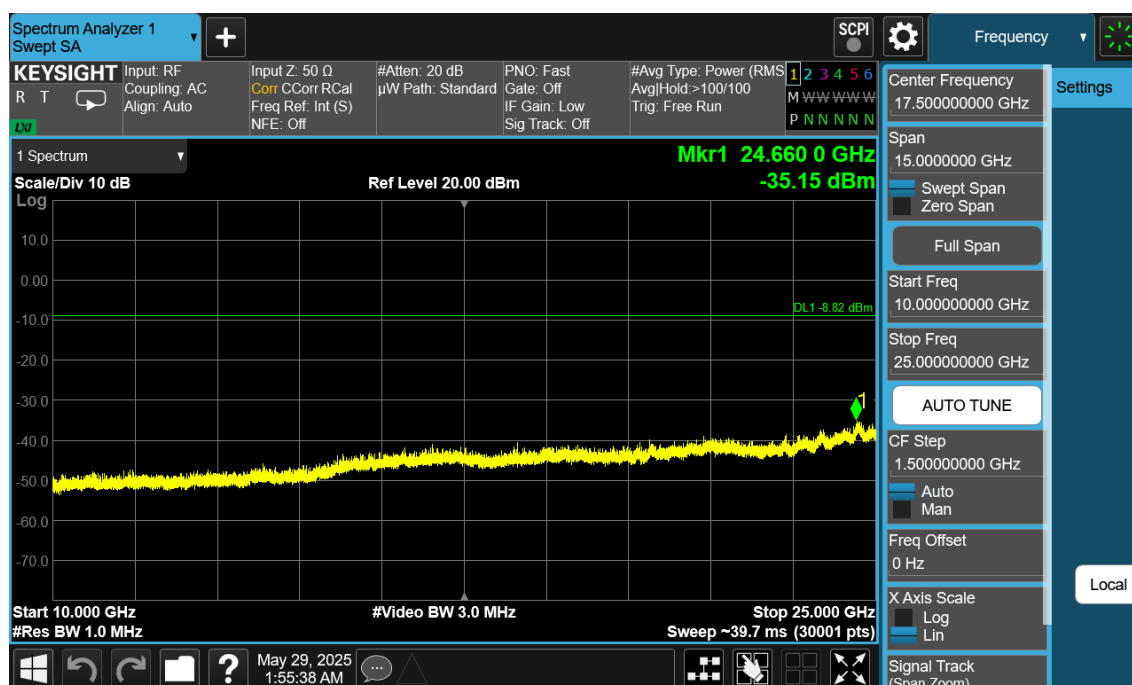


Plot 7-94. Conducted Spurious Plot Ant2 (Bluetooth (LE), 1Mbps, ePA – Ch. 19)


FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 77 of 108

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

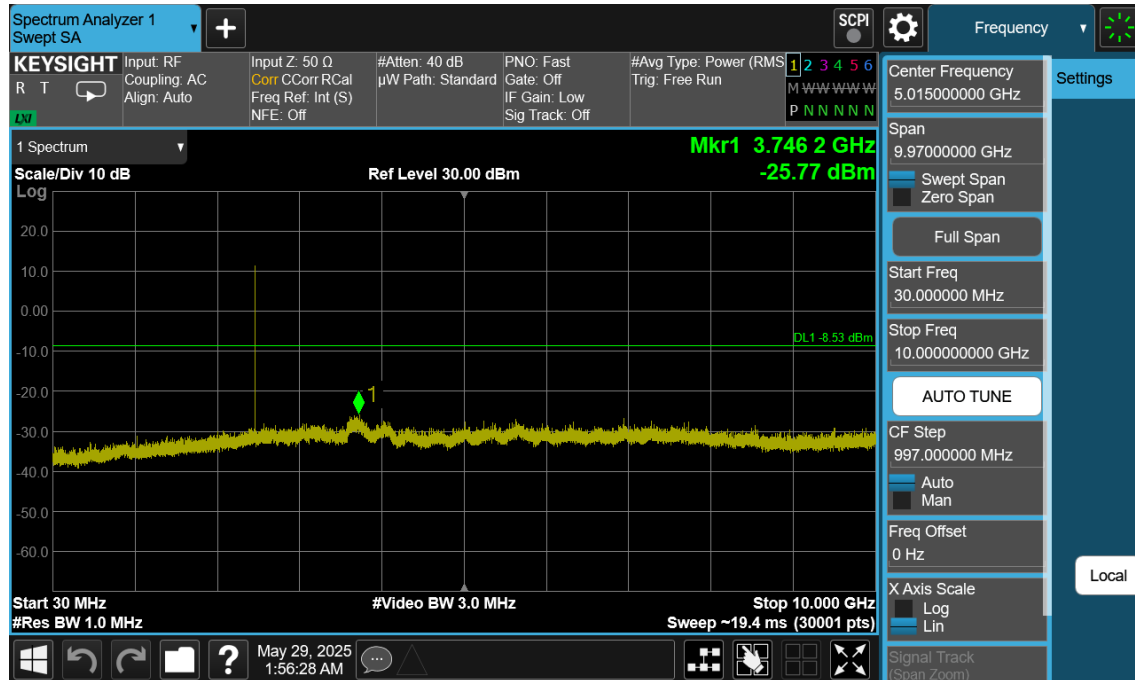



Plot 7-95. Conducted Spurious Plot Ant2 (Bluetooth (LE), 1Mbps, ePA – Ch. 39)

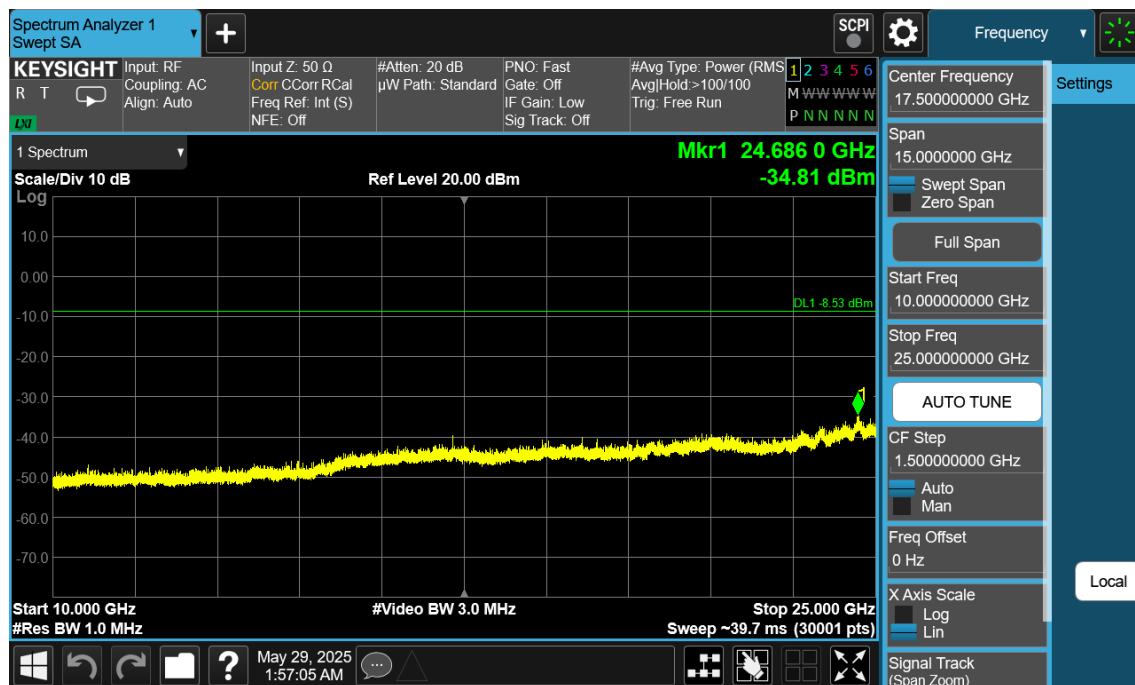

Plot 7-96. Conducted Spurious Plot Ant2 (Bluetooth (LE), 1Mbps, ePA – Ch. 39)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 78 of 108


7.6.3 NB UNII_L

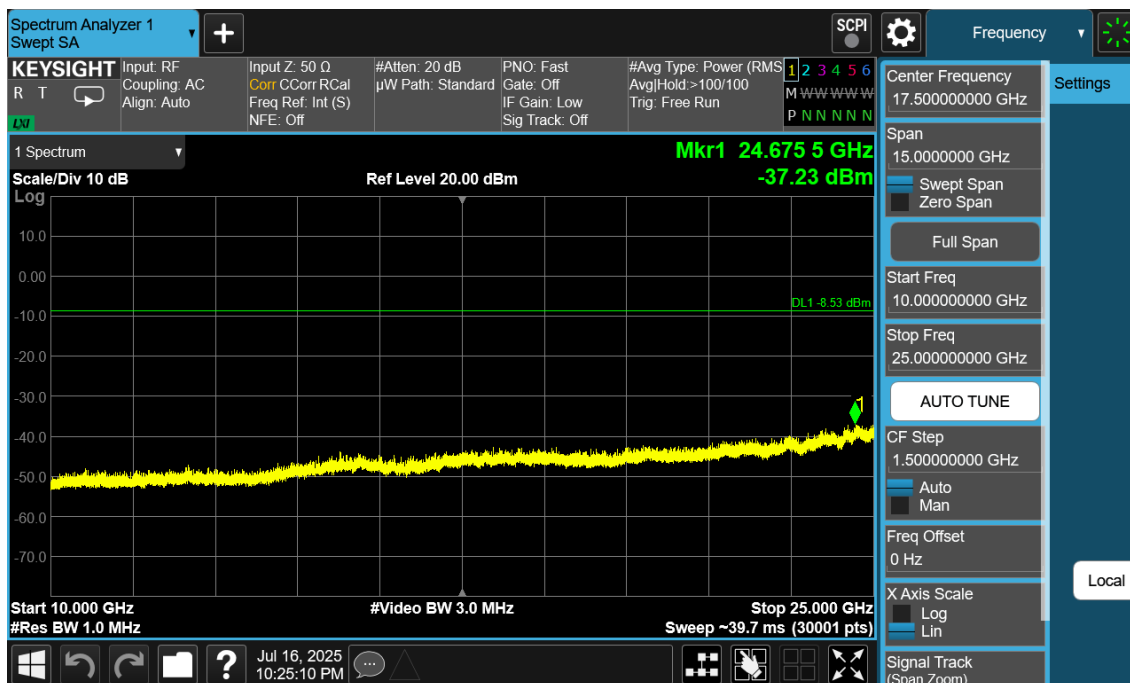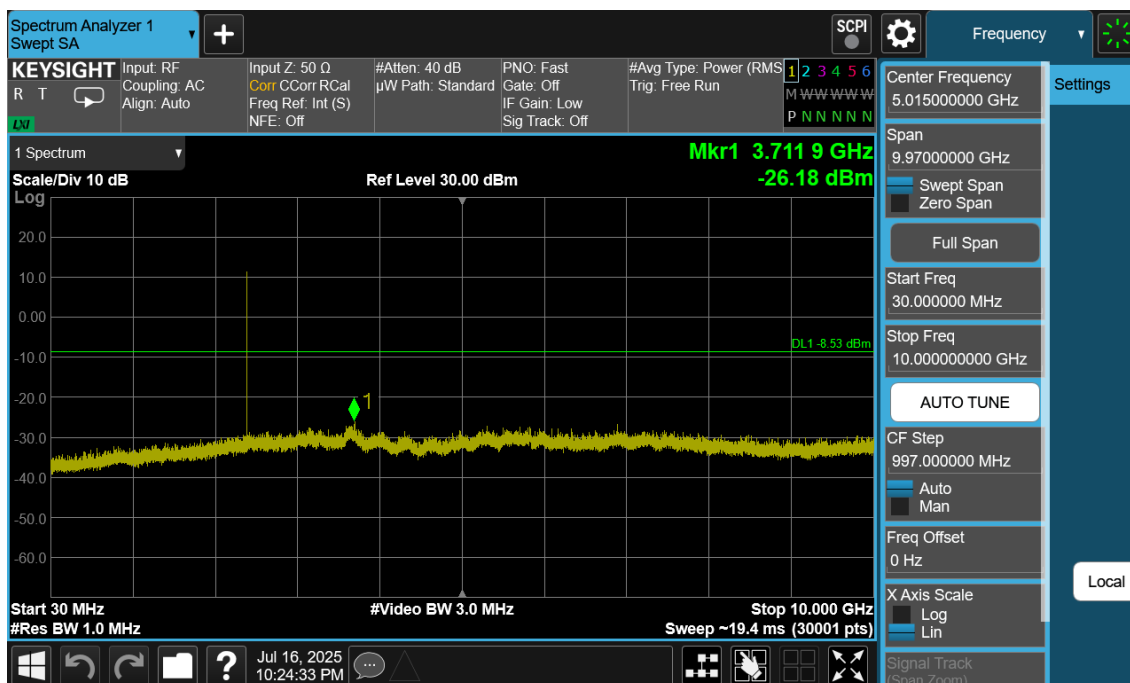


FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 79 of 108

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

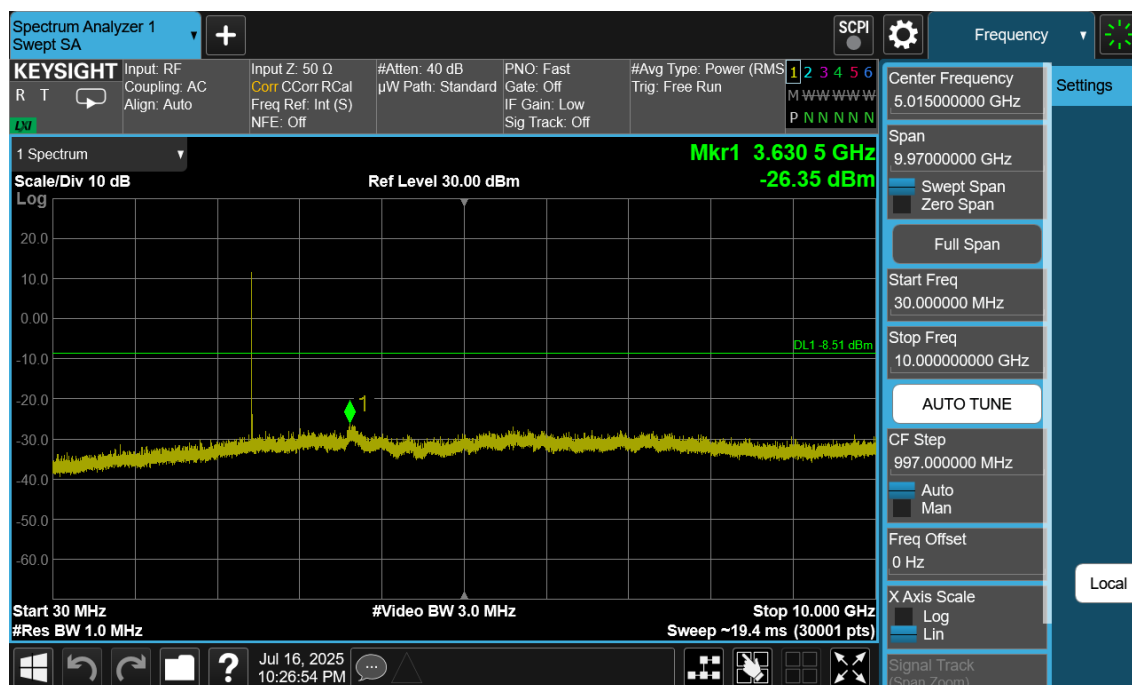

Plot 7-99. Conducted Spurious Plot NB UNII_L (Bluetooth (LE), 1Mbps, iPA – Ch. 19)


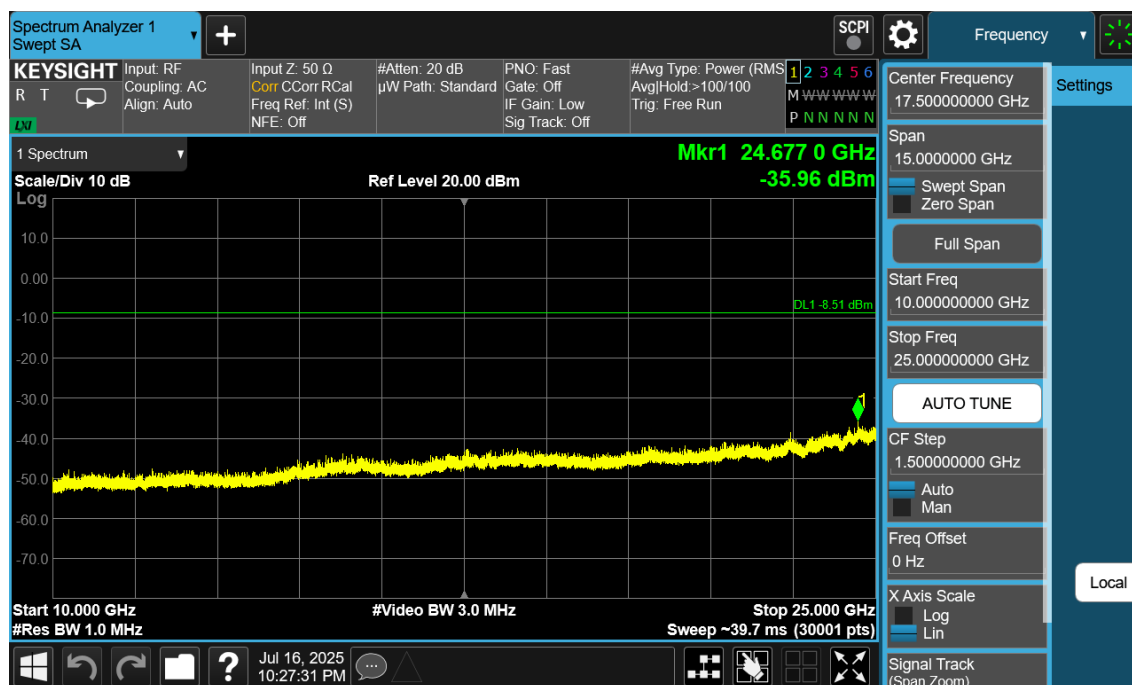


Plot 7-100. Conducted Spurious Plot NB UNII_L (Bluetooth (LE), 1Mbps, iPA – Ch. 19)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 80 of 108

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

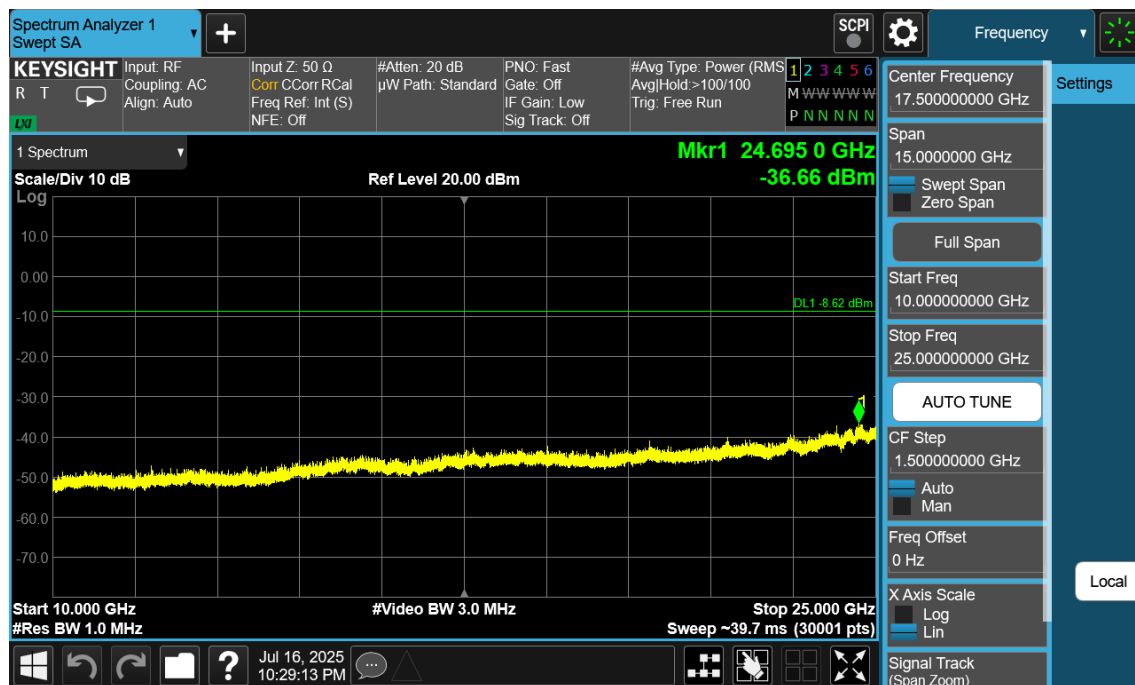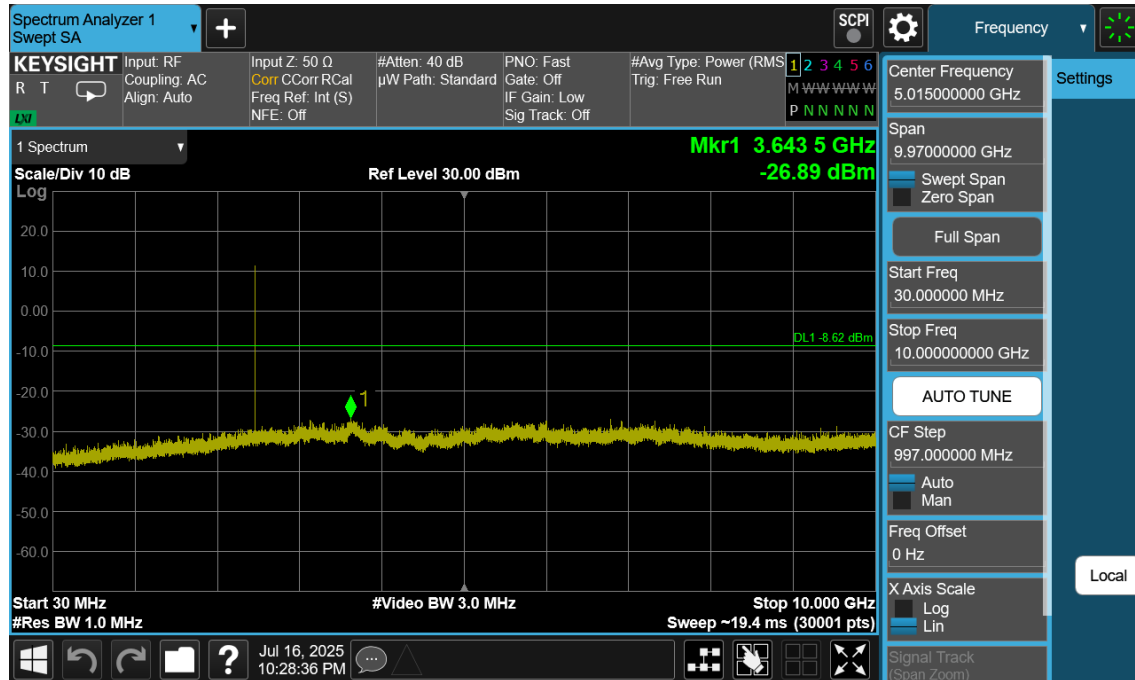

FCC ID: BCGA3416 IC: 579C-A3416	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 81 of 108


V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.6.4 Simultaneous TX Conducted Spurious Emissions

Description	Bluetooth 2.4GHz	NB UNII
Antenna	NB UNII _L	NB UNII _L
Operating Frequency (MHz)	2480	5157
Mode/Modulation	LE1M	NB UNII LE1M

Table 7-17. Worst Case Simultaneous Transmission Configuration

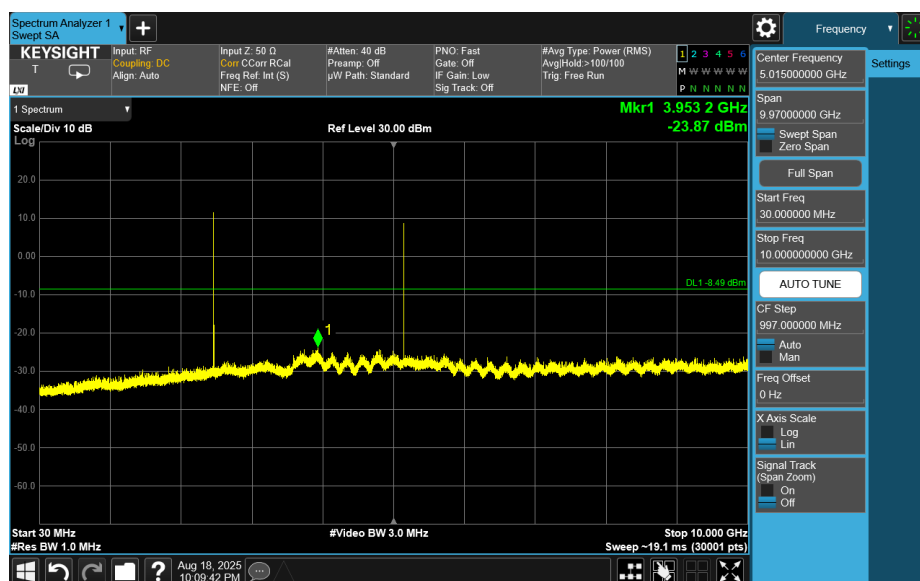

Plot 7-103. Conducted Spurious Plot Simultaneous Transmission

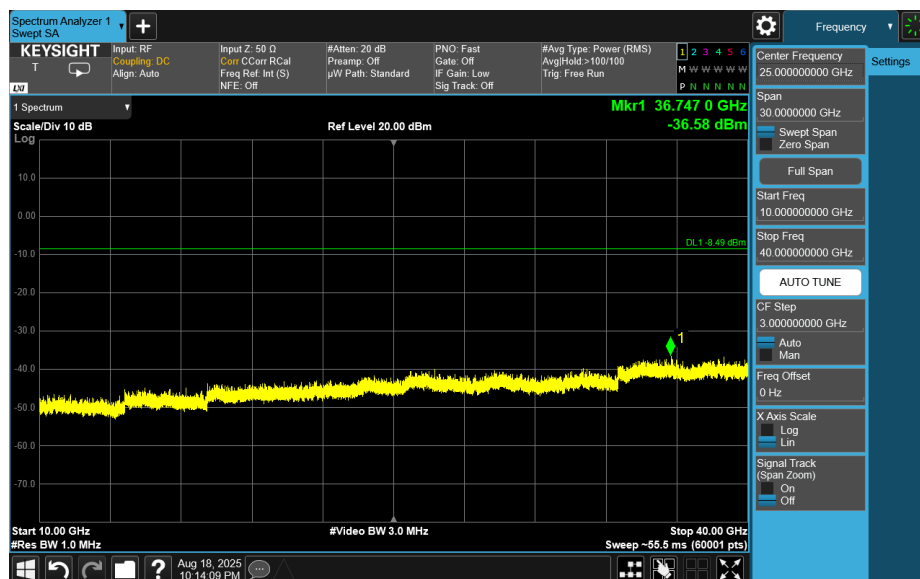

Plot 7-104. Conducted Spurious Plot Simultaneous Transmission

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 82 of 108

7.7 Radiated Spurious Emissions – Above 1GHz

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-18 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-18. Radiated Limits

Test Procedures Used

ANSI C63.10-2020 – Subclause 6.6.4.3
KDB 558074 D01 v05r02 – Sections 8.6, 8.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 83 of 108

V 10.6 10/27/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

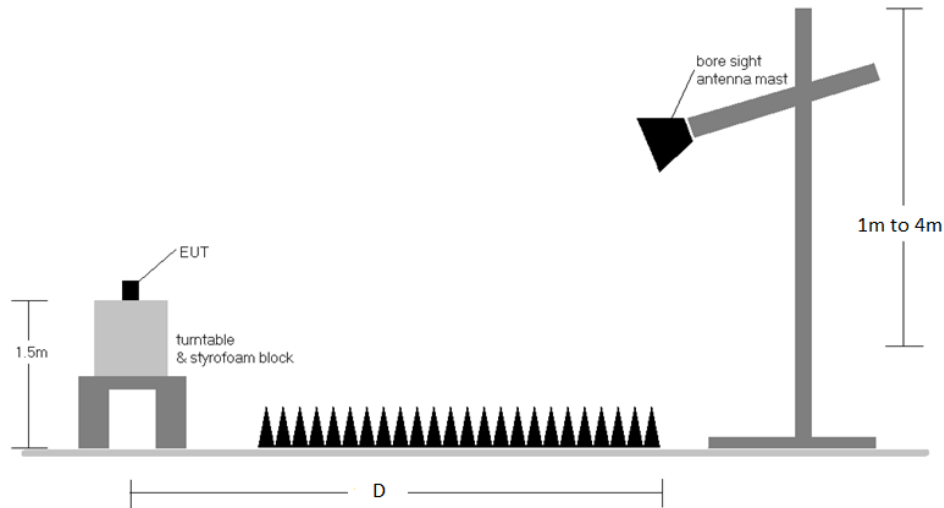


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-18.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 84 of 108

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{\text{[dB}\mu\text{V/m]}} = \text{Analyzer Level}_{\text{[dBm]}} + 107 + \text{AFCL}_{\text{[dB/m]}}$
- $\text{AFCL}_{\text{[dB/m]}} = \text{Antenna Factor}_{\text{[dB/m]}} + \text{Cable Loss}_{\text{[dB]}} - \text{Preamplifier Gain}_{\text{[dB]}}$
- $\text{Margin}_{\text{[dB]}} = \text{Field Strength Level}_{\text{[dB}\mu\text{V/m]}} - \text{Limit}_{\text{[dB}\mu\text{V/m]}}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7.3 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain


FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device		Page 85 of 108

V 10.6 10/27/2023

7.7.1 Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

TxBF

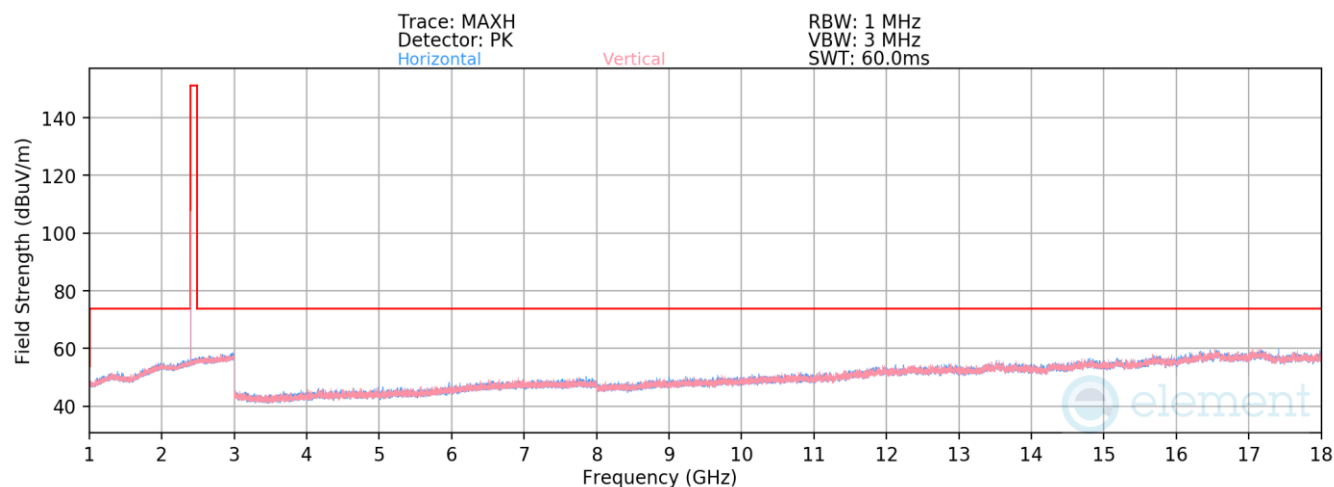


Plot 7-105. Radiated Spurious Emissions 1-18GHz TxBF (1Mbps, ePA – Ch. 0)

Bluetooth Mode: LE
Data Rate: 1Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2402MHz
Channel: 0


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4804.00	Average	V	-	-	-79.58	7.32	34.74	53.98	-19.24
4804.00	Peak	V	-	-	-67.81	7.32	46.51	73.98	-27.47
12010.00	Average	V	-	-	-82.62	18.08	42.46	53.98	-11.52
12010.00	Peak	V	-	-	-71.58	18.08	53.50	73.98	-20.48

Table 7-19. Radiated Measurements TxBF

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device		Page 86 of 108

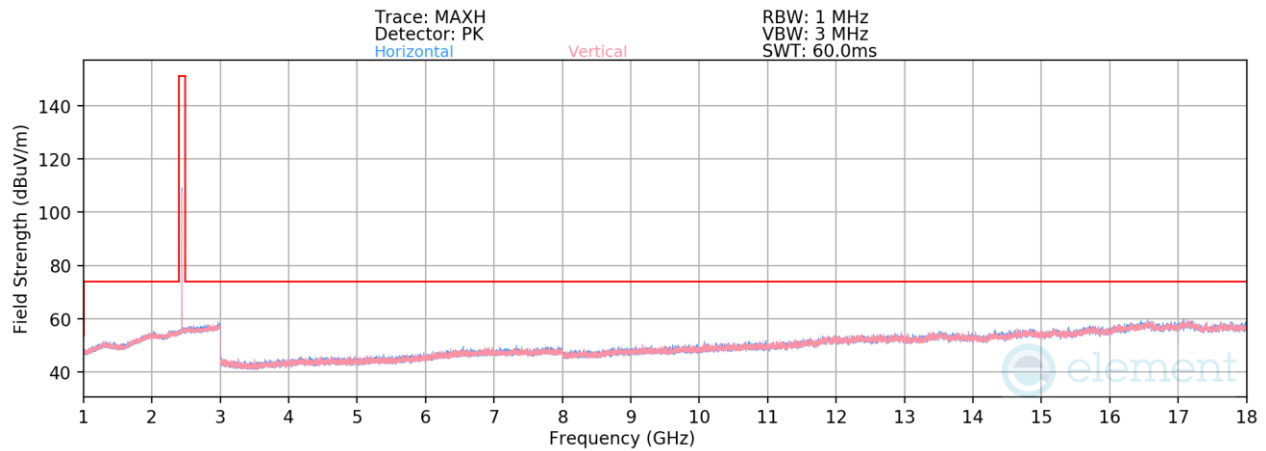

Plot 7-106. Radiated Spurious Emissions 1-18GHz TxBF (1Mbps, ePA – Ch. 19)

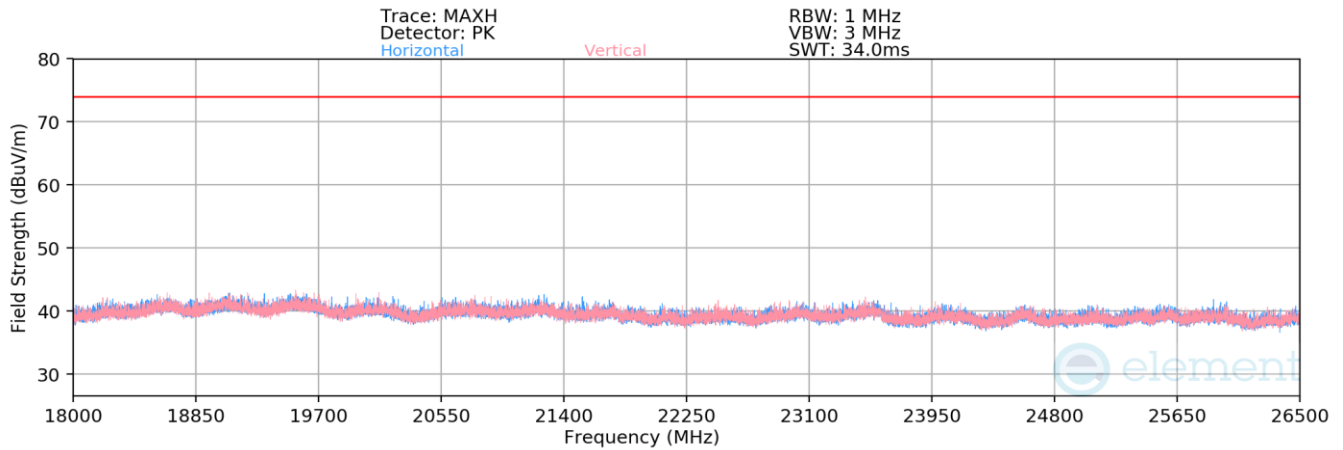

Plot 7-107. Radiated Spurious Emissions Above 18GHz TxBF (1Mbps ePA – Ch. 19)

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	2440MHz
Channel:	19


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4880.00	Average	H	-	-	-79.69	7.88	35.19	53.98	-18.79
4880.00	Peak	H	-	-	-68.51	7.88	46.37	73.98	-27.61
7320.00	Average	V	-	-	-80.06	10.95	37.89	53.98	-16.09
7320.00	Peak	V	-	-	-68.54	10.95	49.41	73.98	-24.57
12200.00	Average	V	-	-	-82.69	18.32	42.63	53.98	-11.35
12200.00	Peak	V	-	-	-71.61	18.32	53.70	73.98	-20.28

Table 7-20. Radiated Measurements TxBF

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device		Page 87 of 108

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

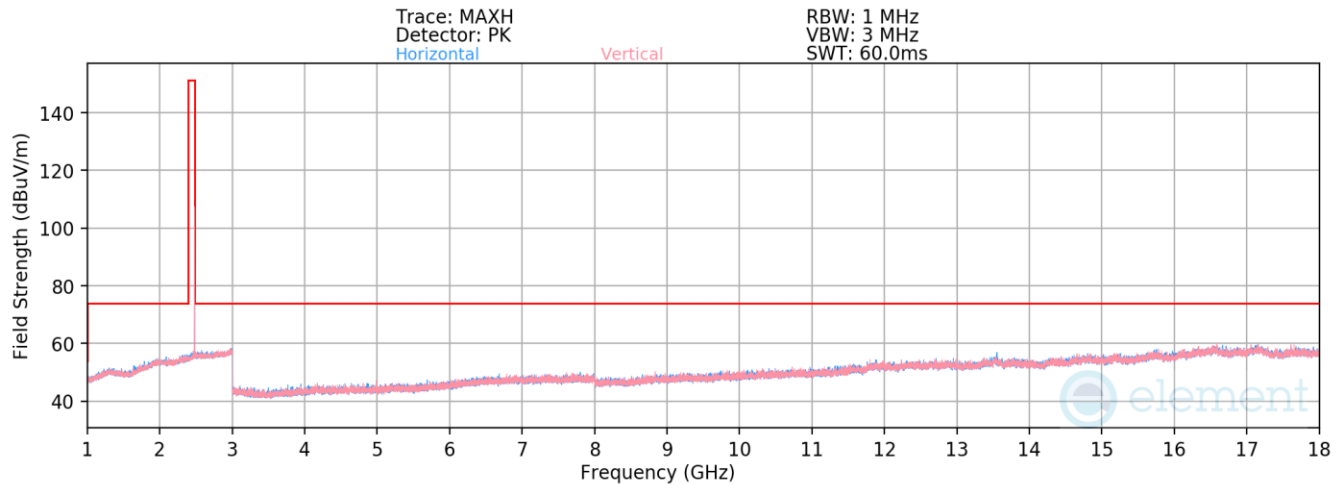

Plot 7-108. Radiated Spurious Emissions 1-18GHz TxBF (1Mbps ePA – Ch. 39)

Bluetooth Mode: LE
Data Rate: 1Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2480MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4960.00	Average	H	-	-	-79.66	7.65	34.98	53.98	-19.00
4960.00	Peak	H	-	-	-67.86	7.65	46.78	73.98	-27.20
7440.00	Average	H	-	-	-80.12	10.94	37.82	53.98	-16.16
7440.00	Peak	H	-	-	-68.02	10.94	49.93	73.98	-24.05
12400.00	Average	V	-	-	-82.90	18.56	42.65	53.98	-11.33
12400.00	Peak	V	-	-	-70.48	18.56	55.08	73.98	-18.90

Table 7-21. Radiated Measurements TxBF

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 88 of 108

V 10.6 10/27/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7.2 Simultaneous Tx Radiated Spurious Emissions Measurements


§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Description	Bluetooth 2.4GHz	NB UNII
Antenna	NB UNII _L	NB UNII _L
Operating Frequency (MHz)	2480	5157
Mode/Modulation	LE1M	NB UNII LE1M

Table 7-22. Worst Case Simultaneous Transmission Configuration

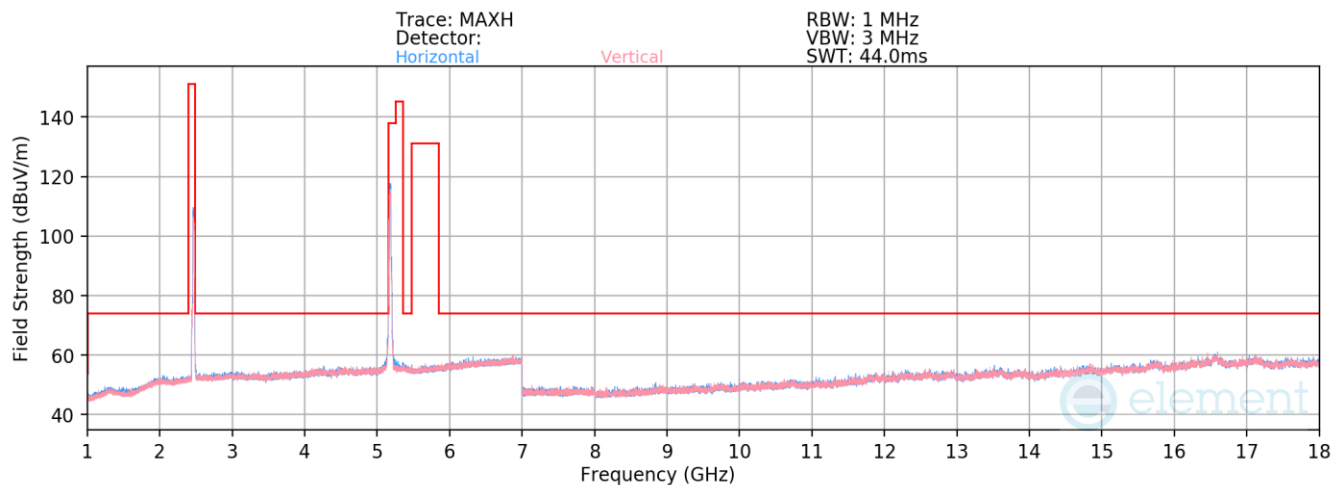

Plot 7-109. Radiated Spurious Emissions Simultaneous Transmission (1-18GHz)

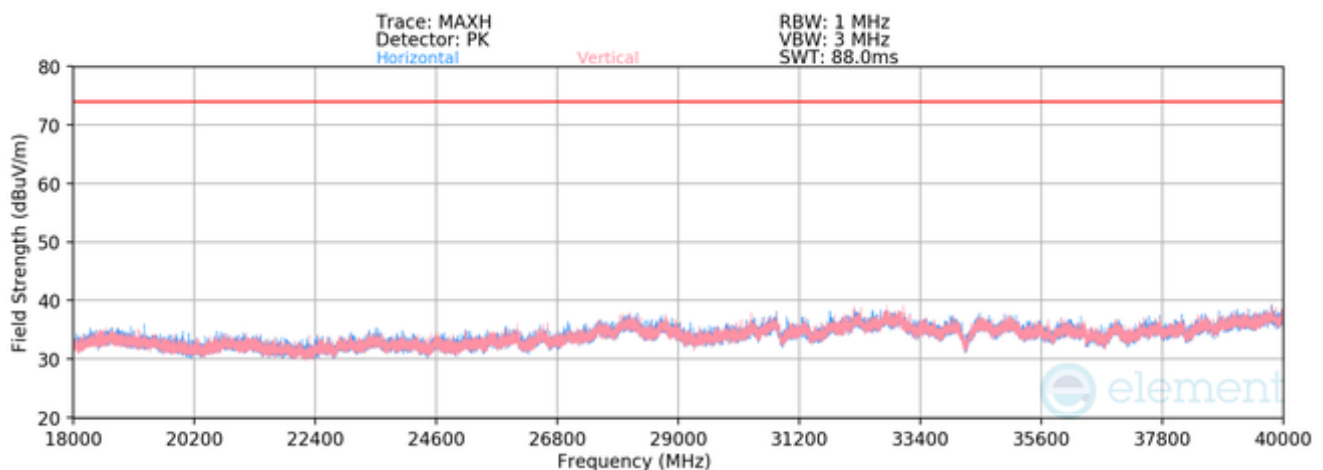

Plot 7-110. Radiated Spurious Emissions Simultaneous Transmission (Above 18GHz)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 89 of 108

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10314.00	Peak	H	-	-	-69.78	14.30	51.52	68.23	-16.71
* 15471.00	Avg	H	-	-	-84.10	22.92	45.82	53.98	-8.16
* 15471.00	Peak	H	-	-	-72.61	22.92	57.31	73.98	-16.67

Table 7-23. NB UNII Harmonics Emissions Measurements in Simultaneous Transmission Mode

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	-	-	-80.04	17.45	44.41	53.98	-9.57
4960.00	Peak	H	-	-	-69.88	17.45	54.57	73.98	-19.41
7440.00	Avg	H	-	-	-80.58	11.42	37.84	53.98	-16.14
7440.00	Peak	H	-	-	-69.16	11.42	49.26	73.98	-24.72
12400.00	Avg	H	-	-	-82.76	18.01	42.25	53.98	-11.73
12400.00	Peak	H	-	-	-71.05	18.01	53.96	73.98	-20.02

Table 7-24. BLE 1M Harmonics Emissions Measurements in Simultaneous Transmission Mode

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 90 of 108

V 10.6 10/27/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7.3 Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]


Ant1

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

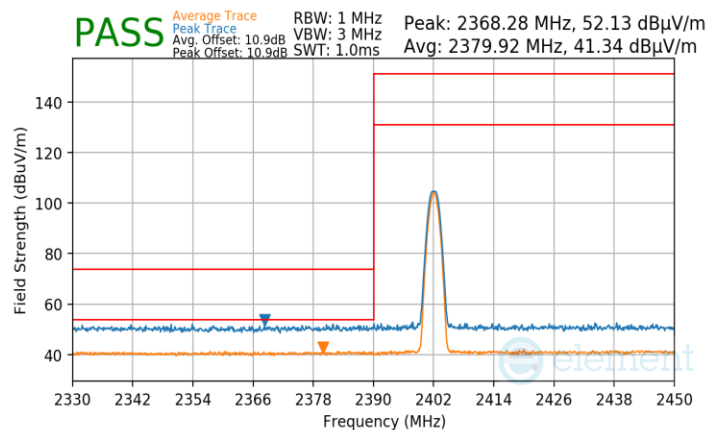

Plot 7-111. Radiated Restricted Lower Band Edge Measurement Ant1 (Average & Peak)

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

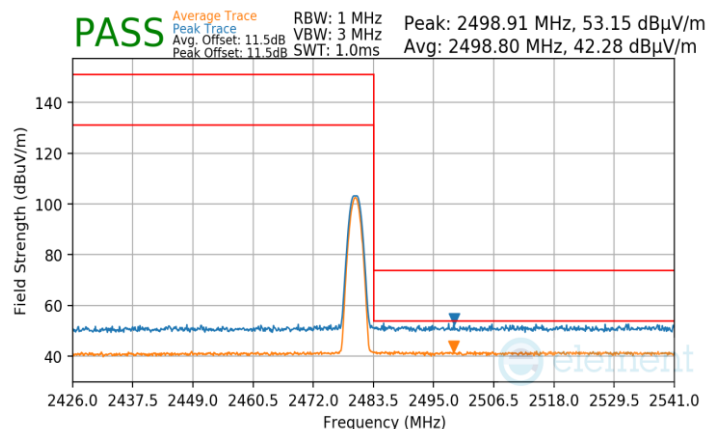


Plot 7-112. Radiated Restricted Upper Band Edge Measurement Ant1 (Average & Peak)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 91 of 108

V 10.6 10/27/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bluetooth Mode: LE
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

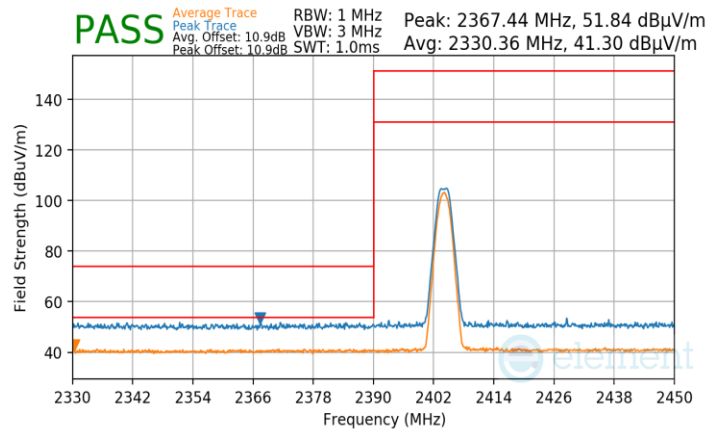

Plot 7-113. Radiated Restricted Lower Band Edge Measurement Ant1 (Average & Peak)

Bluetooth Mode: LE
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2478MHz
 Channel: 38

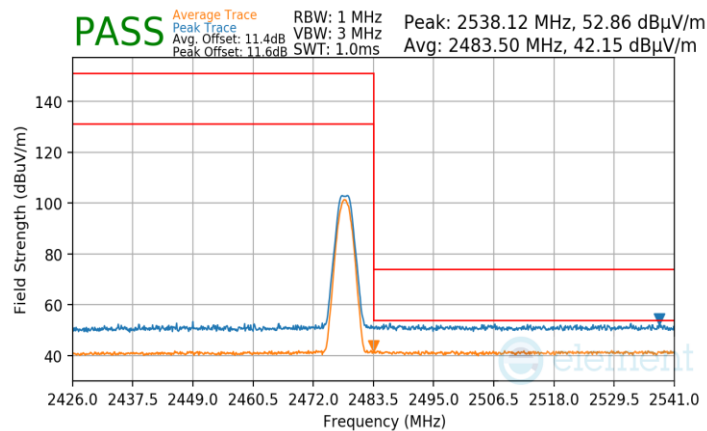


Plot 7-114. Radiated Restricted Upper Band Edge Measurement Ant1 (Average & Peak)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 92 of 108

V 10.6 10/27/2023


Ant2

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

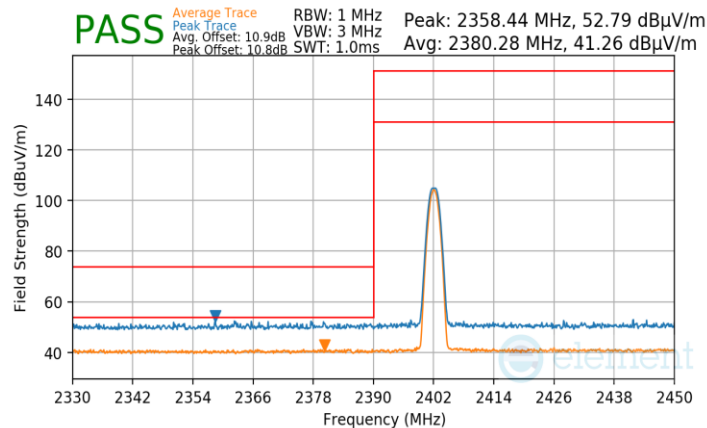

Plot 7-115. Radiated Restricted Lower Band Edge Measurement Ant2 (Average & Peak)

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

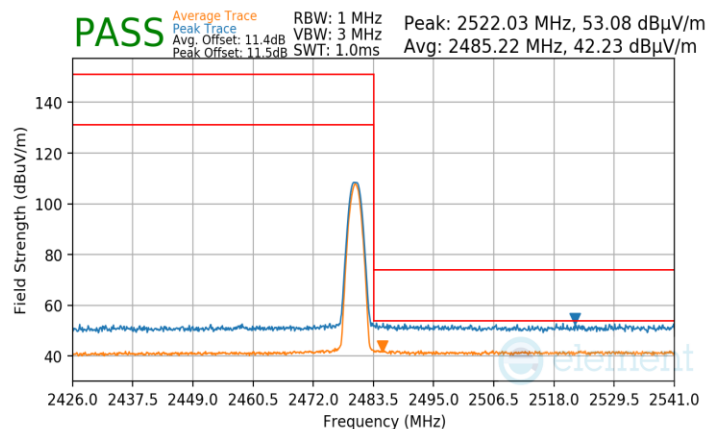


Plot 7-116. Radiated Restricted Upper Band Edge Measurement Ant2 (Average & Peak)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 93 of 108

V 10.6 10/27/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bluetooth Mode: LE
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

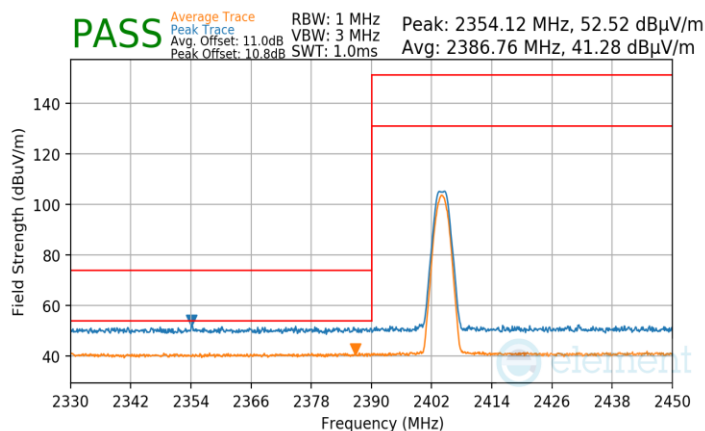

Plot 7-117. Radiated Restricted Lower Band Edge Measurement Ant2 (Average & Peak)

Bluetooth Mode: LE
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2478MHz
 Channel: 38

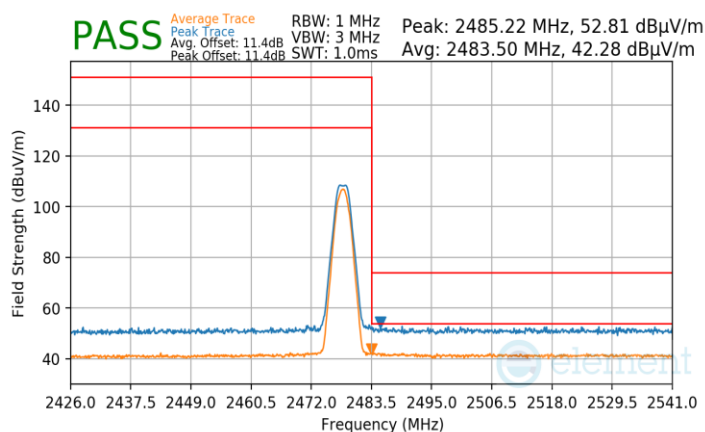


Plot 7-118. Radiated Restricted Upper Band Edge Measurement Ant2 (Average & Peak)

FCC ID: BCGA3416 IC: 579C-A3416	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 94 of 108

V 10.6 10/27/2023


NB UNII_L

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	iPA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

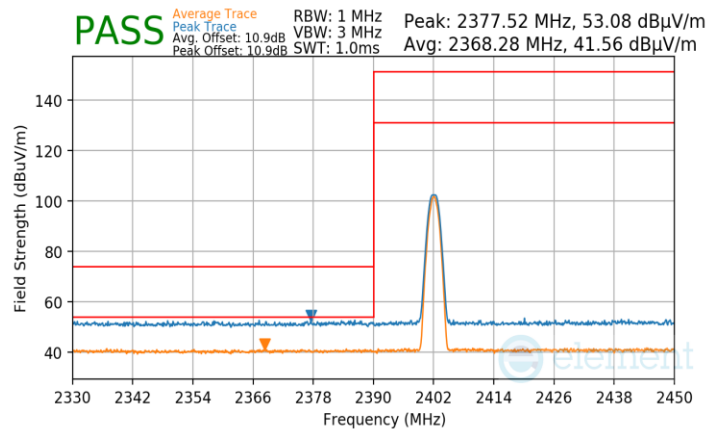

Plot 7-119. Radiated Restricted Lower Band Edge Measurement NB UNII_L (Average & Peak)

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	iPA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

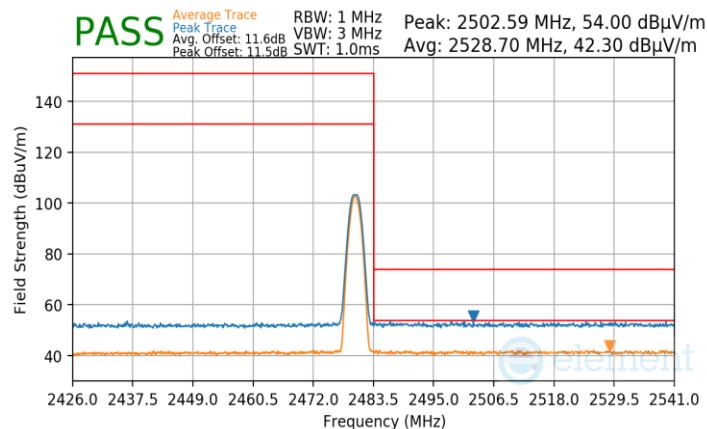


Plot 7-120. Radiated Restricted Upper Band Edge Measurement NB UNII_L (Average & Peak)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 95 of 108


V 10.6 10/27/2023

Bluetooth Mode: LE
 Data Rate: 2Mbps
 Power Scheme: iPA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

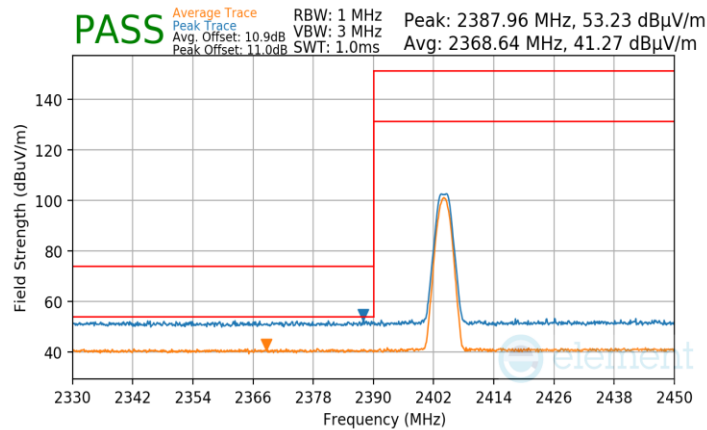

Plot 7-121. Radiated Restricted Lower Band Edge Measurement NB UNII_L (Average & Peak)

Bluetooth Mode: LE
 Data Rate: 2Mbps
 Power Scheme: iPA
 Measurement Distance: 3 Meters
 Operating Frequency: 2478MHz
 Channel: 38

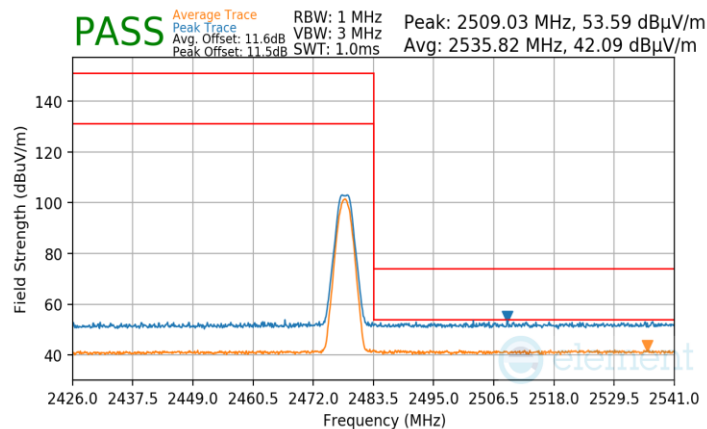


Plot 7-122. Radiated Restricted Upper Band Edge Measurement NB UNII_L (Average & Peak)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 96 of 108


TxBF

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

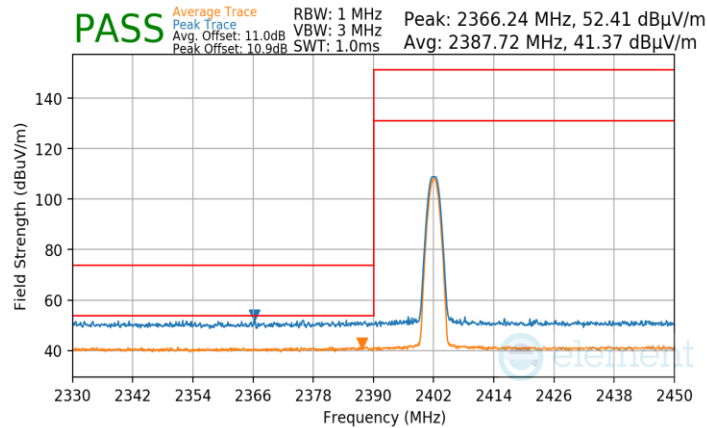

Plot 7-123. Radiated Restricted Lower Band Edge Measurement TxBF (Average & Peak)

Bluetooth Mode:	LE
Data Rate:	1Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	39

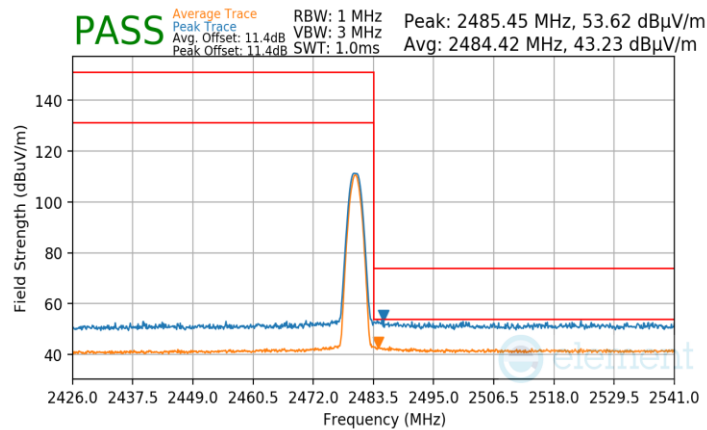


Plot 7-124. Radiated Restricted Upper Band Edge Measurement TxBF (Average & Peak)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 97 of 108


V 10.6 10/27/2023

Bluetooth Mode: LE
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

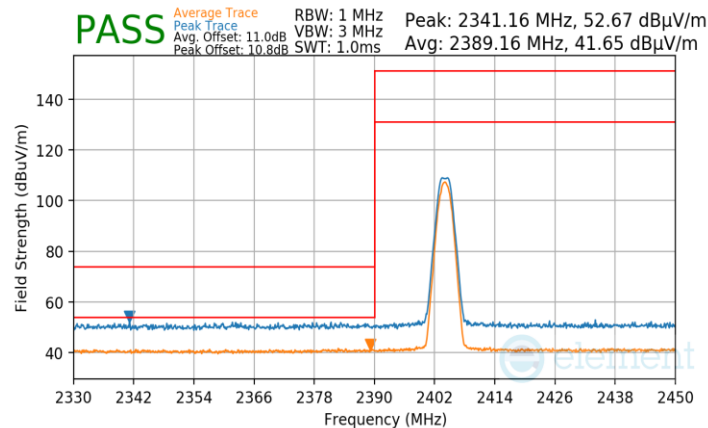

Plot 7-125. Radiated Restricted Lower Band Edge Measurement TxBF (Average & Peak)

Bluetooth Mode: LE
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2478MHz
 Channel: 38

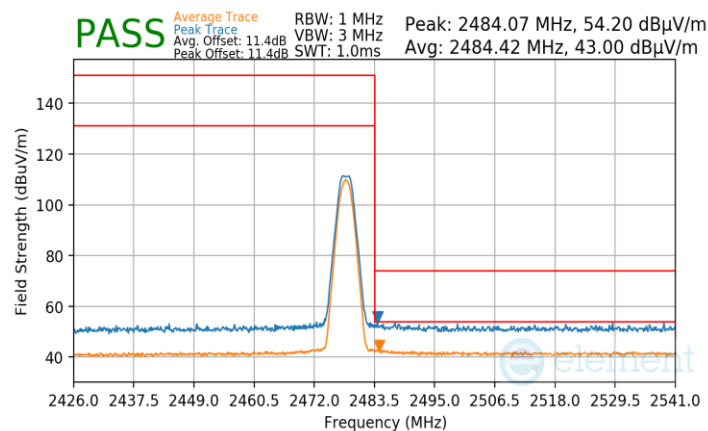

Plot 7-126. Radiated Restricted Upper Band Edge Measurement TxBF (Average & Peak)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 98 of 108

V 10.6 10/27/2023

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-25 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-25. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 99 of 108

V 10.6 10/27/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

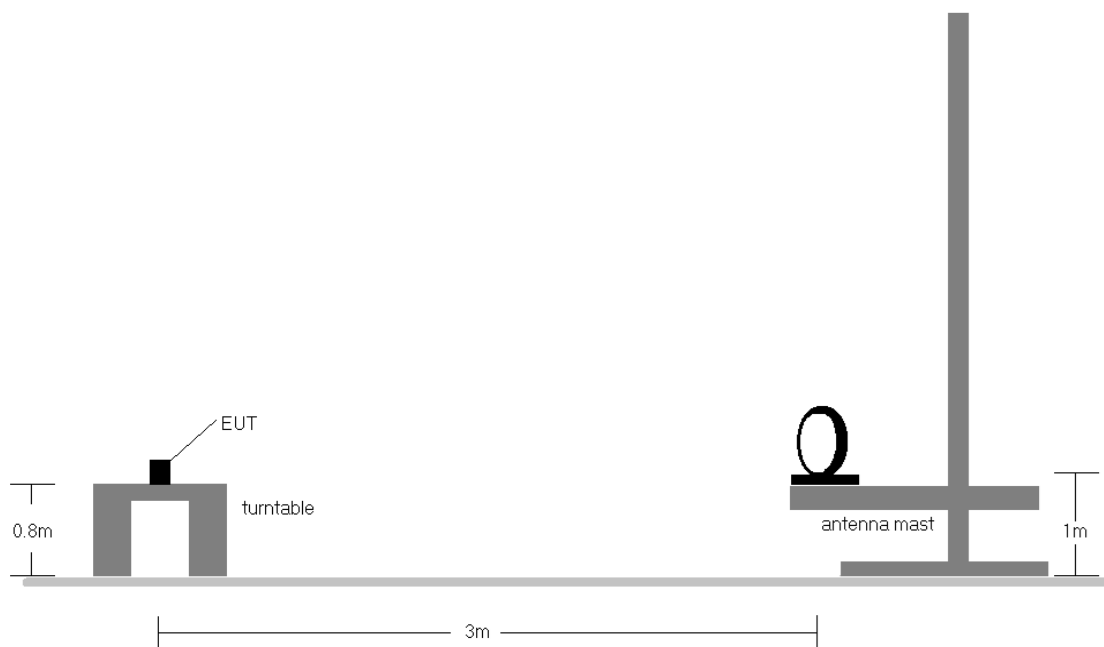


Figure 7-7. Radiated Test Setup < 30MHz

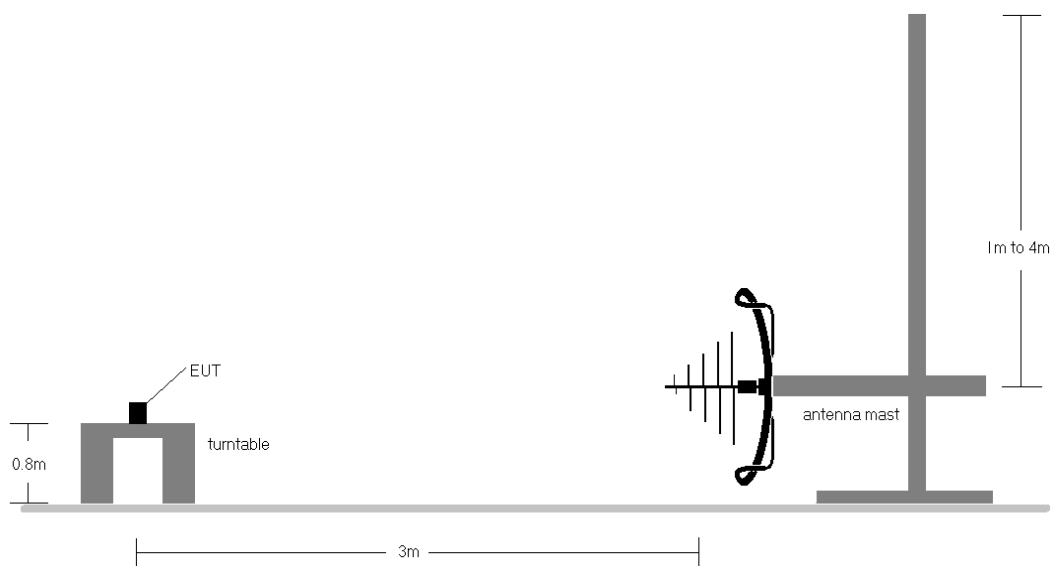


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA3416 IC: 579C-A3416			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 100 of 108	

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-25.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C Power Pack to Magnetic Charging Cable
 - b. EUT powered by host PC via USB-C Power Pack to Magnetic Charging Cable

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 101 of 108


V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.8.1 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

TxBF

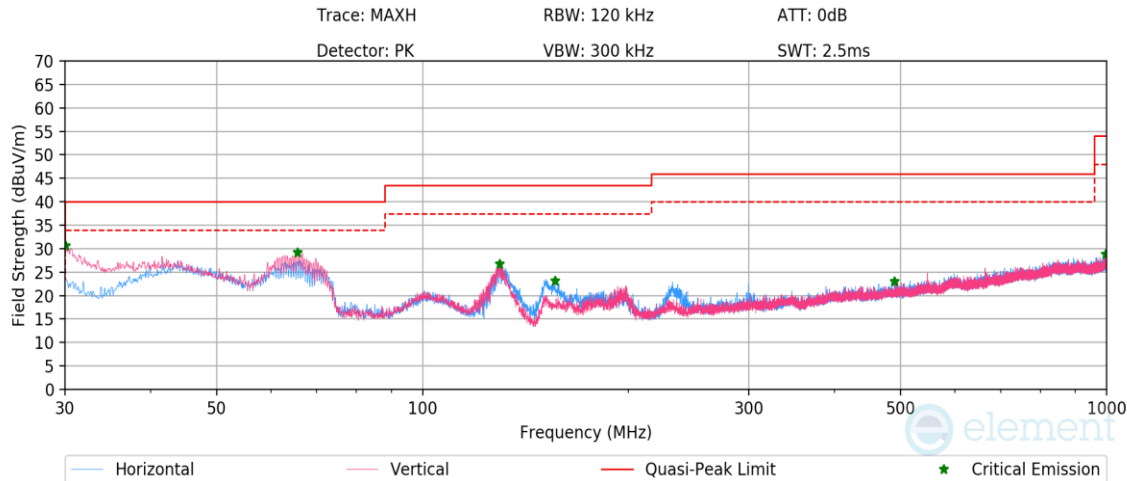

Plot 7-127. Radiated Spurious Emissions Below 1GHz TxBF (1Mbps, ePA – Ch.19, Pol. H & V, with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
30.06	Max-Peak	V	100	326	-57.19	-19.21	30.60	40.00	-9.40
65.64	Max-Peak	V	100	7	-59.20	-18.63	29.17	40.00	-10.83
129.48	Max-Peak	V	100	165	-59.58	-20.70	26.71	43.50	-16.79
156.13	Max-Peak	H	100	305	-63.05	-20.73	23.22	43.50	-20.28
489.32	Max-Peak	H	200	289	-72.90	-11.01	23.09	46.00	-22.91
996.82	Max-Peak	V	200	15	-74.70	-3.53	28.77	54.00	-25.23

Table 7-27. Radiated Spurious Emissions Below 1GHz TxBF (1Mbps, ePA – Ch.19, Pol. H & V, with AC/DC Adapter)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 102 of 108


V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Simultaneous TX Conducted Spurious Emissions

Description	Bluetooth 2.4GHz	NB UNII
Antenna	NB UNII _L	NB UNII _L
Operating Frequency (MHz)	2480	5157
Mode/Modulation	LE1M	NB UNII LE1M

Table 7-26. Worst Case Simultaneous Transmission Configuration

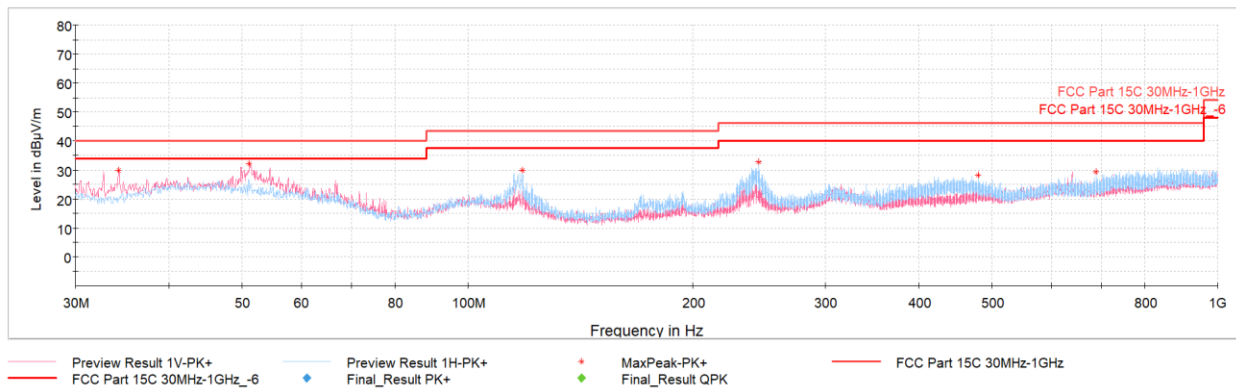

Plot 7-128. Radiated Spurious Emissions Simultaneous Transmission Below 1GHz (NB UNII & BLE 1M, with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
34.27	Max-Peak	V	100	346	-59.24	-17.93	29.83	40.00	-10.17
51.20	Max-Peak	V	100	334	-60.72	-14.23	32.05	40.00	-7.95
118.27	Max-Peak	H	300	79	-59.01	-18.10	29.89	43.52	-13.63
244.56	Max-Peak	H	100	80	-59.69	-14.58	32.73	46.02	-13.29
479.01	Max-Peak	H	200	182	-70.05	-8.90	28.05	46.02	-17.97
688.78	Max-Peak	H	100	118	-72.25	-5.37	29.38	46.02	-16.64

Table 7-28. Radiated Spurious Emissions Simultaneous Transmission Below 1GHz (NB UNII & BLE 1M, with AC/DC Adapter)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 103 of 108

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.9 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-29. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 104 of 108

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

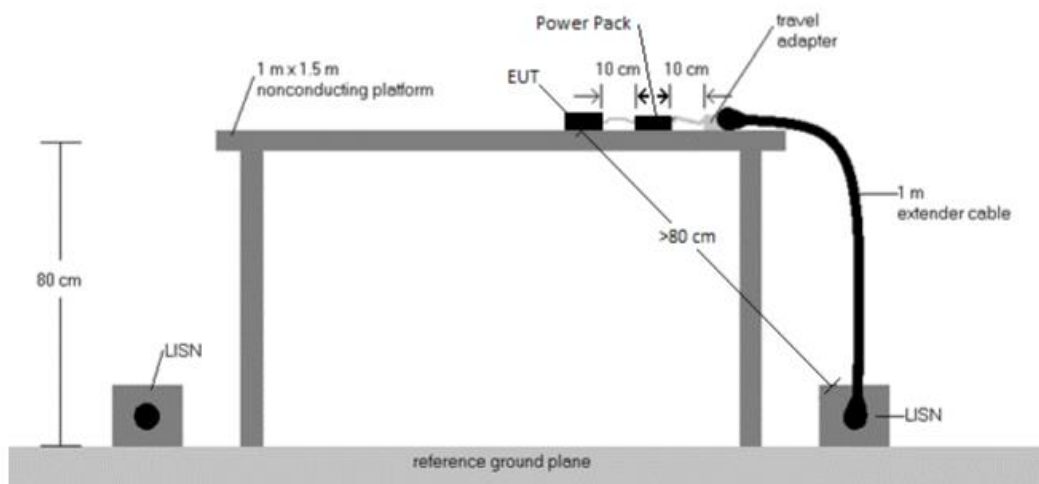



Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor to USB-C Power Pack to Magnetic Charging Cable
 - b. EUT powered by host PC via USB-C Power Pack to Magnetic Charging Cable
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen (8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using a quasi peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 105 of 108

V 10.6 10/27/2023

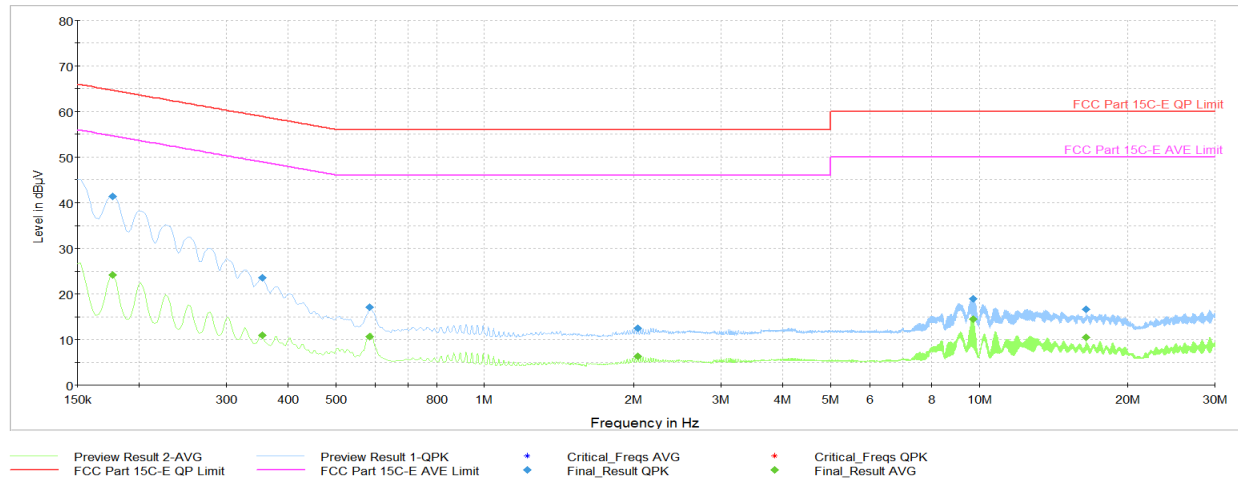

Plot 7-129. AC Line Conducted Plot with Bluetooth LE Tx BF (L1, 1Mbps ePA – Ch.19 with AC/DC Adapter)


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.177	FINAL	—	24.27	54.63	-30.36	L1	GND
0.177	FINAL	41.3	—	64.63	-23.35	L1	GND
0.355	FINAL	—	10.96	48.85	-37.89	L1	GND
0.355	FINAL	23.6	—	58.85	-35.23	L1	GND
0.587	FINAL	—	10.62	46.00	-35.38	L1	GND
0.587	FINAL	17.1	—	56.00	-38.93	L1	GND
2.038	FINAL	12.5	—	56.00	-43.48	L1	GND
2.038	FINAL	—	6.25	46.00	-39.75	L1	GND
9.726	FINAL	19.0	—	60.00	-41.02	L1	GND
9.726	FINAL	—	14.42	50.00	-35.58	L1	GND
16.476	FINAL	—	10.43	50.00	-39.57	L1	GND
16.478	FINAL	16.6	—	60.00	-43.39	L1	GND

Table 7-30. AC Line Conducted Data with Bluetooth LE Tx BF (L1, 1Mbps ePA – Ch.19 with AC/DC Adapter)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 106 of 108

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

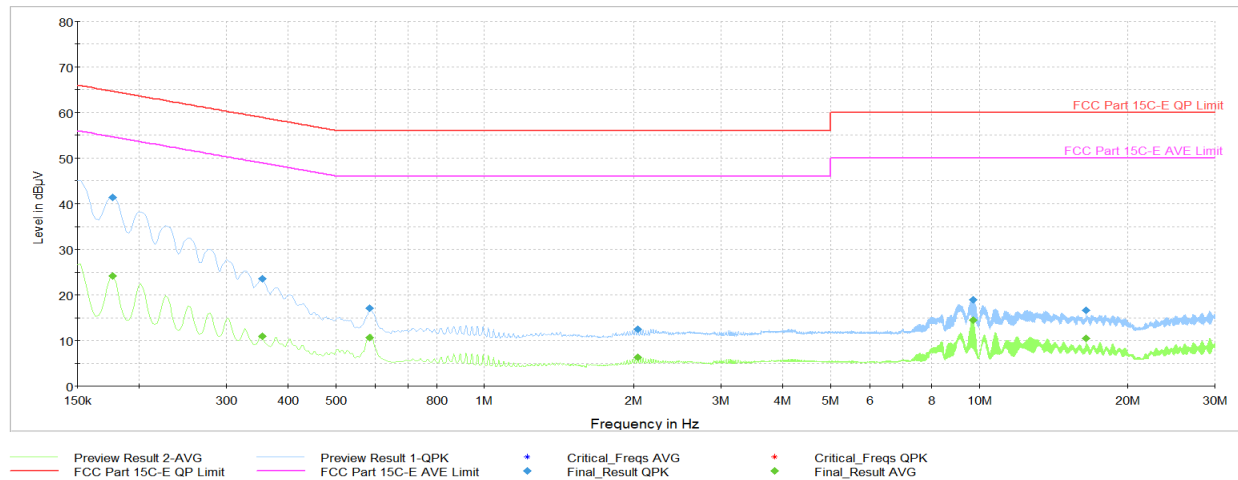

Plot 7-130. AC Line Conducted Plot with Bluetooth LE Tx BF (N, 1Mbps ePA – Ch.19, with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.177	FINAL	—	23.15	54.63	-31.47	N	GND
0.177	FINAL	41.2	—	64.63	-23.46	N	GND
0.353	FINAL	—	10.22	48.90	-38.69	N	GND
0.353	FINAL	22.7	—	58.90	-36.20	N	GND
0.868	FINAL	—	8.89	46.00	-37.11	N	GND
0.868	FINAL	14.3	—	56.00	-41.67	N	GND
2.906	FINAL	13.4	—	56.00	-42.58	N	GND
2.906	FINAL	—	7.19	46.00	-38.81	N	GND
9.625	FINAL	20.0	—	60.00	-40.04	N	GND
9.627	FINAL	—	15.85	50.00	-34.15	N	GND
20.776	FINAL	—	16.26	50.00	-33.74	N	GND
20.776	FINAL	20.5	—	60.00	-39.48	N	GND

Table 7-31. AC Line Conducted Data with Bluetooth LE Tx BF (N, 1Mbps ePA – Ch.19 with AC/DC Adapter)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 107 of 108

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Head Mounted Device FCC ID: BCGA3416 and IC: 579C-A3416** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-02.BCG	Test Dates: 5/12/2025 - 08/19/2025	EUT Type: Head Mounted Device	Page 108 of 108

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.