




7.6.5 Ant1 Radiated Band Edge Measurements (80MHz BW)

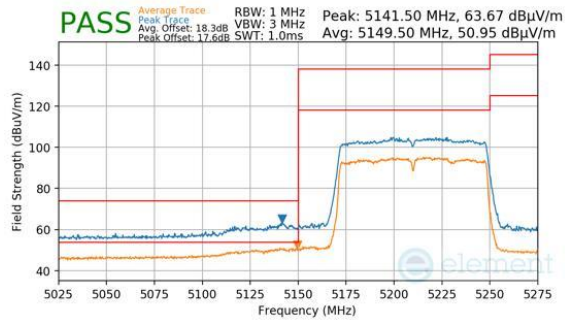


Plot 7-100. Ant1 (Peak & Average, Ch.42, 802.11ac, MCS9)

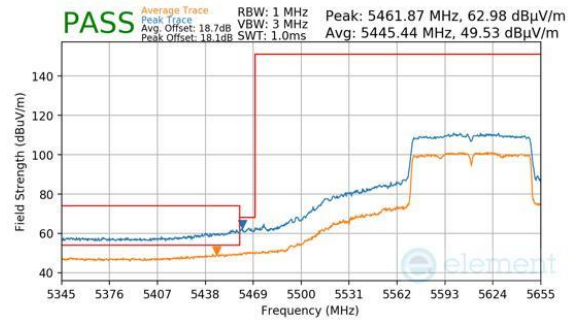


Plot 7-103. Ant1 (Peak & Average, Ch.122 (FCC ONLY), 802.11ac, MCS9)

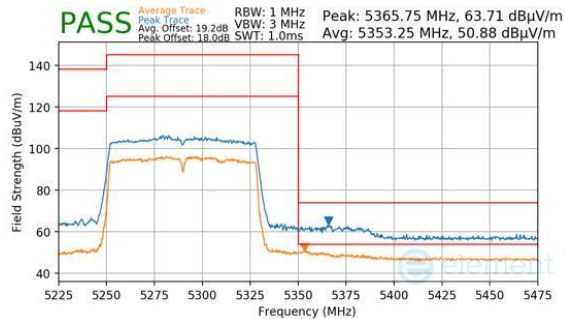


Plot 7-101. Ant1 (Peak & Average, Ch.58, 802.11ac, MCS9)

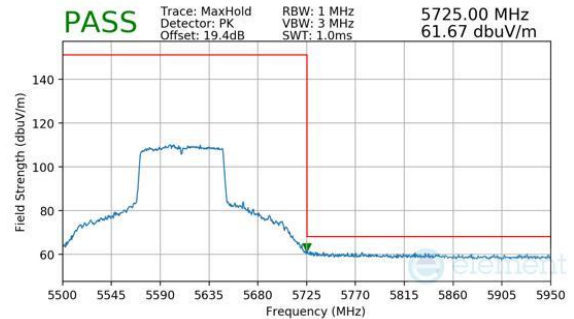

Plot 7-104. Ant1 (Peak, Ch.122 (FCC ONLY), 802.11ac, MCS9)

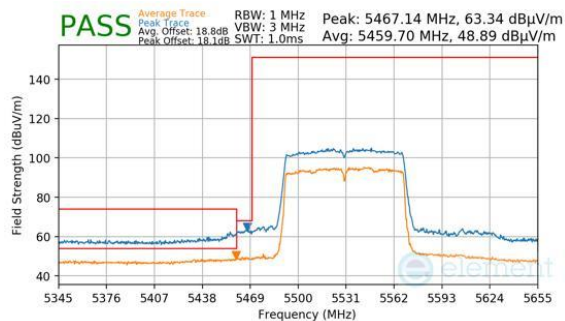

Plot 7-102. Ant1 (Peak & Average, Ch.106, 802.11ac, MCS9)

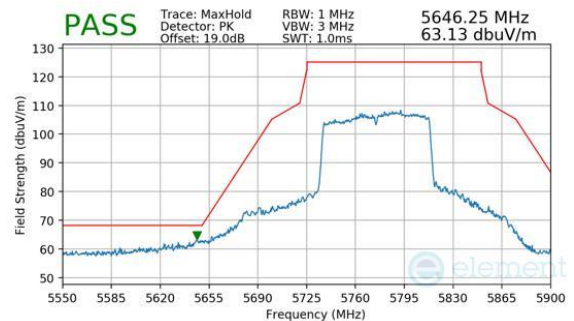


Plot 7-105. Ant1 (Peak, Ch.155, 802.11ac, MCS9)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 109 of 134

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

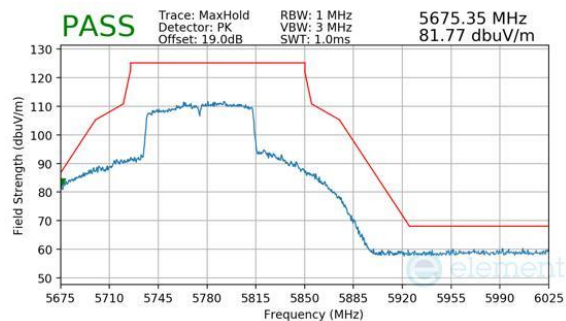


Plot 7-106. Ant1 (Peak, Ch.155, 802.11ac, MCS9)


FCC ID: BCGA3416 IC: 579C-A3416	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 110 of 134

V 11.0 06/2025


7.6.6 Ant2 Radiated Band Edge Measurements (20MHz BW)

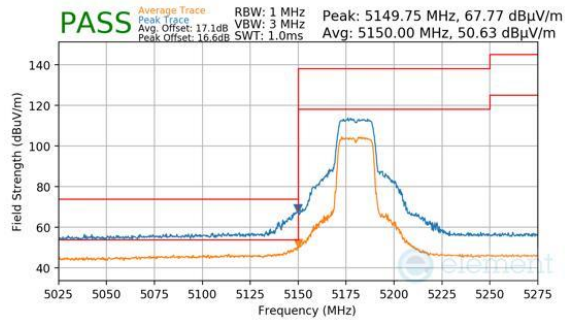


Plot 7-107. Ant2 (Peak & Average, Ch.36, 802.11n, MCS7)

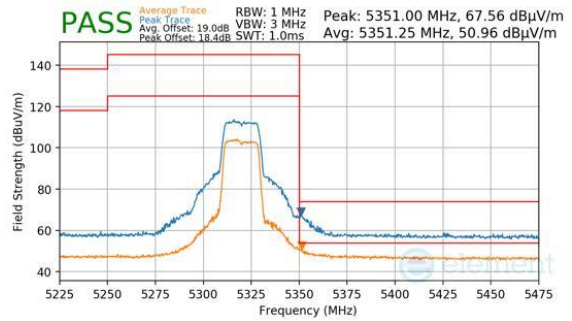


Plot 7-110. Ant2 (Peak & Average, Ch.64, 802.11n, MCS7)

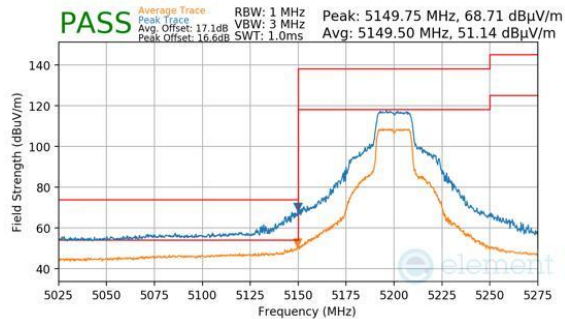


Plot 7-108. Ant2 (Peak & Average, Ch.40, 802.11n, MCS7)

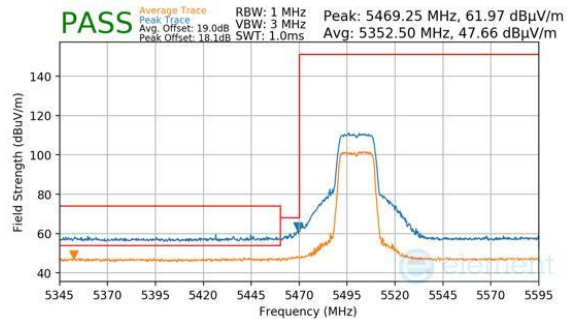

Plot 7-111. Ant2 (Peak & Average, Ch.100, 802.11n, MCS7)

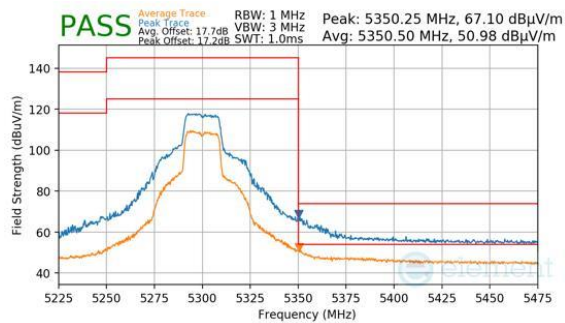

Plot 7-109. Ant2 (Peak & Average, Ch.60, 802.11n, MCS7)

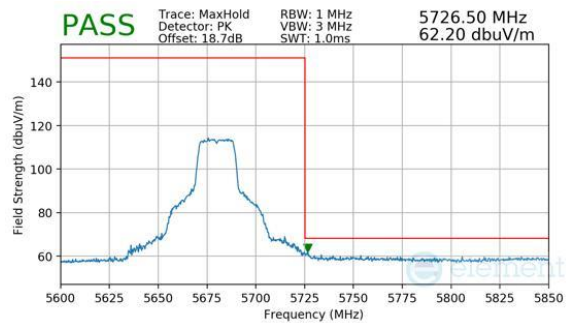


Plot 7-112. Ant2 (Peak, Ch.136, 802.11n, MCS7)


FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 111 of 134

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

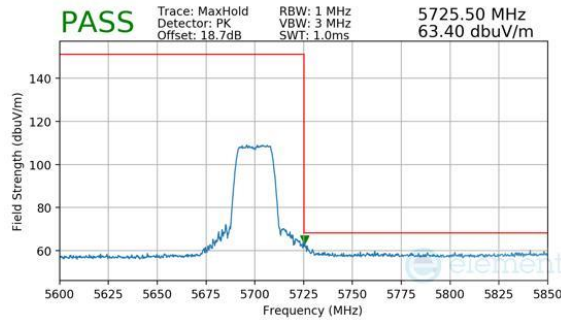

Plot 7-113. Ant2 (Peak, Ch.140, 802.11n, MCS7)

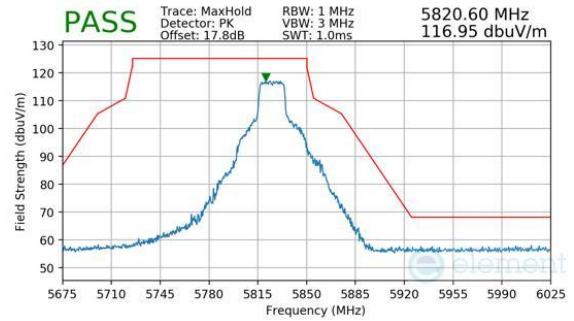

Plot 7-115. Ant2 (Peak, Ch.165, 802.11n, MCS7)

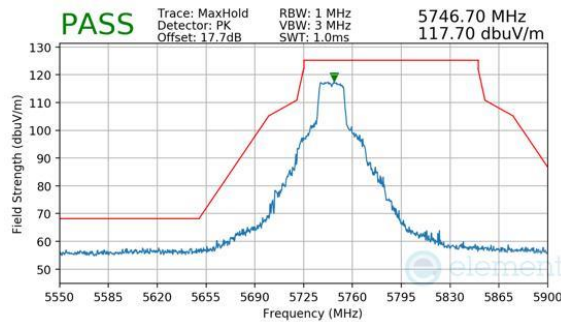


Plot 7-114. Ant2 (Peak, Ch.149, 802.11n, MCS7)

FCC ID: BCGA3416 IC: 579C-A3416	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 112 of 134


V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.6.7 Ant2 Radiated Band Edge Measurements (40MHz BW)

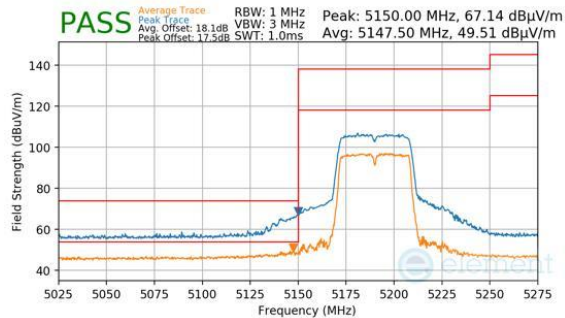


Plot 7-116. Ant2 (Peak & Average, Ch.38, 802.11n, MCS7)

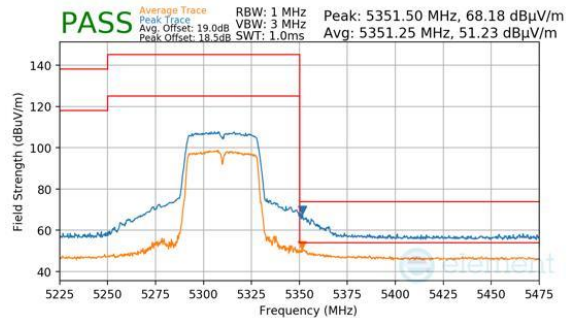


Plot 7-119. Ant2 (Peak & Average, Ch.62, 802.11n, MCS7)

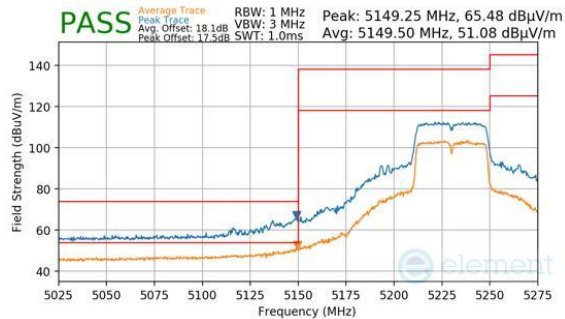


Plot 7-117. Ant2 (Peak & Average, Ch.46, 802.11n, MCS7)

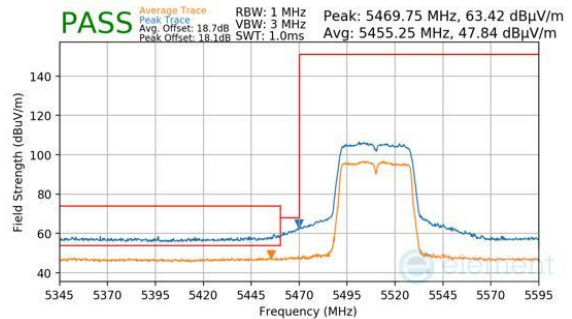

Plot 7-120. Ant2 (Peak & Average, Ch.102, 802.11n, MCS7)

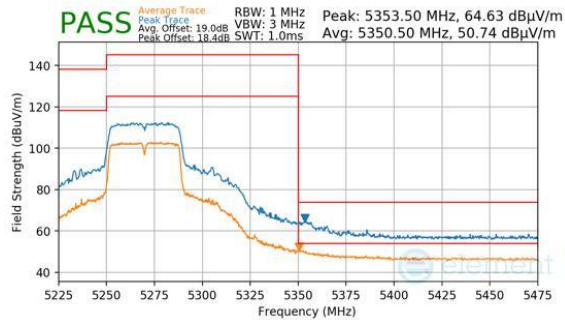

Plot 7-118. Ant2 (Peak & Average, Ch.54, 802.11n, MCS7)

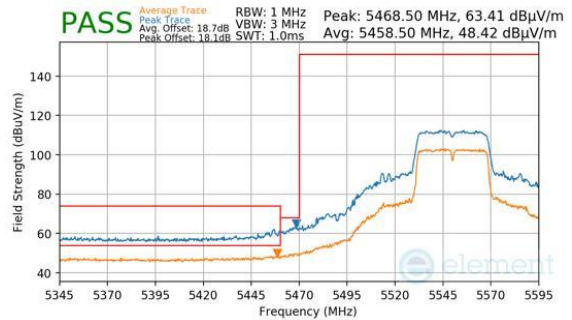


Plot 7-121. Ant2 (Peak & Average, Ch.110, 802.11n, MCS7)


FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 113 of 134

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

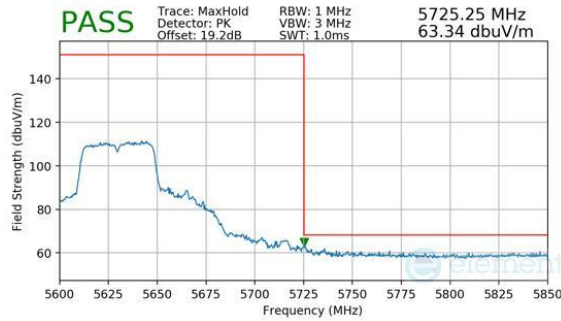


Plot 7-122. Ant2 (Peak, Ch.126 (FCC ONLY), 802.11n, MCS7)

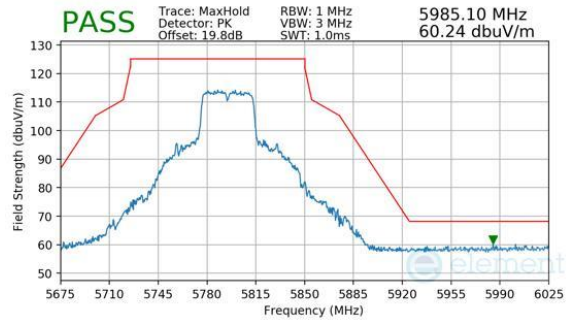

Plot 7-125. Ant2 (Peak, Ch.159, 802.11n, MCS7)

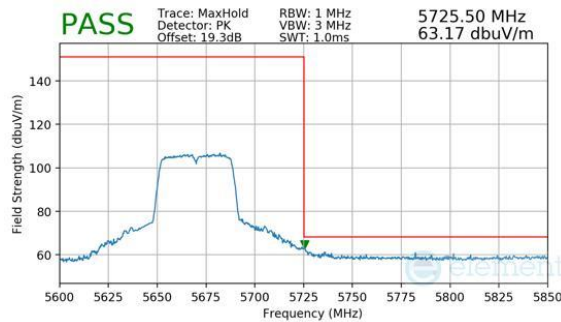

Plot 7-123. Ant2 (Peak, Ch.134, 802.11n, MCS7)

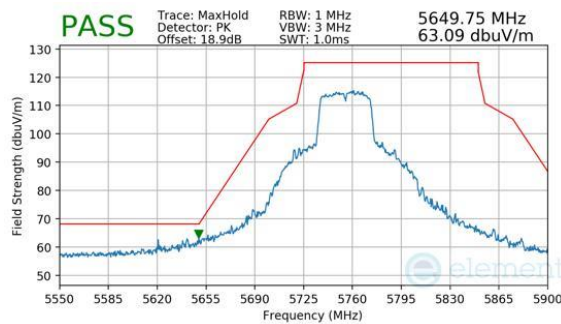


Plot 7-124. Ant2 (Peak, Ch.151, 802.11n, MCS7)

FCC ID: BCGA3416 IC: 579C-A3416	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 114 of 134


V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.6.8 Ant2 Radiated Band Edge Measurements (80MHz BW)

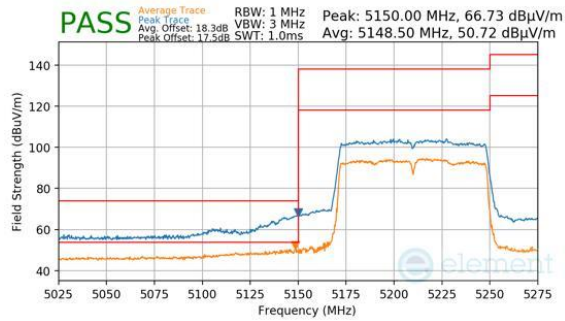


Plot 7-126. Ant2 (Peak & Average, Ch.42, 802.11ac, MCS9)

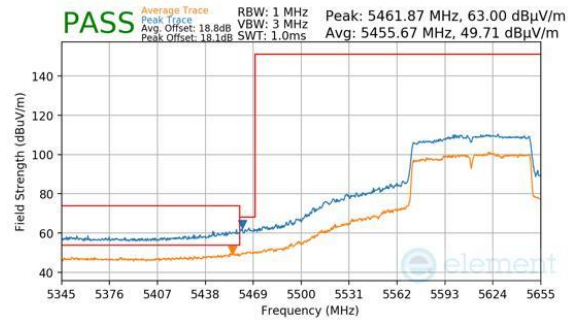


Plot 7-129. Ant2 (Peak & Average, Ch.122 (FCC ONLY), 802.11ac, MCS9)

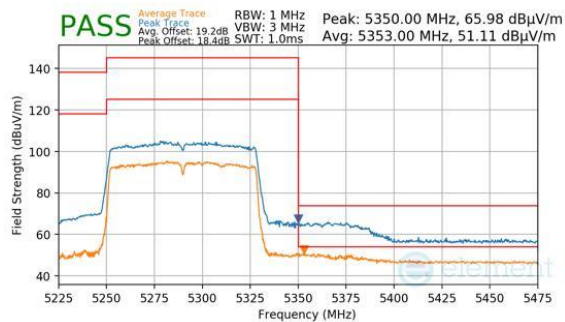


Plot 7-127. Ant2 (Peak & Average, Ch.58, 802.11ac, MCS9)

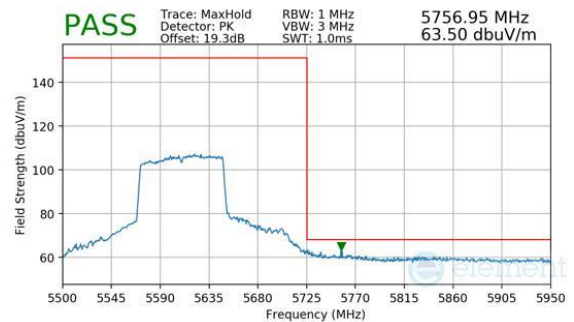

Plot 7-130. Ant2 (Peak, Ch.122 (FCC ONLY), 802.11ac, MCS9)

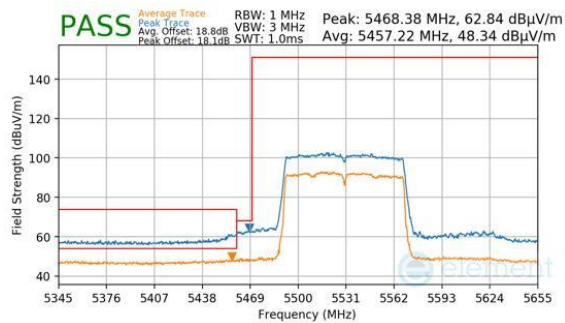

Plot 7-128. Ant2 (Peak & Average, Ch.106, 802.11ac, MCS9)

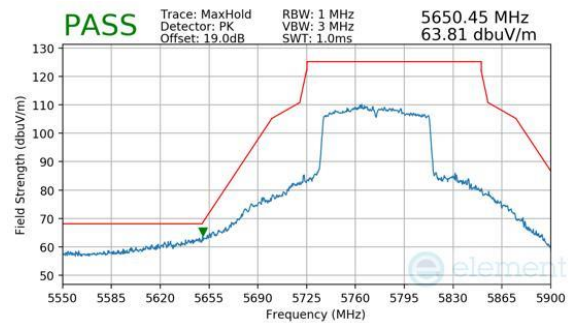


Plot 7-131. Ant2 (Peak, Ch.155, 802.11ac, MCS9)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 115 of 134

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

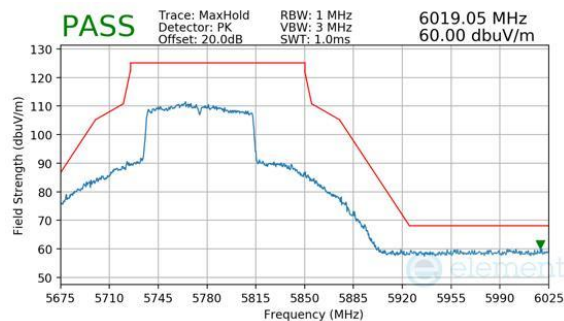


Plot 7-132. Ant2 (Peak, Ch.155, 802.11ac, MCS9)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 116 of 134


V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.6.9 CDD Radiated Band Edge Measurements (20MHz BW)

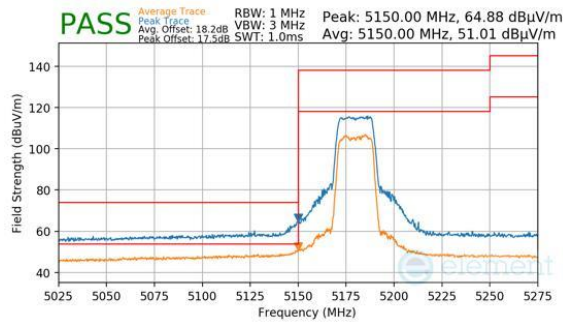


Plot 7-133. CDD (Peak & Average, Ch.36, 802.11n, MCS15)

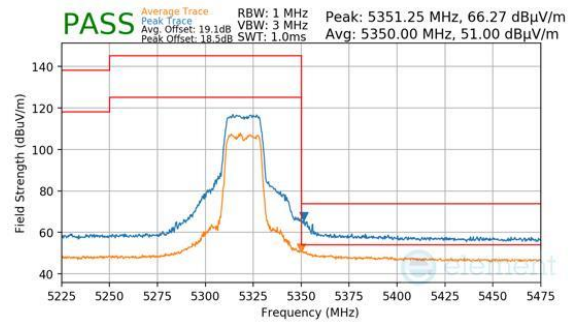


Plot 7-136. CDD (Peak & Average, Ch.64, 802.11n, MCS15)

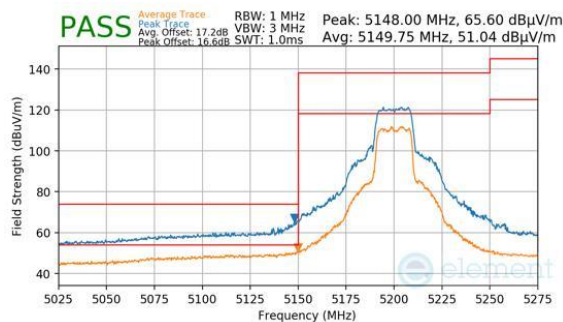


Plot 7-134. CDD (Peak & Average, Ch.40, 802.11n, MCS15)

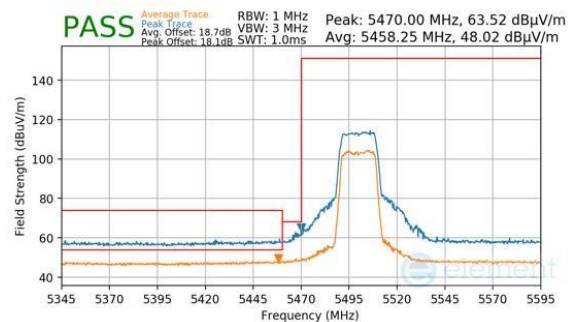

Plot 7-137. CDD (Peak & Average, Ch.100, 802.11n, MCS15)

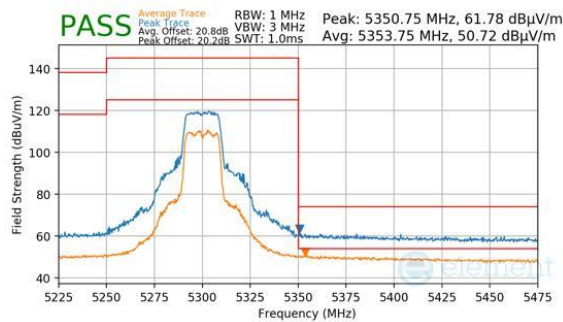

Plot 7-135. CDD (Peak & Average, Ch.60, 802.11n, MCS15)



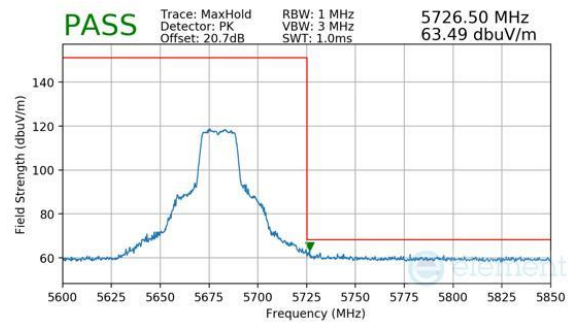


Plot 7-138. CDD (Peak, Ch.136, 802.11n, MCS15)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 117 of 134

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

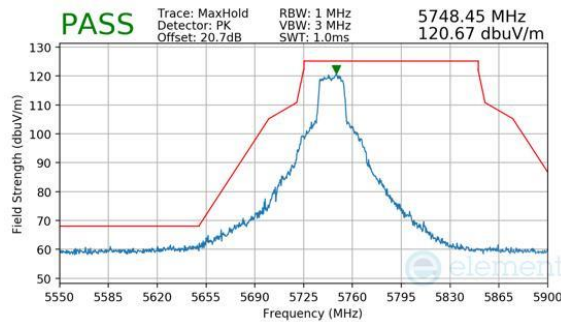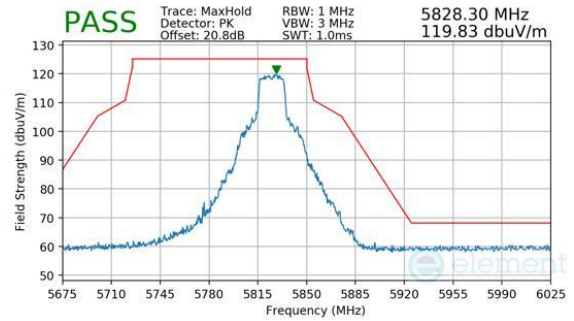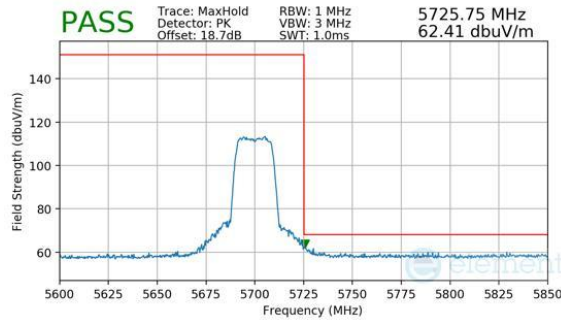


FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 118 of 134


V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.6.10 CDD Radiated Band Edge Measurements (40MHz BW)

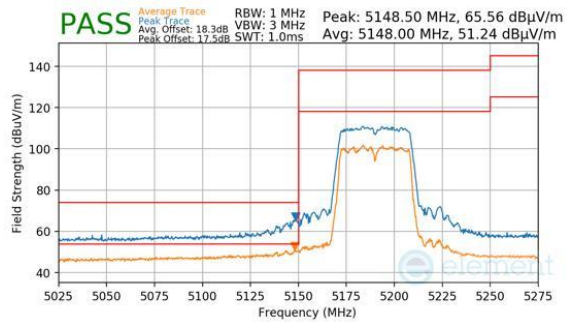


Plot 7-142. CDD (Peak & Average, Ch.38, 802.11n, MCS15)

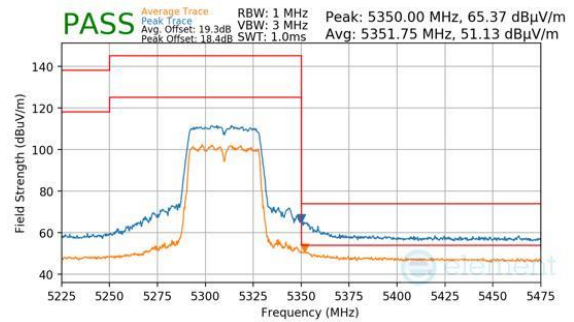


Plot 7-145. CDD (Peak & Average, Ch.62, 802.11n, MCS15)

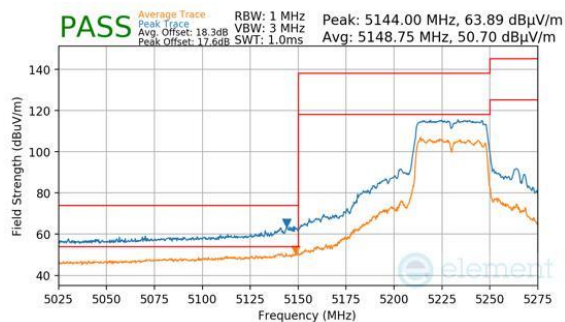


Plot 7-143. CDD (Peak & Average, Ch.46, 802.11n, MCS15)

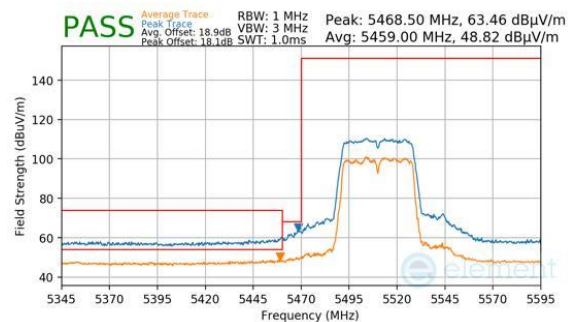

Plot 7-146. CDD (Peak & Average, Ch.102, 802.11n, MCS15)

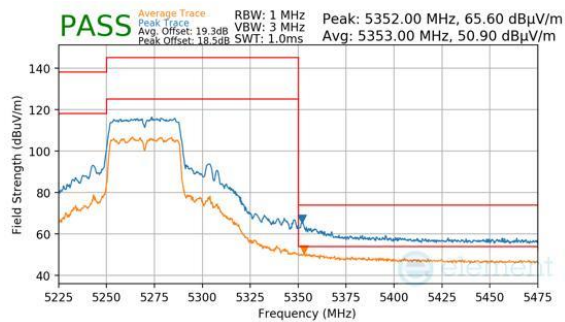

Plot 7-144. CDD (Peak & Average, Ch.54, 802.11n, MCS15)

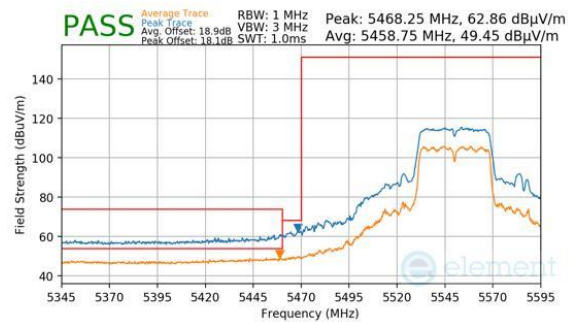


Plot 7-147. CDD (Peak & Average, Ch.110, 802.11n, MCS15)


FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 119 of 134

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

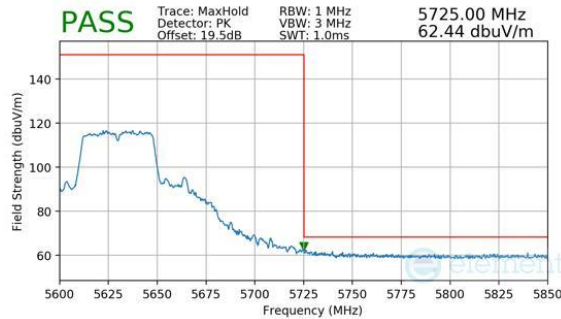


Plot 7-148. CDD (Peak, Ch.126 (FCC ONLY), 802.11n, MCS15)

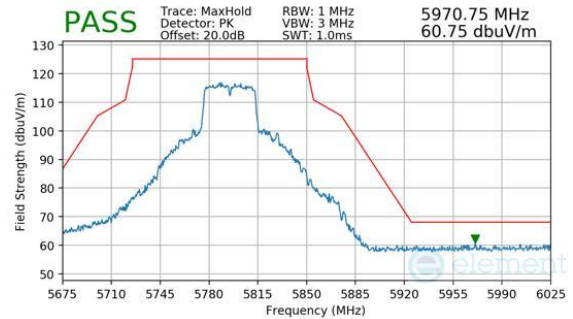


Plot 7-151. CDD (Peak, Ch.159, 802.11n, MCS15)

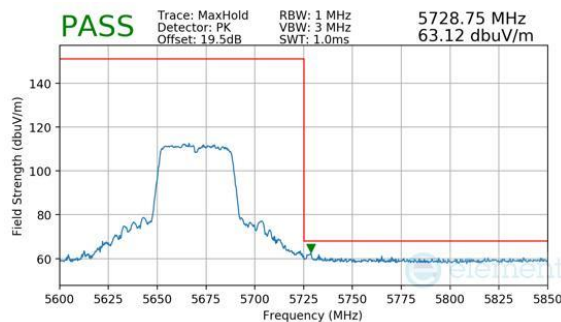


Plot 7-149. CDD (Peak, Ch.134, 802.11n, MCS15)

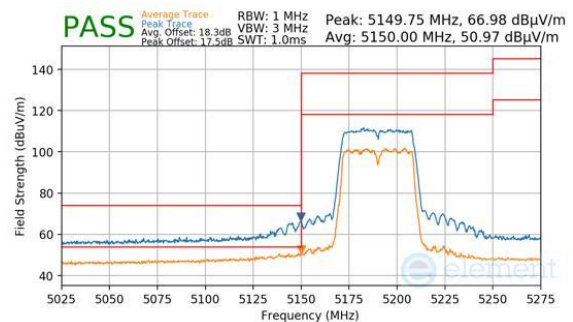

Plot 7-152. CDD (Peak & Average, Ch.38, 802.11ac, MCS9)

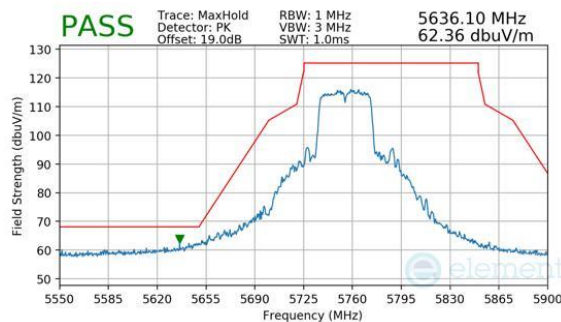

Plot 7-150. CDD (Peak, Ch.151, 802.11n, MCS15)

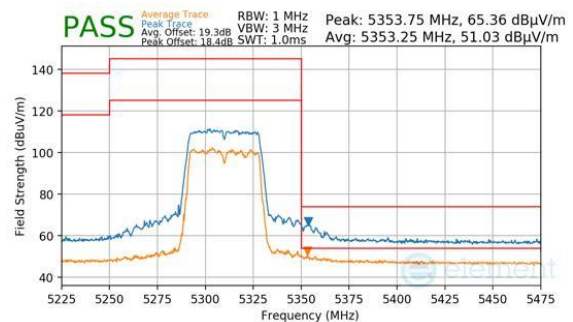


Plot 7-153. CDD (Peak & Average, Ch.62, 802.11ac, MCS9)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device		Page 120 of 134


V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.6.11 CDD Radiated Band Edge Measurements (80MHz BW)

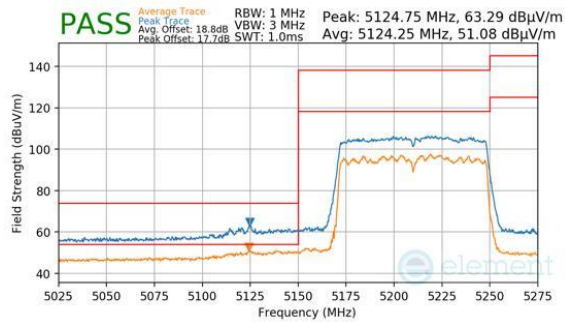


Plot 7-154. CDD (Peak & Average, Ch.42, 802.11ac, MCS9)

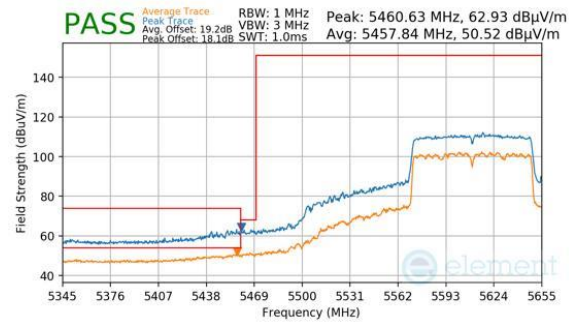


Plot 7-157. CDD (Peak & Average, Ch.122 (FCC ONLY), 802.11ac, MCS9)

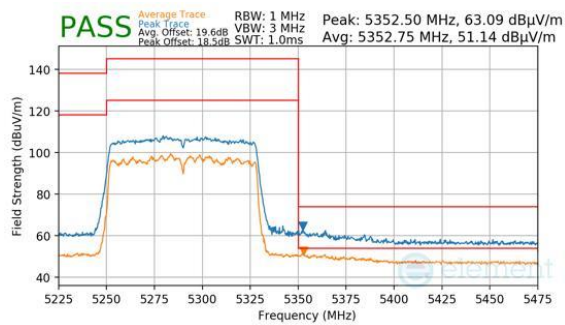


Plot 7-155. CDD (Peak & Average, Ch.58, 802.11ac, MCS9)

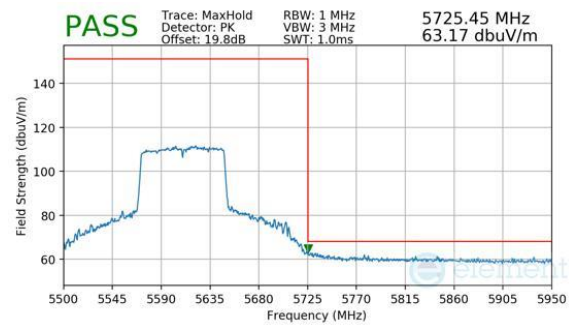

Plot 7-158. CDD (Peak, Ch.122 (FCC ONLY), 802.11ac, MCS9)

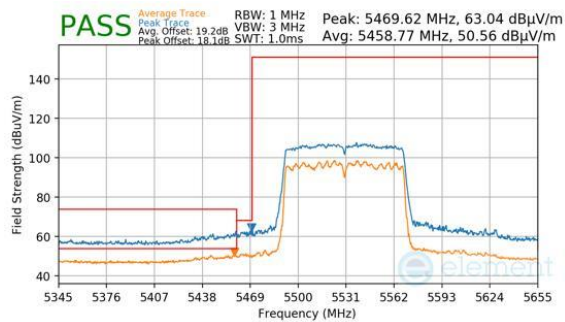

Plot 7-156. CDD (Peak & Average, Ch.106, 802.11ac, MCS9)

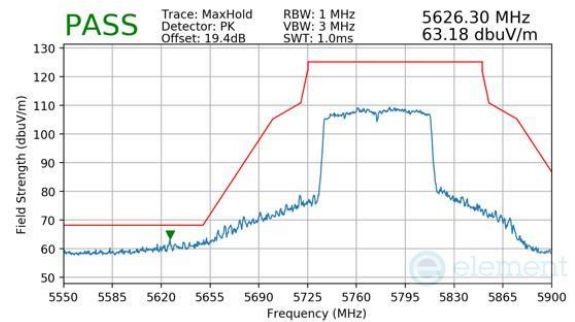


Plot 7-159. CDD (Peak, Ch.155, 802.11ac, MCS9)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 121 of 134

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

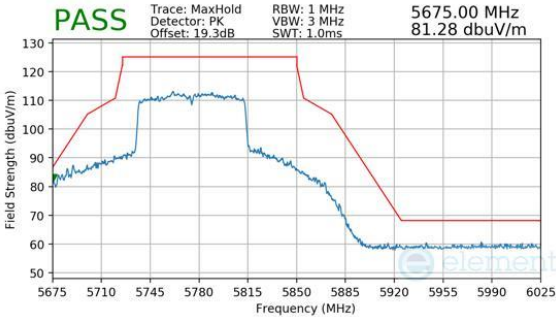

Plot 7-160. CDD (Peak, Ch.155, 802.11ac, MCS9)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 122 of 134

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-80 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-80. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 123 of 134

V 11.0 06/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

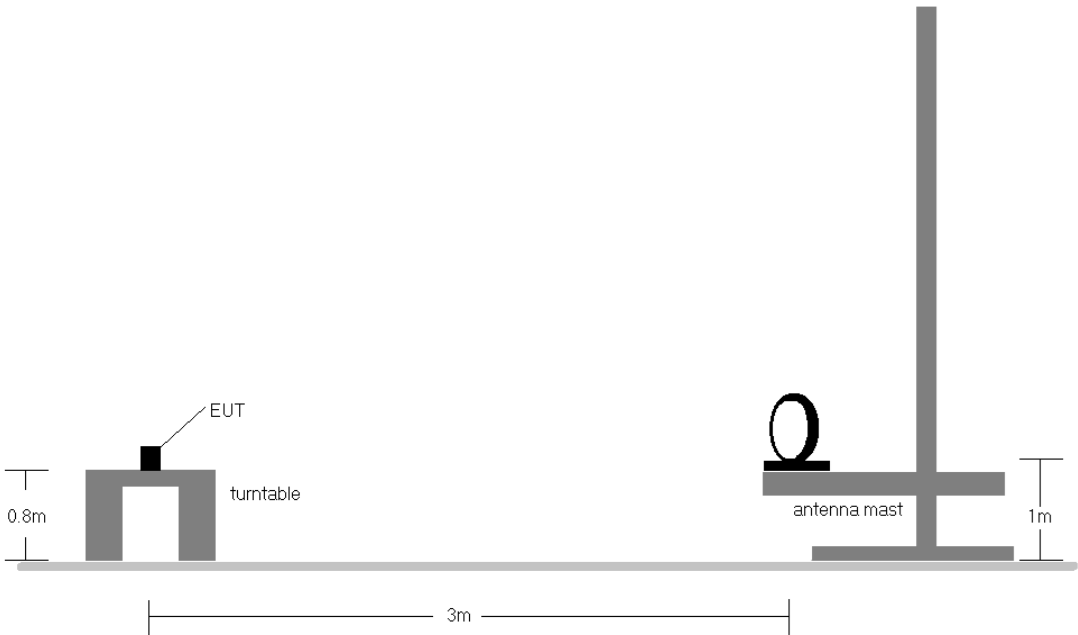


Figure 7-6. Radiated Test Setup < 30MHz

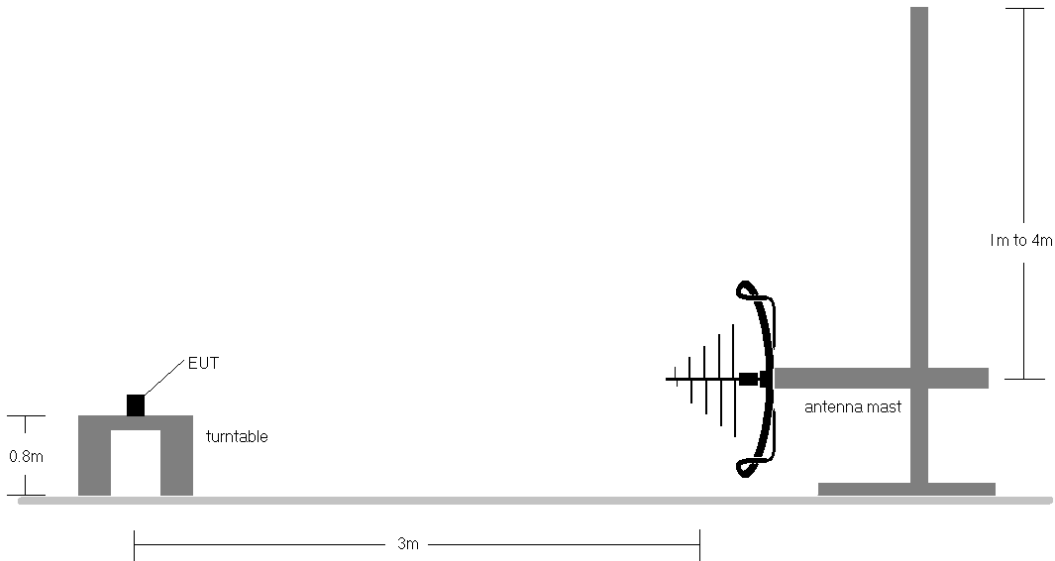


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 124 of 134

V 11.0 06/2025

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-80.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
4. Emissions were measured at a 3 meter test distance.
5. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
6. No spurious emissions were detected within 20dB of the limit below 30MHz.
7. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
8. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor to USB-C Power Pack to Magnetic Charging Cable
 - b. EUT powered by host PC via USB-C Power Pack to Magnetic Charging Cable
9. All antenna configurations were investigated and only the worst case is reported.
10. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamp Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCGA3416 IC: 579C-A3416	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 125 of 134

V 11.0 06/2025

7.7.1 CDD Radiated Spurious Emissions Measurements (Below 1GHz)

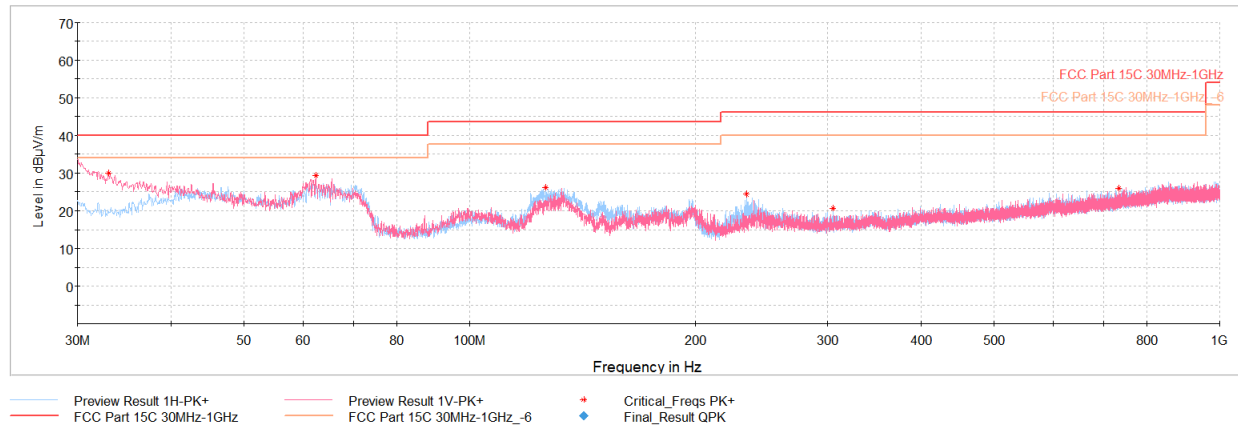

Plot 7-161. Radiated Spurious Emissions below 1GHz CDD , 802.11n, Ch.40 with AC/DC adaptor to USB-C Power Pack


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
33.01	Max-Peak	V	100	355	-57.96	-19.17	29.87	40.00	-10.13
62.40	Max-Peak	V	100	359	-59.87	-17.82	29.31	40.00	-10.69
126.42	Max-Peak	H	300	19	-60.34	-20.67	25.99	43.52	-17.53
233.80	Max-Peak	H	100	287	-65.63	-16.96	24.41	46.02	-21.61
304.95	Max-Peak	H	100	84	-70.87	-15.52	20.61	46.02	-25.41
733.98	Max-Peak	V	300	274	-74.13	-6.92	25.95	46.02	-20.07

Table 7-81. Radiated Spurious Emissions below 1GHz, 802.11n, Ch.40 with AC/DC adaptor to USB-C Power Pack

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 126 of 134

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

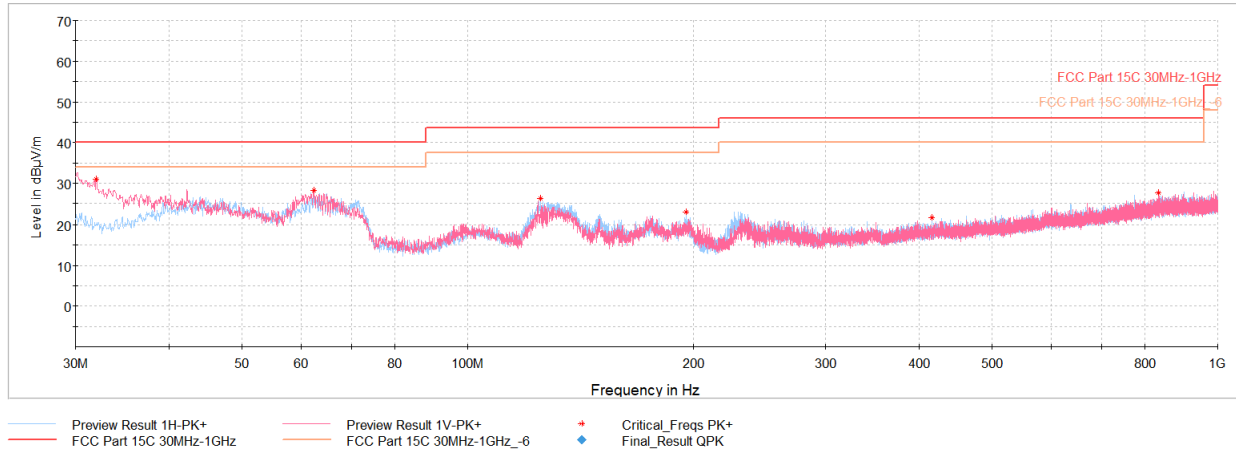

Plot 7-162. Radiated Spurious Emissions below 1GHz CDD , 802.11ax (SU), Ch.40 with AC/DC adaptor to USB-C Power Pack

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
31.99	Max-Peak	V	100	331	-56.59	-19.47	30.94	40.00	-9.06
62.35	Max-Peak	V	100	0	-61.04	-17.81	28.15	40.00	-11.85
125.21	Max-Peak	H	300	5	-60.30	-20.51	26.19	43.52	-17.33
195.43	Max-Peak	H	100	292	-66.14	-17.69	23.17	43.52	-20.35
415.92	Max-Peak	H	300	324	-72.77	-12.41	21.82	46.02	-24.20
833.16	Max-Peak	V	100	335	-74.07	-5.33	27.60	46.02	-18.42

Table 7-82. Radiated Spurious Emissions below 1GHz, 802.11ax (SU), Ch.40 with AC/DC adaptor to USB-C Power Pack

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 127 of 134

V 11.0 06/2025

7.8 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-83. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 128 of 134

V 11.0 06/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

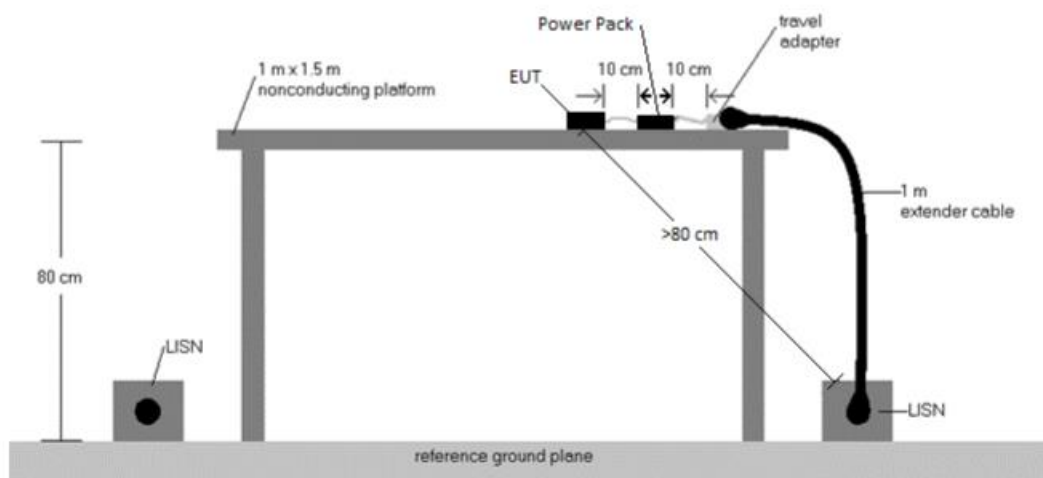



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor to USB-C Power Pack to Magnetic Charging Cable
 - b. EUT powered by host PC via USB-C Power Pack to Magnetic Charging Cable
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 129 of 134

V 11.0 06/2025

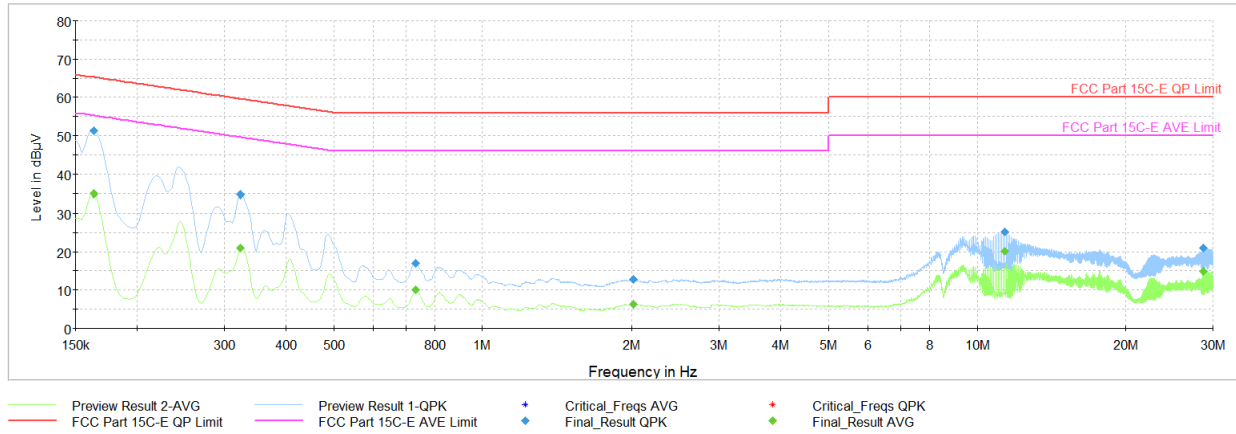

Plot 7-163. AC Line Conducted Plot with 802.11n CDD – Ch.40 (L1), with AC/DC adaptor to USB-C Power Pack


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	—	35.07	55.28	-20.22	L1	GND
0.164	FINAL	51.4	—	65.28	-13.92	L1	GND
0.323	FINAL	—	21.00	49.62	-28.63	L1	GND
0.323	FINAL	34.8	—	59.62	-24.85	L1	GND
0.733	FINAL	—	10.00	46.00	-36.00	L1	GND
0.733	FINAL	16.9	—	56.00	-39.06	L1	GND
2.011	FINAL	12.8	—	56.00	-43.19	L1	GND
2.011	FINAL	—	6.36	46.00	-39.64	L1	GND
11.369	FINAL	25.2	—	60.00	-34.78	L1	GND
11.369	FINAL	—	20.17	50.00	-29.83	L1	GND
28.696	FINAL	—	14.91	50.00	-35.09	L1	GND
28.696	FINAL	20.9	—	60.00	-39.15	L1	GND

Table 7-84. AC Line Conducted Data with 802.11n CDD – Ch.40 (L1) with AC/DC adaptor to USB-C Power Pack

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 130 of 134

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

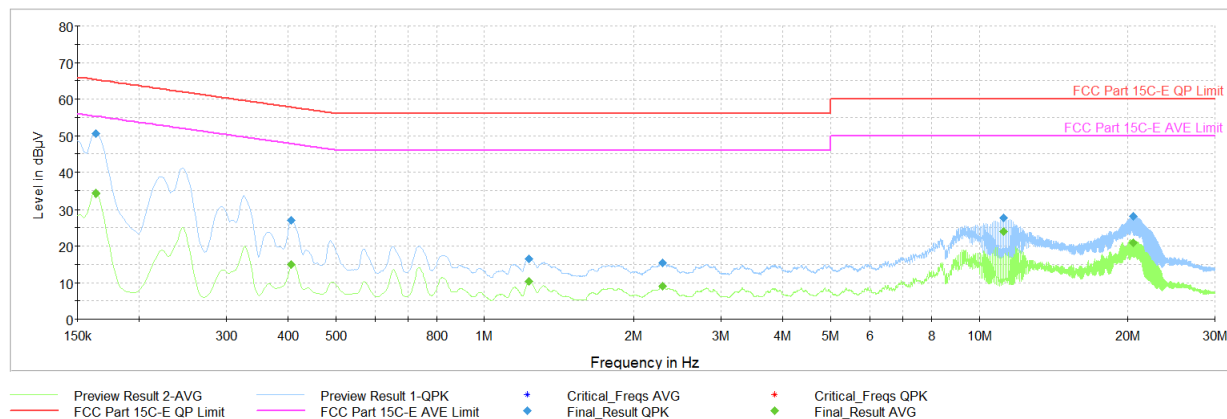

Plot 7-164. AC Line Conducted Plot with 802.11n CDD – Ch.40 (N), with AC/DC adaptor to USB-C Power Pack


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	—	34.36	55.28	-20.92	N	GND
0.164	FINAL	50.5	—	65.28	-14.74	N	GND
0.407	FINAL	—	14.97	47.72	-32.75	N	GND
0.407	FINAL	27.1	—	57.72	-30.67	N	GND
1.232	FINAL	—	10.30	46.00	-35.70	N	GND
1.232	FINAL	16.6	—	56.00	-39.44	N	GND
2.290	FINAL	15.4	—	56.00	-40.61	N	GND
2.290	FINAL	—	8.91	46.00	-37.09	N	GND
11.204	FINAL	27.6	—	60.00	-32.40	N	GND
11.204	FINAL	—	24.05	50.00	-25.95	N	GND
20.528	FINAL	—	20.89	50.00	-29.11	N	GND
20.528	FINAL	28.2	—	60.00	-31.85	N	GND

Table 7-85. AC Line Conducted Data with 802.11n CDD – Ch.40 (N), with AC/DC adaptor to USB-C Power Pack

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 131 of 134

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

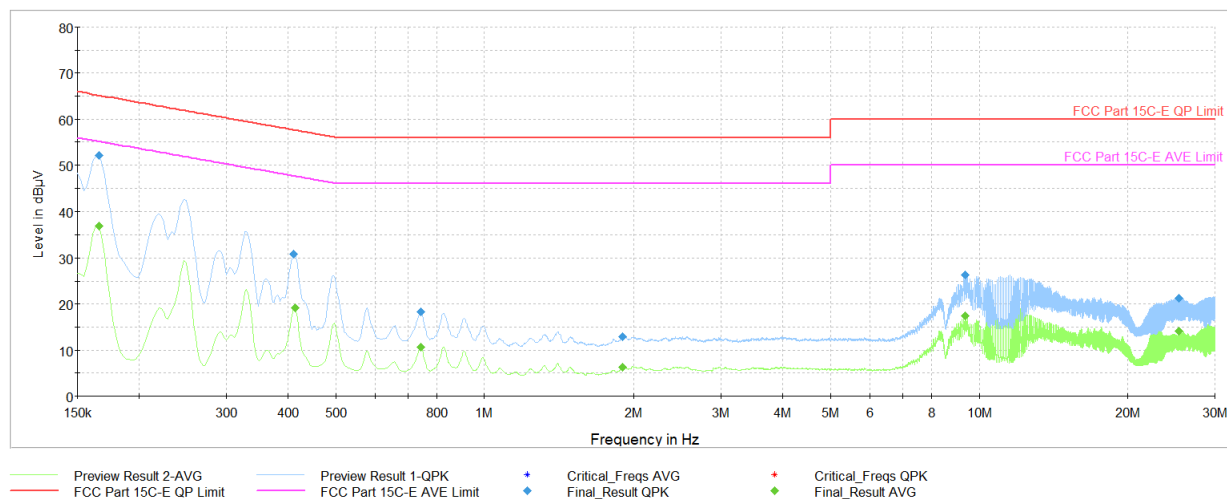

Plot 7-165. AC Line Conducted Plot with 802.11ax(SU) CDD – Ch.40 (L1), with AC/DC adaptor to USB-C Power Pack


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.166	FINAL	—	36.85	55.17	-18.32	L1	GND
0.166	FINAL	52.1	—	65.17	-13.08	L1	GND
0.411	FINAL	30.8	—	57.63	-26.86	L1	GND
0.413	FINAL	—	19.23	47.58	-28.35	L1	GND
0.744	FINAL	—	10.69	46.00	-35.31	L1	GND
0.744	FINAL	18.3	—	56.00	-37.67	L1	GND
1.894	FINAL	12.8	—	56.00	-43.16	L1	GND
1.896	FINAL	—	6.29	46.00	-39.71	L1	GND
9.373	FINAL	26.3	—	60.00	-33.73	L1	GND
9.375	FINAL	—	17.46	50.00	-32.54	L1	GND
25.391	FINAL	—	14.19	50.00	-35.81	L1	GND
25.391	FINAL	21.3	—	60.00	-38.72	L1	GND

Table 7-86. AC Line Conducted Data with 802.11ax(SU) CDD – Ch.40 (L1) with AC/DC adaptor to USB-C Power Pack

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 132 of 134

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

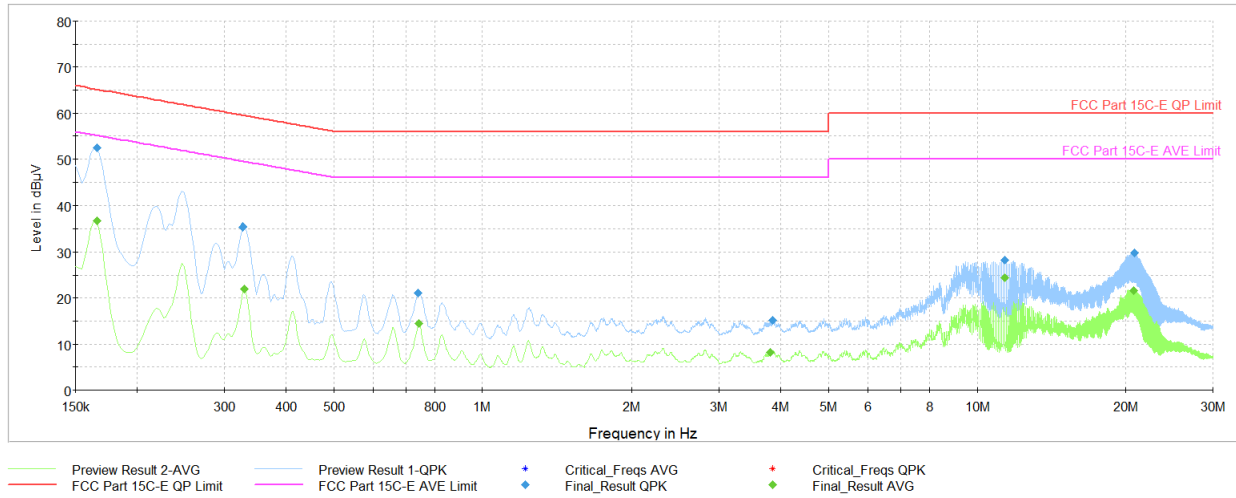

Plot 7-166. AC Line Conducted Plot with 802.11ax(SU) CDD – Ch.40 (N), with AC/DC adaptor to USB-C Power Pack

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.166	FINAL	—	36.60	55.17	-18.57	N	GND
0.166	FINAL	52.4	—	65.17	-12.79	N	GND
0.328	FINAL	35.4	—	59.51	-24.16	N	GND
0.330	FINAL	—	21.88	49.45	-27.57	N	GND
0.740	FINAL	21.0	—	56.00	-34.99	N	GND
0.744	FINAL	—	14.39	46.00	-31.61	N	GND
3.813	FINAL	—	8.21	46.00	-37.79	N	GND
3.847	FINAL	15.2	—	56.00	-40.82	N	GND
11.369	FINAL	—	24.33	50.00	-25.67	N	GND
11.371	FINAL	28.3	—	60.00	-31.70	N	GND
20.771	FINAL	—	21.67	50.00	-28.33	N	GND
20.774	FINAL	29.8	—	60.00	-30.21	N	GND

Table 7-87. AC Line Conducted Data with 802.11ax(SU) CDD – Ch.40 (N), with AC/DC adaptor to USB-C Power Pack

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 133 of 134

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Head Mounted Device FCC ID: BCGA3416** and **IC: 579C-A3416** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-06.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 134 of 134

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.