




RU52

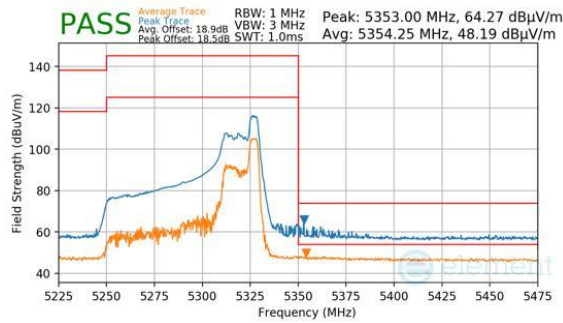


Plot 7-136. Ant2 (Peak & Average, RU52, Index 52, Ch.58, MCS11)

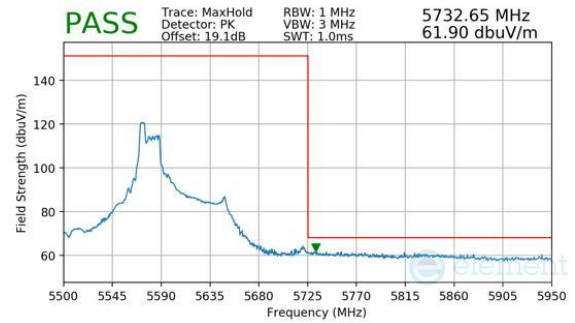

Plot 7-139. Ant2 (Peak, RU52, Index 37, Ch.122 (FCC only), MCS11)

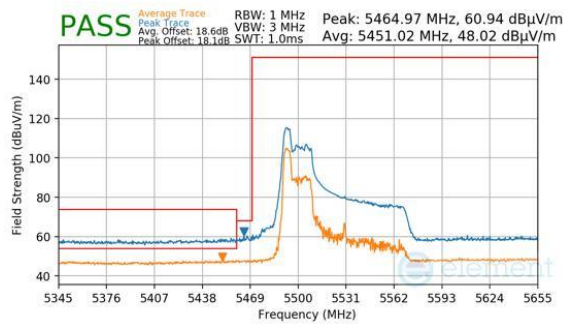

Plot 7-137. Ant2 (Peak & Average, RU52, Index 37, Ch.106, MCS11)

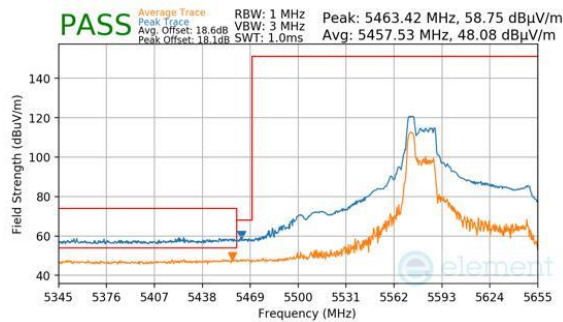


Plot 7-138. Ant2 (Peak & Average, RU52, Index 37, Ch.122 (FCC only), MCS11)

FCC ID: BCGA3416 IC: 579C-A3416			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device		


V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


RU996

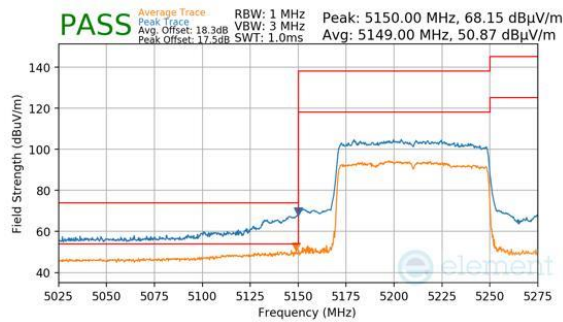


Plot 7-140. Ant2 (Peak & Average, RU996, Index 67, Ch.42, MCS11)

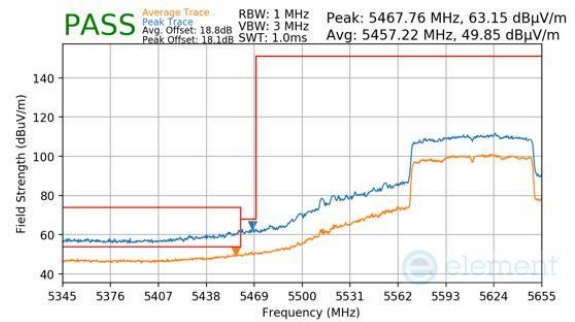


Plot 7-143. Ant2 (Peak & Average, RU996, Index 67, Ch.122 (FCC only), MCS11)

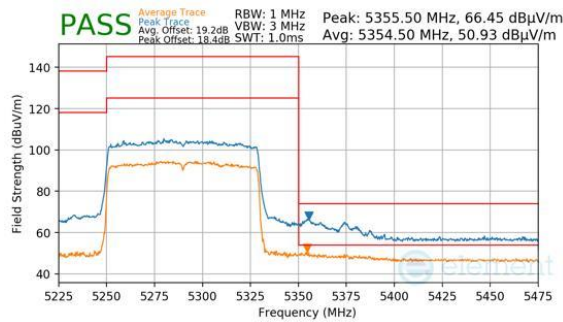


Plot 7-141. Ant2 (Peak & Average, RU996, Index 67, Ch.58, MCS11)

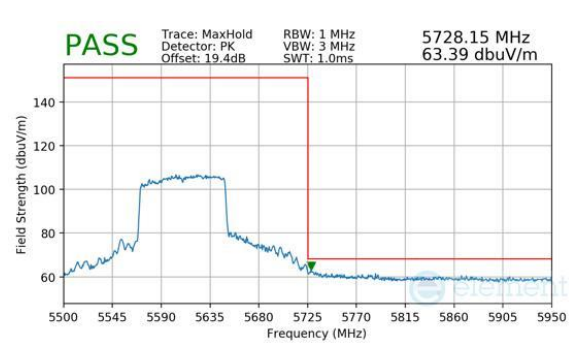

Plot 7-144. Ant2 (Peak, RU996, Index 67, Ch.122 (FCC only), MCS11)

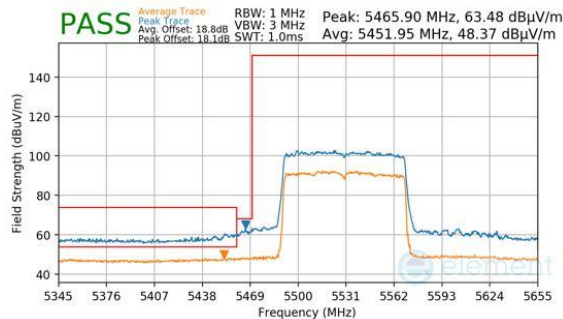

Plot 7-142. Ant2 (Peak & Average, RU996, Index 67, Ch.106, MCS11)

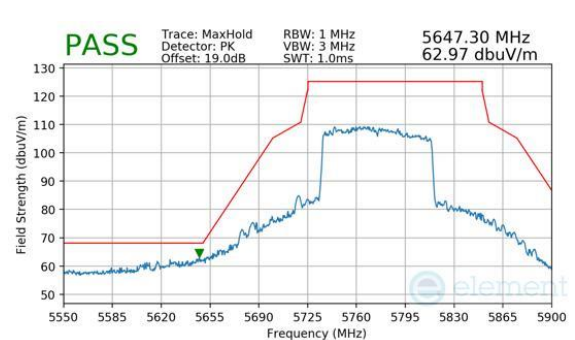


Plot 7-145. Ant2 (Peak, RU996, Index 67, Ch.155, MCS11)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 125 of 150

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

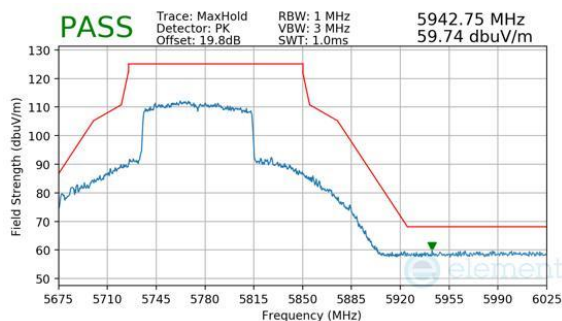




Plot 7-146. Ant2 (Peak, RU996, Index 67, Ch.155, MCS11)

FCC ID: BCGA3416 IC: 579C-A3416	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 126 of 150

V 10.6 10/27/2023

7.6.1 CDD Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]


RU26

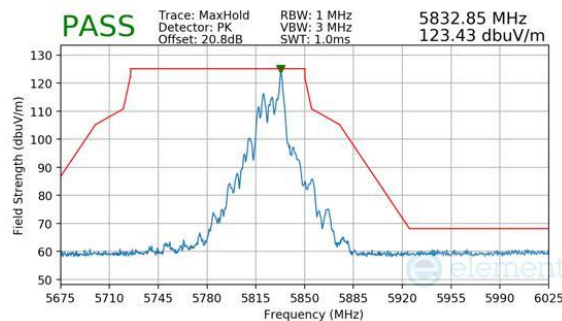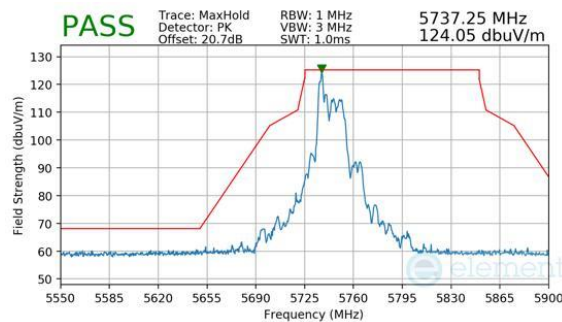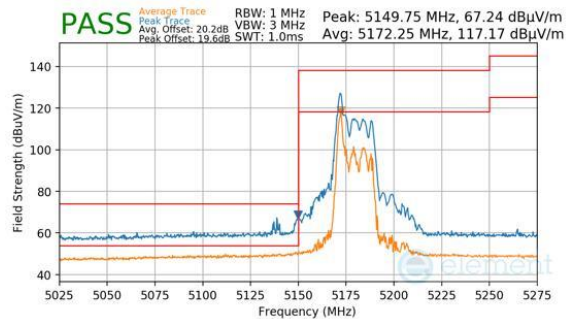


FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 127 of 150

V 10.6 10/27/2023


RU52

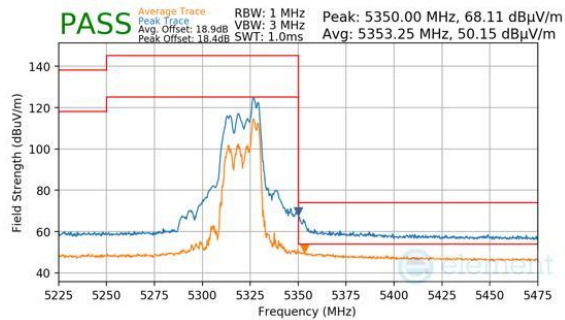

Plot 7-150. CDD (Peak & Average, RU52, Index 40, Ch.64, MCS11)

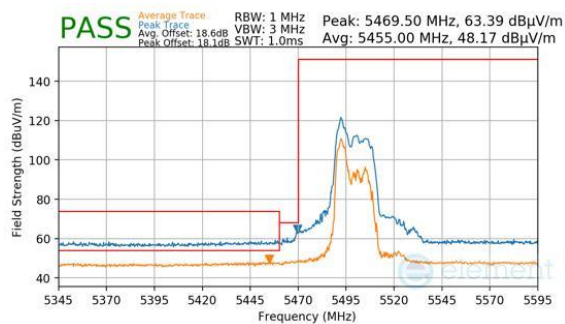

Plot 7-151. CDD (Peak & Average, RU52, Index 37, Ch.100, MCS11)

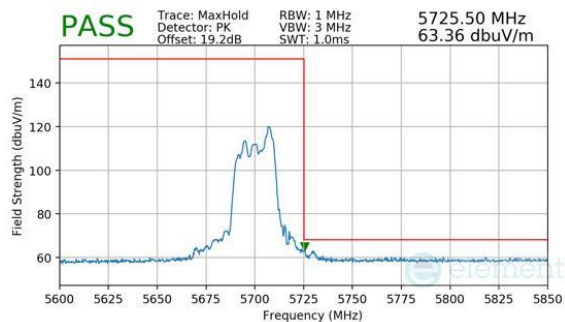


Plot 7-152. CDD (Peak, RU52, Index 40, Ch.140, MCS11)


FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 128 of 150

V 10.6 10/27/2023


RU242

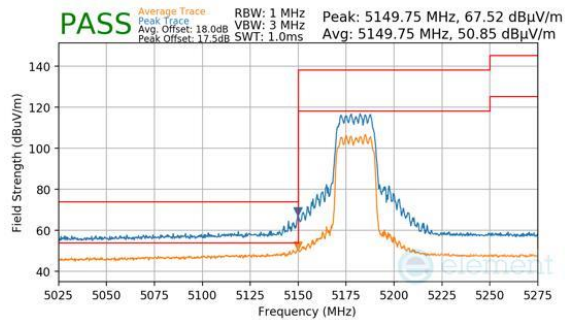


Plot 7-153. CDD (Peak & Average, RU242, Index 61, Ch.36, MCS11)

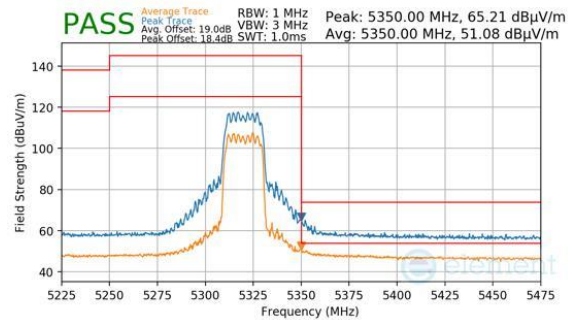


Plot 7-156. CDD (Peak & Average, RU242, Index 61, Ch.64, MCS11)

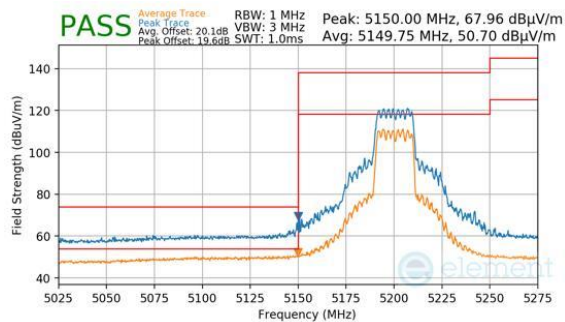


Plot 7-154. CDD (Peak & Average, RU242, Index 61, Ch.40, MCS11)

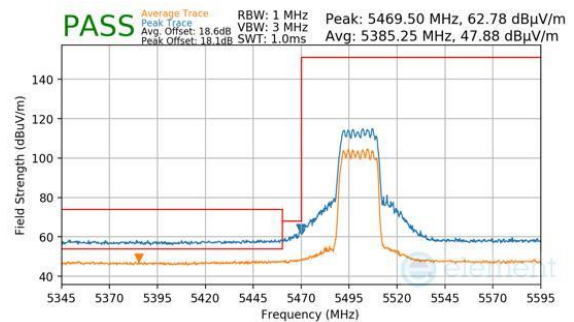

Plot 7-157. CDD (Peak & Average, RU242, Index 61, Ch.100, MCS11)

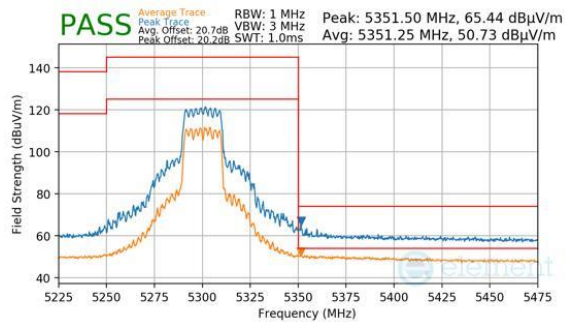

Plot 7-155. CDD (Peak & Average, RU242, Index 61, Ch.60, MCS11)

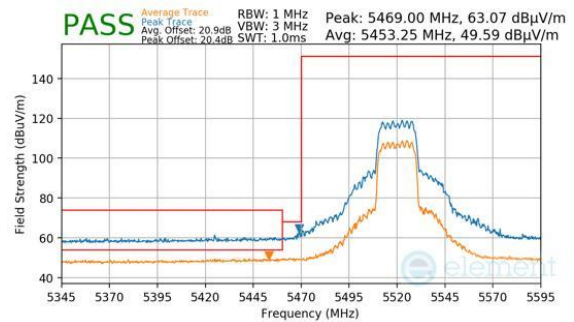


Plot 7-158. CDD (Peak & Average, RU242, Index 61, Ch.104, MCS11)


FCC ID: BCGA3416 IC: 579C-A3416			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device		

V 10.6 10/27/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

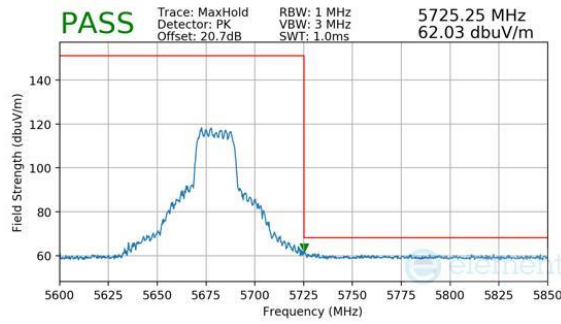


Plot 7-159. CDD (Peak, RU242, Index 61, Ch.136, MCS11)

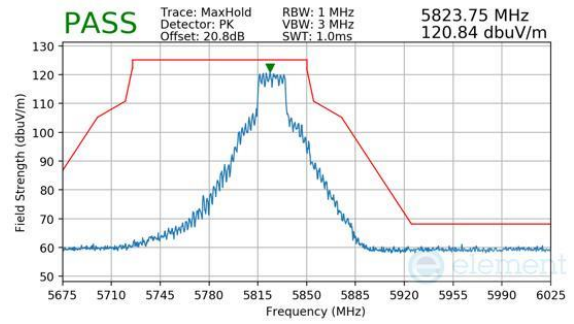

Plot 7-162. CDD (Peak, RU242, Index 61, Ch.165, MCS11)

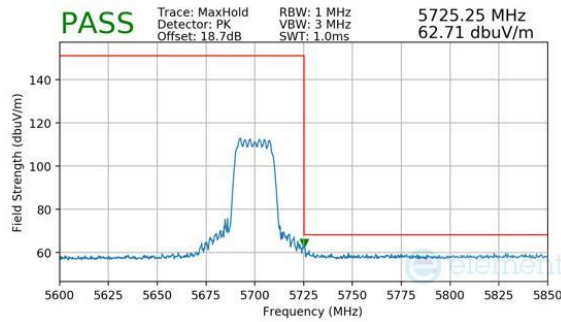

Plot 7-160. CDD (Peak, RU242, Index 61, Ch.140, MCS11)

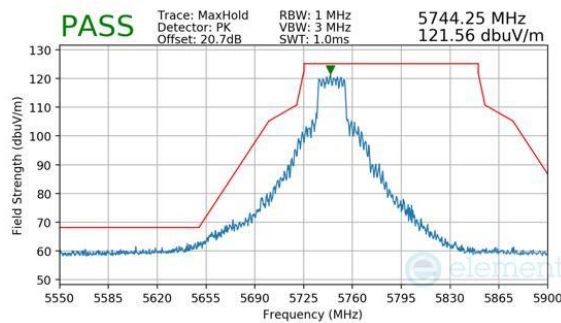


Plot 7-161. CDD (Peak, RU242, Index 61, Ch.149, MCS11)

FCC ID: BCGA3416 IC: 579C-A3416			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device		


V 10.6 10/27/2023

7.6.1 CDD Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]


RU26

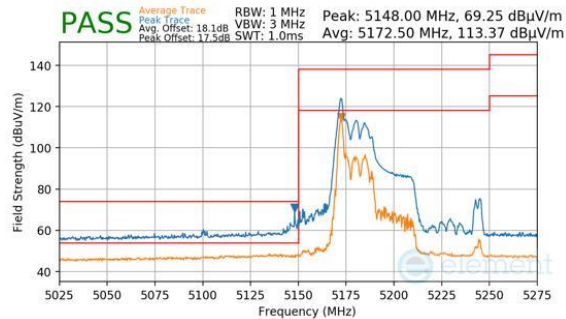

Plot 7-163. CDD (Peak & Average, RU26, Index 0, Ch.38, MCS11)

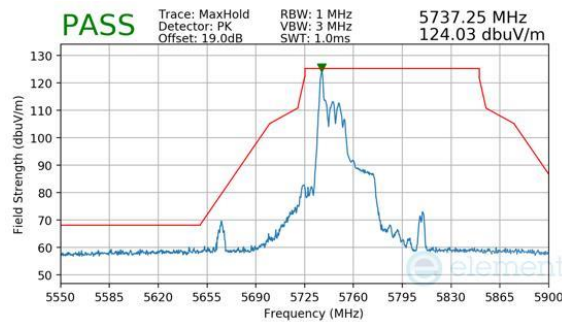

Plot 7-164. CDD (Peak, RU26, Index 0, Ch.151, MCS11)



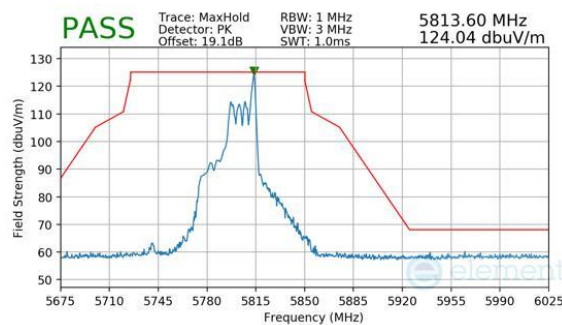


Plot 7-165. CDD (Peak, RU26, Index 17, Ch.159, MCS11)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 131 of 150

V 10.6 10/27/2023


RU52

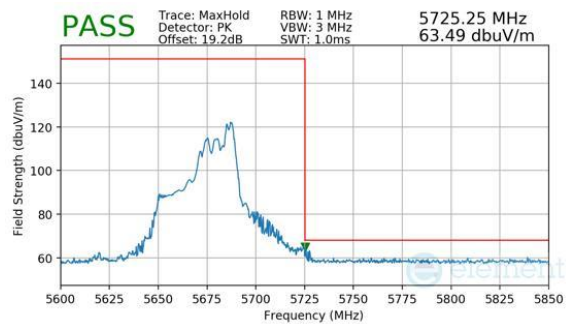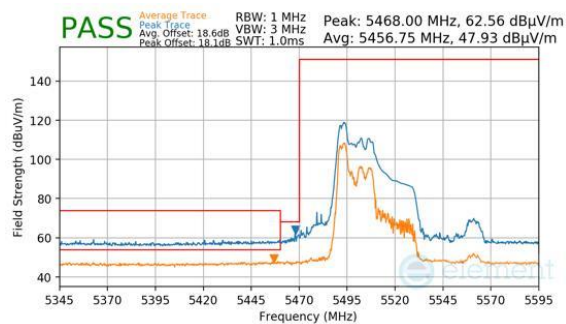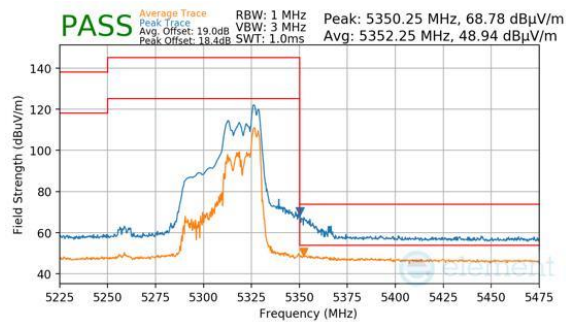


FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device		Page 132 of 150

V 10.6 10/27/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

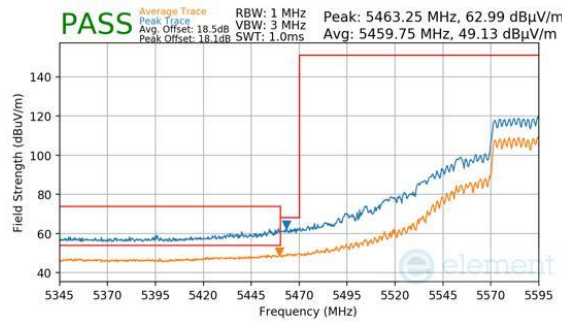


Plot 7-175. CDD (Peak & Average, RU484, Index 65, Ch.118, (FCC only), MCS11)

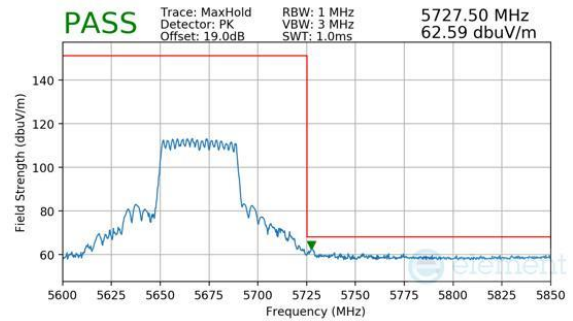


Plot 7-178. CDD (Peak, RU484, Index 65, Ch.134, MCS11)

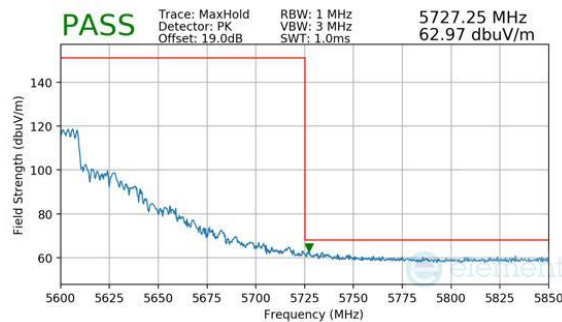


Plot 7-176. CDD (Peak, RU484, Index 65, Ch.118 (FCC only), MCS11)

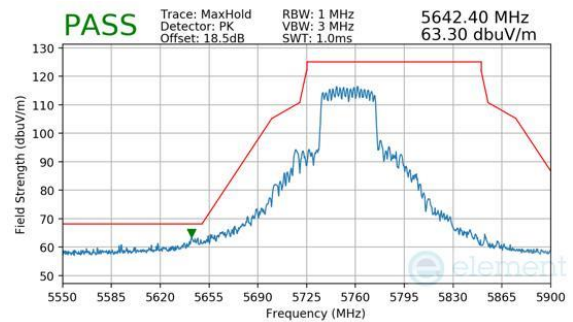

Plot 7-179. CDD (Peak, RU484, Index 65, Ch.151, MCS11)

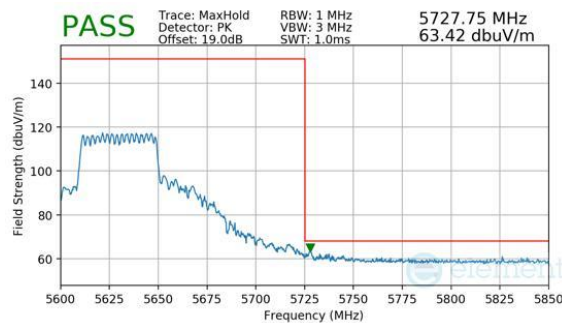

Plot 7-177. CDD (Peak, RU484, Index 65, Ch.126 (FCC only), MCS11)

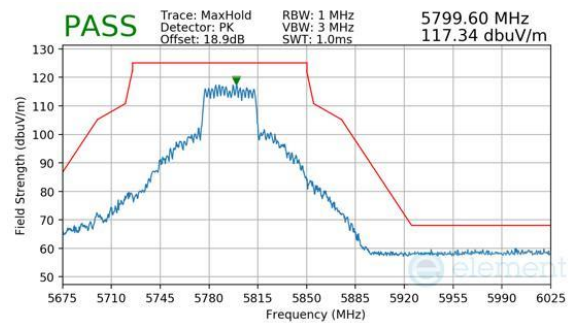


Plot 7-180. CDD (Peak, RU484, Index 65, Ch.159, MCS11)


FCC ID: BCGA3416 IC: 579C-A3416			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device		

7.6.1 CDD Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]


RU26

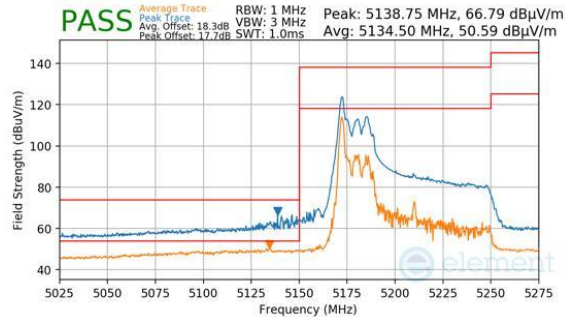

Plot 7-181. CDD (Peak & Average, RU26, Index 0, Ch.42, MCS11)

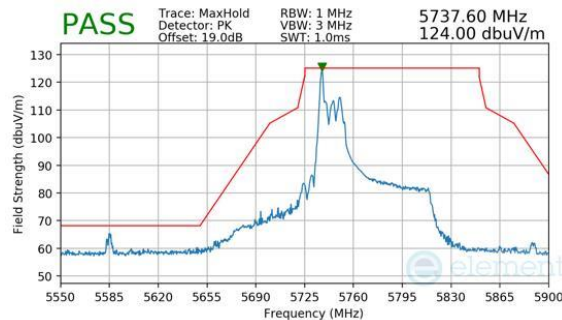

Plot 7-182. CDD (Peak, RU26, Index 0, Ch.155, MCS11)

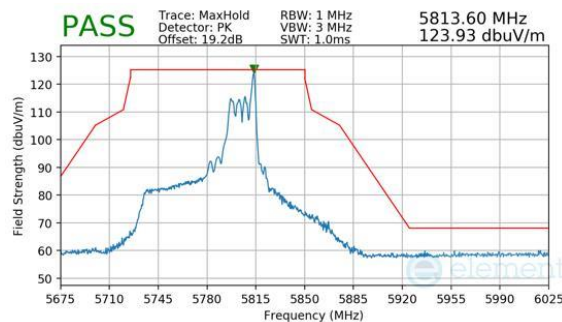


Plot 7-183. CDD (Peak, RU26, Index 36, Ch.155, MCS11)


FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 135 of 150

V 10.6 10/27/2023


RU52

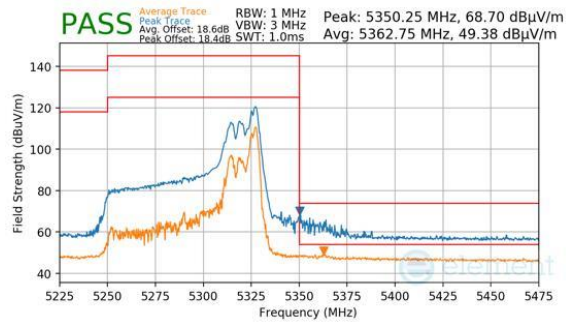

Plot 7-184. CDD (Peak & Average, RU52, Index 52, Ch.58, MCS11)

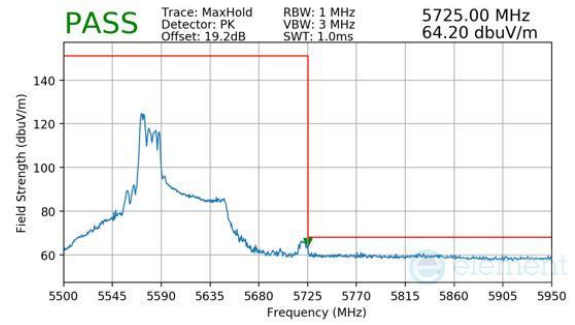

Plot 7-187. CDD (Peak, RU52, Index 37, Ch.122 (FCC only), MCS11)

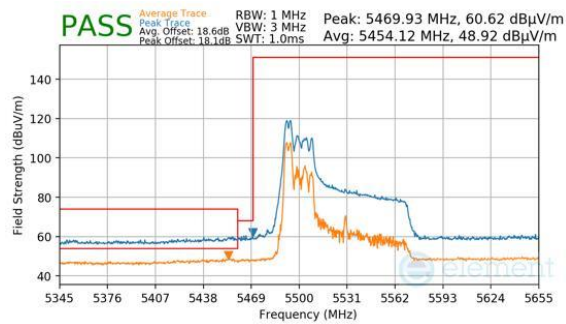

Plot 7-185. CDD (Peak & Average, RU52, Index 37, Ch.106, MCS11)




Plot 7-186. CDD (Peak & Average, RU52, Index 37, Ch.122 (FCC only), MCS11)


FCC ID: BCGA3416 IC: 579C-A3416			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device		Page 136 of 150

V 10.6 10/27/2023


RU996

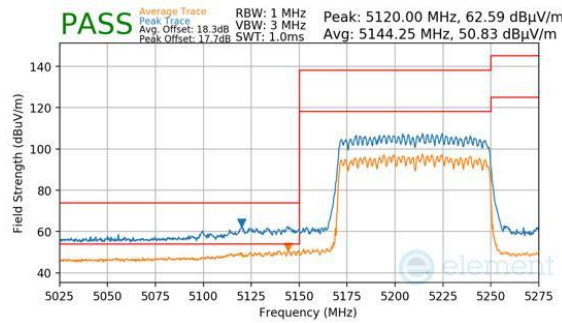


Plot 7-188. CDD (Peak & Average, RU996, Index 67, Ch.42, MCS11)

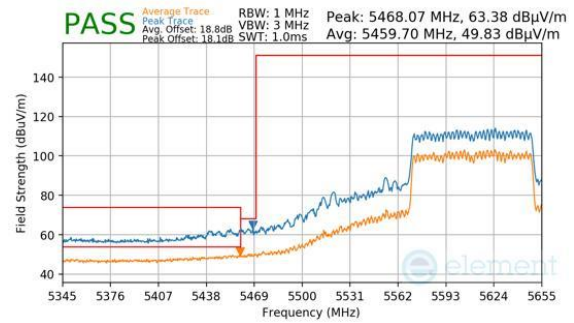


Plot 7-191. CDD (Peak & Average, RU996, Index 67, Ch.122 (FCC only), MCS11)

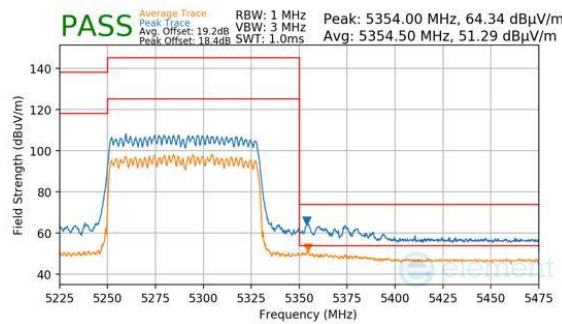


Plot 7-189. CDD (Peak & Average, RU996, Index 67, Ch.58, MCS11)

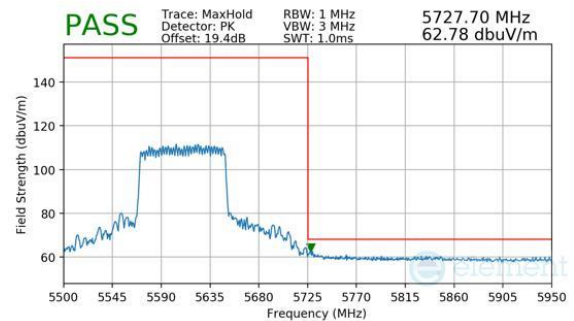

Plot 7-192. CDD (Peak, RU996, Index 67, Ch.122 (FCC only), MCS11)

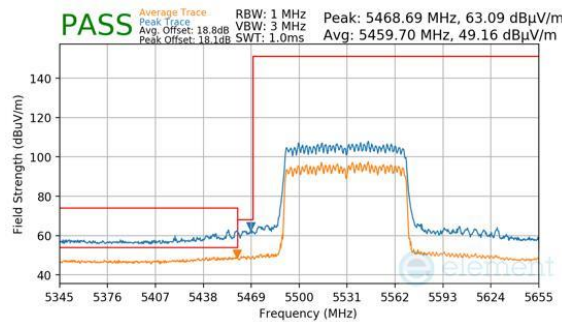

Plot 7-190. CDD (Peak & Average, RU996, Index 67, Ch.106, MCS11)

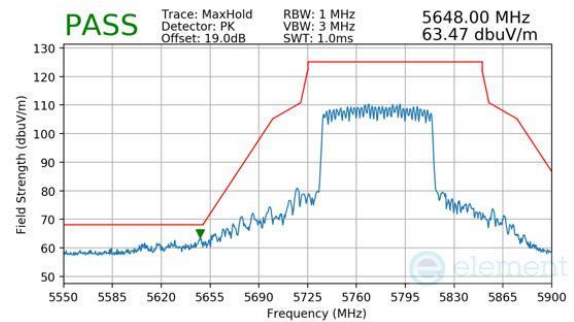


Plot 7-193. CDD (Peak, RU996, Index 67, Ch.155, MCS11)

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 137 of 150

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

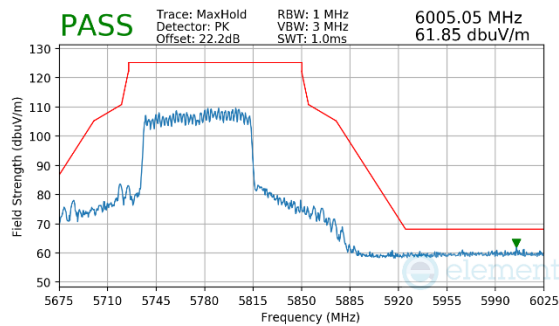

Plot 7-194. CDD (Peak, RU996, Index 67, Ch.155, MCS11)

FCC ID: BCGA3416 IC: 579C-A3416	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 138 of 150

V 10.6 10/27/2023

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-118 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-118. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 139 of 150

V 10.6 10/27/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

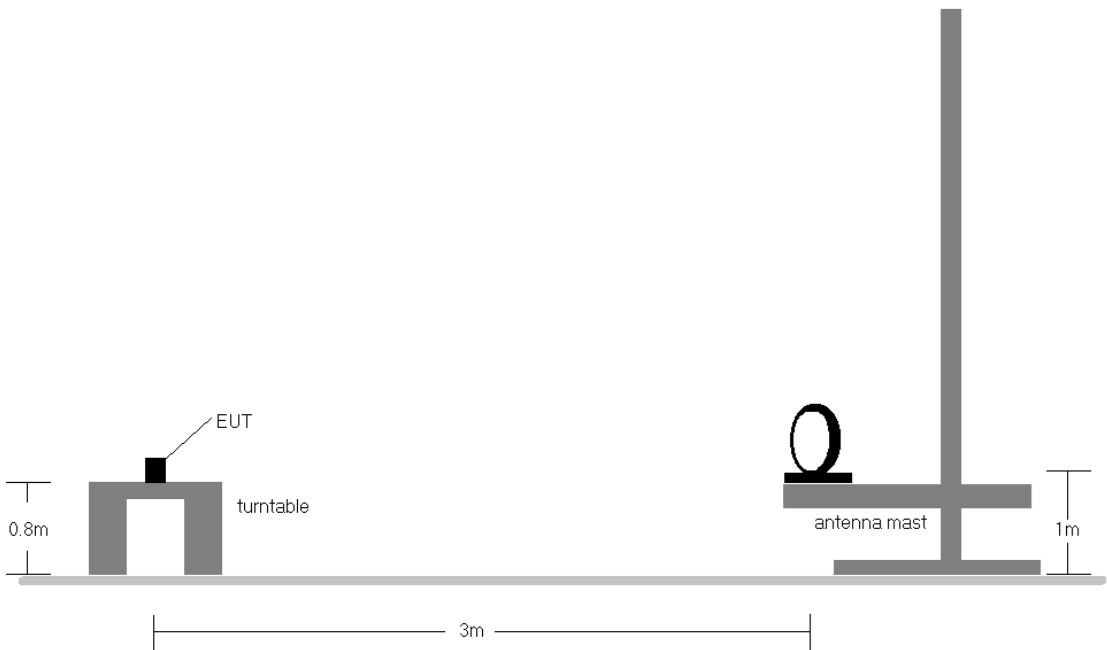


Figure 7-6. Radiated Test Setup < 30MHz

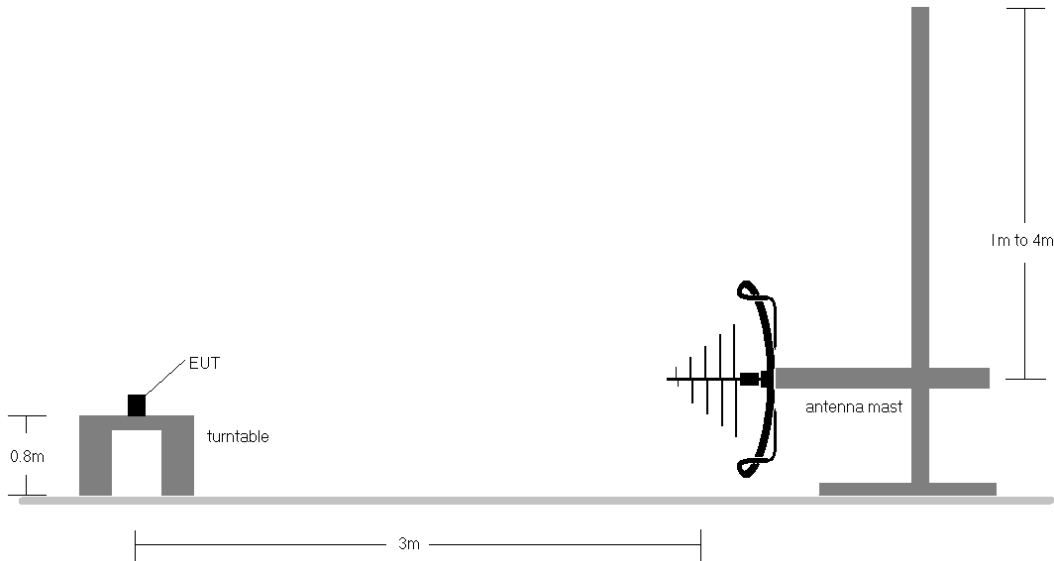


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 140 of 150

V 10.6 10/27/2023

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-118.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All antenna configurations and data rates were investigated and only the worst case are reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C Power Pack to Magnetic Charging Cable.
 - b. EUT powered by host PC via USB-C Power Pack to Magnetic Charging Cable.
11. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamplifier Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 141 of 150

V 10.6 10/27/2023

7.7.1 CDD Radiated Spurious Emissions (Below 1GHz)

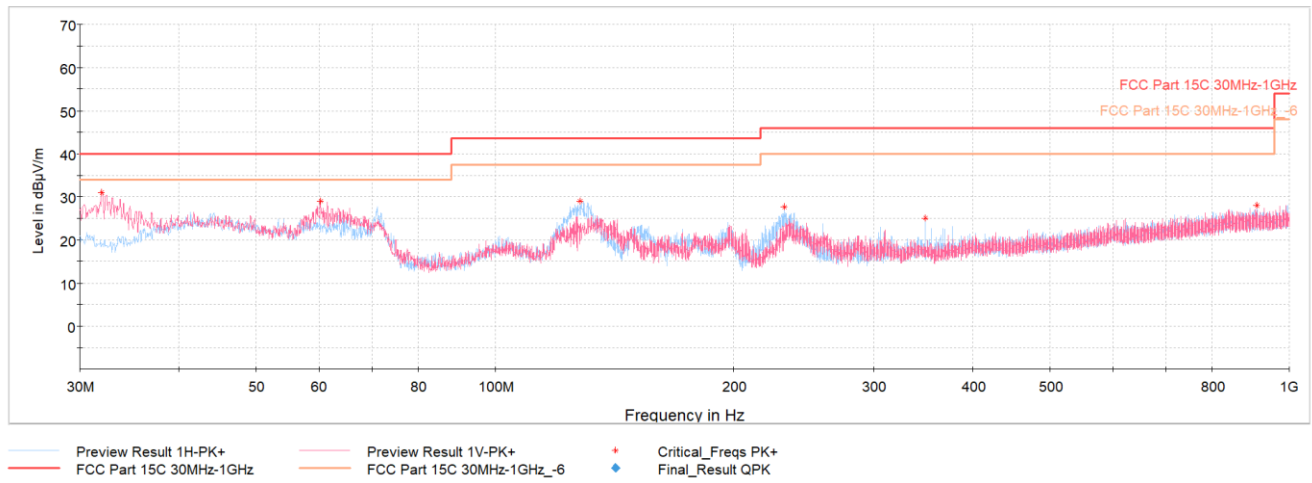

Plot 7-195. RSE below 1GHz CDD (RU26 – Ch.48), with AC/DC adapter to USB-C Power Pack

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
31.99	Max Peak	V	100	359	-56.52	-19.47	31.01	40.00	-8.99
60.26	Max Peak	V	100	0	-60.69	-17.22	29.09	40.00	-10.91
127.92	Max Peak	H	300	233	-57.09	-20.86	29.05	43.52	-14.47
231.62	Max Peak	H	100	109	-62.33	-17.04	27.63	46.02	-18.39
348.31	Max Peak	H	100	57	-68.21	-13.68	25.11	46.02	-20.91
910.91	Max Peak	H	100	16	-74.52	-4.39	28.09	46.02	-17.93

Table 7-119. RSE below 1GHz CDD (RU26 – Ch.48), with AC/DC adapter to USB-C Power Pack

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 142 of 150

V 10.6 10/27/2023

7.8 AC Line Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-121. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 144 of 150

V 10.6 10/27/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

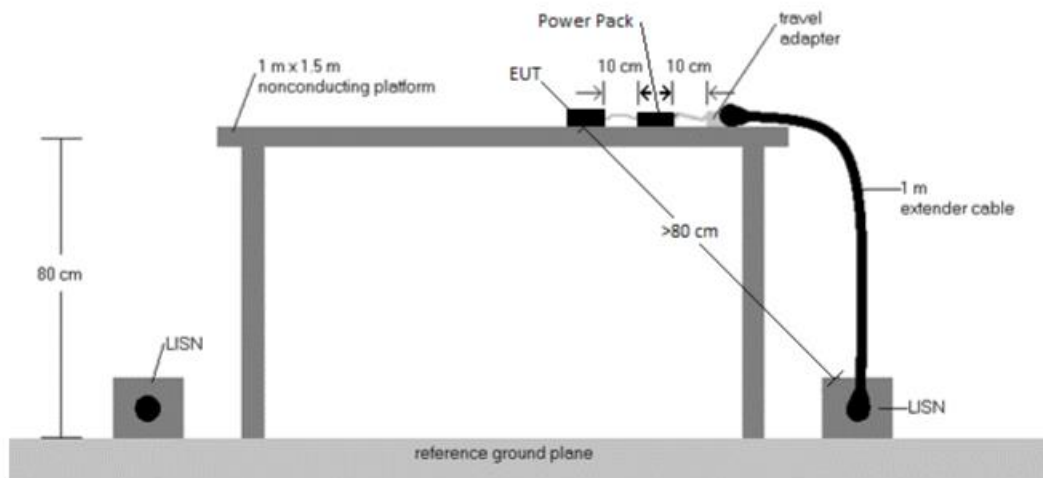



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C Power Pack to Magnetic Charging Cable
 - b. EUT powered by host PC via USB-C Power Pack to Magnetic Charging Cable
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA3416 IC: 579C-A3416	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 145 of 150

V 10.6 10/27/2023

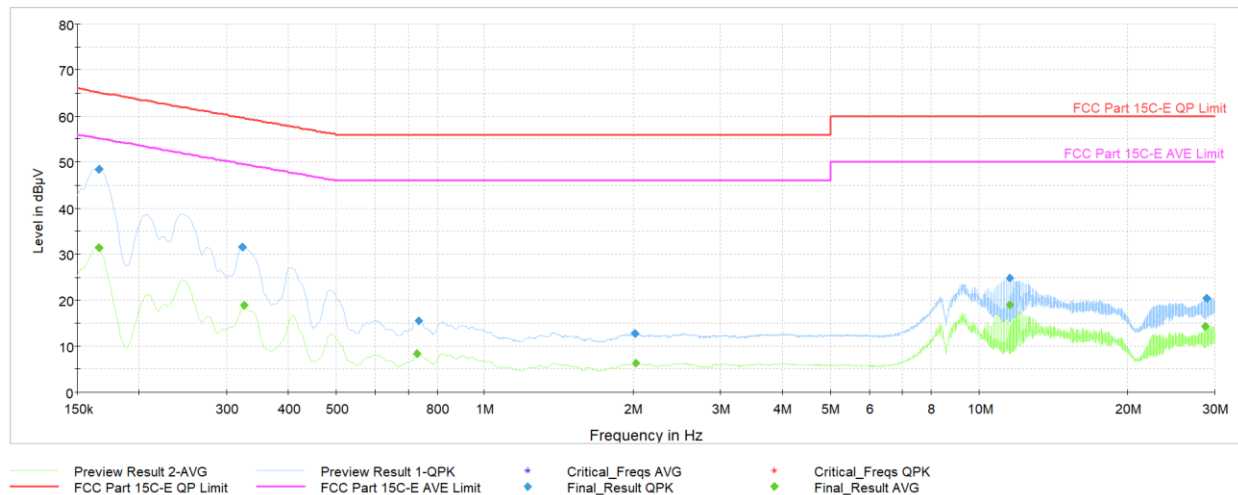

Plot 7-197. AC Line Conducted Plot with CDD 11ax UNII Band 1 – RU26 – Ch.48 (L1) with AC/DC adapter to USB-C Power Pack


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.166	FINAL	—	31.44	55.17	-23.74	L1	GND
0.166	FINAL	48.4	—	65.17	-16.73	L1	GND
0.323	FINAL	31.6	—	59.62	-28.01	L1	GND
0.326	FINAL	—	18.75	49.57	-30.81	L1	GND
0.731	FINAL	—	8.29	46.00	-37.71	L1	GND
0.735	FINAL	15.6	—	56.00	-40.44	L1	GND
2.015	FINAL	12.7	—	56.00	-43.33	L1	GND
2.020	FINAL	—	6.29	46.00	-39.71	L1	GND
11.535	FINAL	—	18.91	50.00	-31.09	L1	GND
11.537	FINAL	24.8	—	60.00	-35.24	L1	GND
28.700	FINAL	—	14.33	50.00	-35.67	L1	GND
28.867	FINAL	20.4	—	60.00	-39.65	L1	GND

Table 7-122. AC Line Conducted with CDD 11ax UNII Band 1 – RU26 – Ch.48 (L1) with AC/DC adapter to USB-C Power Pack

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 146 of 150

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

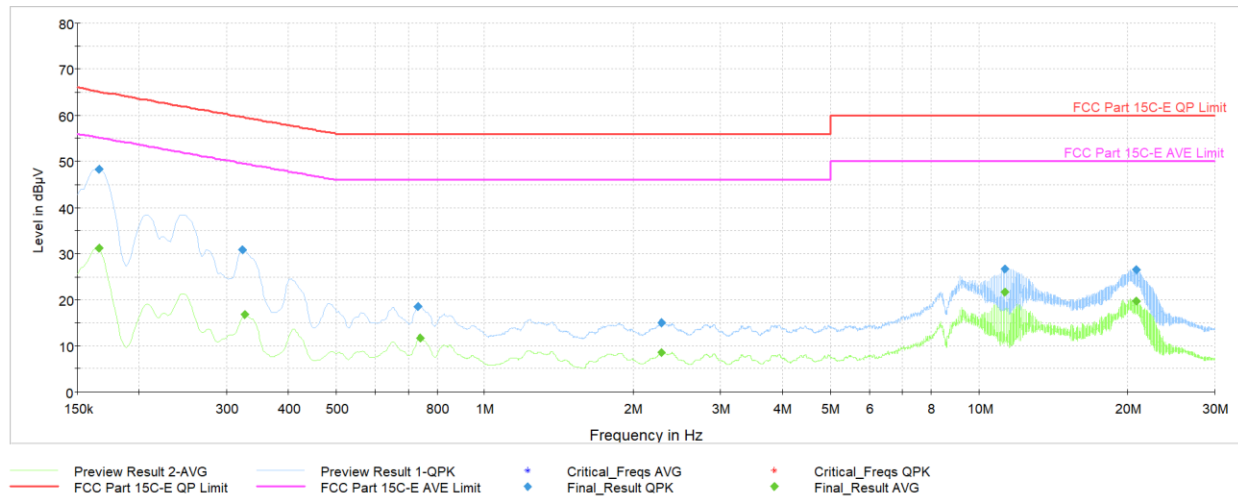

Plot 7-198. AC Line Conducted Plot with CDD 11ax UNII Band 1 – RU26 – Ch.48 (N) with AC/DC adapter to USB-C Power Pack


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.166	FINAL	—	31.19	55.17	-23.98	N	GND
0.166	FINAL	48.3	—	65.17	-16.87	N	GND
0.323	FINAL	30.8	—	59.62	-28.81	N	GND
0.328	FINAL	—	16.69	49.51	-32.82	N	GND
0.733	FINAL	18.4	—	56.00	-37.58	N	GND
0.740	FINAL	—	11.67	46.00	-34.33	N	GND
2.279	FINAL	15.0	—	56.00	-40.98	N	GND
2.279	FINAL	—	8.48	46.00	-37.52	N	GND
11.288	FINAL	26.7	—	60.00	-33.29	N	GND
11.288	FINAL	—	21.57	50.00	-28.43	N	GND
20.778	FINAL	—	19.73	50.00	-30.27	N	GND
20.778	FINAL	26.5	—	60.00	-33.48	N	GND

Table 7-123. AC Line Conducted with CDD 11ax UNII Band 1 – RU26 – Ch.48 (N) with AC/DC adapter to USB-C Power Pack

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 147 of 150

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

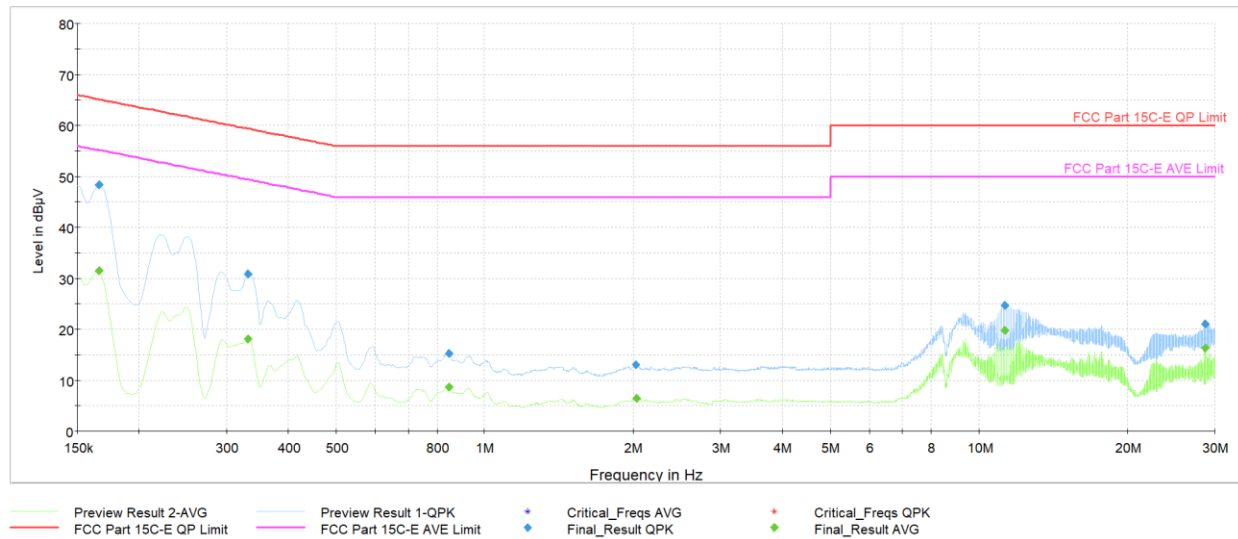

Plot 7-199. AC Line Conducted Plot with CDD 11ax UNII Band 1 – RU242 – Ch.48 (L1) with AC/DC adapter to USB-C Power Pack


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.166	FINAL	—	31.46	55.17	-23.71	L1	GND
0.166	FINAL	48.3	—	65.17	-16.86	L1	GND
0.332	FINAL	—	18.10	49.40	-31.30	L1	GND
0.332	FINAL	30.9	—	59.40	-28.49	L1	GND
0.848	FINAL	—	8.73	46.00	-37.27	L1	GND
0.848	FINAL	15.3	—	56.00	-40.70	L1	GND
2.024	FINAL	13.0	—	56.00	-43.00	L1	GND
2.031	FINAL	—	6.53	46.00	-39.47	L1	GND
11.290	FINAL	24.7	—	60.00	-35.30	L1	GND
11.290	FINAL	—	19.87	50.00	-30.13	L1	GND
28.707	FINAL	21.1	—	60.00	-38.87	L1	GND
28.709	FINAL	—	16.42	50.00	-33.58	L1	GND

Table 7-124. AC Line Conducted with CDD 11ax UNII Band 1 – RU242 – Ch.48 (L1) with AC/DC adapter to USB-C Power Pack

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 148 of 150

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

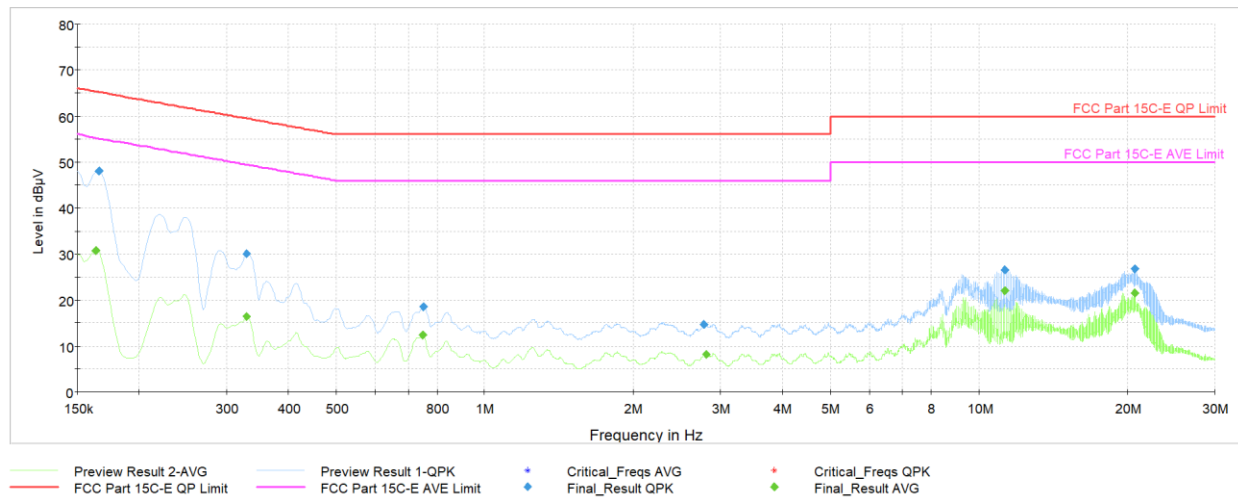

Plot 7-200. AC Line Conducted Plot with CDD 11ax UNII Band 1 – RU242 – Ch.48 (N) with AC/DC adapter to USB-C Power Pack

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.164	FINAL	—	30.71	55.28	-24.58	N	GND
0.166	FINAL	48.1	—	65.17	-17.06	N	GND
0.330	FINAL	—	16.44	49.45	-33.01	N	GND
0.330	FINAL	30.1	—	59.45	-29.39	N	GND
0.749	FINAL	—	12.37	46.00	-33.63	N	GND
0.751	FINAL	18.5	—	56.00	-37.51	N	GND
2.778	FINAL	14.6	—	56.00	-41.41	N	GND
2.803	FINAL	—	8.23	46.00	-37.77	N	GND
11.288	FINAL	26.5	—	60.00	-33.46	N	GND
11.290	FINAL	—	21.96	50.00	-28.04	N	GND
20.634	FINAL	26.8	—	60.00	-33.24	N	GND
20.639	FINAL	—	21.52	50.00	-28.48	N	GND

Table 7-125. AC Line Conducted with CDD 11ax UNII Band 1 – RU242 – Ch.48 (N) with AC/DC adapter to USB-C Power Pack

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 149 of 150

V 10.6 10/27/2023

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Head Mounted Device FCC ID: BCGA3416** and **IC: 579C-A3416** is in compliance with is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3416 IC: 579C-A3416		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2505120065-07.BCG	Test Dates: 5/12/2025 - 07/30/2025	EUT Type: Head Mounted Device	Page 150 of 150

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.