

FCC and ISED Test Report

Apple Inc
Model: A3426



In accordance with FCC 47 CFR Part 15, ISED RSS-247, ISED RSS-248 and ISED RSS-GEN (2.4 GHz Bluetooth, 2.4 GHz WLAN, 5 GHz WLAN, 6 GHz WLAN, Narrowband and Thread)

Prepared for: Apple Inc
One Apple Park Way
Cupertino
California
95014
USA

TUV SUD
SERVICES
(UK) LIMITED

Digitally signed by
TUV SUD SERVICES
(UK) LIMITED
Date: 2026.02.01
17:50:29 Z

FCC ID: BCGA3426

IC: 579C-A3426

COMMERCIAL-IN-CONFIDENCE

Document 75963990-20 Issue 02



SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Stephen Marshall	Senior Engineer	Authorised Signatory	01 February 2026

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC and ISED (Simultaneous Transmission). The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generating	George Capps	01 February 2026	

FCC Accreditation

553713/UK2026 Concorde Park, Fareham Test Laboratory

ISED Accreditation

28798/UK0003 Concorde Park, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15: 2024, ISED RSS-247: Issue 4 (2025-07), ISED RSS-248: Issue 3 (2024-10) and ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2026 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited). Results of tests covered by our Flexible UKAS Accreditation Schedule are marked FS (Flexible Scope).

TÜV SÜD
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom



Contents

1.1 Report Modification Record.....2

1.2 Introduction.....2

1.3 Brief Summary of Results3

1.4 Product Information5

1.5 Deviations from the Standard.....5

1.6 Identification of the EUT5

1.7 EUT Modification Record5

1.8 Test Location5

2 Test Details8

2.1 Radiated Spurious Emissions (Simultaneous Transmission)8

3 Measurement Uncertainty 94



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	30 January 2026
2	Corrected model number	01 February 2026

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
EUT/Sample Identification	Refer to section 1.6
Test Specification/Issue/Date	FCC 47 CFR Part 15: 2023 ISED RSS-247: Issue 4 (2025-07) ISED RSS-248: Issue 3 (2024-10) ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02)
Start of Test	03-January-2026
Finish of Test	27-January-2026
Name of Engineer(s)	Colin Brain, Zeeshan Zia, Ioan-Alexandru Bogatu, Morsalin Hossain, Vineeth Nagaraj, Akhil Rajendran Bhaskaran Nair, Manohar Thota
Related Document(s)	ANSI C63.4 (2014) ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01 KDB 987594 D02 v03



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15, ISED RSS-247, ISED RSS-248 and ISED RSS-GEN is shown below.

Section	Specification Clause				Test Description	Result	Comments/Base Standard
	Part 15	RSS-247	RSS-248	RSS-GEN			
Configuration and Mode: 5 GHz WLAN and 2.4 GHz Bluetooth							
2.1	15.209, 15.247(d) and 15.407(b)	6.6 and 7.3	-	6.13 and 8.9	Radiated Spurious Emissions (Simultaneous Transmission)	Pass	ANSI C63.4 (2014) ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01
Configuration and Mode: 6 GHz WLAN and 2.4 GHz Bluetooth							
2.1	15.209, 15.247(d) and 15.407(b)	6.6	4.6.2	6.13 and 8.9	Radiated Spurious Emissions (Simultaneous Transmission)	Pass	ANSI C63.4 (2014) ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01 KDB 987594 D02 v03
Configuration and Mode: 5 GHz WLAN and Thread							
2.1	15.209, 15.247(d) and 15.407(b)	6.6 and 7.3	-	6.13 and 8.9	Radiated Spurious Emissions (Simultaneous Transmission)	Pass	ANSI C63.4 (2014) ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01
Configuration and Mode: 6 GHz WLAN and Thread							
2.1	15.209, 15.247(d) and 15.407(b)	6.6	4.6.2	6.13 and 8.9	Radiated Spurious Emissions (Simultaneous Transmission)	Pass	ANSI C63.4 (2014) ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01 KDB 987594 D02 v03
Configuration and Mode 2.4 GHz WLAN and 2.4 GHz Bluetooth and 5 GHz Narrowband							
2.1	15.209, 15.247(d) and 15.407(b)	6.6 and 7.3	-	6.13 and 8.9	Radiated Spurious Emissions (Simultaneous Transmission)	Pass	ANSI C63.4 (2014) ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01



Section	Specification Clause				Test Description	Result	Comments/Base Standard
Configuration and Mode 2.4 GHz WLAN and 2.4 GHz Bluetooth and 6 GHz Narrowband							
2.1	15.209, 15.247(d) and 15.407(b)	6.6	4.6.2	6.13 and 8.9	Radiated Spurious Emissions (Simultaneous Transmission)	Pass	ANSI C63.4 (2014) ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01 KDB 987594 D02 v03
Configuration and Mode 2.4 GHz WLAN and Thread and 5 GHz Narrowband							
2.1	15.209, 15.247(d) and 15.407(b)	6.6 and 7.3	-	6.13 and 8.9	Radiated Spurious Emissions (Simultaneous Transmission)	Pass	ANSI C63.4 (2014) ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01
Configuration and Mode 2.4 GHz WLAN and Thread and 6 GHz Narrowband							
2.1	15.209, 15.247(d) and 15.407(b)	6.6	4.6.2	6.13 and 8.9	Radiated Spurious Emissions (Simultaneous Transmission)	Pass	ANSI C63.4 (2014) ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01 KDB 987594 D02 v03
Configuration and Mode: 2.4 GHz WLAN and 2.4 GHz Bluetooth and 5 GHz WLAN							
2.1	15.209, 15.247(d) and 15.407(b)	6.6 and 7.3		6.13 and 8.9	Radiated Spurious Emissions (Simultaneous Transmission)	Pass	ANSI C63.4 (2014) ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01
Configuration and Mode: 2.4 GHz WLAN and 2.4 GHz Bluetooth and 6 GHz WLAN							
2.1	15.209, 15.247(d) and 15.407(b)	6.6	4.6.2	6.13 and 8.9	Radiated Spurious Emissions (Simultaneous Transmission)	Pass	ANSI C63.4 (2014) ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01 KDB 987594 D02 v03
Configuration and Mode: 2.4 GHz WLAN and Thread and 5 GHz WLAN							
2.1	15.209, 15.247(d) and 15.407(b)	6.6 and 7.3		6.13 and 8.9	Radiated Spurious Emissions (Simultaneous Transmission)	Pass	ANSI C63.4 (2014) ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01
Configuration and Mode: 2.4 GHz WLAN and Thread and 6 GHz WLAN							
2.1	15.209, 15.247(d) and 15.407(b)	6.6	4.6.2	6.13 and 8.9	Radiated Spurious Emissions (Simultaneous Transmission)	Pass	ANSI C63.4 (2014) ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01 KDB 987594 D02 v03

Table 2



1.4 Product Information

1.4.1 Technical Description

The equipment under test (EUT) was a portable laptop computer.

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 Identification of the EUT

The table below details identification of the EUT(s) that have been used to carry out the testing within this report.

Model: A3426		
Serial Number	Hardware Version	Software Version
MM20HYW2Y6	REV1.0	25D36
MXDF7Q597J	REV1.0	25D36

Table 3

1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A3426, Serial Number: MM20HYW2Y6			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3426, Serial Number: MXDF7Q597J			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 4

1.8 Test Location

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 5 GHz WLAN and 2.4 GHz Bluetooth		
Radiated Spurious Emissions (Simultaneous Transmission)	Colin Brain, Zeeshan Zia, Ioan-Alexandru Bogatu, Morsalin Hossain, Vineeth Nagaraj, Akhil Rajendran Bhaskaran Nair	UKAS
Configuration and Mode: 6 GHz WLAN and 2.4 GHz Bluetooth		
Radiated Spurious Emissions (Simultaneous Transmission)	Ioan-Alexandru Bogatu, Zeeshan Zia, Morsalin Hossain, Vineeth Nagaraj, Akhil Rajendran Bhaskaran Nair	UKAS



Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 5 GHz WLAN and Thread		
Radiated Spurious Emissions (Simultaneous Transmission)	Alexandru Bogatum, Zeeshan Zia, Colin Brain, Morsalin Hossain, Vineeth Nagaraj, Akhil Rajendran Bhaskaran Nair	UKAS
Configuration and Mode: 6 GHz WLAN and Thread		
Radiated Spurious Emissions (Simultaneous Transmission)	Ioan-Alexandru Bogatu, Morsalin Hossain, Colin Brain, Vineeth Nagaraj, Akhil Rajendran Bhaskaran Nair	UKAS
Configuration and Mode: 2.4 GHz WLAN and 2.4 GHz Bluetooth and 5 GHz Narrowband		
Radiated Spurious Emissions (Simultaneous Transmission)	Colin Brain, Manohar Thota, Zeeshan Zia	UKAS
Configuration and Mode: 2.4 GHz WLAN and 2.4 GHz Bluetooth and 6 GHz Narrowband		
Radiated Spurious Emissions (Simultaneous Transmission)	Colin Brain, Manohar Thota, Zeeshan Zia, Akhil Rajendran Bhaskaran Nair	UKAS
Configuration and Mode: 2.4 GHz WLAN and Thread and 5 GHz Narrowband		
Radiated Spurious Emissions (Simultaneous Transmission)	Colin Brain, Manohar Thota, Zeeshan Zia, Akhil Rajendran Bhaskaran Nair	UKAS
Configuration and Mode: 2.4 GHz WLAN and Thread and 6 GHz Narrowband		
Radiated Spurious Emissions (Simultaneous Transmission)	Colin Brain, Manohar Thota, Zeeshan Zia, Akhil Rajendran Bhaskaran Nair	UKAS
Configuration and Mode: 2.4 GHz WLAN and 2.4 GHz Bluetooth and 5 GHz WLAN		
Radiated Spurious Emissions (Simultaneous Transmission)	Ioan-Alexandru Bogatu, Zeeshan Zia, Morsalin Hossain	UKAS



Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz WLAN and 2.4 GHz Bluetooth and 6 GHz WLAN		
Radiated Spurious Emissions (Simultaneous Transmission)	Morsalin Hossain, Zeeshan Zia	UKAS
Configuration and Mode: 2.4 GHz WLAN and Thread and 5 GHz WLAN		
Radiated Spurious Emissions (Simultaneous Transmission)	Ioan-Alexandru Bogatu, Gridi Bilali, Zeeshan Zia, Morsalin Hossain	UKAS
Configuration and Mode: 2.4 GHz WLAN and Thread and 6 GHz WLAN		
Radiated Spurious Emissions (Simultaneous Transmission)	Gridi Bilali, Ioan-Alexandru Bogatu, Zeeshan Zia, Morsalin Hossain	UKAS

Table 5

Office Address:

TÜV SÜD
Concorde Park
Concorde Way
Fareham
Hampshire
PO15 5FG
United Kingdom



2 Test Details

2.1 Radiated Spurious Emissions (Simultaneous Transmission)

2.1.1 Specification Reference

FCC 47 CFR Part 15, Clause 15.209, 15.247(d) and 15.407(b)
ISED RSS-247, Clause 6.6 and 7.3
ISED RSS-248, Clause 4.6
ISED RSS-GEN, Clause 6.13 and 8.9

2.1.2 Equipment Under Test and Modification State

A3426, S/N: MM20HYW2Y6 - Modification State 0
A3426, S/N: MXDF7Q597J - Modification State 0

2.1.3 Date of Test

03-January-2026 to 13-January-2026 and 25-January-2026 to 27-January-2026

2.1.4 Test Method

Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6.

Ports on the EUT were terminated with loads as described in ANSI C63.4 clause 6.2.4 for each type of port on the EUT.

For frequencies > 1 GHz, plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.5 to characterize the EUT. Where emissions were detected, final average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.2, 11.11, 11.12, 12.7.2 or 12.7.3 depending on the nature of the emission measured.

The plots shown are the characterisation of the EUT. The limits on the plots represent the most stringent case for restricted bands, (74/54 dBµV/m) when compared to non-restricted band limits. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 10 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

The following conversion can be applied to convert from dBµV/m to µV/m:
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$

To determine the emission characteristic of the EUT above 18 GHz, the test antenna was swept over all faces of the EUT whilst observing a spectral display. The frequency of any emissions of interest was noted for formal measurement at the correct measurement distance of 1m. This procedure was repeated for all relevant transmit operating channels.

At a measurement distance of 1 meter the limit line was increased by $20 \cdot \text{LOG}(3/1) = 9.54$ dB.

Radiated spurious emissions tests have been conducted in HDR4 (high power) mode for Narrowband technology as this represents the worst case with respect to Power and PSD.

Simultaneous transmission combinations involving Thread, WLAN and Narrowband have been tested on either Core 0 or Core 1. Whilst Thread can operate on Core 0, 1 or 2, in the final product simultaneous combinations involving Thread will be limited to operation on Core 2.

2.1.5 Example Test Setup Diagram

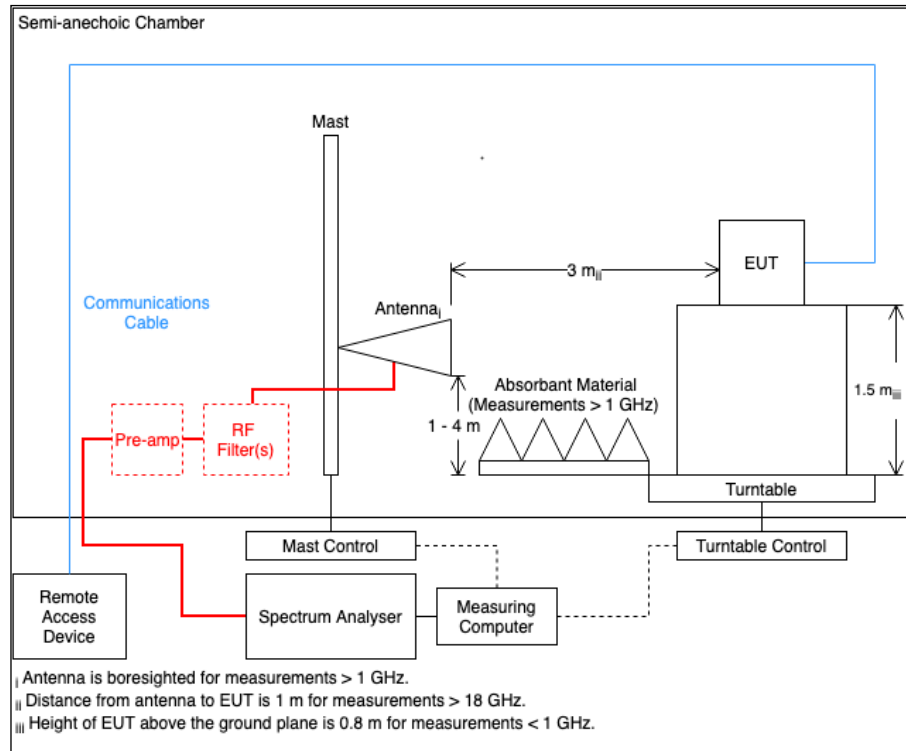


Figure 1

2.1.6 Environmental Conditions

Ambient Temperature	20.5 - 33.5 °C
Relative Humidity	21.8 - 45.5 %

2.1.7 Test Results

5 GHz WLAN and 2.4 GHz Bluetooth

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
37.907	20.07	40.00	-19.93	Q-Peak	307	396	Horizontal
38.215	20.23	40.00	-19.77	Q-Peak	31	100	Vertical
73.265	19.70	40.00	-20.30	Q-Peak	312	199	Vertical
73.405	17.96	40.00	-22.04	Q-Peak	40	358	Horizontal
156.892	21.33	43.50	-22.17	Q-Peak	229	380	Vertical
172.174	21.00	43.50	-22.50	Q-Peak	172	328	Horizontal
2387.125	34.60	54.00	-19.40	CISPR Avg	0	291	Vertical
2387.649	30.58	54.00	-23.42	CISPR Avg	64	393	Horizontal
2484.266	31.78	54.00	-22.22	CISPR Avg	53	396	Horizontal
2484.479	33.77	54.00	-20.23	CISPR Avg	347	397	Vertical
4999.819	40.37	54.00	-13.63	CISPR Avg	360	310	Vertical
5136.943	55.34	74.00	-18.66	Peak	7	334	Vertical
5392.905	55.93	74.00	-18.07	Peak	351	323	Vertical

Table 6 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

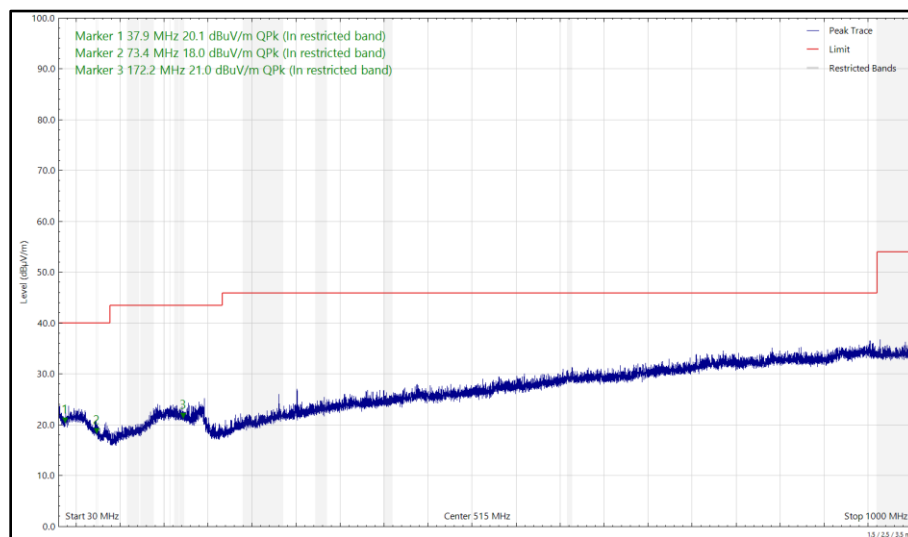


Figure 2 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

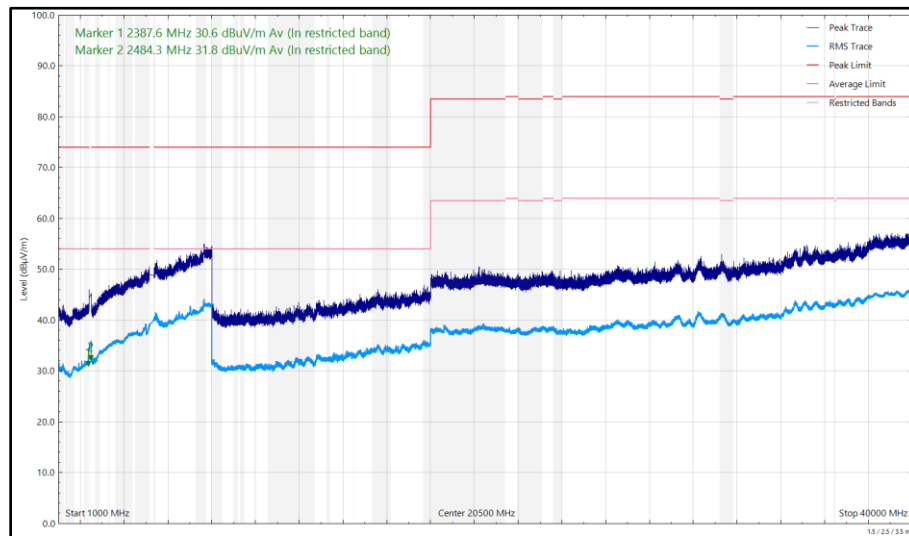


Figure 3 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

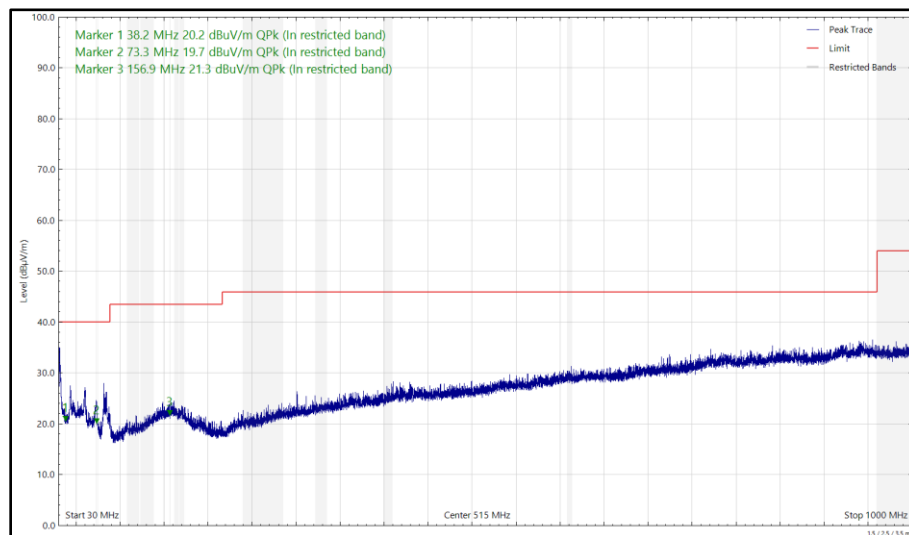


Figure 4 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

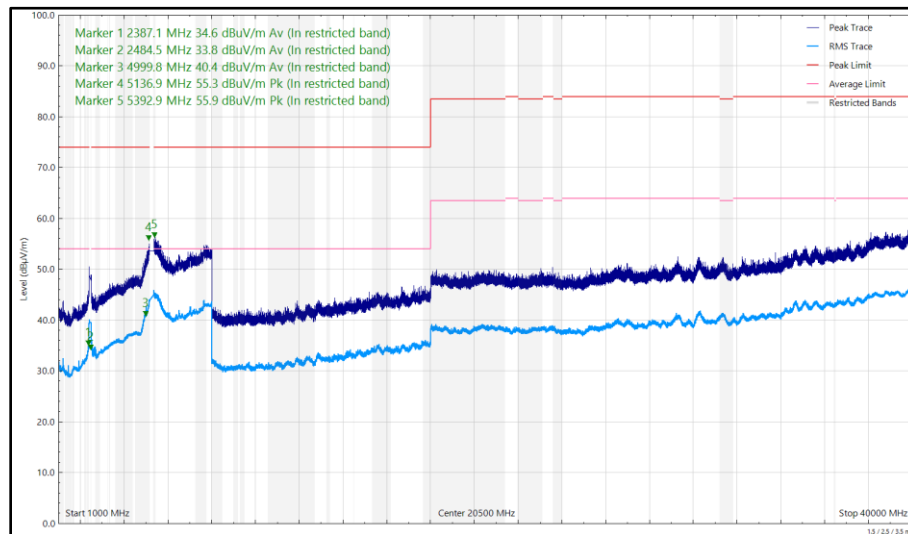


Figure 5 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
37.529	19.94	40.00	-20.06	Q-Peak	249	391	Horizontal
37.623	19.98	40.00	-20.02	Q-Peak	36	229	Vertical
73.284	18.06	40.00	-21.94	Q-Peak	175	263	Horizontal
73.668	18.55	40.00	-21.45	Q-Peak	251	283	Vertical
170.505	21.11	43.50	-22.39	Q-Peak	106	351	Vertical
170.753	21.05	43.50	-22.45	Q-Peak	0	260	Horizontal
2387.421	30.07	54.00	-23.93	CISPR Avg	67	385	Horizontal
2388.961	34.09	54.00	-19.91	CISPR Avg	350	379	Vertical
2483.796	34.42	54.00	-19.58	CISPR Avg	0	364	Vertical
2483.839	32.00	54.00	-22.00	CISPR Avg	54	400	Horizontal
4211.878	34.87	54.00	-19.13	CISPR Avg	338	285	Vertical
5433.555	56.18	74.00	-17.82	Peak	350	340	Vertical

Table 7 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

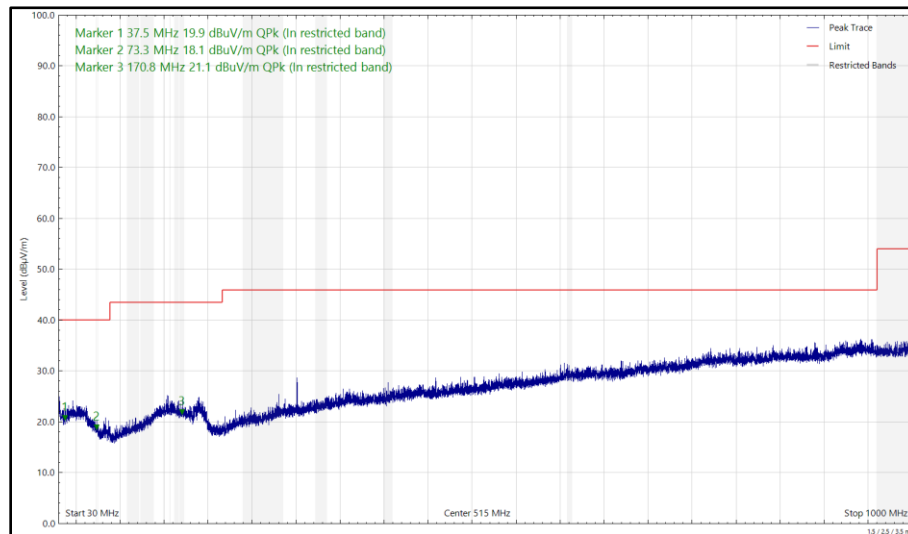


Figure 6 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

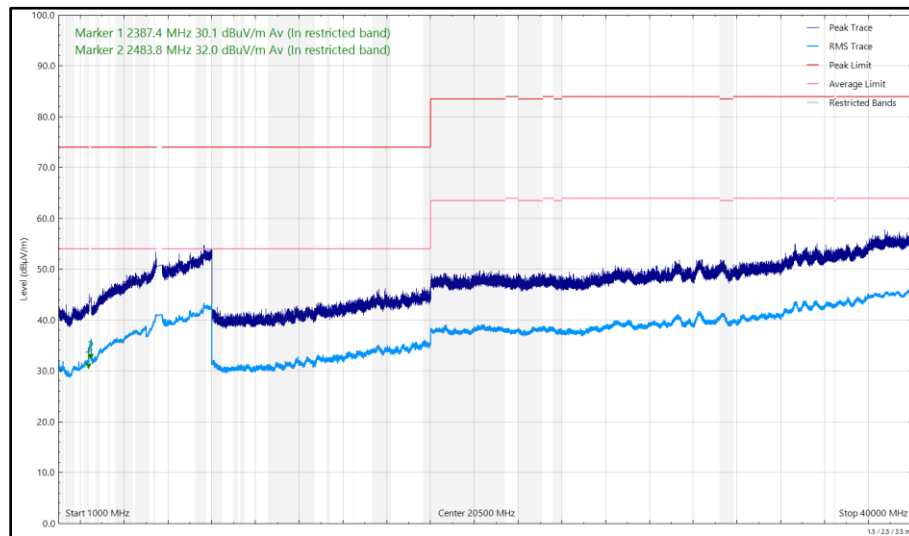


Figure 7 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

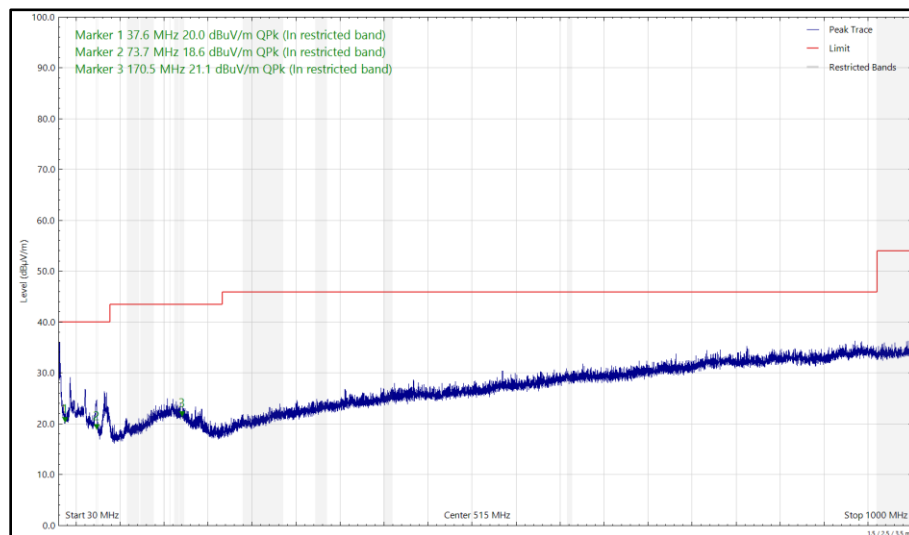


Figure 8 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

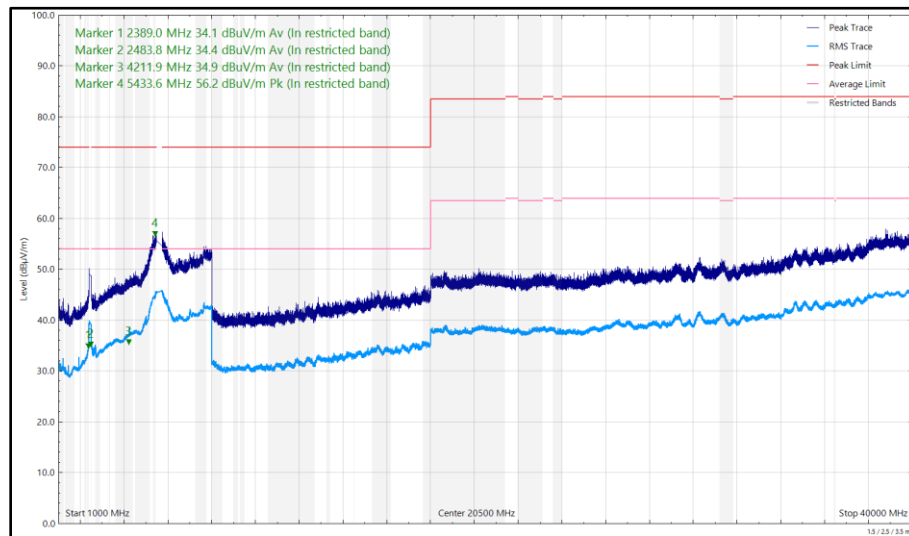


Figure 9 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
37.819	20.19	40.00	-19.81	Q-Peak	182	123	Vertical
37.928	20.10	40.00	-19.90	Q-Peak	37	390	Horizontal
73.231	20.49	40.00	-19.51	Q-Peak	357	107	Vertical
162.363	21.60	43.50	-21.90	Q-Peak	9	278	Horizontal
165.410	21.34	43.50	-22.16	Q-Peak	35	329	Vertical
278.450	20.75	46.00	-25.25	Q-Peak	230	220	Horizontal
2383.935	30.18	54.00	-23.82	CISPR Avg	53	385	Horizontal
2389.335	34.64	54.00	-19.36	CISPR Avg	1	300	Vertical
2483.675	34.29	54.00	-19.71	CISPR Avg	0	318	Vertical
2483.810	31.85	54.00	-22.15	CISPR Avg	55	400	Horizontal
4202.804	32.36	54.00	-21.64	CISPR Avg	0	108	Vertical
5440.610	55.76	74.00	-18.24	Peak	7	323	Vertical

Table 8 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

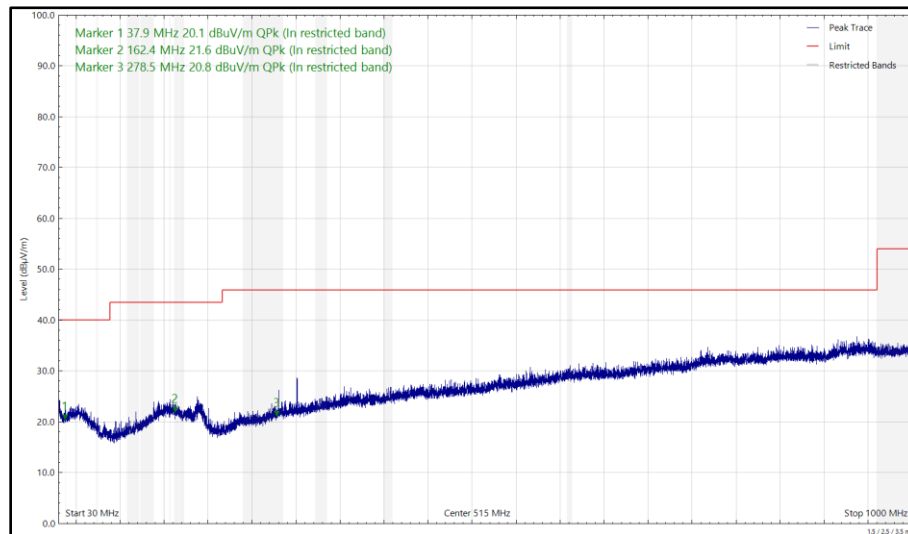


Figure 10 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

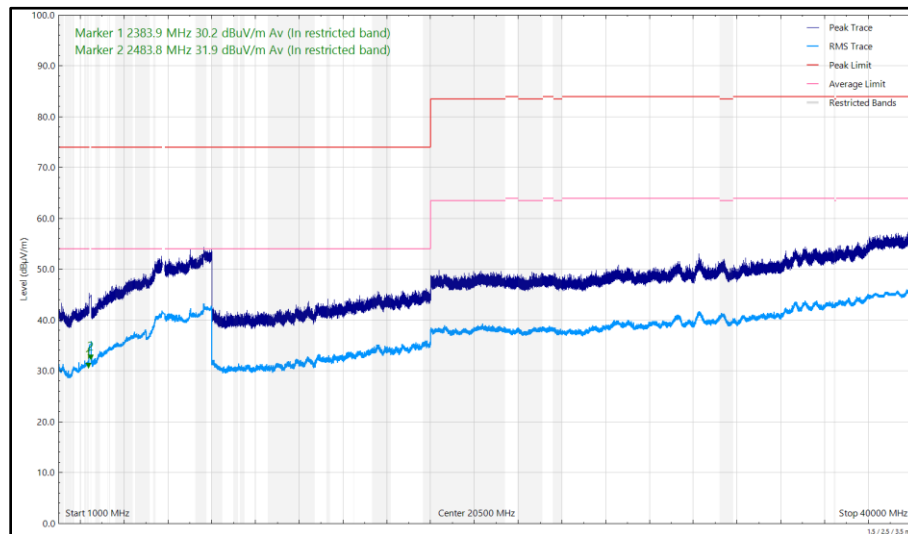


Figure 11 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

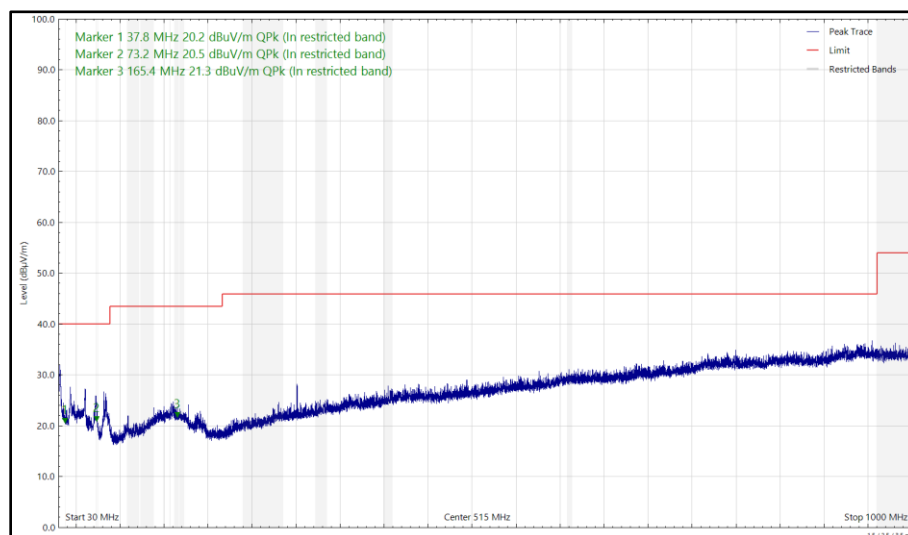


Figure 12 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

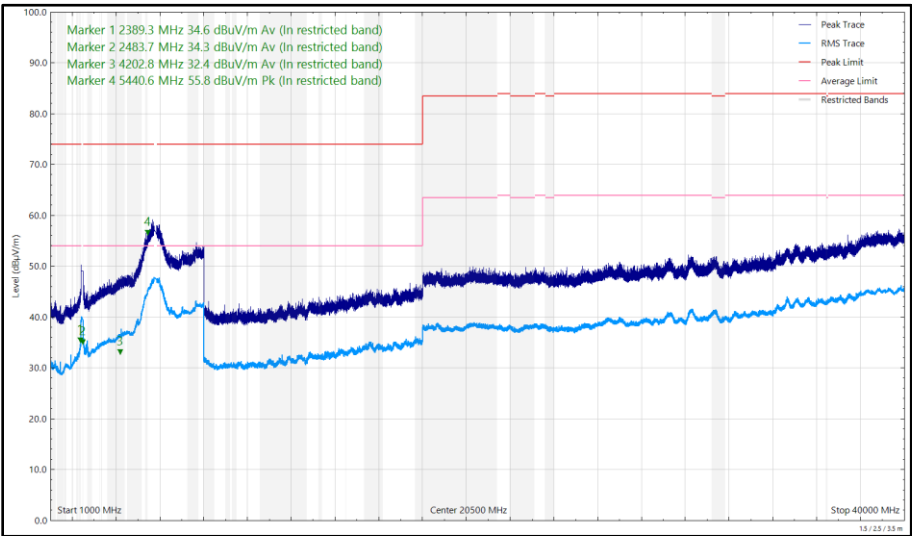


Figure 13 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

FCC 47 CFR Part 15, ISSED RSS-247 and ISSED RSS-GEN

The least stringent limit from the applicable rule parts was used to determine compliance for Radiated Emissions testing of multiple transmission sources.

The least stringent applicable limit was:

Clause	Limit
Part 15 247 (d) / RSS-247 Clause 6.6	-20 dBc / -30 dBc
Part 15.407 (b) / RSS-247 Clause 6.6, 7.3.1.3, 7.3.2.3, 7.3.3.3, 7.3.4.4	-27 dBm e.i.r.p
Part 15.209 / RSS-GEN Clause 8.9	Peak: 74 dBuV/m at 3m, Average 54 dBuV/m at 3m (Restricted bands > 1 GHz)
Part 15.407 (b) / RSS-247 Clause 7.3.2.3	-27 dBm e.i.r.p
Part 15.407 (b) / RSS-247 Clause 7.3.3.3	-27 dBm e.i.r.p
Part 15.407 (b) / RSS-247 Clause 7.3.4.4	-27 dBm e.i.r.p

Table 9

6 GHz WLAN and 2.4 GHz Bluetooth

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
38.015	20.08	40.00	-19.92	Q-Peak	253	338	Vertical
74.265	17.89	40.00	-22.11	Q-Peak	44	294	Horizontal
75.099	18.40	40.00	-21.60	Q-Peak	131	150	Vertical
108.902	20.99	43.50	-22.51	Q-Peak	182	138	Vertical
168.582	21.22	43.50	-22.28	Q-Peak	67	350	Horizontal
171.674	20.98	43.50	-22.52	Q-Peak	300	395	Vertical
2388.759	34.38	54.00	-19.62	CISPR Avg	0	342	Vertical
2483.805	34.52	54.00	-19.48	CISPR Avg	25	310	Vertical
2484.927	31.53	54.00	-22.47	CISPR Avg	54	400	Horizontal
4222.330	31.22	54.00	-22.78	CISPR Avg	0	339	Vertical

Table 10 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

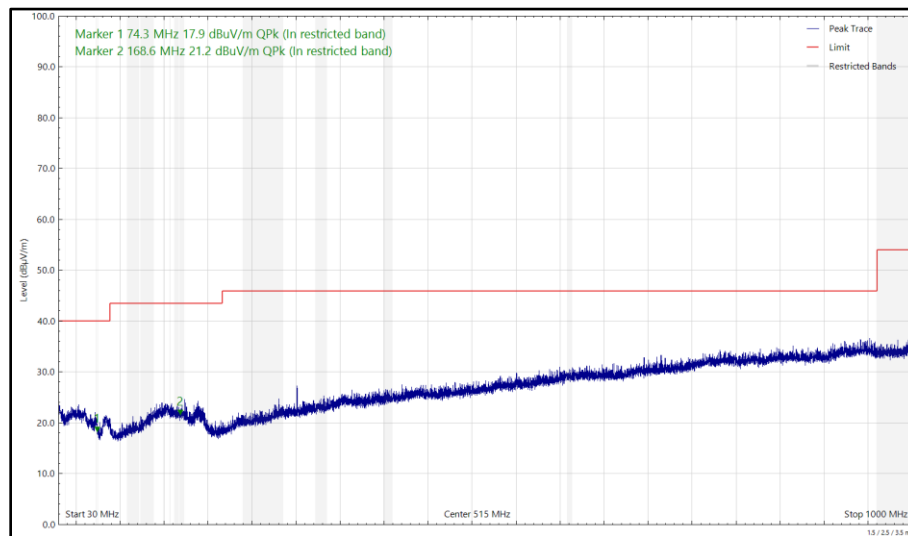


Figure 14 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

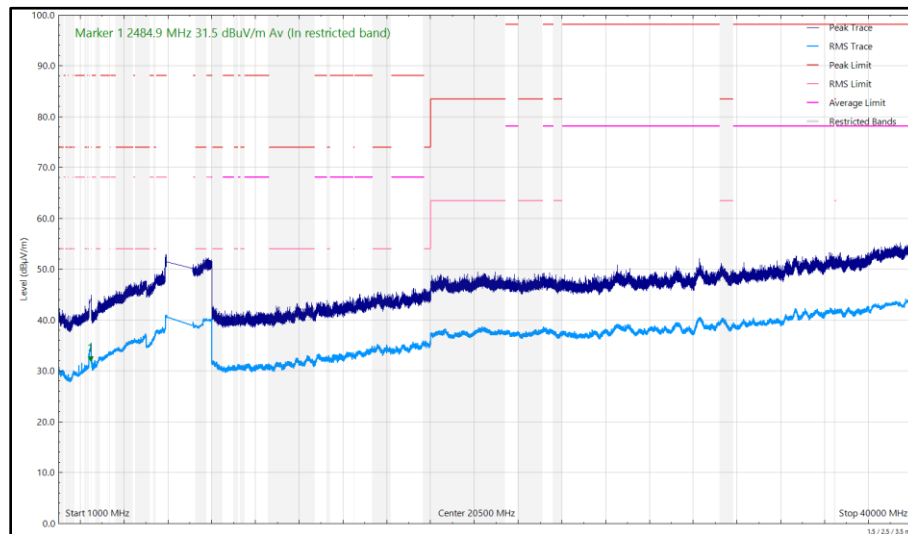


Figure 15 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

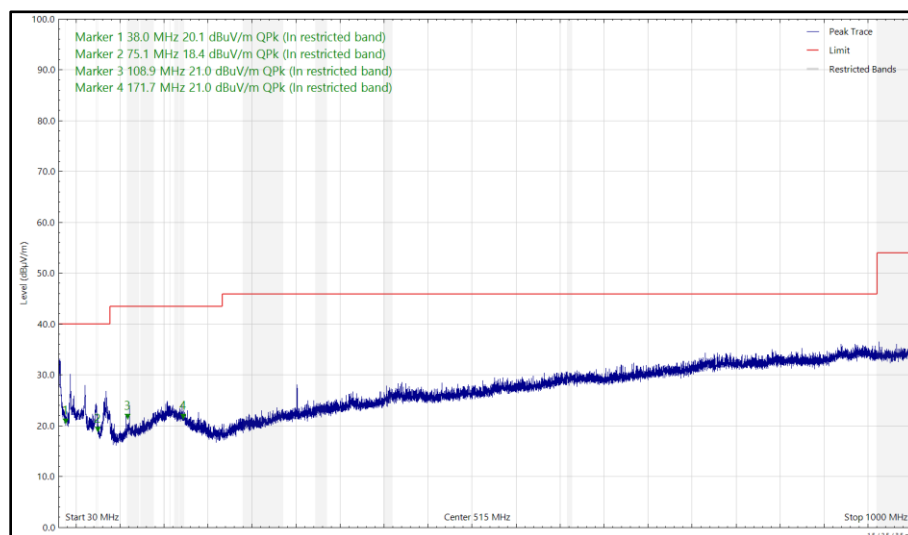


Figure 16 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

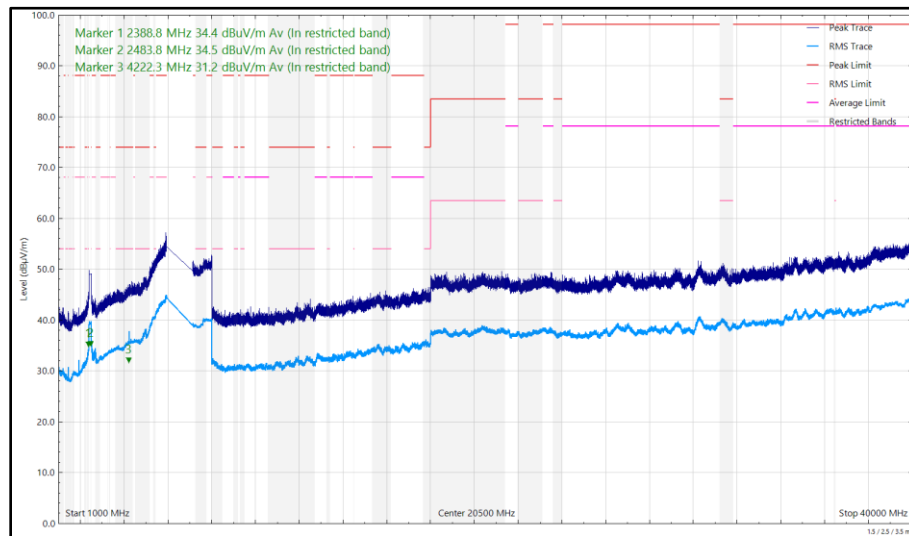


Figure 17 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
38.005	20.14	40.00	-19.86	Q-Peak	290	263	Vertical
73.049	18.04	40.00	-21.96	Q-Peak	304	345	Horizontal
73.235	20.79	40.00	-19.21	Q-Peak	349	123	Vertical
168.149	21.22	43.50	-22.28	Q-Peak	281	346	Vertical
2386.163	33.94	54.00	-20.06	CISPR Avg	3	298	Vertical
2484.697	30.91	54.00	-23.09	CISPR Avg	50	396	Horizontal
2486.023	33.55	54.00	-20.45	CISPR Avg	35	314	Vertical
4205.004	31.01	54.00	-22.99	CISPR Avg	246	363	Vertical

Table 11 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

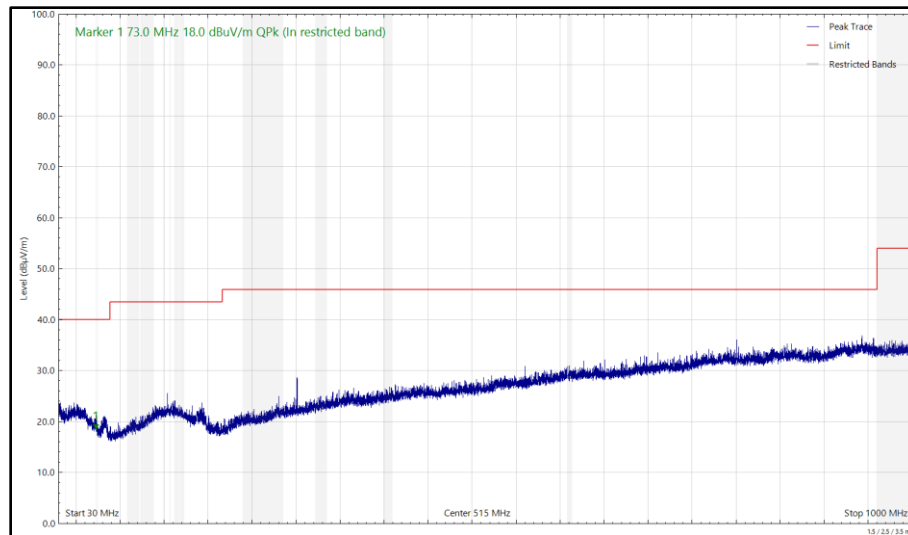


Figure 18 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

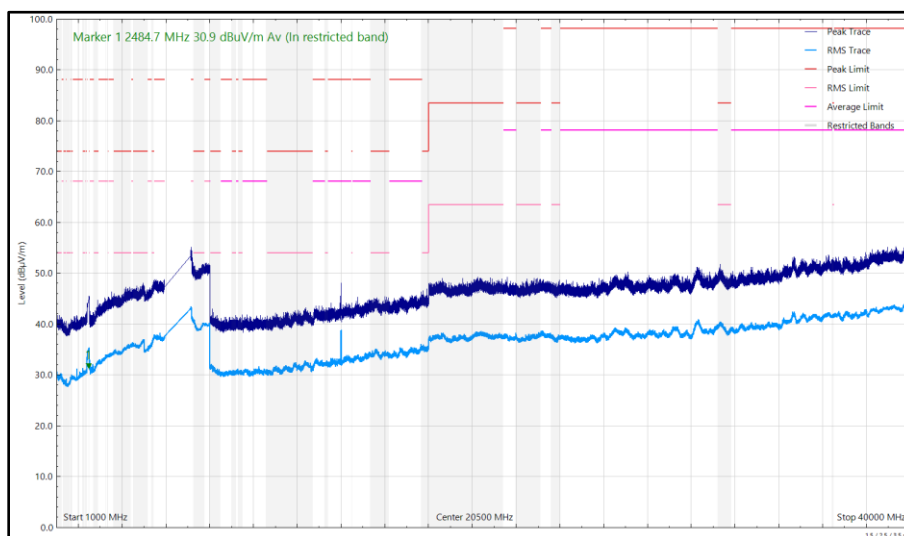


Figure 19 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

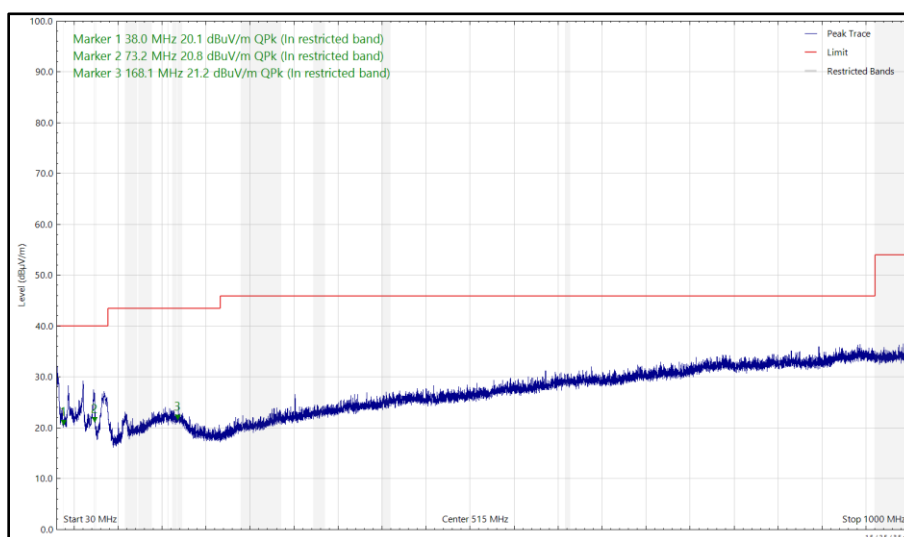


Figure 20 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

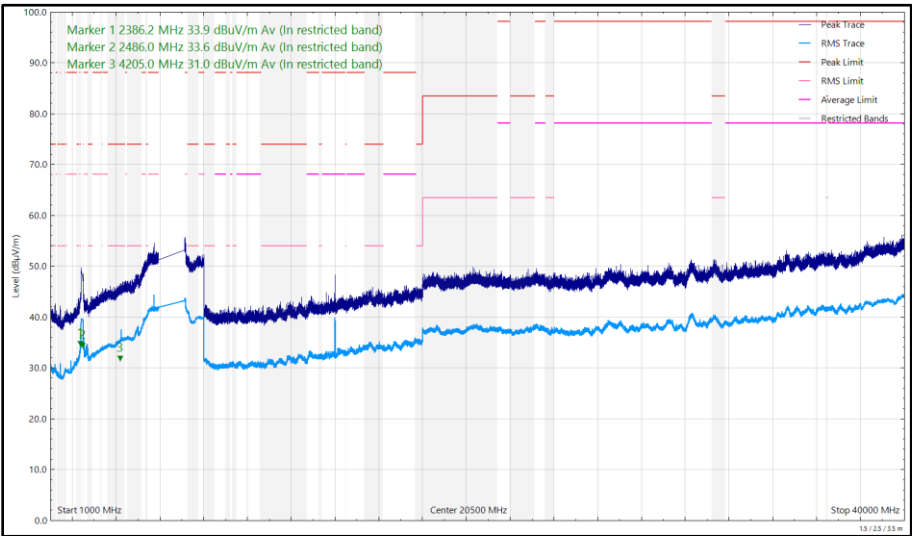


Figure 21 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2441 MHz (CH39), DH5, ePA, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

FCC 47 CFR Part 15, ISED RSS-247, ISED RSS-248 and ISED RSS-GEN

The least stringent limit from the applicable rule parts was used to determine compliance for Radiated Emissions testing of multiple transmission sources.

The least stringent applicable limit was:

Clause	Limit
Part 15 247 (d) / RSS-247 Clause 6.6	-20 dBc
Part 15.407 (b) / RSS-248 Clause 4.6.2	Peak: -7 dBm/MHz e.i.r.p, Average: -27 dBm/MHz e.i.r.p.
Part 15.209 / RSS-GEN Clause 8.9	Peak: 74 dBµV/m at 3m, Average 54 dBµV/m at 3m (Restricted bands > 1 GHz)

Table 12

5 GHz WLAN and Thread

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
37.598	20.02	40.00	-19.98	Q-Peak	314	370	Vertical
73.719	18.27	40.00	-21.73	Q-Peak	276	337	Vertical
165.343	21.36	43.50	-22.14	Q-Peak	23	145	Vertical
165.488	21.29	43.50	-22.21	Q-Peak	8	400	Horizontal
2389.436	35.52	54.00	-18.48	RMS	6	275	Vertical
2484.108	36.86	54.00	-17.14	RMS	20	316	Vertical
2484.647	35.01	54.00	-18.99	RMS	54	390	Horizontal
4207.149	36.24	54.00	-17.76	RMS	308	107	Vertical
4999.806	42.13	54.00	-11.87	RMS	29	293	Vertical
5134.895	55.24	74.00	-18.76	Peak	360	329	Vertical
5144.860	38.25	54.00	-15.75	RMS	122	390	Horizontal
5146.437	44.16	54.00	-9.84	RMS	7	335	Vertical
5357.605	45.01	54.00	-8.99	RMS	359	252	Vertical
5417.949	40.29	54.00	-13.71	RMS	288	333	Horizontal
5452.847	55.14	74.00	-18.86	Peak	357	285	Vertical

Table 13 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

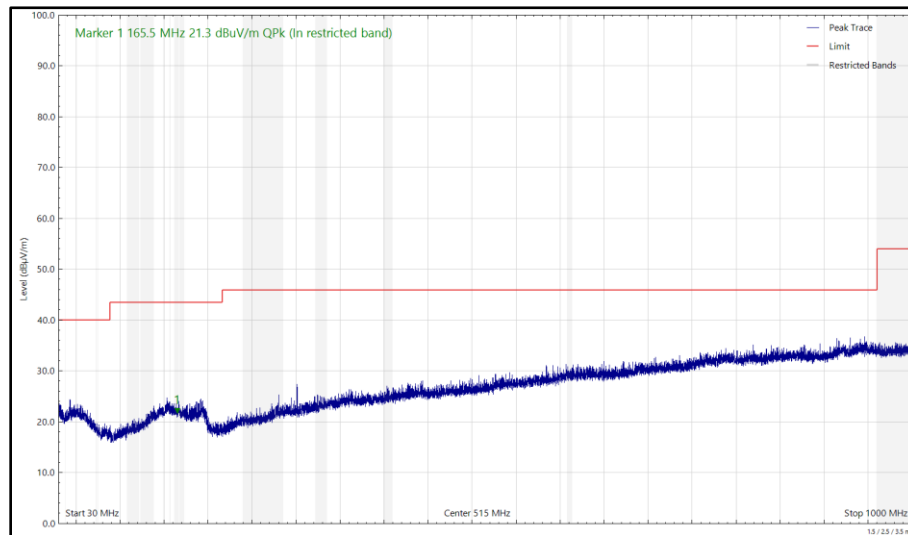


Figure 22 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

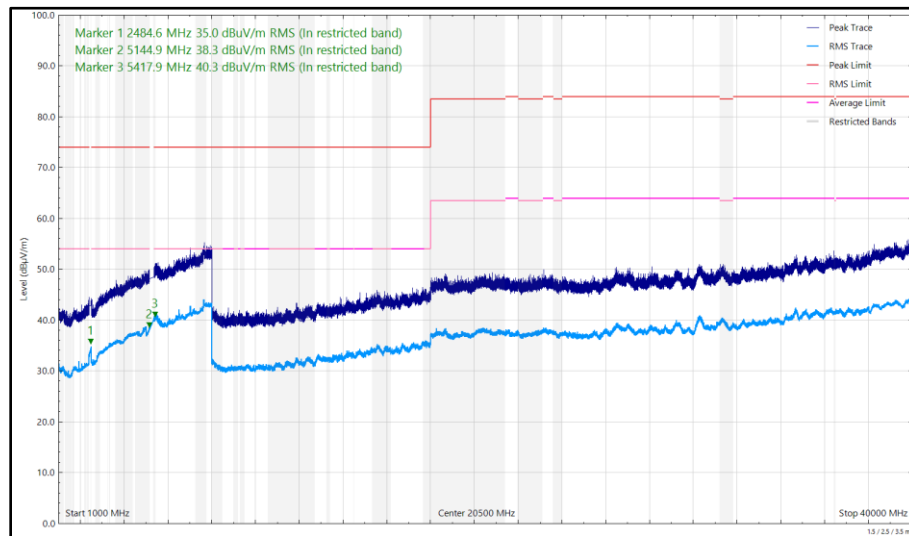


Figure 23 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 1 GHz to 40 GHz, Horizontal

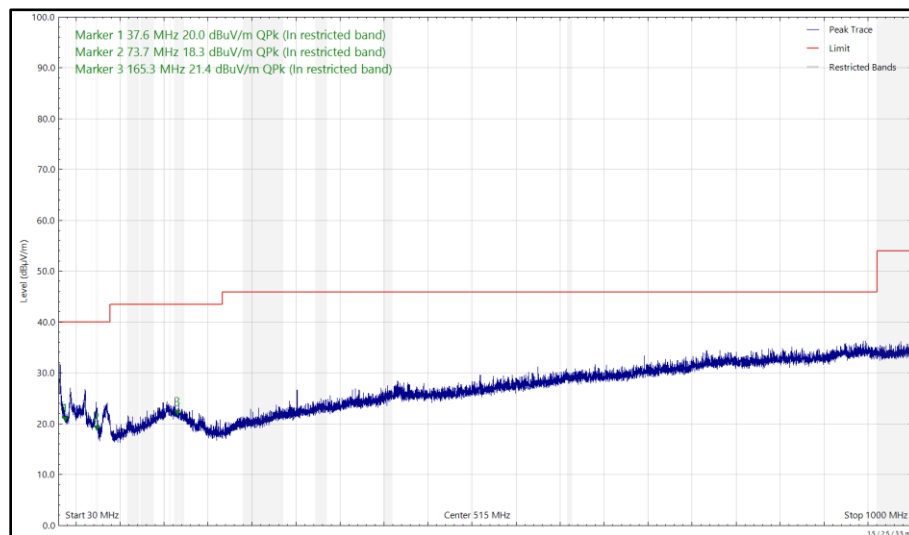


Figure 24 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

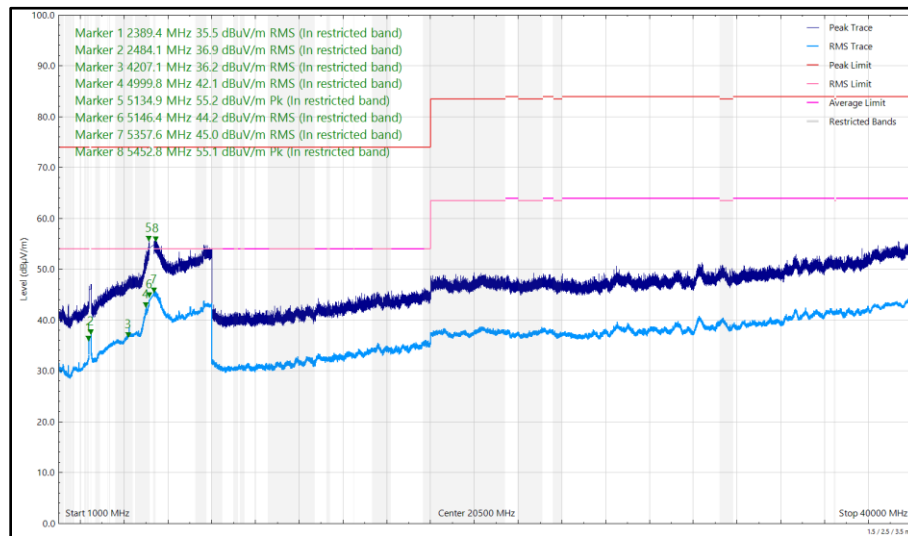


Figure 25 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
37.660	20.08	40.00	-19.92	Q-Peak	229	234	Vertical
37.728	20.01	40.00	-19.99	Q-Peak	93	370	Horizontal
73.295	19.95	40.00	-20.05	Q-Peak	337	101	Vertical
75.171	17.65	40.00	-22.35	Q-Peak	131	397	Horizontal
136.254	20.29	43.50	-23.21	Q-Peak	206	180	Horizontal
283.347	21.07	46.00	-24.93	Q-Peak	57	400	Horizontal
2389.270	37.97	54.00	-16.03	RMS	358	338	Vertical
2483.534	37.51	54.00	-16.49	RMS	351	394	Vertical
4223.540	36.25	54.00	-17.75	RMS	217	122	Vertical
4999.994	42.99	54.00	-11.01	RMS	0	326	Vertical
5141.816	38.38	54.00	-15.62	RMS	119	363	Horizontal
5145.512	54.79	74.00	-19.21	Peak	360	360	Vertical
5147.835	43.13	54.00	-10.87	RMS	360	373	Vertical
5356.149	45.56	54.00	-8.44	RMS	360	324	Vertical
5375.930	56.70	74.00	-17.30	Peak	2	340	Vertical
5432.751	40.46	54.00	-13.54	RMS	293	389	Horizontal

Table 14 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

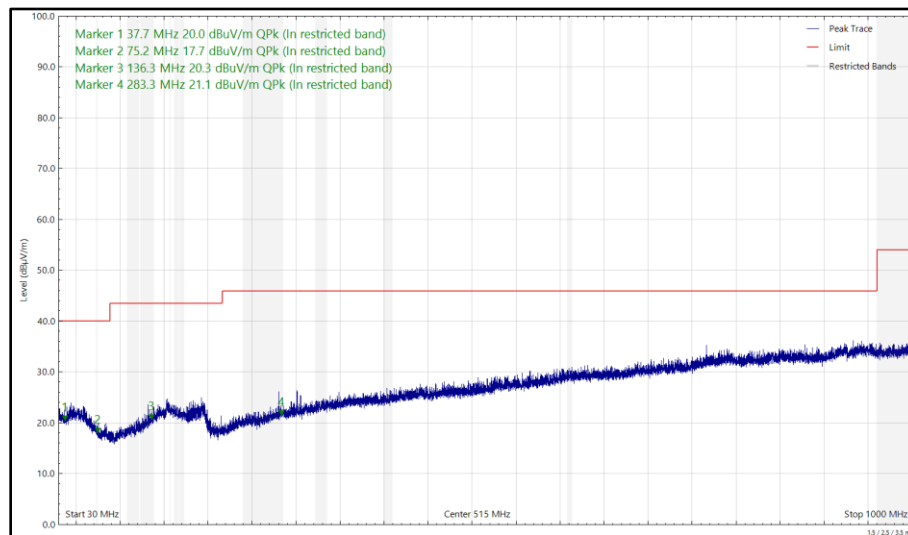


Figure 26 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

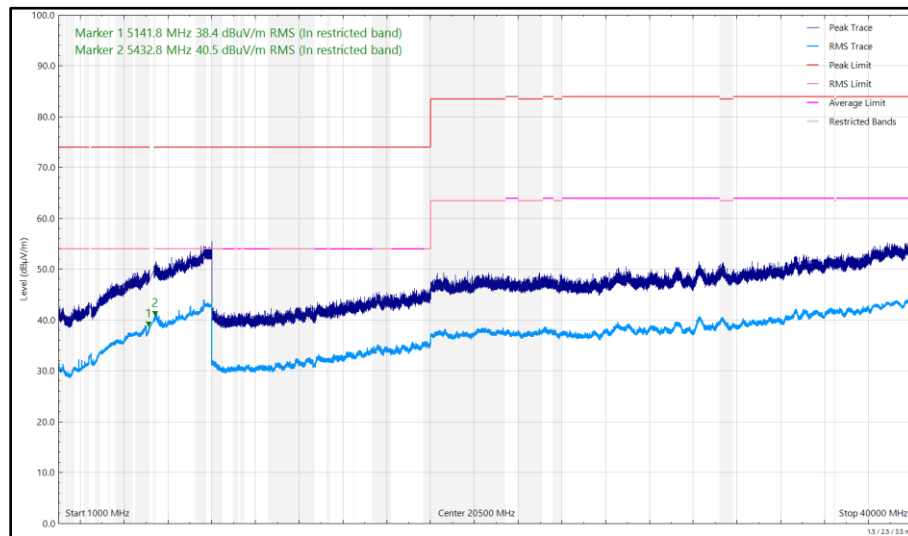


Figure 27 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 1 GHz to 40 GHz, Horizontal

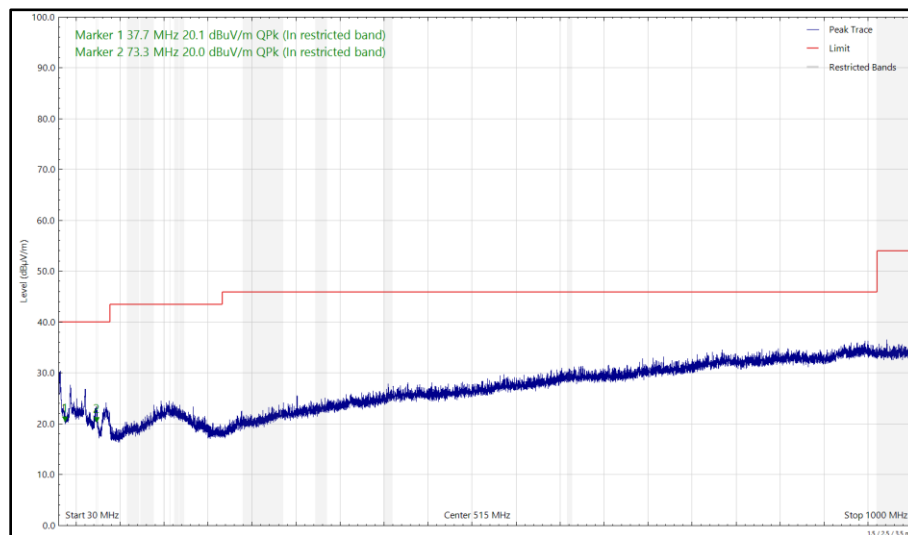


Figure 28 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

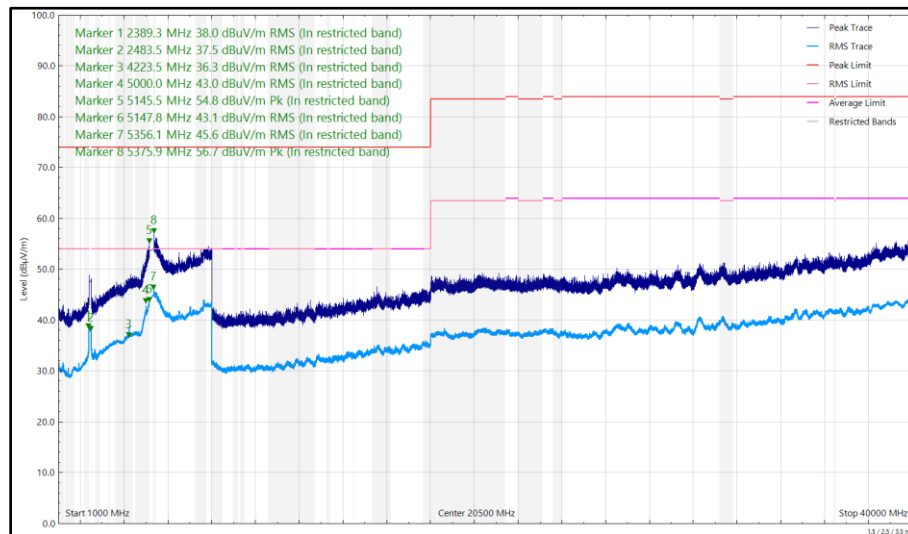


Figure 29 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
37.611	20.02	40.00	-19.98	Q-Peak	202	389	Horizontal
37.797	20.06	40.00	-19.94	Q-Peak	193	398	Vertical
73.163	17.96	40.00	-22.04	Q-Peak	0	226	Horizontal
74.408	18.12	40.00	-21.88	Q-Peak	248	279	Vertical
164.095	21.39	43.50	-22.11	Q-Peak	31	244	Horizontal
2389.738	36.74	54.00	-17.26	RMS	15	303	Vertical
2483.645	35.25	54.00	-18.75	RMS	56	394	Horizontal
2483.833	37.30	54.00	-16.70	RMS	25	363	Vertical
4215.143	36.29	54.00	-17.71	RMS	89	172	Vertical
5388.448	55.89	74.00	-18.11	Peak	1	304	Vertical
5442.611	45.64	54.00	-8.36	RMS	350	324	Vertical
5455.239	41.07	54.00	-12.93	RMS	297	398	Horizontal

Table 15 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

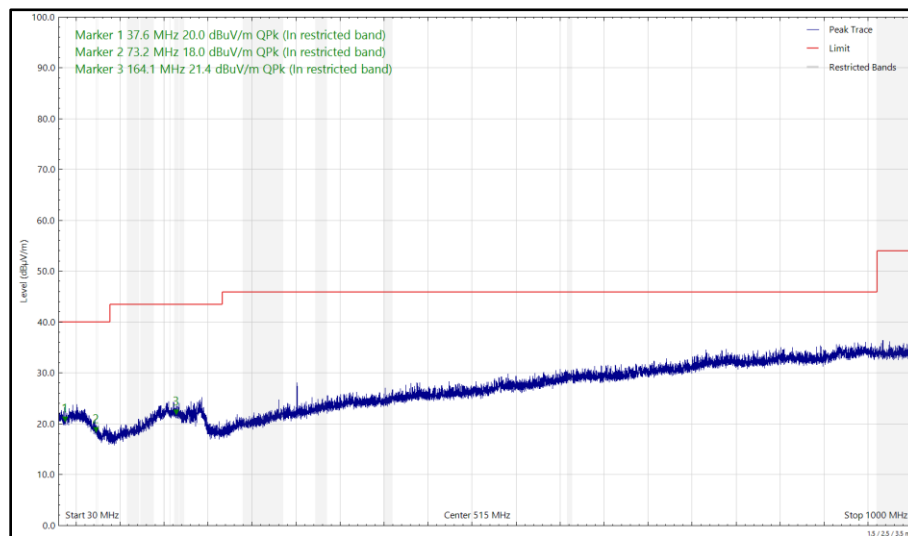


Figure 30 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

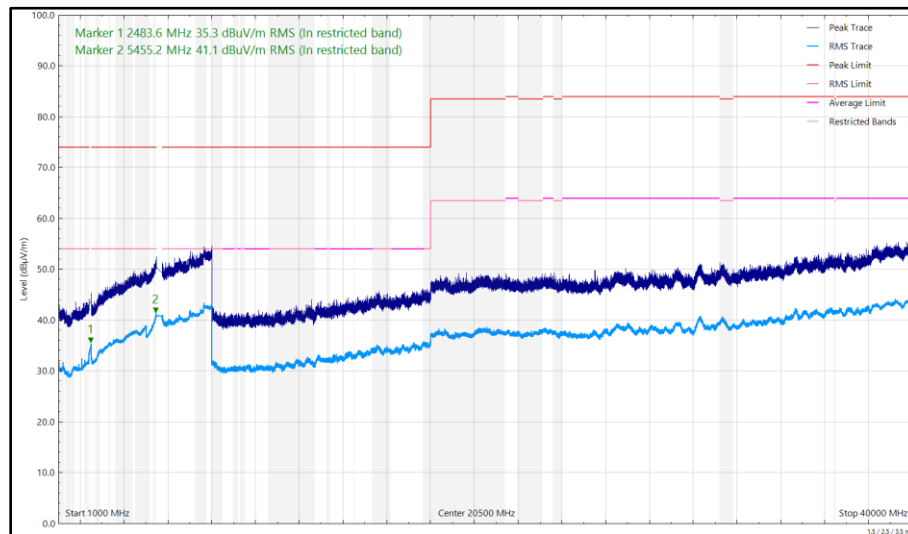


Figure 31 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 1 GHz to 40 GHz, Horizontal

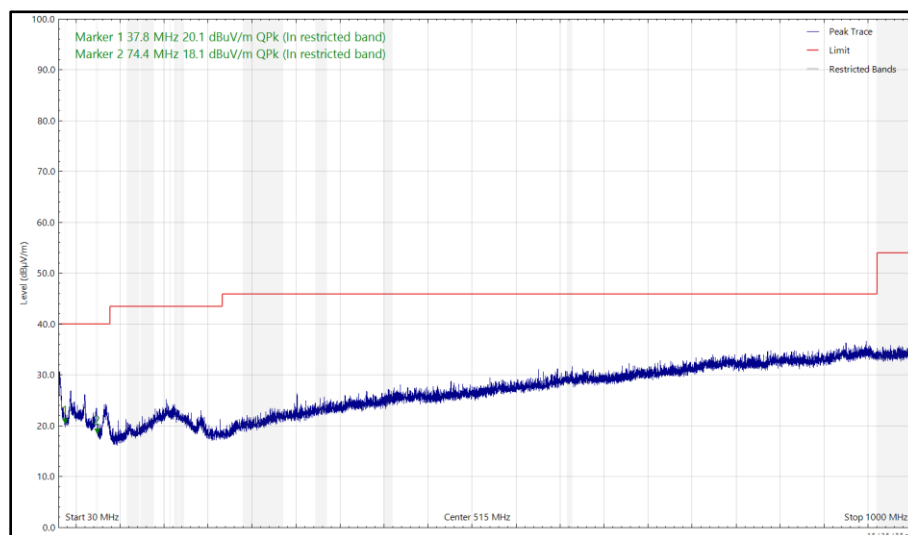


Figure 32 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

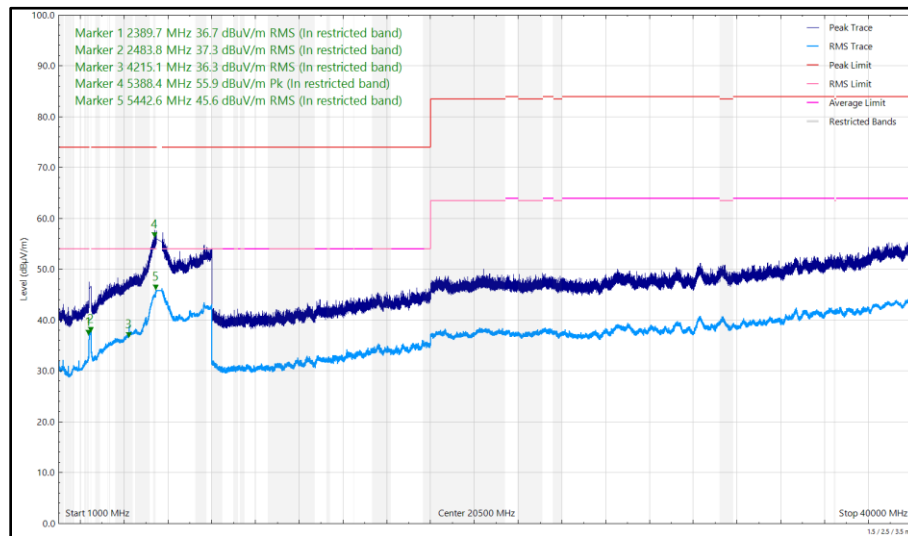


Figure 33 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
38.100	20.10	40.00	-19.90	Q-Peak	173	348	Vertical
38.206	20.10	40.00	-19.90	Q-Peak	143	243	Horizontal
74.332	18.49	40.00	-21.51	Q-Peak	263	100	Vertical
163.091	21.55	43.50	-21.95	Q-Peak	0	353	Horizontal
163.688	21.49	43.50	-22.01	Q-Peak	271	149	Vertical
2389.731	37.90	54.00	-16.10	RMS	358	337	Vertical
2483.569	37.65	54.00	-16.35	RMS	350	342	Vertical
4212.277	36.48	54.00	-17.52	RMS	320	256	Vertical
5442.040	56.79	74.00	-17.21	Peak	0	336	Vertical
5453.250	45.84	54.00	-8.16	RMS	350	326	Vertical
5454.204	41.10	54.00	-12.90	RMS	288	395	Horizontal

Table 16 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

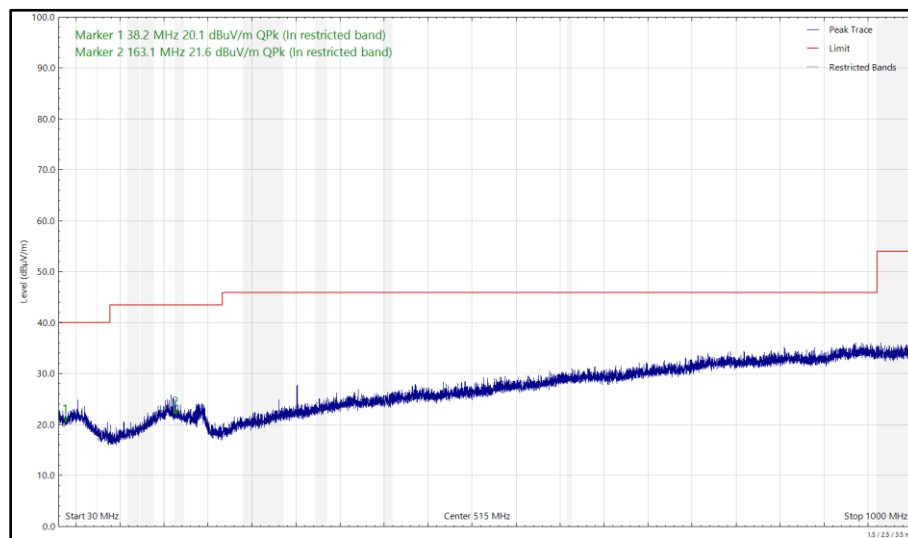


Figure 34 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

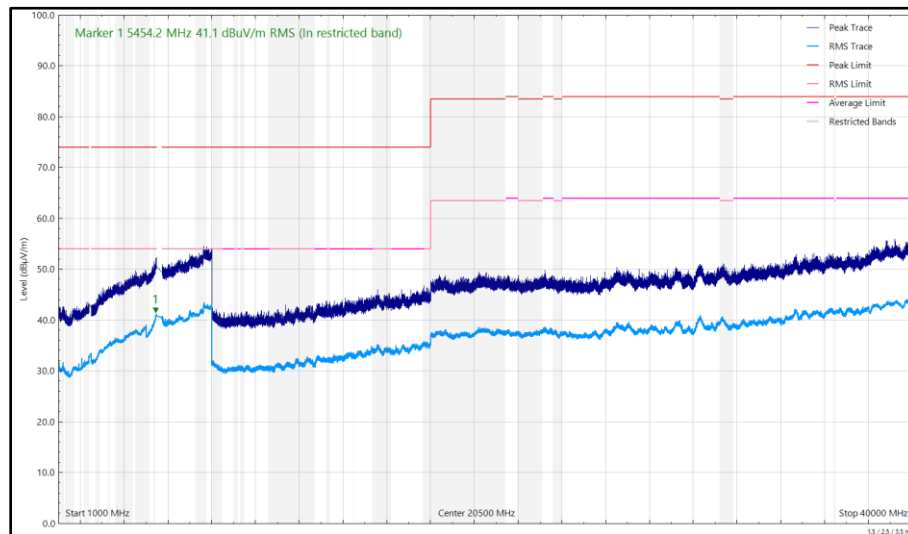


Figure 35 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 1 GHz to 40 GHz, Horizontal

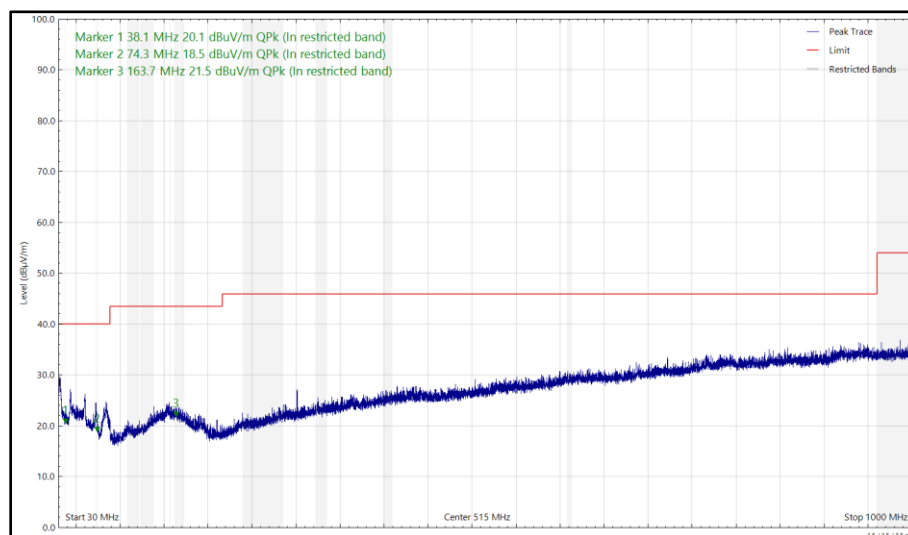


Figure 36 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

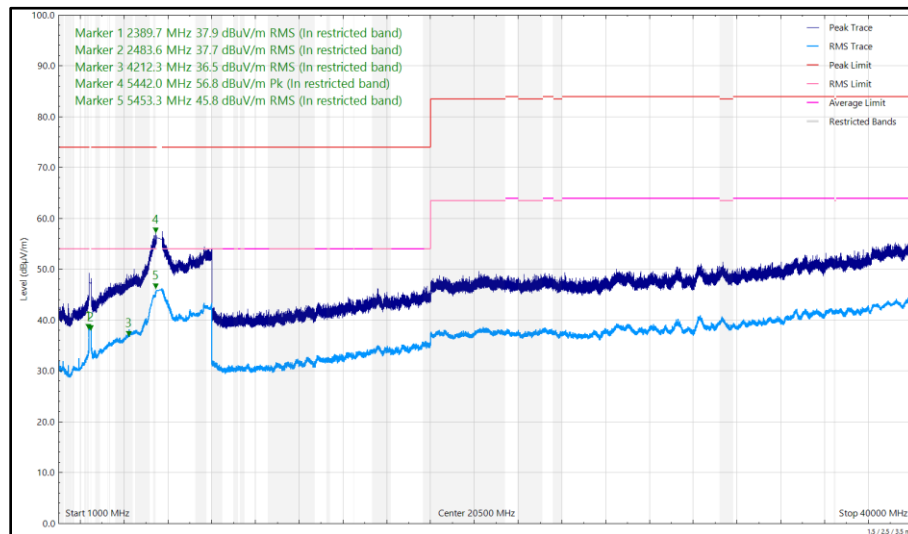


Figure 37 - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
38.242	20.06	40.00	-19.94	Q-Peak	265	130	Horizontal
74.514	18.23	40.00	-21.77	Q-Peak	242	138	Vertical
162.911	21.42	43.50	-22.08	Q-Peak	17	394	Vertical
165.788	21.38	43.50	-22.12	Q-Peak	133	221	Horizontal
2389.674	35.39	54.00	-18.61	RMS	350	348	Vertical
2483.781	38.15	54.00	-15.85	RMS	37	400	Vertical
2483.846	34.90	54.00	-19.10	RMS	61	397	Horizontal
4211.925	35.80	54.00	-18.20	RMS	58	371	Vertical
5431.702	40.32	54.00	-13.68	RMS	290	384	Horizontal
5435.569	55.92	74.00	-18.08	Peak	348	307	Vertical
5456.745	45.75	54.00	-8.25	RMS	350	329	Vertical

Table 17 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

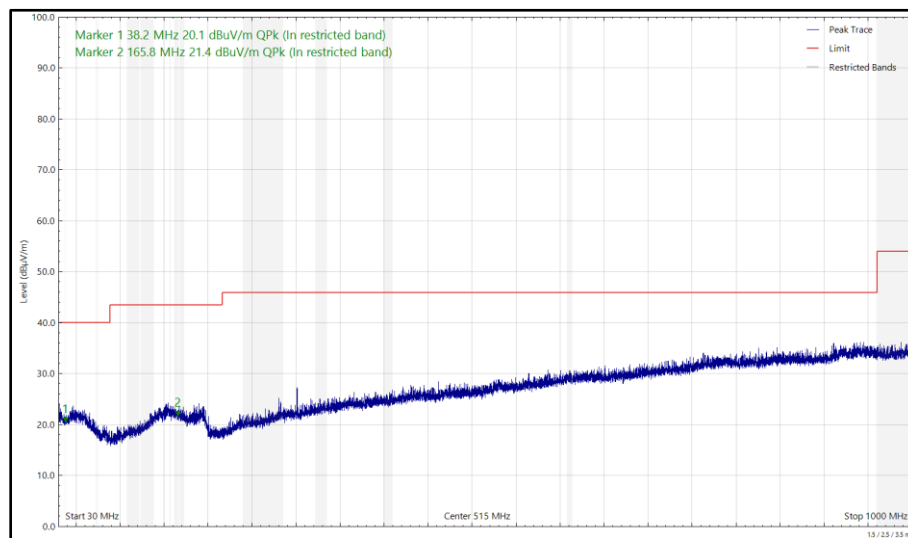


Figure 38 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

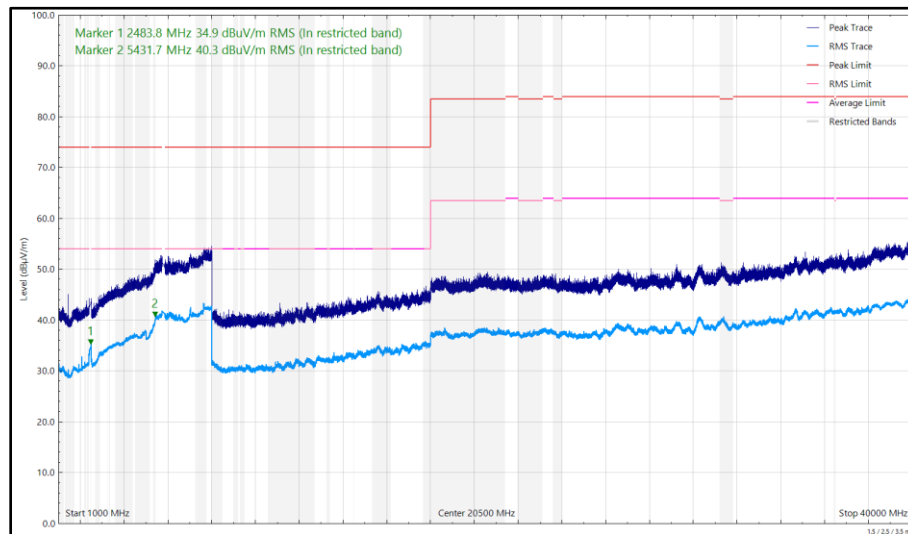


Figure 39 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 1 GHz to 40 GHz, Horizontal

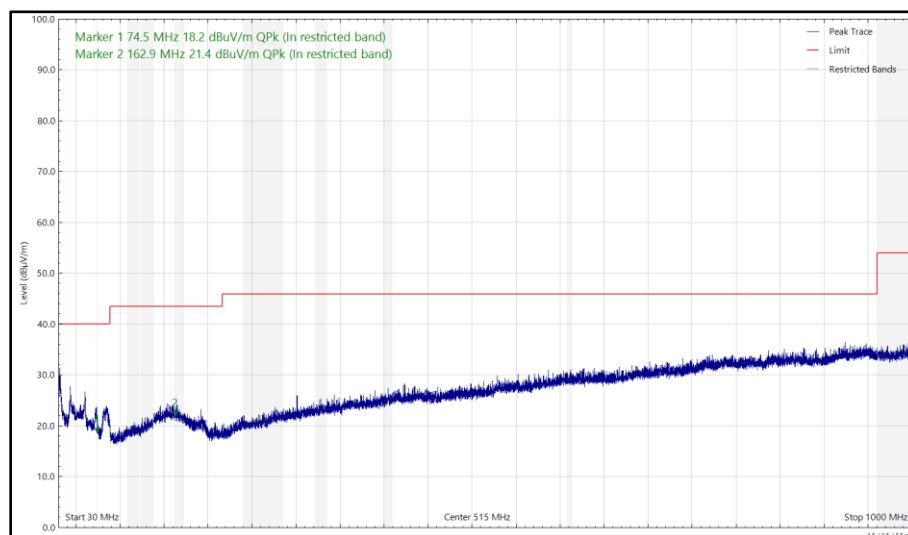


Figure 40 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

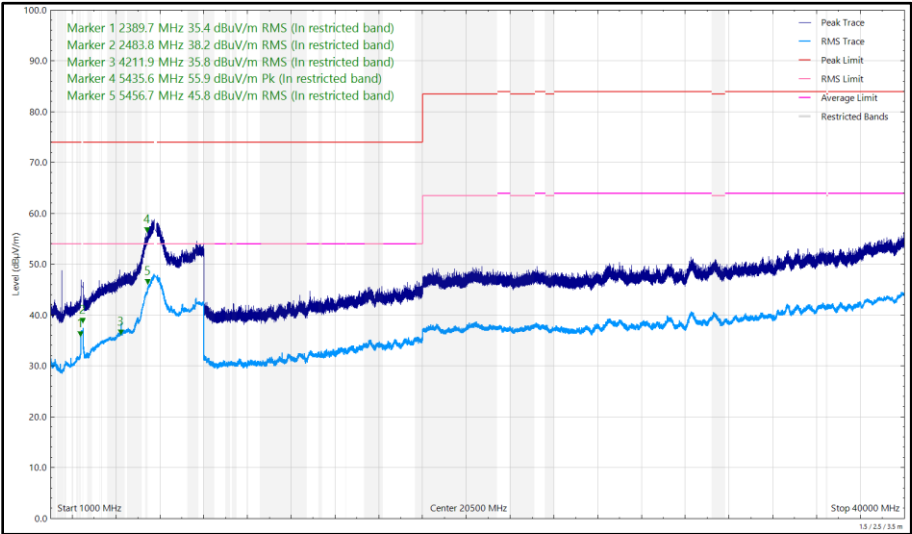


Figure 41 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
37.889	20.02	40.00	-19.98	Q-Peak	133	400	Horizontal
73.390	18.52	40.00	-21.48	Q-Peak	318	313	Vertical
73.460	18.01	40.00	-21.99	Q-Peak	322	350	Horizontal
162.987	21.42	43.50	-22.08	Q-Peak	187	395	Horizontal
164.315	21.49	43.50	-22.01	Q-Peak	177	114	Vertical
2389.772	37.94	54.00	-16.06	RMS	354	293	Vertical
2483.531	37.45	54.00	-16.55	RMS	350	304	Vertical
4220.045	35.86	54.00	-18.14	RMS	359	107	Vertical
5444.922	45.00	54.00	-9.00	RMS	5	301	Vertical
5452.859	56.09	74.00	-17.91	Peak	3	324	Vertical
5457.907	41.18	54.00	-12.82	RMS	293	393	Horizontal

Table 18 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

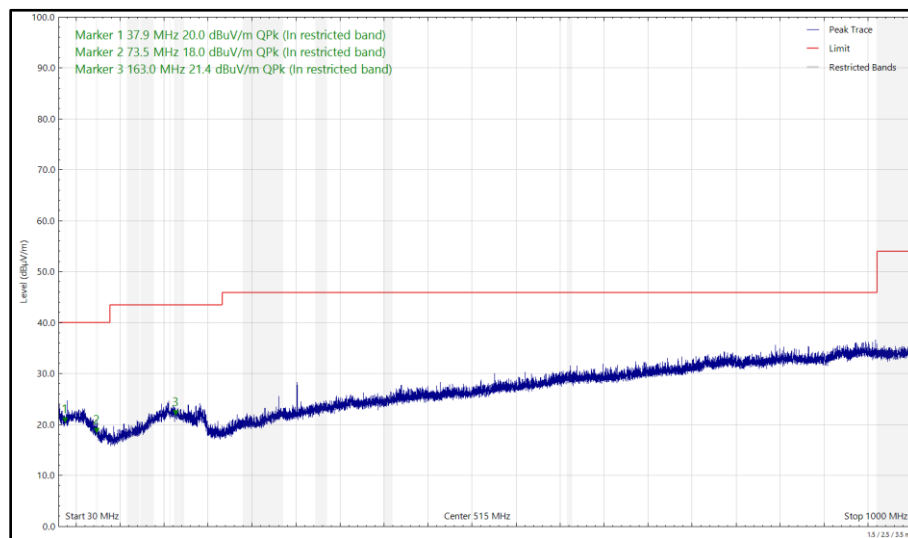


Figure 42 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

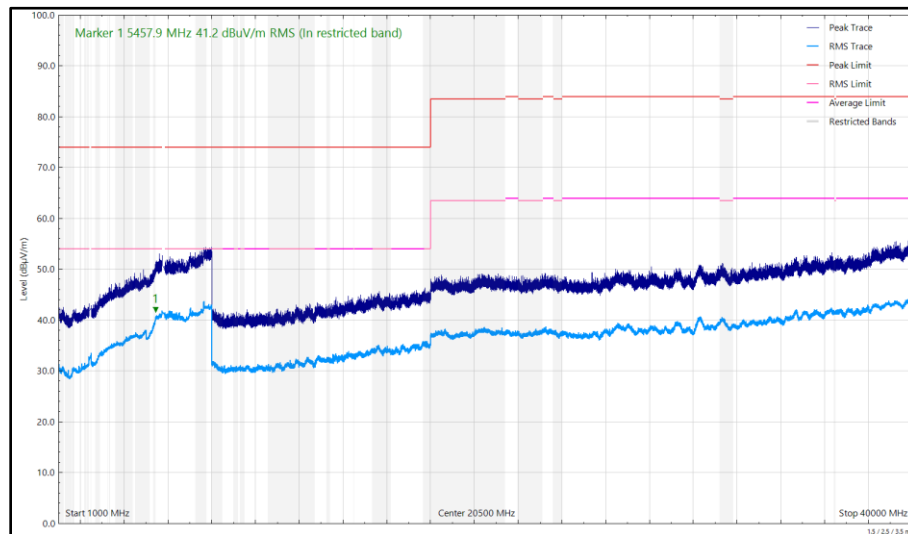


Figure 43 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 1 GHz to 40 GHz, Horizontal

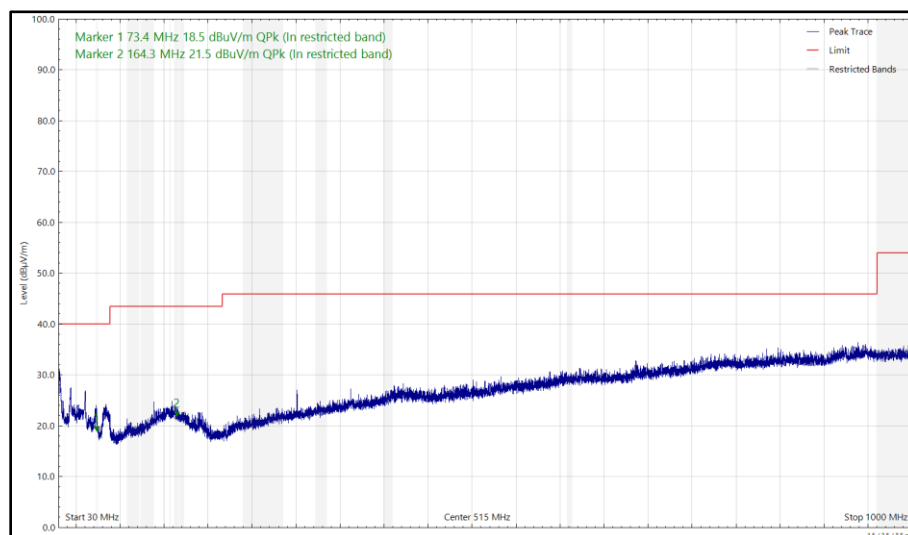


Figure 44 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

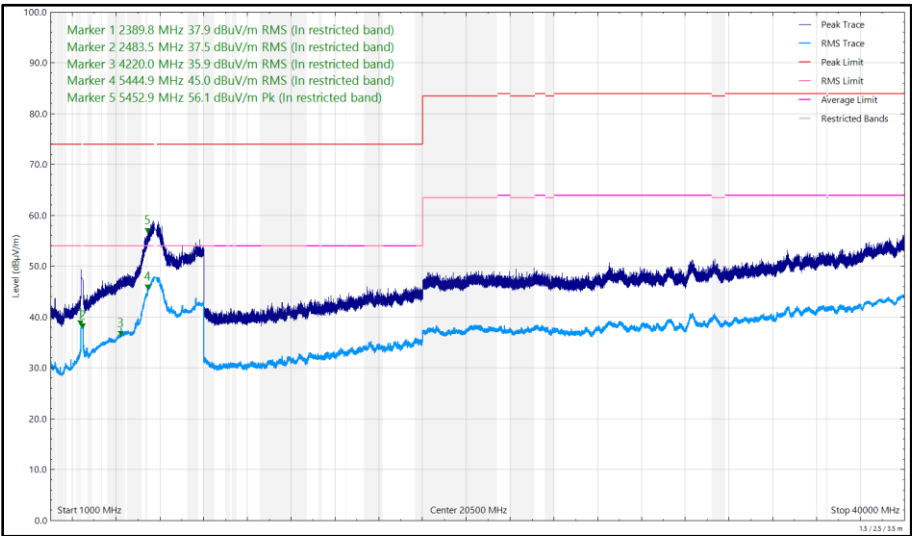


Figure 45 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 1 GHz to 40 GHz, Vertical

FCC 47 CFR Part 15, ISSED RSS-247 and ISSED RSS-GEN

The least stringent limit from the applicable rule parts was used to determine compliance for Radiated Emissions testing of multiple transmission sources.

The least stringent applicable limit was:

Clause	Limit
Part 15 247 (d) / RSS-247 Clause 6.6	-20 dBc / -30 dBc
Part 15.407 (b) / RSS-247 Clause 6.6, 7.3.1.3, 7.3.2.3, 7.3.3.3, 7.3.4.4	-27 dBm e.i.r.p
Part 15.209 / RSS-GEN Clause 8.9	Peak: 74 dBuV/m at 3m, Average 54 dBuV/m at 3m (Restricted bands > 1 GHz)
Part 15.407 (b) / RSS-247 Clause 7.3.2.3	-27 dBm e.i.r.p
Part 15.407 (b) / RSS-247 Clause 7.3.3.3	-27 dBm e.i.r.p
Part 15.407 (b) / RSS-247 Clause 7.3.4.4	-27 dBm e.i.r.p

Table 19

6 GHz WLAN and Thread

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
37.914	20.07	40.00	-19.93	Q-Peak	127	342	Horizontal
38.045	20.14	40.00	-19.86	Q-Peak	190	187	Vertical
73.693	17.92	40.00	-22.08	Q-Peak	79	242	Horizontal
74.475	17.90	40.00	-22.10	Q-Peak	16	380	Vertical
162.112	21.50	43.50	-22.00	Q-Peak	7	189	Vertical
164.023	21.40	43.50	-22.10	Q-Peak	280	394	Horizontal
2389.981	36.01	54.00	-17.99	RMS	10	291	Vertical
2484.416	36.64	54.00	-17.36	RMS	19	351	Vertical
2484.769	34.77	54.00	-19.23	RMS	52	391	Horizontal
4213.459	34.82	54.00	-19.18	RMS	6	157	Vertical
5442.926	37.11	54.00	-16.89	RMS	302	286	Horizontal
5443.687	41.33	54.00	-12.67	RMS	350	320	Vertical

Table 20 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

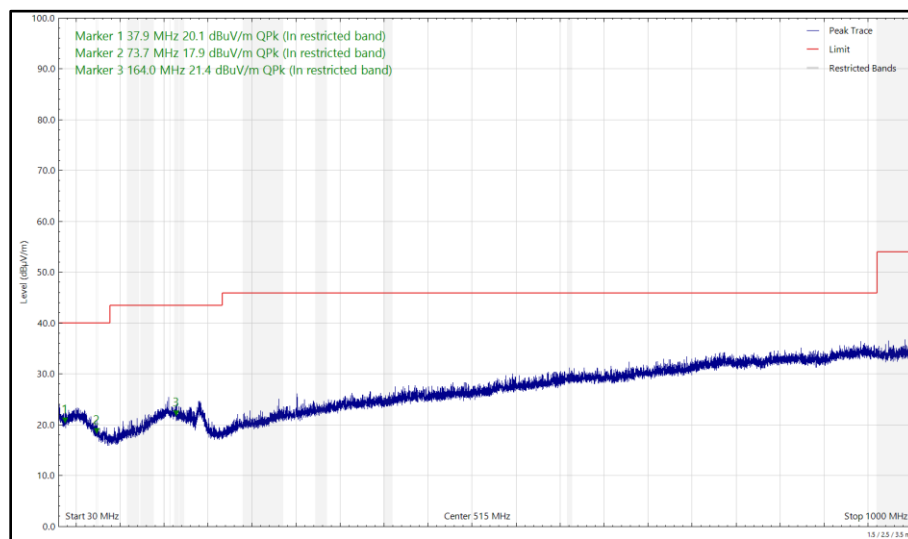


Figure 46 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

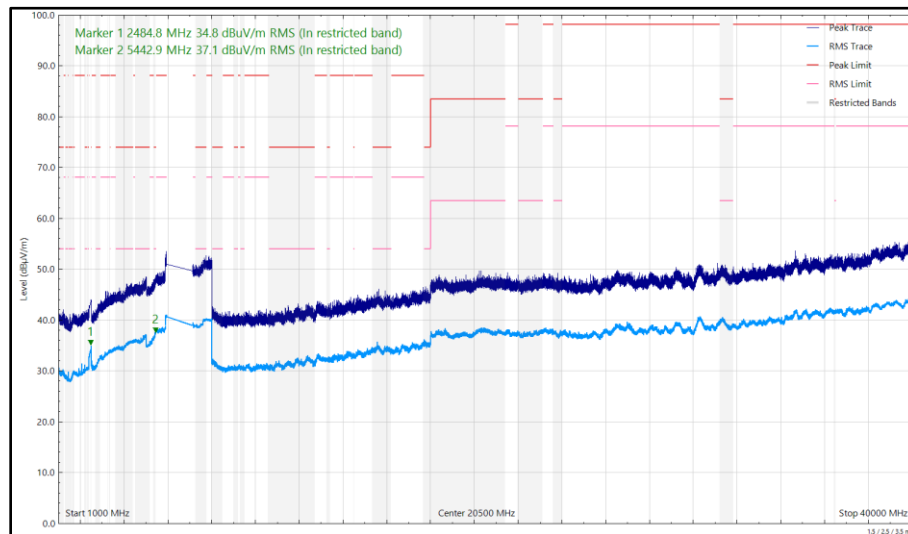


Figure 47 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 1 GHz to 40 GHz, Horizontal

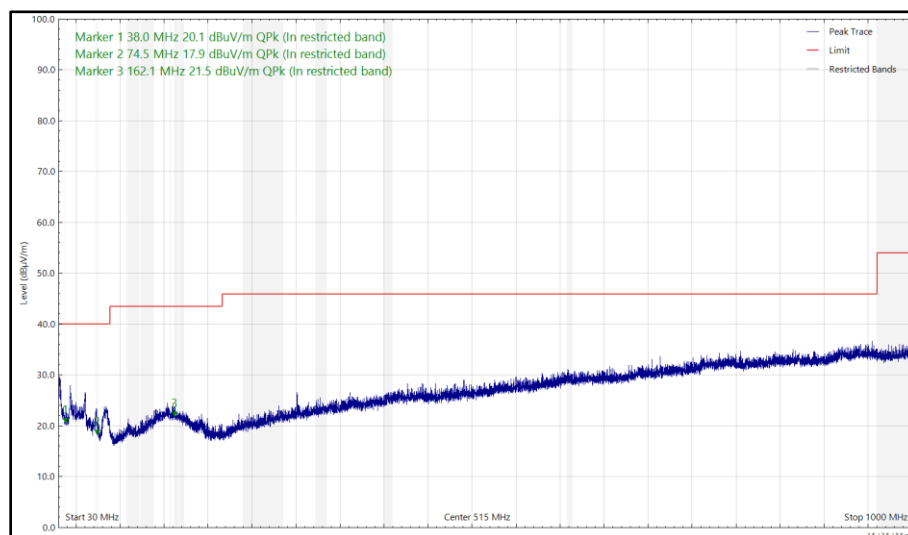


Figure 48 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

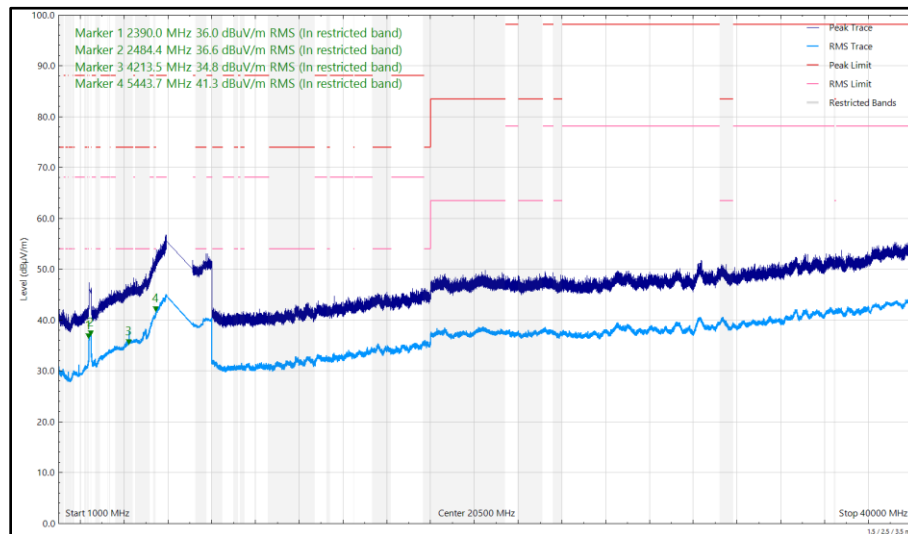


Figure 49 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
38.207	20.17	40.00	-19.83	Q-Peak	17	385	Horizontal
73.225	19.39	40.00	-20.61	Q-Peak	347	133	Vertical
164.709	21.32	43.50	-22.18	Q-Peak	252	340	Horizontal
165.680	21.33	43.50	-22.17	Q-Peak	235	393	Vertical
2389.808	37.66	54.00	-16.34	RMS	353	302	Vertical
2483.561	37.72	54.00	-16.28	RMS	338	310	Vertical
4211.825	35.27	54.00	-18.73	RMS	335	147	Vertical
5456.666	41.62	54.00	-12.38	RMS	0	318	Vertical
5459.416	37.76	54.00	-16.24	RMS	298	344	Horizontal

Table 21 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

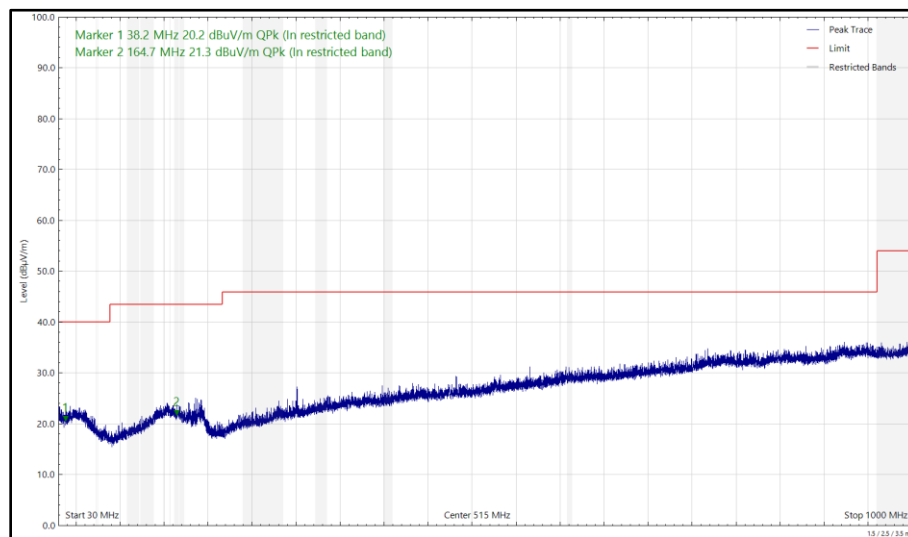


Figure 50 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

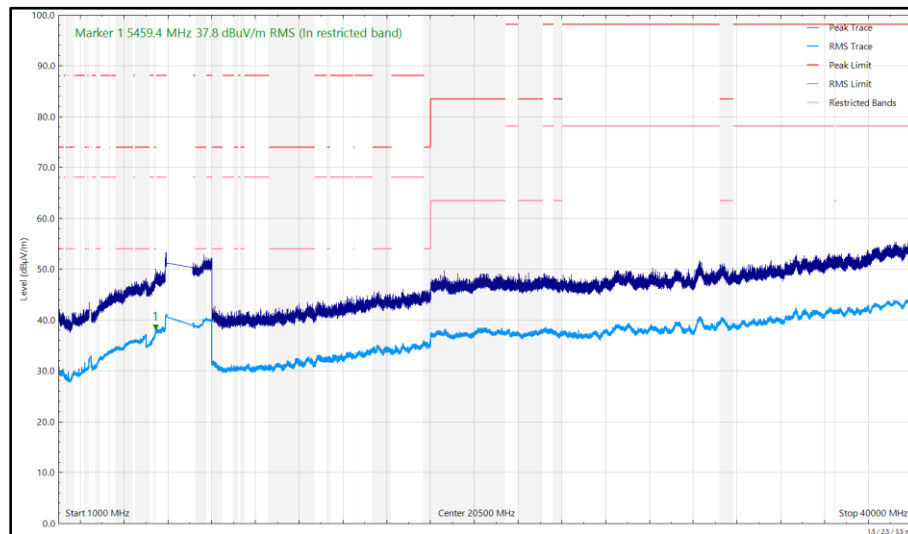


Figure 51 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 1 GHz to 40 GHz, Horizontal

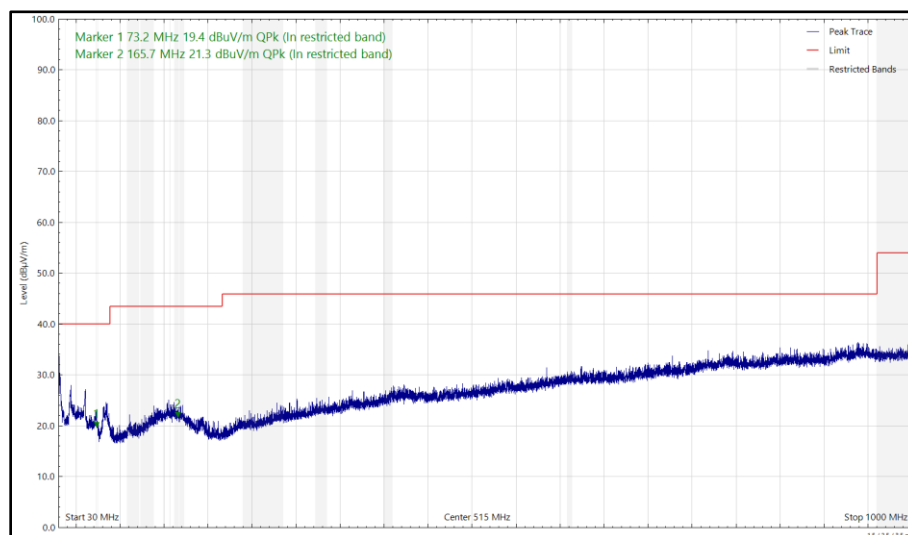


Figure 52 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

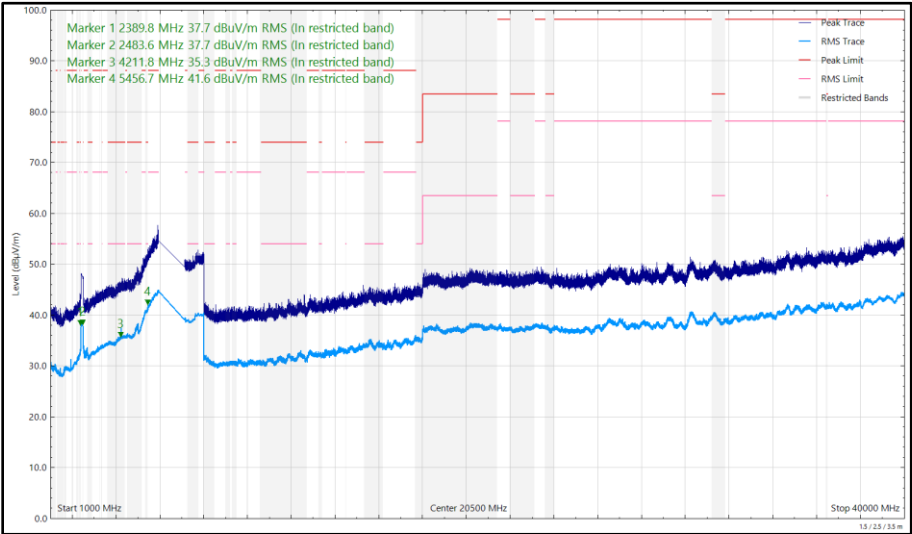


Figure 53 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
73.265	19.27	40.00	-20.73	Q-Peak	349	207	Vertical
165.186	21.32	43.50	-22.18	Q-Peak	89	278	Horizontal
169.409	21.18	43.50	-22.32	Q-Peak	10	398	Vertical
2389.804	35.92	54.00	-18.08	RMS	9	298	Vertical
2484.484	35.39	54.00	-18.61	RMS	54	399	Horizontal
2484.726	38.07	54.00	-15.93	RMS	39	395	Vertical
4217.858	34.64	54.00	-19.36	RMS	118	112	Vertical
5456.255	41.10	54.00	-12.90	RMS	2	344	Vertical
5456.866	36.45	54.00	-17.55	RMS	144	124	Horizontal
7251.686	41.24	54.00	-12.76	RMS	74	390	Horizontal
7265.455	40.79	54.00	-13.21	RMS	22	247	Vertical

Table 22 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 40 GHz

No other emissions found within 20 dB of the limit.

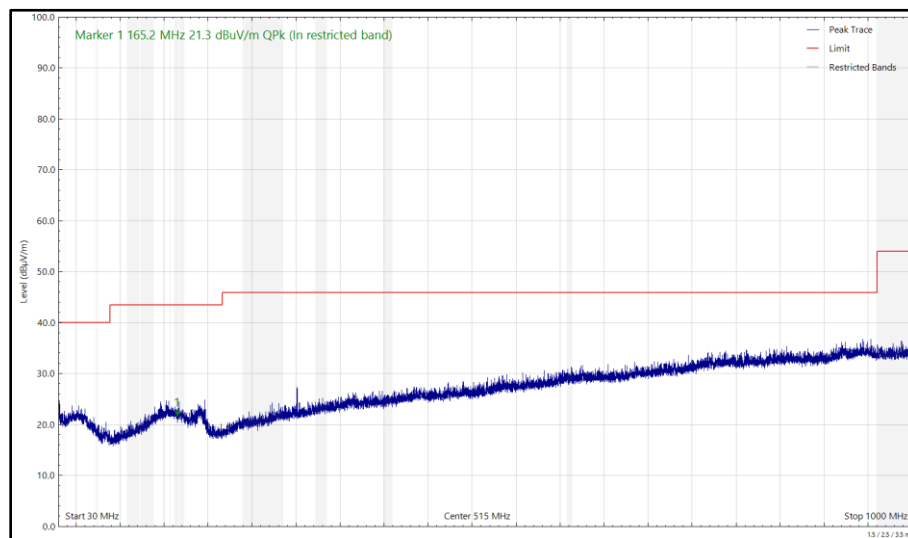


Figure 54 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), Thread, ePA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)