

FCC and ISED Test Report

Apple Inc
Model: A3428



In accordance with FCC 47 CFR Part 15E,
ISED RSS-248 and ISED RSS-GEN
(6 GHz WLAN)

Prepared for: Apple Inc
One Apple Park Way
Cupertino
California
95014
USA

TUV SUD
SERVICES
(UK) LIMITED

Digitally signed by
TUV SUD SERVICES
(UK) LIMITED
Date: 2026.02.20
17:49:05 Z

FCC ID: BCGA3428

IC: 579C-A3428

COMMERCIAL-IN-CONFIDENCE



Document 75963993-19 Issue 02

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Tiago De Camargo Alves	Technical Support	Authorised Signatory	20 February 2026

Signatures in this approval box have checked this document in line with the requirements of TUV SUD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15E and ISED RSS-248 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generation	Rachael Watkins	20 February 2026	

FCC Accreditation
553713/UK2026 Concorde Park, Fareham Test Laboratory

ISED Accreditation
28798/UK0003 Concorde Park, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15E: 2024, ISED RSS-248: Issue 3 (2024-10) and ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TUV SUD with all reasonable skill and care. The document is confidential to the potential Client and TUV SUD. No part of this document may be reproduced without the prior written approval of TUV SUD. © 2026 TUV SUD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited). Results of tests covered by our Flexible UKAS Accreditation Schedule are marked FS (Flexible Scope).

TUV SUD
is a trading name of TUV SUD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TUV SUD Ltd is a
TUV SUD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TUV SUD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom

TUV SUD

TUV®



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	6
1.6	Identification of the EUT	6
1.7	EUT Modification Record	7
1.8	Test Location	8
2	Test Details	9
2.1	Emission Bandwidth	9
2.2	Dual Client Test.....	231
2.3	Maximum Conducted Output Power	236
2.4	Maximum Conducted Power Spectral Density.....	429
2.5	Authorised Band Edges	662
2.6	Spurious Radiated Emissions	755
2.7	Unwanted Emissions within the 5925-7125 MHz band.....	775
2.8	Contention Based Protocol	1040
2.9	Transmit Power Control; Very Low Power Devices	1077
3	Measurement Uncertainty	1081



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	06 February 2026
2	Update to section 2.7	20 February 2026

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
EUT/Sample Identification	Refer to section 1.6
Test Specification/Issue/Date	FCC 47 CFR Part 15E: 2024 ISED RSS-248: Issue 3 (2024-10) ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02)
Start of Test	18-October-2025
Finish of Test	20-February-2026
Name of Engineer(s)	James Woods, Arjun Sasikumar. Mahmud Chowdhury Babitha Babu, Tony Baby, Ahmed Al Derdiri, Ioan-Alexandru Bogatu, Zeeshan Zia, Gridi Bilali, Dulanjan Witharamalage, Ian Hart, Morsalin Hossain, Akhil Rajendran Bhaskaran Nair
Related Document(s)	ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 662911 D01 v02r01 KDB 789033 D02 v02r01 KDB 987594 D02 v03



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15E and ISSED RSS-248 and ISSED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15E	RSS-248	RSS-GEN			
Configuration and Mode: 6 GHz WLAN						
-	15.203	-	-	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.407 (a)	4.4	6.7	Emission Bandwidth	Pass	KDB 789033 D02 v02r01
2.2	15.407 (a)	4.5	6.12	Dual Client Test	Pass	KDB 987594 D02 v03
2.3	15.407 (a)	4.5	6.12	Maximum Conducted Output Power	Pass	KDB 662911 D01 v02r01 KDB 789033 D02 v02r01
2.4	15.407 (a)	4.5	-	Maximum Conducted Power Spectral Density	Pass	KDB 662911 D01 v02r01 KDB 789033 D02 v02r01
2.5	15.407 (b)	4.6	6.13	Authorised Band Edges	Pass	ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01
2.6	15.209 and 15.407 (b)	4.6	6.13 and 8.9	Spurious Radiated Emissions	Pass	ANSI C63.10 (2020) +Cor.1-2023+C63.10a-2024 KDB 789033 D02 v02r01
2.7	15.407 (b)	4.6	6.13	Unwanted Emissions within the 5925-7125 MHz band	Pass	KDB 987594 D02 v03
2.8	15.407 (d)(6)	4.7	-	Contention Based Protocol	Pass	KDB 987594 D02 v03
2.9	15.407 (d)(10)	4.5.6	-	Transmit Power Control	Pass	KDB 987594 D02 v03

Table 2



1.4 Product Information

1.4.1 Technical Description

The equipment under test (EUT) was a portable laptop computer.

1.4.2 Test Modes

The EUT's 6 GHz 802.11 radio supported SISO (Single Input/Single Output) and 2x2 MIMO (Multiple Input/Multiple Output) modes. 802.11a/ax/be support 20 MHz, 40 MHz, 80MHz and 160 MHz bandwidths.

802.11a mode supports SISO and Cyclic Delay Diversity (CDD) operation only. 802.11ax/be supported SISO, Cyclic Delay Diversity (CDD), Space Division Multiplexing (SDM) and Space Time Block Coding (STBC) and Transmit Beamforming (TxBF) modes. The EUT supported 802.11ax/be Single User (SU) and Multi-User (MU) with all Resource Unit (RU) sizes from 26 subcarriers, up to the maximum allowed, dependent on channel bandwidth. 802.11be additionally supports 52+26 and 106+26 Multiple Resource Unit (MRU) modes and channel punctured modes with 484+242, 996+484, and 996+484+242 RUs.

The EUT is categorized as a Standard Power/Low Power (6CD) Dual Client & (6VL) Very Low Power device in the 5.925-7.125 GHz bands by region, as described below.

Region	U-NII-5 (5925 - 6425 MHz)	U-NII-6 (6425 - 6525MHz)	U-NII-7 (6525 - 6875 MHz)	U-NII-8 (6875 - 7125 MHz)
Canada (ISED)	SP/LP/VLP	SP/LP/VLP	SP/LP/VLP	LP/VLP
US (FCC)	SP/LP/VLP	LP/VLP	SP/LP/VLP	LP/VLP

The EUT uses different output powers per core dependent on how many cores are used. The EUT also uses different power tables for Cyclic Delay Diversity (CDD), Space Division Multiplexing (SDM) and Transmit Beamforming (TxBF) modes. It uses the same conducted power across all cores in any given mode, but due to the different antenna gains the radiated powers per core differ.

After preliminary investigations were performed to find worst-case operation, the EUT was tested in the following modes:

SISO Modes (Core 0 and Core 1)

- 802.11a - 12 Mbps
- 802.11a40 - 12 Mbps
- 802.11a80 - 12 Mbps
- 802.11a160 - 12 Mbps
- 802.11ax HE20 SU - MCS2x1
- 802.11ax HE40 SU - MCS2x1
- 802.11ax HE80 SU - MCS2x1
- 802.11ax HE160 SU - MCS2x1
- 802.11ax HE20 MU RU26/52/106 - MCS2x1*
- 802.11be EHT20 MU RU52+26/106+26 - MCS2x1
- 802.11be EHT80 MU RU484+242 - MCS2x1
- 802.11be EHT160 MU RU996+484/996+484+242 - MCS2x1



2x2 MIMO Modes (Core 0 + Core 1 for U-NII-5 / 6 / 7 / 8):

- 802.11a - CDD - 12 Mbps
- 802.11a40 - CDD - 12 Mbps
- 802.11a80 - CDD - 12 Mbps
- 802.11a160 - CDD - 12 Mbps
- 802.11ax HE20 SU - CDD (MCS2x1), SDM (MCS2x2) and TxBF (MCS2x1)
- 802.11ax HE40 SU - CDD (MCS2x1), SDM (MCS2x2) and TxBF (MCS2x1)
- 802.11ax HE80 SU - CDD (MCS2x1), SDM (MCS2x2) and TxBF (MCS2x1)
- 802.11ax HE160 SU - CDD (MCS2x1) and SDM (MCS2x2)
- 802.11ax HE20 MU RU26/52/106 - CDD (MCS2x1) and SDM (MCS2x2)*
- 802.11be EHT20 MU RU52+26/106+26 - CDD - MCS2x1
- 802.11be EHT80 MU RU484+242 - CDD - MCS2x1
- 802.11be EHT160 MU RU996+484/996+484+242 - CDD - MCS2x1

*Note: The RU offset for bottom and middle channels were placed in the lowest position and on the top channel, the offset was placed in the upper most position.

1.4.3 Test Setup

For conducted tests the EUT antennas were disconnected and replaced with U.FL to SMA test cables to enable conducted testing on each core. The loss of these test cables were known and compensated for in any conducted measurements.

For all testing except Contention Based Protocol, Dual Client & TPC tests the EUT was put into a continuous transmit test mode with the chipset manufacturer's test commands. The EUT then transmitted the required type of packeted 802.11 data frames of fixed length, containing the standard headers and with pseudo-random data content, ensuring the measured signals were representative and contained all the symbols at the highest power control level.

The test setup used for Contention Based Protocol, Dual Client & TPC tests are described in the relevant test result sections of the present document.

1.4.4 Antenna Gain Table

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
Core 0 (WF1)	5925 to 6105	3.5	1.15
	6105 to 6265	2.1	1.17
	6265 to 6425	3.1	1.21
	6425 to 6525	2.7	1.27
	6525 to 6875	5.2	1.25
	6875 to 7125	3.5	1.26
Core 1 (WF2)	5925 to 6105	6.6	1.15
	6105 to 6265	6.5	1.17
	6265 to 6425	5.4	1.21
	6425 to 6525	4.6	1.27
	6525 to 6875	4.6	1.25
	6875 to 7125	2.8	1.26

Table 3



1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 Identification of the EUT

The table below details identification of the EUT(s) that have been used to carry out the testing within this report.

Model: A3428		
Serial Number	Hardware Version	Software Version
FF9MP4FP2G	REV1.0	25D36
GJM3XKXYGQ	REV1.0	25D36
HQ9LP714XX	REV1.0	25D38
GT6RH79JJQ	REV1.0	25D36
F2H34JK2NG	REV1.0	25D46
G9F4Y6NJ31	REV1.0	25D36
DJQ7J7L5JK	REV1.0	25D36

Table 4



1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A3428, Serial Number: FF9MP4FP2G			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3428, Serial Number: GJM3XKXYGQ			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3428, Serial Number: GT6RH79JJQ			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3428, Serial Number: G9F4Y6NJ31			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3428, Serial Number: DJQ7J7L5JK			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3428, Serial Number: HQ9LP714XX			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3428, Serial Number: F2H34JK2NG			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 5



1.8 Test Location

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 6 GHz WLAN		
Emission Bandwidth	James Woods, Arjun Sasikumar. Mahmud Chowdhury	UKAS
Dual Test	Babitha Babu	UKAS
Maximum Conducted Output Power	James Woods, Arjun Sasikumar	UKAS
Maximum Conducted Power Spectral Density	James Woods, Arjun Sasikumar	UKAS
Authorised Band Edges	Tony Baby, Ahmed Al Derdiri, Ioan-Alexandru Bogatu, Zeeshan Zia, Gridi Bilali, Dulanjan Witharamalage	UKAS
Spurious Radiated Emissions	Ian Hart, Morsalin Hossain, Gridi Bilali, Akhil Rajendran Bhaskaran Nair, Dulanjan Witharamalage	UKAS
Unwanted Emissions within the 5925-7125 MHz band	James Woods, Arjun Sasikumar. Mahmud Chowdhury	UKAS
Contention Based Protocol	Babitha Babu	UKAS
Transmit Power Control	Babitha Babu	UKAS

Table 6

Office Address:

TÜV SÜD
Concorde Park
Concorde Way
Fareham
Hampshire
PO15 5FG
United Kingdom



2 Test Details

2.1 Emission Bandwidth

2.1.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)(11)
ISED RSS-248, Clause 4.4
ISED RSS-GEN, Clause 6.7

2.1.2 Equipment Under Test and Modification State

A3428, S/N: G9F4Y6NJ31 - Modification State 0
A3428, S/N: DJQ7J7L5JK - Modification State 0

2.1.3 Date of Test

15-December-2025 to 27-January-2026

2.1.4 Test Method

The test was performed in accordance with KDB 789033, clause C.1 for 26 dB bandwidth and clause D for 99% occupied bandwidth.

2.1.5 Environmental Conditions

Ambient Temperature	23.9 - 25.3 °C
Relative Humidity	36.8 - 44.2 %

2.1.6 Test Results

6 GHz WLAN

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11a LPI (20 MHz)	20.976	22.944
802.11a LPI (40 MHz)	42.432	43.740
802.11a LPI (80 MHz)	105.586	114.840
802.11a LPI (160 MHz)	162.960	163.968
802.11ax HE20 SU LPI	22.194	22.722
802.11ax HE40 SU LPI	44.508	45.036
802.11ax HE80 SU LPI	82.544	82.852
802.11ax HE160 SU LPI	164.598	164.934
802.11a SP (20 MHz)	21.096	22.734
802.11a SP (40 MHz)	42.070	50.364
802.11a SP (80 MHz)	88.110	113.048
802.11a SP (160 MHz)	163.002	167.454
802.11ax HE20 SU SP	21.006	22.722
802.11ax HE40 SU SP	42.384	44.928
802.11ax HE80 SU SP	81.796	82.962
802.11ax HE160 SU SP	163.842	164.388
802.11a VLP (20 MHz)	21.012	22.860
802.11a VLP (40 MHz)	42.876	44.076
802.11a VLP (80 MHz)	11.826	112.824
802.11a VLP (160 MHz)	163.296	163.800
802.11ax HE20 SU VLP	22.062	22.560
802.11ax HE40 SU VLP	44.364	44.964
802.11ax HE80 SU VLP	82.346	82.896
802.11ax HE160 SU VLP	164.388	164.976

Table 7 - 26 dB Bandwidth Summary Results – Core 0

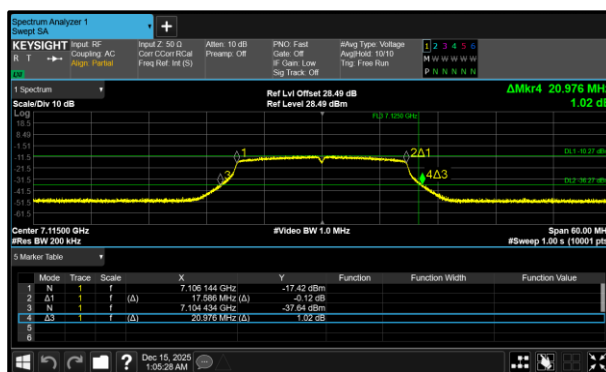


Figure 1 - 802.11a20 LPI Minimum 26 dB EBW

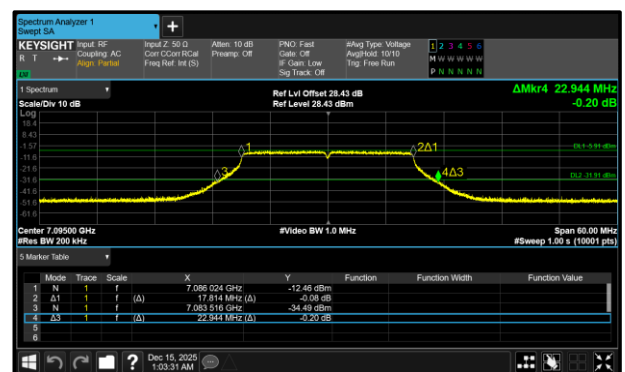


Figure 2 - 802.11a20 LPI Maximum 26 dB EBW

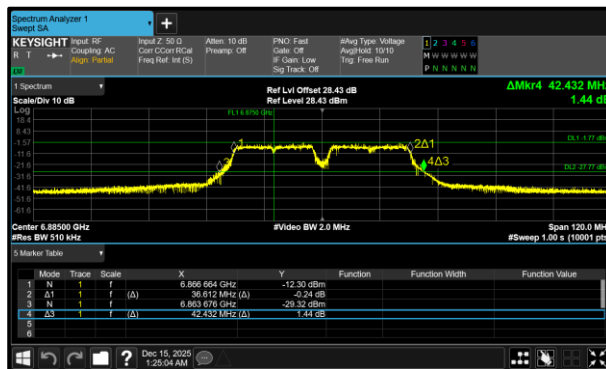


Figure 3 - 802.11a40 LPI Minimum 26 dB EBW

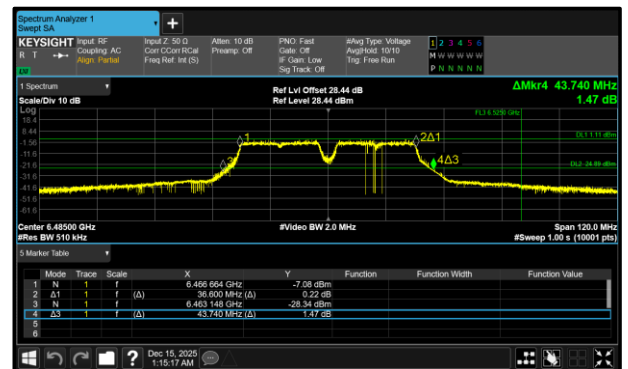


Figure 4 - 802.11a40 LPI Maximum 26 dB EBW

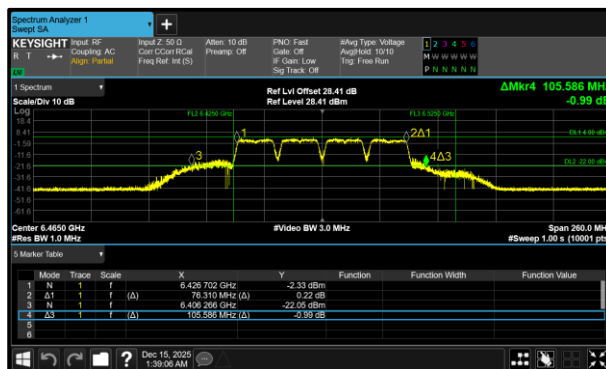


Figure 5 - 802.11a80 LPI Minimum 26 dB EBW

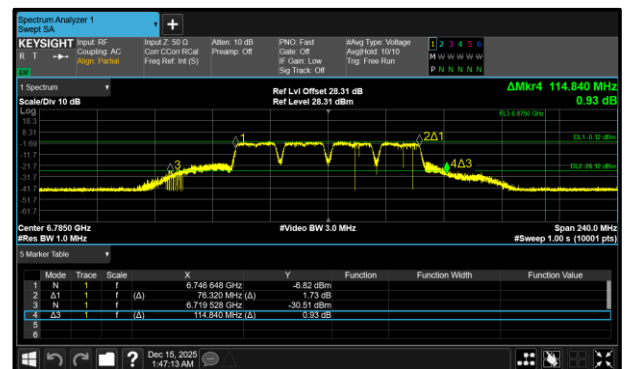


Figure 6 - 802.11a80 LPI Maximum 26 dB EBW

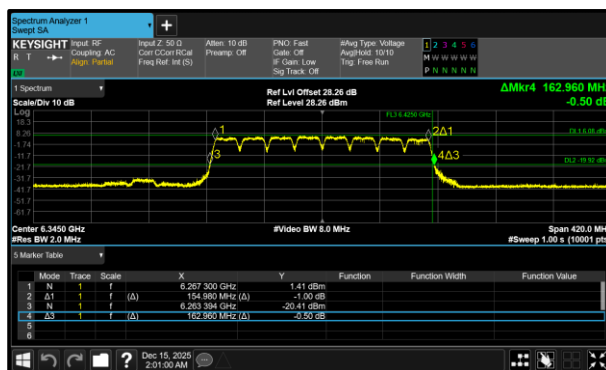


Figure 7 - 802.11a160 LPI Minimum 26 dB EBW

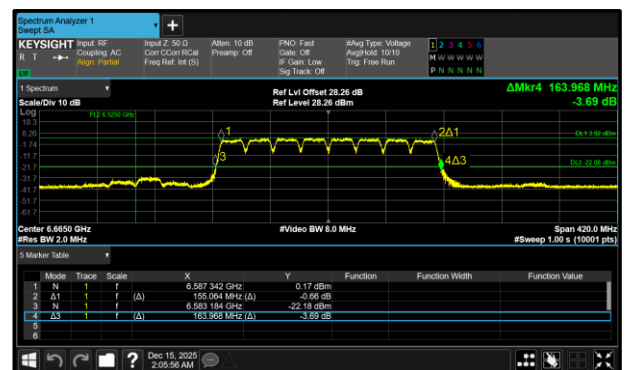
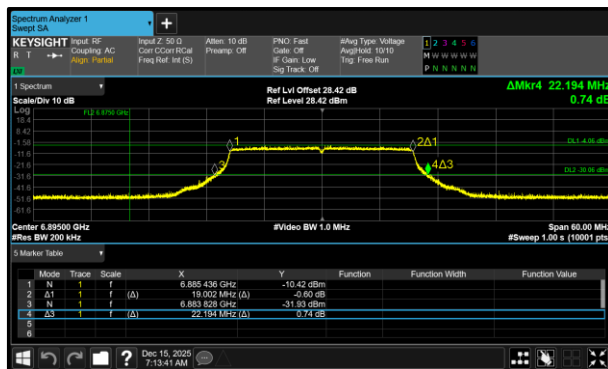
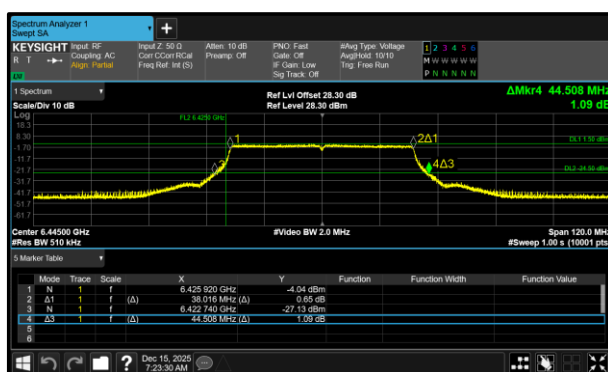
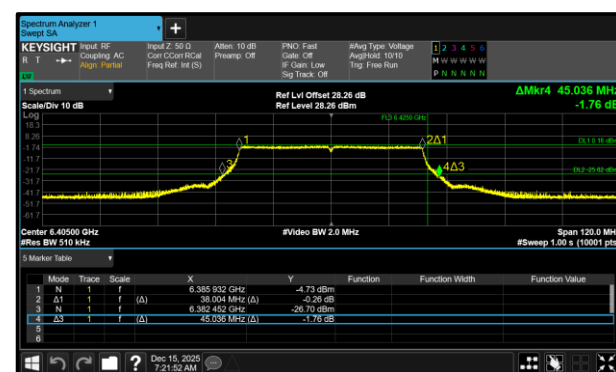
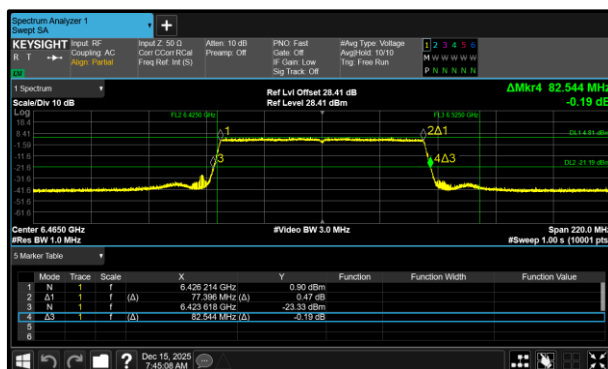
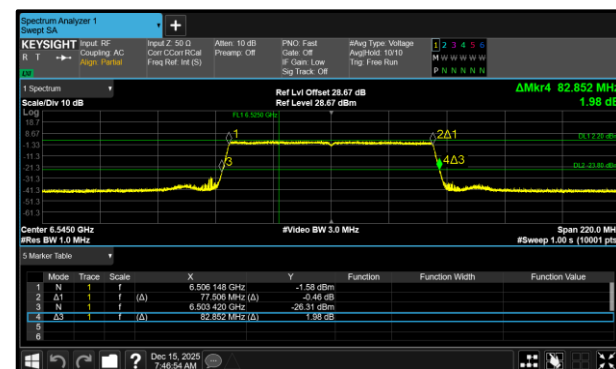


Figure 8 - 802.11a160 LPI Maximum 26 dB EBW



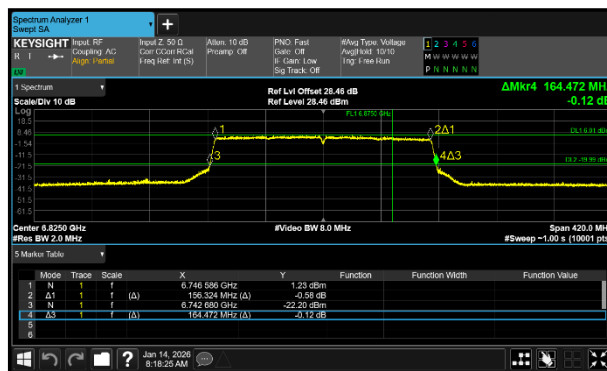


Figure 15 - 802.11ax HE160 SU LPI Minimum 26 dB EBW

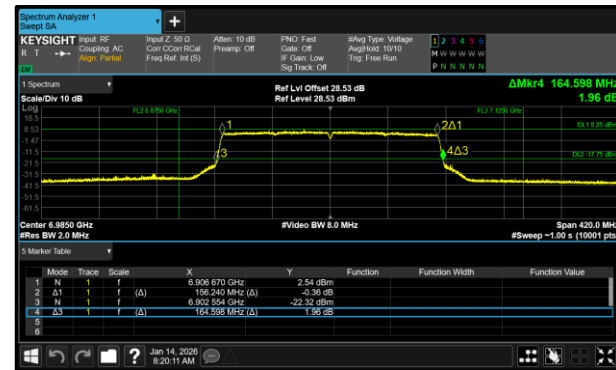


Figure 16 - 802.11ax HE160 SU LPI Maximum 26 dB EBW

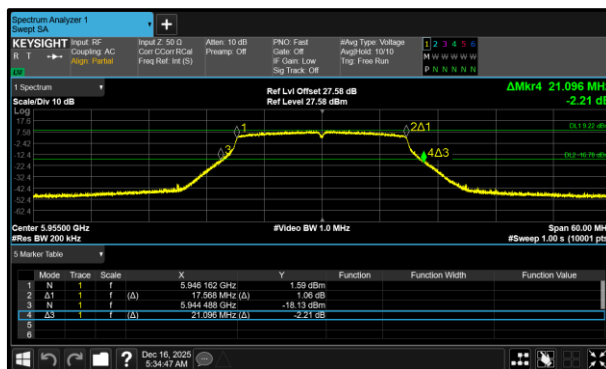


Figure 17 - 802.11a20 SP Minimum 26 dB EBW



Figure 18 - 802.11a20 SP Maximum 26 dB EBW

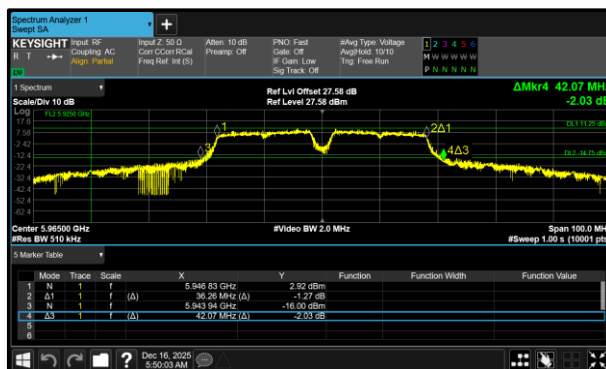


Figure 19 - 802.11a40 SP Minimum 26 dB EBW

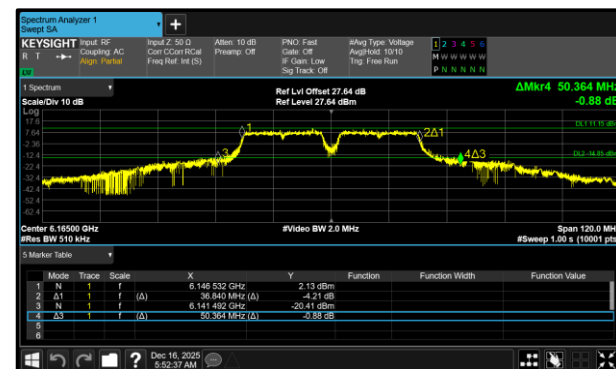


Figure 20 - 802.11a40 SP Maximum 26 dB EBW

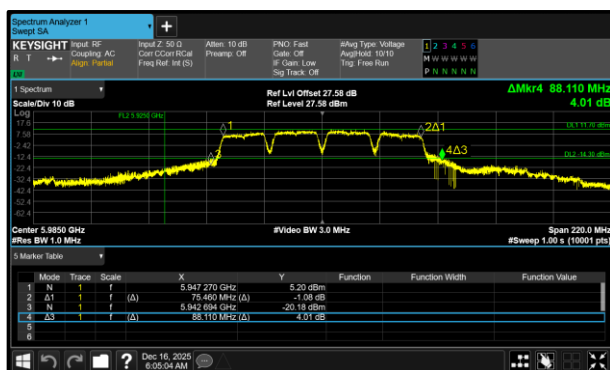


Figure 21 - 802.11a80 SP Minimum 26 dB EBW

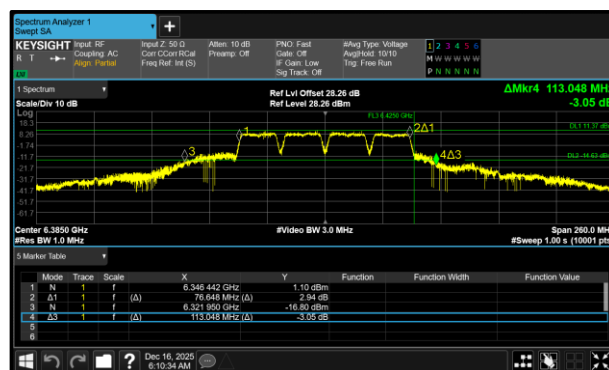


Figure 22 - 802.11a80 SP Maximum 26 dB EBW

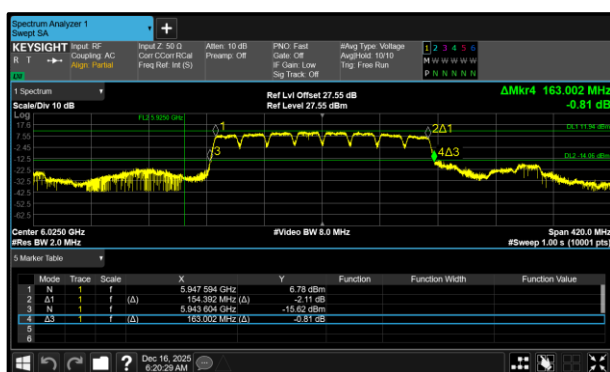


Figure 23 - 802.11a160 SP Minimum 26 dB EBW

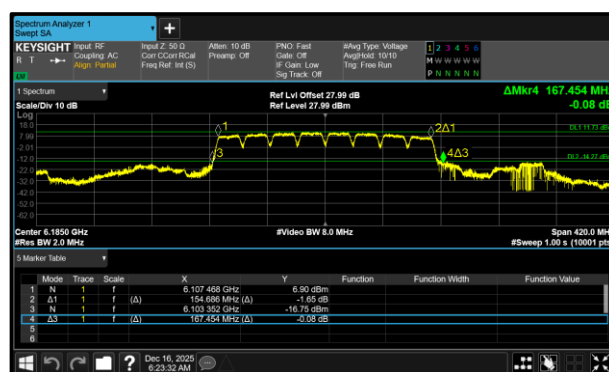


Figure 24 - 802.11a160 SP Maximum 26 dB EBW

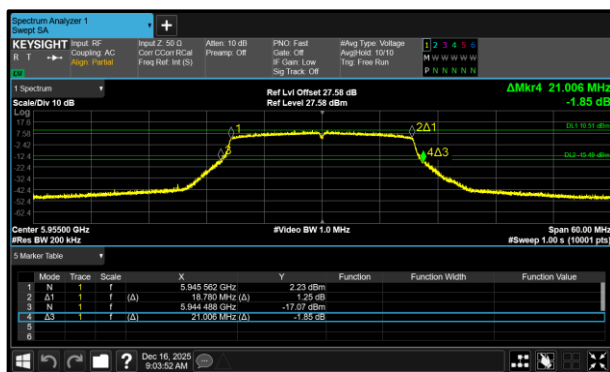


Figure 25 - 802.11ax HE20 SU SP Minimum 26 dB EBW

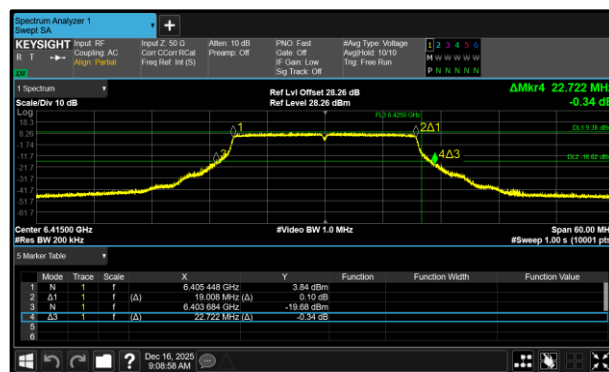


Figure 26 - 802.11ax HE20 SU SP Maximum 26 dB EBW

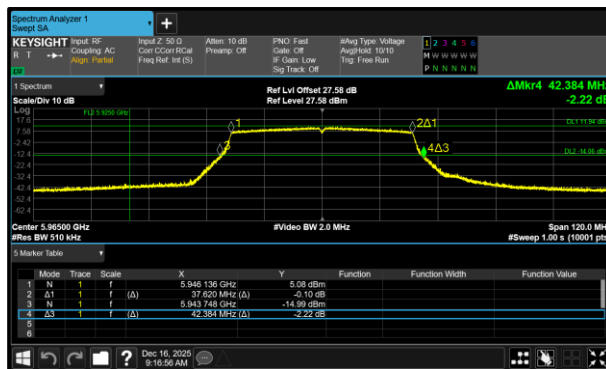


Figure 27 - 802.11ax HE40 SU SP
Minimum 26 dB EBW



Figure 28 - 802.11ax HE40 SU SP
Maximum 26 dB EBW

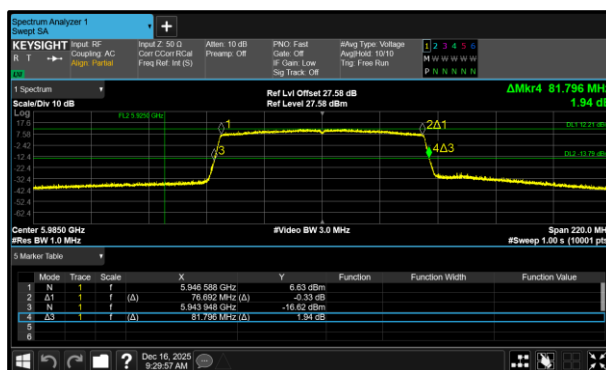


Figure 29 - 802.11ax HE80 SU SP
Minimum 26 dB EBW

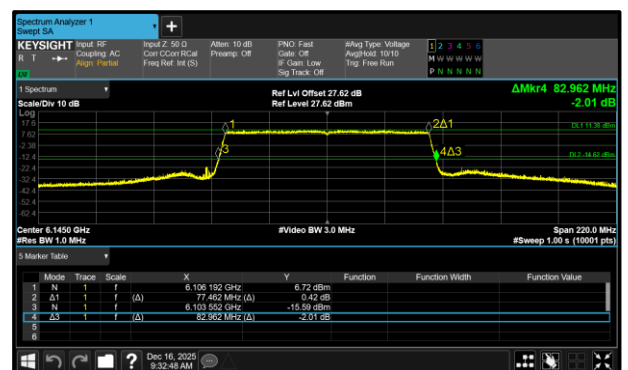


Figure 30 - 802.11ax HE80 SU SP
Maximum 26 dB EBW

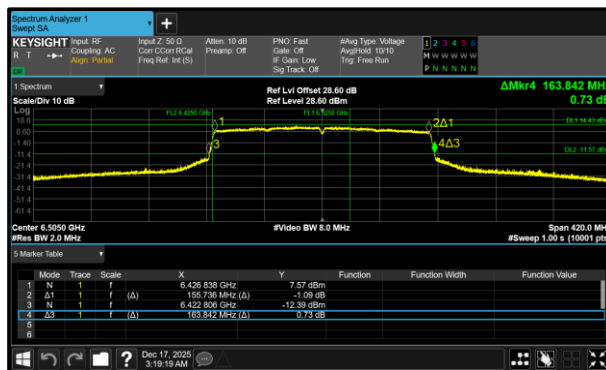


Figure 31 - 802.11ax HE160 SU SP
Minimum 26 dB EBW



Figure 32 - 802.11ax HE160 SU SP
Maximum 26 dB EBW

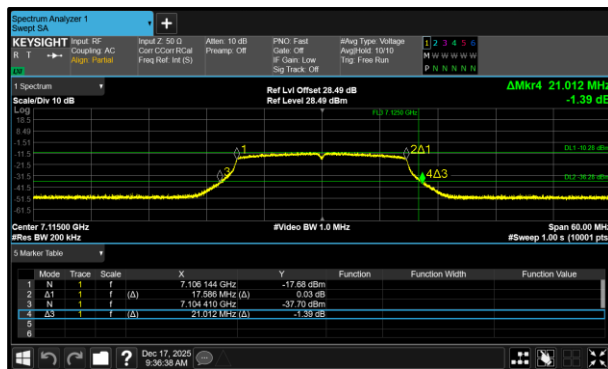


Figure 33 - 802.11a20 VLP Minimum 26 dB EBW

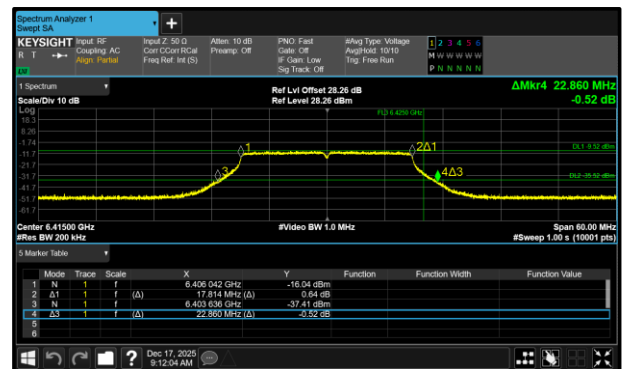


Figure 34 - 802.11a20 VLP Maximum 26 dB EBW

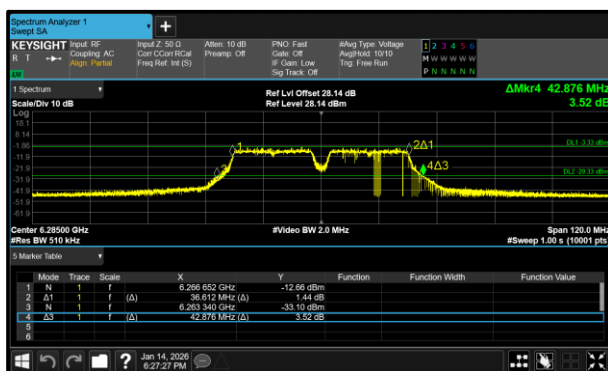


Figure 35 - 802.11a40 VLP Minimum 26 dB EBW

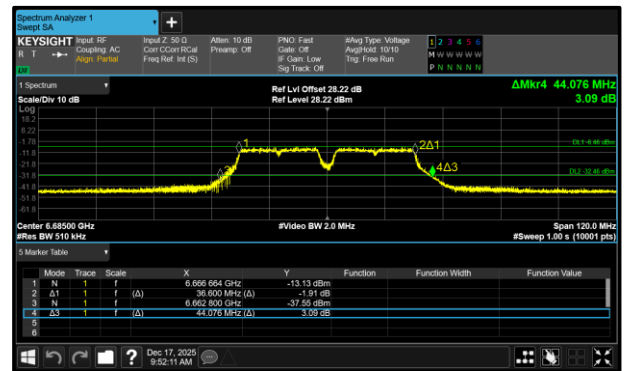


Figure 36 - 802.11a40 VLP Maximum 26 dB EBW

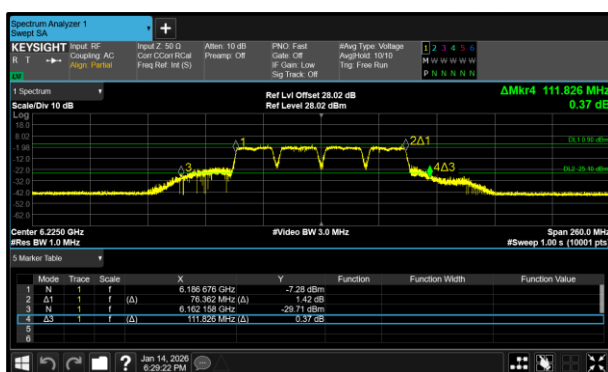


Figure 37 - 802.11a80 VLP Minimum 26 dB EBW

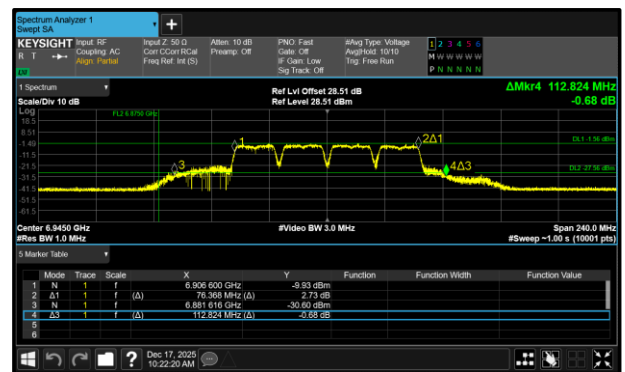


Figure 38 - 802.11a80 VLP Maximum 26 dB EBW

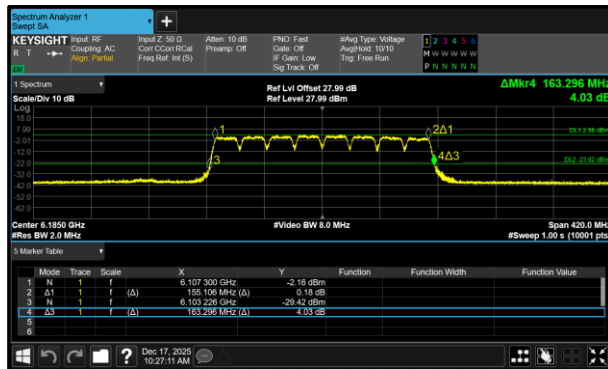


Figure 39 - 802.11a160 VLP Minimum
26 dB EBW

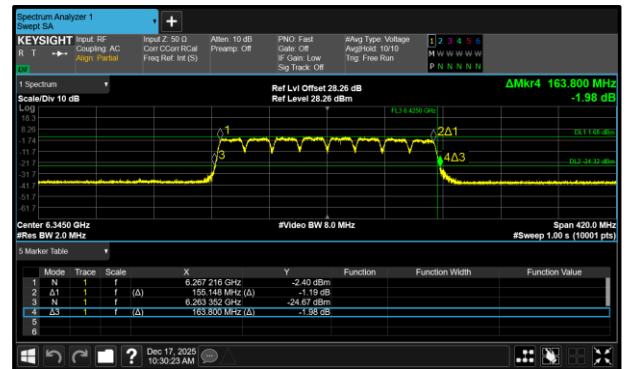


Figure 40 - 802.11a160 VLP Maximum
26 dB EBW

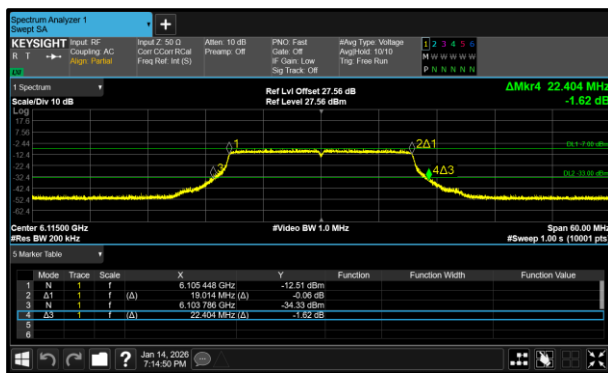


Figure 41 - 802.11ax HE20 SU VLP
Minimum 26 dB EBW

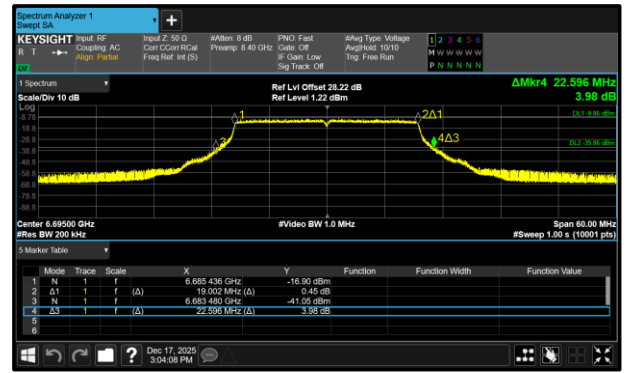


Figure 42 - 802.11ax HE20 SU VLP
Maximum 26 dB EBW

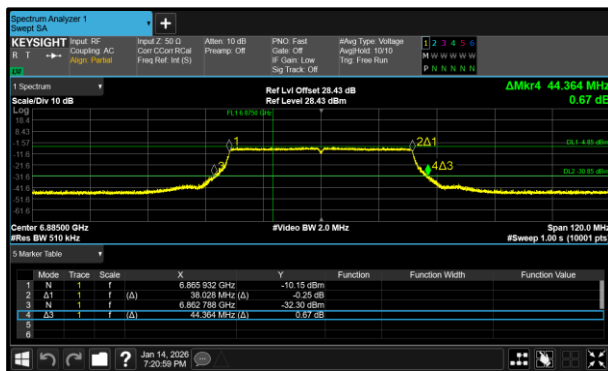


Figure 43 - 802.11ax HE40 SU VLP
Minimum 26 dB EBW

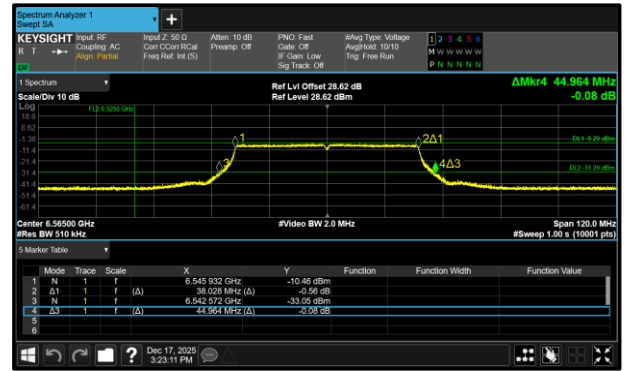


Figure 44 - 802.11ax HE40 SU VLP
Maximum 26 dB EBW

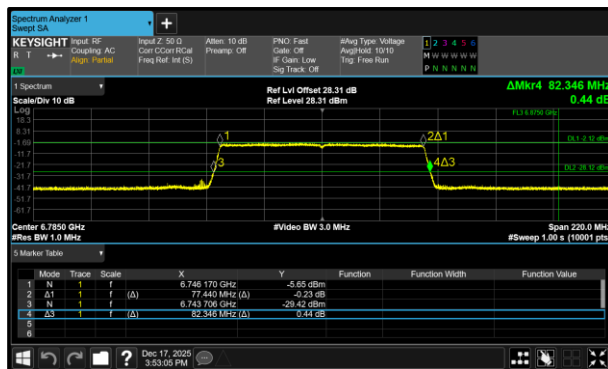


Figure 45 - 802.11ax HE80 SU VLP
Minimum 26 dB EBW

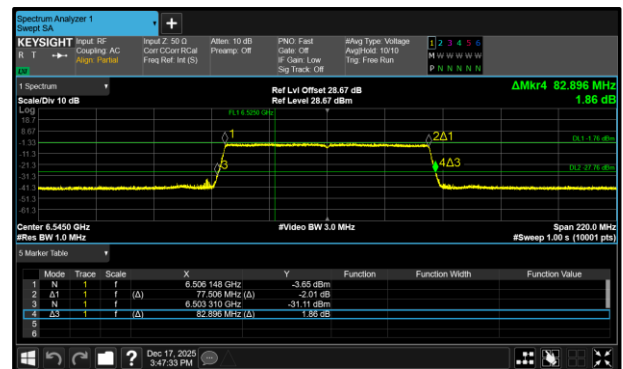


Figure 46 - 802.11ax HE80 SU VLP
Maximum 26 dB EBW

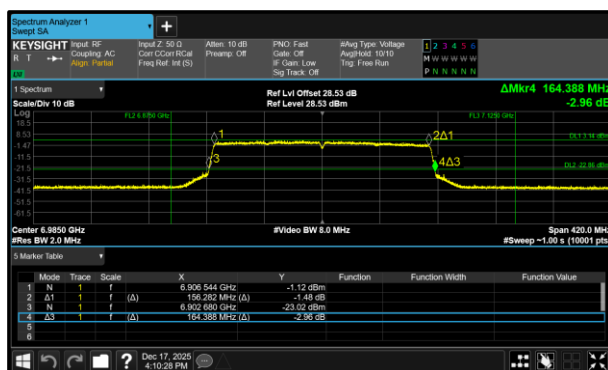


Figure 47 - 802.11ax HE160 SU VLP
Minimum 26 dB EBW

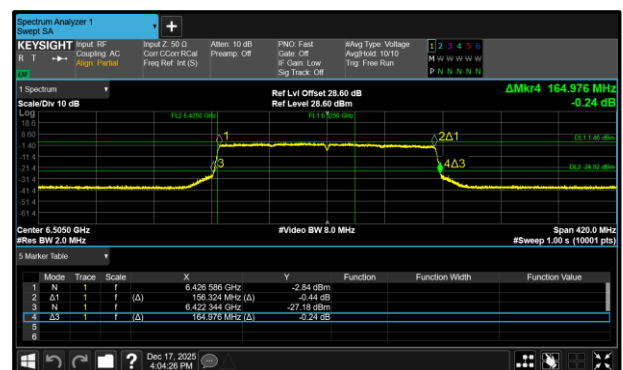


Figure 48 - 802.11ax HE160 SU VLP
Maximum 26 dB EBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11a LPI (20 MHz)	17.586	17.820
802.11a LPI (40 MHz)	36.552	36.624
802.11a LPI (80 MHz)	76.224	76.414
802.11a LPI (160 MHz)	154.938	155.190
802.11ax HE20 SU LPI	18.774	19.008
802.11ax HE40 SU LPI	37.980	38.028
802.11ax HE80 SU LPI	77.396	77.506
802.11ax HE160 SU LPI	156.198	156.324
802.11a SP (20 MHz)	17.568	17.820
802.11a SP (40 MHz)	36.260	36.840
802.11a SP (80 MHz)	75.460	76.648
802.11a SP (160 MHz)	154.350	154.686
802.11ax HE20 SU SP	18.780	19.008
802.11ax HE40 SU SP	37.620	38.040
802.11ax HE80 SU SP	76.692	77.462
802.11ax HE160 SU SP	155.484	155.736
802.11a VLP (20 MHz)	17.586	17.832
802.11a VLP (40 MHz)	36.588	36.660
802.11a VLP (80 MHz)	76.336	76.466
802.11a VLP (160 MHz)	154.980	155.190
802.11ax HE20 SU VLP	18.996	19.020
802.11ax HE40 SU VLP	38.004	38.040
802.11ax HE80 SU VLP	77.440	77.506
802.11ax HE160 SU VLP	156.282	156.366

Table 8 - 99% Bandwidth Summary Results – SISO

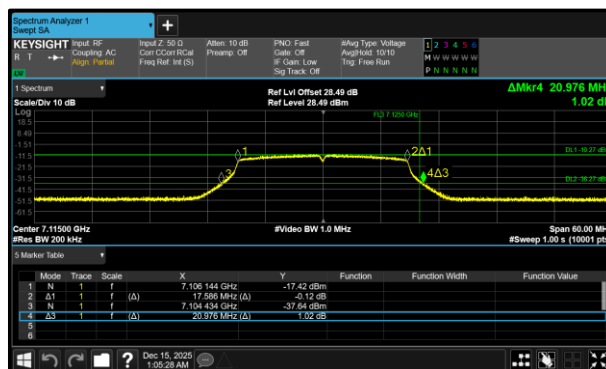


Figure 49 - 802.11a20 LPI Minimum 99% OBW

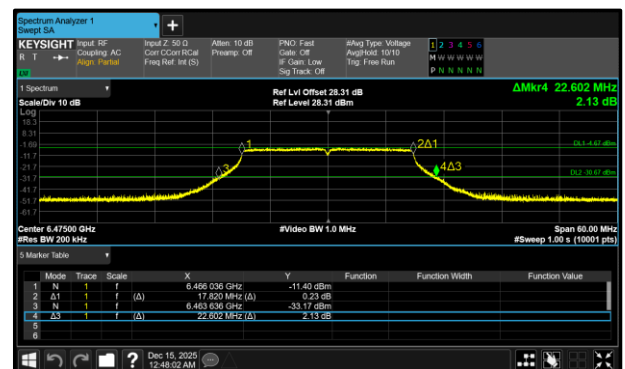


Figure 50 - 802.11a20 LPI Maximum 99% OBW



Figure 51 - 802.11a40 LPI Minimum 99% OBW

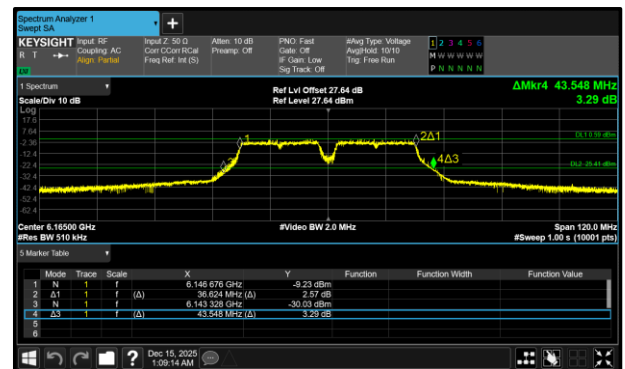


Figure 52 - 802.11a40 LPI Maximum 99% OBW

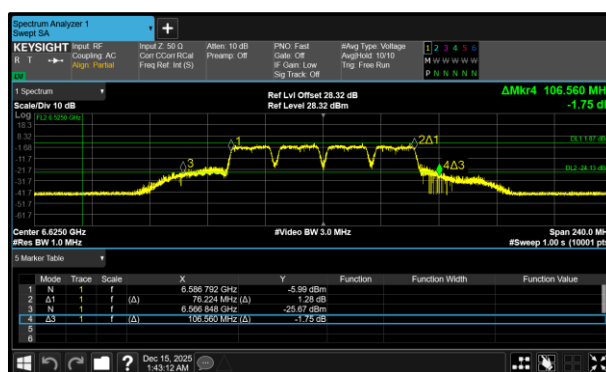


Figure 53 - 802.11a80 LPI Minimum 99% OBW

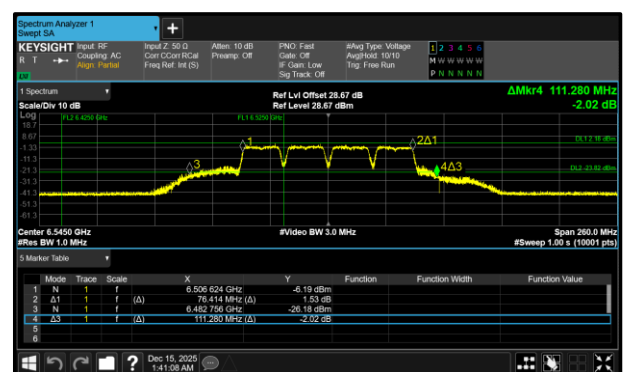


Figure 54 - 802.11a80 LPI Maximum 99% OBW

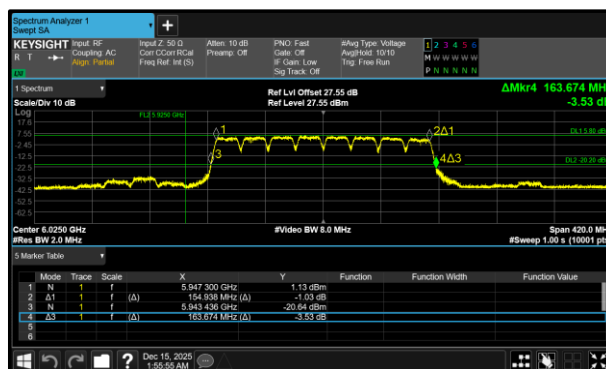


Figure 55 - 802.11a160 LPI Minimum 99% OBW

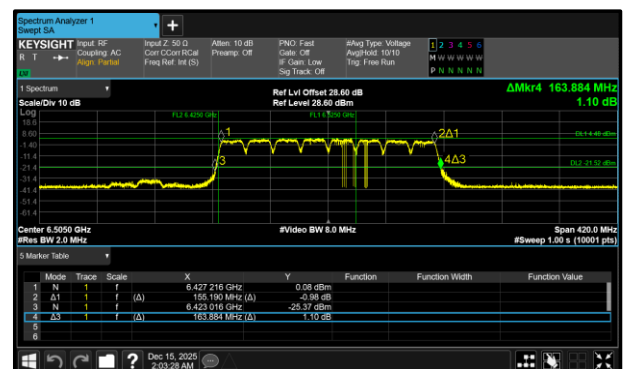


Figure 56 - 802.11a160 LPI Maximum 99% OBW

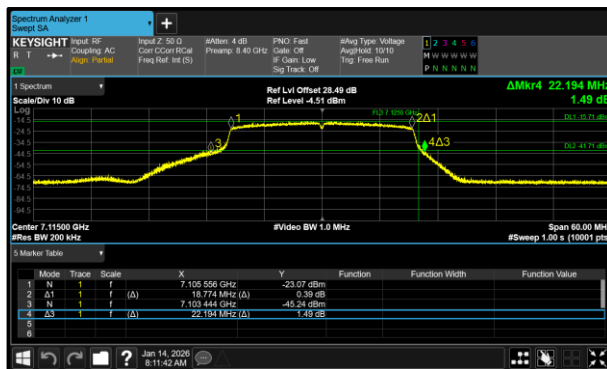


Figure 57 - 802.11ax HE20 SU LPI
Minimum 99% OBW

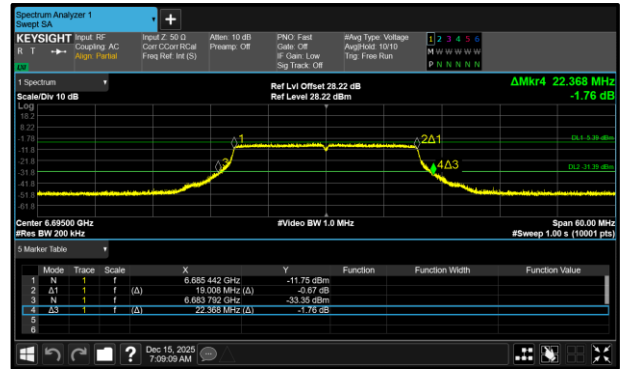


Figure 58 - 802.11ax HE20 SU LPI
Maximum 99% OBW

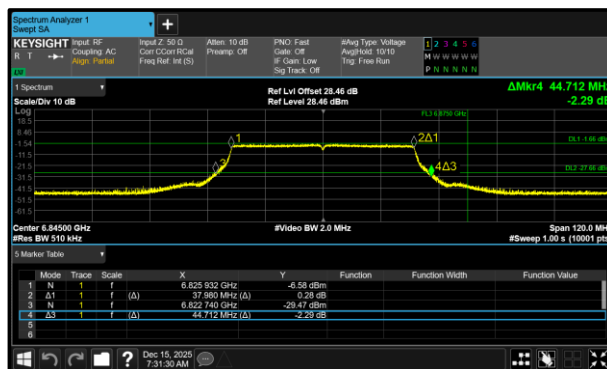


Figure 59 - 802.11ax HE40 SU LPI
Minimum 99% OBW

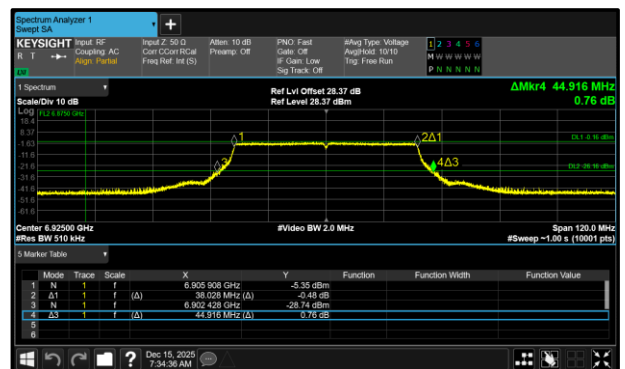


Figure 60 - 802.11ax HE40 SU LPI
Maximum 99% OBW

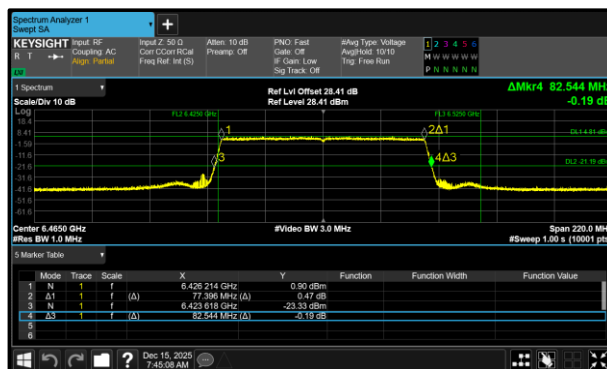


Figure 61 - 802.11ax HE80 SU LPI
Minimum 99% OBW

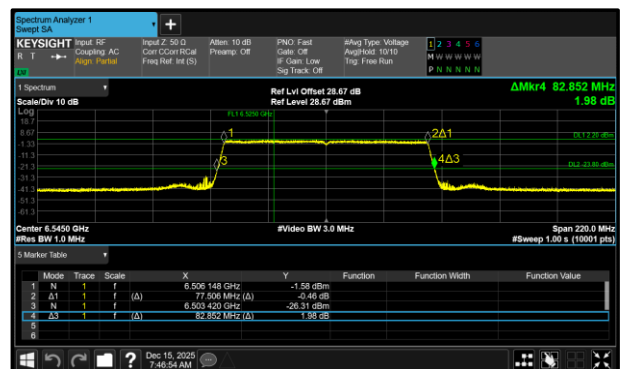


Figure 62 - 802.11ax HE80 SU LPI
Maximum 99% OBW

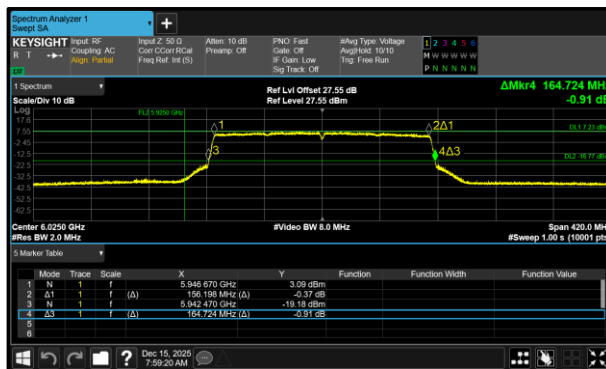


Figure 63 - 802.11ax HE160 SU LPI
Minimum 99% OBW

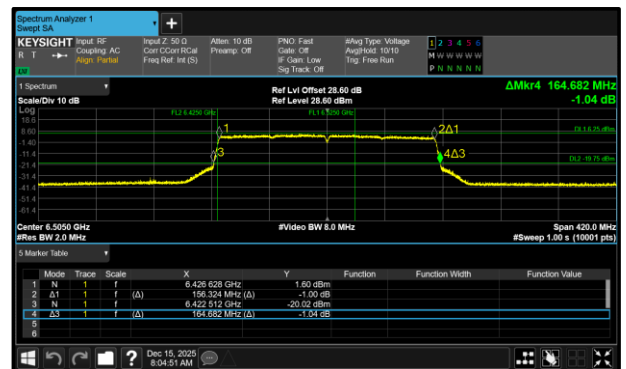


Figure 64 - 802.11ax HE160 SU LPI
Maximum 99% OBW

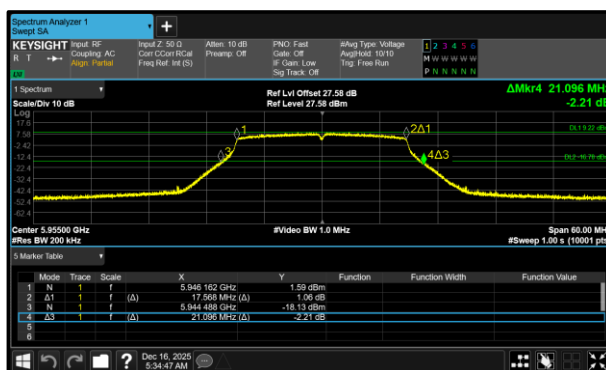


Figure 65 - 802.11a20 SP Minimum 99%
OBW

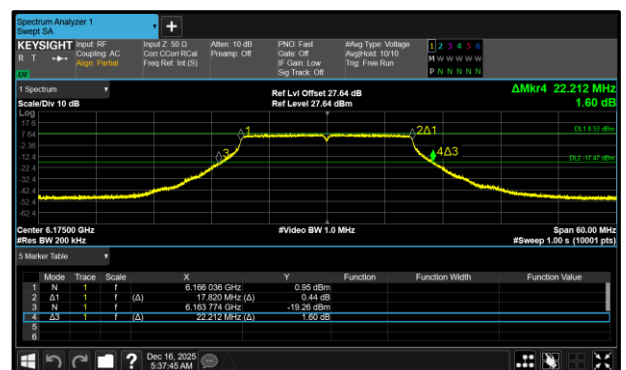


Figure 66 - 802.11a20 SP Maximum
99% OBW

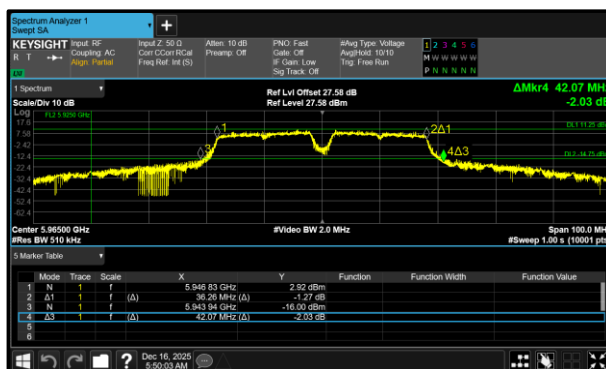


Figure 67 - 802.11a40 SP Minimum 99%
OBW

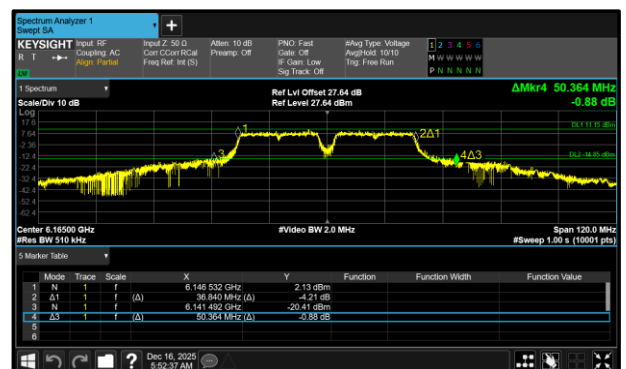


Figure 68 - 802.11a40 SP Maximum
99% OBW

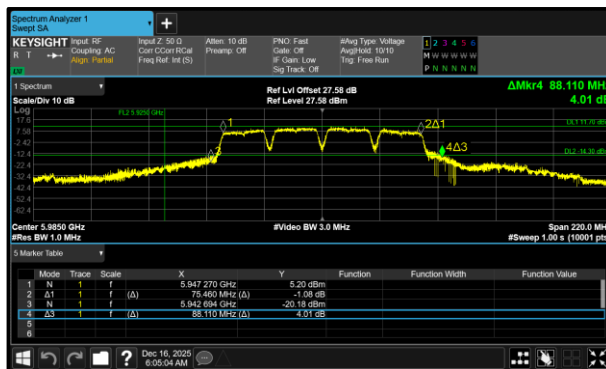


Figure 69 - 802.11a80 SP Minimum 99% OBW

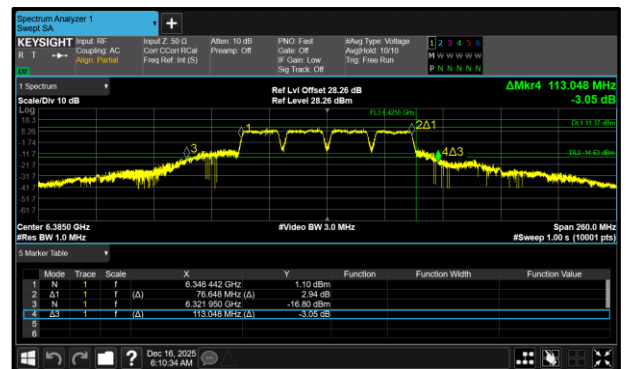


Figure 70 - 802.11a80 SP Maximum 99% OBW

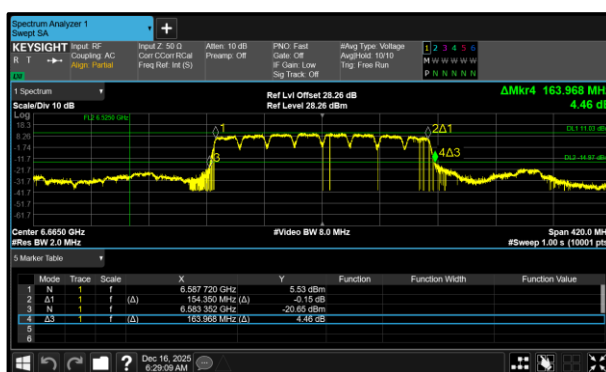


Figure 71 - 802.11a160 SP Minimum 99% OBW

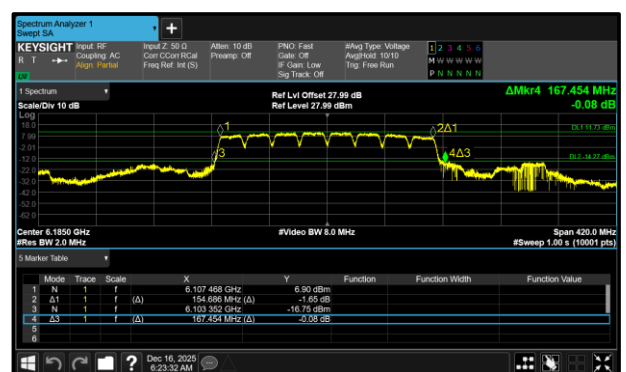


Figure 72 - 802.11a160 SP Maximum 99% OBW

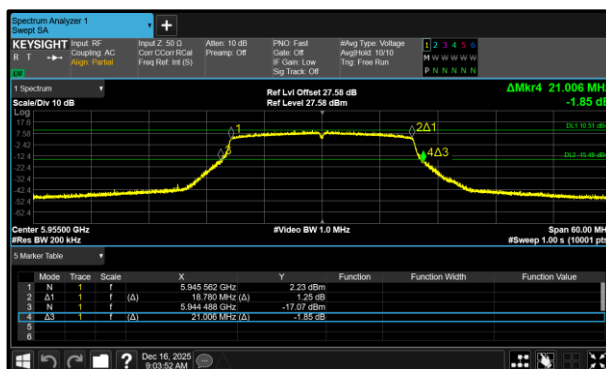


Figure 73 - 802.11ax HE20 SU SP Minimum 99% OBW

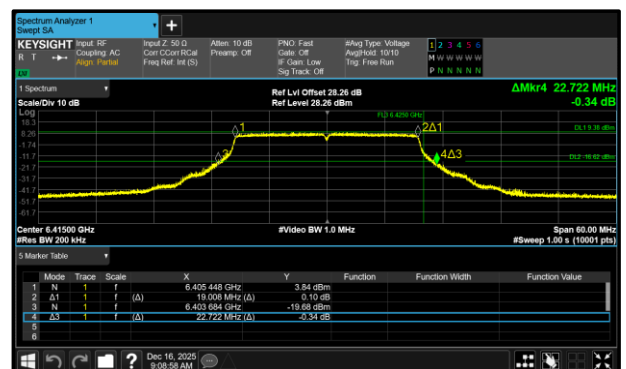


Figure 74 - 802.11ax HE20 SU SP Maximum 99% OBW

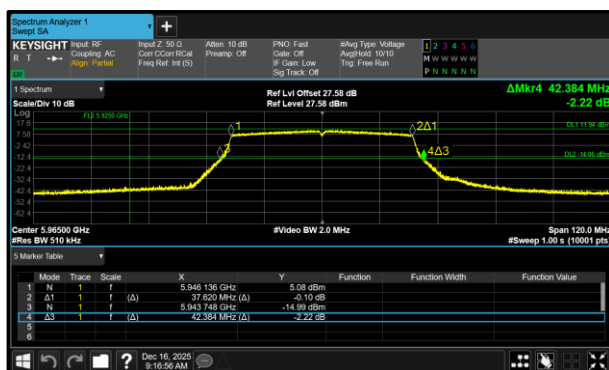


Figure 75 - 802.11ax HE40 SU SP
Minimum 99% OBW

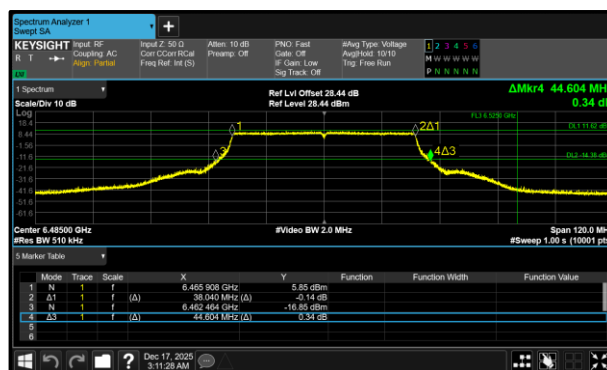


Figure 76 - 802.11ax HE40 SU SP
Maximum 99% OBW

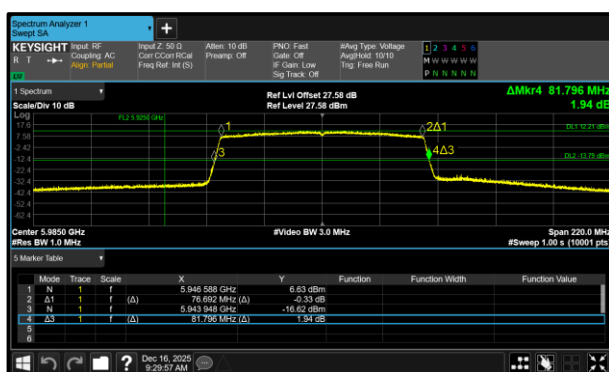


Figure 77 - 802.11ax HE80 SU SP
Minimum 99% OBW

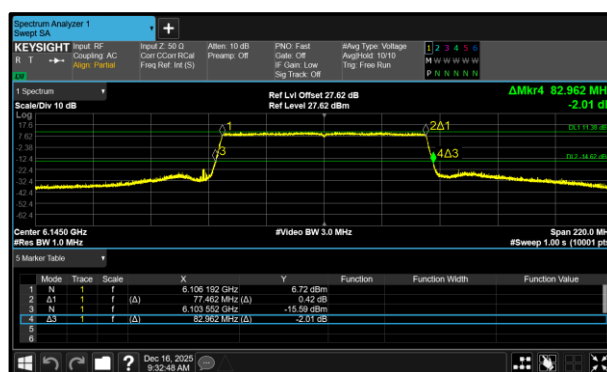


Figure 78 - 802.11ax HE80 SU SP
Maximum 99% OBW

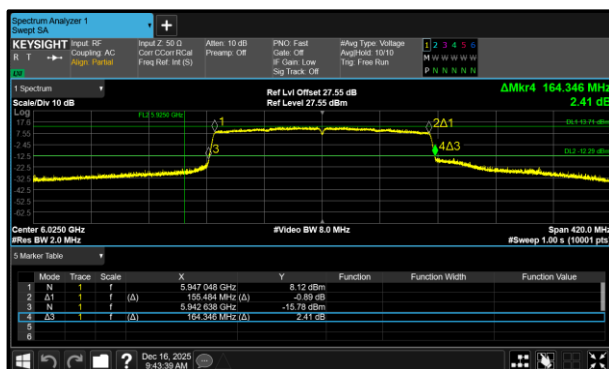


Figure 79 - 802.11ax HE160 SU SP
Minimum 99% OBW

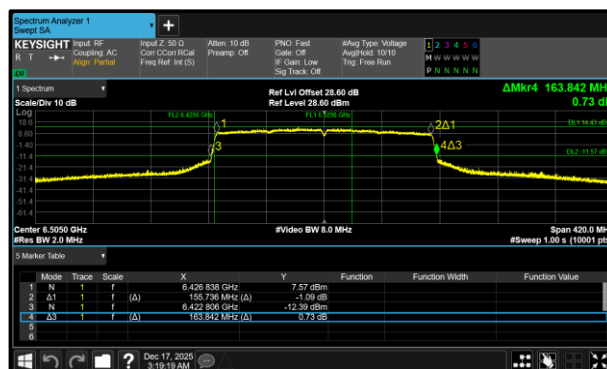


Figure 80 - 802.11ax HE160 SU SP
Maximum 99% OBW