

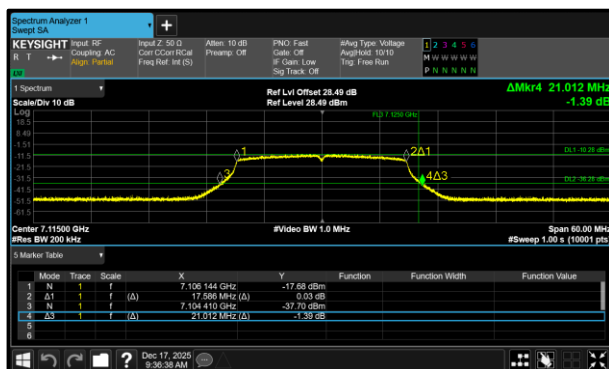


Figure 81 - 802.11a20 VLP Minimum
99% OBW

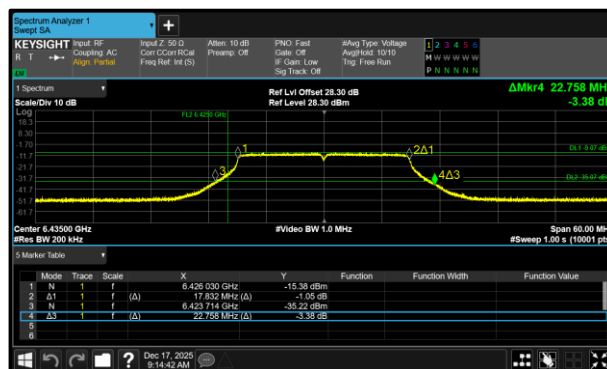


Figure 82 - 802.11a20 VLP Maximum
99% OBW

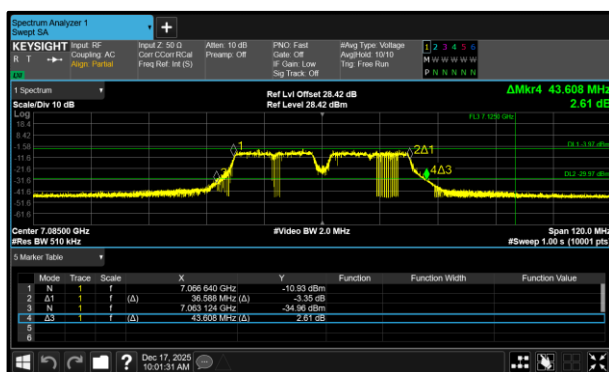


Figure 83 - 802.11a40 VLP Minimum
99% OBW

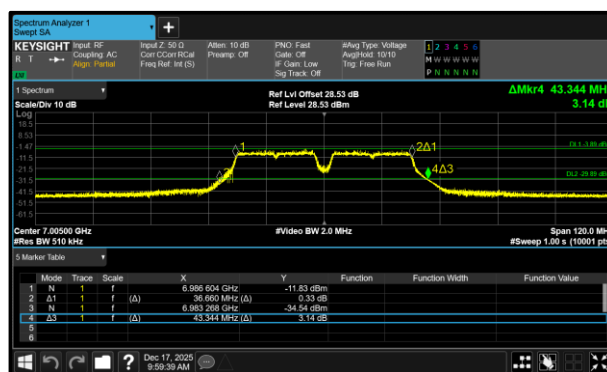


Figure 84 - 802.11a40 VLP Maximum
99% OBW

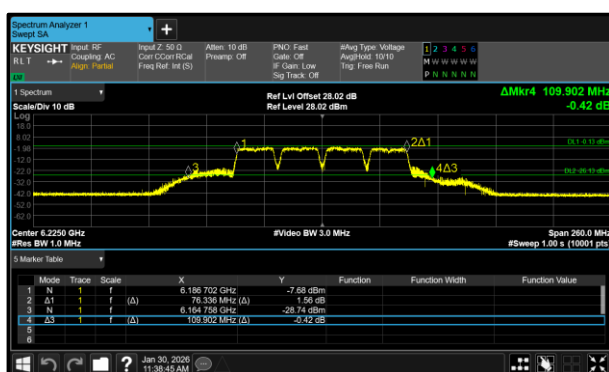


Figure 85 - 802.11a80 VLP Minimum
99% OBW



Figure 86 - 802.11a80 VLP Maximum
99% OBW

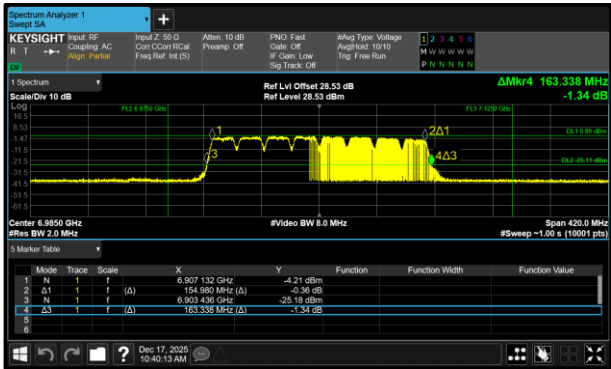


Figure 87 - 802.11a160 VLP Minimum
99% OBW

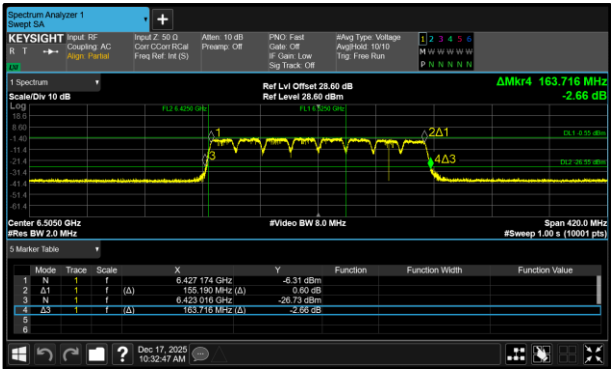


Figure 88 - 802.11a160 VLP Maximum
99% OBW

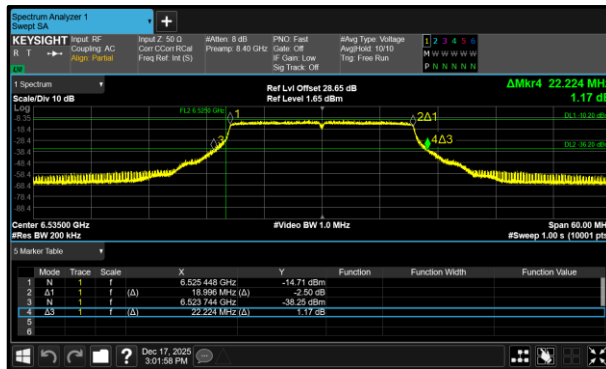


Figure 89 - 802.11ax HE20 SU VLP
Minimum 99% OBW

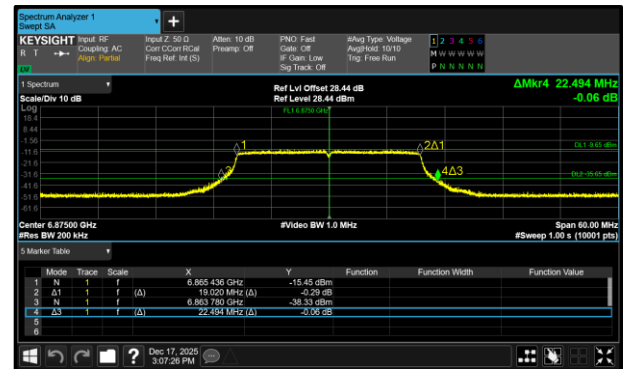


Figure 90 - 802.11ax HE20 SU VLP
Maximum 99% OBW

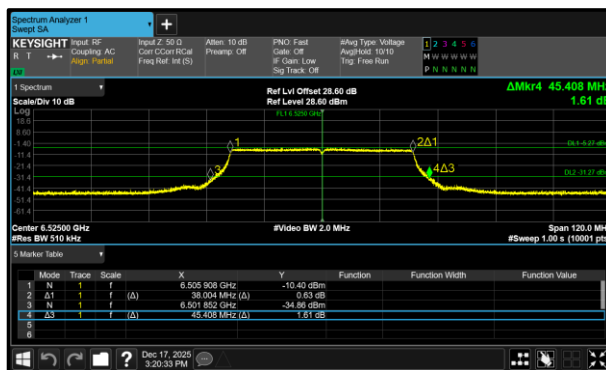


Figure 91 - 802.11ax HE40 SU VLP
Minimum 99% OBW



Figure 92 - 802.11ax HE40 SU VLP
Maximum 99% OBW

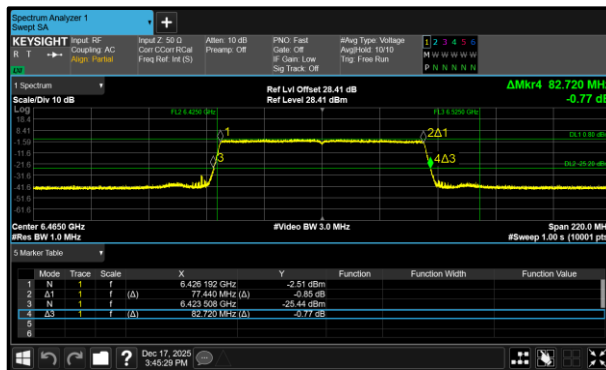


Figure 93 - 802.11ax HE80 SU VLP
Minimum 99% OBW

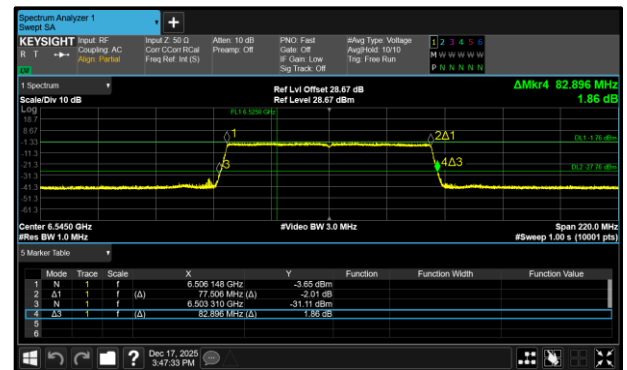


Figure 94 - 802.11ax HE80 SU VLP
Maximum 99% OBW

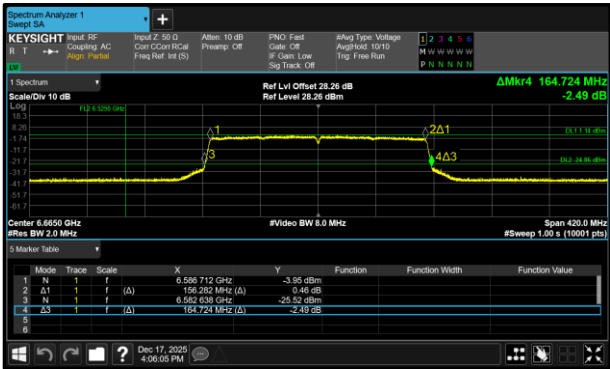


Figure 95 - 802.11ax HE160 SU VLP
Minimum 99% OBW

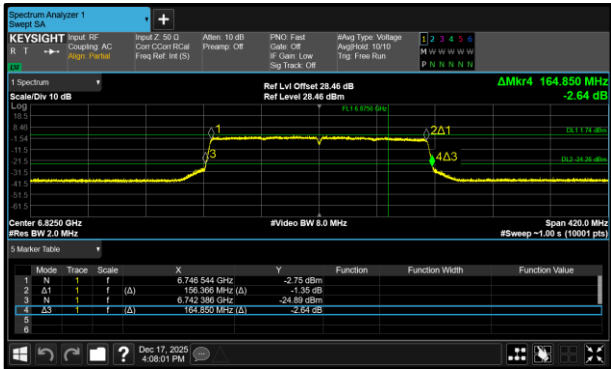


Figure 96 - 802.11ax HE160 SU VLP
Maximum 99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	22.650	-	-	-	320.0
6175	22.542	-	-	-	320.0
6415	22.698	-	-	-	320.0
6435	22.434	-	-	-	320.0
6475	22.602	-	-	-	320.0
6515	22.620	-	-	-	320.0
6535	22.254	-	-	-	320.0
6695	22.308	-	-	-	320.0
6855	22.614	-	-	-	320.0
6875	22.602	-	-	-	320.0
6895	22.644	-	-	-	320.0
6995	22.512	-	-	-	320.0
7095	22.944	-	-	-	320.0
7115	20.976	-	-	-	320.0

Table 9 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	17.814	-	-	-	320.0
6175	17.814	-	-	-	320.0
6415	17.814	-	-	-	320.0
6435	17.814	-	-	-	320.0
6475	17.820	-	-	-	320.0
6515	17.814	-	-	-	320.0
6535	17.808	-	-	-	320.0
6695	17.820	-	-	-	320.0
6855	17.820	-	-	-	320.0
6875	17.820	-	-	-	320.0
6895	17.814	-	-	-	320.0
6995	17.820	-	-	-	320.0
7095	17.814	-	-	-	320.0
7115	17.586	-	-	-	320.0

Table 10 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	43.488	-	-	-	320.0
6165	43.548	-	-	-	320.0
6405	42.444	-	-	-	320.0
6445	43.524	-	-	-	320.0
6485	43.740	-	-	-	320.0
6525	43.728	-	-	-	320.0
6565	43.104	-	-	-	320.0
6685	43.620	-	-	-	320.0
6845	43.344	-	-	-	320.0
6885	42.432	-	-	-	320.0
6925	42.624	-	-	-	320.0
7005	43.368	-	-	-	320.0
7085	42.948	-	-	-	320.0

Table 11 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	36.612	-	-	-	320.0
6165	36.624	-	-	-	320.0
6405	36.624	-	-	-	320.0
6445	36.564	-	-	-	320.0
6485	36.600	-	-	-	320.0
6525	36.588	-	-	-	320.0
6565	36.564	-	-	-	320.0
6685	36.588	-	-	-	320.0
6845	36.576	-	-	-	320.0
6885	36.612	-	-	-	320.0
6925	36.552	-	-	-	320.0
7005	36.564	-	-	-	320.0
7085	36.624	-	-	-	320.0

Table 12 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	107.874	-	-	-	320.0
6145	112.216	-	-	-	320.0
6385	111.480	-	-	-	320.0
6465	105.586	-	-	-	320.0
6545	111.280	-	-	-	320.0
6625	106.560	-	-	-	320.0
6705	111.488	-	-	-	320.0
6785	114.840	-	-	-	320.0
6865	111.176	-	-	-	320.0
6945	111.670	-	-	-	320.0
7025	107.094	-	-	-	320.0

Table 13 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	76.258	-	-	-	320.0
6145	76.232	-	-	-	320.0
6385	76.344	-	-	-	320.0
6465	76.310	-	-	-	320.0
6545	76.414	-	-	-	320.0
6625	76.224	-	-	-	320.0
6705	76.310	-	-	-	320.0
6785	76.320	-	-	-	320.0
6865	76.414	-	-	-	320.0
6945	76.336	-	-	-	320.0
7025	76.388	-	-	-	320.0

Table 14 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	163.674	-	-	-	320.0
6185	163.716	-	-	-	320.0
6345	162.960	-	-	-	320.0
6505	163.884	-	-	-	320.0
6665	163.968	-	-	-	320.0
6825	163.548	-	-	-	320.0
6985	163.506	-	-	-	320.0

Table 15 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	154.938	-	-	-	320.0
6185	155.022	-	-	-	320.0
6345	154.980	-	-	-	320.0
6505	155.190	-	-	-	320.0
6665	155.064	-	-	-	320.0
6825	155.148	-	-	-	320.0
6985	154.980	-	-	-	320.0

Table 16 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	22.338	-	-	-	320.0
6175	22.356	-	-	-	320.0
6415	22.278	-	-	-	320.0
6435	22.446	-	-	-	320.0
6475	22.506	-	-	-	320.0
6515	22.722	-	-	-	320.0
6535	22.458	-	-	-	320.0
6695	22.368	-	-	-	320.0
6855	22.278	-	-	-	320.0
6875	22.296	-	-	-	320.0
6895	22.194	-	-	-	320.0
6995	22.620	-	-	-	320.0
7095	22.494	-	-	-	320.0
7115	22.194	-	-	-	320.0

Table 17 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	18.990	-	-	-	320.0
6175	18.990	-	-	-	320.0
6415	18.996	-	-	-	320.0
6435	18.996	-	-	-	320.0
6475	18.990	-	-	-	320.0
6515	19.002	-	-	-	320.0
6535	18.996	-	-	-	320.0
6695	19.008	-	-	-	320.0
6855	19.002	-	-	-	320.0
6875	18.996	-	-	-	320.0
6895	19.002	-	-	-	320.0
6995	19.008	-	-	-	320.0
7095	19.002	-	-	-	320.0
7115	18.774	-	-	-	320.0

Table 18 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	44.880	-	-	-	320.0
6165	44.676	-	-	-	320.0
6405	45.036	-	-	-	320.0
6445	44.508	-	-	-	320.0
6485	45.000	-	-	-	320.0
6525	44.880	-	-	-	320.0
6565	44.532	-	-	-	320.0
6685	44.508	-	-	-	320.0
6845	44.712	-	-	-	320.0
6885	44.832	-	-	-	320.0
6925	44.916	-	-	-	320.0
7005	44.928	-	-	-	320.0
7085	44.808	-	-	-	320.0

Table 19 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	38.004	-	-	-	320.0
6165	37.992	-	-	-	320.0
6405	38.004	-	-	-	320.0
6445	38.016	-	-	-	320.0
6485	38.016	-	-	-	320.0
6525	38.004	-	-	-	320.0
6565	38.004	-	-	-	320.0
6685	37.992	-	-	-	320.0
6845	37.980	-	-	-	320.0
6885	38.016	-	-	-	320.0
6925	38.028	-	-	-	320.0
7005	38.016	-	-	-	320.0
7085	38.004	-	-	-	320.0

Table 20 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	82.566	-	-	-	320.0
6145	82.632	-	-	-	320.0
6385	82.698	-	-	-	320.0
6465	82.544	-	-	-	320.0
6545	82.852	-	-	-	320.0
6625	82.610	-	-	-	320.0
6705	82.676	-	-	-	320.0
6785	82.566	-	-	-	320.0
6865	82.588	-	-	-	320.0
6945	82.786	-	-	-	320.0
7025	82.588	-	-	-	320.0

Table 21 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	77.440	-	-	-	320.0
6145	77.462	-	-	-	320.0
6385	77.462	-	-	-	320.0
6465	77.396	-	-	-	320.0
6545	77.506	-	-	-	320.0
6625	77.396	-	-	-	320.0
6705	77.462	-	-	-	320.0
6785	77.418	-	-	-	320.0
6865	77.440	-	-	-	320.0
6945	77.440	-	-	-	320.0
7025	77.418	-	-	-	320.0

Table 22 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	164.724	-	-	-	320.0
6185	164.934	-	-	-	320.0
6345	164.724	-	-	-	320.0
6505	164.682	-	-	-	320.0
6665	164.598	-	-	-	320.0
6825	164.850	-	-	-	320.0
6985	164.598	-	-	-	320.0

Table 23 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	156.198	-	-	-	320.0
6185	156.282	-	-	-	320.0
6345	156.282	-	-	-	320.0
6505	156.324	-	-	-	320.0
6665	156.324	-	-	-	320.0
6825	156.324	-	-	-	320.0
6985	156.240	-	-	-	320.0

Table 24 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	21.096	-	-	-	320.0
6175	22.212	-	-	-	320.0
6415	22.506	-	-	-	320.0
6435	22.644	-	-	-	320.0
6475	22.506	-	-	-	320.0
6515	22.674	-	-	-	320.0
6535	22.632	-	-	-	320.0
6695	22.734	-	-	-	320.0
6855	22.482	-	-	-	320.0

Table 25 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	17.568	-	-	-	320.0
6175	17.820	-	-	-	320.0
6415	17.808	-	-	-	320.0
6435	17.814	-	-	-	320.0
6475	17.814	-	-	-	320.0
6515	17.820	-	-	-	320.0
6535	17.808	-	-	-	320.0
6695	17.808	-	-	-	320.0
6855	17.814	-	-	-	320.0

Table 26 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	42.070	-	-	-	320.0
6165	50.364	-	-	-	320.0
6405	46.272	-	-	-	320.0
6445	45.624	-	-	-	320.0
6485	44.604	-	-	-	320.0
6525	42.588	-	-	-	320.0
6565	49.260	-	-	-	320.0
6685	44.304	-	-	-	320.0
6845	44.952	-	-	-	320.0

Table 27 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	36.260	-	-	-	320.0
6165	36.840	-	-	-	320.0
6405	36.804	-	-	-	320.0
6445	36.672	-	-	-	320.0
6485	36.720	-	-	-	320.0
6525	36.744	-	-	-	320.0
6565	36.780	-	-	-	320.0
6685	36.684	-	-	-	320.0
6845	36.696	-	-	-	320.0

Table 28 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	88.110	-	-	-	320.0
6145	112.756	-	-	-	320.0
6385	113.048	-	-	-	320.0
6465	113.048	-	-	-	320.0
6625	108.836	-	-	-	320.0
6705	112.086	-	-	-	320.0
6785	112.320	-	-	-	320.0

Table 29 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	75.460	-	-	-	320.0
6145	76.636	-	-	-	320.0
6385	76.648	-	-	-	320.0
6465	76.544	-	-	-	320.0
6545	76.570	-	-	-	320.0
6625	76.518	-	-	-	320.0
6705	76.518	-	-	-	320.0
6785	76.392	-	-	-	320.0

Table 30 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	163.002	-	-	-	320.0
6185	167.454	-	-	-	320.0
6345	167.370	-	-	-	320.0
6505	163.674	-	-	-	320.0
6665	163.968	-	-	-	320.0

Table 31 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	154.392	-	-	-	320.0
6185	154.686	-	-	-	320.0
6345	154.644	-	-	-	320.0
6505	154.560	-	-	-	320.0
6665	154.350	-	-	-	320.0

Table 32 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	21.006	-	-	-	320.0
6175	22.656	-	-	-	320.0
6415	22.722	-	-	-	320.0
6435	22.566	-	-	-	320.0
6475	22.632	-	-	-	320.0
6515	22.266	-	-	-	320.0
6535	22.362	-	-	-	320.0
6695	22.572	-	-	-	320.0
6855	22.650	-	-	-	320.0

Table 33 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	18.780	-	-	-	320.0
6175	19.002	-	-	-	320.0
6415	19.008	-	-	-	320.0
6435	19.002	-	-	-	320.0
6475	19.002	-	-	-	320.0
6515	18.996	-	-	-	320.0
6535	19.008	-	-	-	320.0
6695	19.002	-	-	-	320.0
6855	19.008	-	-	-	320.0

Table 34 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	42.384	-	-	-	320.0
6165	44.904	-	-	-	320.0
6405	44.676	-	-	-	320.0
6445	44.520	-	-	-	320.0
6485	44.604	-	-	-	320.0
6525	44.724	-	-	-	320.0
6565	44.376	-	-	-	320.0
6685	44.424	-	-	-	320.0
6845	44.928	-	-	-	320.0

Table 35 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	37.620	-	-	-	320.0
6165	37.992	-	-	-	320.0
6405	38.004	-	-	-	320.0
6445	38.004	-	-	-	320.0
6485	38.040	-	-	-	320.0
6525	38.016	-	-	-	320.0
6565	38.004	-	-	-	320.0
6685	38.004	-	-	-	320.0
6845	38.004	-	-	-	320.0

Table 36 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	81.796	-	-	-	320.0
6145	82.962	-	-	-	320.0
6385	82.654	-	-	-	320.0
6465	82.676	-	-	-	320.0
6625	82.588	-	-	-	320.0
6705	82.588	-	-	-	320.0
6785	82.610	-	-	-	320.0

Table 37 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	76.692	-	-	-	320.0
6145	77.462	-	-	-	320.0
6385	77.440	-	-	-	320.0
6465	77.440	-	-	-	320.0
6545	77.440	-	-	-	320.0
6625	77.396	-	-	-	320.0
6705	77.462	-	-	-	320.0
6785	77.440	-	-	-	320.0

Table 38 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	164.346	-	-	-	320.0
6185	164.346	-	-	-	320.0
6345	164.052	-	-	-	320.0
6505	163.842	-	-	-	320.0
6665	164.388	-	-	-	320.0

Table 39 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	155.484	-	-	-	320.0
6185	155.694	-	-	-	320.0
6345	155.652	-	-	-	320.0
6505	155.736	-	-	-	320.0
6665	155.568	-	-	-	320.0

Table 40 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a20 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	22.638	-	-	-	320.0
6275	22.794	-	-	-	320.0
6415	22.860	-	-	-	320.0
6435	22.758	-	-	-	320.0
6475	22.488	-	-	-	320.0
6515	22.530	-	-	-	320.0
6535	22.572	-	-	-	320.0
6695	22.656	-	-	-	320.0
6855	22.680	-	-	-	320.0
6875	22.770	-	-	-	320.0
6895	22.590	-	-	-	320.0
6995	22.446	-	-	-	320.0
7095	22.434	-	-	-	320.0
7115	21.012	-	-	-	320.0

Table 41 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	17.820	-	-	-	320.0
6275	17.826	-	-	-	320.0
6415	17.814	-	-	-	320.0
6435	17.832	-	-	-	320.0
6475	17.832	-	-	-	320.0
6515	17.820	-	-	-	320.0
6535	17.808	-	-	-	320.0
6695	17.820	-	-	-	320.0
6855	17.814	-	-	-	320.0
6875	17.808	-	-	-	320.0
6895	17.826	-	-	-	320.0
6995	17.832	-	-	-	320.0
7095	17.820	-	-	-	320.0
7115	17.586	-	-	-	320.0

Table 42 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a40 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	43.344	-	-	-	320.0
6285	42.876	-	-	-	320.0
6405	44.004	-	-	-	320.0
6445	43.656	-	-	-	320.0
6485	43.212	-	-	-	320.0
6525	43.536	-	-	-	320.0
6565	43.320	-	-	-	320.0
6685	44.076	-	-	-	320.0
6845	42.984	-	-	-	320.0
6885	43.464	-	-	-	320.0
6925	43.944	-	-	-	320.0
7005	43.344	-	-	-	320.0
7085	43.608	-	-	-	320.0

Table 43 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	36.636	-	-	-	320.0
6285	36.612	-	-	-	320.0
6405	36.612	-	-	-	320.0
6445	36.636	-	-	-	320.0
6485	36.636	-	-	-	320.0
6525	36.648	-	-	-	320.0
6565	36.624	-	-	-	320.0
6685	36.600	-	-	-	320.0
6845	36.624	-	-	-	320.0
6885	36.636	-	-	-	320.0
6925	36.648	-	-	-	320.0
7005	36.660	-	-	-	320.0
7085	36.588	-	-	-	320.0

Table 44 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a80 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	112.346	-	-	-	320.0
6225	111.826	-	-	-	320.0
6385	111.264	-	-	-	320.0
6465	112.476	-	-	-	320.0
6545	111.912	-	-	-	320.0
6625	107.562	-	-	-	320.0
6705	107.208	-	-	-	320.0
6785	110.006	-	-	-	320.0
6865	111.644	-	-	-	320.0
6945	112.824	-	-	-	320.0
7025	111.618	-	-	-	320.0

Table 45 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	76.362	-	-	-	320.0
6225	76.362	-	-	-	320.0
6385	76.416	-	-	-	320.0
6465	76.336	-	-	-	320.0
6545	76.464	-	-	-	320.0
6625	76.284	-	-	-	320.0
6705	76.416	-	-	-	320.0
6785	76.414	-	-	-	320.0
6865	76.388	-	-	-	320.0
6945	76.368	-	-	-	320.0
7025	76.466	-	-	-	320.0

Table 46 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a160 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	163.296	-	-	-	320.0
6345	163.800	-	-	-	320.0
6505	163.716	-	-	-	320.0
6665	163.548	-	-	-	320.0
6825	163.464	-	-	-	320.0
6985	163.338	-	-	-	320.0

Table 47 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	155.106	-	-	-	320.0
6345	155.148	-	-	-	320.0
6505	155.190	-	-	-	320.0
6665	155.106	-	-	-	320.0
6825	155.148	-	-	-	320.0
6985	154.980	-	-	-	320.0

Table 48 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	22.404	-	-	-	320.0
6275	22.062	-	-	-	320.0
6415	22.200	-	-	-	320.0
6435	22.260	-	-	-	320.0
6475	22.194	-	-	-	320.0
6515	22.560	-	-	-	320.0
6535	22.224	-	-	-	320.0
6695	22.596	-	-	-	320.0
6855	22.482	-	-	-	320.0
6875	22.494	-	-	-	320.0
6895	22.248	-	-	-	320.0
6995	22.320	-	-	-	320.0
7095	22.308	-	-	-	320.0

Table 49 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6115	19.014	-	-	-	320.0
6275	18.996	-	-	-	320.0
6415	19.008	-	-	-	320.0
6435	19.002	-	-	-	320.0
6475	19.008	-	-	-	320.0
6515	19.002	-	-	-	320.0
6535	18.996	-	-	-	320.0
6695	19.002	-	-	-	320.0
6855	18.996	-	-	-	320.0
6875	19.020	-	-	-	320.0
6895	19.014	-	-	-	320.0
6995	19.014	-	-	-	320.0
7095	19.008	-	-	-	320.0

Table 50 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	44.424	-	-	-	320.0
6285	44.748	-	-	-	320.0
6405	44.760	-	-	-	320.0
6445	44.904	-	-	-	320.0
6485	44.616	-	-	-	320.0
6525	45.408	-	-	-	320.0
6565	44.964	-	-	-	320.0
6685	44.460	-	-	-	320.0
6845	44.616	-	-	-	320.0
6885	44.364	-	-	-	320.0
6925	44.748	-	-	-	320.0
7005	44.760	-	-	-	320.0
7085	44.400	-	-	-	320.0

Table 51 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	38.040	-	-	-	320.0
6285	38.028	-	-	-	320.0
6405	38.016	-	-	-	320.0
6445	38.028	-	-	-	320.0
6485	38.016	-	-	-	320.0
6525	38.004	-	-	-	320.0
6565	38.028	-	-	-	320.0
6685	38.004	-	-	-	320.0
6845	38.028	-	-	-	320.0
6885	38.028	-	-	-	320.0
6925	38.004	-	-	-	320.0
7005	38.028	-	-	-	320.0
7085	38.028	-	-	-	320.0

Table 52 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	82.764	-	-	-	320.0
6225	82.632	-	-	-	320.0
6385	82.698	-	-	-	320.0
6465	82.720	-	-	-	320.0
6545	82.896	-	-	-	320.0
6625	82.478	-	-	-	320.0
6705	82.698	-	-	-	320.0
6785	82.346	-	-	-	320.0
6865	82.434	-	-	-	320.0
6945	82.742	-	-	-	320.0
7025	82.456	-	-	-	320.0

Table 53 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	77.462	-	-	-	320.0
6225	77.440	-	-	-	320.0
6385	77.462	-	-	-	320.0
6465	77.440	-	-	-	320.0
6545	77.506	-	-	-	320.0
6625	77.396	-	-	-	320.0
6705	77.462	-	-	-	320.0
6785	77.440	-	-	-	320.0
6865	77.440	-	-	-	320.0
6945	77.440	-	-	-	320.0
7025	77.462	-	-	-	320.0

Table 54 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	164.682	-	-	-	320.0
6345	164.724	-	-	-	320.0
6505	164.976	-	-	-	320.0
6665	164.724	-	-	-	320.0
6825	164.850	-	-	-	320.0
6985	164.388	-	-	-	320.0

Table 55 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	156.324	-	-	-	320.0
6345	156.324	-	-	-	320.0
6505	156.324	-	-	-	320.0
6665	156.282	-	-	-	320.0
6825	156.366	-	-	-	320.0
6985	156.282	-	-	-	320.0

Table 56 - 99% Bandwidth Results



Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11a LPI (20 MHz)	20.832	22.866
802.11a LPI (40 MHz)	42.516	44.352
802.11a LPI (80 MHz)	106.896	112.920
802.11a LPI (160 MHz)	163.464	164.094
802.11ax HE20 SU LPI	22.074	22.860
802.11ax HE40 SU LPI	44.496	45.588
802.11ax HE80 SU LPI	82.324	82.764
802.11ax HE160 SU LPI	164.346	165.102
802.11a SP (20 MHz)	21.198	22.824
802.11a SP (40 MHz)	42.170	48.708
802.11a SP (80 MHz)	85.096	113.828
802.11a SP (160 MHz)	162.582	166.110
802.11ax HE20 SU SP	21.054	22.614
802.11ax HE40 SU SP	42.264	45.024
802.11ax HE80 SU SP	81.818	82.852
802.11ax HE160 SU SP	163.842	164.892
802.11a VLP (20 MHz)	20.946	22.806
802.11a VLP (40 MHz)	42.612	43.536
802.11a VLP (80 MHz)	106.002	112.032
802.11a VLP (160 MHz)	163.170	163.800
802.11ax HE20 SU VLP	22.164	22.710
802.11ax HE40 SU VLP	44.076	45.288
802.11ax HE80 SU VLP	82.434	82.940
802.11ax HE160 SU VLP	164.598	165.018

Table 57 - 26 dB Bandwidth Summary Results – Core 1

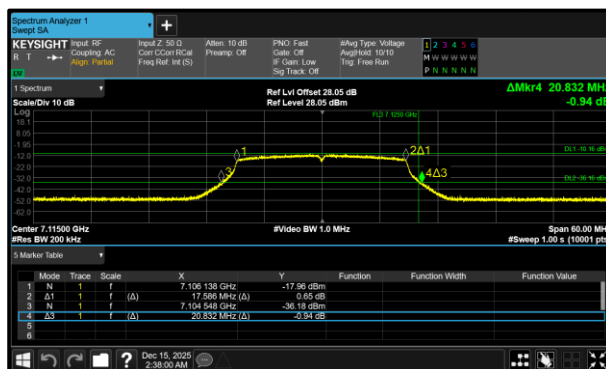


Figure 97 - 802.11a20 LPI Minimum 26 dB EBW

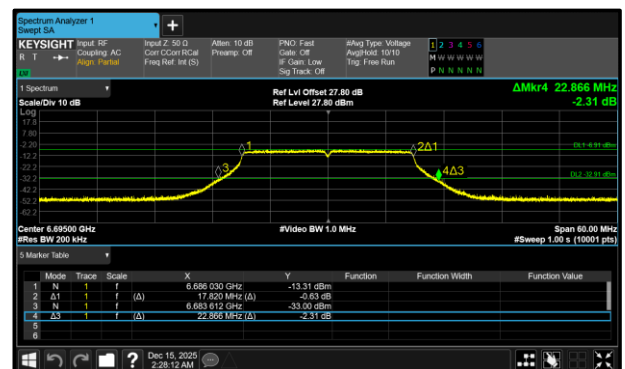


Figure 98 - 802.11a20 LPI Maximum 26 dB EBW

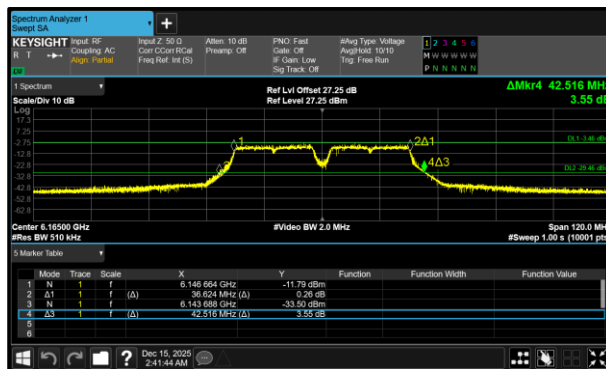


Figure 99 - 802.11a40 LPI Minimum 26 dB EBW

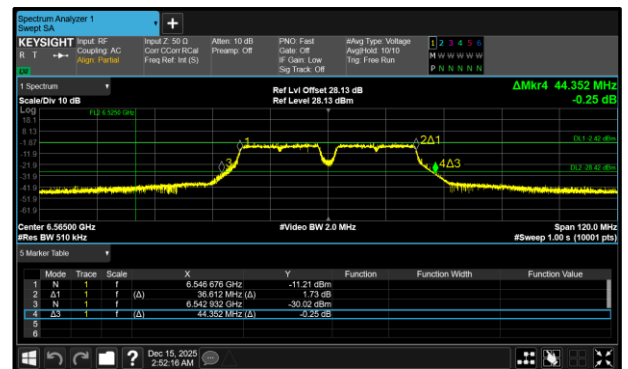


Figure 100 - 802.11a40 LPI Maximum 26 dB EBW

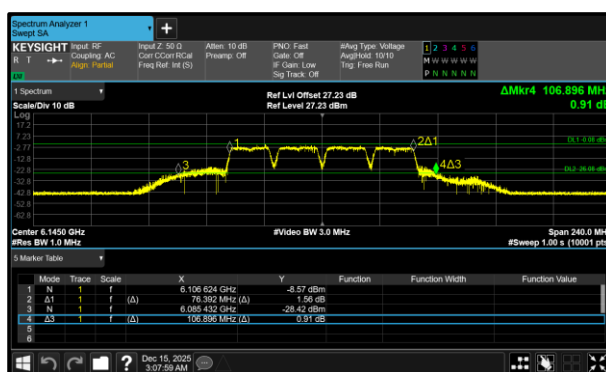


Figure 101 - 802.11a80 LPI Minimum 26 dB EBW

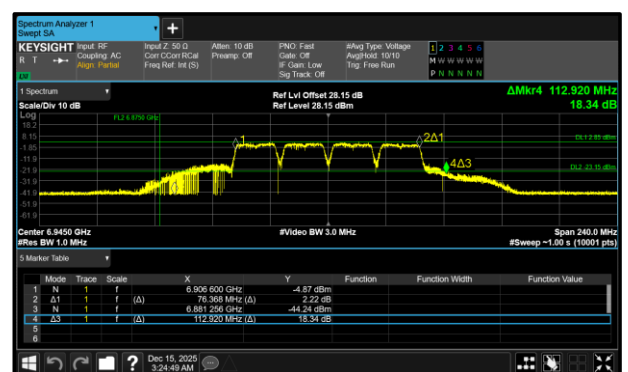


Figure 102 - 802.11a80 LPI Maximum 26 dB EBW

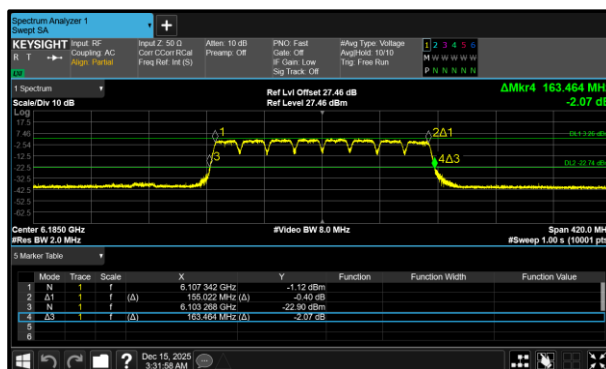


Figure 103 - 802.11a160 LPI Minimum 26 dB EBW

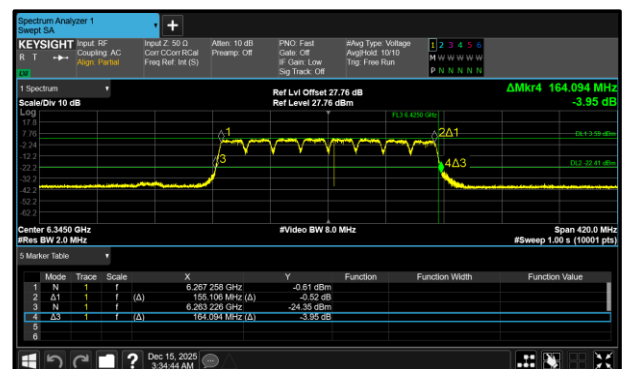


Figure 104 - 802.11a160 LPI Maximum 26 dB EBW

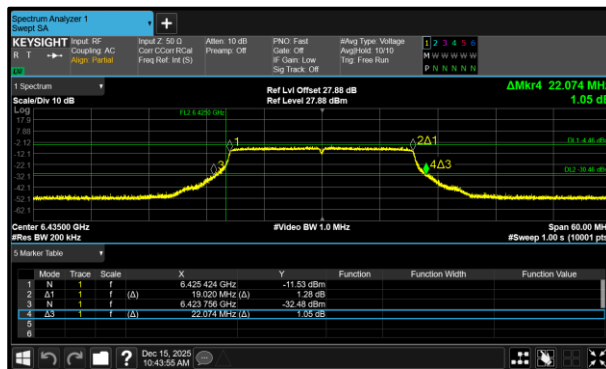


Figure 105 - 802.11ax HE20 SU LPI
Minimum 26 dB EBW

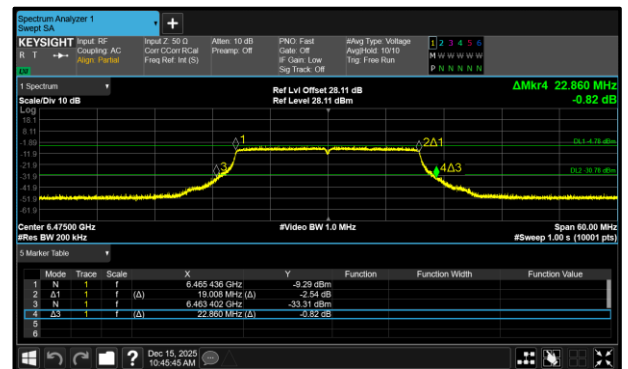


Figure 106 - 802.11ax HE20 SU LPI
Maximum 26 dB EBW



Figure 107 - 802.11ax HE40 SU LPI
Minimum 26 dB EBW

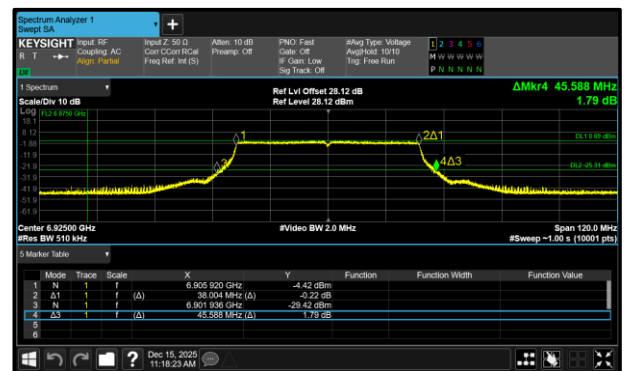


Figure 108 - 802.11ax HE40 SU LPI
Maximum 26 dB EBW



Figure 109 - 802.11ax HE80 SU LPI
Minimum 26 dB EBW



Figure 110 - 802.11ax HE80 SU LPI
Maximum 26 dB EBW

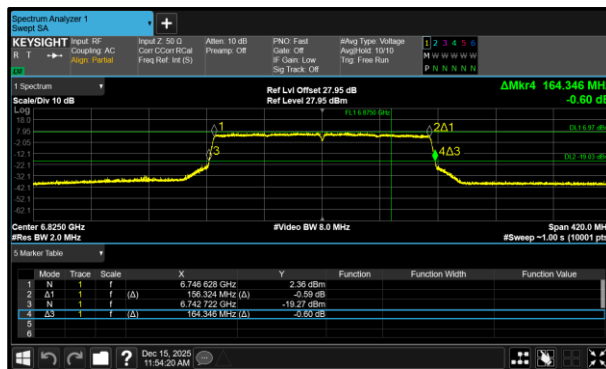


Figure 111 - 802.11ax HE160 SU LPI
Minimum 26 dB EBW

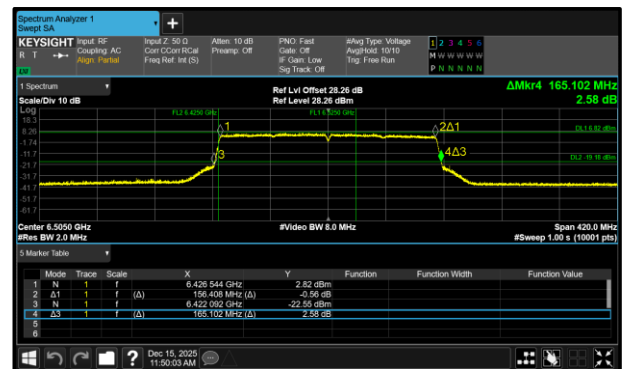


Figure 112 - 802.11ax HE160 SU LPI
Maximum 26 dB EBW

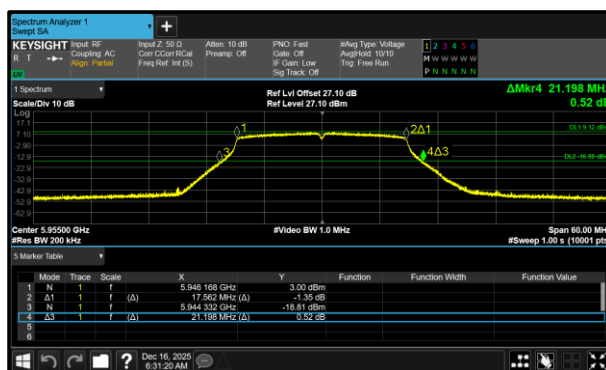


Figure 113 - 802.11a20 SP Minimum 26
dB EBW

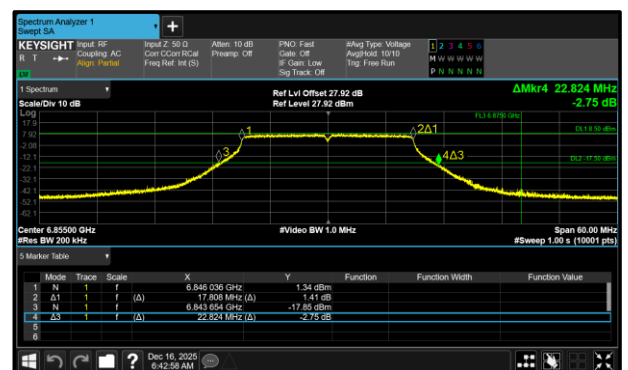


Figure 114 - 802.11a20 SP Maximum
26 dB EBW

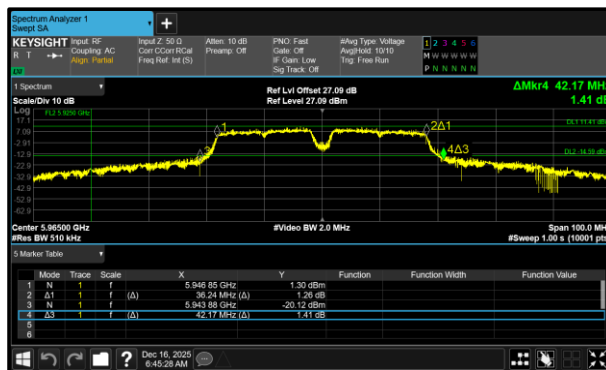


Figure 115 - 802.11a40 SP Minimum 26
dB EBW



Figure 116 - 802.11a40 SP Maximum
26 dB EBW

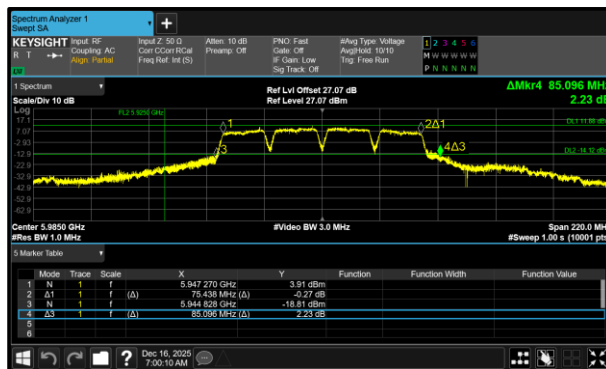


Figure 117 - 802.11a80 SP Minimum 26 dB EBW

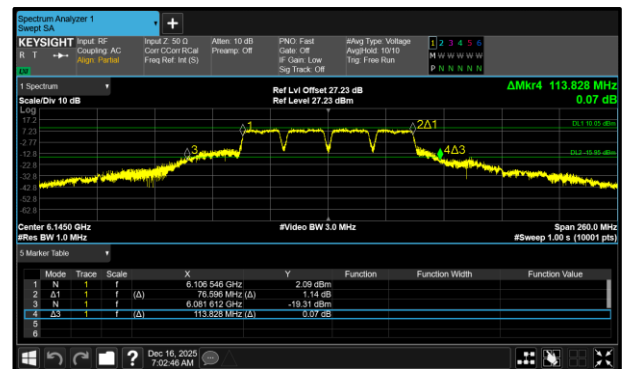


Figure 118 - 802.11a80 SP Maximum 26 dB EBW

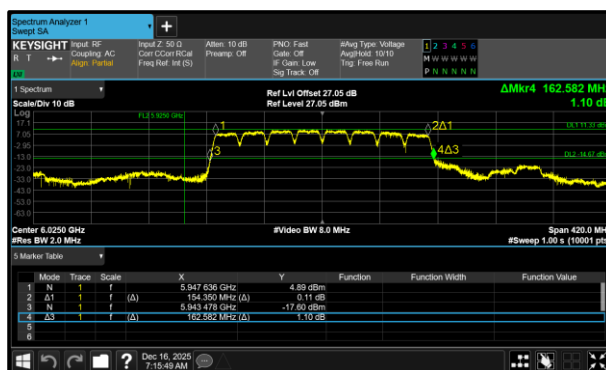


Figure 119 - 802.11a160 SP Minimum 26 dB EBW

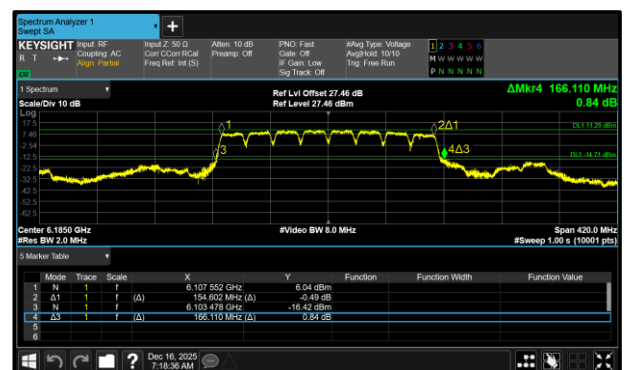


Figure 120 - 802.11a160 SP Maximum 26 dB EBW

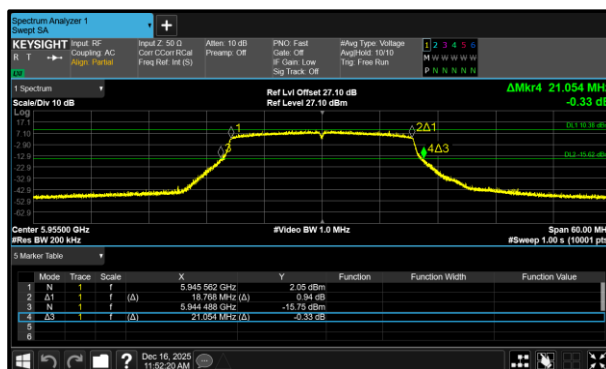


Figure 121 - 802.11ax HE20 SU SP Minimum 26 dB EBW

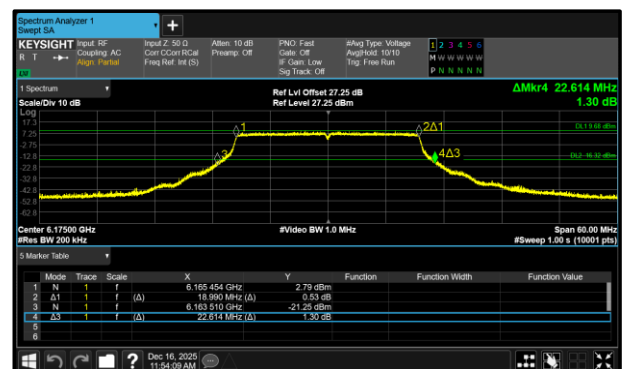


Figure 122 - 802.11ax HE20 SU SP Maximum 26 dB EBW

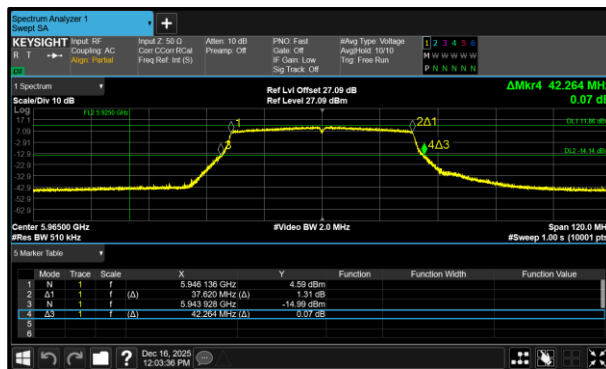


Figure 123 - 802.11ax HE40 SU SP
Minimum 26 dB EBW

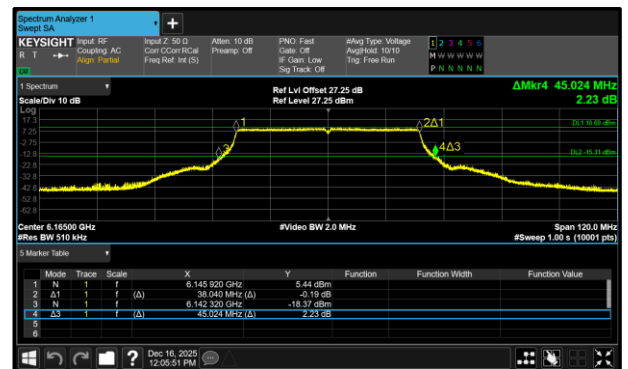


Figure 124 - 802.11ax HE40 SU SP
Maximum 26 dB EBW

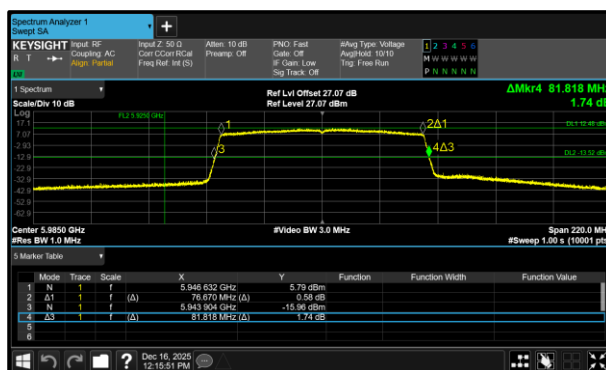


Figure 125 - 802.11ax HE80 SU SP
Minimum 26 dB EBW

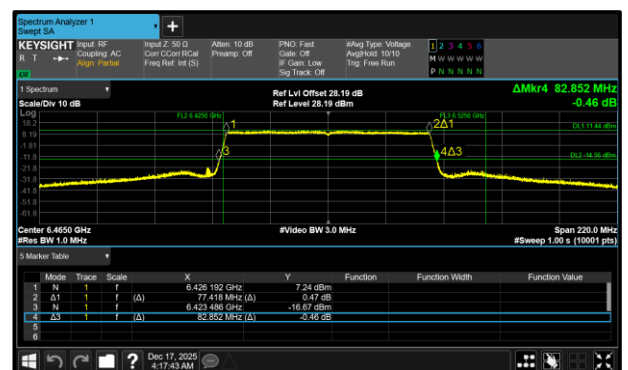


Figure 126 - 802.11ax HE80 SU SP
Maximum 26 dB EBW

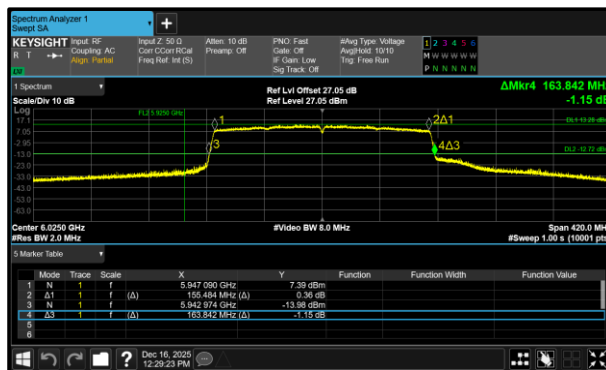


Figure 127 - 802.11ax HE160 SU SP
Minimum 26 dB EBW



Figure 128 - 802.11ax HE160 SU SP
Maximum 26 dB EBW

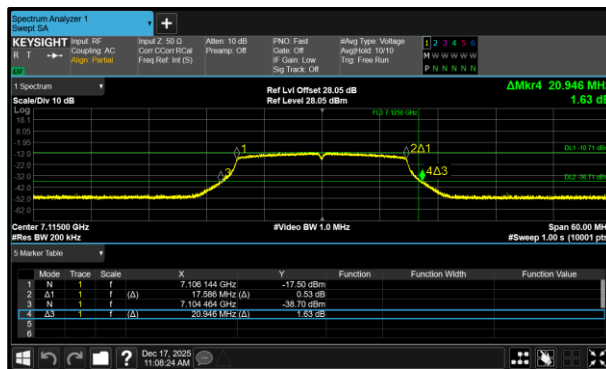


Figure 129 - 802.11a20 VLP Minimum
26 dB EBW

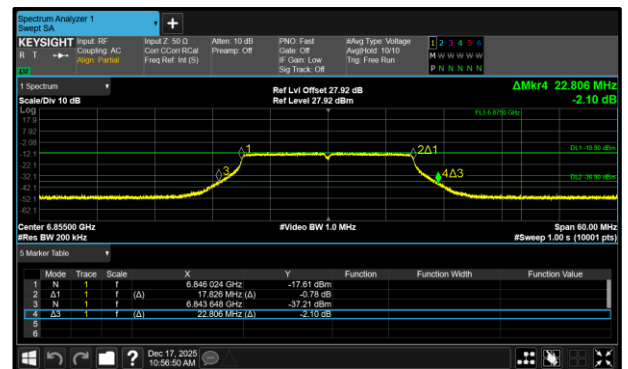


Figure 130 - 802.11a20 VLP Maximum
26 dB EBW

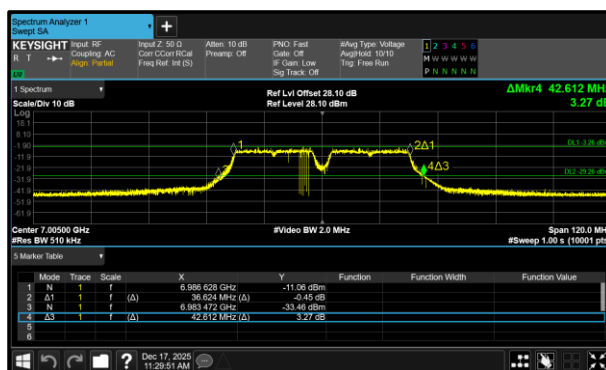


Figure 131 - 802.11a40 VLP Minimum
26 dB EBW

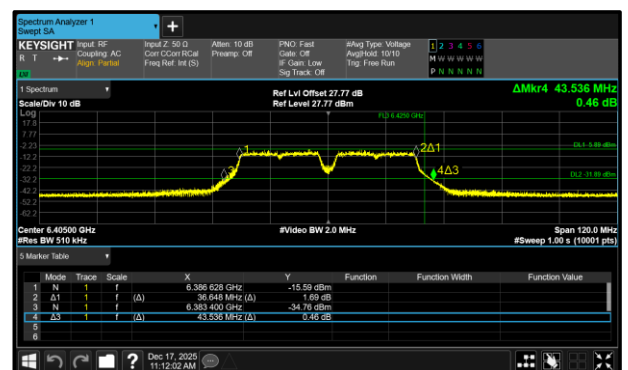


Figure 132 - 802.11a40 VLP Maximum
26 dB EBW

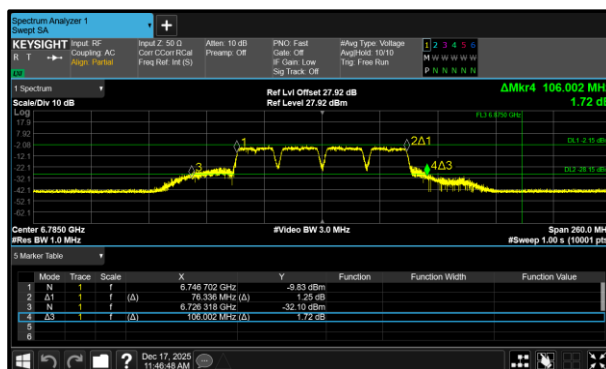


Figure 133 - 802.11a80 VLP Minimum
26 dB EBW

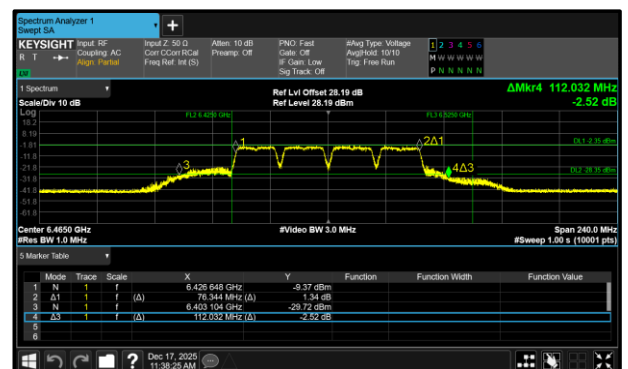


Figure 134 - 802.11a80 VLP Maximum
26 dB EBW

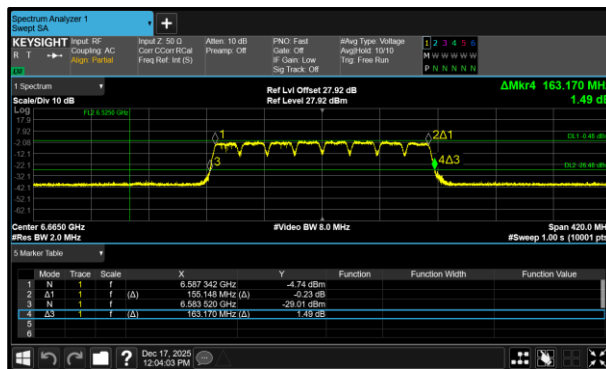


Figure 135 - 802.11a160 VLP Minimum 26 dB EBW

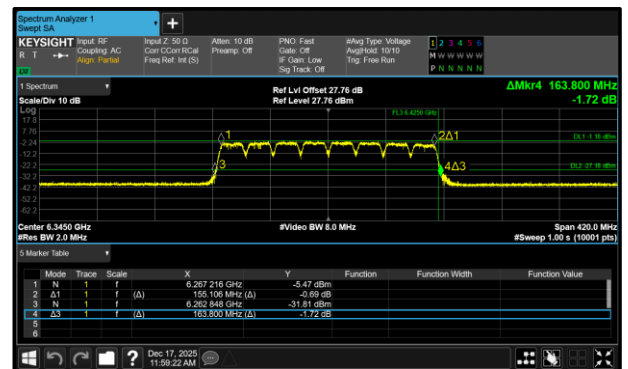


Figure 136 - 802.11a160 VLP Maximum 26 dB EBW

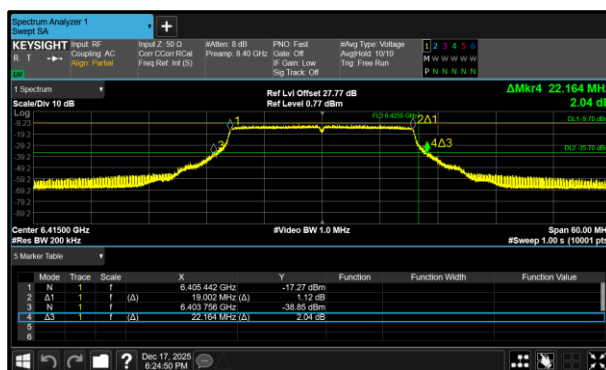


Figure 137 - 802.11ax HE20 SU VLP Minimum 26 dB EBW

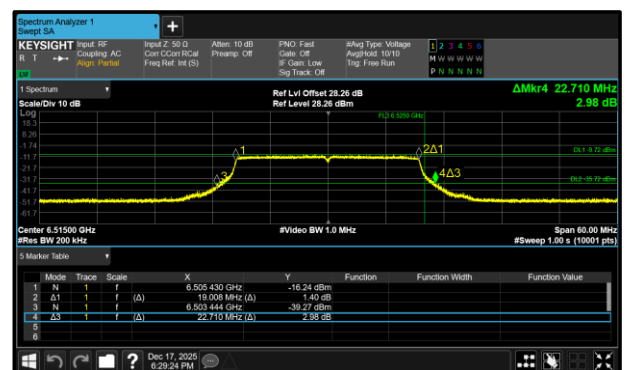


Figure 138 - 802.11ax HE20 SU VLP Maximum 26 dB EBW

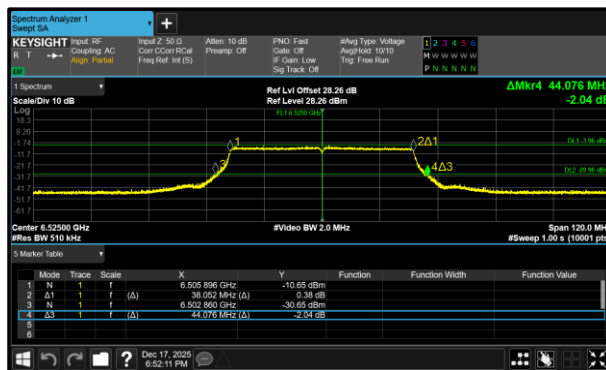


Figure 139 - 802.11ax HE40 SU VLP Minimum 26 dB EBW

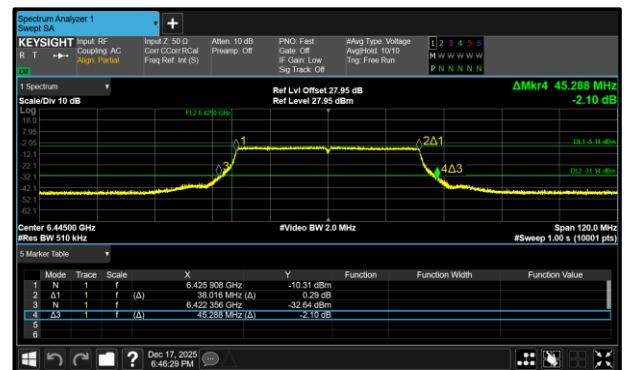


Figure 140 - 802.11ax HE40 SU VLP Maximum 26 dB EBW

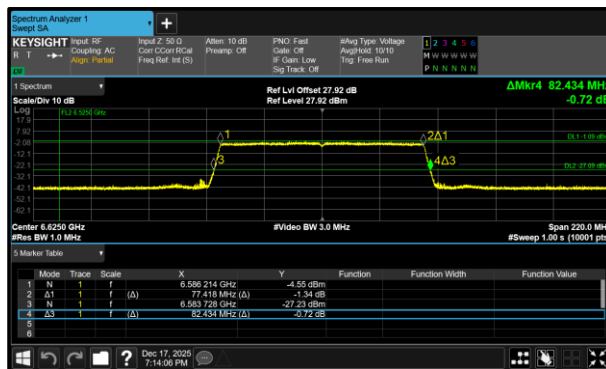


Figure 141 - 802.11ax HE80 SU VLP
Minimum 26 dB EBW

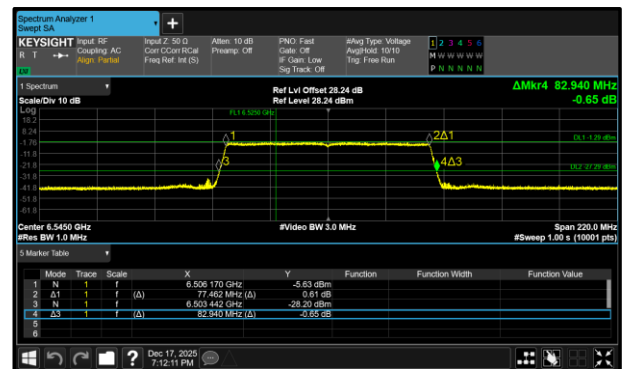


Figure 142 - 802.11ax HE80 SU VLP
Maximum 26 dB EBW

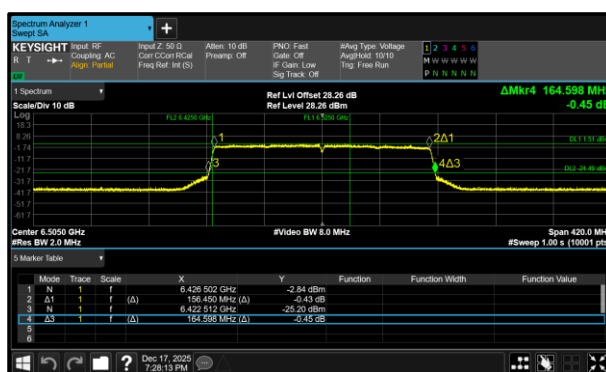


Figure 143 - 802.11ax HE160 SU VLP
Minimum 26 dB EBW

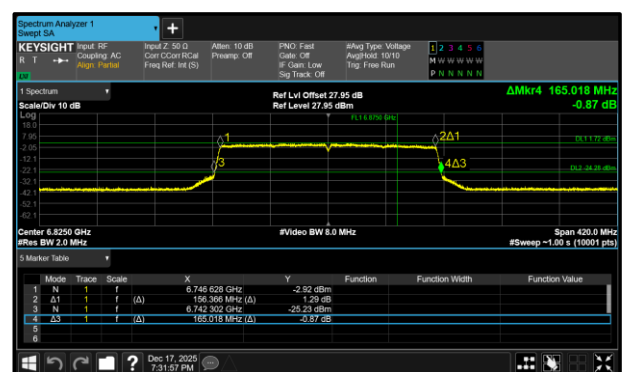


Figure 144 - 802.11ax HE160 SU VLP
Maximum 26 dB EBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11a LPI (20 MHz)	17.586	17.820
802.11a LPI (40 MHz)	36.560	36.648
802.11a LPI (80 MHz)	76.258	76.414
802.11a LPI (160 MHz)	154.938	155.106
802.11ax HE20 SU LPI	18.990	19.020
802.11ax HE40 SU LPI	38.004	38.028
802.11ax HE80 SU LPI	77.418	77.484
802.11ax HE160 SU LPI	156.198	156.408
802.11a SP (20 MHz)	17.562	17.820
802.11a SP (40 MHz)	36.240	36.804
802.11a SP (80 MHz)	75.438	76.648
802.11a SP (160 MHz)	154.350	154.602
802.11ax HE20 SU SP	18.768	19.008
802.11ax HE40 SU SP	37.620	38.040
802.11ax HE80 SU SP	76.670	77.506
802.11ax HE160 SU SP	155.484	155.778
802.11a VLP (20 MHz)	17.586	17.832
802.11a VLP (40 MHz)	36.552	36.660
802.11a VLP (80 MHz)	76.320	76.488
802.11a VLP (160 MHz)	154.938	155.190
802.11ax HE20 SU VLP	18.984	19.008
802.11ax HE40 SU VLP	37.992	38.052
802.11ax HE80 SU VLP	77.418	77.484
802.11ax HE160 SU VLP	156.198	156.450

Table 58 - 99% Bandwidth Summary Results – Core 1

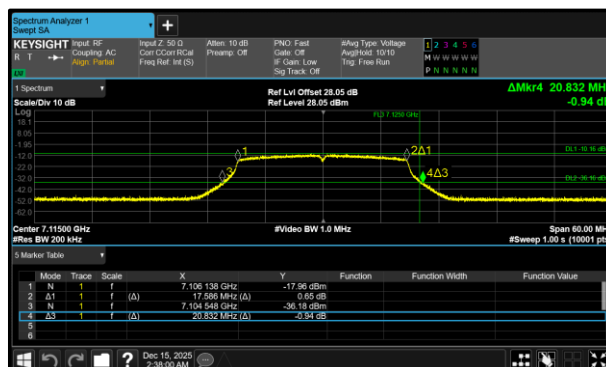


Figure 145 - 802.11a20 LPI Minimum 99% OBW

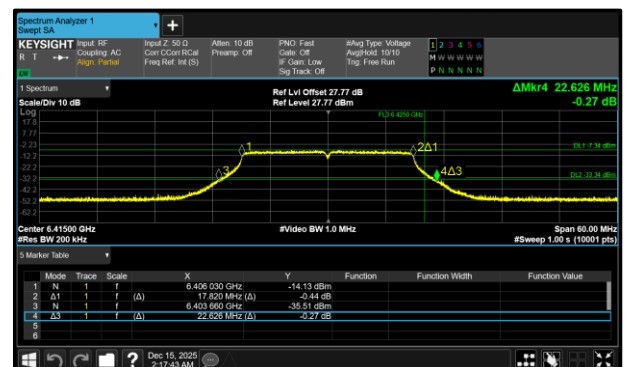


Figure 146 - 802.11a20 LPI Maximum 99% OBW