

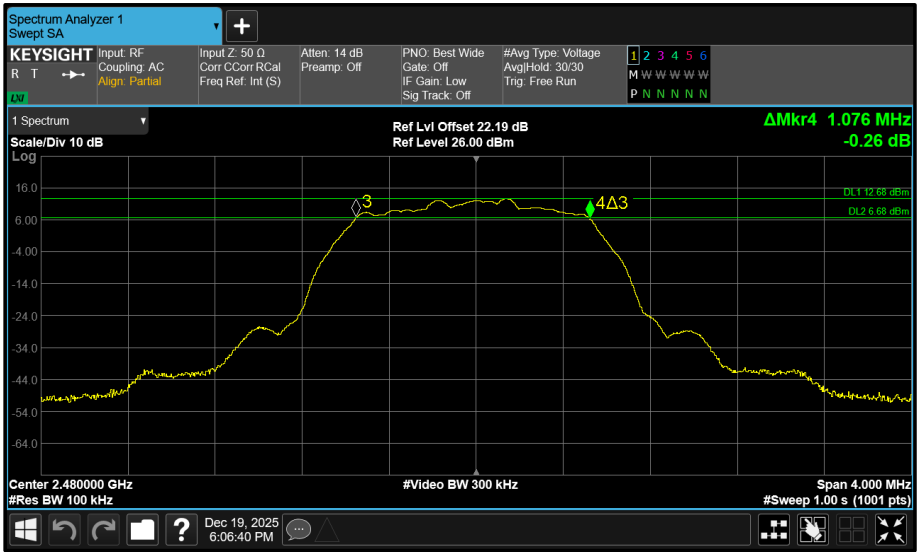


Figure 436 - Core 0 (A) 2480 MHz (CH78) 6 dB Bandwidth

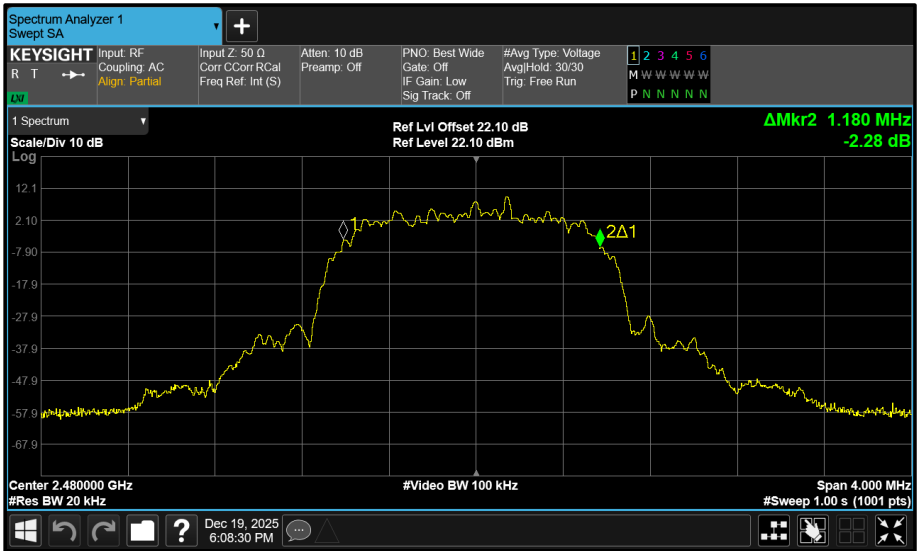


Figure 437 - Core 1 (B) 2480 MHz (CH78) 99% Bandwidth

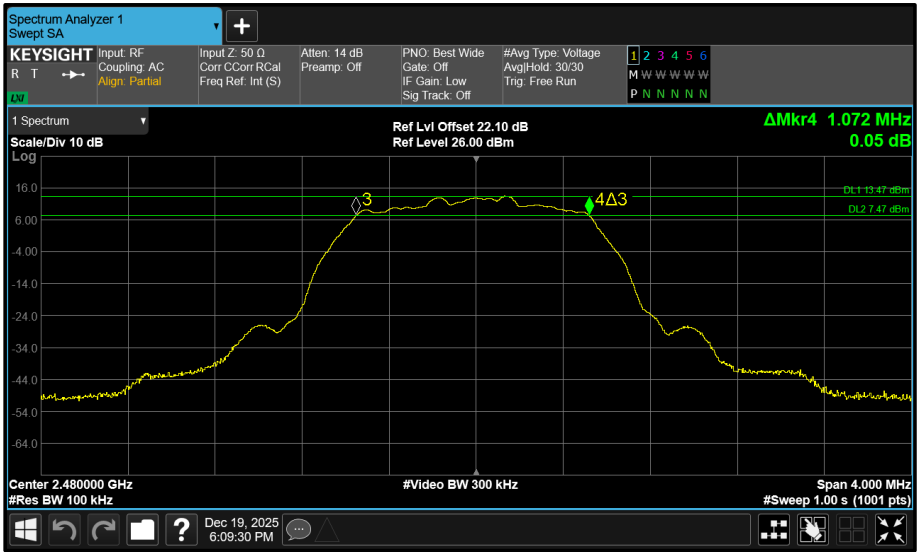


Figure 438 - Core 1 (B) 2480 MHz (CH78) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 (a)	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	0.570	0.570	-	-	≥ 500.0
2441	0.570	0.570	-	-	≥ 500.0
2476	0.570	0.570	-	-	≥ 500.0

Table 80 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	4.620	4.620	-	-	-
2441	4.605	4.605	-	-	-
2476	4.605	4.620	-	-	-

Table 81 - 99% Bandwidth Results

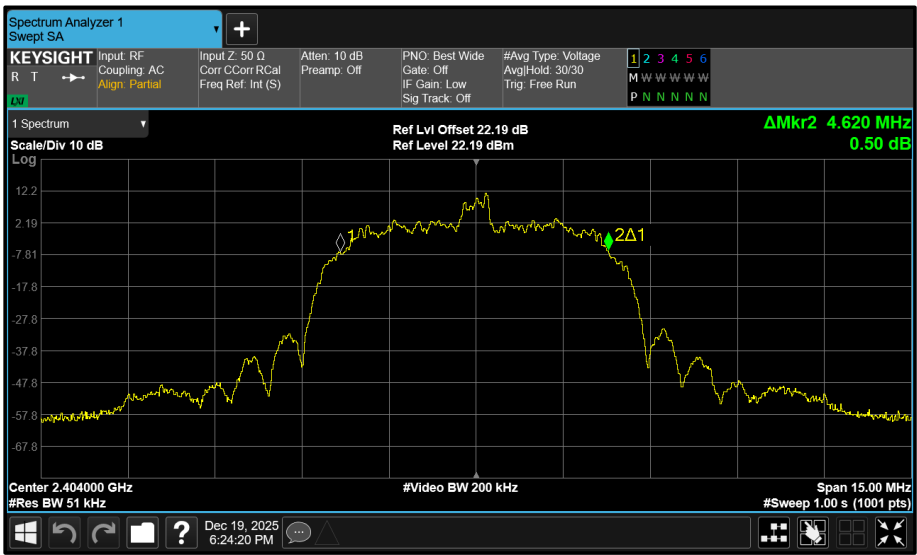


Figure 439 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

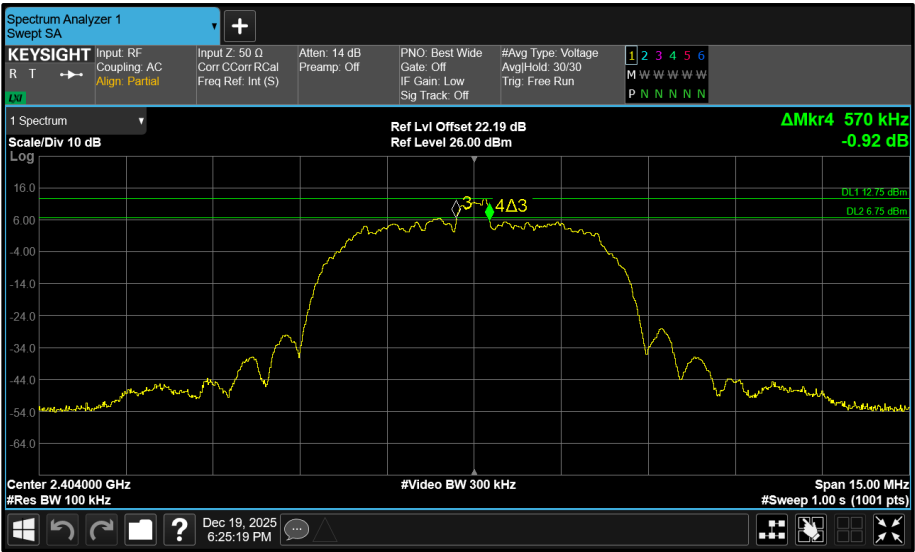


Figure 440 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

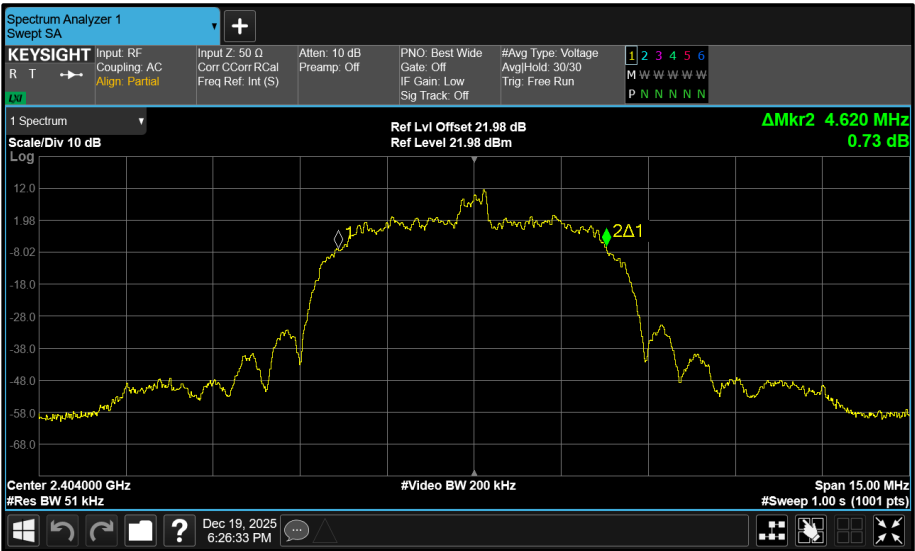


Figure 441 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

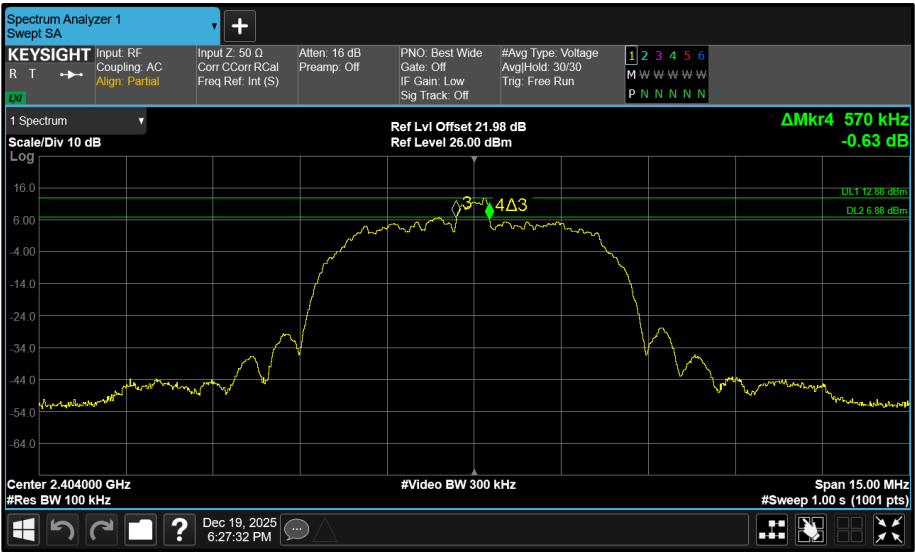


Figure 442 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

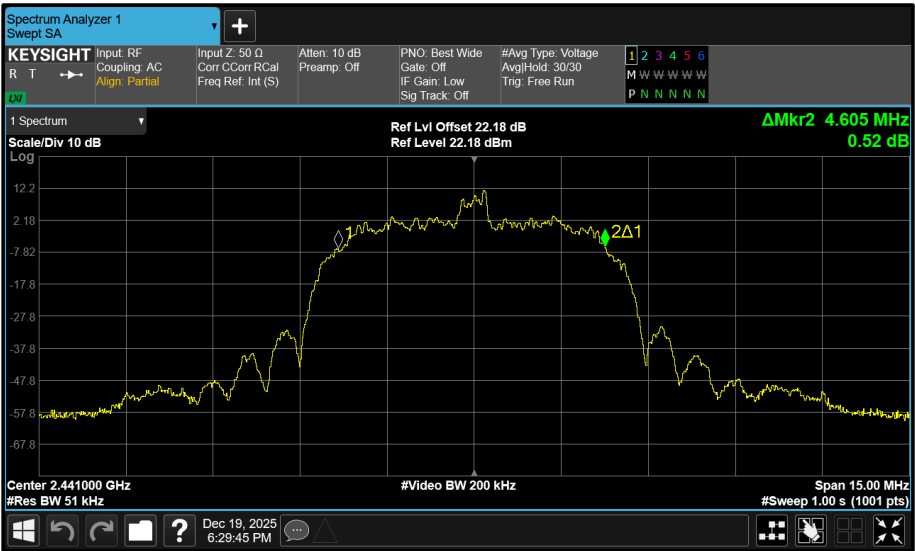


Figure 443 - Core 0 (A) 2441 MHz (CH39) 99% Bandwidth

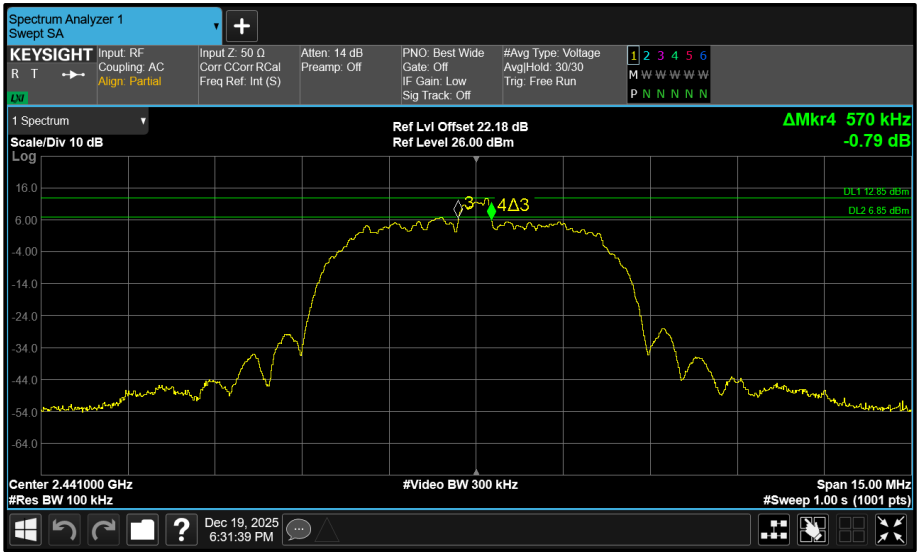


Figure 444 - Core 0 (A) 2441 MHz (CH39) 6 dB Bandwidth

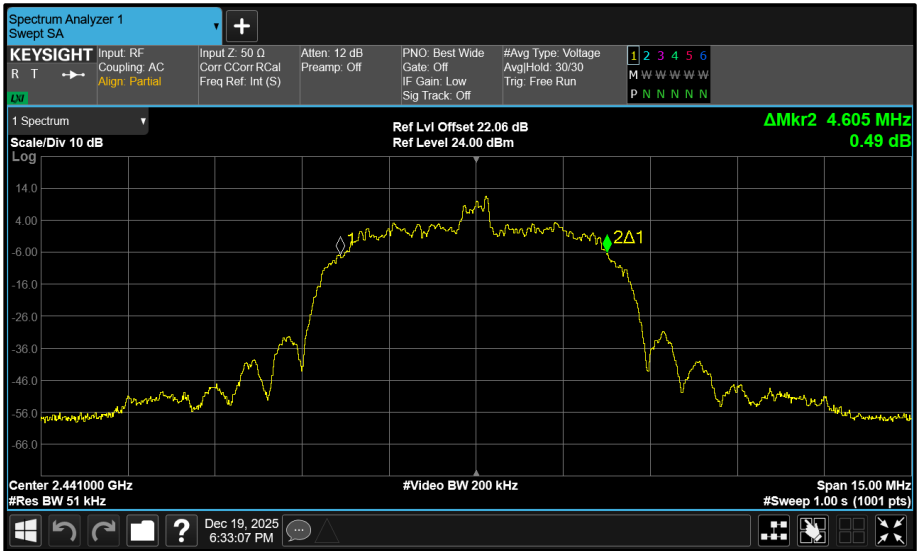


Figure 445 - Core 1 (B) 2441 MHz (CH39) 99% Bandwidth

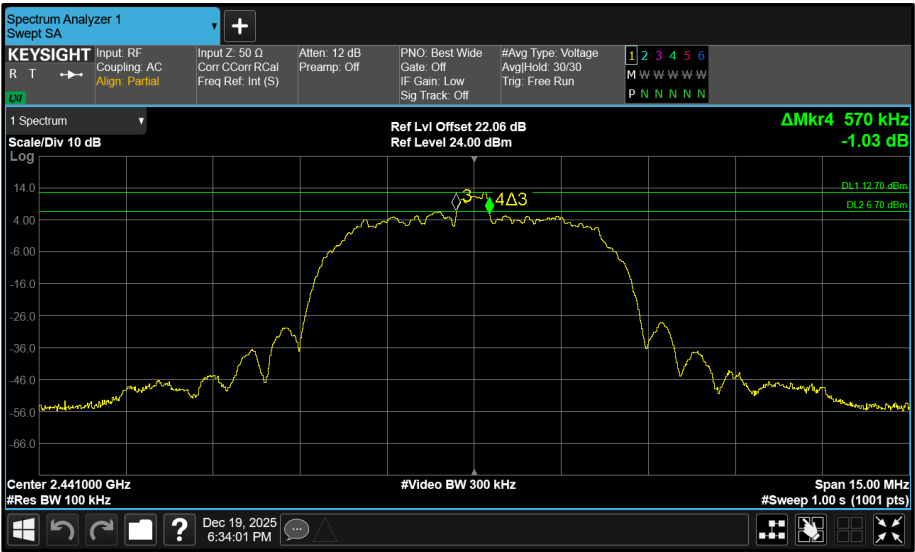


Figure 446 - Core 1 (B) 2441 MHz (CH39) 6 dB Bandwidth

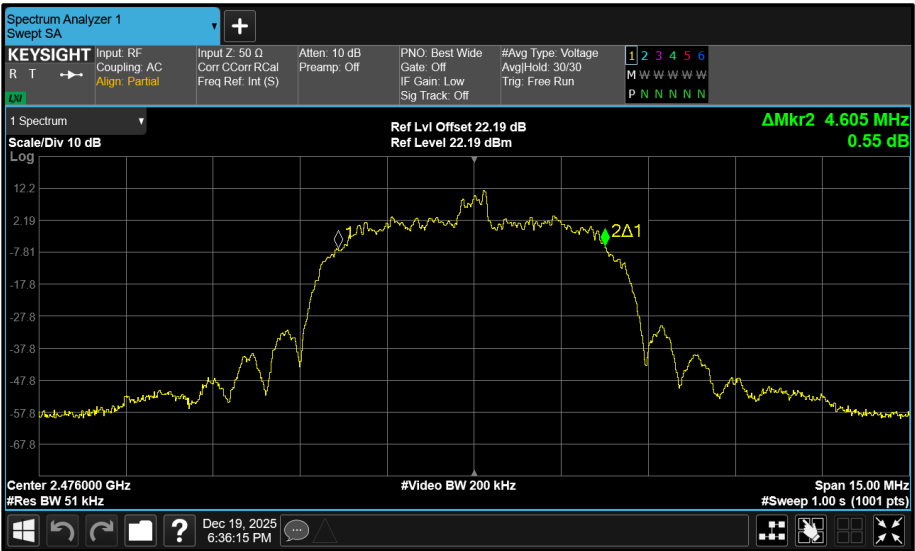


Figure 447 - Core 0 (A) 2476 MHz (CH74) 99% Bandwidth

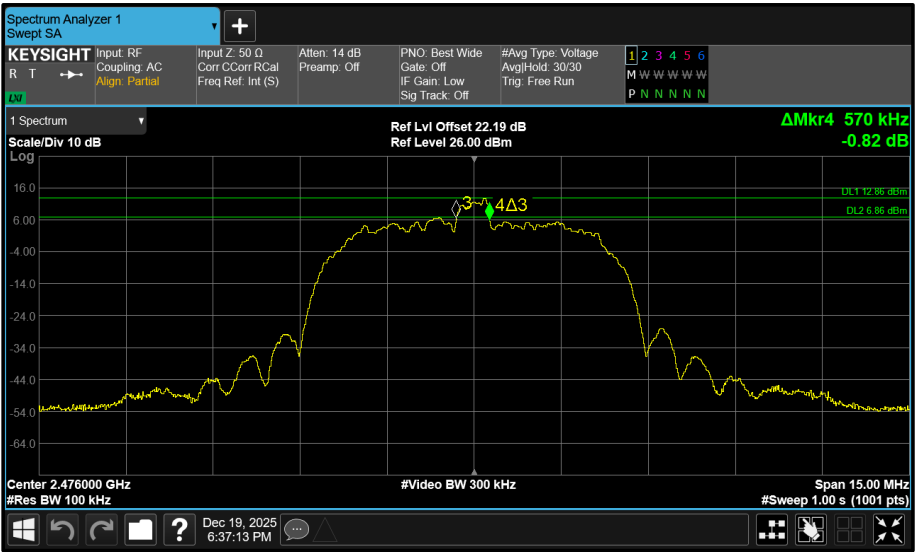


Figure 448 - Core 0 (A) 2476 MHz (CH74) 6 dB Bandwidth

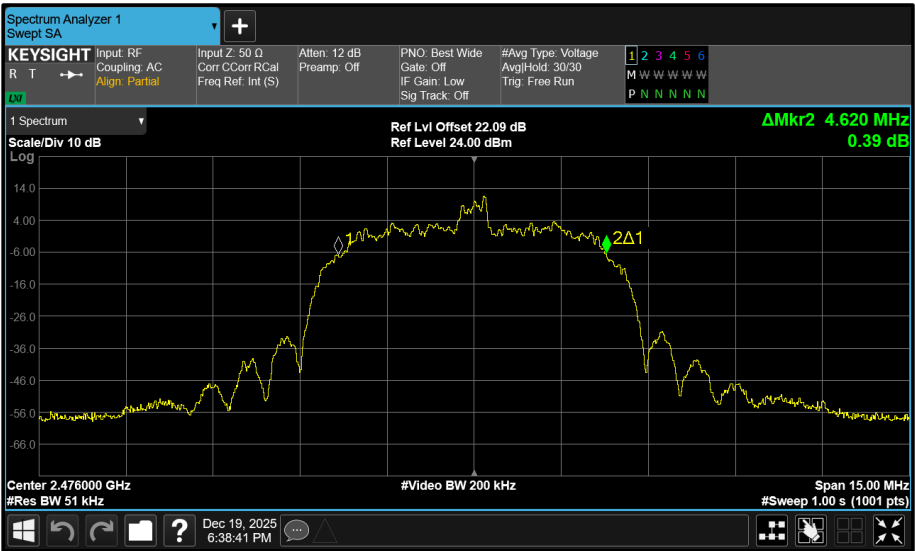


Figure 449 - Core 1 (B) 2476 MHz (CH74) 99% Bandwidth





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 (a)	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8PSK (HDT4)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	2.136	2.136	-	-	≥500.0
2441	2.144	2.144	-	-	≥500.0
2478	2.136	2.136	-	-	≥500.0

Table 82 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	2.368	2.368	-	-	-
2441	2.368	2.368	-	-	-
2478	2.376	2.368	-	-	-

Table 83 - 99% Bandwidth Results

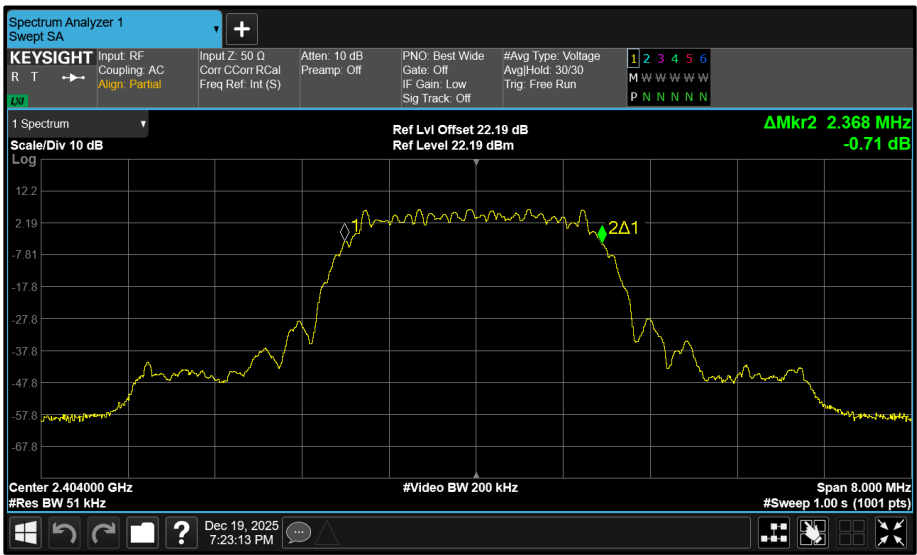


Figure 451 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

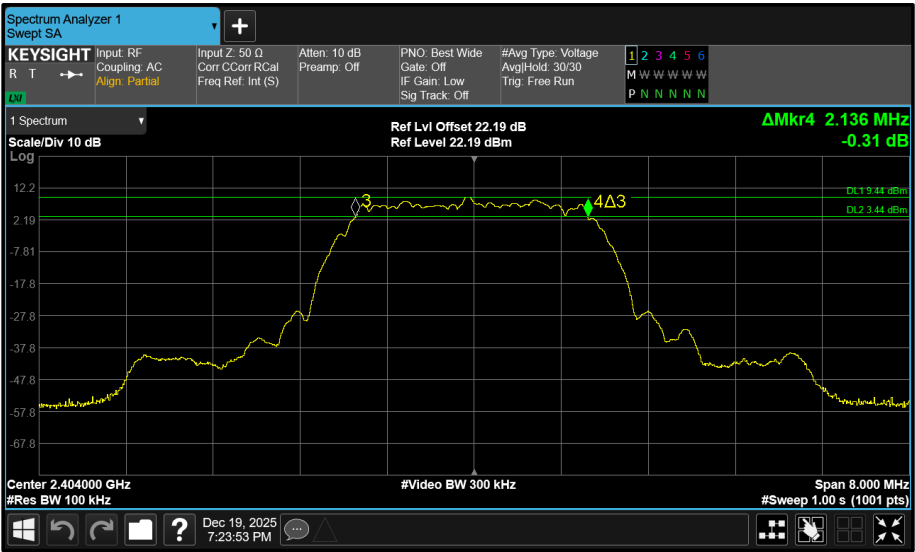


Figure 452 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

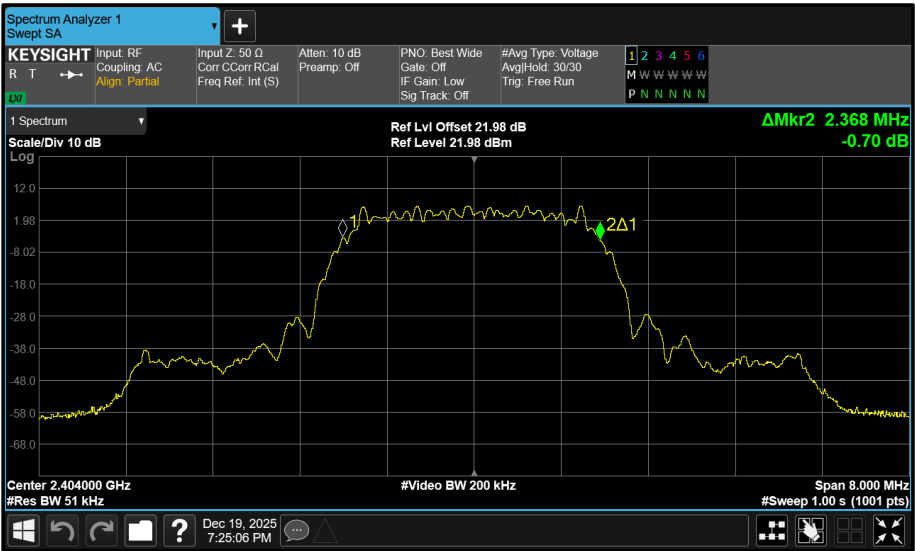


Figure 453 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

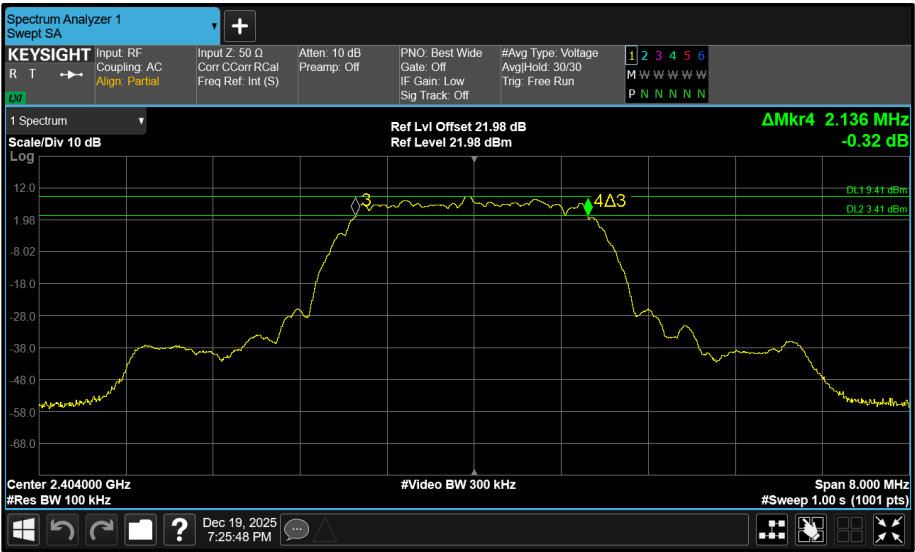


Figure 454 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

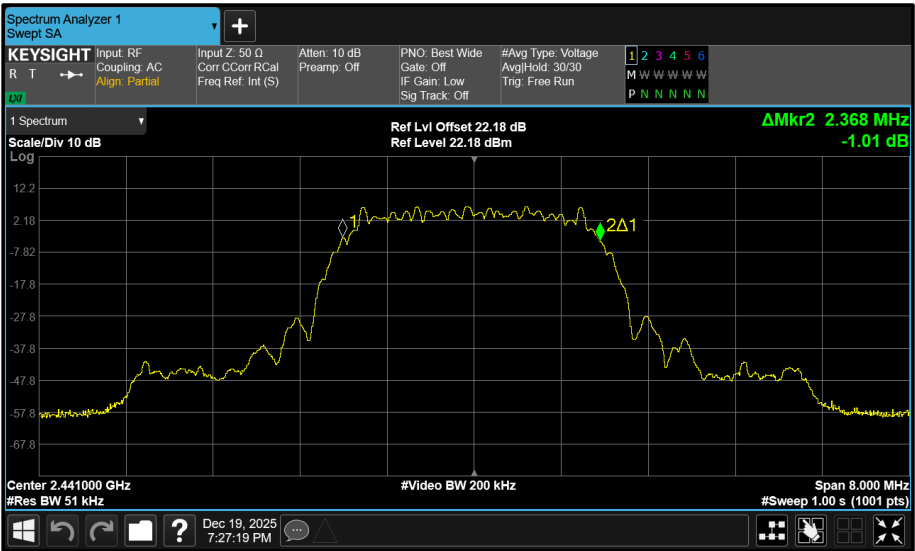


Figure 455 - Core 0 (A) 2441 MHz (CH39) 99% Bandwidth

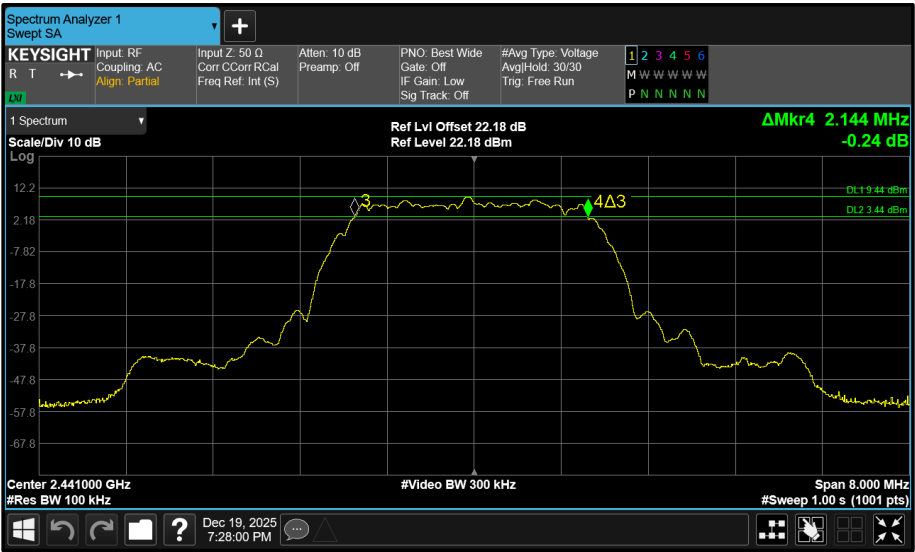


Figure 456 - Core 0 (A) 2441 MHz (CH39) 6 dB Bandwidth

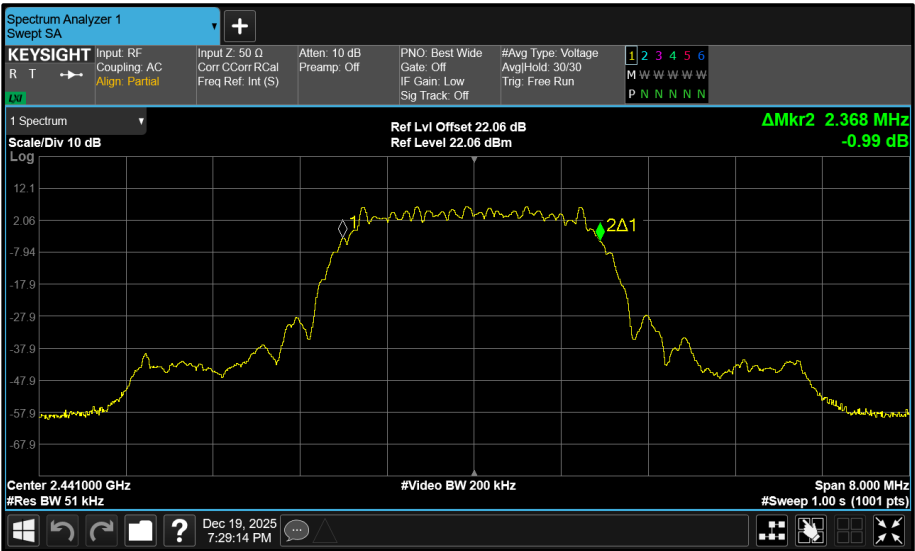


Figure 457 - Core 1 (B) 2441 MHz (CH39) 99% Bandwidth

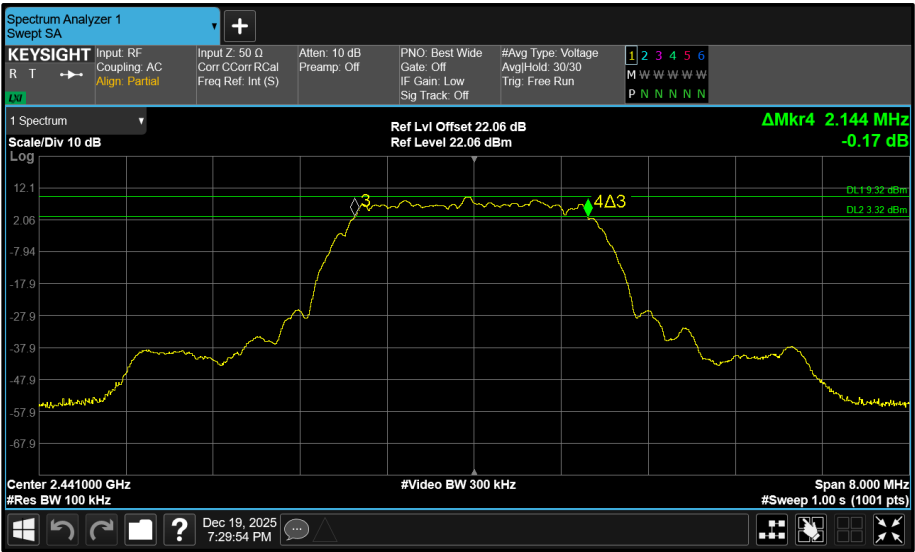


Figure 458 - Core 1 (B) 2441 MHz (CH39) 6 dB Bandwidth

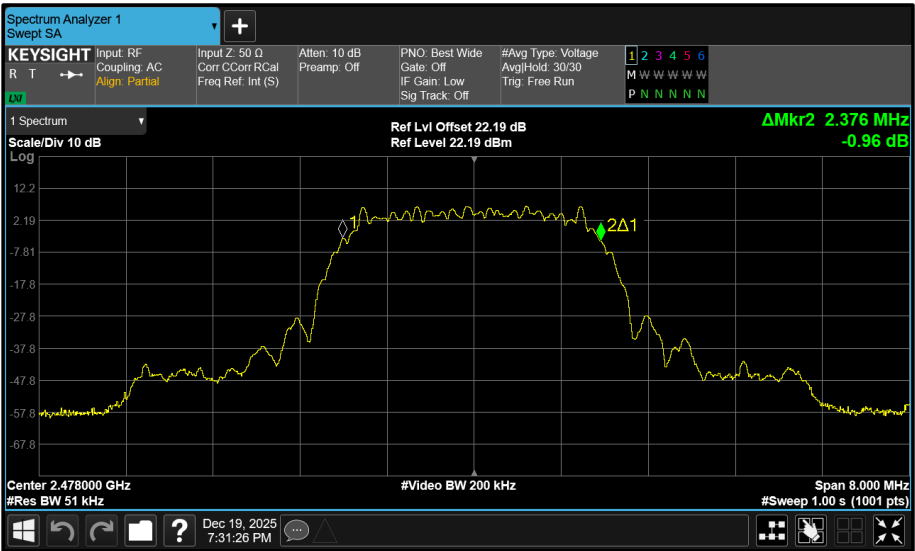


Figure 459 - Core 0 (A) 2478 MHz (CH76) 99% Bandwidth

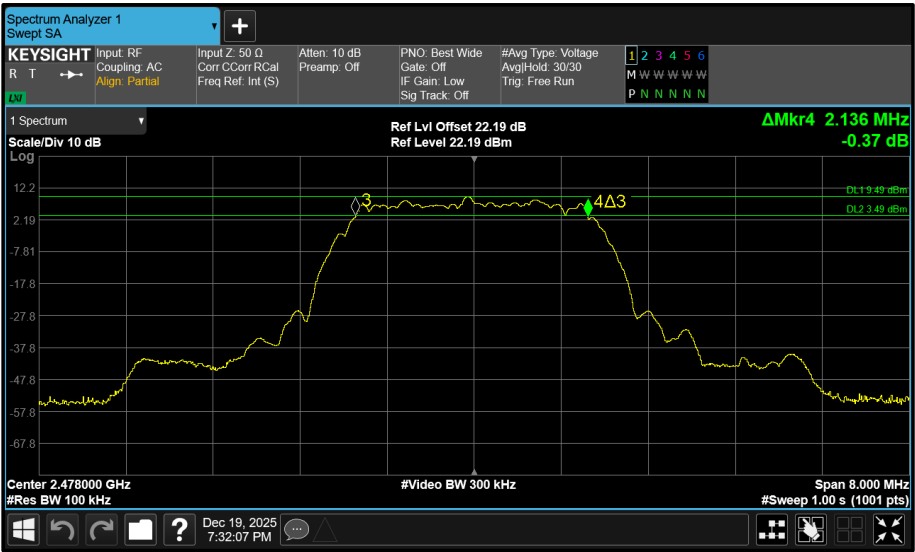


Figure 460 - Core 0 (A) 2478 MHz (CH76) 6 dB Bandwidth

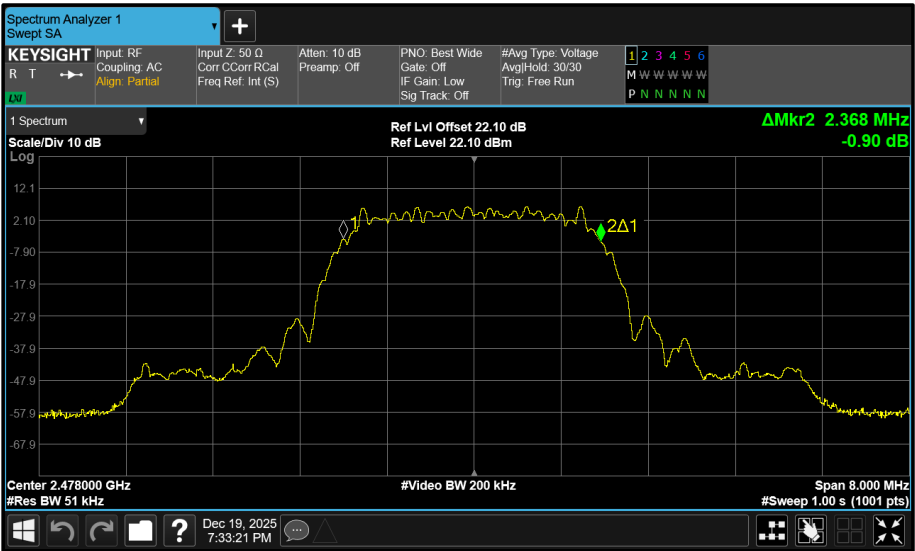


Figure 461 - Core 1 (B) 2478 MHz (CH76) 99% Bandwidth

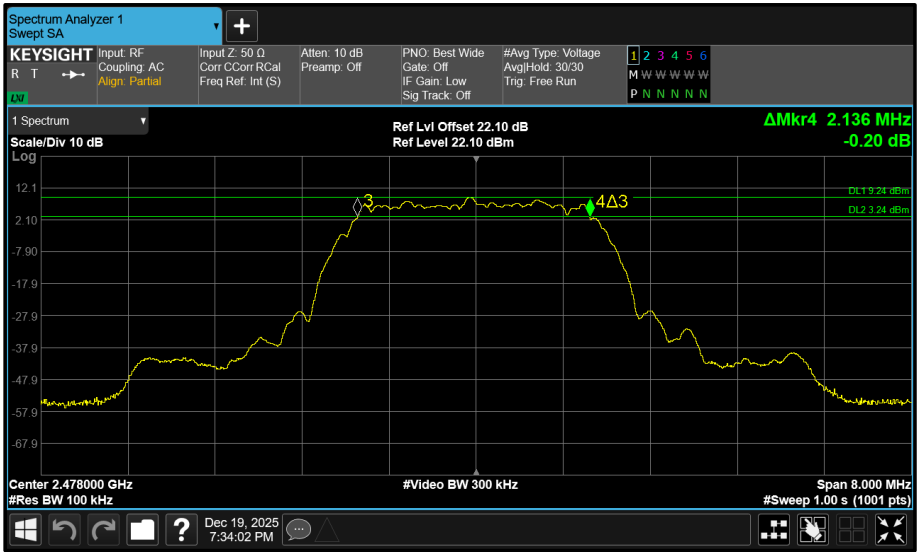


Figure 462 - Core 1 (B) 2478 MHz (CH76) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 (a)	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 16QAM (HDRPM12)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	2.180	2.180	-	-	≥500.0
2441	2.180	2.180	-	-	≥500.0
2475	4.080	4.060	-	-	≥500.0

Table 84 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	4.700	4.700	-	-	-
2441	4.700	4.700	-	-	-
2475	4.700	4.720	-	-	-

Table 85 - 99% Bandwidth Results

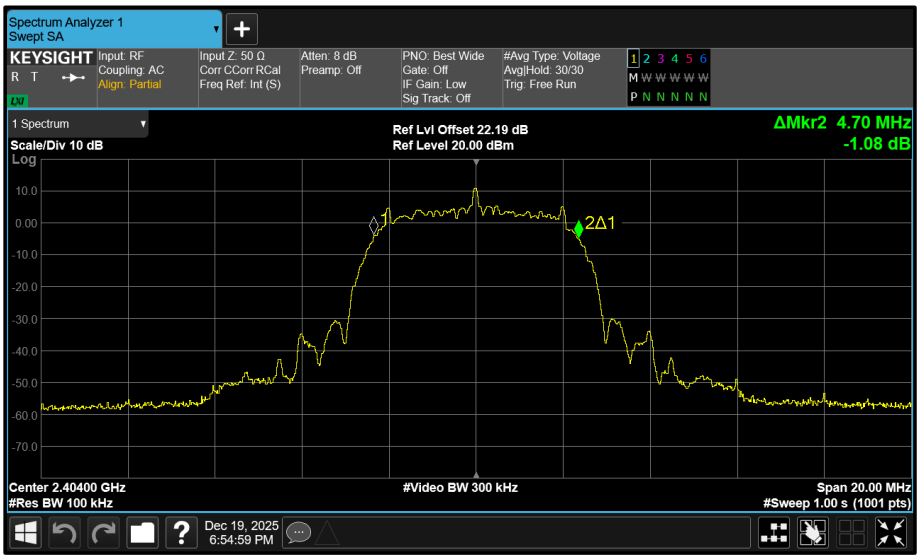


Figure 463 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth



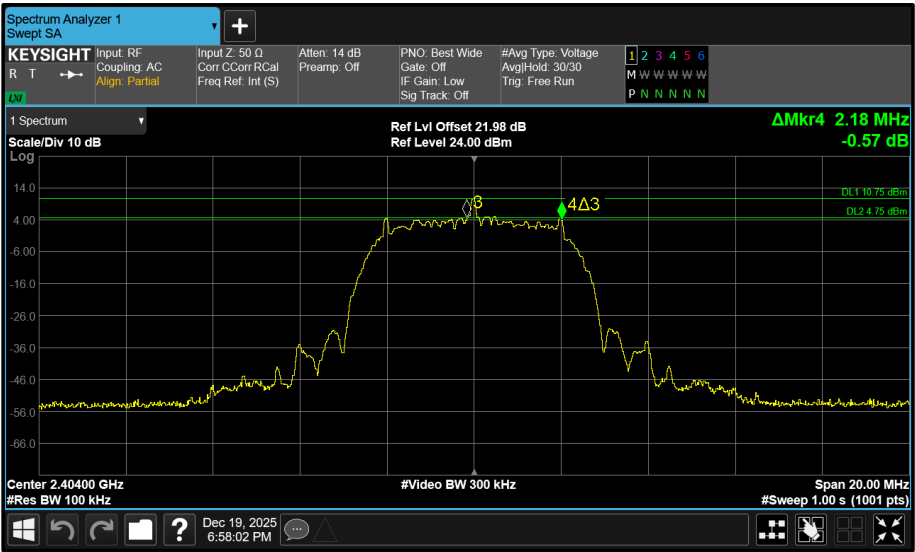


Figure 466 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

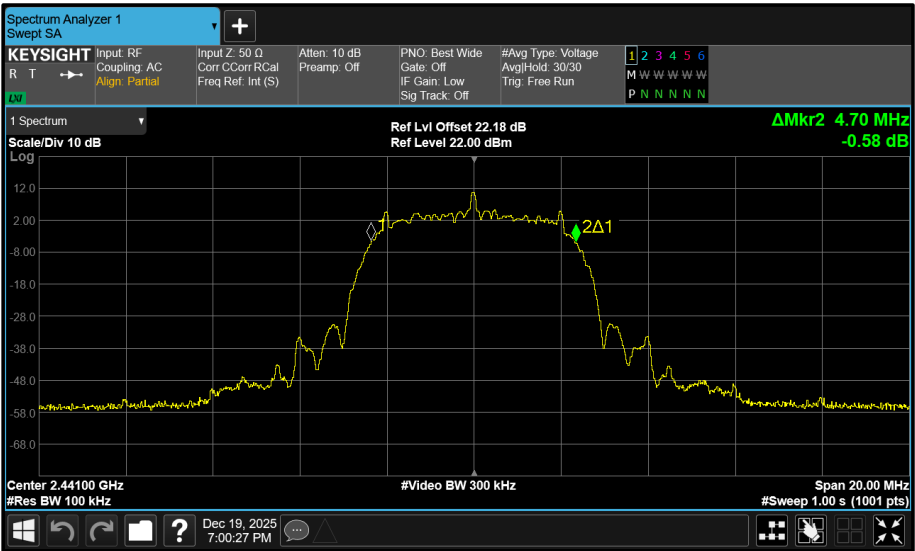


Figure 467 - Core 0 (A) 2441 MHz (CH39) 99% Bandwidth

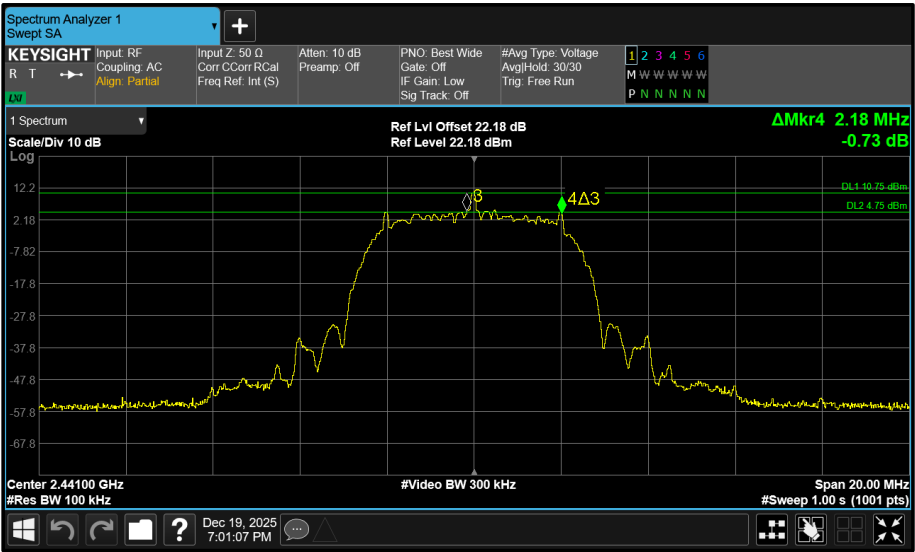


Figure 468 - Core 0 (A) 2441 MHz (CH39) 6 dB Bandwidth

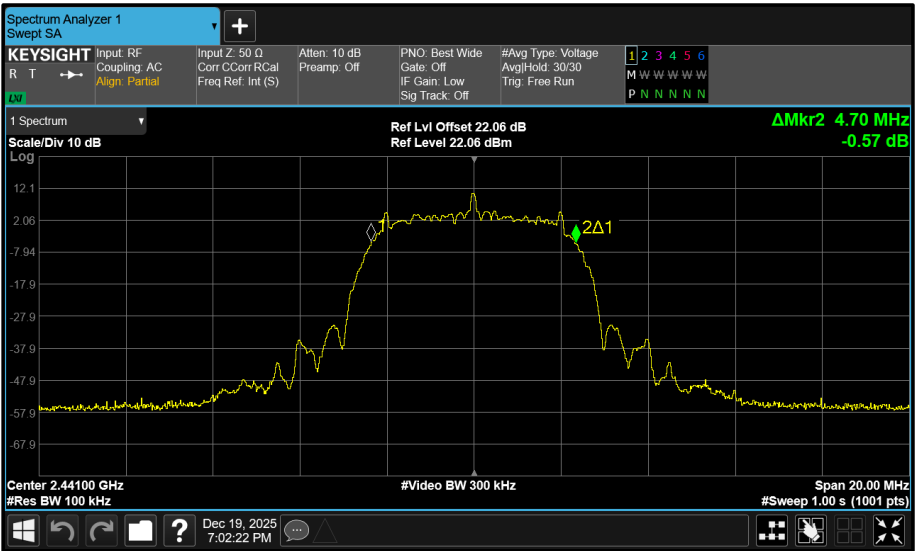


Figure 469 - Core 1 (B) 2441 MHz (CH39) 99% Bandwidth

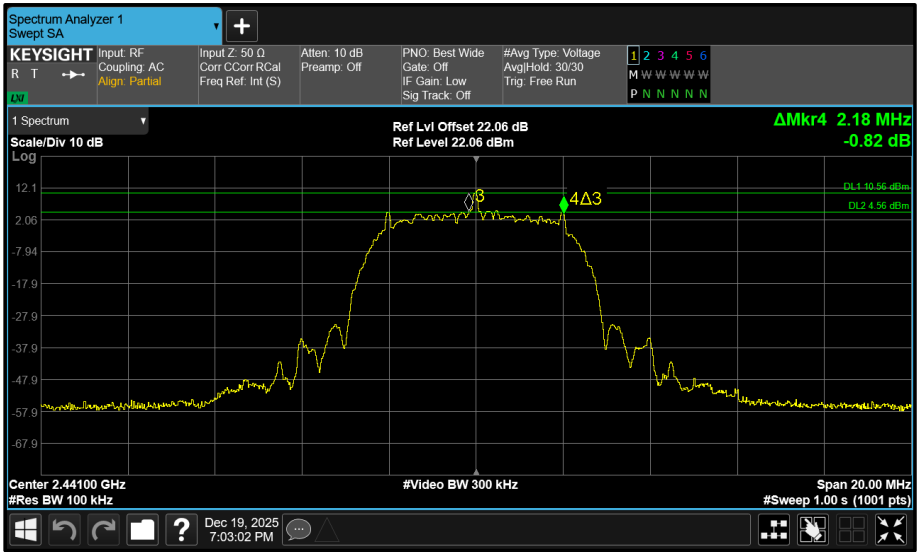


Figure 470 - Core 1 (B) 2441 MHz (CH39) 6 dB Bandwidth

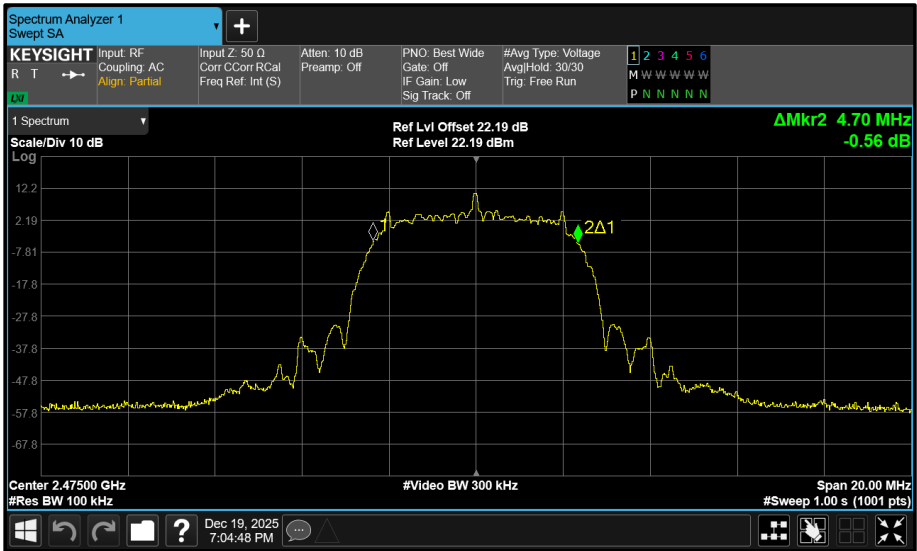


Figure 471 - Core 0 (A) 2475 MHz (CH73) 99% Bandwidth

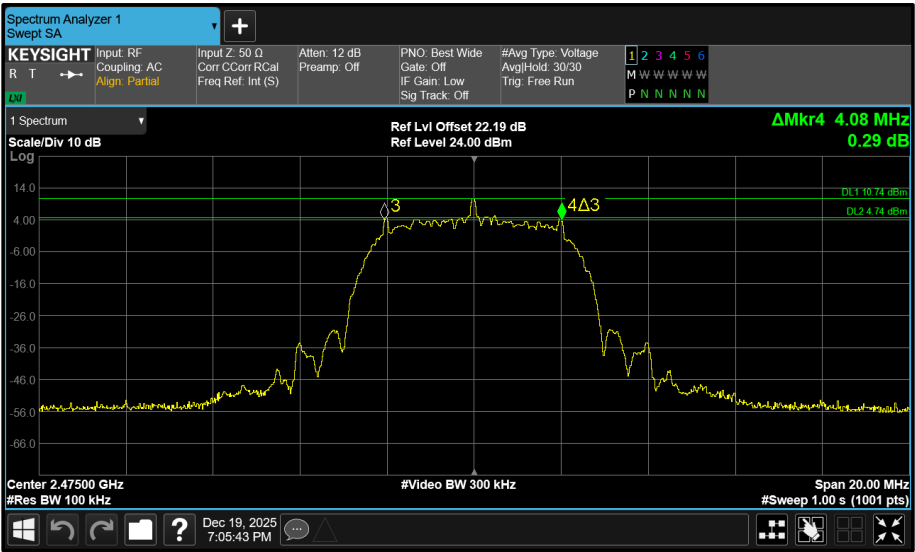


Figure 472 - Core 0 (A) 2475 MHz (CH73) 6 dB Bandwidth

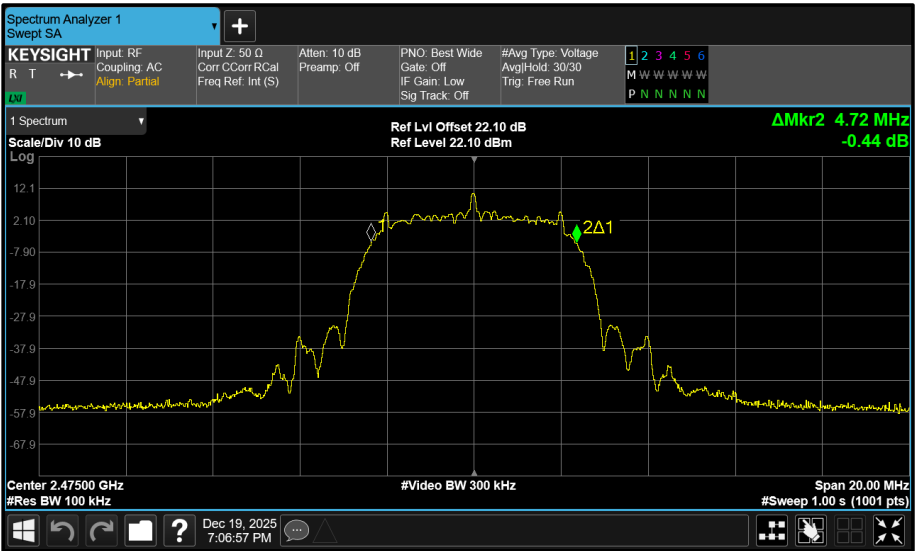


Figure 473 - Core 1 (B) 2475 MHz (CH73) 99% Bandwidth

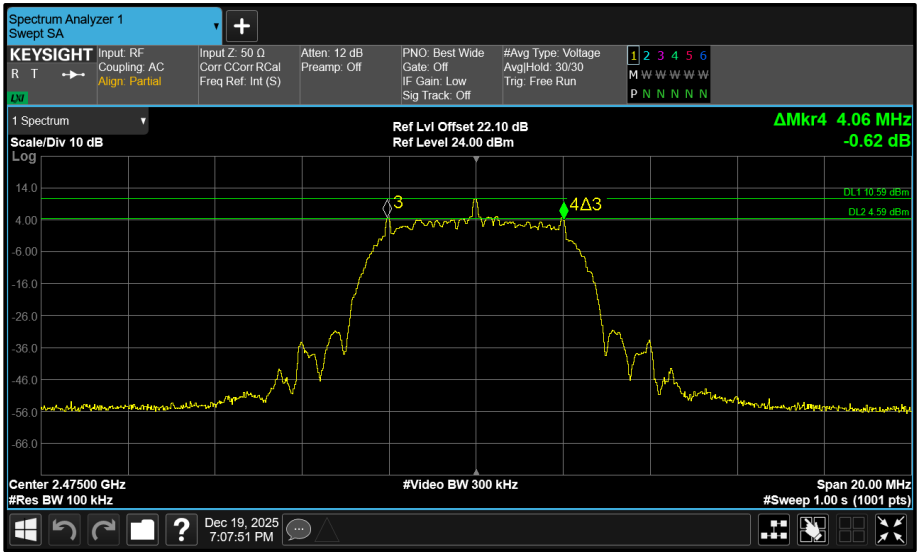


Figure 474 - Core 1 (B) 2475 MHz (CH73) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 (a)	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		
Note(s):	TxBF cores were tested independently whilst transmitting at the cores respective powers and summed after test		

DUT Configuration			
Mode:	ePA GFSK (LE 1M)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	0.668	0.668	-	-	≥500.0
2440	0.668	0.668	-	-	≥500.0
2480	0.668	0.668	-	-	≥500.0

Table 86 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	1.012	1.020	-	-	-
2440	1.016	1.016	-	-	-
2480	1.016	1.016	-	-	-

Table 87 - 99% Bandwidth Results

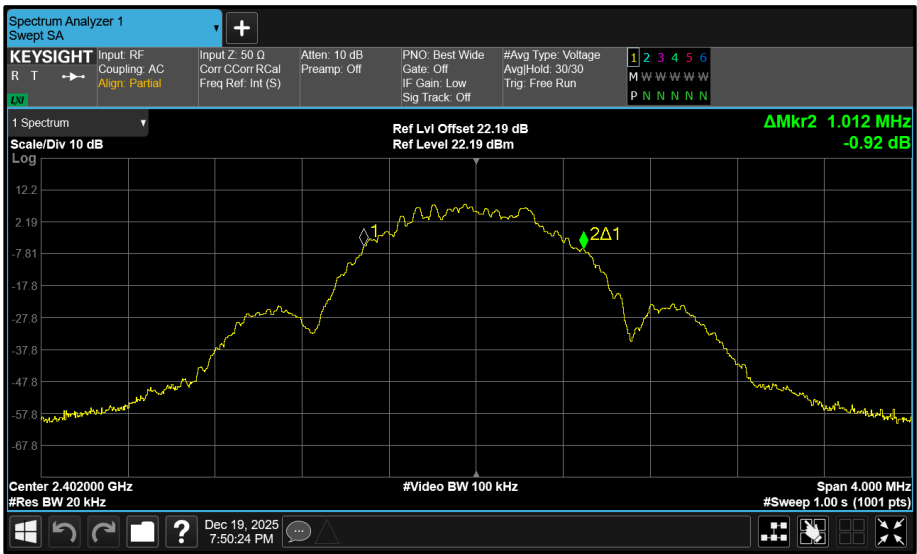


Figure 475 - Core 0 (A) 2402 MHz (CH37) 99% Bandwidth



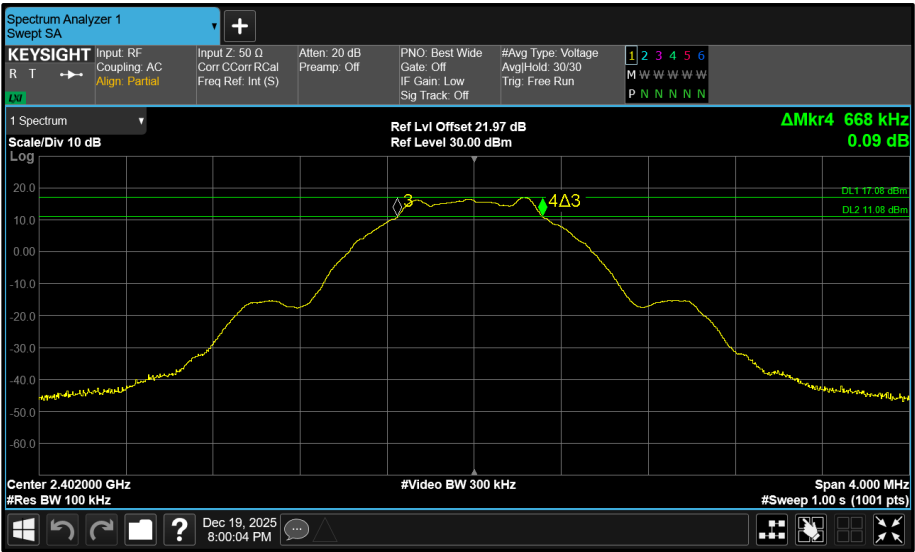


Figure 478 - Core 1 (B) 2402 MHz (CH37) 6 dB Bandwidth

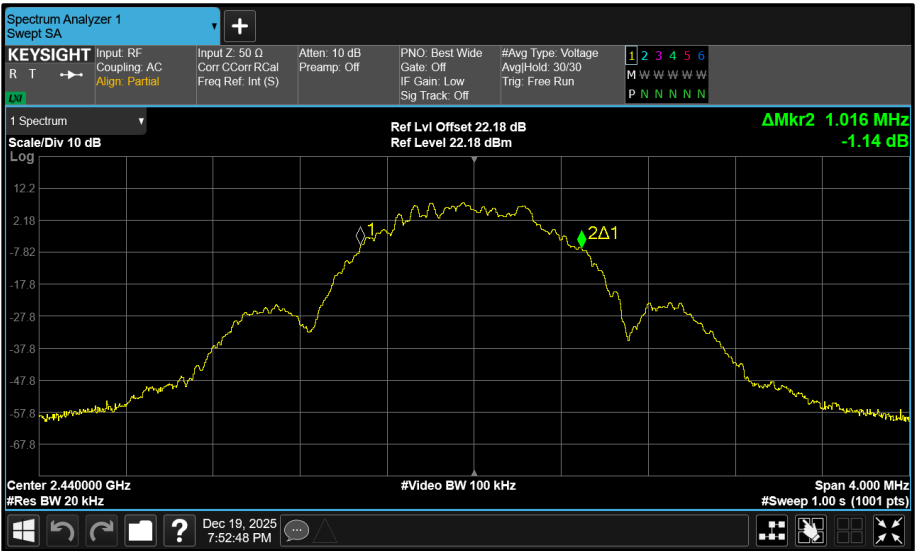


Figure 479 - Core 0 (A) 2440 MHz (CH17) 99% Bandwidth

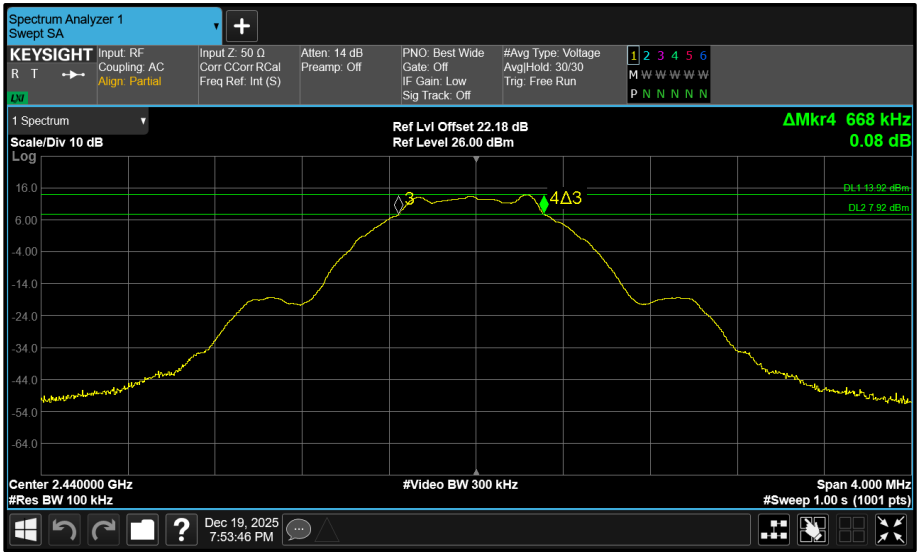


Figure 480 - Core 0 (A) 2440 MHz (CH17) 6 dB Bandwidth

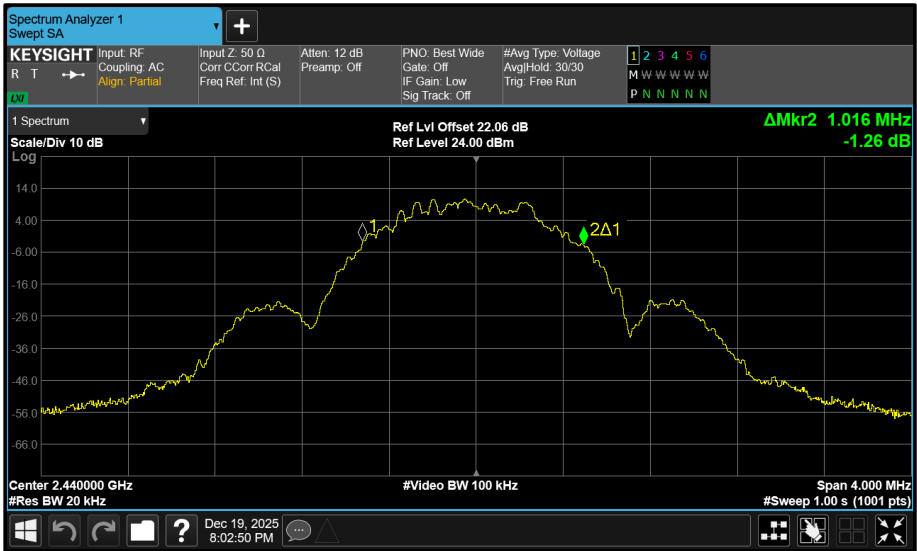


Figure 481 - Core 1 (B) 2440 MHz (CH17) 99% Bandwidth

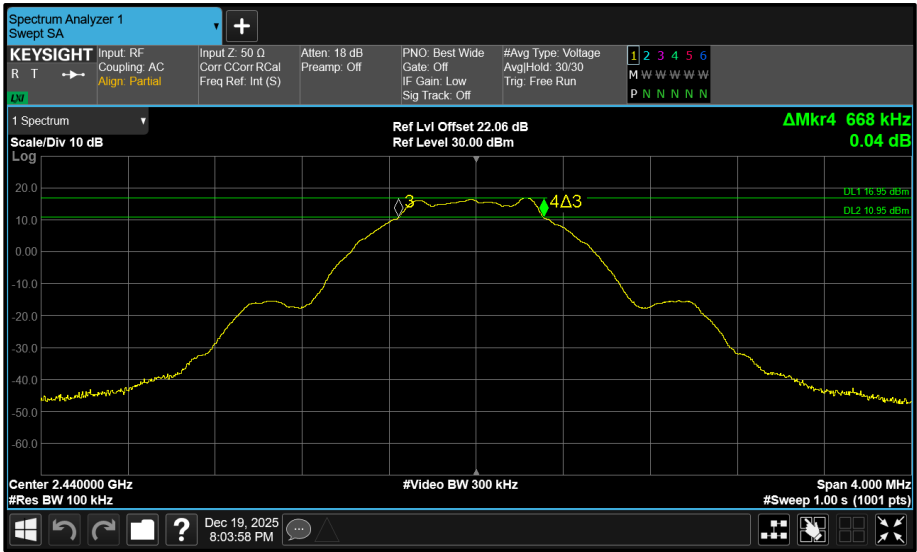


Figure 482 - Core 1 (B) 2440 MHz (CH17) 6 dB Bandwidth

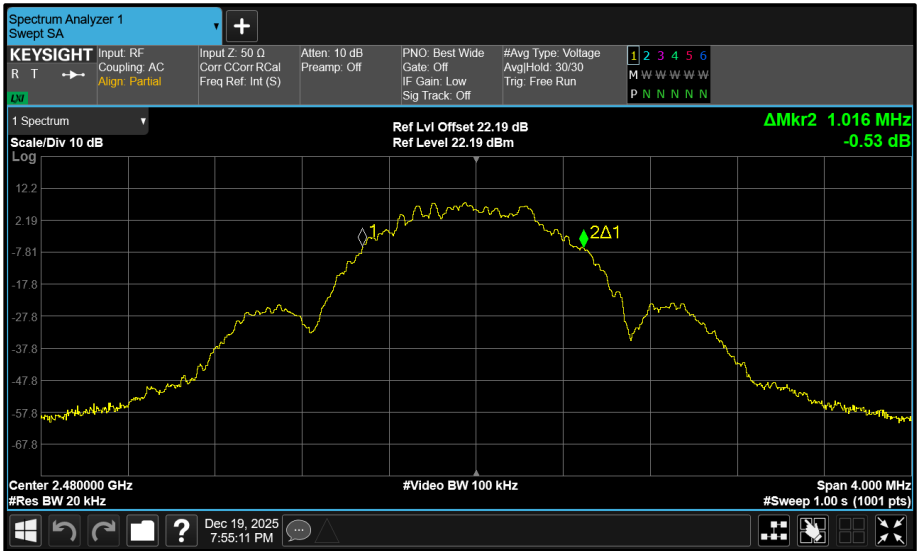


Figure 483 - Core 0 (A) 2480 MHz (CH39) 99% Bandwidth

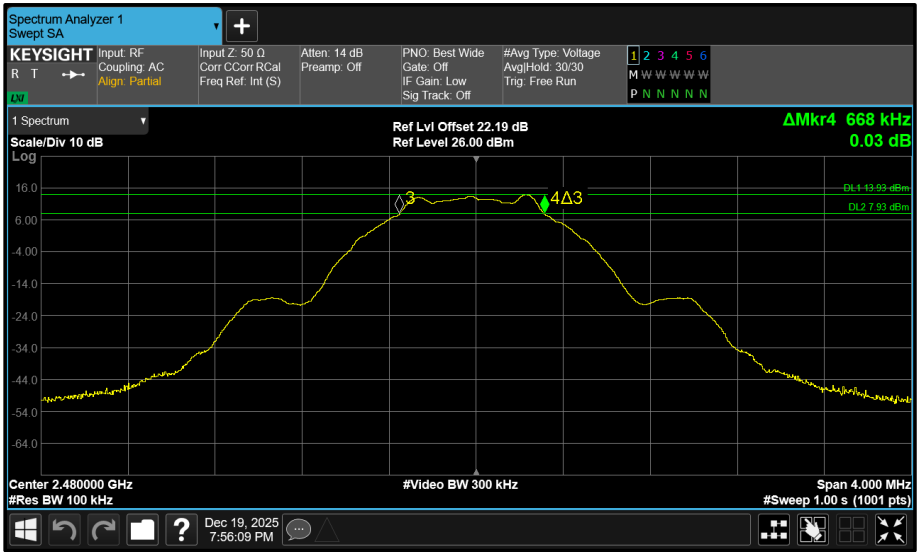


Figure 484 - Core 0 (A) 2480 MHz (CH39) 6 dB Bandwidth

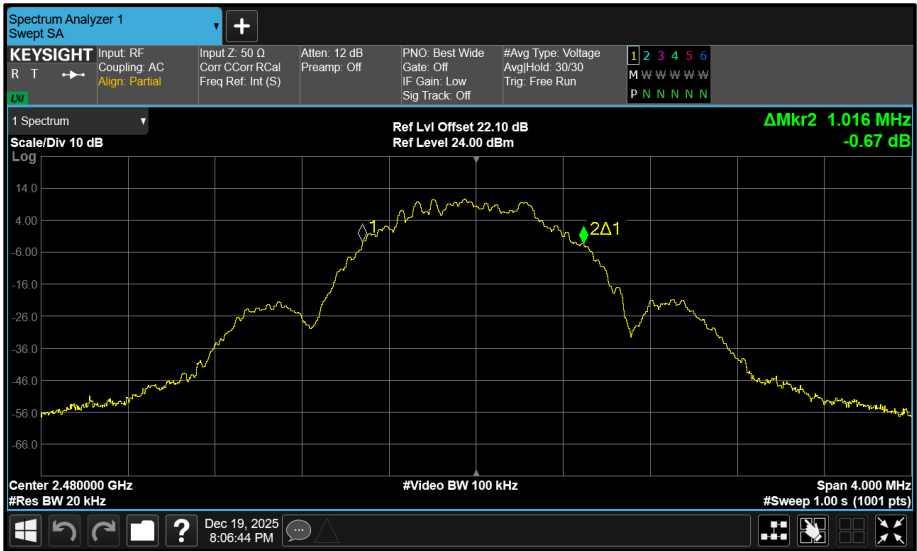


Figure 485 - Core 1 (B) 2480 MHz (CH39) 99% Bandwidth

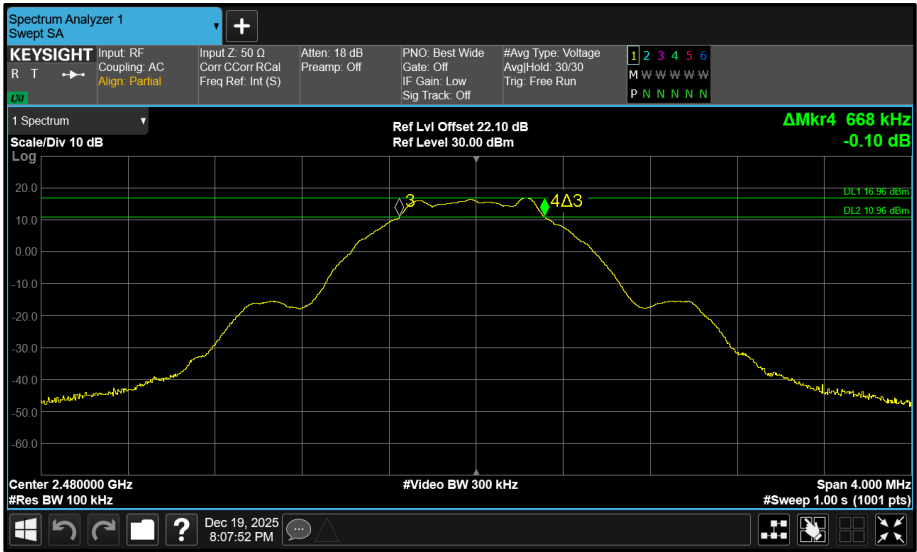


Figure 486 - Core 1 (B) 2480 MHz (CH39) 6 dB Bandwidth



FCC 47 CFR Part 15, Limit Clause 15.247(a)(2) and ISSED RSS-247, Clause 6.3.1

The minimum 6 dB Bandwidth shall be at least 500 kHz.

2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
500VA AC Power Supply	iTech	IT7324	5907	-	O/P Mon
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5921	12	29-Nov-2026
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5922	12	29-Nov-2026
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5923	12	29-Nov-2026
Modular Power System Mainframe	Keysight Technologies	N6701C	5969	-	O/P Mon
DC Power Module 60V 20A 300W	Keysight Technologies	N6754A	5970	-	O/P Mon
Humidity & Temperature meter	R.S Components	1364	6148	12	28-Aug-2026
MXA Signal Analyser	Keysight Technologies	N9020B	6417	24	14-Oct-2027
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6519	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6520	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6521	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6522	12	29-Nov-2026
Multimeter	Fluke	115	7115	12	13-Aug-2026

Table 88

O/P Mon - Output Monitored using calibrated equipment



2.3 Maximum Conducted Output Power

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)
ISED RSS-247, Clause 6.3.2
ISED RSS-GEN, Clause 6.12

2.3.2 Equipment Under Test and Modification State

A3428, S/N: G9F4Y6NJ31 - Modification State 0

2.3.3 Date of Test

19-December-2025 to 08-January-2026

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10 clause 11.9.1.2 Method PKPM1.

MIMO output port summing was performed in accordance with KDB 662911 D01. For the CDD results, the Directional Gain was calculated in accordance with clause F)2)f)(ii) using the calculations from F)2)f)(i) with worst-case individual gain and an array gain of zero.

2.3.5 Environmental Conditions

Ambient Temperature	24.5 - 25.2 °C
Relative Humidity	42.4 - 53.1 %



2.3.6 Test Results

2.4 GHz Bluetooth DTS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	5.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	9.00	-	-	-	9.00	30.00	-21.00
2441	8.98	-	-	-	8.98	30.00	-21.02
2480	8.84	-	-	-	8.84	30.00	-21.16

Table 89 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	9.00	-	-	-	9.00	30.00	-21.00	14.80	36.00	-21.20
2441	8.98	-	-	-	8.98	30.00	-21.02	14.78	36.00	-21.22
2480	8.84	-	-	-	8.84	30.00	-21.16	14.64	36.00	-21.36

Table 90 - ISED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	77.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	5.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	8.83	-	-	-	8.83	30.00	-21.17
2441	9.04	-	-	-	9.04	30.00	-20.96
2476	8.95	-	-	-	8.95	30.00	-21.05

Table 91 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	8.83	-	-	-	8.83	30.00	-21.17	14.63	36.00	-21.37
2441	9.04	-	-	-	9.04	30.00	-20.96	14.84	36.00	-21.16
2476	8.95	-	-	-	8.95	30.00	-21.05	14.75	36.00	-21.25

Table 92 - ISSED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	84.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	5.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	6.51	-	-	-	6.51	30.00	-23.49
2440	6.33	-	-	-	6.33	30.00	-23.67
2480	6.43	-	-	-	6.43	30.00	-23.57

Table 93 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	6.51	-	-	-	6.51	30.00	-23.49	12.31	36.00	-23.69
2440	6.33	-	-	-	6.33	30.00	-23.67	12.13	36.00	-23.87
2480	6.43	-	-	-	6.43	30.00	-23.57	12.23	36.00	-23.77

Table 94 - ISSED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8PSK (HDT4)	Duty Cycle (%):	93.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	5.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	9.36	-	-	-	9.36	30.00	-20.64
2441	9.40	-	-	-	9.40	30.00	-20.60
2478	9.45	-	-	-	9.45	30.00	-20.55

Table 95 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	9.36	-	-	-	9.36	30.00	-20.64	15.16	36.00	-20.84
2441	9.40	-	-	-	9.40	30.00	-20.60	15.20	36.00	-20.80
2478	9.45	-	-	-	9.45	30.00	-20.55	15.25	36.00	-20.75

Table 96 - ISSED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 16QAM (HDRPM12)	Duty Cycle (%):	93.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	5.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	8.20	-	-	-	8.20	30.00	-21.80
2441	8.32	-	-	-	8.32	30.00	-21.68
2475	8.78	-	-	-	8.78	30.00	-21.22

Table 97 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	8.20	-	-	-	8.20	30.00	-21.80	14.00	36.00	-22.00
2441	8.32	-	-	-	8.32	30.00	-21.68	14.12	36.00	-21.88
2475	8.78	-	-	-	8.78	30.00	-21.22	14.58	36.00	-21.42

Table 98 - ISSED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	2.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	8.67	-	-	8.67	30.00	-21.33
2441	-	8.69	-	-	8.69	30.00	-21.31
2480	-	8.67	-	-	8.67	30.00	-21.33

Table 99 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	8.67	-	-	8.67	30.00	-21.33	10.87	36.00	-25.13
2441	-	8.69	-	-	8.69	30.00	-21.31	10.89	36.00	-25.11
2480	-	8.67	-	-	8.67	30.00	-21.33	10.87	36.00	-25.13

Table 100 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	77.9
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	2.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	8.55	-	-	8.55	30.00	-21.45
2441	-	8.57	-	-	8.57	30.00	-21.43
2476	-	8.80	-	-	8.80	30.00	-21.20

Table 101 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	8.55	-	-	8.55	30.00	-21.45	10.75	36.00	-25.25
2441	-	8.57	-	-	8.57	30.00	-21.43	10.77	36.00	-25.23
2476	-	8.80	-	-	8.80	30.00	-21.20	11.00	36.00	-25.00

Table 102 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	84.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	2.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	6.36	-	-	6.36	30.00	-23.64
2440	-	6.47	-	-	6.47	30.00	-23.53
2480	-	6.40	-	-	6.40	30.00	-23.60

Table 103 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	6.36	-	-	6.36	30.00	-23.64	8.56	36.00	-27.44
2440	-	6.47	-	-	6.47	30.00	-23.53	8.67	36.00	-27.33
2480	-	6.40	-	-	6.40	30.00	-23.60	8.60	36.00	-27.40

Table 104 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8PSK (HDT4)	Duty Cycle (%):	93.3
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	2.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	9.04	-	-	9.04	30.00	-20.96
2441	-	9.06	-	-	9.06	30.00	-20.94
2478	-	9.21	-	-	9.21	30.00	-20.79

Table 105 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	9.04	-	-	9.04	30.00	-20.96	11.24	36.00	-24.76
2441	-	9.06	-	-	9.06	30.00	-20.94	11.26	36.00	-24.74
2478	-	9.21	-	-	9.21	30.00	-20.79	11.41	36.00	-24.59

Table 106 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 16QAM (HDRPM12)	Duty Cycle (%):	93.3
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	2.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	8.24	-	-	8.24	30.00	-21.76
2441	-	8.18	-	-	8.18	30.00	-21.82
2475	-	8.22	-	-	8.22	30.00	-21.78

Table 107 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	8.24	-	-	8.24	30.00	-21.76	10.44	36.00	-25.56
2441	-	8.18	-	-	8.18	30.00	-21.82	10.38	36.00	-25.62
2475	-	8.22	-	-	8.22	30.00	-21.78	10.42	36.00	-25.58

Table 108 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	5.00

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	12.30	-	12.30	30.00	-17.70
2441	-	-	12.88	-	12.88	30.00	-17.12
2480	-	-	12.89	-	12.89	30.00	-17.11

Table 109 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	-	12.30	-	12.30	30.00	-17.70	17.30	36.00	-18.70
2441	-	-	12.88	-	12.88	30.00	-17.12	17.88	36.00	-18.12
2480	-	-	12.89	-	12.89	30.00	-17.11	17.89	36.00	-18.11

Table 110 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.0
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	5.00

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	-	12.25	-	12.25	30.00	-17.75
2441	-	-	12.75	-	12.75	30.00	-17.25
2476	-	-	12.58	-	12.58	30.00	-17.42

Table 111 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	-	12.25	-	12.25	30.00	-17.75	17.25	36.00	-18.75
2441	-	-	12.75	-	12.75	30.00	-17.25	17.75	36.00	-18.25
2476	-	-	12.58	-	12.58	30.00	-17.42	17.58	36.00	-18.42

Table 112 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	84.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	5.00

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	-	6.25	-	6.25	30.00	-23.75
2440	-	-	6.30	-	6.30	30.00	-23.70
2480	-	-	6.28	-	6.28	30.00	-23.72

Table 113 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	-	6.25	-	6.25	30.00	-23.75	11.25	36.00	-24.75
2440	-	-	6.30	-	6.30	30.00	-23.70	11.30	36.00	-24.70
2480	-	-	6.28	-	6.28	30.00	-23.72	11.28	36.00	-24.72

Table 114 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 8PSK (HDT4)	Duty Cycle (%):	93.8
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	5.00

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	-	12.65	-	12.65	30.00	-17.35
2441	-	-	13.25	-	13.25	30.00	-16.75
2478	-	-	13.21	-	13.21	30.00	-16.79

Table 115 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	-	12.65	-	12.65	30.00	-17.35	17.65	36.00	-18.35
2441	-	-	13.25	-	13.25	30.00	-16.75	18.25	36.00	-17.75
2478	-	-	13.21	-	13.21	30.00	-16.79	18.21	36.00	-17.79

Table 116 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA 16QAM (HDRPM12)	Duty Cycle (%):	93.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	5.00

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	-	12.00	-	12.00	30.00	-18.00
2441	-	-	12.13	-	12.13	30.00	-17.87
2475	-	-	12.58	-	12.58	30.00	-17.42

Table 117 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	-	12.00	-	12.00	30.00	-18.00	17.00	36.00	-19.00
2441	-	-	12.13	-	12.13	30.00	-17.87	17.13	36.00	-18.87
2475	-	-	12.58	-	12.58	30.00	-17.42	17.58	36.00	-18.42

Table 118 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	5.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	18.98	-	-	-	18.98	30.00	-11.02
2441	19.23	-	-	-	19.23	30.00	-10.77
2480	19.27	-	-	-	19.27	30.00	-10.73

Table 119 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	18.98	-	-	-	18.98	30.00	-11.02	24.78	36.00	-11.22
2441	19.23	-	-	-	19.23	30.00	-10.77	25.03	36.00	-10.97
2480	19.27	-	-	-	19.27	30.00	-10.73	25.07	36.00	-10.93

Table 120 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.0
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	5.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	15.95	-	-	-	15.95	30.00	-14.05
2441	16.11	-	-	-	16.11	30.00	-13.89
2476	16.16	-	-	-	16.16	30.00	-13.84

Table 121 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	15.95	-	-	-	15.95	30.00	-14.05	21.75	36.00	-14.25
2441	16.11	-	-	-	16.11	30.00	-13.89	21.91	36.00	-14.09
2476	16.16	-	-	-	16.16	30.00	-13.84	21.96	36.00	-14.04

Table 122 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (LE 1M)	Duty Cycle (%):	84.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	5.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	14.27	-	-	-	14.27	30.00	-15.73
2440	14.34	-	-	-	14.34	30.00	-15.66
2480	14.38	-	-	-	14.38	30.00	-15.62

Table 123 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	14.27	-	-	-	14.27	30.00	-15.73	20.07	36.00	-15.93
2440	14.34	-	-	-	14.34	30.00	-15.66	20.14	36.00	-15.86
2480	14.38	-	-	-	14.38	30.00	-15.62	20.18	36.00	-15.82

Table 124 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8PSK (HDT4)	Duty Cycle (%):	93.4
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	5.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	16.54	-	-	-	16.54	30.00	-13.46
2441	16.61	-	-	-	16.61	30.00	-13.39
2478	16.70	-	-	-	16.70	30.00	-13.30

Table 125 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	16.54	-	-	-	16.54	30.00	-13.46	22.34	36.00	-13.66
2441	16.61	-	-	-	16.61	30.00	-13.39	22.41	36.00	-13.59
2478	16.70	-	-	-	16.70	30.00	-13.30	22.50	36.00	-13.50

Table 126 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 16QAM (HDRPM12)	Duty Cycle (%):	93.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	5.80

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	16.98	-	-	-	16.98	30.00	-13.02
2441	16.89	-	-	-	16.89	30.00	-13.11
2475	16.55	-	-	-	16.55	30.00	-13.45

Table 127 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	16.98	-	-	-	16.98	30.00	-13.02	22.78	36.00	-13.22
2441	16.89	-	-	-	16.89	30.00	-13.11	22.69	36.00	-13.31
2475	16.55	-	-	-	16.55	30.00	-13.45	22.35	36.00	-13.65

Table 128 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	2.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	19.36	-	-	19.36	30.00	-10.64
2441	-	19.22	-	-	19.22	30.00	-10.78
2480	-	19.12	-	-	19.12	30.00	-10.88

Table 129 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	19.36	-	-	19.36	30.00	-10.64	21.56	36.00	-14.44
2441	-	19.22	-	-	19.22	30.00	-10.78	21.42	36.00	-14.58
2480	-	19.12	-	-	19.12	30.00	-10.88	21.32	36.00	-14.68

Table 130 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.0
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	2.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	16.20	-	-	16.20	30.00	-13.80
2441	-	16.06	-	-	16.06	30.00	-13.94
2476	-	16.16	-	-	16.16	30.00	-13.84

Table 131 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	16.20	-	-	16.20	30.00	-13.80	18.40	36.00	-17.60
2441	-	16.06	-	-	16.06	30.00	-13.94	18.26	36.00	-17.74
2476	-	16.16	-	-	16.16	30.00	-13.84	18.36	36.00	-17.64

Table 132 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (LE 1M)	Duty Cycle (%):	84.7
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	2.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	-	18.03	-	-	18.03	30.00	-11.97
2440	-	17.92	-	-	17.92	30.00	-12.08
2480	-	17.83	-	-	17.83	30.00	-12.17

Table 133 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	-	18.03	-	-	18.03	30.00	-11.97	20.23	36.00	-15.77
2440	-	17.92	-	-	17.92	30.00	-12.08	20.12	36.00	-15.88
2480	-	17.83	-	-	17.83	30.00	-12.17	20.03	36.00	-15.97

Table 134 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 8PSK (HDT4)	Duty Cycle (%):	93.4
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	2.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	16.65	-	-	16.65	30.00	-13.35
2441	-	16.58	-	-	16.58	30.00	-13.42
2478	-	16.68	-	-	16.68	30.00	-13.32

Table 135 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	16.65	-	-	16.65	30.00	-13.35	18.85	36.00	-17.15
2441	-	16.58	-	-	16.58	30.00	-13.42	18.78	36.00	-17.22
2478	-	16.68	-	-	16.68	30.00	-13.32	18.88	36.00	-17.12

Table 136 - ISSED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA 16QAM (HDRPM12)	Duty Cycle (%):	93.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	2.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	-	16.87	-	-	16.87	30.00	-13.13
2441	-	17.09	-	-	17.09	30.00	-12.91
2475	-	16.80	-	-	16.80	30.00	-13.20

Table 137 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	-	16.87	-	-	16.87	30.00	-13.13	19.07	36.00	-16.93
2441	-	17.09	-	-	17.09	30.00	-12.91	19.29	36.00	-16.71
2475	-	16.80	-	-	16.80	30.00	-13.20	19.00	36.00	-17.00

Table 138 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.6
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	9.14	8.73	-	-	11.95	28.80	-16.85
2441	8.35	8.76	-	-	11.57	28.80	-17.23
2480	8.90	8.70	-	-	11.81	28.80	-16.99

Table 139 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	9.14	8.73	-	-	11.95	30.00	-18.05	19.15	36.00	-16.85
2441	8.35	8.76	-	-	11.57	30.00	-18.43	18.77	36.00	-17.23
2480	8.90	8.70	-	-	11.81	30.00	-18.19	19.01	36.00	-16.99

Table 140 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	77.9
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	8.90	8.65	-	-	11.79	28.80	-17.02
2441	9.09	8.66	-	-	11.89	28.80	-16.91
2476	8.88	8.07	-	-	11.50	28.80	-17.30

Table 141 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	8.90	8.65	-	-	11.79	30.00	-18.21	18.98	36.00	-17.02
2441	9.09	8.66	-	-	11.89	30.00	-18.11	19.09	36.00	-16.91
2476	8.88	8.07	-	-	11.50	30.00	-18.50	18.70	36.00	-17.30

Table 142 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	84.7
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	6.54	6.47	-	-	9.51	28.80	-19.29
2440	6.35	6.08	-	-	9.23	28.80	-19.58
2480	6.33	6.40	-	-	9.38	28.80	-19.42

Table 143 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	6.54	6.47	-	-	9.51	30.00	-20.49	16.71	36.00	-19.29
2440	6.35	6.08	-	-	9.23	30.00	-20.77	16.42	36.00	-19.58
2480	6.33	6.40	-	-	9.38	30.00	-20.62	16.58	36.00	-19.42

Table 144 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA 8PSK (HDT4)	Duty Cycle (%):	92.9
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	9.35	9.07	-	-	12.22	28.80	-16.58
2441	9.45	8.94	-	-	12.21	28.80	-16.59
2478	9.46	9.26	-	-	12.37	28.80	-16.43

Table 145 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	9.35	9.07	-	-	12.22	30.00	-17.78	19.42	36.00	-16.58
2441	9.45	8.94	-	-	12.21	30.00	-17.79	19.41	36.00	-16.59
2478	9.46	9.26	-	-	12.37	30.00	-17.63	19.57	36.00	-16.43

Table 146 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	iPA 16QAM (HDRPM12)	Duty Cycle (%):	93.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	8.04	8.05	-	-	11.05	28.80	-17.75
2441	8.28	7.92	-	-	11.11	28.80	-17.69
2475	8.72	8.28	-	-	11.51	28.80	-17.29

Table 147 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	8.04	8.05	-	-	11.05	30.00	-18.95	18.25	36.00	-17.75
2441	8.28	7.92	-	-	11.11	30.00	-18.89	18.31	36.00	-17.69
2475	8.72	8.28	-	-	11.51	30.00	-18.49	18.71	36.00	-17.29

Table 148 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		
Note(s):	TxBF cores were tested independently whilst transmitting at the cores respective powers and summed after test		

DUT Configuration			
Mode:	ePA GFSK (LE 1M)	Duty Cycle (%):	84.6
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	14.18	18.05	-	-	19.54	28.80	-9.26
2440	14.35	17.93	-	-	19.51	28.80	-9.29
2480	14.66	17.86	-	-	19.56	28.80	-9.24

Table 149 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	14.18	18.05	-	-	19.54	30.00	-10.46	26.74	36.00	-9.26
2440	14.35	17.93	-	-	19.51	30.00	-10.49	26.71	36.00	-9.29
2480	14.19	17.83	-	-	19.39	30.00	-10.61	26.59	36.00	-9.41

Table 150 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (2-DH5)	Duty Cycle (%):	76.6
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2402	16.06	16.37	-	-	19.23	28.80	-9.58
2441	16.25	16.19	-	-	19.23	28.80	-9.57
2480	15.65	16.36	-	-	19.03	28.80	-9.77

Table 151 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2402	16.06	16.37	-	-	19.23	30.00	-10.77	26.42	36.00	-9.58
2441	16.25	16.19	-	-	19.23	30.00	-10.77	26.43	36.00	-9.57
2480	15.65	16.36	-	-	19.03	30.00	-10.97	26.23	36.00	-9.77

Table 152 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	77.9
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	16.01	16.20	-	-	19.12	28.80	-9.69
2441	16.15	16.16	-	-	19.16	28.80	-9.64
2476	16.13	16.22	-	-	19.19	28.80	-9.62

Table 153 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	16.01	16.20	-	-	19.12	30.00	-10.88	26.31	36.00	-9.69
2441	16.15	16.16	-	-	19.16	30.00	-10.84	26.36	36.00	-9.64
2476	16.13	16.22	-	-	19.19	30.00	-10.81	26.38	36.00	-9.62

Table 154 - ISSED Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA 8PSK (HDT4)	Duty Cycle (%):	93.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	16.54	16.74	-	-	19.65	28.80	-9.15
2441	16.57	16.64	-	-	19.61	28.80	-9.19
2478	16.69	16.40	-	-	19.56	28.80	-9.25

Table 155 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	16.54	16.74	-	-	19.65	30.00	-10.35	26.85	36.00	-9.15
2441	16.57	16.64	-	-	19.61	30.00	-10.39	26.81	36.00	-9.19
2478	16.69	16.40	-	-	19.56	30.00	-10.44	26.75	36.00	-9.25

Table 156 - ISD Maximum Conducted (peak) Output Power Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 6.3.2	Test Method(s):	C63.10 11.9.1.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	ePA 16QAM (HDRPM12)	Duty Cycle (%):	93.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0+Core 1)	Peak Antenna Gain (dBi):	7.20

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2404	16.45	16.59	-	-	19.53	28.80	-9.27
2441	16.85	16.86	-	-	19.87	28.80	-8.94
2475	16.55	16.28	-	-	19.43	28.80	-9.38

Table 157 - FCC Maximum Conducted (peak) Output Power Results

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2404	16.45	16.59	-	-	19.53	30.00	-10.47	26.73	36.00	-9.27
2441	16.85	16.86	-	-	19.87	30.00	-10.13	27.06	36.00	-8.94
2475	16.55	16.28	-	-	19.43	30.00	-10.57	26.62	36.00	-9.38

Table 158 - ISD Maximum Conducted (peak) Output Power Results



FCC 47 CFR Part 15, Limit Clause 15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

ISED RSS-247, Limit Clause 6.3.2

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 6.5 a) and b).

2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
1500VA AC Power Supply	iTech	IT7324	5907	-	O/P Mon
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5921	12	29-Nov-2026
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5922	12	29-Nov-2026
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5923	12	29-Nov-2026
Modular Power System Mainframe	Keysight Technologies	N6701C	5969	-	O/P Mon
DC Power Module 60V 20A 300W	Keysight Technologies	N6754A	5970	-	O/P Mon
Humidity & Temperature meter	R.S Components	1364	6148	12	28-Aug-2026
MXA Signal Analyzer	Keysight Technologies	N9020B	6416	24	07-May-2027
MXA Signal Analyser	Keysight Technologies	N9020B	6417	24	14-Oct-2027
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6518	12	23-Feb-2026
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6519	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6520	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6521	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6522	12	29-Nov-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6529	12	13-Mar-2026



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6530	12	23-Feb-2026
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6531	12	23-Feb-2026
USB Wideband Power Sensor	Boonton	RTP5008	6587	12	23-Feb-2026
USB Wideband Power Sensor	Boonton	RTP5008	6588	12	23-Feb-2026
USB Wideband Power Sensor	Boonton	RTP5008	6589	12	23-Feb-2026
AC Programmable Power Supply	iTech	IT7324	6662	-	O/P Mon
DC Power Module	Keysight Technologies	N6754A	6663	-	O/P Mon
Modular Power System Mainframe	Keysight Technologies	N6701C	6664	-	O/P Mon
Multimeter	Fluke	115	7115	12	13-Aug-2026

Table 159

O/P Mon - Output Monitored using calibrated equipment



2.4 Authorised Band Edges

2.4.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d)
ISED RSS-247, Clause 6.6

2.4.2 Equipment Under Test and Modification State

A3428, S/N: FF9MP4FP2G - Modification State 0
A3428, S/N: J6NX2X6RCP - Modification State 0
A3428, S/N: L61HW7H962 - Modification State 0

2.4.3 Date of Test

21-October-2025 to 17-January-2026

2.4.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

2.4.5 Environmental Conditions

Ambient Temperature	21.3 - 24.3 °C
Relative Humidity	31.5 - 54.1 %

2.4.6 Test Results

2.4 GHz Bluetooth DTS

iPA - Core 0 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	2DH5	2402	2400	-54.33
Static	3DH5	2402	2400	-51.73
Static	HDR4	2404	2400	-54.83
Static	HDR8	2404	2400	-48.40
Static	LE1M	2402	2400	-57.21
Static	LE2M	2404	2400	-58.43
Static	HDT3	2404	2400	-41.08
Static	HDT4	2404	2400	-37.20
Static	HDT6	2404	2400	-34.52
Static	HDRPS2	2404	2400	-57.65
Static	HDRPM12	2404	2400	-44.37
Static	XHDRPM8	2404	2400	-44.02

Table 160 - SISO Authorised Band Edge Results

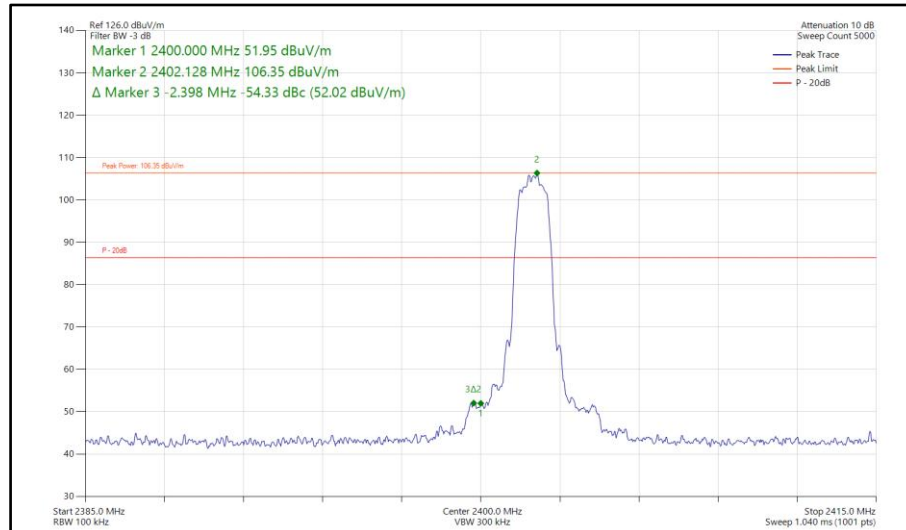


Figure 487 - Bluetooth 2DH5, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2400 MHz

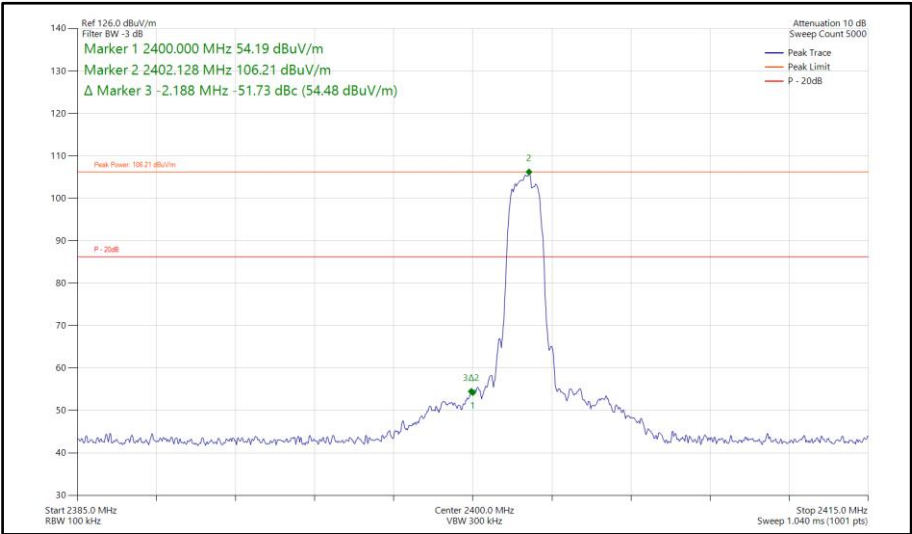


Figure 488 - Bluetooth 3DH5, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2400 MHz

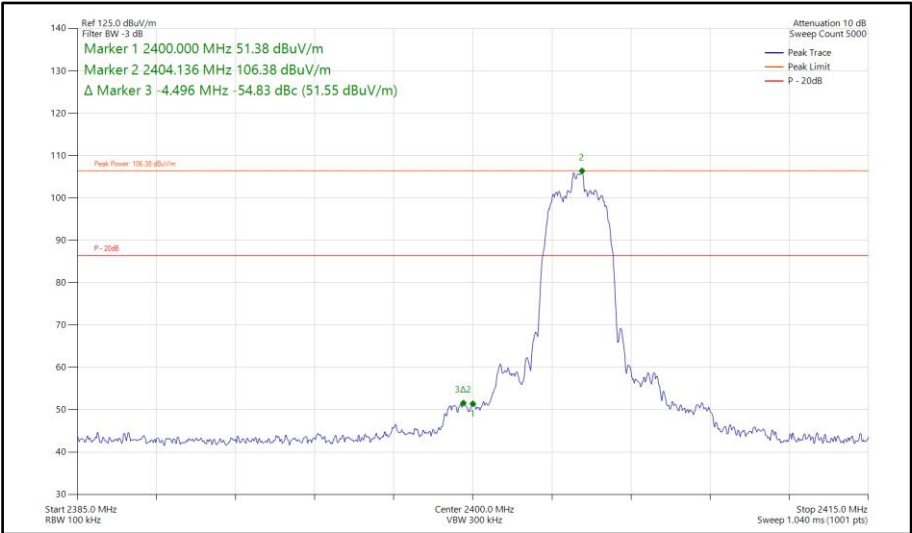


Figure 489 - Bluetooth HDR4, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

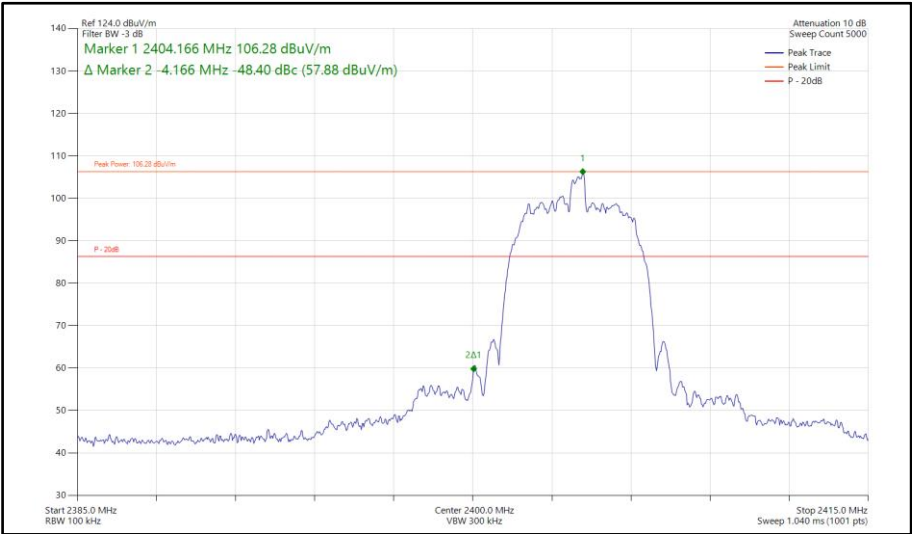


Figure 490 - Bluetooth HDR8, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

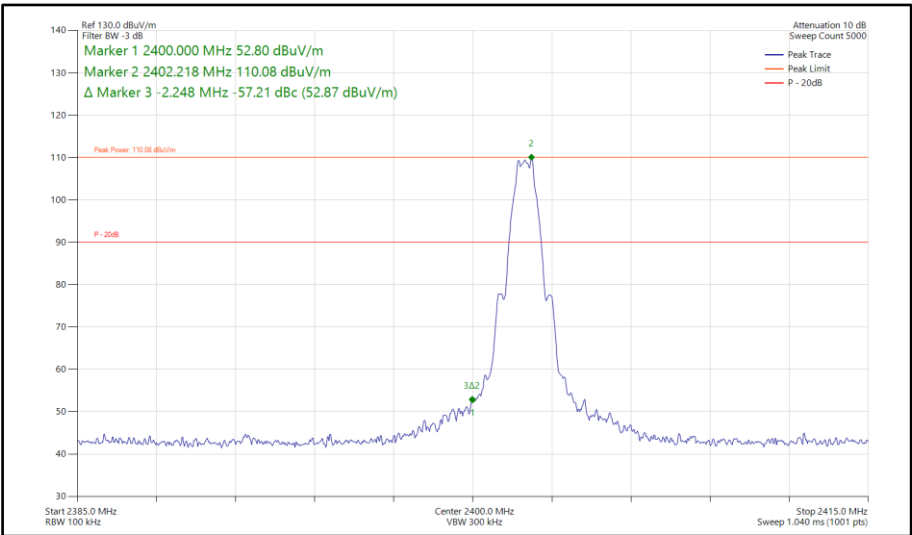


Figure 491 - Bluetooth LE1M, SISO, Core 0 - 2402 MHz
Band Edge Frequency 2400 MHz

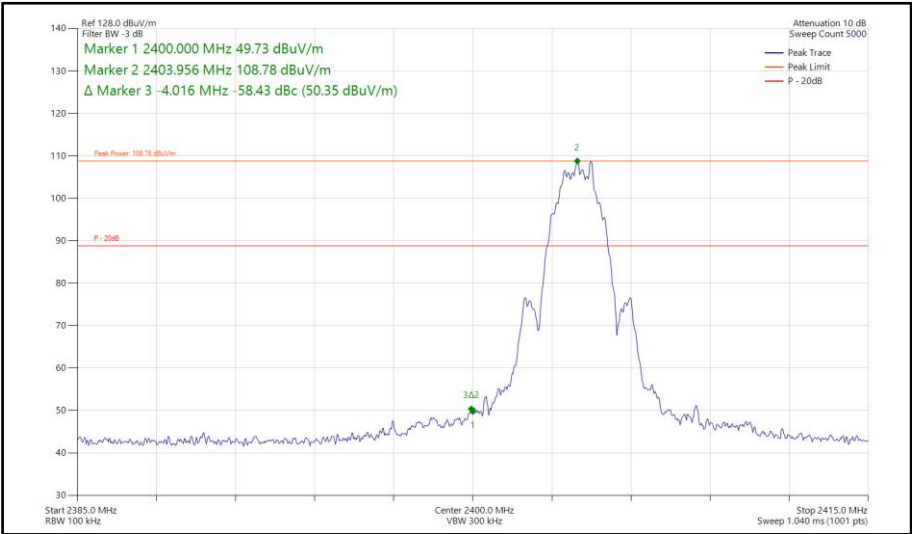


Figure 492 - Bluetooth LE2M, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

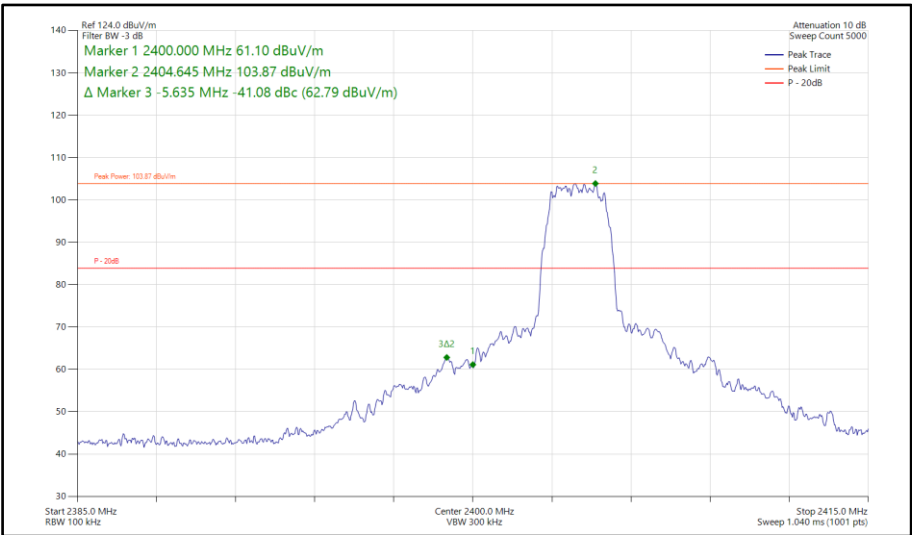


Figure 493 - Bluetooth HDT3, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

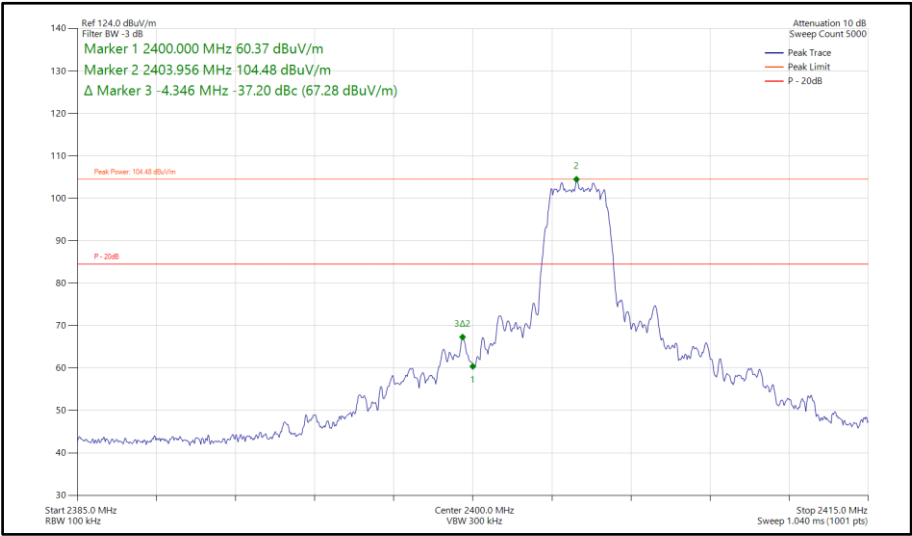


Figure 494 - Bluetooth HDT4, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

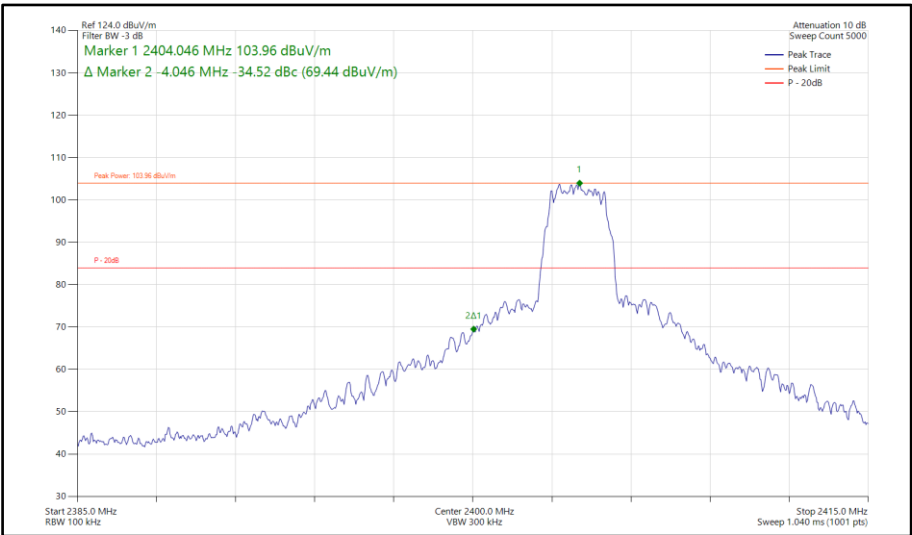


Figure 495 - Bluetooth HDT6, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz

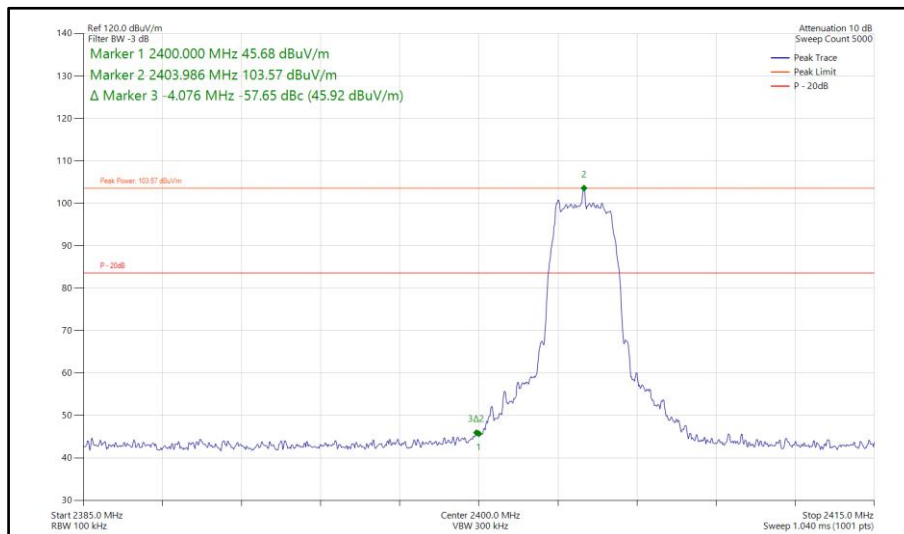


**Figure 496 - Bluetooth HDRPS2, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz**

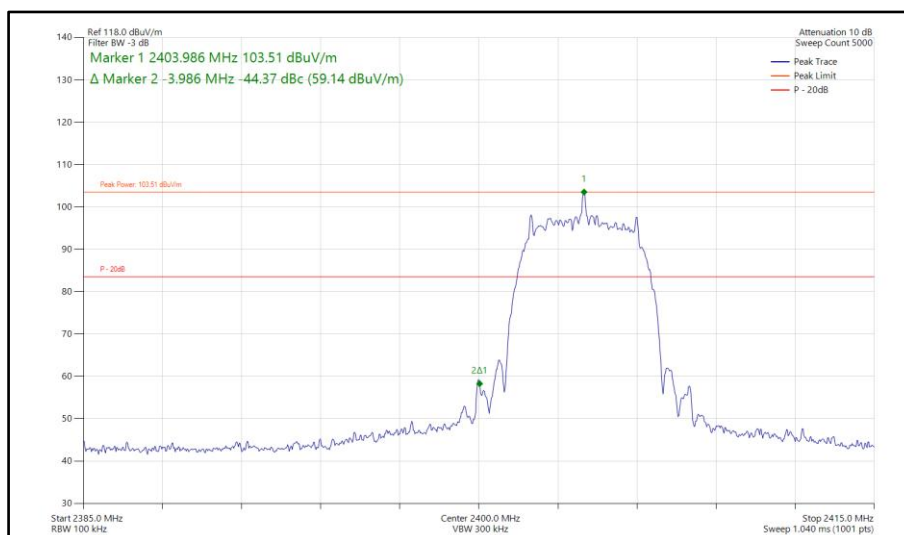


**Figure 497 - Bluetooth HDRPM12, SISO, Core 0 - 2404 MHz
Band Edge Frequency 2400 MHz**



iPA - Core 1 (SISO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
Static	2DH5	2402	2400	-57.44
Static	3DH5	2402	2400	-56.44
Static	HDR4	2404	2400	-60.36
Static	HDR8	2404	2400	-51.99
Static	LE1M	2402	2400	-59.97
Static	LE2M	2404	2400	-61.59
Static	HDT3	2404	2400	-43.60
Static	HDT4	2404	2400	-39.80
Static	HDT6	2404	2400	-34.52
Static	HDRPS2	2404	2400	-56.57
Static	HDRPM12	2404	2400	-45.71
Static	XHDRPM8	2404	2400	-45.76

Table 161 - SISO Authorised Band Edge Results

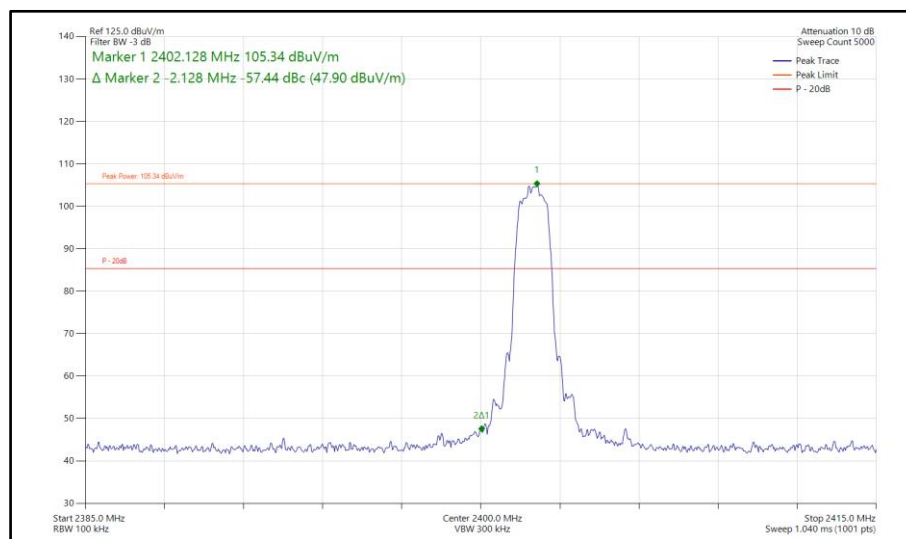


Figure 499 - Bluetooth 2DH5, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2400 MHz

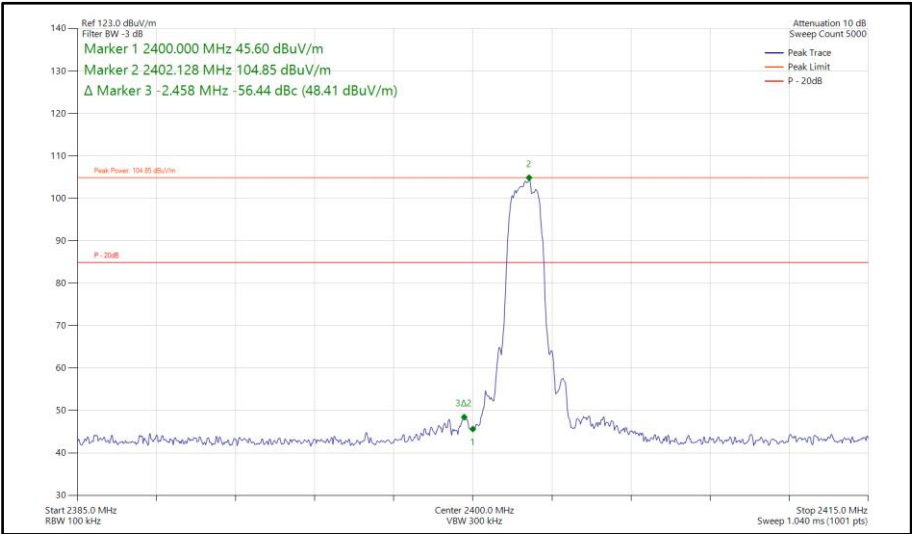


Figure 500 - Bluetooth 3DH5, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2400 MHz

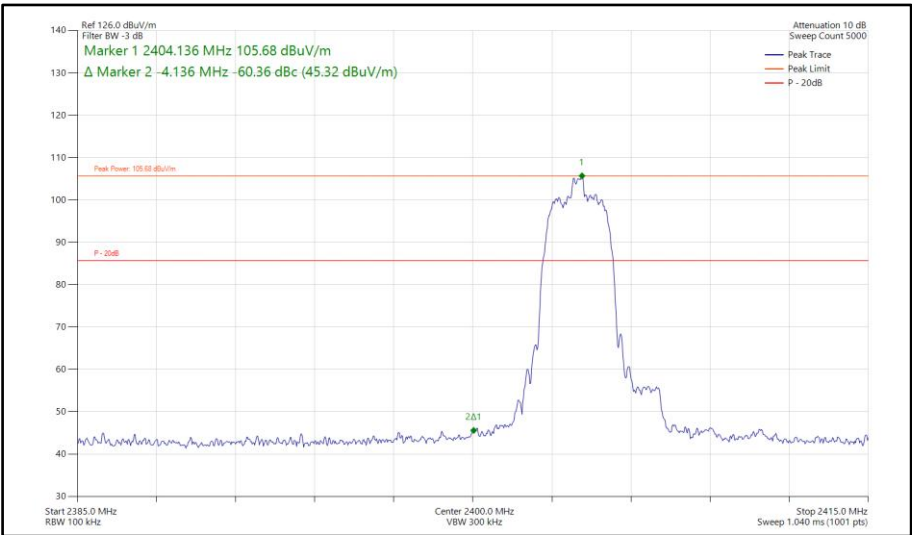


Figure 501 - Bluetooth HDR4, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

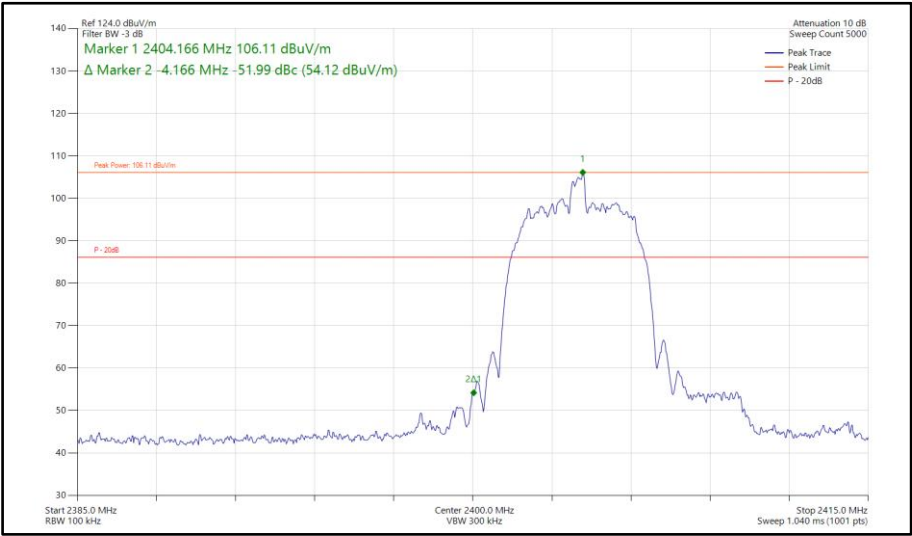


Figure 502 - Bluetooth HDR8, SISO, Core 1 - 2404 MHz
Band Edge Frequency 2400 MHz

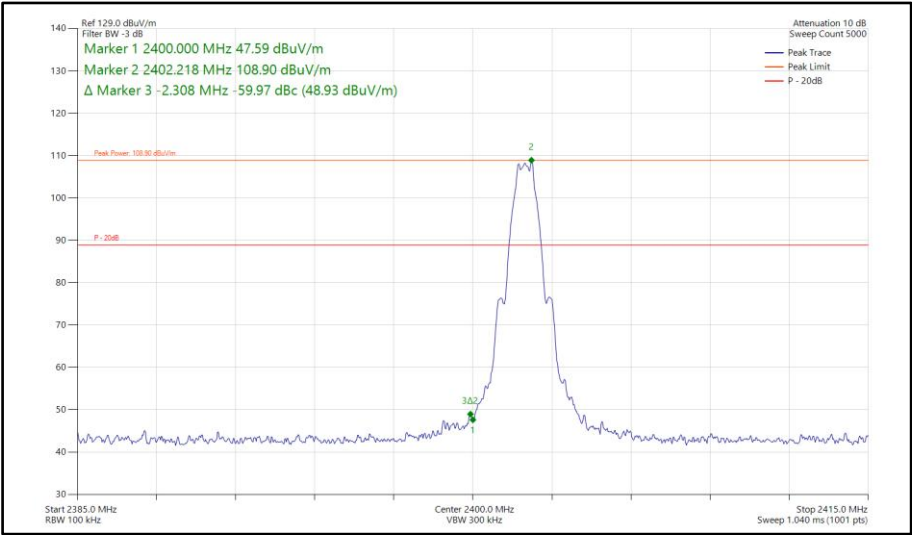


Figure 503 - Bluetooth LE1M, SISO, Core 1 - 2402 MHz
Band Edge Frequency 2400 MHz