

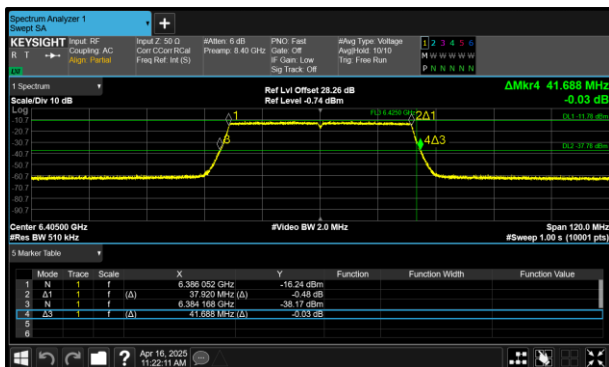


Figure 77 - 802.11ax HE40 SU VLP Minimum 26 dB EBW

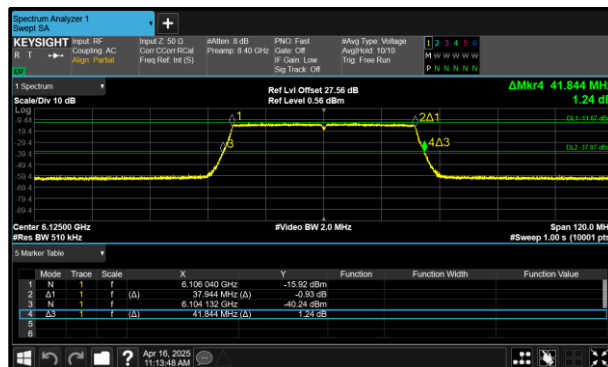


Figure 78 - 802.11ax HE40 SU VLP Maximum 26 dB EBW

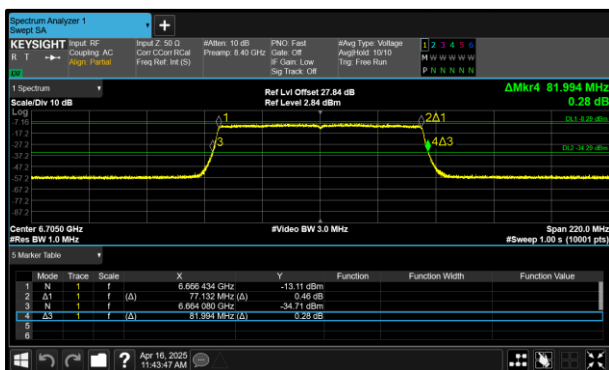


Figure 79 - 802.11ax HE80 SU VLP Minimum 26 dB EBW

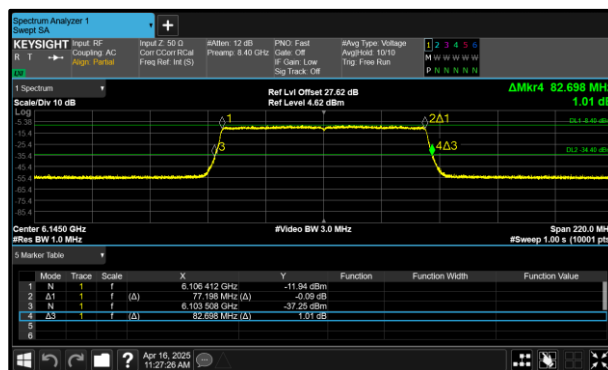


Figure 80 - 802.11ax HE80 SU VLP Maximum 26 dB EBW

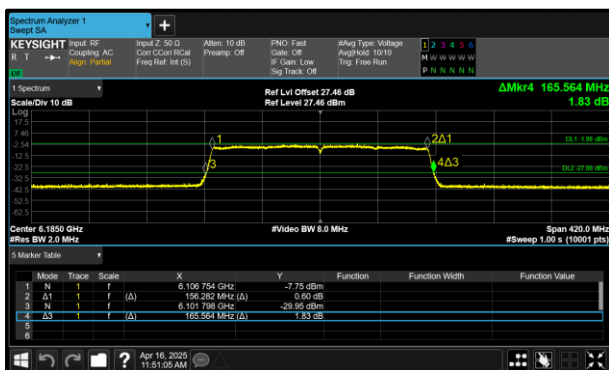


Figure 81 - 802.11ax HE160 SU VLP Minimum 26 dB EBW

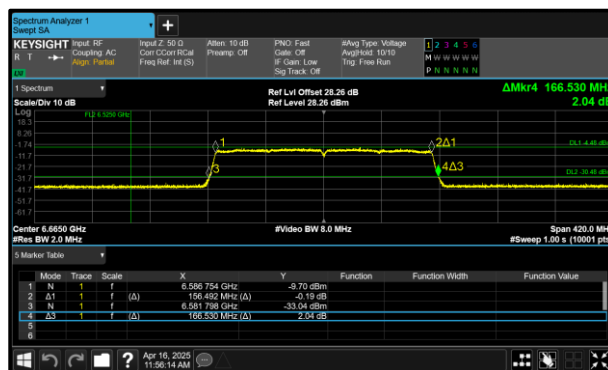


Figure 82 - 802.11ax HE160 SU VLP Maximum 26 dB EBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	18.984	19.008
802.11ax HE40 SU LPI	37.920	37.956
802.11ax HE80 SU LPI	77.132	77.264
802.11ax HE160 SU LPI	156.198	156.408
802.11ax HE20 SU SP	18.978	19.002
802.11ax HE40 SU SP	37.884	37.944
802.11ax HE80 SU SP	77.110	77.242
802.11ax HE160 SU SP	156.240	156.408
802.11ax HE40 SU VLP	37.896	37.944
802.11ax HE80 SU VLP	77.088	77.264
802.11ax HE160 SU VLP	156.282	156.492

Table 40 - 99% Bandwidth Summary Results - MIMO CDD

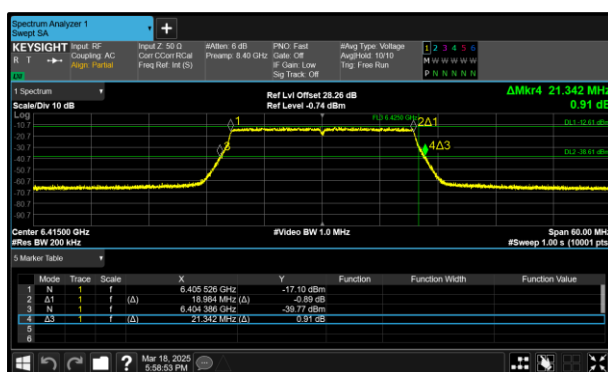


Figure 83 - 802.11ax HE20 SU LPI Minimum 99% OBW

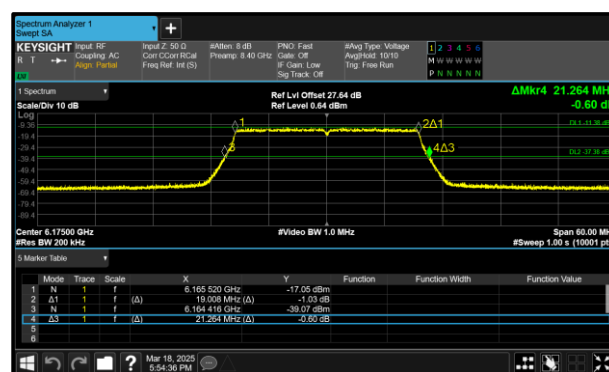


Figure 84 - 802.11ax HE20 SU LPI Maximum 99% OBW

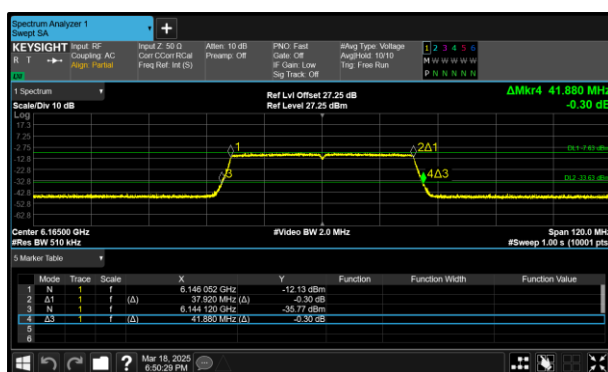


Figure 85 - 802.11ax HE40 SU LPI Minimum 99% OBW

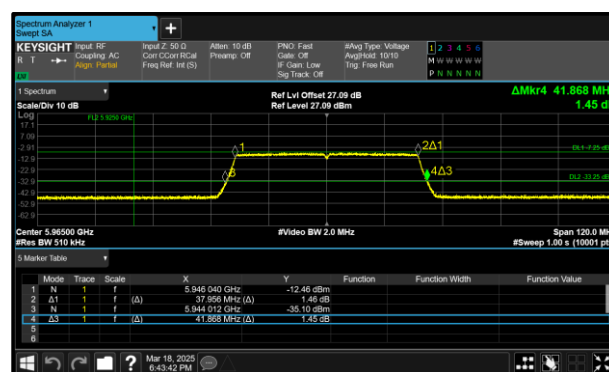


Figure 86 - 802.11ax HE40 SU LPI Maximum 99% OBW

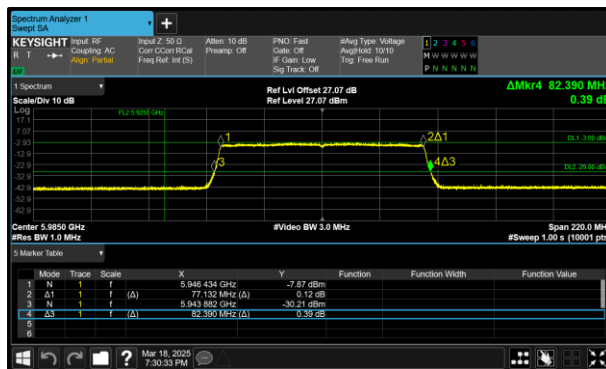


Figure 87 - 802.11ax HE80 SU LPI Minimum 99% OBW

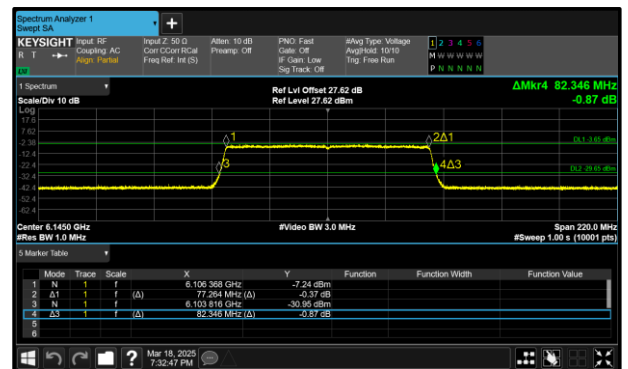


Figure 88 - 802.11ax HE80 SU LPI Maximum 99% OBW

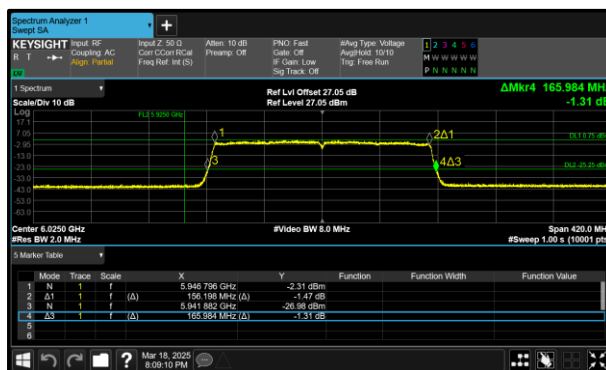


Figure 89 - 802.11ax HE160 SU LPI Minimum 99% OBW

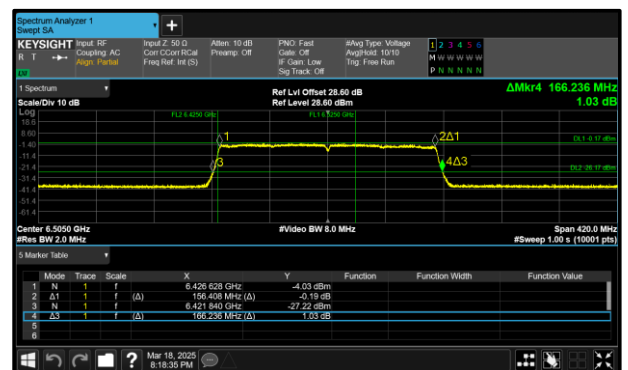


Figure 90 - 802.11ax HE160 SU LPI Maximum 99% OBW

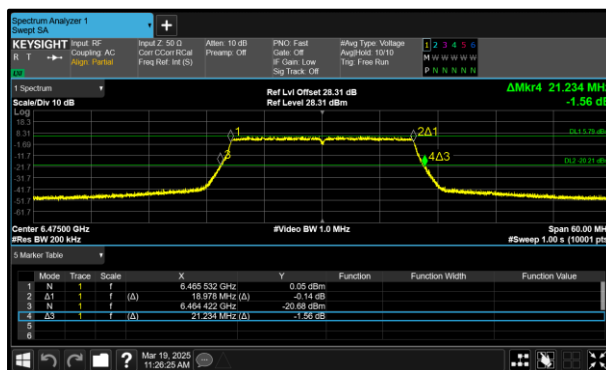


Figure 91 - 802.11ax HE20 SU SP Minimum 99% OBW

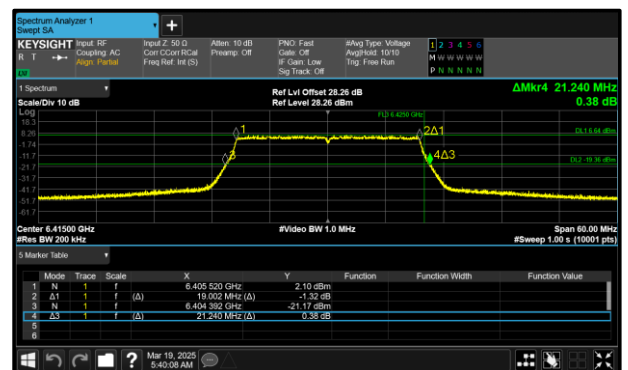


Figure 92 - 802.11ax HE20 SU SP Maximum 99% OBW

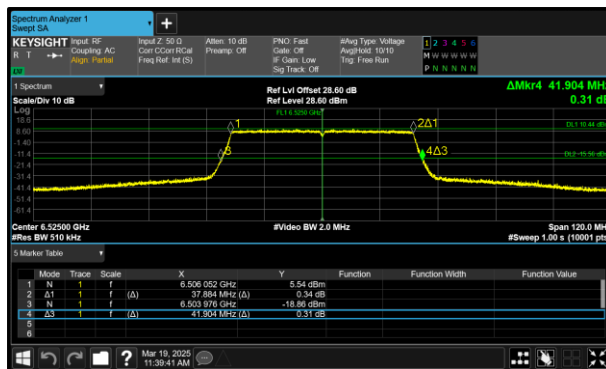


Figure 93 - 802.11ax HE40 SU SP Minimum 99% OBW

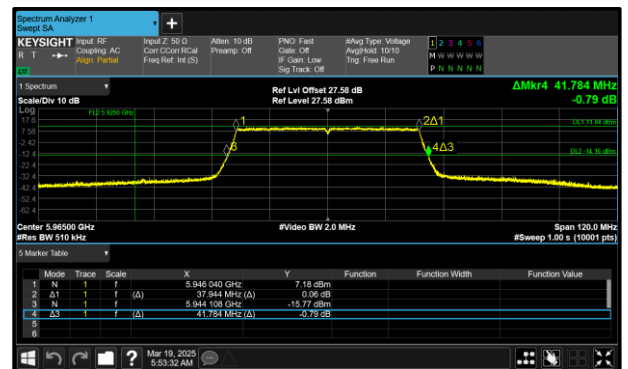


Figure 94 - 802.11ax HE40 SU SP Maximum 99% OBW

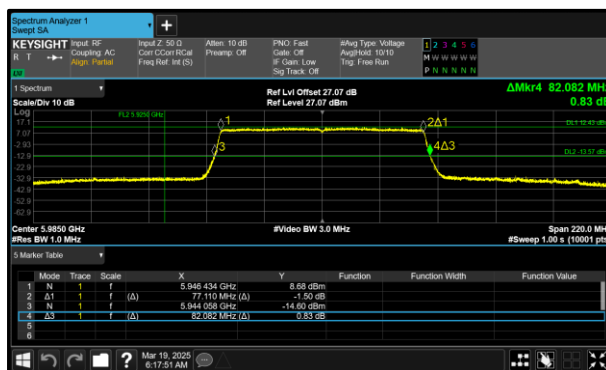


Figure 95 - 802.11ax HE80 SU SP Minimum 99% OBW

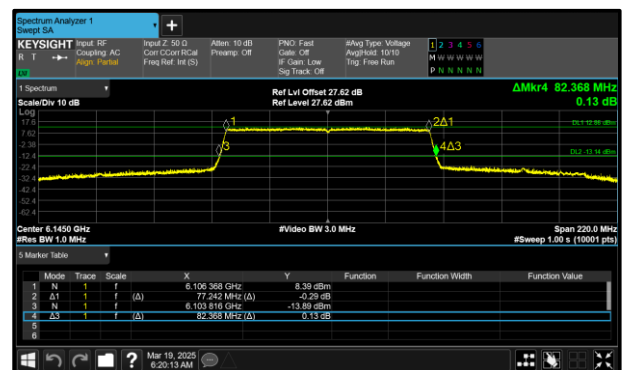


Figure 96 - 802.11ax HE80 SU SP Maximum 99% OBW

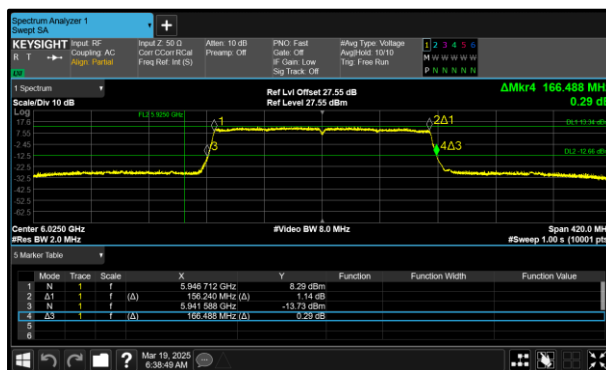


Figure 97 - 802.11ax HE160 SU SP Minimum 99% OBW

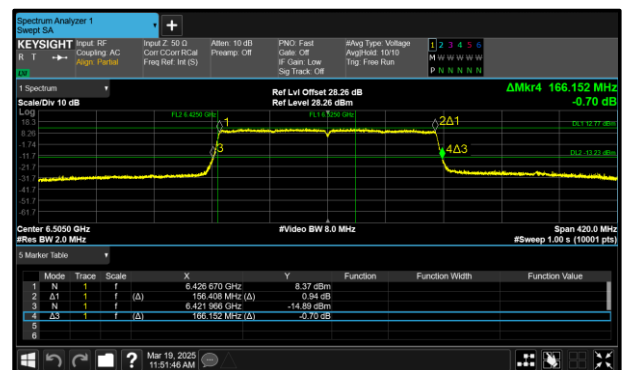


Figure 98 - 802.11ax HE160 SU SP Maximum 99% OBW

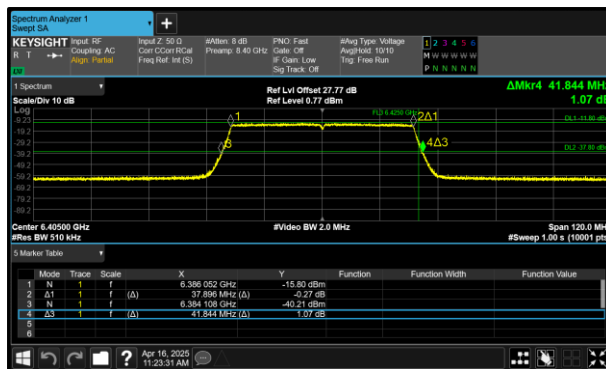


Figure 99 - 802.11ax HE40 SU VLP Minimum 99% OBW

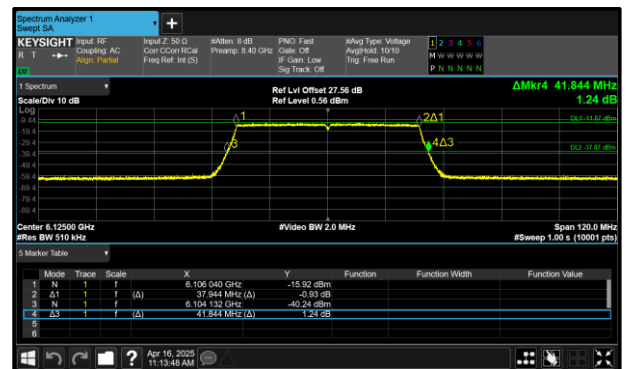


Figure 100 - 802.11ax HE40 SU VLP Maximum 99% OBW

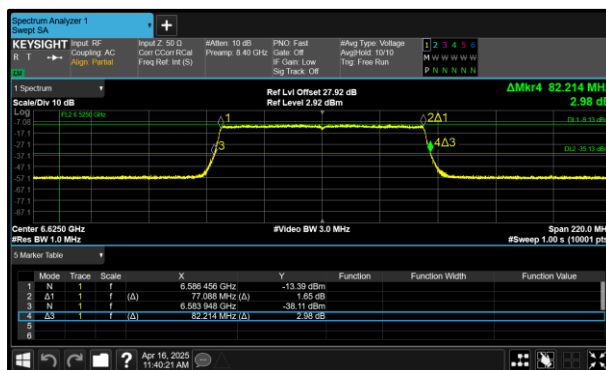


Figure 101 - 802.11ax HE80 SU VLP Minimum 99% OBW

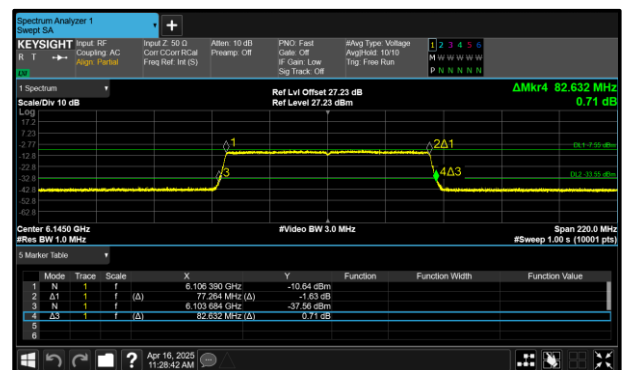


Figure 102 - 802.11ax HE80 SU VLP Maximum 99% OBW

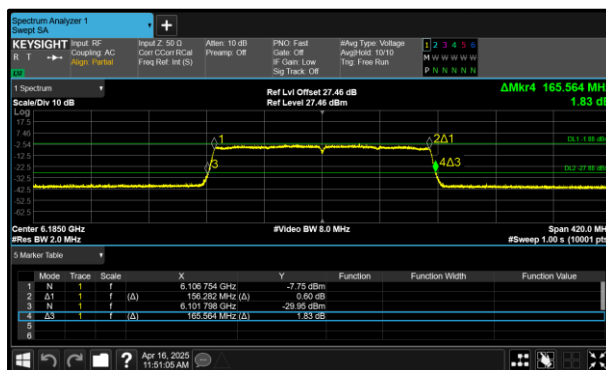


Figure 103 - 802.11ax HE160 SU VLP Minimum 99% OBW

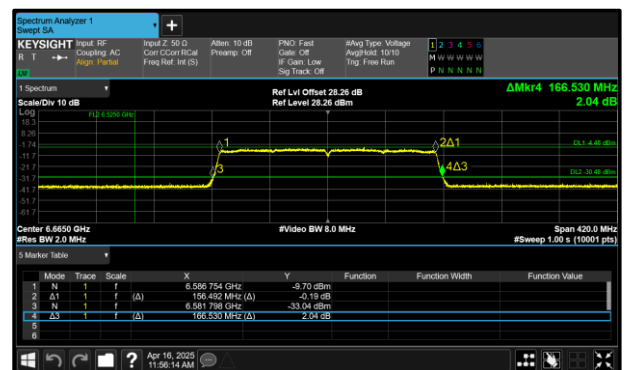


Figure 104 - 802.11ax HE160 SU VLP Maximum 99% OBW



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407 (a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	21.102	21.192	-	-	320.0
6175	21.264	21.180	-	-	320.0
6415	21.342	21.210	-	-	320.0
6435	21.222	21.234	-	-	320.0
6475	21.312	21.306	-	-	320.0
6515	21.186	21.294	-	-	320.0
6535	21.192	21.216	-	-	320.0
6695	21.186	21.210	-	-	320.0
6855	21.252	21.306	-	-	320.0
6875	21.234	21.252	-	-	320.0
6895	21.180	21.372	-	-	320.0
6995	21.228	21.156	-	-	320.0
7095	21.138	21.228	-	-	320.0

Table 41 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	18.984	18.996	-	-	320.0
6175	19.008	18.996	-	-	320.0
6415	18.984	18.996	-	-	320.0
6435	18.996	18.990	-	-	320.0
6475	18.996	18.996	-	-	320.0
6515	18.996	19.008	-	-	320.0
6535	18.990	18.996	-	-	320.0
6695	18.996	18.996	-	-	320.0
6855	18.990	18.996	-	-	320.0
6875	19.002	18.996	-	-	320.0
6895	18.996	18.990	-	-	320.0
6995	19.002	18.996	-	-	320.0
7095	18.990	18.996	-	-	320.0

Table 42 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407 (a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	41.784	41.868	-	-	320.0
6165	41.832	41.880	-	-	320.0
6405	42.024	42.060	-	-	320.0
6445	41.844	41.784	-	-	320.0
6485	41.664	41.868	-	-	320.0
6525	41.724	42.120	-	-	320.0
6565	41.808	41.712	-	-	320.0
6685	41.700	41.892	-	-	320.0
6845	41.796	42.012	-	-	320.0
6885	41.724	41.628	-	-	320.0
6925	41.700	41.904	-	-	320.0
7005	42.084	41.916	-	-	320.0
7085	41.928	41.784	-	-	320.0

Table 43 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	37.944	37.956	-	-	320.0
6165	37.932	37.920	-	-	320.0
6405	37.944	37.932	-	-	320.0
6445	37.944	37.920	-	-	320.0
6485	37.956	37.944	-	-	320.0
6525	37.920	37.956	-	-	320.0
6565	37.920	37.956	-	-	320.0
6685	37.932	37.920	-	-	320.0
6845	37.944	37.920	-	-	320.0
6885	37.932	37.932	-	-	320.0
6925	37.932	37.944	-	-	320.0
7005	37.944	37.956	-	-	320.0
7085	37.920	37.944	-	-	320.0

Table 44 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407 (a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	81.994	82.390	-	-	320.0
6145	82.346	82.544	-	-	320.0
6385	82.346	82.346	-	-	320.0
6465	82.258	82.280	-	-	320.0
6545	82.588	82.500	-	-	320.0
6625	82.346	82.588	-	-	320.0
6705	82.346	82.390	-	-	320.0
6785	82.148	82.126	-	-	320.0
6865	82.368	82.280	-	-	320.0
6945	82.148	82.148	-	-	320.0
7025	82.346	82.192	-	-	320.0

Table 45 - 26 dB Bandwidth Results



Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	77.220	77.132	-	-	320.0
6145	77.264	77.220	-	-	320.0
6385	77.176	77.154	-	-	320.0
6465	77.198	77.176	-	-	320.0
6545	77.242	77.176	-	-	320.0
6625	77.154	77.154	-	-	320.0
6705	77.176	77.154	-	-	320.0
6785	77.132	77.176	-	-	320.0
6865	77.176	77.176	-	-	320.0
6945	77.154	77.198	-	-	320.0
7025	77.198	77.242	-	-	320.0

Table 46 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407 (a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	166.278	165.984	-	-	320.0
6185	165.942	165.690	-	-	320.0
6345	166.278	165.984	-	-	320.0
6505	166.236	166.068	-	-	320.0
6665	166.488	166.320	-	-	320.0
6825	166.404	166.152	-	-	320.0
6985	165.984	165.900	-	-	320.0

Table 47 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	156.240	156.198	-	-	320.0
6185	156.366	156.240	-	-	320.0
6345	156.324	156.324	-	-	320.0
6505	156.408	156.408	-	-	320.0
6665	156.324	156.324	-	-	320.0
6825	156.408	156.408	-	-	320.0
6985	156.366	156.408	-	-	320.0

Table 48 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407 (a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	21.132	21.228	-	-	320.0
6175	21.276	21.342	-	-	320.0
6415	21.240	21.198	-	-	320.0
6435	21.228	21.156	-	-	320.0
6475	21.234	21.270	-	-	320.0
6515	21.264	21.360	-	-	320.0
6535	21.180	21.294	-	-	320.0
6695	21.174	21.150	-	-	320.0
6855	21.222	21.174	-	-	320.0

Table 49 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5955	18.990	18.990	-	-	320.0
6175	18.996	18.996	-	-	320.0
6415	19.002	19.002	-	-	320.0
6435	18.996	18.996	-	-	320.0
6475	18.978	18.990	-	-	320.0
6515	19.002	18.996	-	-	320.0
6535	18.996	19.002	-	-	320.0
6695	18.996	19.002	-	-	320.0
6855	19.002	19.002	-	-	320.0

Table 50 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407 (a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	41.784	41.604	-	-	320.0
6165	41.772	41.724	-	-	320.0
6405	41.712	41.580	-	-	320.0
6445	41.892	41.964	-	-	320.0
6485	41.652	41.796	-	-	320.0
6525	41.904	41.892	-	-	320.0
6565	41.868	41.844	-	-	320.0
6685	41.616	41.844	-	-	320.0
6845	41.640	41.652	-	-	320.0

Table 51 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5965	37.944	37.908	-	-	320.0
6165	37.920	37.908	-	-	320.0
6405	37.920	37.908	-	-	320.0
6445	37.920	37.908	-	-	320.0
6485	37.896	37.908	-	-	320.0
6525	37.884	37.896	-	-	320.0
6565	37.908	37.920	-	-	320.0
6685	37.908	37.908	-	-	320.0
6845	37.908	37.908	-	-	320.0

Table 52 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407 (a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	82.038	82.082	-	-	320.0
6145	82.368	82.632	-	-	320.0
6385	82.522	82.456	-	-	320.0
6465	82.258	82.302	-	-	320.0
6545	82.258	82.412	-	-	320.0
6625	82.280	82.698	-	-	320.0
6705	82.324	82.566	-	-	320.0
6785	82.346	82.346	-	-	320.0

Table 53 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
5985	77.176	77.110	-	-	320.0
6145	77.242	77.198	-	-	320.0
6385	77.176	77.154	-	-	320.0
6465	77.198	77.176	-	-	320.0
6545	77.198	77.176	-	-	320.0
6625	77.154	77.176	-	-	320.0
6705	77.154	77.132	-	-	320.0
6785	77.110	77.154	-	-	320.0

Table 54 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407 (a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	166.488	166.026	-	-	320.0
6185	166.488	165.648	-	-	320.0
6345	167.076	165.900	-	-	320.0
6505	166.320	166.152	-	-	320.0
6665	166.110	166.404	-	-	320.0

Table 55 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6025	156.240	156.282	-	-	320.0
6185	156.324	156.282	-	-	320.0
6345	156.324	156.366	-	-	320.0
6505	156.324	156.408	-	-	320.0
6665	156.324	156.324	-	-	320.0

Table 56 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407 (a) (11) RSS 248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	41.844	41.808	-	-	320.0
6285	41.748	41.760	-	-	320.0
6405	41.688	41.844	-	-	320.0

Table 57 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6125	37.944	37.908	-	-	320.0
6285	37.944	37.932	-	-	320.0
6405	37.920	37.896	-	-	320.0

Table 58 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407 (a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	82.698	82.632	-	-	320.0
6225	82.126	82.390	-	-	320.0
6385	82.434	82.522	-	-	320.0
6625	82.148	82.214	-	-	320.0
6705	82.060	81.994	-	-	320.0
6785	82.148	82.302	-	-	320.0

Table 59 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6145	77.198	77.264	-	-	320.0
6225	77.110	77.154	-	-	320.0
6385	77.154	77.220	-	-	320.0
6625	77.154	77.088	-	-	320.0
6705	77.154	77.132	-	-	320.0
6785	77.110	77.132	-	-	320.0

Table 60 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407 (a) (11) RSS-248 4.4	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	166.488	165.564	-	-	320.0
6345	166.026	166.446	-	-	320.0
6665	166.530	165.858	-	-	320.0

Table 61 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	A	B	C	D	
6185	156.408	156.282	-	-	320.0
6345	156.450	156.450	-	-	320.0
6665	156.492	156.450	-	-	320.0





Table 62 - 99% Bandwidth Results



MIMO SDM

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	21.090	21.384
802.11ax HE40 SU LPI	41.412	41.988
802.11ax HE80 SU LPI	81.994	82.610
802.11ax HE160 SU LPI	165.480	166.068
802.11ax HE20 SU SP	21.036	21.372
802.11ax HE40 SU SP	41.532	42.228
802.11ax HE80 SU SP	82.148	83.050
802.11ax HE160 SU SP	165.270	166.026
802.11ax HE20 SU VLP	21.078	21.330
802.11ax HE40 SU VLP	41.508	41.940
802.11ax HE80 SU VLP	81.752	82.610
802.11ax HE160 SU VLP	165.816	166.362

Table 63 - 26 dB Bandwidth Summary Results - MIMO SDM

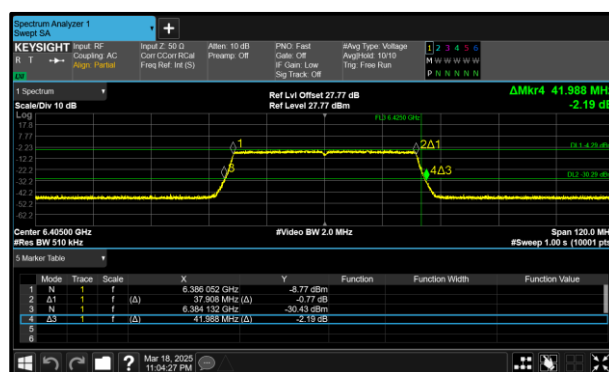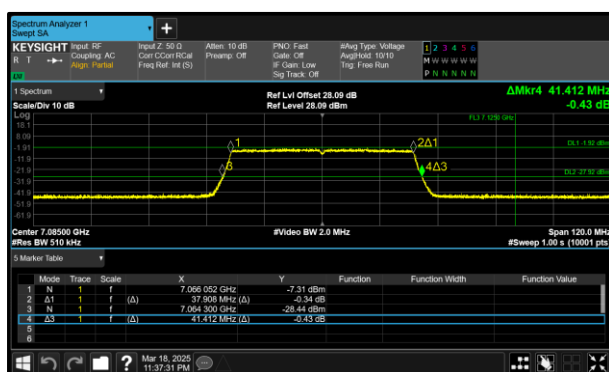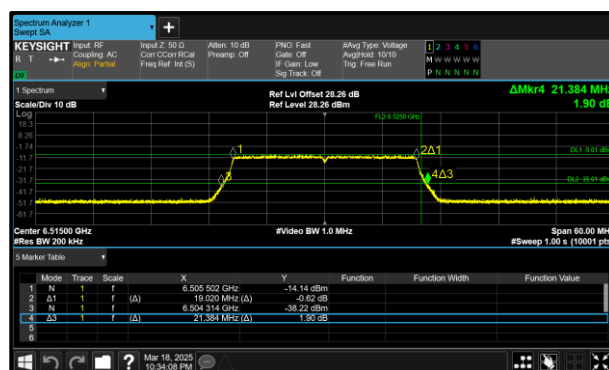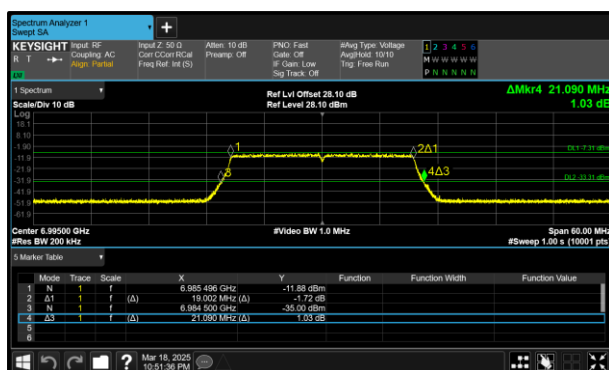

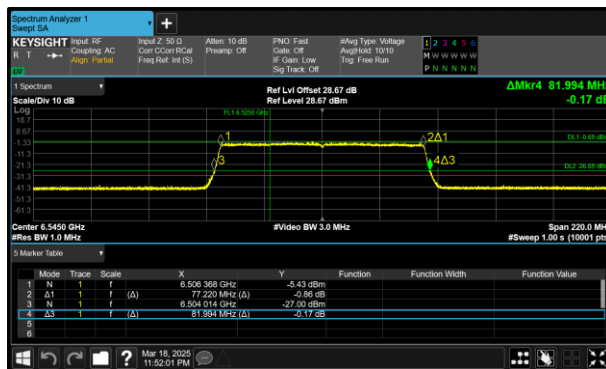


Figure 109 - 802.11ax HE80 SU LPI Minimum 26 dB EBW

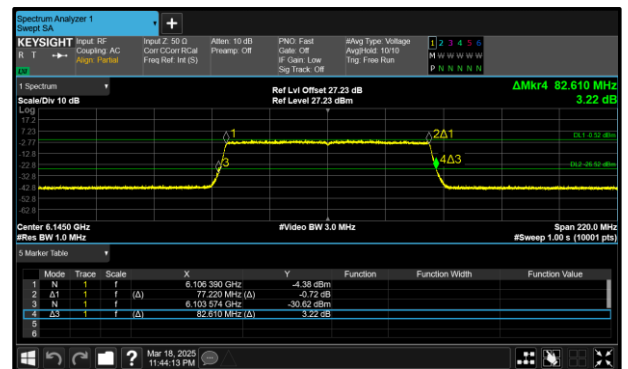


Figure 110 - 802.11ax HE80 SU LPI Maximum 26 dB EBW

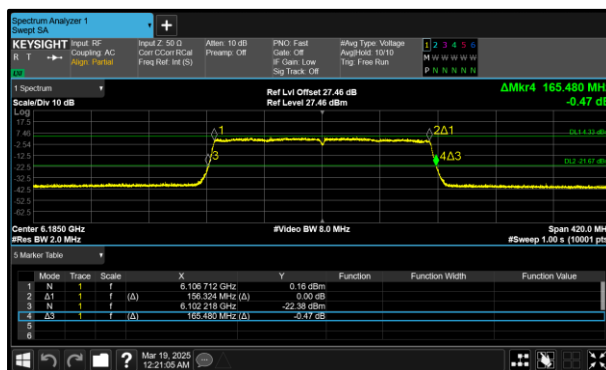


Figure 111 - 802.11ax HE160 SU LPI Minimum 26 dB EBW

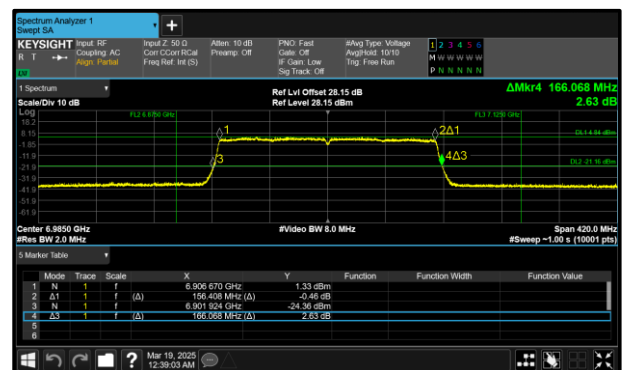


Figure 112 - 802.11ax HE160 SU LPI Maximum 26 dB EBW

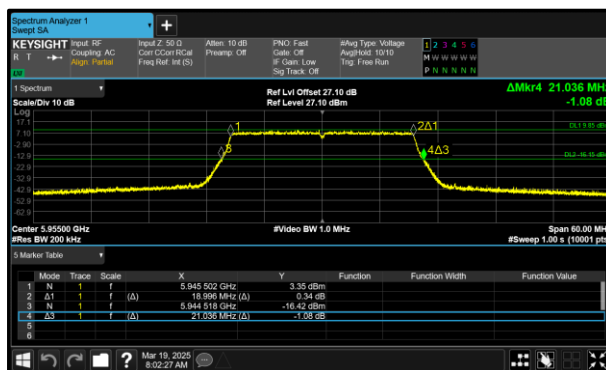


Figure 113 - 802.11ax HE20 SU SP Minimum 26 dB EBW



Figure 114 - 802.11ax HE20 SU SP Maximum 26 dB EBW

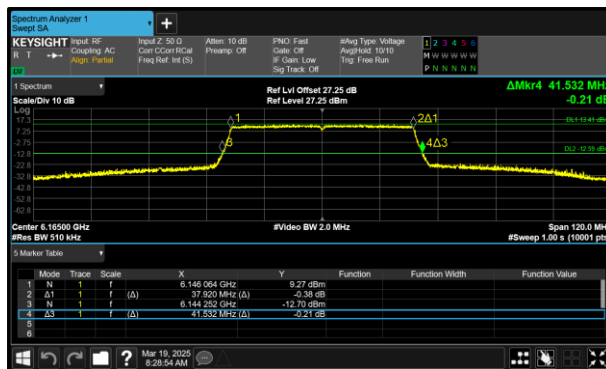


Figure 115 - 802.11ax HE40 SU SP Minimum 26 dB EBW

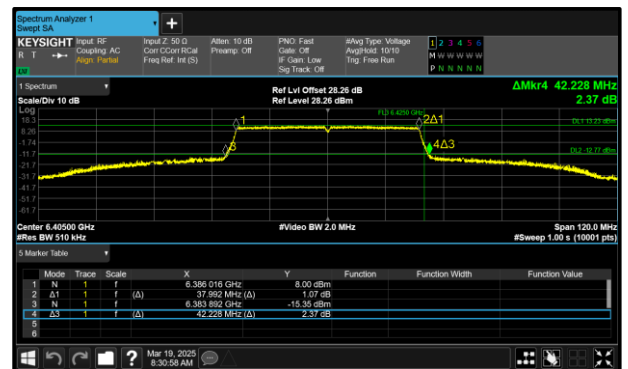


Figure 116 - 802.11ax HE40 SU SP Maximum 26 dB EBW

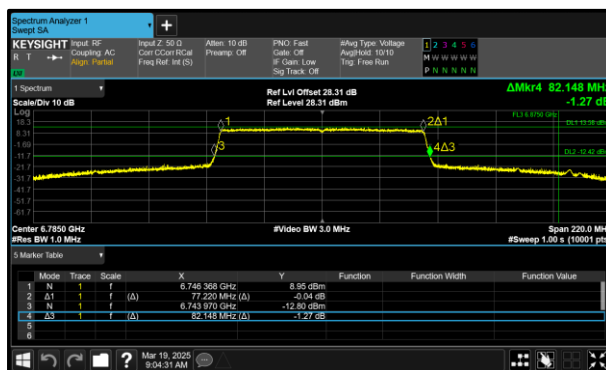


Figure 117 - 802.11ax HE80 SU SP Minimum 26 dB EBW

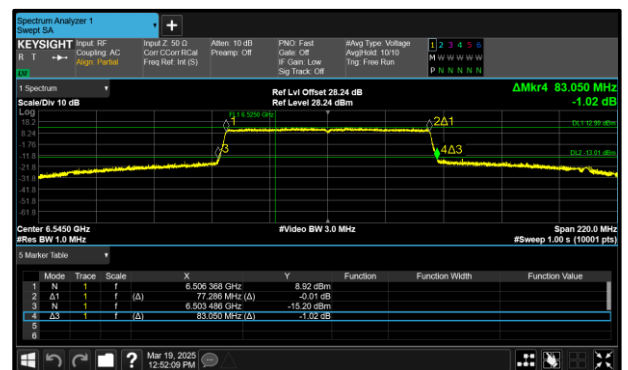


Figure 118 - 802.11ax HE80 SU SP Maximum 26 dB EBW

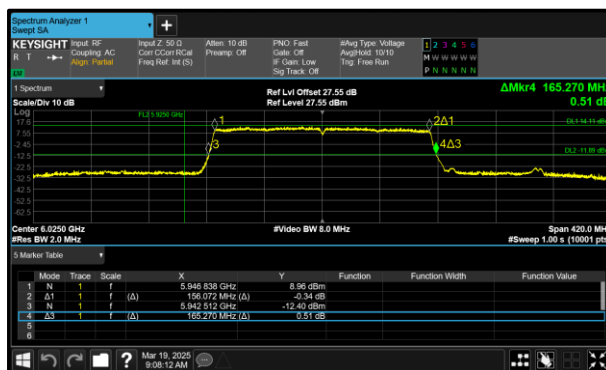


Figure 119 - 802.11ax HE160 SU SP Minimum 26 dB EBW

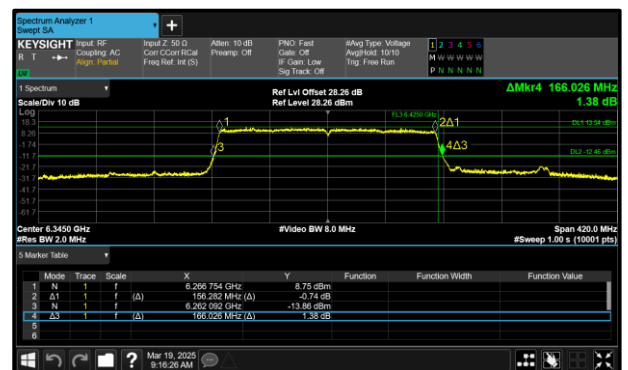


Figure 120 - 802.11ax HE160 SU SP Maximum 26 dB EBW

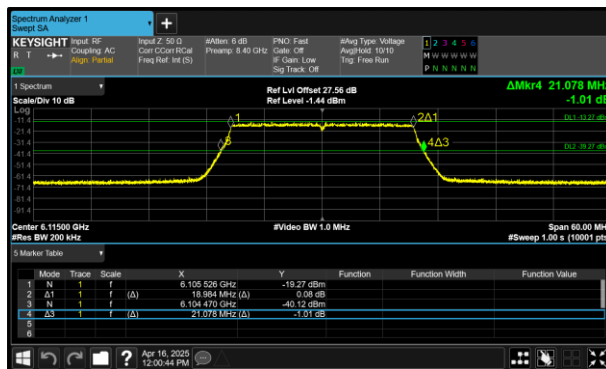


Figure 121 - 802.11ax HE20 SU VLP Minimum 26 dB EBW

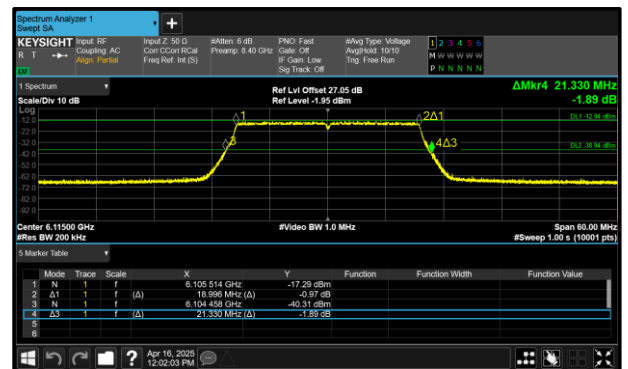


Figure 122 - 802.11ax HE20 SU VLP Maximum 26 dB EBW

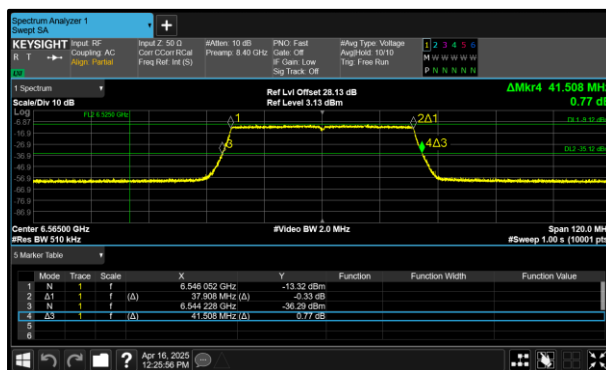


Figure 123 - 802.11ax HE40 SU VLP Minimum 26 dB EBW

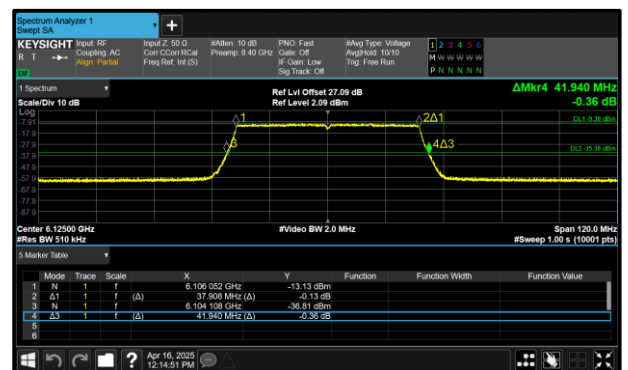


Figure 124 - 802.11ax HE40 SU VLP Maximum 26 dB EBW

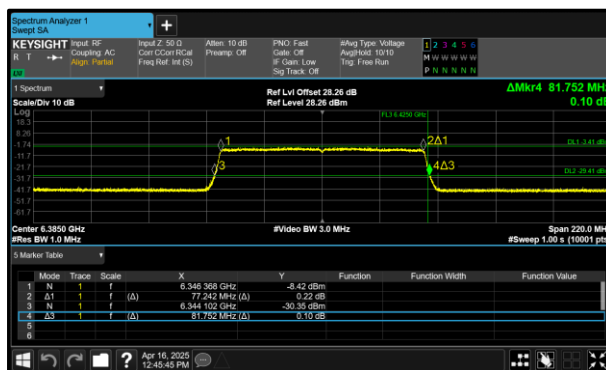


Figure 125 - 802.11ax HE80 SU VLP Minimum 26 dB EBW



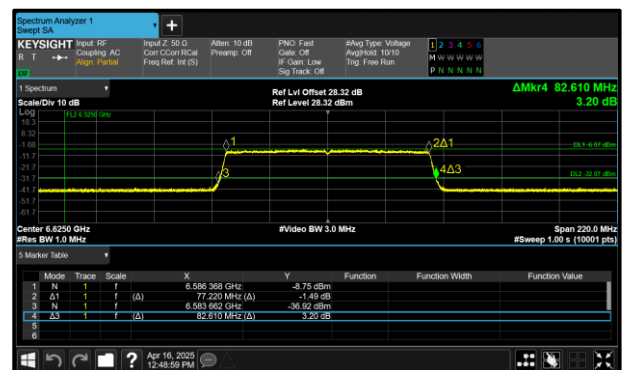


Figure 126 - 802.11ax HE80 SU VLP Maximum 26 dB EBW

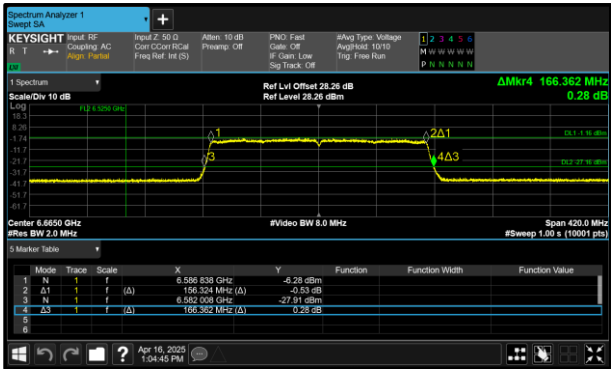

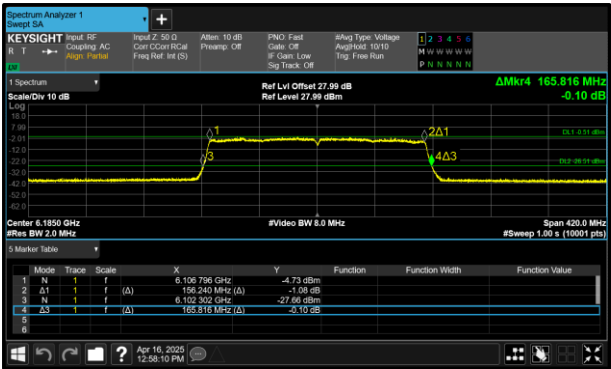

Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11ax HE20 SU LPI	18.984	19.020
802.11ax HE40 SU LPI	37.908	37.944
802.11ax HE80 SU LPI	77.088	77.220
802.11ax HE160 SU LPI	156.156	156.408
802.11ax HE20 SU SP	18.972	19.020
802.11ax HE40 SU SP	37.908	38.016
802.11ax HE80 SU SP	77.132	77.396
802.11ax HE160 SU SP	156.072	156.450
802.11ax HE20 SU VLP	18.984	19.008
802.11ax HE40 SU VLP	37.884	37.944
802.11ax HE80 SU VLP	77.176	77.264
802.11ax HE160 SU VLP	156.240	156.408

Table 64 - 99% Bandwidth Summary Results - MIMO SDM

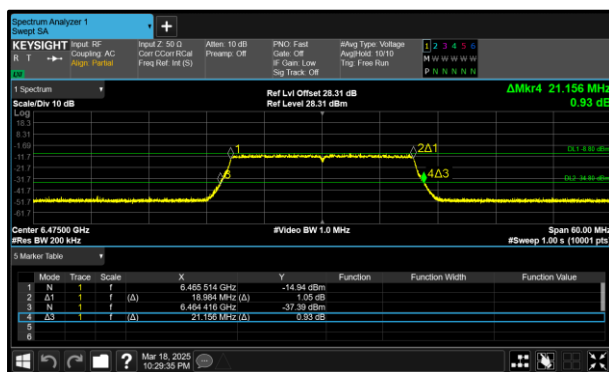


Figure 129 - 802.11ax HE20 SU LPI Minimum 99% OBW

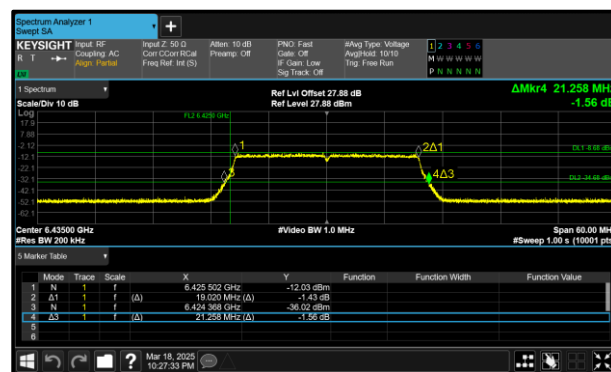


Figure 130 - 802.11ax HE20 SU LPI Maximum 99% OBW

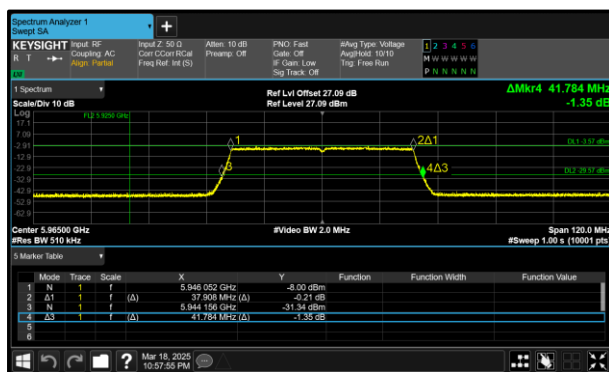


Figure 131 - 802.11ax HE40 SU LPI Minimum 99% OBW

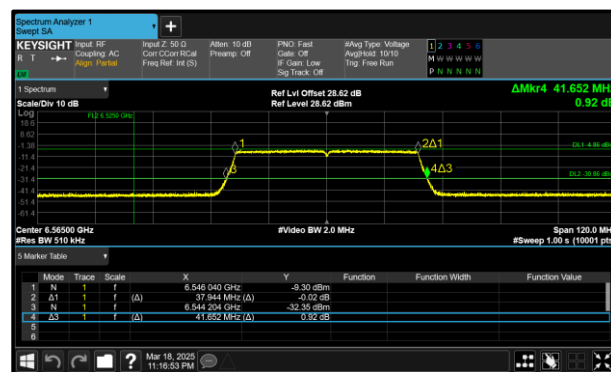


Figure 132 - 802.11ax HE40 SU LPI Maximum 99% OBW

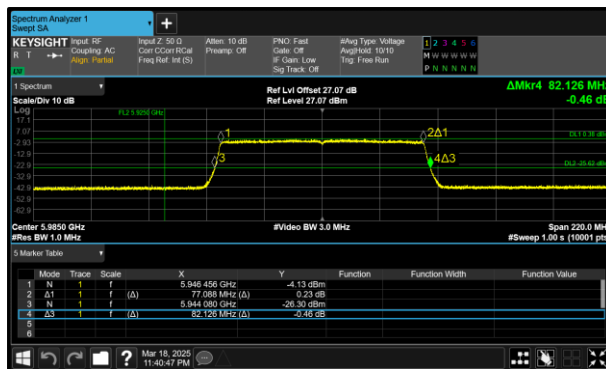


Figure 133 - 802.11ax HE80 SU LPI Minimum 99% OBW

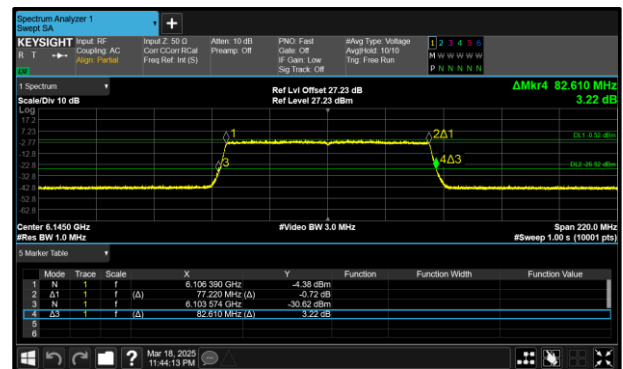


Figure 134 - 802.11ax HE80 SU LPI Maximum 99% OBW

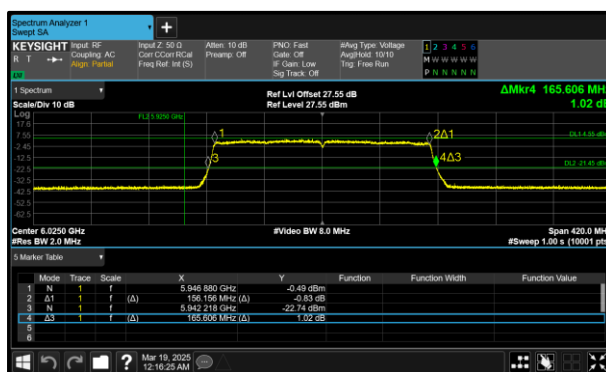


Figure 135 - 802.11ax HE160 SU LPI Minimum 99% OBW

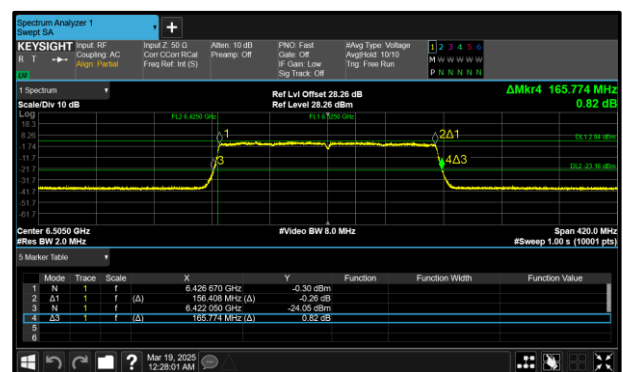


Figure 136 - 802.11ax HE160 SU LPI Maximum 99% OBW

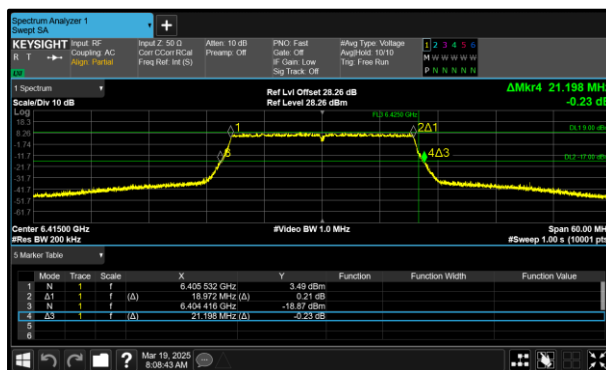


Figure 137 - 802.11ax HE20 SU SP Minimum 99% OBW

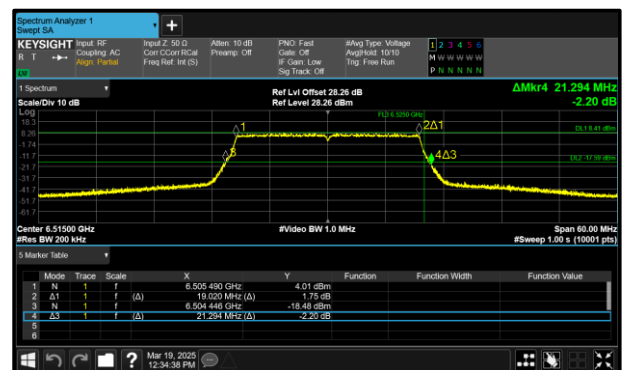


Figure 138 - 802.11ax HE20 SU SP Maximum 99% OBW

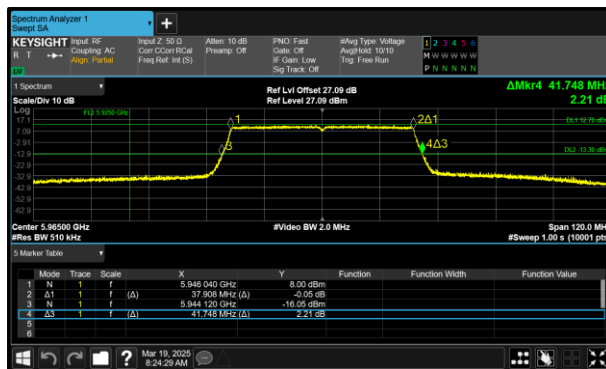


Figure 139 - 802.11ax HE40 SU SP Minimum 99% OBW

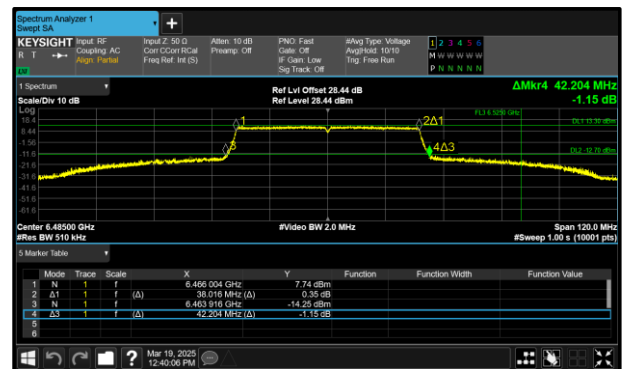


Figure 140 - 802.11ax HE40 SU SP Maximum 99% OBW

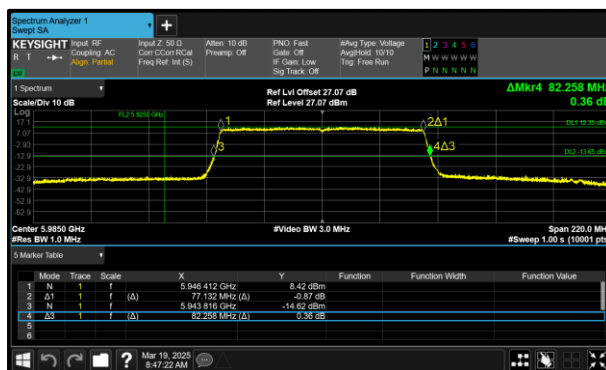


Figure 141 - 802.11ax HE80 SU SP Minimum 99% OBW



Figure 142 - 802.11ax HE80 SU SP Maximum 99% OBW

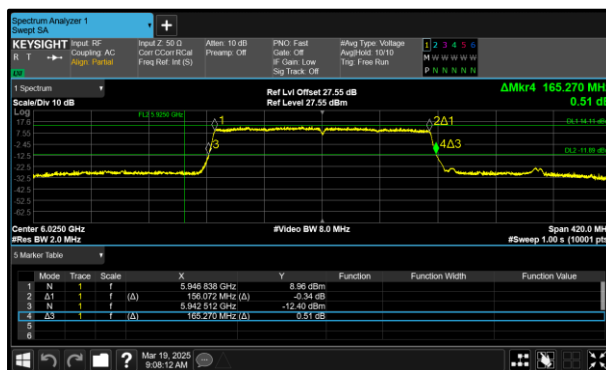


Figure 143 - 802.11ax HE160 SU SP Minimum 99% OBW

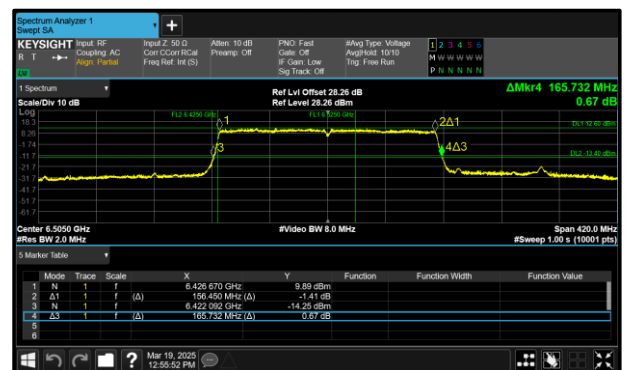


Figure 144 - 802.11ax HE160 SU SP Maximum 99% OBW

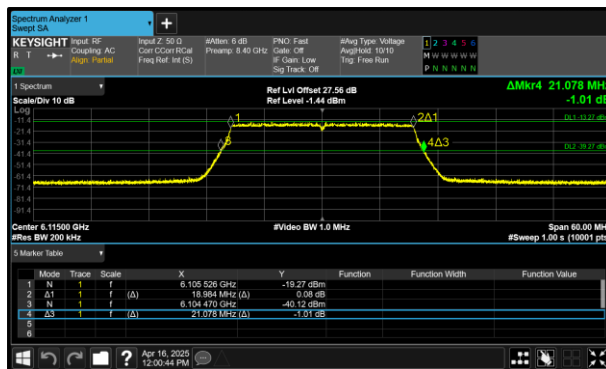


Figure 145 - 802.11ax HE20 SU VLP Minimum
99% OBW

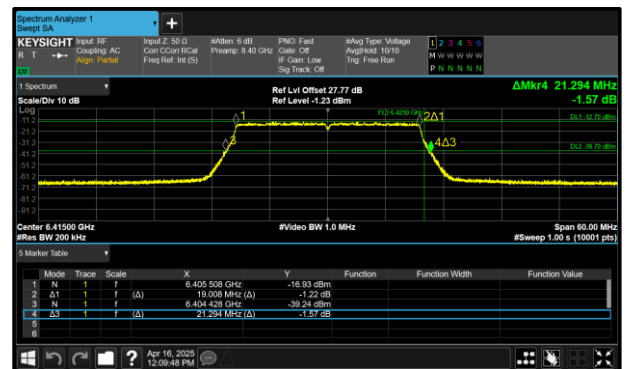


Figure 146 - 802.11ax HE20 SU VLP Maximum
99% OBW

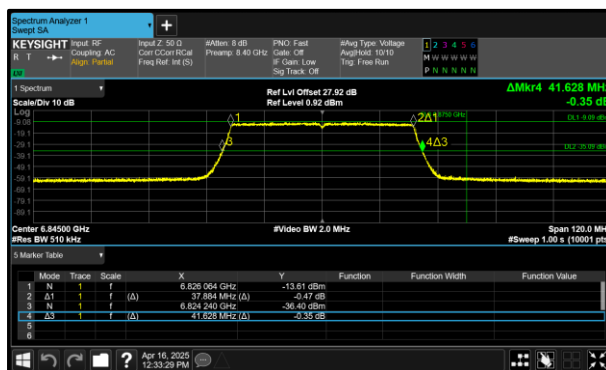


Figure 147 - 802.11ax HE40 SU VLP Minimum
99% OBW

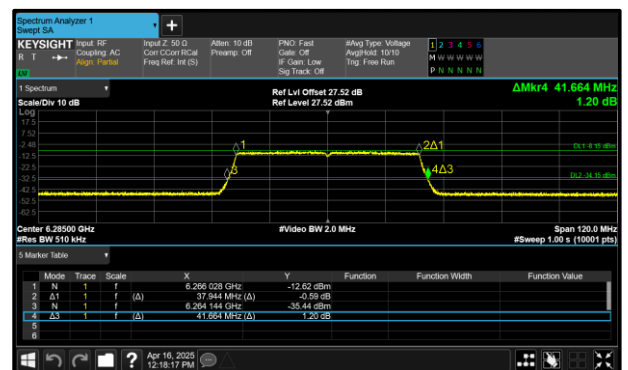


Figure 148 - 802.11ax HE40 SU VLP Maximum
99% OBW

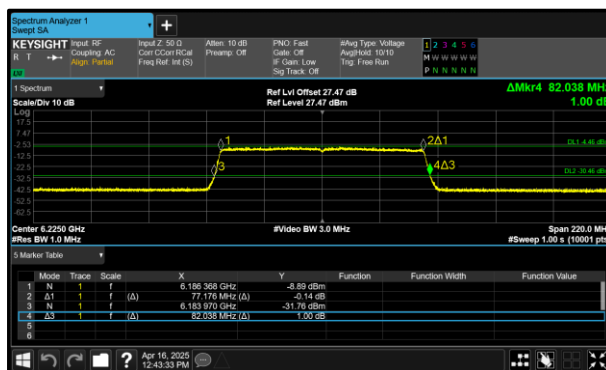


Figure 149 - 802.11ax HE80 SU VLP Minimum
99% OBW

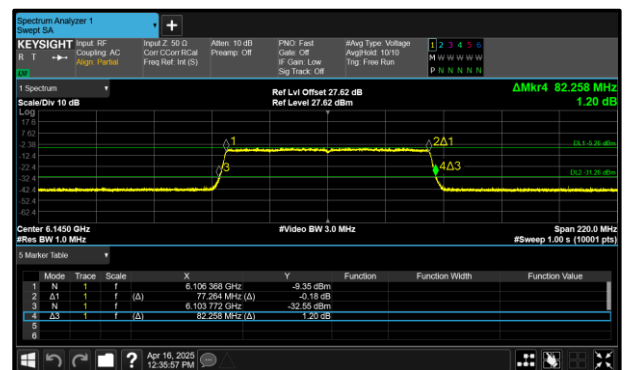


Figure 150 - 802.11ax HE80 SU VLP Maximum
99% OBW

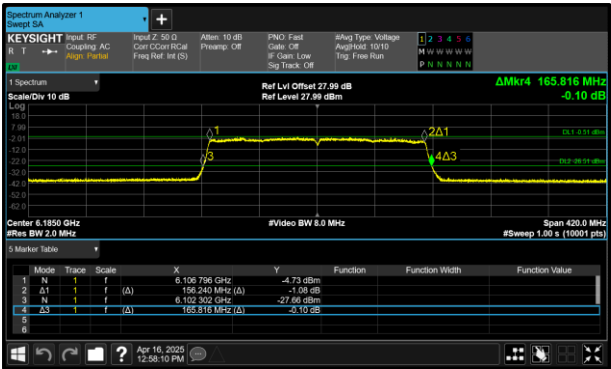


Figure 151 - 802.11ax HE160 SU VLP Minimum
99% OBW

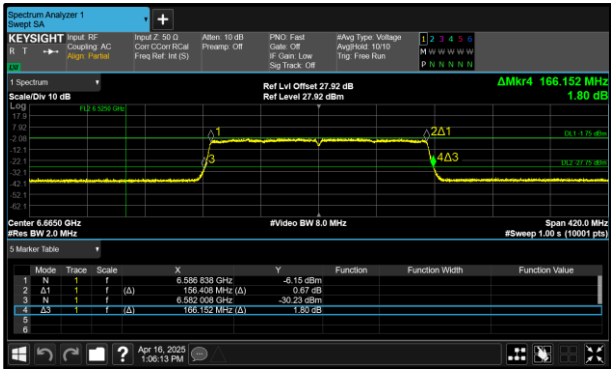


Figure 152 - 802.11ax HE160 SU VLP Maximum
99% OBW