

FCC and ISED Test Report

Apple Inc
Model: A3434



In accordance with FCC 47 CFR Part 15C,
ISED RSS-247 and ISED RSS-GEN

Prepared for: Apple Inc
One Apple Park Way
Cupertino
California
95014
USA

TUV SUD
Limited
Digitally signed
by TUV SUD
Limited
Date: 2025.07.29
09:40:16 +01'00'

FCC ID: BCGA3434

IC: 579C-A3434

COMMERCIAL-IN-CONFIDENCE



Document 75963494-12 Issue 02

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Andrew Lawson	Chief Engineer, EMC	Authorised Signatory	29 July 2025

Signatures in this approval box have checked this document in line with the requirements of TUV SUD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C and ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Christopher Thompson	29 July 2025	

FCC Accreditation

492497/UK2010 Octagon House, Fareham Test Laboratory

ISED Accreditation

12669A/UK0003 Octagon House, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN: 2023, Issue 3 (2023-08) and Issue 5 (2018-04) + A2 (2021-02) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2025 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited). Results of tests covered by our Flexible UKAS Accreditation Schedule are marked FS (Flexible Scope).

TÜV SÜD
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom

TÜV SÜD

TÜV®



Contents

1 Report Summary2

1.1 Report Modification Record.....2

1.2 Introduction.....2

1.3 Brief Summary of Results3

1.4 Product Information5

1.5 Deviations from the Standard.....6

1.6 Identification of the EUT6

1.7 EUT Modification Record6

1.8 Test Location7

2 Test Details8

2.1 AC Power Line Conducted Emissions8

3 Test Equipment Information 23

3.1 General Test Equipment Used 23

4 Measurement Uncertainty 24



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	10-March-2025
2	To add Blockchain verification logo	29-July-2025

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
EUT/Sample Identification	Refer to section 1.6
Test Specification/Issue/Date	FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN: 2023, Issue 3 (2023-08) and Issue 5 (2018-04) + A2 (2021-02)
Start of Test	20-February-2025
Finish of Test	21-February-2025
Name of Engineer(s)	Christopher Thompson
Related Document(s)	ANSI C63.10 (2020)



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C and ISSED RSS-247 and ISSED RSS-GEN is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: AC Powered - 2.4 GHz Bluetooth				
2.1	15.207, 3.1 and 8.8	AC Power Line Conducted Emissions	Pass	ANSI C63.4: 2014

Table 2

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: AC Powered - 2.4 GHz WLAN				
2.1	15.207, 3.1 and 8.8	AC Power Line Conducted Emissions	Pass	ANSI C63.4: 2014

Table 3

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: AC Powered - 5 GHz WLAN				
2.1	15.207, 3.1 and 8.8	AC Power Line Conducted Emissions	Pass	ANSI C63.4: 2014

Table 4

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: AC Powered - 6 GHz WLAN				
2.1	15.207, 3.1 and 8.8	AC Power Line Conducted Emissions	Pass	ANSI C63.4: 2014

Table 5



Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: AC Powered - Thread				
2.1	15.207, 3.1 and 8.8	AC Power Line Conducted Emissions	Pass	ANSI C63.4: 2014

Table 6

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: AC Powered - Narrowband				
2.1	15.207, 3.1 and 8.8	AC Power Line Conducted Emissions	Pass	ANSI C63.4: 2014

Table 7



1.4 Product Information

1.4.1 Technical Description

The equipment under test (EUT) was a portable laptop computer.

1.4.2 EUT Port/Cable Identification

Port	Max Cable Length specified	Usage	Type	Screened
Configuration and Mode: AC Powered – All Modes				
AC Power Port	2 m	Power	AC to DC Power Adapter with MagSafe cable	No
USB Port 1	2 m	Data	USB Type-C	No
USB Port 2	2 m	Data	USB Type-C	No
USB Port 3	Unterminated	Data	USB Type-C	No
HDMI Port	2 m	Video output	HDMI	No
Audio Jack Port	1 m	Audio Output	3.5 mm Jack	No

Table 8

1.4.3 Test Configuration

Configuration	Description
AC Powered	The EUT was powered from a 230 V 50 Hz AC supply using an AC to DC Power Adapter with MagSafe cable: PSU (70W) model: A2743. A pair of headphones were used to terminate the EUTs 3.5 mm audio jack port. A mouse was used to terminate USB Port 1. A keyboard was used to terminate USB Port 2. A monitor was used to terminate the HDMI Port. A video was played on loopback to load the CPU. The EUTs display was set to maximum brightness. The EUTs audio output was set to maximum volume. USB Port 3 was unterminated.

Table 9



1.4.4 Modes of Operation

Mode	Description
2.4 GHz Bluetooth	The EUT was powered with a connection established with a CMW 500 test set.
2.4 GHz WLAN	The EUT was powered with a network link established with an access point.
5 GHz WLAN	The EUT was powered with a network link established with an access point.
6 GHz WLAN	The EUT was powered with a network link established with an access point.
Thread	The EUT was powered and placed in a link with another customer provided slave device.
Narrowband	The EUT was powered and placed in a link with another customer provided slave device.

Table 10

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 Identification of the EUT

The table below details identification of the EUT(s) that have been used to carry out the testing within this report.

Model: A3434		
Serial Number	Hardware Version	Software Version
HW573TLHH0	REV1.0	24F11a
G1VJ2YQVKM	REV1.0	24E21570q

Table 11

1.7 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A3434, Serial Number: G1VJ2YQVKM			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A3434, Serial Number: HW573TLHH0			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 12



1.8 Test Location

TÜV SÜD conducted the following tests at our Octagon House Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: AC Powered - 2.4 GHz Bluetooth		
AC Power Line Conducted Emissions	Christopher Thompson	UKAS

Table 13

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: AC Powered - 2.4 GHz WLAN		
AC Power Line Conducted Emissions	Christopher Thompson	UKAS

Table 14

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: AC Powered - 5 GHz WLAN		
AC Power Line Conducted Emissions	Christopher Thompson	UKAS

Table 15

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: AC Powered - 6 GHz WLAN		
AC Power Line Conducted Emissions	Christopher Thompson	UKAS

Table 16

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: AC Powered - Thread		
AC Power Line Conducted Emissions	Christopher Thompson	UKAS

Table 17

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: AC Powered - Narrowband		
AC Power Line Conducted Emissions	Christopher Thompson	UKAS

Table 18

Office Address:

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire
PO15 5RL
United Kingdom



2 Test Details

2.1 AC Power Line Conducted Emissions

2.1.1 Specification Reference

FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN, Clause 15.207, 3.1 and 8.8

2.1.2 Equipment Under Test and Modification State

A3434, S/N: HW573TLHH0 - Modification State 0
A3434, S/N: G1VJ2YQVKM - Modification State 0

2.1.3 Date of Test

20-February-2025 to 21-February-2025

2.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.2.

The EUT was placed on a non-conductive table 0.8m above a reference ground plane and 0.4m away from a vertical coupling plane

All power was connected to the EUT through an Artificial Mains Network (AMN).

Conducted disturbance voltage measurements on mains lines were made at the output of the AMN.

2.1.5 Example Calculation

Quasi-Peak level (dBμV) = Receiver level (dBμV) + Correction Factor (dB)
Margin (dB) = Quasi-Peak level (dBμV) - Limit (dBμV)

CISPR Average level (dBμV) = Receiver level (dBμV) + Correction Factor (dB)
Margin (dB) = CISPR Average level (dBμV) - Limit (dBμV)

2.1.6 Example Test Setup Diagram

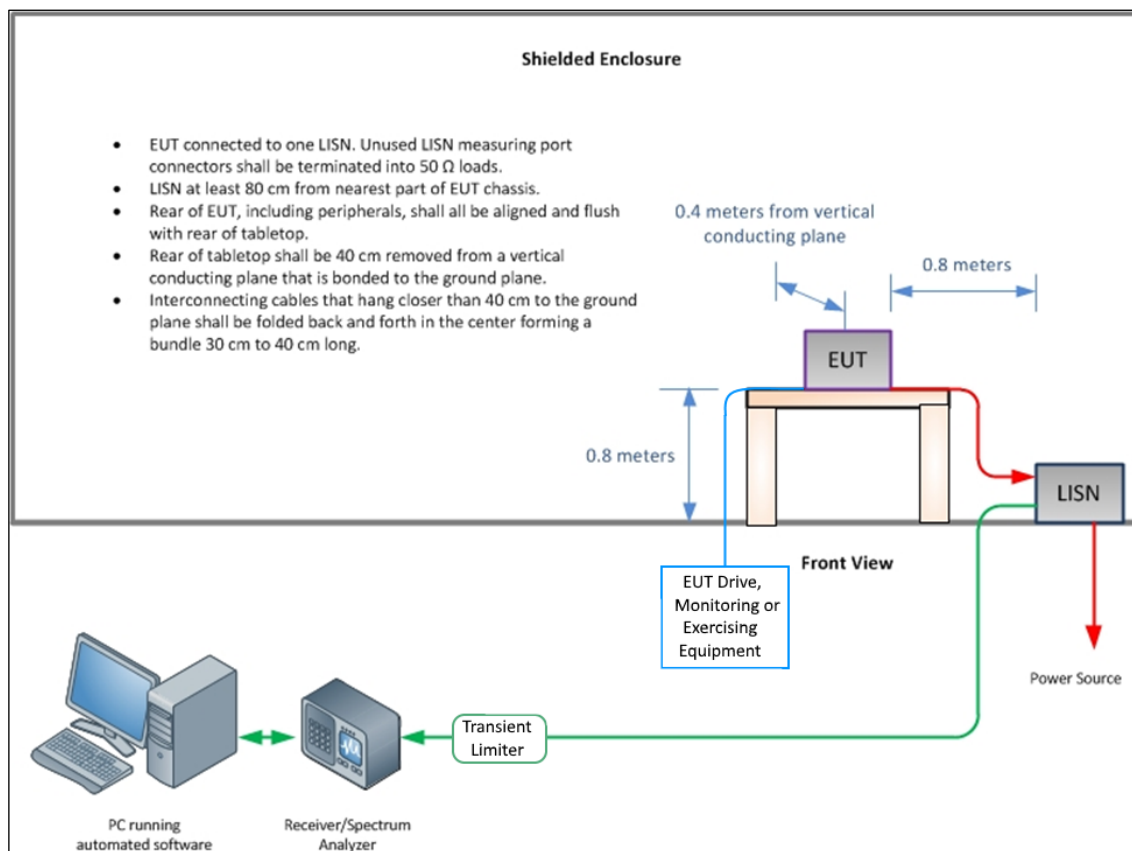


Figure 1 - Conducted Disturbance

2.1.7 Environmental Conditions

Ambient Temperature 18.6 - 18.7 °C
Relative Humidity 43.6 - 46.3 %

2.1.8 Specification Limits

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	CISPR Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

Table 19

*Decreases with the logarithm of the frequency.

2.1.9 Test Results

AC Powered - 2.4 GHz Bluetooth

Applied supply voltage: 120 V AC

Applied supply frequency: 60 Hz

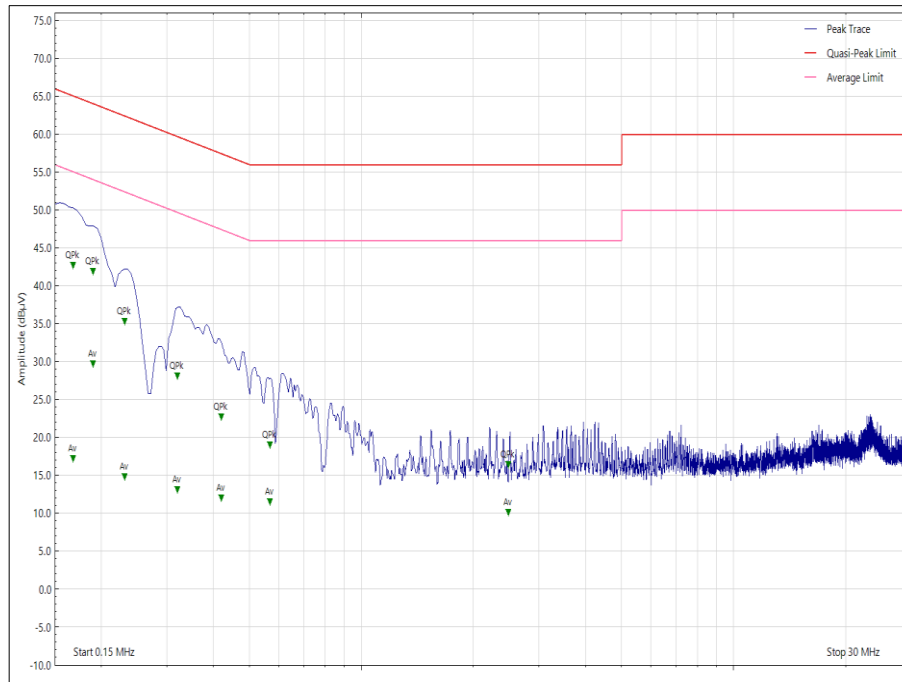


Figure 2 - Live Line - 150 kHz to 30 MHz

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.168	42.01	65.10	-23.09	Q-Peak
0.168	16.50	55.10	-38.60	CISPR Avg
0.190	41.23	64.00	-22.77	Q-Peak
0.190	29.02	54.00	-24.98	CISPR Avg
0.231	34.61	62.40	-27.79	Q-Peak
0.231	14.13	52.40	-38.27	CISPR Avg
0.321	27.44	59.70	-32.26	Q-Peak
0.321	12.40	49.70	-37.30	CISPR Avg
0.420	21.98	57.40	-35.42	Q-Peak
0.420	11.33	47.40	-36.07	CISPR Avg
0.568	10.81	46.00	-35.19	CISPR Avg
0.568	18.34	56.00	-37.66	Q-Peak
2.482	9.45	46.00	-36.55	CISPR Avg
2.482	15.69	56.00	-40.31	Q-Peak

Table 20 - Live Line Emissions Results

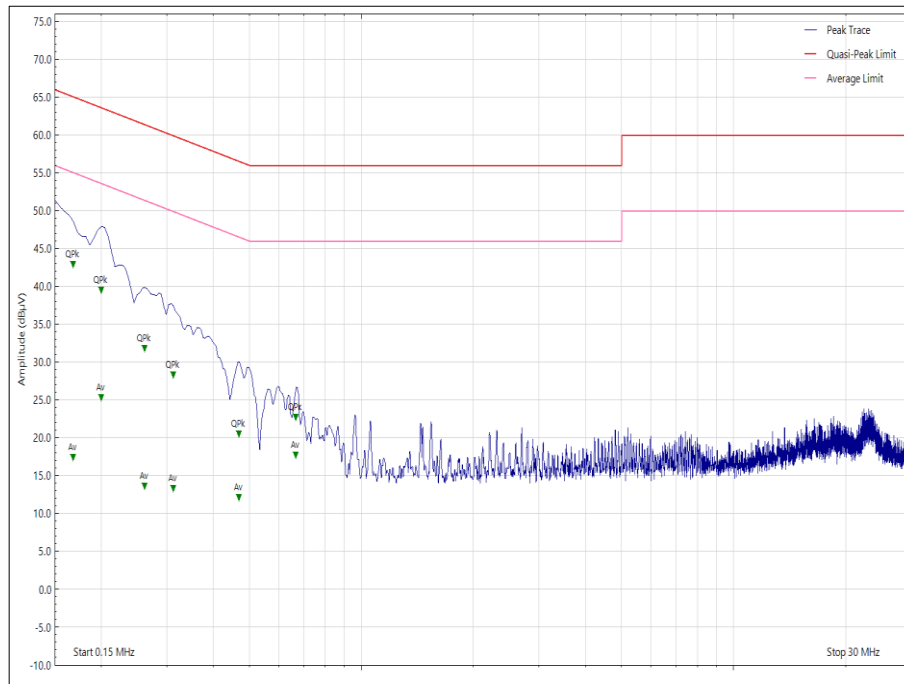


Figure 3 - Neutral Line - 150 kHz to 30 MHz

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.168	42.22	65.00	-22.78	Q-Peak
0.168	16.68	55.00	-38.32	CISPR Avg
0.200	24.59	53.60	-29.01	CISPR Avg
0.200	38.78	63.60	-24.82	Q-Peak
0.262	12.89	51.40	-38.51	CISPR Avg
0.262	31.15	61.40	-30.25	Q-Peak
0.312	12.63	49.90	-37.27	CISPR Avg
0.312	27.56	59.90	-32.34	Q-Peak
0.469	19.81	56.50	-36.69	Q-Peak
0.469	11.40	46.50	-35.10	CISPR Avg
0.667	16.99	46.00	-29.01	CISPR Avg
0.667	21.99	56.00	-34.01	Q-Peak

Table 21 - Neutral Line Emissions Results

AC Powered - 2.4 GHz WLAN

Applied supply voltage: 120 V AC
Applied supply frequency: 60 Hz

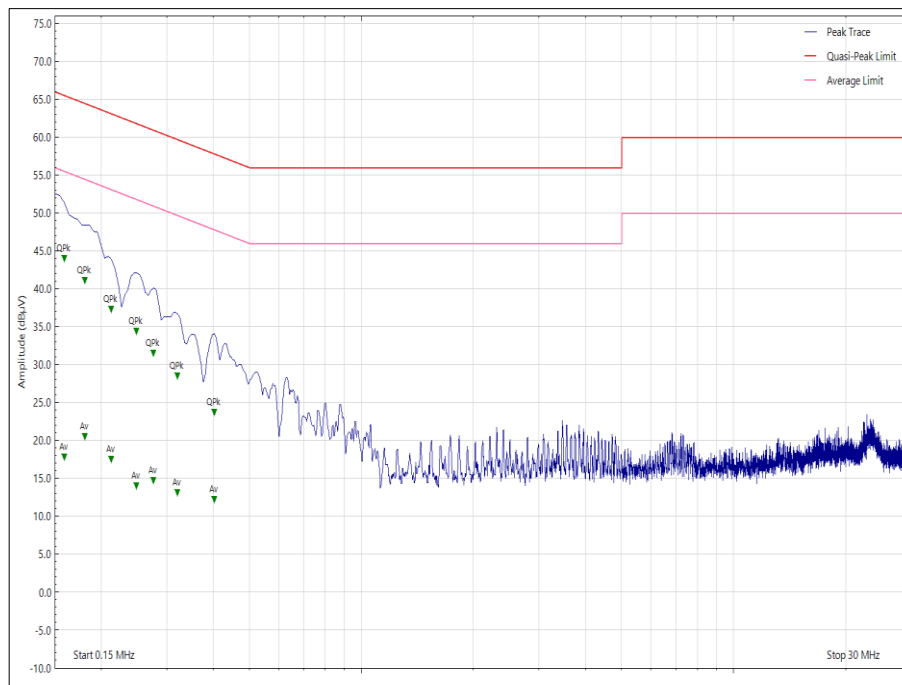


Figure 4 - Live Line - 150 kHz to 30 MHz

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.159	43.24	65.50	-22.26	Q-Peak
0.159	17.11	55.50	-38.39	CISPR Avg
0.181	40.37	64.40	-24.03	Q-Peak
0.181	19.84	54.40	-34.56	CISPR Avg
0.213	36.64	63.10	-26.46	Q-Peak
0.213	16.78	53.10	-36.32	CISPR Avg
0.249	33.73	61.80	-28.07	Q-Peak
0.249	13.32	51.80	-38.48	CISPR Avg
0.276	30.79	60.90	-30.11	Q-Peak
0.276	14.01	50.90	-36.89	CISPR Avg
0.321	12.40	49.70	-37.30	CISPR Avg
0.321	27.78	59.70	-31.92	Q-Peak
0.402	11.48	47.80	-36.32	CISPR Avg
0.402	22.98	57.80	-34.82	Q-Peak

Table 22 - Live Line Emissions Results

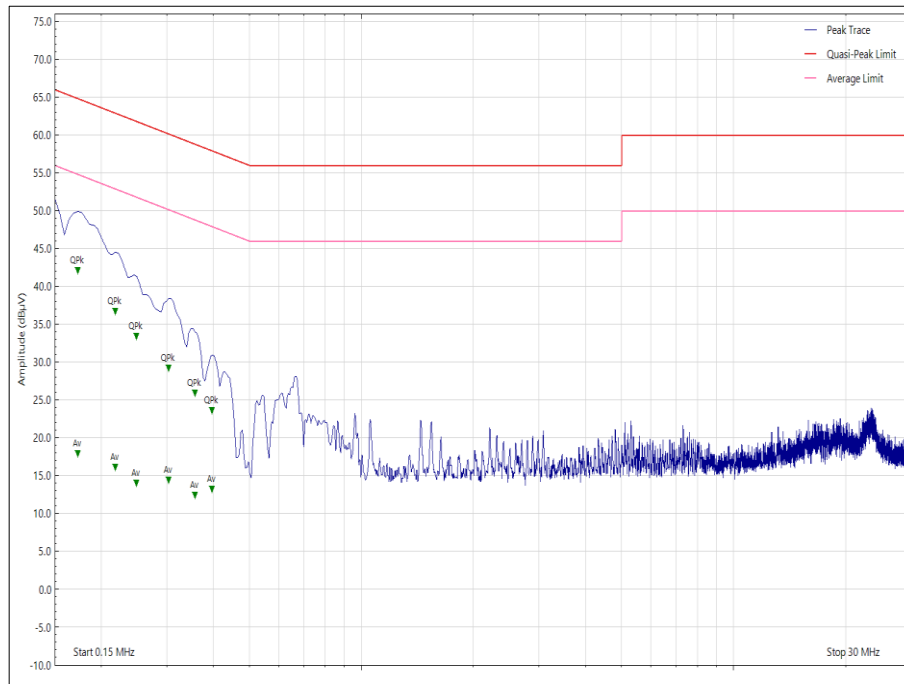


Figure 5 - Neutral Line - 150 kHz to 30 MHz

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.173	41.35	64.80	-23.45	Q-Peak
0.173	17.20	54.80	-37.60	CISPR Avg
0.218	15.45	52.90	-37.45	CISPR Avg
0.218	35.96	62.90	-26.94	Q-Peak
0.249	13.29	51.80	-38.51	CISPR Avg
0.249	32.69	61.80	-29.11	Q-Peak
0.303	13.75	50.20	-36.45	CISPR Avg
0.303	28.51	60.20	-31.69	Q-Peak
0.357	11.77	48.80	-37.03	CISPR Avg
0.357	25.19	58.80	-33.61	Q-Peak
0.397	12.57	47.90	-35.33	CISPR Avg
0.397	22.95	57.90	-34.95	Q-Peak

Table 23 - Neutral Line Emissions Results

AC Powered - 5 GHz WLAN

Applied supply voltage: 120 V AC
Applied supply frequency: 60 Hz

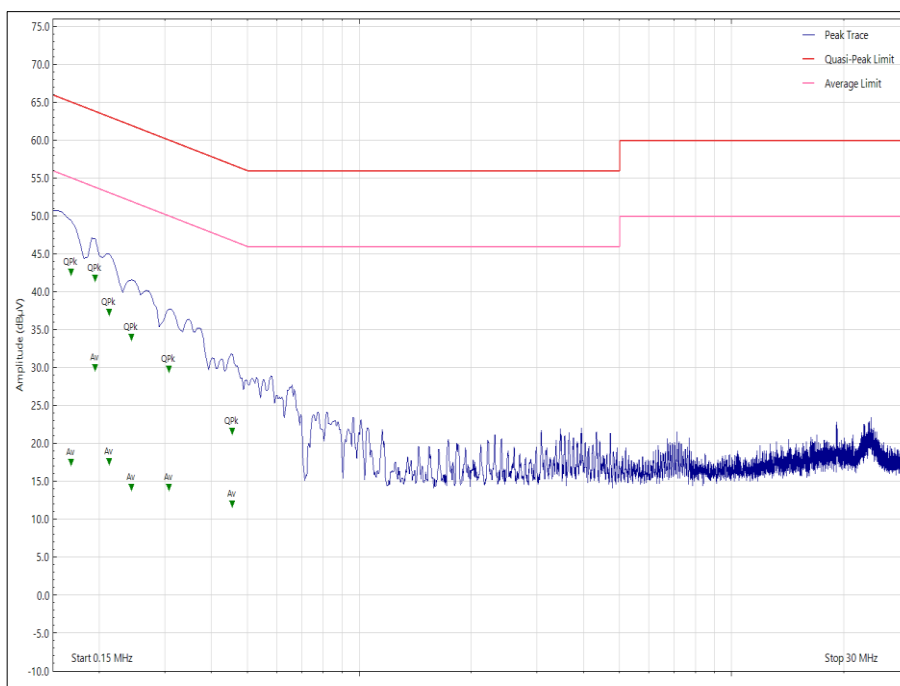


Figure 6 - Live Line - 150 kHz to 30 MHz

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.168	41.90	65.10	-23.20	Q-Peak
0.168	16.81	55.10	-38.29	CISPR Avg
0.195	41.13	63.80	-22.67	Q-Peak
0.195	29.33	53.80	-24.47	CISPR Avg
0.213	36.63	63.10	-26.47	Q-Peak
0.213	16.89	53.10	-36.21	CISPR Avg
0.244	33.32	62.00	-28.68	Q-Peak
0.244	13.52	52.00	-38.48	CISPR Avg
0.308	29.06	60.00	-30.94	Q-Peak
0.308	13.56	50.00	-36.44	CISPR Avg
0.456	20.89	56.80	-35.91	Q-Peak
0.456	11.31	46.80	-35.49	CISPR Avg

Table 24 - Live Line Emissions Results

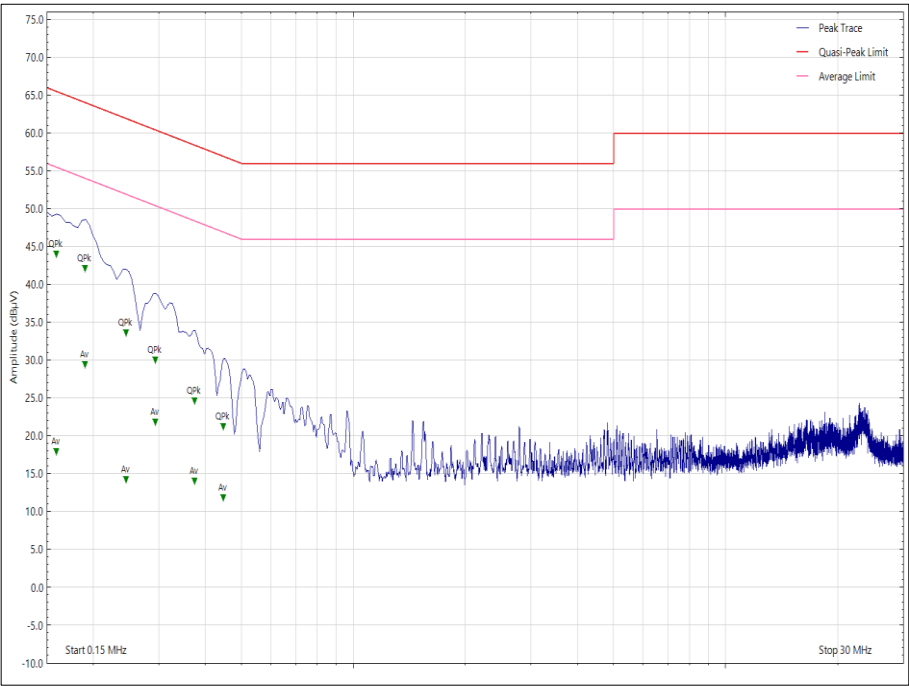


Figure 7 - Neutral Line - 150 kHz to 30 MHz

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.159	43.26	65.50	-22.24	Q-Peak
0.159	17.19	55.50	-38.31	CISPR Avg
0.190	28.73	54.00	-25.27	CISPR Avg
0.190	41.43	64.00	-22.57	Q-Peak
0.245	13.51	51.90	-38.39	CISPR Avg
0.245	32.91	61.90	-28.99	Q-Peak
0.294	21.16	50.40	-29.24	CISPR Avg
0.294	29.26	60.40	-31.14	Q-Peak
0.375	13.33	48.40	-35.07	CISPR Avg
0.375	23.96	58.40	-34.44	Q-Peak
0.447	11.11	46.90	-35.79	CISPR Avg
0.447	20.54	56.90	-36.36	Q-Peak

Table 25 - Neutral Line Emissions Results



AC Powered - 6 GHz WLAN

Applied supply voltage: 120 V AC
Applied supply frequency: 60 Hz

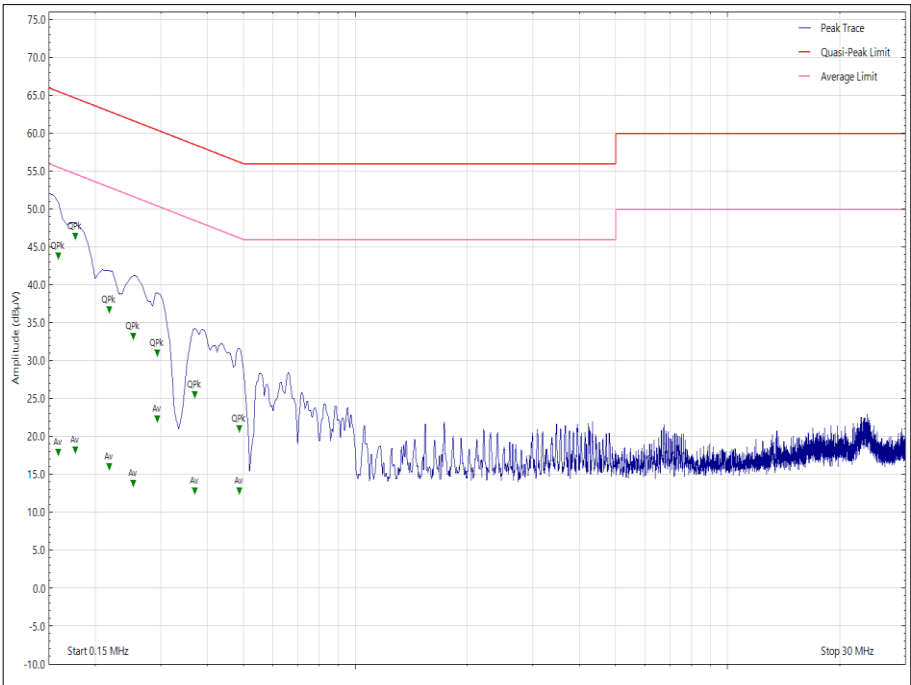


Figure 8 - Live Line - 150 kHz to 30 MHz

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.159	43.06	65.50	-22.44	Q-Peak
0.159	17.25	55.50	-38.25	CISPR Avg
0.177	45.71	64.60	-18.89	Q-Peak
0.177	17.51	54.60	-37.09	CISPR Avg
0.218	15.36	52.90	-37.54	CISPR Avg
0.218	35.99	62.90	-26.91	Q-Peak
0.253	32.46	61.70	-29.24	Q-Peak
0.253	13.16	51.70	-38.54	CISPR Avg
0.294	21.65	50.40	-28.75	CISPR Avg
0.294	30.29	60.40	-30.11	Q-Peak
0.370	24.81	58.50	-33.69	Q-Peak
0.370	12.09	48.50	-36.41	CISPR Avg
0.488	20.28	56.20	-35.92	Q-Peak
0.488	12.16	46.20	-34.04	CISPR Avg

Table 26 - Live Line Emissions Results

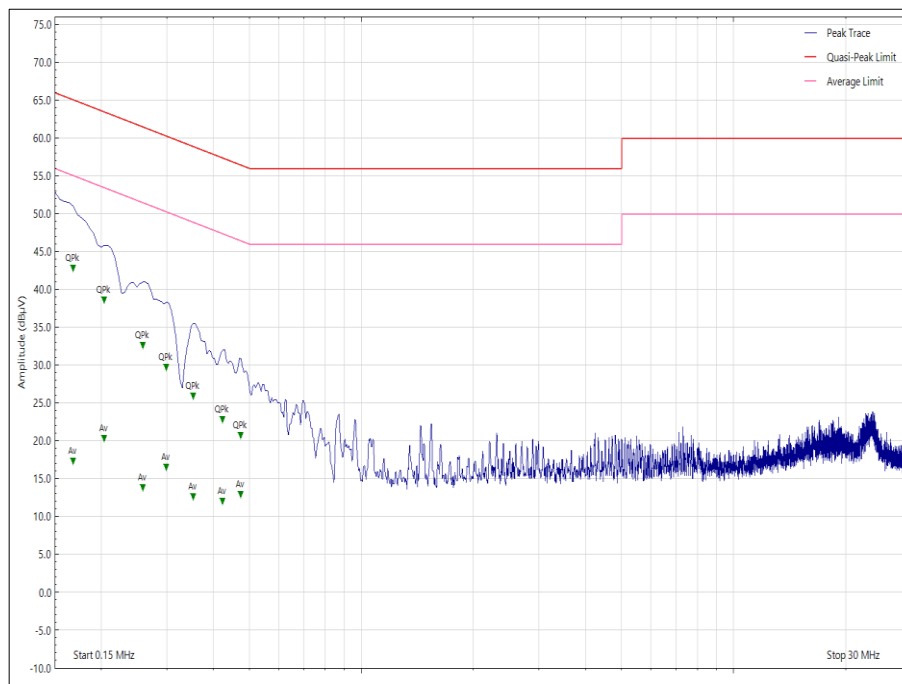


Figure 9 - Neutral Line - 150 kHz to 30 MHz

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.168	16.65	55.10	-38.45	CISPR Avg
0.168	42.09	65.10	-23.01	Q-Peak
0.204	37.94	63.50	-25.56	Q-Peak
0.204	19.61	53.50	-33.89	CISPR Avg
0.259	13.17	51.50	-38.33	CISPR Avg
0.259	31.89	61.50	-29.61	Q-Peak
0.299	15.82	50.30	-34.48	CISPR Avg
0.299	29.02	60.30	-31.28	Q-Peak
0.353	11.96	48.90	-36.94	CISPR Avg
0.353	25.19	58.90	-33.71	Q-Peak
0.424	11.28	47.40	-36.12	CISPR Avg
0.424	22.07	57.40	-35.33	Q-Peak
0.474	12.20	46.40	-34.20	CISPR Avg
0.474	20.03	56.40	-36.37	Q-Peak

Table 27 - Neutral Line Emissions Results

AC Powered - Thread

Applied supply voltage: 120 V AC
Applied supply frequency: 60 Hz

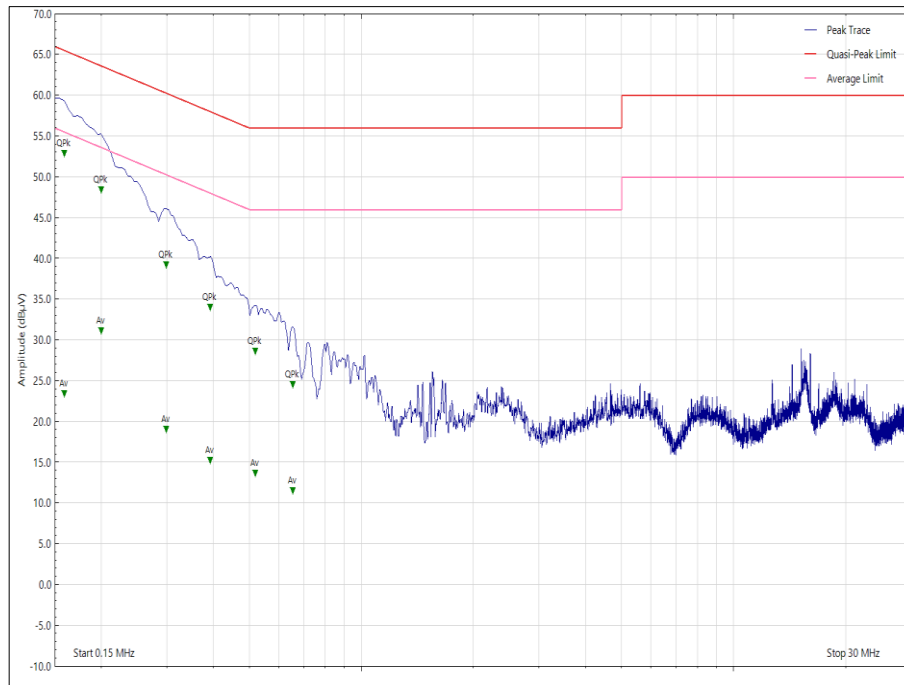


Figure 10 - Live Line - 150 kHz to 30 MHz

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.159	52.22	65.50	-13.28	Q-Peak
0.159	22.78	55.50	-32.72	CISPR Avg
0.200	30.47	53.60	-23.13	CISPR Avg
0.200	47.75	63.60	-15.85	Q-Peak
0.299	38.51	60.30	-21.79	Q-Peak
0.299	18.36	50.30	-31.94	CISPR Avg
0.393	14.61	48.00	-33.39	CISPR Avg
0.393	33.33	58.00	-24.67	Q-Peak
0.519	13.02	46.00	-32.98	CISPR Avg
0.519	27.99	56.00	-28.01	Q-Peak
0.654	10.87	46.00	-35.13	CISPR Avg
0.654	23.91	56.00	-32.09	Q-Peak

Table 28 - Live Line Emissions Results

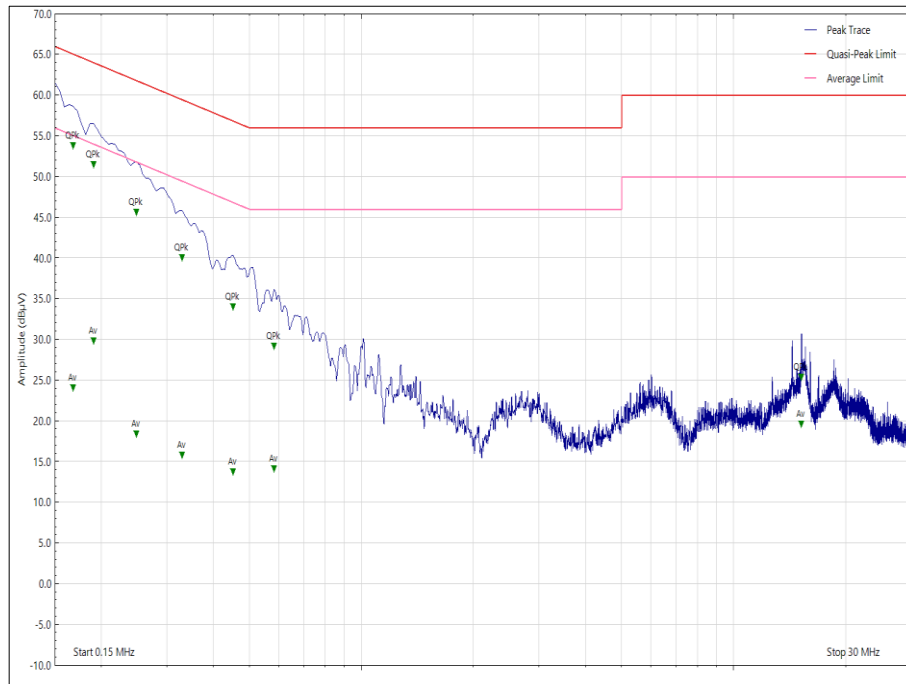


Figure 11 - Neutral Line - 150 kHz to 30 MHz

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.168	23.44	55.00	-31.56	CISPR Avg
0.168	53.11	65.00	-11.89	Q-Peak
0.191	50.82	64.00	-13.18	Q-Peak
0.191	29.21	54.00	-24.79	CISPR Avg
0.249	17.78	51.80	-34.02	CISPR Avg
0.249	44.99	61.80	-16.81	Q-Peak
0.330	39.41	59.40	-19.99	Q-Peak
0.330	15.11	49.40	-34.29	CISPR Avg
0.452	33.32	56.80	-23.48	Q-Peak
0.452	13.05	46.80	-33.75	CISPR Avg
0.582	28.53	56.00	-27.47	Q-Peak
0.582	13.45	46.00	-32.55	CISPR Avg
15.203	24.75	60.00	-35.25	Q-Peak
15.203	18.94	50.00	-31.06	CISPR Avg

Table 29 - Neutral Line Emissions Results

AC Powered - Narrowband

Applied supply voltage: 120 V AC

Applied supply frequency: 60 Hz

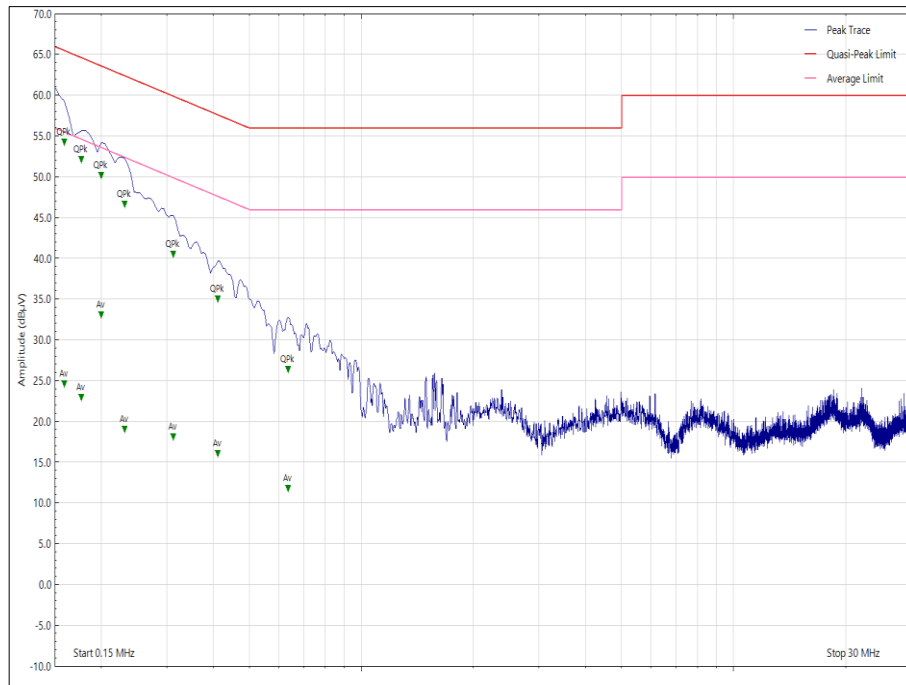


Figure 12 - Live Line - 150 kHz to 30 MHz

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.159	53.57	65.50	-11.93	Q-Peak
0.159	23.92	55.50	-31.58	CISPR Avg
0.177	51.50	64.60	-13.10	Q-Peak
0.177	22.32	54.60	-32.28	CISPR Avg
0.200	49.55	63.60	-14.05	Q-Peak
0.200	32.45	53.60	-21.15	CISPR Avg
0.231	18.43	52.40	-33.97	CISPR Avg
0.231	45.96	62.40	-16.44	Q-Peak
0.312	39.87	59.90	-20.03	Q-Peak
0.312	17.43	49.90	-32.47	CISPR Avg
0.411	34.39	57.60	-23.21	Q-Peak
0.411	15.41	47.60	-32.19	CISPR Avg
0.636	11.12	46.00	-34.88	CISPR Avg
0.636	25.74	56.00	-30.26	Q-Peak

Table 30 - Live Line Emissions Results

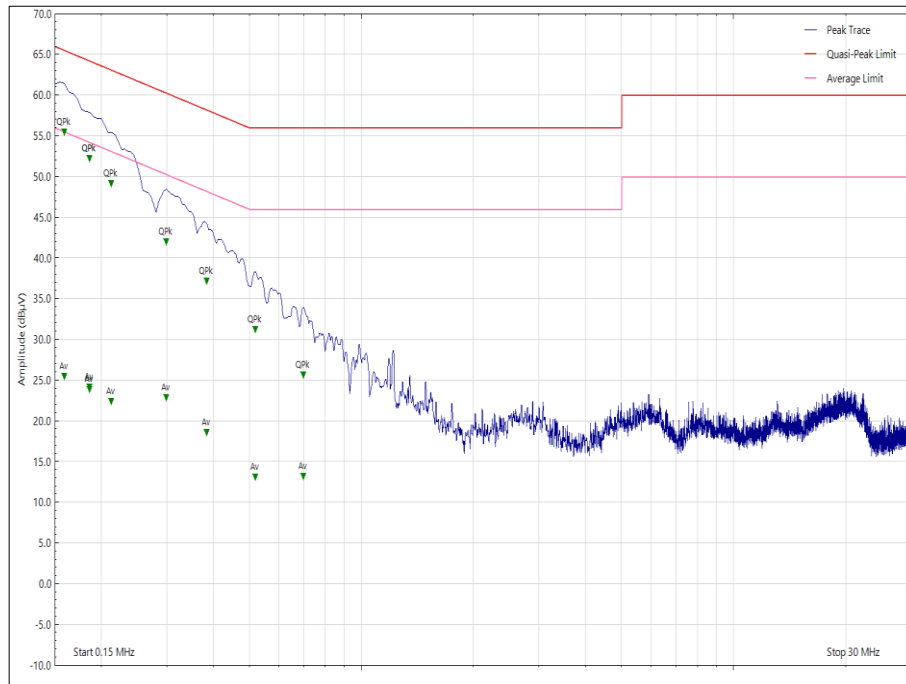


Figure 13 - Neutral Line - 150 kHz to 30 MHz

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
0.159	24.84	55.50	-30.66	CISPR Avg
0.159	54.80	65.50	-10.70	Q-Peak
0.186	23.53	54.20	-30.67	CISPR Avg
0.186	51.55	64.20	-12.65	Q-Peak
0.213	48.53	63.10	-14.57	Q-Peak
0.213	21.75	53.10	-31.35	CISPR Avg
0.299	22.19	50.30	-28.11	CISPR Avg
0.299	41.33	60.30	-18.97	Q-Peak
0.384	17.92	48.20	-30.28	CISPR Avg
0.384	36.46	58.20	-21.74	Q-Peak
0.519	30.52	56.00	-25.48	Q-Peak
0.519	12.44	46.00	-33.56	CISPR Avg
0.699	24.99	56.00	-31.01	Q-Peak
0.699	12.52	46.00	-33.48	CISPR Avg

Table 31 - Neutral Line Emissions Results



2.1.10 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 12.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
3m Semi-Anechoic Chamber	MVG	EMC Chamber 12	5621	36	07-Aug-2026
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Test Receiver	Rohde & Schwarz	ESW44	5802	12	25-Oct-2025
Transient Limiter	Hewlett Packard	11947A	15	12	28-Oct-2025
Cable (N to N 8m)	Junkosha	MWX221-08000NMSNMS/A	6017	12	12-Sep-2025
2m N-type Cable	Junkosha	MWX221-02000NMSNMS/B	6924	12	08-Dec-2025
LISN (CISPR 16, Single Phase)	Rohde & Schwarz	ESH3-Z5	1390	12	04-Feb-2026

Table 32



3 Test Equipment Information

3.1 General Test Equipment Used

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Thermo-Hygro-Barometer	PCE Instruments	OCE-THB-40	5470	12	07-May-2025
Milliohm-meter	Hewlett Packard	4338B	2095	12	11-Jul-2025

Table 33



4 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
AC Power Line Conducted Emissions	150 kHz to 30 MHz, LISN, ± 3.7 dB

Table 34

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.