



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11a20 SP	-6.83	6524.000
802.11a40 SP	-4.42	6621.680
802.11a80 SP	-3.83	6416.000
802.11a160 SP	-1.72	6734.000
802.11ax HE20 SU SP	-9.75	6546.000
802.11ax HE40 SU SP	-8.81	6466.071
802.11ax HE80 SU SP	-7.18	6586.000
802.11ax HE160 SU SP	-7.30	6250.000

Table 829 - Unwanted Emissions Within the RLAN Band Summary Results Core 1 SU

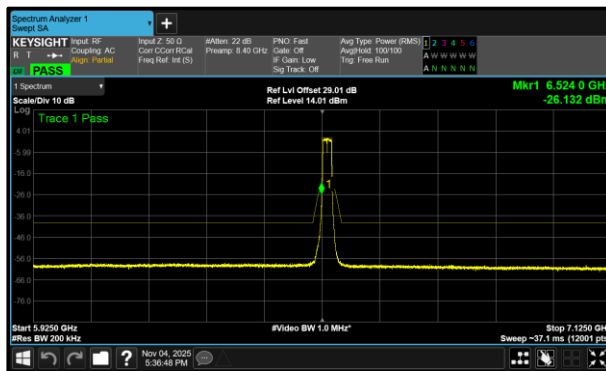


Figure 675 - B (Core 1) 802.11a20 SP 6535 MHz (CH117)

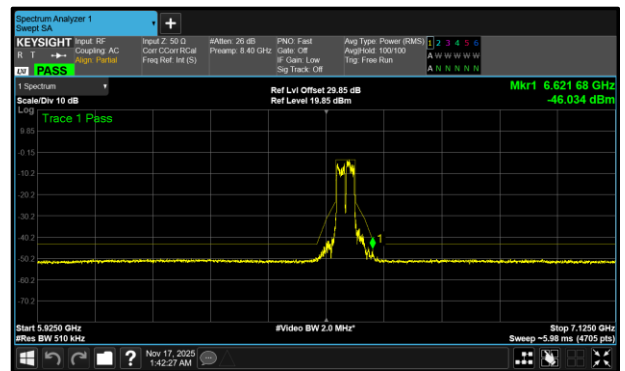


Figure 676 - B (Core 1) 802.11a40 SP 6565 MHz (CH123)

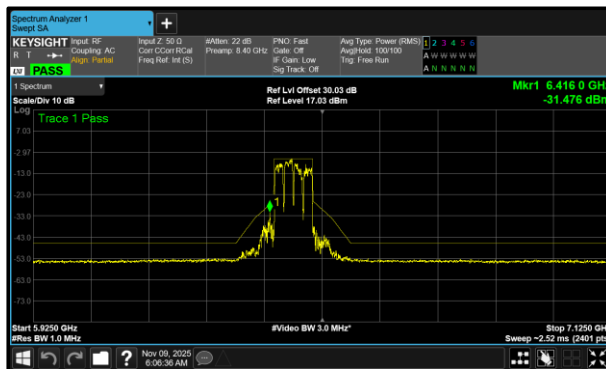


Figure 677 - B (Core 1) 802.11a80 SP 6465 MHz (CH103)

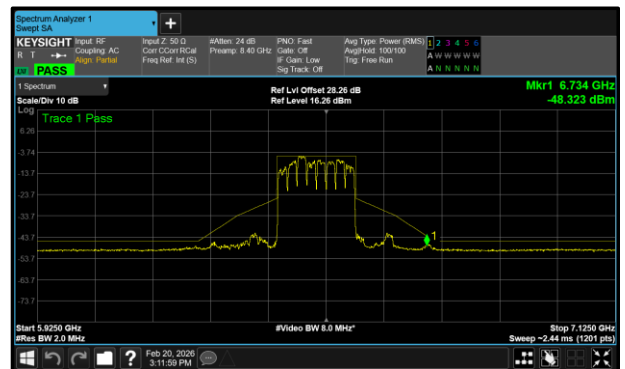


Figure 678 - B (Core 1) 802.11a160 SP 6505 MHz (CH111)

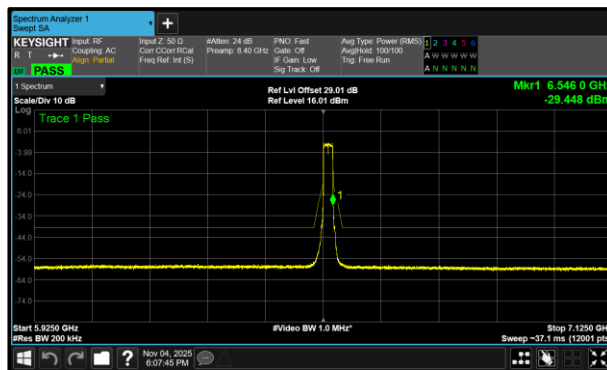


Figure 679 - B (Core 1) 802.11ax HE20 SU SP
6535 MHz (CH117)

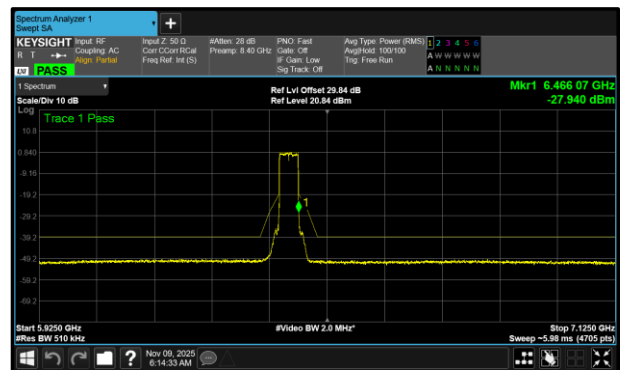


Figure 680 - B (Core 1) 802.11ax HE40 SU SP
6445 MHz (CH99)

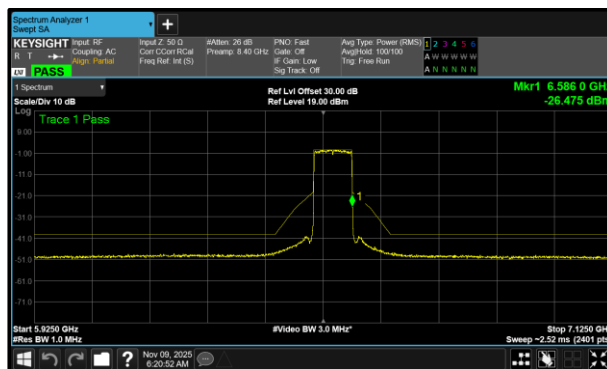


Figure 681 - B (Core 1) 802.11ax HE80 SU SP
6545 MHz (CH119)

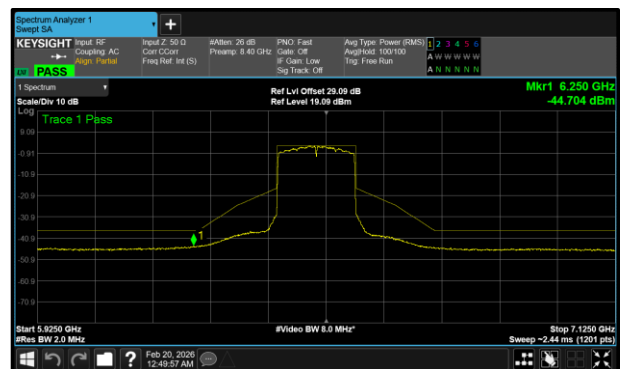


Figure 682 - A (Core 0) 802.11ax HE160 SU SP
6505 MHz (CH111)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a 20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	-	-11.81	-	-
6175	-	-7.09	-	-
6415	-	-7.37	-	-
6435	-	-7.43	-	-
6475	-	-6.92	-	-
6515	-	-7.21	-	-
6535	-	-6.83	-	-
6695	-	-8.00	-	-
6855	-	-7.37	-	-

Table 830 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a 40 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	-	-5.75	-	-
6165	-	-5.27	-	-
6405	-	-4.79	-	-
6445	-	-5.10	-	-
6485	-	-4.77	-	-
6525	-	-5.58	-	-
6565	-	-4.42	-	-
6685	-	-5.52	-	-
6845	-	-4.69	-	-

Table 831 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a 80 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	-	-5.68	-	-
6145	-	-3.86	-	-
6385	-	-4.34	-	-
6465	-	-3.83	-	-
6545	-	-3.95	-	-
6625	-	-4.04	-	-
6705	-	-4.47	-	-
6785	-	-4.07	-	-

Table 832 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a160 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	-	-3.28	-	-
6185	-	-3.26	-	-
6345	-	-3.35	-	-
6505	-	-1.72	-	-
6665	-	-3.44	-	-

Table 833 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	-	-14.08	-	-
6175	-	-10.04	-	-
6415	-	-10.58	-	-
6435	-	-11.32	-	-
6475	-	-10.86	-	-
6515	-	-11.07	-	-
6535	-	-9.75	-	-
6695	-	-10.18	-	-
6855	-	-11.05	-	-

Table 834 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	-	-10.68	-	-
6165	-	-8.85	-	-
6405	-	-10.90	-	-
6445	-	-8.81	-	-
6485	-	-10.29	-	-
6525	-	-10.63	-	-
6565	-	-9.52	-	-
6685	-	-9.56	-	-
6845	-	-8.68	-	-

Table 835 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	-	-10.18	-	-
6145	-	-7.57	-	-
6385	-	-8.83	-	-
6465	-	-8.26	-	-
6545	-	-7.18	-	-
6625	-	-7.97	-	-
6705	-	-7.49	-	-
6785	-	-8.85	-	-

Table 836 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	-	-9.69	-	-
6185	-	-8.09	-	-
6345	-	-7.94	-	-
6505	-	-7.39	-	-
6665	-	-7.68	-	-

Table 837 - Unwanted Emissions Within the Band Results



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 RU106 SP	-10.99	6684.000
802.11ax HE20 RU26 SP	-11.53	6866.000
802.11ax HE20 RU52 SP	-11.23	6526.100
802.11be EHT20 RU Size 106 + RU Size 26 SP	-10.19	6524.000
802.11be EHT20 RU Size 52 + RU Size 26 SP	-16.85	6464.000
802.11be EHT80 RU Size 484 + RU Size 242 SP	-7.13	6826.000
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary)	-6.35	5940.000
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary)	-8.35	6418.000
802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary)	-6.23	5936.000
802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary)	-7.11	5941.000

Table 838 - Unwanted Emissions Within the RLAN Band Summary Results Core 1 RU

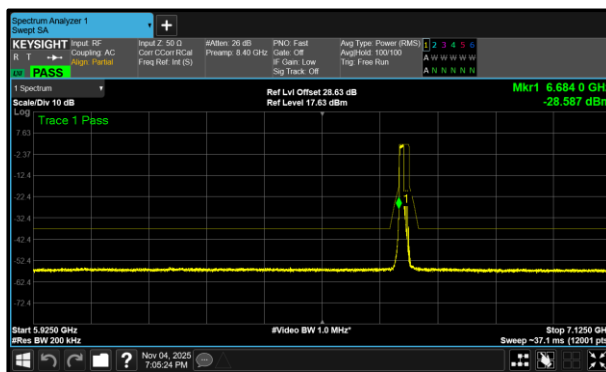


Figure 683 - B (Core 1) 802.11ax HE20 RU106 SP 6695 MHz (CH149)

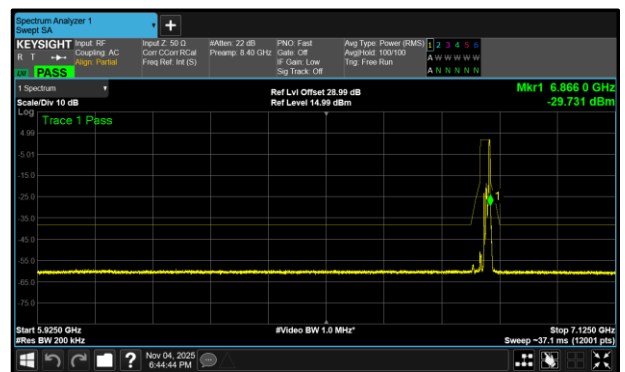


Figure 684 - B (Core 1) 802.11ax HE20 RU26 SP 6855 MHz (CH181)

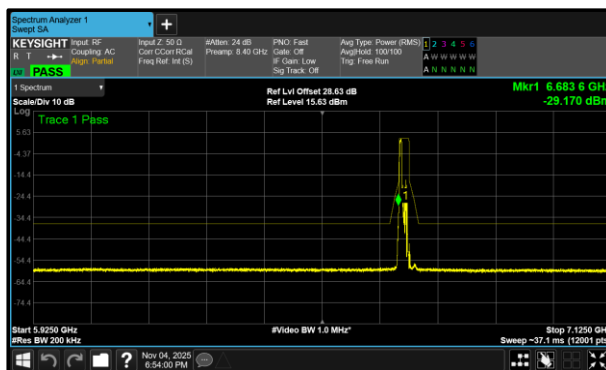


Figure 685 - B (Core 1) 802.11ax HE20 RU52 SP 6695 MHz (CH149)

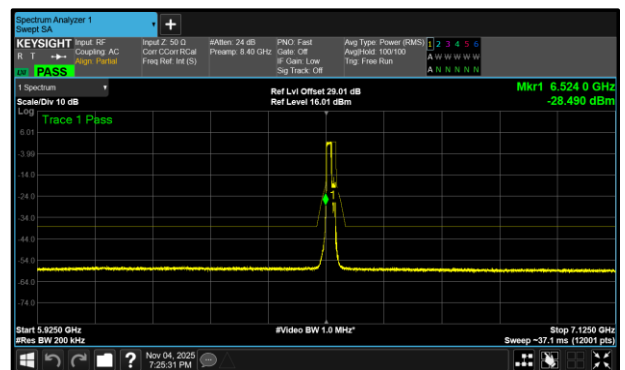


Figure 686 - B (Core 1) 802.11be EHT20 RU Size 106 + RU Size 26 SP 6535 MHz (CH117)

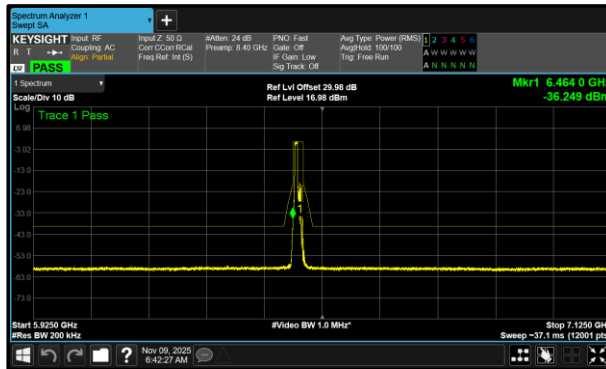


Figure 687 - B (Core 1) 802.11be EHT20 RU Size 52 + RU Size 26 SP 6475 MHz (CH105)

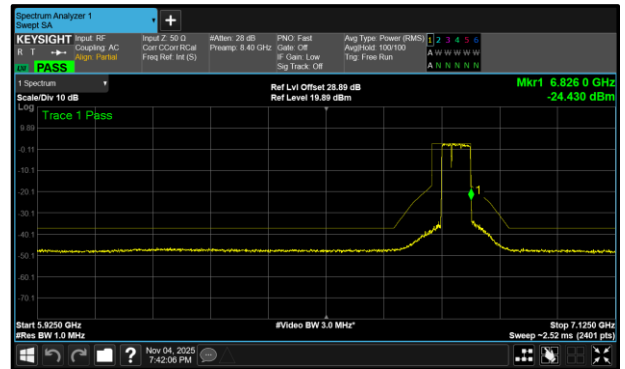


Figure 688 - B (Core 1) 802.11be EHT80 RU Size 484 + RU Size 242 SP 6785 MHz (CH167)

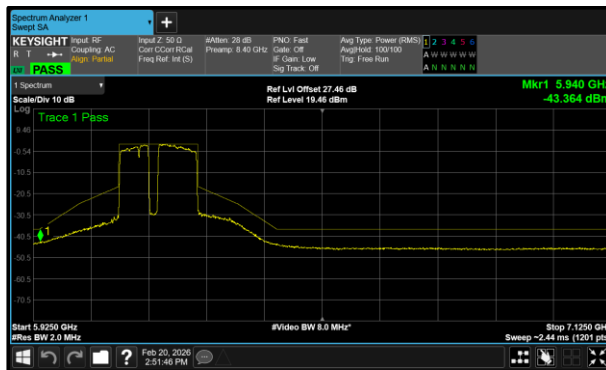


Figure 689 - B (Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary) 6185 MHz (CH47)

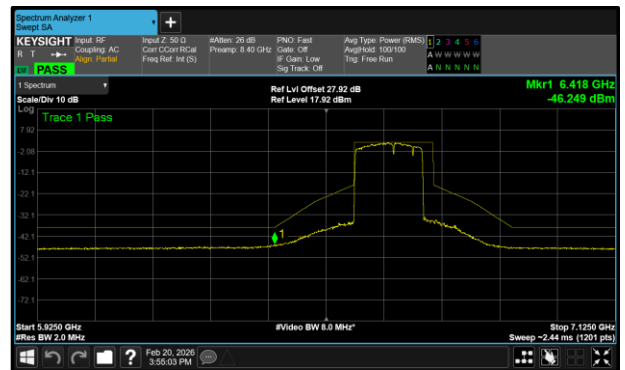


Figure 690 - B (Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary) 6665 MHz (CH143)

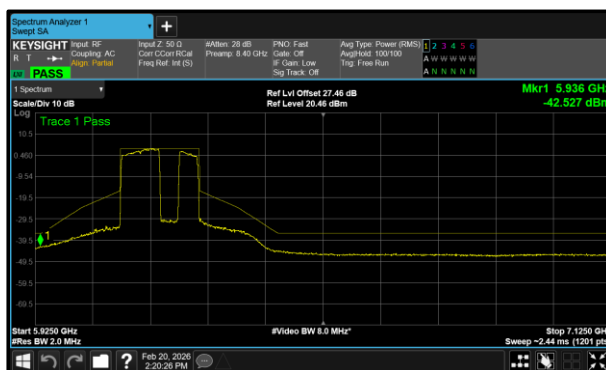


Figure 691 - B (Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary) 6665 MHz (CH143)

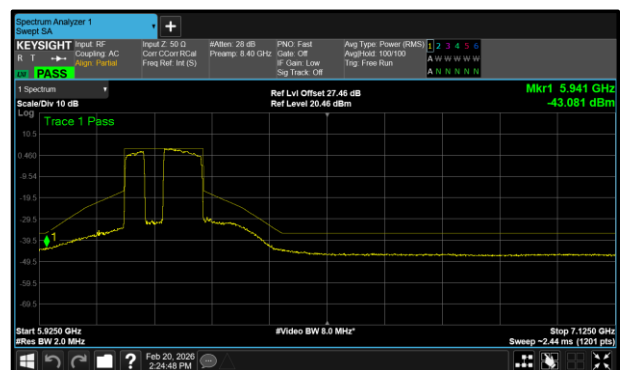


Figure 692 - B (Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary) 6185 MHz (CH47)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU26.0)	-	-15.21	-	-
6175 (RU26.0)	-	-13.31	-	-
6415 (RU26.8)	-	-12.80	-	-
6435 (RU26.0)	-	-13.34	-	-
6475 (RU26.0)	-	-13.34	-	-
6515 (RU26.8)	-	-12.59	-	-
6535 (RU26.0)	-	-12.64	-	-
6695 (RU26.0)	-	-12.97	-	-
6855 (RU26.8)	-	-11.53	-	-

Table 839 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU52.37)	-	-15.81	-	-
6175 (RU52.37)	-	-12.15	-	-
6415 (RU52.40)	-	-13.15	-	-
6435 (RU52.37)	-	-12.63	-	-
6475 (RU52.37)	-	-12.47	-	-
6515 (RU52.40)	-	-11.23	-	-
6535 (RU52.37)	-	-11.54	-	-
6695 (RU52.37)	-	-11.51	-	-
6855 (RU52.40)	-	-13.07	-	-

Table 840 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU106.53)	-	-14.64	-	-
6175 (RU106.53)	-	-12.22	-	-
6415 (RU106.54)	-	-11.92	-	-
6435 (RU106.53)	-	-11.44	-	-
6475 (RU106.53)	-	-12.57	-	-
6515 (RU106.54)	-	-12.77	-	-
6535 (RU106.53)	-	-12.53	-	-
6695 (RU106.53)	-	-10.99	-	-
6855 (RU106.54)	-	-12.78	-	-

Table 841 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU Size 52 + RU Size 26.70)	-	-18.85	-	-
6175 (RU Size 52 + RU Size 26.70)	-	-18.36	-	-
6415 (RU Size 52 + RU Size 26.72)	-	-17.56	-	-
6435 (RU Size 52 + RU Size 26.70)	-	-17.83	-	-
6475 (RU Size 52 + RU Size 26.70)	-	-16.85	-	-
6515 (RU Size 52 + RU Size 26.72)	-	-17.49	-	-
6535 (RU Size 52 + RU Size 26.70)	-	-18.37	-	-
6695 (RU Size 52 + RU Size 26.70)	-	-18.45	-	-
6855 (RU Size 52 + RU Size 26.72)	-	-18.21	-	-

Table 842 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU Size 106 + RU Size 26.82)	-	-15.46	-	-
6175 (RU Size 106 + RU Size 26.82)	-	-10.86	-	-
6415 (RU Size 106 + RU Size 26.83)	-	-11.38	-	-
6435 (RU Size 106 + RU Size 26.82)	-	-12.00	-	-
6475 (RU Size 106 + RU Size 26.82)	-	-10.62	-	-
6515 (RU Size 106 + RU Size 26.83)	-	-11.60	-	-
6535 (RU Size 106 + RU Size 26.82)	-	-10.19	-	-
6695 (RU Size 106 + RU Size 26.82)	-	-12.43	-	-
6855 (RU Size 106 + RU Size 26.83)	-	-12.36	-	-

Table 843 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985 (RU Size 484 + RU Size 242.93)	-	-9.93	-	-
6145 (RU Size 484 + RU Size 242.92)	-	-7.89	-	-
6385 (RU Size 484 + RU Size 242.90)	-	-8.33	-	-
6465 (RU Size 484 + RU Size 242.93)	-	-10.35	-	-
6545 (RU Size 484 + RU Size 242.90)	-	-7.43	-	-
6625 (RU Size 484 + RU Size 242.93)	-	-10.28	-	-
6705 (RU Size 484 + RU Size 242.91)	-	-7.36	-	-
6785 (RU Size 484 + RU Size 242.90)	-	-7.13	-	-

Table 844 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484.95)	-	-8.94	-	-
6345 (RU Size 996 + RU Size 484.94)	-	-6.23	-	-
6505 (RU Size 996 + RU Size 484.94)	-	-8.97	-	-
6665 (RU Size 996 + RU Size 484.94)	-	-9.25	-	-

Table 845 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025 (RU Size 996 + RU Size 484.95)	-	-8.94	-	-
6185 (RU Size 996 + RU Size 484.94)	-	-6.23	-	-
6665 (RU Size 996 + RU Size 484.95)	-	-9.25	-	-

Table 846 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484 + RU Size 242.97)	-	-7.57	-	-
6185 (RU Size 996 + RU Size 484 + RU Size 242.98)	-	-6.87	-	-
6185 (RU Size 996 + RU Size 484 + RU Size 242.99)	-	-6.35	-	-
6345 (RU Size 996 + RU Size 484 + RU Size 242.96)	-	-7.53	-	-
6505 (RU Size 996 + RU Size 484 + RU Size 242.96)	-	-8.46	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.96)	-	-9.17	-	-

Table 847 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025 (RU Size 996 + RU Size 484 + RU Size 242.99)	-	-9.50	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.99)	-	-8.41	-	-

Table 848 - Unwanted Emissions Within the Band Results



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11a20 SP	-7.00	6684.000
802.11a40 SP	-3.58	6135.204
802.11a80 SP	-1.98	6090.500
802.11a160 SP	-1.15	5930.000
802.11ax HE20 SU SP	-10.13	6526.000
802.11ax HE40 SU SP	-8.03	6823.980
802.11ax HE80 SU SP	-7.38	6186.000
802.11ax HE160 SU SP	-6.08	6417.000

Table 849 - Unwanted Emissions Within the RLAN Band Summary Results MIMO CDD SU

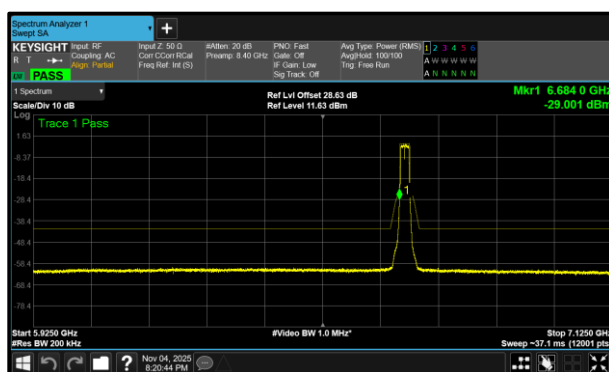


Figure 693 - B (Core 1) 802.11a20 SP 6695 MHz (CH149)



Figure 694 - B (Core 1) 802.11a40 SP 5965 MHz (CH3)

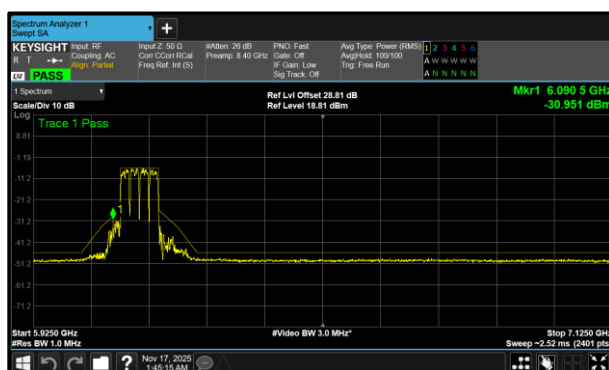


Figure 695 - B (Core 1) 802.11a80 SP 6145 MHz (CH39)

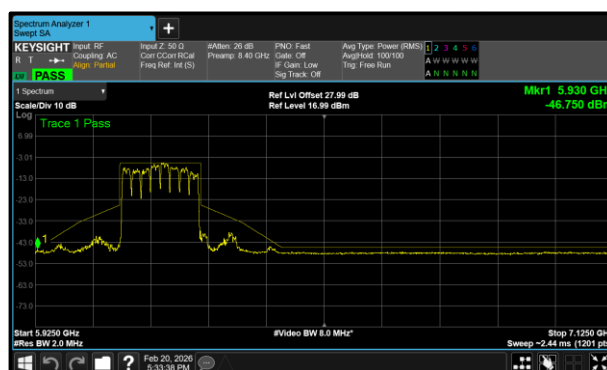


Figure 696 - A(Core 0) 802.11a160 SP 6185 MHz (CH47)

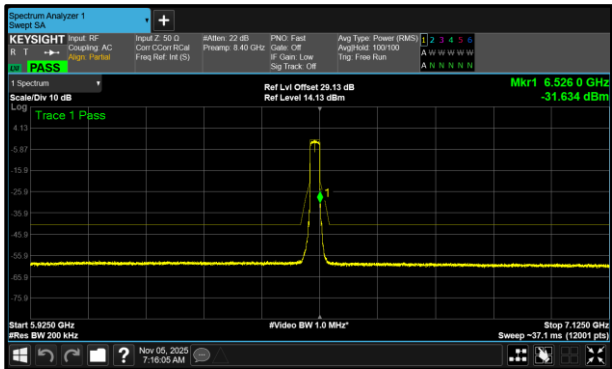


Figure 697 - B (Core 1) 802.11ax HE20 SU SP
6515 MHz (CH113)

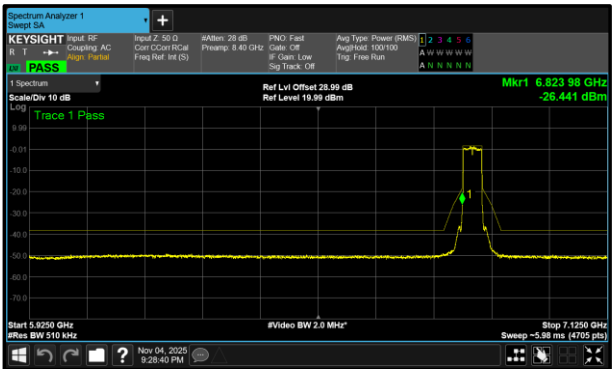


Figure 698 - B (Core 1) 802.11ax HE40 SU SP
6845 MHz (CH179)

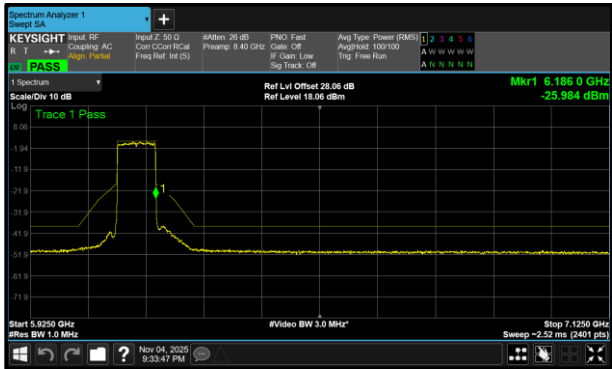


Figure 699 - B (Core 1) 802.11ax HE80 SU SP
6145 MHz (CH39)

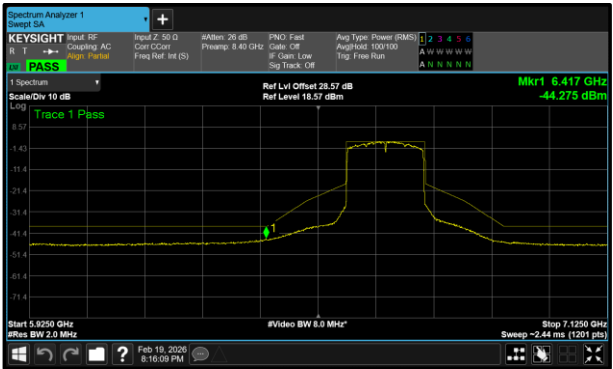


Figure 700 - B (Core 1) 802.11ax HE160 SU SP
6505 MHz (CH111)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a 20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	-12.14	-12.28	-	-
6175	-7.37	-7.39	-	-
6415	-7.24	-7.05	-	-
6435	-8.04	-7.31	-	-
6475	-7.16	-7.97	-	-
6515	-7.66	-7.75	-	-
6535	-7.23	-7.64	-	-
6695	-7.49	-7.00	-	-
6855	-7.40	-7.81	-	-

Table 850 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a 40 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	-6.90	-3.58	-	-
6165	-6.06	-4.08	-	-
6405	-5.08	-4.49	-	-
6445	-4.54	-4.79	-	-
6485	-5.57	-4.70	-	-
6525	-4.77	-6.31	-	-
6565	-3.78	-5.49	-	-
6685	-5.68	-5.81	-	-
6845	-6.13	-6.60	-	-

Table 851 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a 80 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	-4.73	-5.23	-	-
6145	-1.98	-3.75	-	-
6385	-4.45	-5.83	-	-
6465	-5.22	-4.89	-	-
6545	-4.10	-4.22	-	-
6625	-4.46	-2.49	-	-
6705	-3.90	-4.79	-	-
6785	-4.02	-5.03	-	-

Table 852 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a160 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	-3.78	-3.71	-	-
6185	-1.15	-3.65	-	-
6345	-3.08	-3.71	-	-
6505	-2.88	-0.83	-	-
6665	-2.65	-2.25	-	-

Table 853 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	-14.71	-14.06	-	-
6175	-10.56	-10.33	-	-
6415	-10.17	-10.75	-	-
6435	-11.84	-11.28	-	-
6475	-10.80	-10.88	-	-
6515	-10.82	-10.13	-	-
6535	-10.94	-11.89	-	-
6695	-11.51	-11.11	-	-
6855	-10.93	-10.85	-	-

Table 854 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	-11.22	-11.12	-	-
6165	-9.07	-10.09	-	-
6405	-8.78	-10.26	-	-
6445	-9.17	-9.25	-	-
6485	-9.56	-8.54	-	-
6525	-9.24	-9.62	-	-
6565	-8.64	-9.37	-	-
6685	-10.31	-9.73	-	-
6845	-8.11	-8.03	-	-

Table 855 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	-10.65	-10.63	-	-
6145	-8.36	-7.38	-	-
6385	-8.17	-8.02	-	-
6465	-7.57	-8.13	-	-
6545	-8.53	-8.34	-	-
6625	-7.70	-7.42	-	-
6705	-7.74	-7.70	-	-
6785	-7.59	-8.25	-	-

Table 856 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	-8.43	-8.25	-	-
6185	-7.36	-7.09	-	-
6345	-7.68	-7.69	-	-
6505	-7.29	-7.22	-	-
6665	-6.68	-6.08	-	-

Table 857 - Unwanted Emissions Within the Band Results



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 RU106 SP	-10.40	6683.900
802.11ax HE20 RU26 SP	-11.00	6526.000
802.11ax HE20 RU52 SP	-10.79	6464.000
802.11be EHT20 RU Size 106 + RU Size 26 SP	-10.46	6524.000
802.11be EHT20 RU Size 52 + RU Size 26 SP	-16.20	6526.000
802.11be EHT80 RU Size 484 + RU Size 242 SP	-7.31	6746.000
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary)	-6.91	6416.000
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary)	-6.75	5939.000
802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary)	-6.27	5936.000
802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary)	-5.38	5936.000

Table 858 - Unwanted Emissions Within the RLAN Band Summary Results MIMO CDD RU

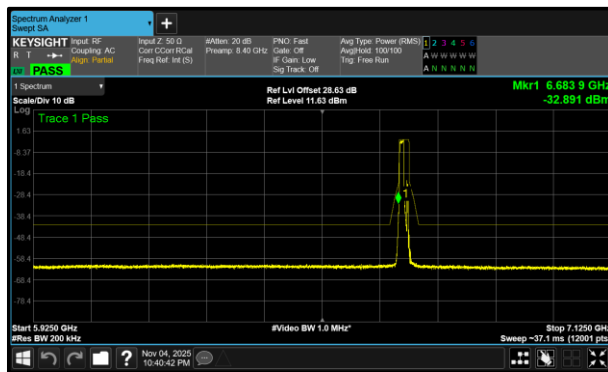


Figure 701 - B (Core 1) 802.11ax HE20 RU106 SP
6695 MHz (CH149)

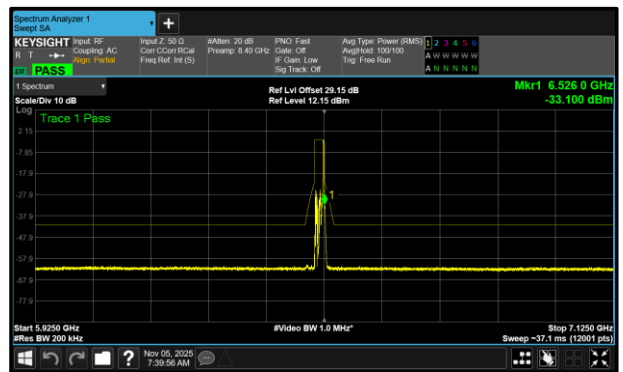


Figure 702 - A (Core 0) 802.11ax HE20 RU26 SP
6515 MHz (CH113)

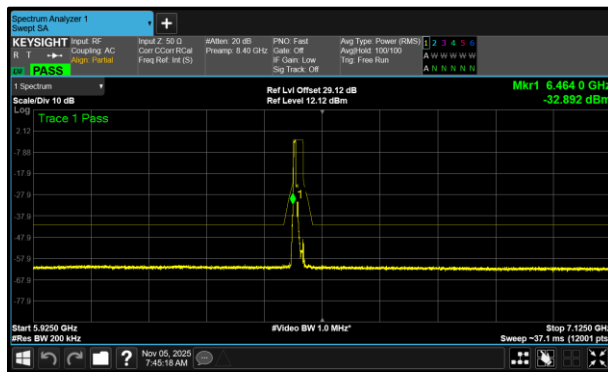


Figure 703 - A (Core 0) 802.11ax HE20 RU52 SP
6475 MHz (CH105)

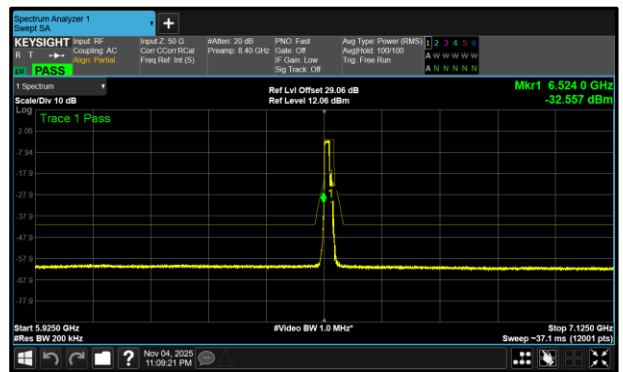


Figure 704 - A (Core 0) 802.11be EHT20 RU Size
106 + RU Size 26 SP 6535 MHz (CH117)

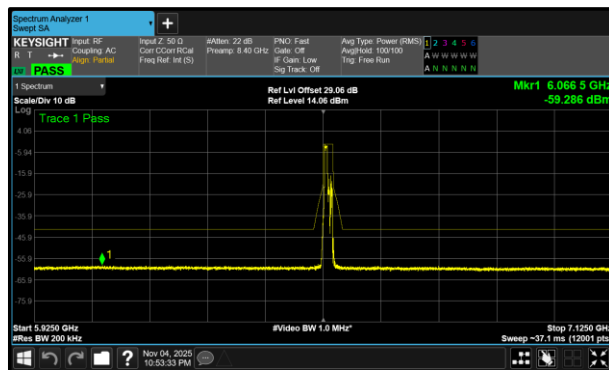


Figure 705 - A (Core 0) 802.11be EHT20 RU Size 52 + RU Size 26 SP 6535 MHz (CH117)

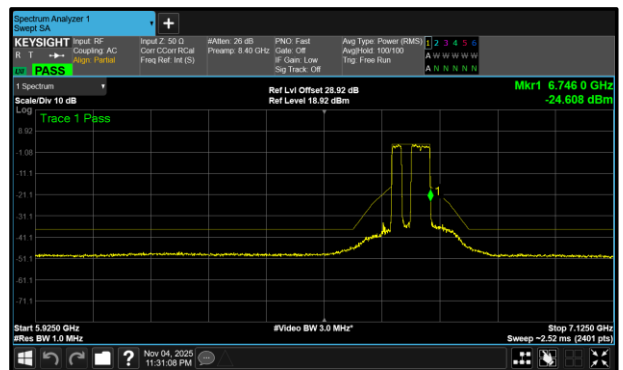


Figure 706 - A (Core 0) 802.11be EHT80 RU Size 484 + RU Size 242 SP 6705 MHz (CH151)

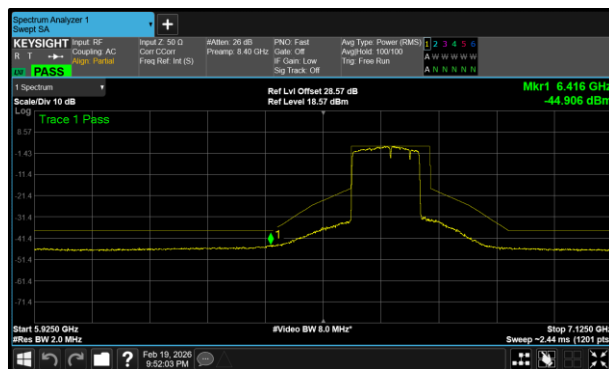


Figure 707 - B (Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary) 6665 MHz (CH143)

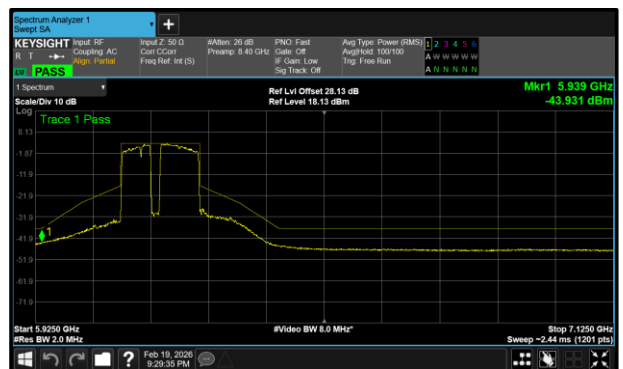


Figure 708 - B (Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary) 6185 MHz (CH47)

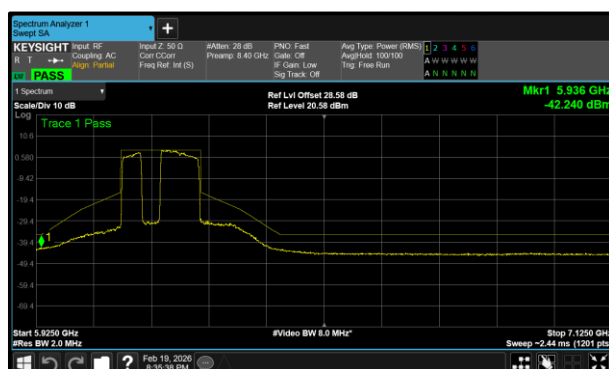


Figure 709 - A (Core 0) 802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary) 6185 MHz (CH47)

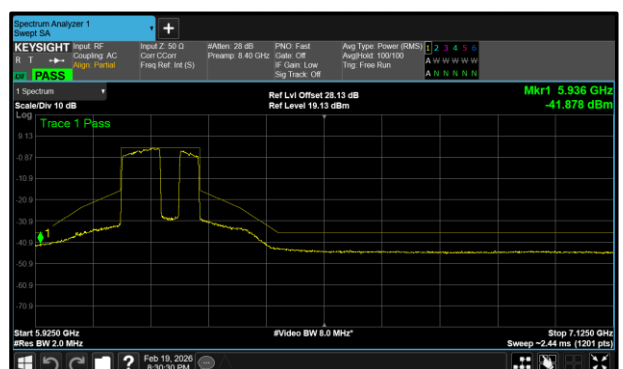


Figure 710 - B (Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary) 6185 MHz (CH47)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU26.0)	-14.88	-14.35	-	-
6175 (RU26.0)	-13.37	-11.94	-	-
6415 (RU26.8)	-13.05	-12.99	-	-
6435 (RU26.0)	-11.88	-12.70	-	-
6475 (RU26.0)	-11.06	-11.87	-	-
6515 (RU26.8)	-11.00	-12.91	-	-
6535 (RU26.0)	-12.16	-11.16	-	-
6695 (RU26.0)	-11.61	-12.61	-	-
6855 (RU26.8)	-12.94	-12.37	-	-

Table 859 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU52.37)	-14.15	-15.02	-	-
6175 (RU52.37)	-12.79	-13.10	-	-
6415 (RU52.40)	-11.82	-12.72	-	-
6435 (RU52.37)	-12.69	-12.17	-	-
6475 (RU52.37)	-10.79	-11.74	-	-
6515 (RU52.40)	-12.69	-11.33	-	-
6535 (RU52.37)	-10.99	-11.07	-	-
6695 (RU52.37)	-11.73	-11.07	-	-
6855 (RU52.40)	-12.59	-11.22	-	-

Table 860 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU106.53)	-16.98	-15.35	-	-
6175 (RU106.53)	-11.67	-12.99	-	-
6415 (RU106.54)	-11.91	-11.71	-	-
6435 (RU106.53)	-10.81	-11.18	-	-
6475 (RU106.53)	-11.79	-10.48	-	-
6515 (RU106.54)	-11.65	-11.31	-	-
6535 (RU106.53)	-11.29	-11.84	-	-
6695 (RU106.53)	-12.58	-10.40	-	-
6855 (RU106.54)	-11.43	-12.52	-	-

Table 861 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU Size 52 + RU Size 26.70)	-19.67	-19.04	-	-
6175 (RU Size 52 + RU Size 26.70)	-17.64	-18.17	-	-
6415 (RU Size 52 + RU Size 26.72)	-17.88	-19.12	-	-
6435 (RU Size 52 + RU Size 26.70)	-18.03	-17.85	-	-
6475 (RU Size 52 + RU Size 26.70)	-18.16	-18.57	-	-
6515 (RU Size 52 + RU Size 26.72)	-16.20	-18.69	-	-
6535 (RU Size 52 + RU Size 26.70)	-17.09	-18.74	-	-
6695 (RU Size 52 + RU Size 26.70)	-18.03	-18.33	-	-
6855 (RU Size 52 + RU Size 26.72)	-19.05	-18.44	-	-

Table 862 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU Size 106 + RU Size 26.82)	-16.49	-15.78	-	-
6175 (RU Size 106 + RU Size 26.82)	-10.58	-12.79	-	-
6415 (RU Size 106 + RU Size 26.83)	-11.36	-12.21	-	-
6435 (RU Size 106 + RU Size 26.82)	-11.30	-11.98	-	-
6475 (RU Size 106 + RU Size 26.82)	-10.91	-11.13	-	-
6515 (RU Size 106 + RU Size 26.83)	-11.00	-10.52	-	-
6535 (RU Size 106 + RU Size 26.82)	-10.46	-11.18	-	-
6695 (RU Size 106 + RU Size 26.82)	-10.76	-10.67	-	-
6855 (RU Size 106 + RU Size 26.83)	-12.31	-11.87	-	-

Table 863 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985 (RU Size 484 + RU Size 242.93)	-10.88	-9.59	-	-
6145 (RU Size 484 + RU Size 242.92)	-7.64	-9.45	-	-
6385 (RU Size 484 + RU Size 242.90)	-8.44	-8.42	-	-
6465 (RU Size 484 + RU Size 242.93)	-9.03	-8.75	-	-
6545 (RU Size 484 + RU Size 242.90)	-9.35	-8.88	-	-
6625 (RU Size 484 + RU Size 242.93)	-10.31	-9.66	-	-
6705 (RU Size 484 + RU Size 242.91)	-7.31	-7.85	-	-
6785 (RU Size 484 + RU Size 242.90)	-8.56	-8.13	-	-

Table 864 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484.95)	-6.27	-7.01	-	-
6345 (RU Size 996 + RU Size 484.94)	-9.45	-9.20	-	-
6505 (RU Size 996 + RU Size 484.94)	-9.21	-9.72	-	-
6665 (RU Size 996 + RU Size 484.94)	-8.63	-8.11	-	-

Table 865 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025 (RU Size 996 + RU Size 484.95)	-8.22	-8.87	-	-
6185 (RU Size 996 + RU Size 484.94)	-6.07	-5.38	-	-
6665 (RU Size 996 + RU Size 484.95)	-7.96	-7.68	-	-

Table 866 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025 (RU Size 996 + RU Size 484 + RU Size 242.99)	-9.31	-9.01	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.53	-6.91	-	-

Table 867 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484 + RU Size 242.97)	-8.14	-7.49	-	-
6185 (RU Size 996 + RU Size 484 + RU Size 242.98)	-7.33	-6.96	-	-
6185 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.10	-6.75	-	-
6345 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.77	-8.47	-	-
6505 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.06	-7.62	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.79	-7.36	-	-

Table 868 - Unwanted Emissions Within the Band Results

Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU SP	-9.61	6164.000
802.11ax HE40 SU SP	-8.25	6423.724
802.11ax HE80 SU SP	-7.37	6186.000
802.11ax HE160 SU SP	-6.24	6418.000

Table 869 - Unwanted Emissions Within the RLAN Band Summary Results MIMO SDM SU

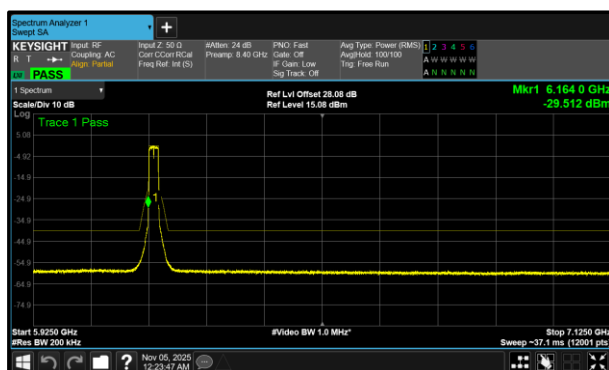


**Figure 711 - B (Core 1) 802.11ax HE20 SU SP
6175 MHz (CH45)**

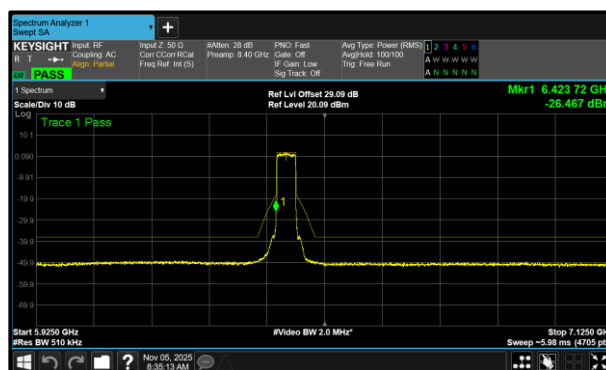


**Figure 712 - A (Core 0) 802.11ax HE40 SU SP
6445 MHz (CH99)**

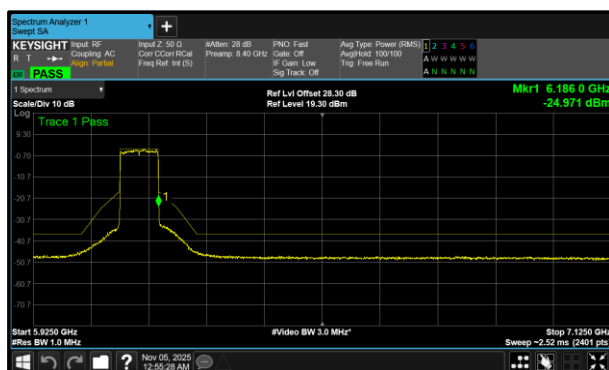


**Figure 713 - A (Core 0) 802.11ax HE80 SU SP
6145 MHz (CH39)**

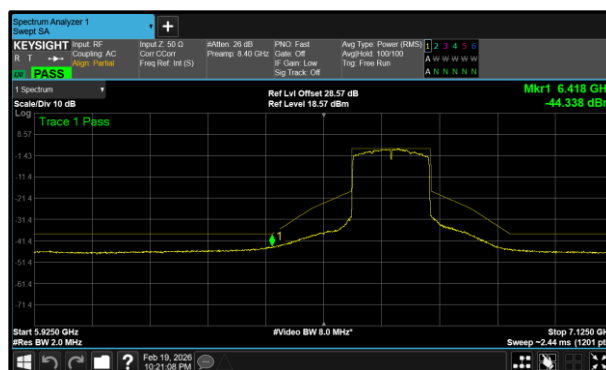


**Figure 714 - B (Core 1) 802.11ax HE160 SU SP
6665 MHz (CH143)**



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	-14.78	-15.86	-	-
6175	-11.06	-9.61	-	-
6415	-10.26	-10.56	-	-
6435	-11.17	-10.71	-	-
6475	-11.65	-10.88	-	-
6515	-9.75	-10.87	-	-
6535	-11.79	-11.05	-	-
6695	-11.45	-10.55	-	-
6855	-10.84	-10.80	-	-

Table 870 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	-11.79	-11.42	-	-
6165	-8.83	-9.94	-	-
6405	-9.53	-10.14	-	-
6445	-8.25	-9.27	-	-
6485	-8.36	-10.02	-	-
6525	-9.53	-8.68	-	-
6565	-9.64	-9.52	-	-
6685	-9.68	-10.47	-	-
6845	-9.46	-9.33	-	-

Table 871 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	-10.77	-9.99	-	-
6145	-7.37	-7.81	-	-
6385	-7.88	-8.56	-	-
6465	-8.23	-7.92	-	-
6545	-8.37	-7.91	-	-
6625	-8.10	-7.46	-	-
6705	-7.40	-7.88	-	-
6785	-7.74	-7.73	-	-

Table 872 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	-8.18	-8.04	-	-
6185	-6.92	-6.72	-	-
6345	-7.27	-7.16	-	-
6505	-6.71	-6.36	-	-
6665	-6.94	-6.24	-	-

Table 873 - Unwanted Emissions Within the Band Results



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 RU106 SP	-10.04	6163.900
802.11ax HE20 RU26 SP	-10.15	6524.000
802.11ax HE20 RU52 SP	-10.37	6526.000
802.11be EHT20 RU Size 106 + RU Size 26 SP	-10.83	6866.000
802.11be EHT20 RU Size 52 + RU Size 26 SP	-17.01	6164.000
802.11be EHT80 RU Size 484 + RU Size 242 SP	-7.49	6746.000
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary)	-6.28	5938.000
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary)	-7.20	6412.000
802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary)	-5.55	5939.000
802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary)	-8.30	6257.000

Table 874 - Unwanted Emissions Within the RLAN Band Summary Results MIMO SDM RU

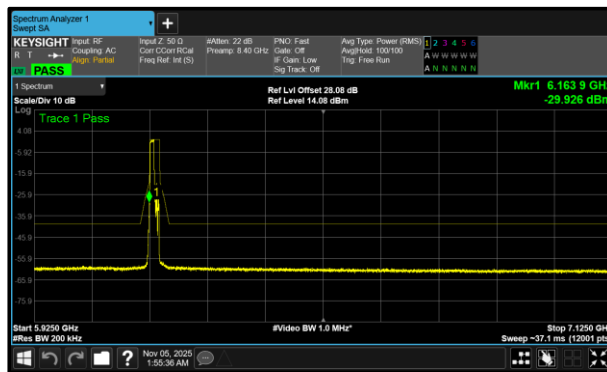


Figure 715 - B (Core 1) 802.11ax HE20 RU106 SP
6175 MHz (CH45)

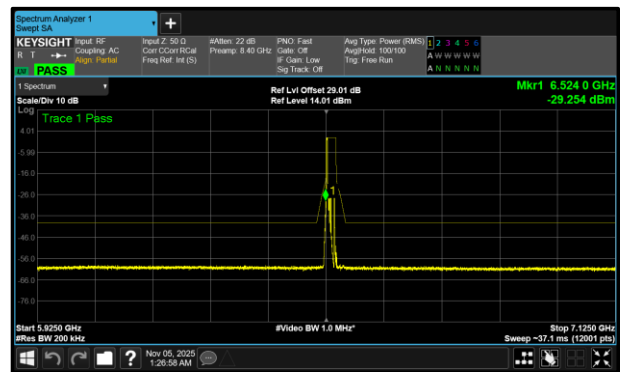


Figure 716 - B (Core 1) 802.11ax HE20 RU26 SP
6535 MHz (CH117)

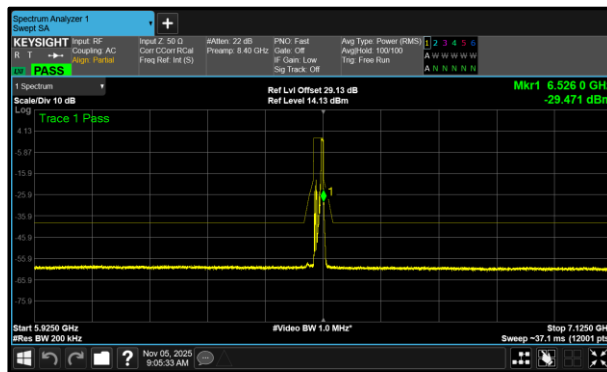


Figure 717 - B (Core 1) 802.11ax HE20 RU52 SP
6515 MHz (CH113)

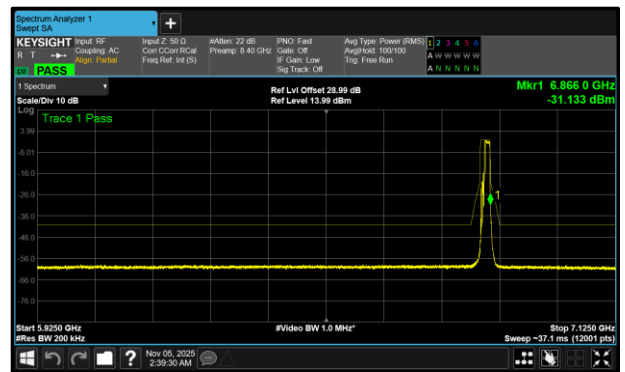


Figure 718 - B (Core 1) 802.11be EHT20 RU Size
106 + RU Size 26 SP 6855 MHz (CH181)

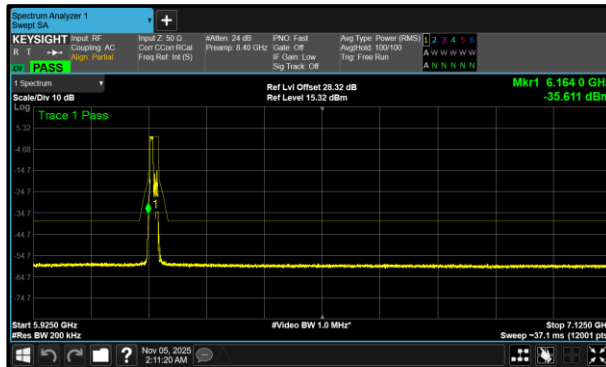


Figure 719 - A (Core 0) 802.11be EHT20 RU Size 52 + RU Size 26 SP 6175 MHz (CH45)

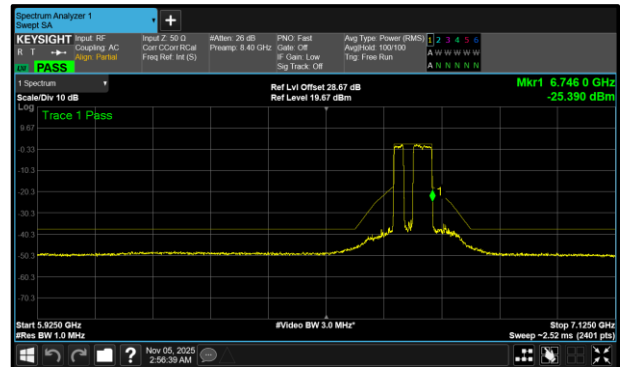


Figure 720 - B (Core 1) 802.11be EHT80 RU Size 484 + RU Size 242 SP 6705 MHz (CH151)

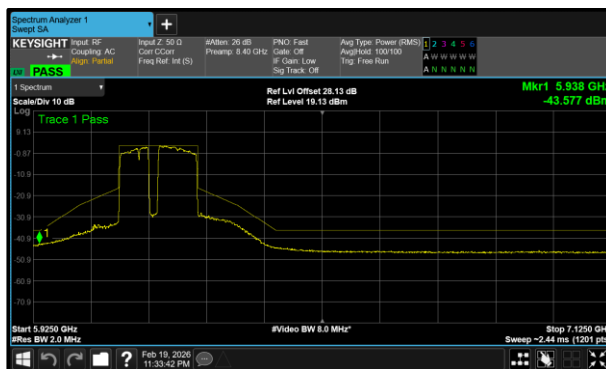


Figure 721 - B (Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary) 6185 MHz (CH47)

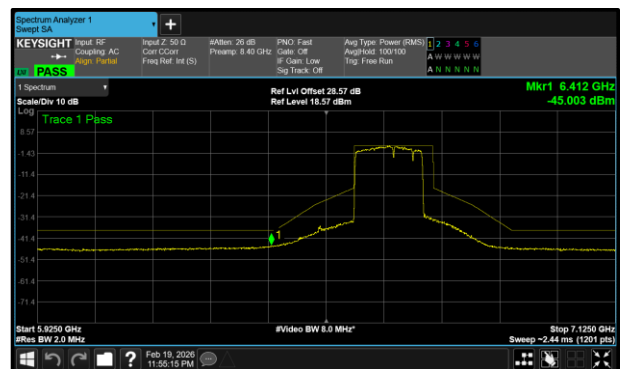


Figure 722 - B (Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary) 6665 MHz (CH143)

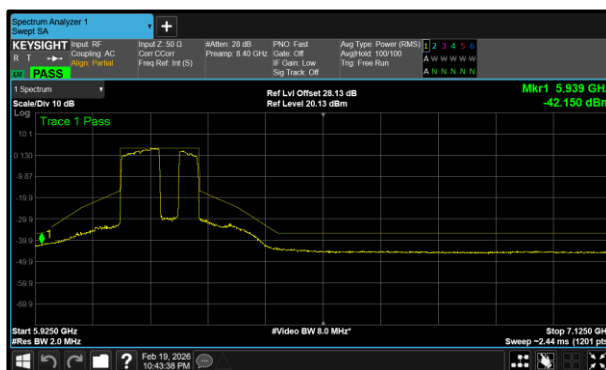


Figure 723 - B (Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary) 6185 MHz (CH47)

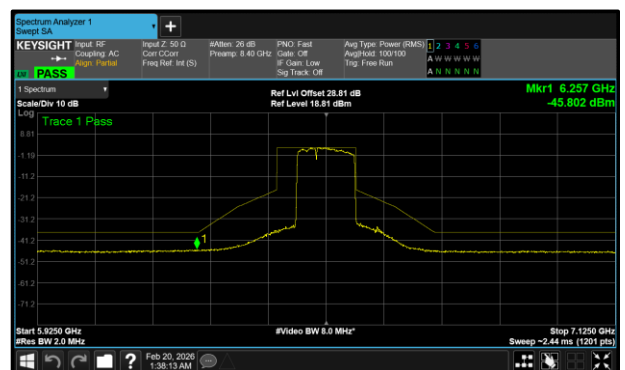


Figure 724 - B (Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary) 6505 MHz (CH111)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU26.0)	-15.31	-15.37	-	-
6175 (RU26.0)	-11.73	-13.00	-	-
6415 (RU26.8)	-11.99	-13.18	-	-
6435 (RU26.0)	-11.92	-12.78	-	-
6475 (RU26.0)	-12.22	-12.45	-	-
6515 (RU26.8)	-12.72	-13.88	-	-
6535 (RU26.0)	-12.71	-10.15	-	-
6695 (RU26.0)	-11.51	-12.02	-	-
6855 (RU26.8)	-13.25	-11.73	-	-

Table 875 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU52.37)	-14.16	-14.15	-	-
6175 (RU52.37)	-11.82	-13.01	-	-
6415 (RU52.40)	-12.25	-11.46	-	-
6435 (RU52.37)	-12.03	-11.90	-	-
6475 (RU52.37)	-11.54	-11.23	-	-
6515 (RU52.40)	-13.06	-10.37	-	-
6535 (RU52.37)	-12.36	-11.30	-	-
6695 (RU52.37)	-11.86	-11.00	-	-
6855 (RU52.40)	-11.18	-11.57	-	-

Table 876 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU106.53)	-16.33	-16.37	-	-
6175 (RU106.53)	-11.10	-10.04	-	-
6415 (RU106.54)	-11.25	-11.89	-	-
6435 (RU106.53)	-12.05	-11.02	-	-
6475 (RU106.53)	-12.04	-12.32	-	-
6515 (RU106.54)	-12.04	-12.80	-	-
6535 (RU106.53)	-12.41	-12.01	-	-
6695 (RU106.53)	-12.22	-11.74	-	-
6855 (RU106.54)	-13.61	-12.38	-	-

Table 877 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU Size 52 + RU Size 26.70)	-19.25	-18.46	-	-
6175 (RU Size 52 + RU Size 26.70)	-17.01	-19.21	-	-
6415 (RU Size 52 + RU Size 26.72)	-17.89	-18.13	-	-
6435 (RU Size 52 + RU Size 26.70)	-17.57	-18.05	-	-
6475 (RU Size 52 + RU Size 26.70)	-18.33	-18.52	-	-
6515 (RU Size 52 + RU Size 26.72)	-18.19	-18.51	-	-
6535 (RU Size 52 + RU Size 26.70)	-18.00	-18.03	-	-
6695 (RU Size 52 + RU Size 26.70)	-17.84	-17.42	-	-
6855 (RU Size 52 + RU Size 26.72)	-18.38	-17.90	-	-

Table 878 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU Size 106 + RU Size 26.82)	-15.36	-14.07	-	-
6175 (RU Size 106 + RU Size 26.82)	-11.91	-11.41	-	-
6415 (RU Size 106 + RU Size 26.83)	-12.08	-11.13	-	-
6435 (RU Size 106 + RU Size 26.82)	-11.91	-11.35	-	-
6475 (RU Size 106 + RU Size 26.82)	-11.10	-11.35	-	-
6515 (RU Size 106 + RU Size 26.83)	-11.65	-11.50	-	-
6535 (RU Size 106 + RU Size 26.82)	-10.90	-11.67	-	-
6695 (RU Size 106 + RU Size 26.82)	-12.53	-11.29	-	-
6855 (RU Size 106 + RU Size 26.83)	-11.32	-10.83	-	-

Table 879 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985 (RU Size 484 + RU Size 242.93)	-10.43	-9.68	-	-
6145 (RU Size 484 + RU Size 242.92)	-7.82	-7.75	-	-
6385 (RU Size 484 + RU Size 242.90)	-9.63	-9.03	-	-
6465 (RU Size 484 + RU Size 242.93)	-8.75	-8.50	-	-
6545 (RU Size 484 + RU Size 242.90)	-8.86	-9.16	-	-
6625 (RU Size 484 + RU Size 242.93)	-10.07	-10.24	-	-
6705 (RU Size 484 + RU Size 242.91)	-7.98	-7.49	-	-
6785 (RU Size 484 + RU Size 242.90)	-9.11	-9.33	-	-

Table 880 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484.94)	-5.89	-5.55	-	-
6665 (RU Size 996 + RU Size 484.95)	-8.15	-8.25	-	-

Table 881 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025 (RU Size 996 + RU Size 484.94)	-8.53	-8.15	-	-
6185 (RU Size 996 + RU Size 484.94)	-9.33	-9.04	-	-
6345 (RU Size 996 + RU Size 484.94)	-9.56	-9.37	-	-
6505 (RU Size 996 + RU Size 484.94)	-8.47	-8.30	-	-
6665 (RU Size 996 + RU Size 484.94)	-8.69	-8.38	-	-

Table 882 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.81	-7.57	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.30	-7.20	-	-

Table 883 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484 + RU Size 242.97)	-8.07	-7.68	-	-
6185 (RU Size 996 + RU Size 484 + RU Size 242.98)	-7.15	-6.82	-	-
6185 (RU Size 996 + RU Size 484 + RU Size 242.99)	-6.92	-6.28	-	-
6345 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.33	-8.40	-	-
6505 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.94	-7.39	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.96)	-9.30	-7.82	-	-

Table 884 - Unwanted Emissions Within the Band Results



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU SP	-10.23	6524.000
802.11ax HE40 SU SP	-7.83	6186.224
802.11ax HE80 SU SP	-7.38	6186.000
802.11ax HE160 SU SP	-7.07	5933.000

Table 885 - Unwanted Emissions Within the RLAN Band Summary Results TxBF

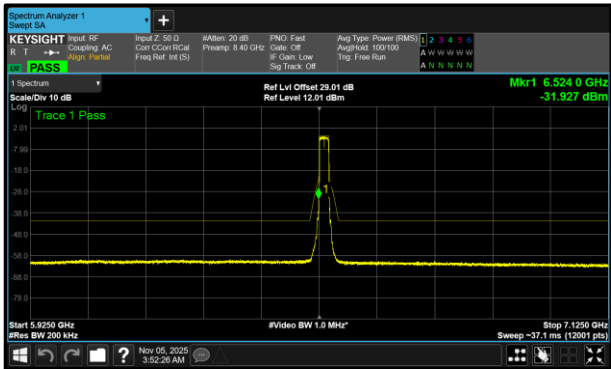


Figure 725 - B (Core 1) 802.11ax HE20 SU SP
6535 MHz (CH117)

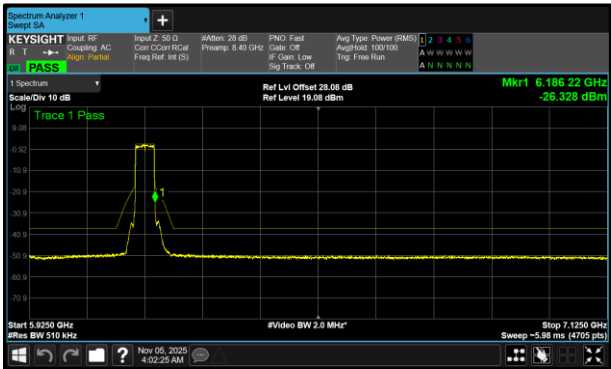


Figure 726 - B (Core 1) 802.11ax HE40 SU SP
6165 MHz (CH43)

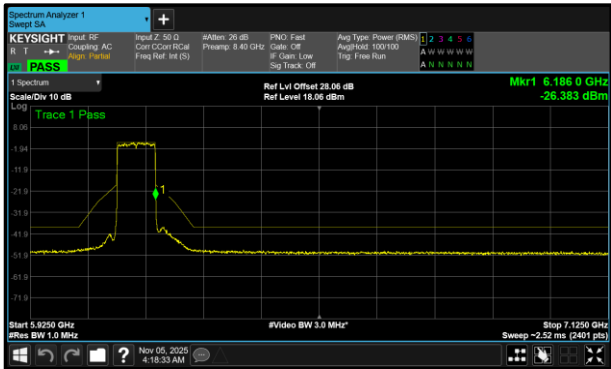


Figure 727 - B (Core 1) 802.11ax HE80 SU SP
6145 MHz (CH39)

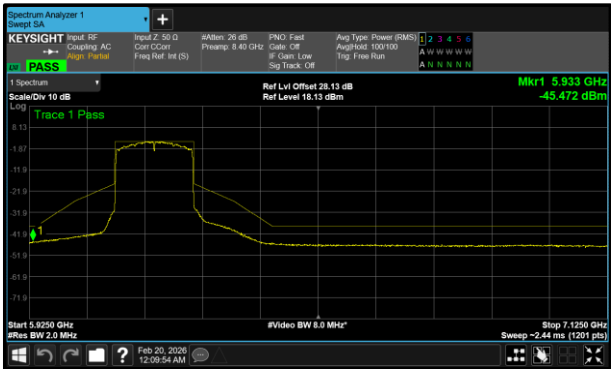


Figure 728 - B (Core 1) 802.11ax HE160 SU SP
6185 MHz (CH47)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	-15.84	-14.85	-	-
6175	-11.56	-11.30	-	-
6415	-10.58	-11.01	-	-
6435	-11.59	-10.72	-	-
6475	-10.71	-11.44	-	-
6515	-11.17	-10.59	-	-
6535	-10.77	-10.23	-	-
6695	-11.52	-10.80	-	-
6855	-11.16	-10.44	-	-

Table 886 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	-10.46	-10.65	-	-
6165	-9.83	-7.83	-	-
6405	-8.84	-8.39	-	-
6445	-8.72	-10.03	-	-
6485	-10.28	-9.87	-	-
6525	-8.62	-9.68	-	-
6565	-9.27	-10.00	-	-
6685	-8.60	-9.82	-	-
6845	-8.92	-8.09	-	-

Table 887 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	-10.32	-10.32	-	-
6145	-8.15	-7.38	-	-
6385	-9.00	-8.50	-	-
6465	-9.23	-7.90	-	-
6545	-8.75	-8.64	-	-
6625	-8.40	-7.43	-	-
6705	-7.99	-8.64	-	-
6785	-7.69	-8.10	-	-

Table 888 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain Id(s):	0+1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	-7.56	-9.21	-	-
6185	-7.30	-7.07	-	-
6345	-7.81	-9.01	-	-
6505	-8.54	-6.46	-	-
6665	-8.38	-7.80	-	-

Table 889 - Unwanted Emissions Within the Band Results

Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11a20 VLP	-7.09	6504.000
802.11a40 VLP	-3.59	6163.270
802.11a80 VLP	-3.29	6333.000
802.11a160 VLP	-1.84	6346.000
802.11ax HE20 SU VLP	-10.27	6464.000
802.11ax HE40 SU VLP	-8.53	6426.020
802.11ax HE80 SU VLP	-7.24	7066.000
802.11ax HE160 SU VLP	-6.84	6364.000

Table 890 - Unwanted Emissions Within the RLAN Band Summary Results Core 0 SU

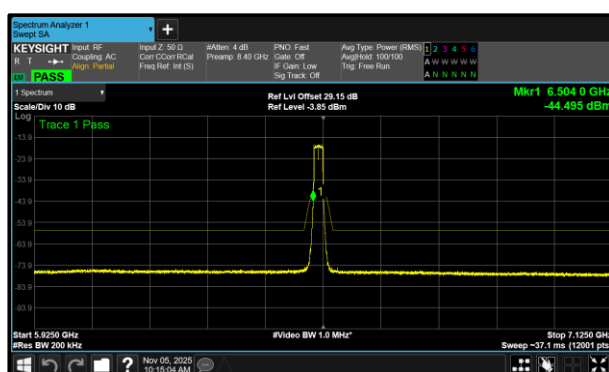


Figure 729 - A (Core 0) 802.11a20 VLP 6515 MHz (CH113)

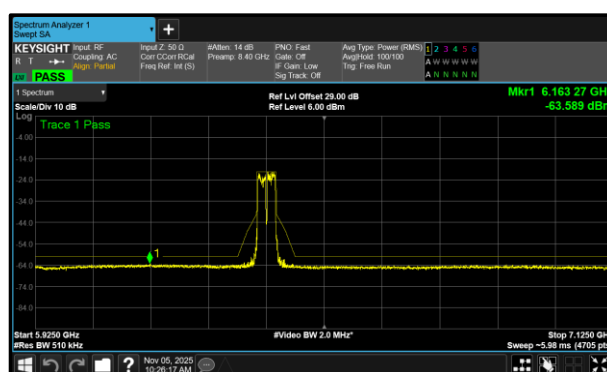


Figure 731 - A (Core 0) 802.11a40 VLP 6405 MHz (CH91)

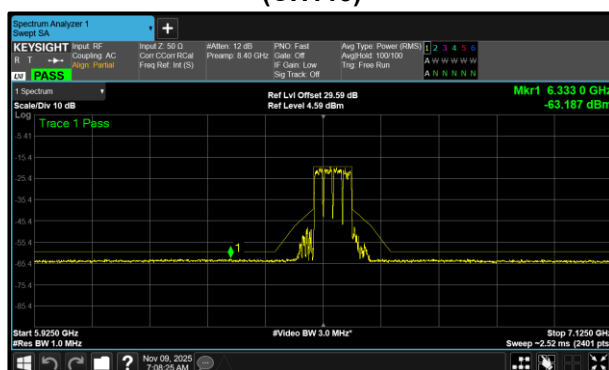


Figure 730 - A (Core 0) 802.11a80 VLP 6545 MHz (CH119)





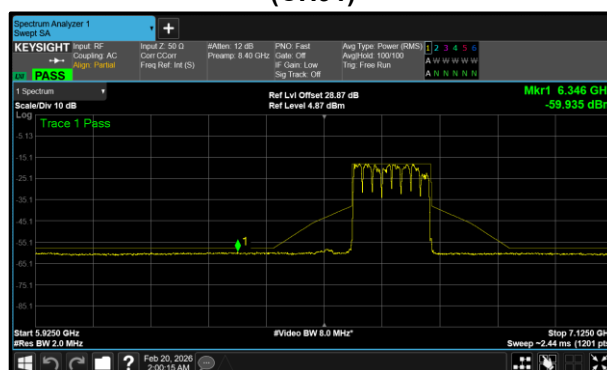


Figure 732 - A (Core 0) 802.11a160 VLP 6665 MHz (CH143)

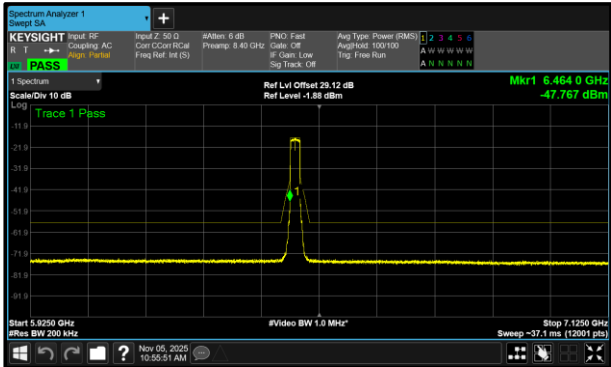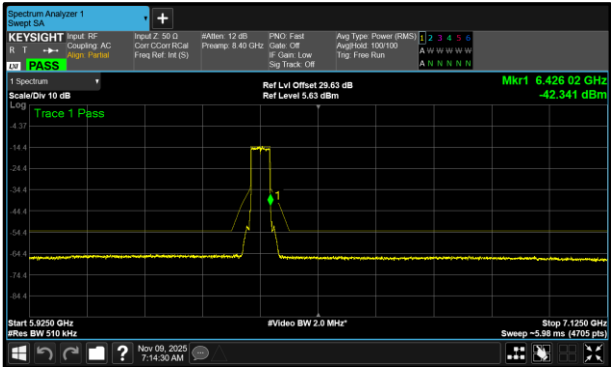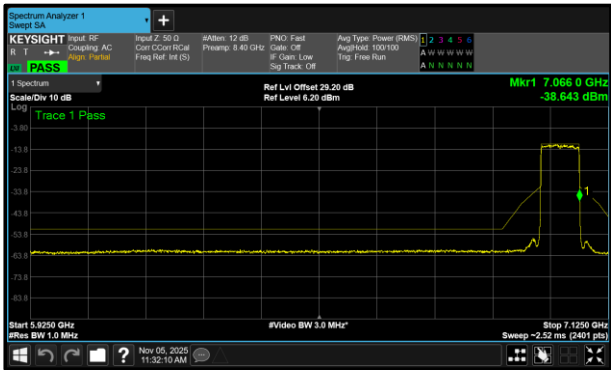

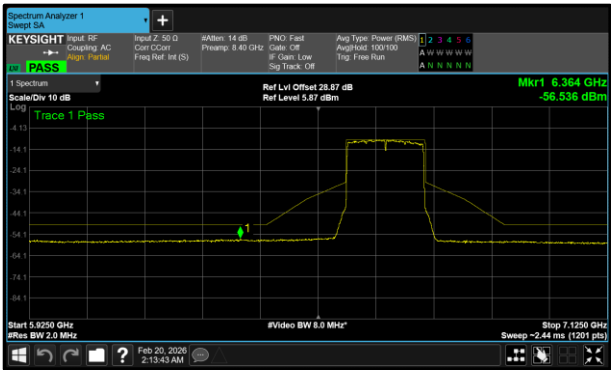

Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a 20 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115	-7.50	-	-	-
6275	-7.70	-	-	-
6415	-7.68	-	-	-
6435	-7.54	-	-	-
6475	-7.26	-	-	-
6515	-7.09	-	-	-
6535	-7.52	-	-	-
6695	-7.17	-	-	-
6855	-7.67	-	-	-
6875	-8.00	-	-	-
6895	-7.61	-	-	-
6995	-7.95	-	-	-
7095	-7.59	-	-	-
7115	-11.87	-	-	-

Table 891 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a 40 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6125	-4.90	-	-	-
6285	-4.93	-	-	-
6405	-3.59	-	-	-
6445	-5.27	-	-	-
6485	-3.71	-	-	-
6525	-6.03	-	-	-
6565	-5.60	-	-	-
6685	-5.55	-	-	-
6845	-5.37	-	-	-
6885	-7.21	-	-	-
6925	-5.51	-	-	-
7005	-6.51	-	-	-
7085	-5.20	-	-	-

Table 892 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a 80 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6145	-5.97	-	-	-
6225	-4.09	-	-	-
6385	-3.85	-	-	-
6465	-4.43	-	-	-
6545	-3.29	-	-	-
6625	-3.73	-	-	-
6705	-4.76	-	-	-
6785	-5.06	-	-	-
6865	-5.44	-	-	-
6945	-4.65	-	-	-
7025	-5.35	-	-	-

Table 893 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a160 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185	-2.74	-	-	-
6345	-3.59	-	-	-
6505	-2.27	-	-	-
6665	-1.84	-	-	-
6825	-4.66	-	-	-
6985	-4.75	-	-	-

Table 894 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115	-10.80	-	-	-
6275	-11.85	-	-	-
6415	-10.99	-	-	-
6435	-11.21	-	-	-
6475	-10.27	-	-	-
6515	-10.92	-	-	-
6535	-10.89	-	-	-
6695	-10.53	-	-	-
6855	-11.30	-	-	-
6875	-10.60	-	-	-
6895	-10.33	-	-	-
6995	-11.16	-	-	-
7095	-10.62	-	-	-

Table 895 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6125	-9.77	-	-	-
6285	-9.69	-	-	-
6405	-8.53	-	-	-
6445	-9.33	-	-	-
6485	-8.98	-	-	-
6525	-9.37	-	-	-
6565	-8.61	-	-	-
6685	-10.24	-	-	-
6845	-8.55	-	-	-
6885	-8.73	-	-	-
6925	-8.66	-	-	-
7005	-9.43	-	-	-
7085	-8.83	-	-	-

Table 896 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6145	-8.60	-	-	-
6225	-8.83	-	-	-
6385	-8.44	-	-	-
6465	-8.92	-	-	-
6545	-8.51	-	-	-
6625	-7.96	-	-	-
6705	-7.58	-	-	-
6785	-8.79	-	-	-
6865	-7.90	-	-	-
6945	-8.08	-	-	-
7025	-7.24	-	-	-

Table 897 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185	-8.15	-	-	-
6345	-7.63	-	-	-
6505	-7.23	-	-	-
6665	-6.84	-	-	-
6825	-6.89	-	-	-
6985	-7.58	-	-	-

Table 898 - Unwanted Emissions Within the Band Results



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 RU106 VLP	-11.04	6684.000
802.11ax HE20 RU26 VLP	-10.87	6523.900
802.11ax HE20 RU52 VLP	-11.17	7106.000
802.11be EHT20 RU Size 52 + RU Size 26 VLP	-17.11	6426.000
802.11be EHT20 RU Size 106 + RU Size 26 VLP	-10.44	7106.100
802.11be EHT80 RU Size 484 + RU Size 242 VLP	-7.79	6191.000
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Primary)	-7.74	6345.000
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Secondary)	-7.19	6745.000
802.11be EHT160 RU Size 996 + RU Size 484 VLP (Primary)	-6.88	5935.000
802.11be EHT160 RU Size 996 + RU Size 484 VLP (Secondary)	-6.97	5964.000

Table 899 - Unwanted Emissions Within the RLAN Band Summary Results Core 0 RU

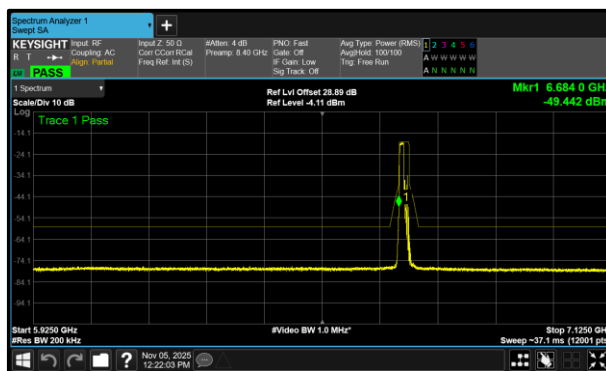


Figure 737 - A (Core 0) 802.11ax HE20 RU106 VLP 6695 MHz (CH149)

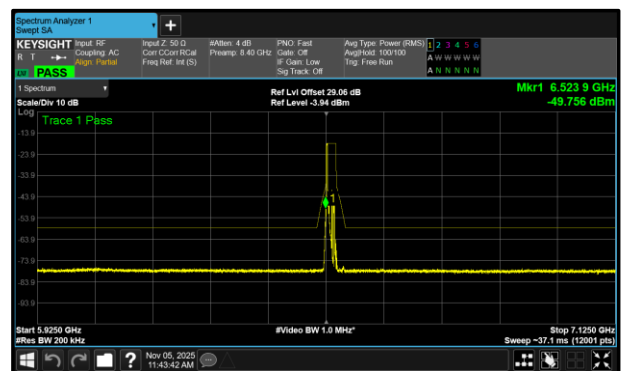


Figure 738 - A (Core 0) 802.11ax HE20 RU26 VLP 6535 MHz (CH117)

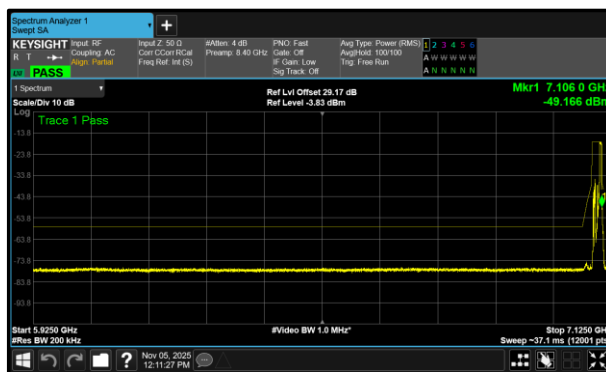


Figure 739 - A (Core 0) 802.11ax HE20 RU52 VLP 7095 MHz (CH229)

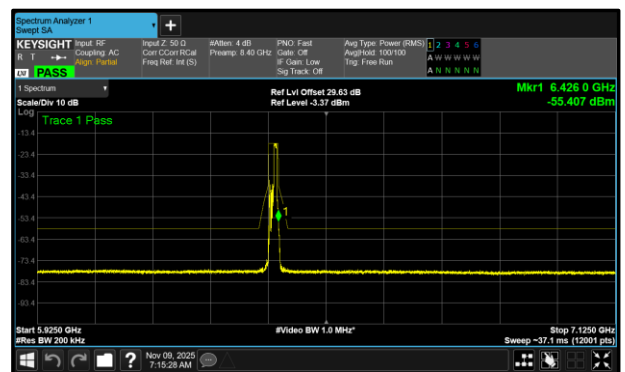


Figure 740 - A (Core 0) 802.11be EHT20 RU Size 52 + RU Size 26 VLP 6415 MHz (CH93)

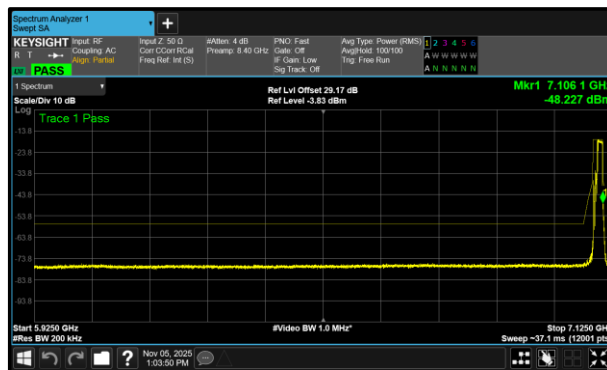


Figure 741 - A (Core 0) 802.11be EHT20 RU Size 106 + RU Size 26 VLP 7095 MHz (CH229)

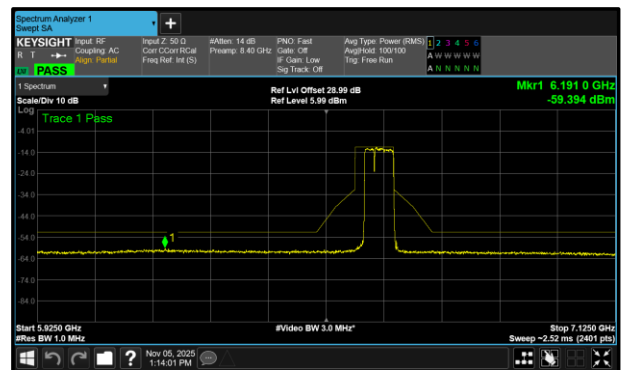


Figure 742 - A (Core 0) 802.11be EHT80 RU Size 484 + RU Size 242 VLP 6625 MHz (CH135)

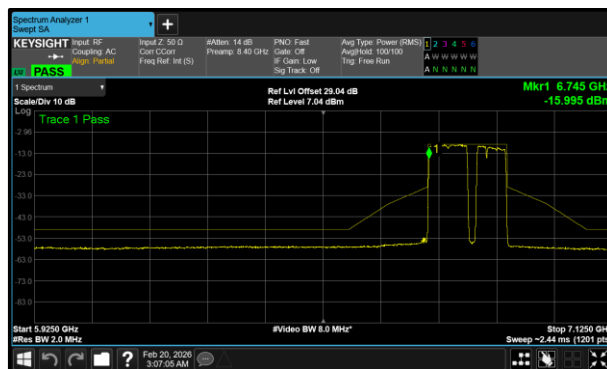


Figure 743 - A (Core 0) 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Secondary) 6825 MHz (CH175)

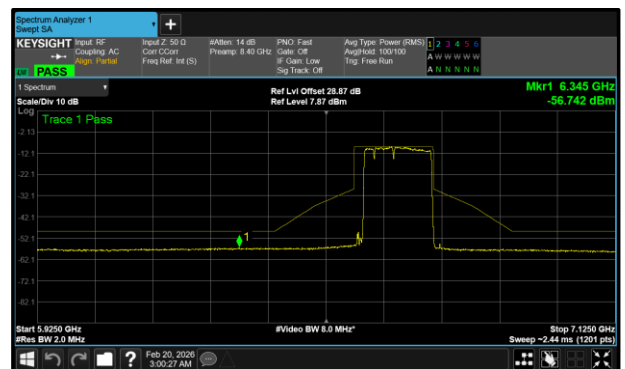


Figure 744 - A (Core 0) 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Primary) 6665 MHz (CH143)

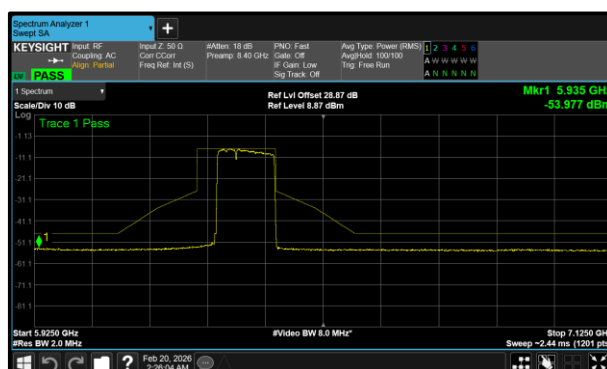


Figure 745 - A (Core 0) 802.11be EHT160 RU Size 996 + RU Size 484 VLP (Primary) 6345 MHz (CH79)

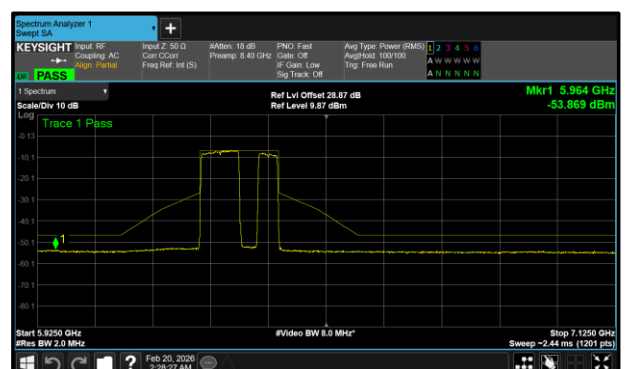


Figure 746 - A (Core 0) 802.11be EHT160 RU Size 996 + RU Size 484 VLP (Secondary) 6345 MHz (CH79)



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU26 VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115 (RU26.0)	-12.52	-	-	-
6275 (RU26.0)	-14.03	-	-	-
6415 (RU26.8)	-12.44	-	-	-
6435 (RU26.0)	-13.23	-	-	-
6475 (RU26.0)	-12.36	-	-	-
6515 (RU26.8)	-12.41	-	-	-
6535 (RU26.0)	-10.87	-	-	-
6695 (RU26.0)	-13.16	-	-	-
6855 (RU26.8)	-11.63	-	-	-
6875 (RU26.3)	-18.45	-	-	-
6875 (RU26.5)	-18.25	-	-	-
6895 (RU26.0)	-12.24	-	-	-
6995 (RU26.0)	-12.22	-	-	-
7095 (RU26.8)	-13.73	-	-	-

Table 900 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU52 VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115 (RU52.37)	-11.92	-	-	-
6275 (RU52.37)	-12.11	-	-	-
6415 (RU52.40)	-12.25	-	-	-
6435 (RU52.37)	-11.55	-	-	-
6475 (RU52.37)	-12.38	-	-	-
6515 (RU52.40)	-11.98	-	-	-
6535 (RU52.37)	-11.39	-	-	-
6695 (RU52.37)	-12.11	-	-	-
6855 (RU52.40)	-12.07	-	-	-
6875 (RU52.38)	-18.24	-	-	-
6875 (RU52.39)	-18.49	-	-	-
6895 (RU52.37)	-12.24	-	-	-
6995 (RU52.37)	-12.17	-	-	-
7095 (RU52.40)	-11.17	-	-	-

Table 901 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU106 VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115 (RU106.53)	-11.62	-	-	-
6275 (RU106.53)	-11.61	-	-	-
6415 (RU106.54)	-12.42	-	-	-
6435 (RU106.53)	-12.47	-	-	-
6475 (RU106.53)	-11.58	-	-	-
6515 (RU106.54)	-12.13	-	-	-
6535 (RU106.53)	-11.66	-	-	-
6695 (RU106.53)	-11.04	-	-	-
6855 (RU106.54)	-12.07	-	-	-
6875 (RU106.53)	-11.56	-	-	-
6875 (RU106.54)	-12.96	-	-	-
6895 (RU106.53)	-11.63	-	-	-
6995 (RU106.53)	-11.76	-	-	-
7095 (RU106.54)	-11.95	-	-	-

Table 902 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26 VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115 (RU Size 52 + RU Size 26.70)	-18.69	-	-	-
6275 (RU Size 52 + RU Size 26.70)	-17.46	-	-	-
6415 (RU Size 52 + RU Size 26.72)	-17.11	-	-	-
6435 (RU Size 52 + RU Size 26.70)	-17.80	-	-	-
6475 (RU Size 52 + RU Size 26.70)	-17.38	-	-	-
6515 (RU Size 52 + RU Size 26.72)	-17.46	-	-	-
6535 (RU Size 52 + RU Size 26.70)	-17.69	-	-	-
6695 (RU Size 52 + RU Size 26.70)	-17.88	-	-	-
6855 (RU Size 52 + RU Size 26.72)	-17.32	-	-	-
6875 (RU Size 52 + RU Size 26.70)	-18.43	-	-	-
6875 (RU Size 52 + RU Size 26.72)	-18.32	-	-	-
6895 (RU Size 52 + RU Size 26.70)	-18.40	-	-	-
6995 (RU Size 52 + RU Size 26.70)	-17.53	-	-	-
7095 (RU Size 52 + RU Size 26.72)	-17.03	-	-	-

Table 903 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26 VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115 (RU Size 106 + RU Size 26.82)	-12.20	-	-	-
6275 (RU Size 106 + RU Size 26.82)	-12.39	-	-	-
6415 (RU Size 106 + RU Size 26.83)	-13.41	-	-	-
6435 (RU Size 106 + RU Size 26.82)	-13.02	-	-	-
6475 (RU Size 106 + RU Size 26.82)	-11.64	-	-	-
6515 (RU Size 106 + RU Size 26.83)	-12.03	-	-	-
6535 (RU Size 106 + RU Size 26.82)	-12.10	-	-	-
6695 (RU Size 106 + RU Size 26.82)	-12.09	-	-	-
6855 (RU Size 106 + RU Size 26.83)	-12.22	-	-	-
6875 (RU Size 106 + RU Size 26.82)	-11.94	-	-	-
6875 (RU Size 106 + RU Size 26.83)	-11.56	-	-	-
6895 (RU Size 106 + RU Size 26.82)	-11.99	-	-	-
6995 (RU Size 106 + RU Size 26.82)	-11.97	-	-	-
7095 (RU Size 106 + RU Size 26.83)	-10.44	-	-	-

Table 904 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242 VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6145 (RU Size 484 + RU Size 242.90)	-8.04	-	-	-
6225 (RU Size 484 + RU Size 242.90)	-9.37	-	-	-
6385 (RU Size 484 + RU Size 242.90)	-9.10	-	-	-
6465 (RU Size 484 + RU Size 242.90)	-9.08	-	-	-
6545 (RU Size 484 + RU Size 242.90)	-8.73	-	-	-
6625 (RU Size 484 + RU Size 242.90)	-7.79	-	-	-
6705 (RU Size 484 + RU Size 242.90)	-9.04	-	-	-
6785 (RU Size 484 + RU Size 242.90)	-8.87	-	-	-
6865 (RU Size 484 + RU Size 242.90)	-9.07	-	-	-
6945 (RU Size 484 + RU Size 242.90)	-8.46	-	-	-
7025 (RU Size 484 + RU Size 242.90)	-9.02	-	-	-

Table 905 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 VLP (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484.94)	-8.96	-	-	-
6345 (RU Size 996 + RU Size 484.94)	-6.88	-	-	-
6505 (RU Size 996 + RU Size 484.94)	-8.57	-	-	-
6665 (RU Size 996 + RU Size 484.94)	-8.17	-	-	-
6825 (RU Size 996 + RU Size 484.94)	-8.03	-	-	-
6985 (RU Size 996 + RU Size 484.94)	-8.08	-	-	-

Table 906 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 VLP (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484.94)	-8.93	-	-	-
6185 (RU Size 996 + RU Size 484.95)	-6.97	-	-	-
6505 (RU Size 996 + RU Size 484.95)	-8.07	-	-	-
6665 (RU Size 996 + RU Size 484.95)	-7.10	-	-	-
6825 (RU Size 996 + RU Size 484.95)	-7.85	-	-	-
6985 (RU Size 996 + RU Size 484.95)	-7.54	-	-	-

Table 907 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.20	-	-	-
6345 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.27	-	-	-
6505 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.24	-	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.74	-	-	-
6825 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.19	-	-	-
6985 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.82	-	-	-

Table 908 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b)	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.20	-	-	-
6345 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.09	-	-	-
6505 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.04	-	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.74	-	-	-
6825 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.90	-	-	-
6985 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.04	-	-	-

Table 909 - Unwanted Emissions Within the Band Results