

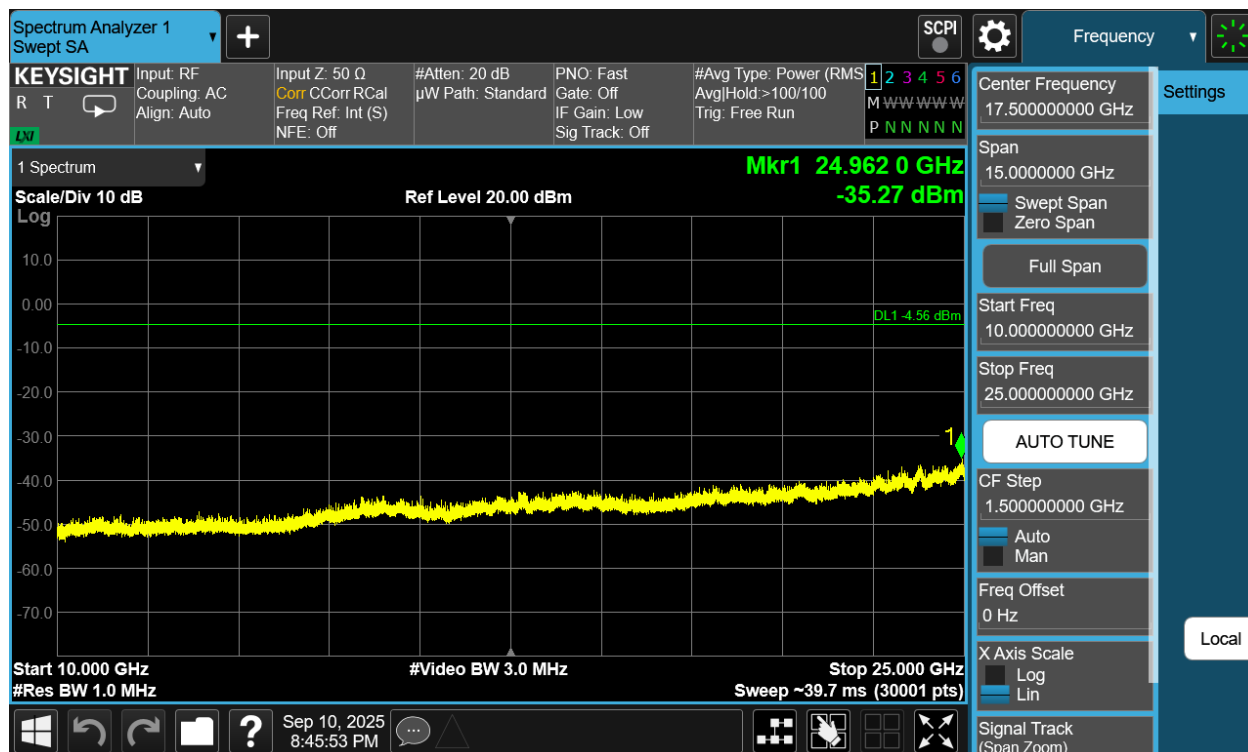


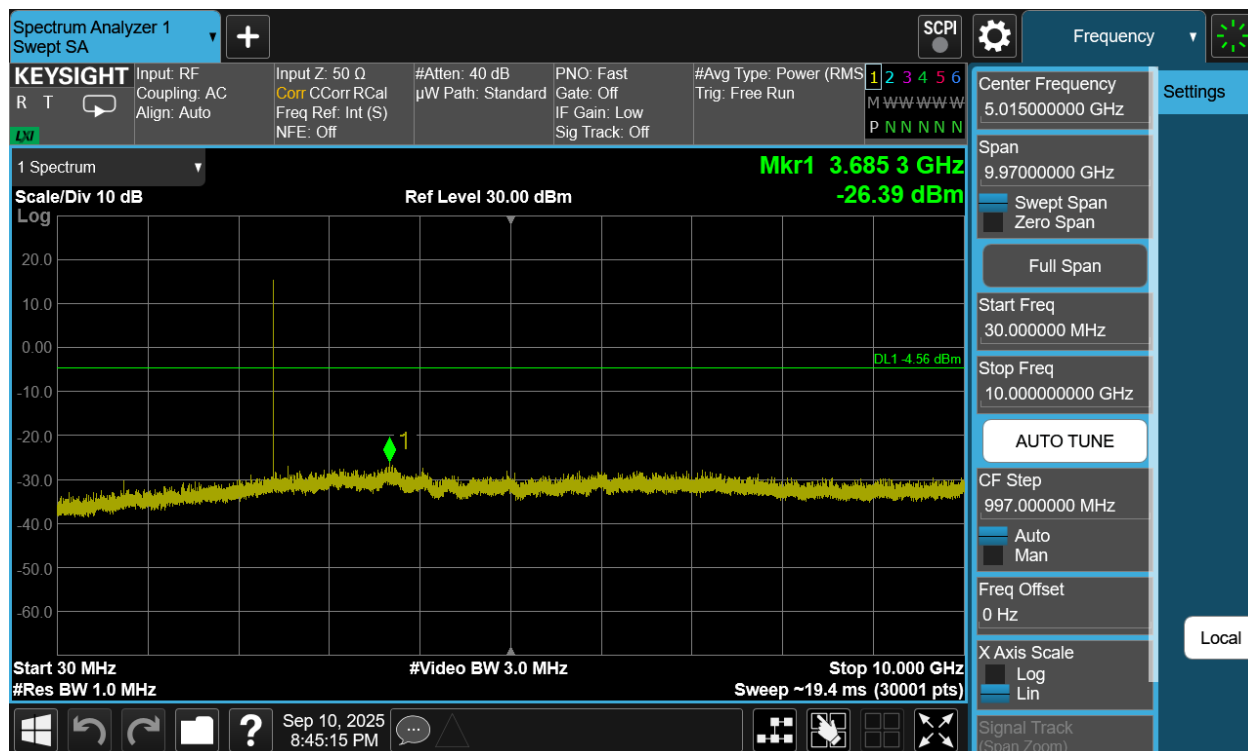


FCC ID: BCGA3459 IC: 579C-A3459	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 187 of 222

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

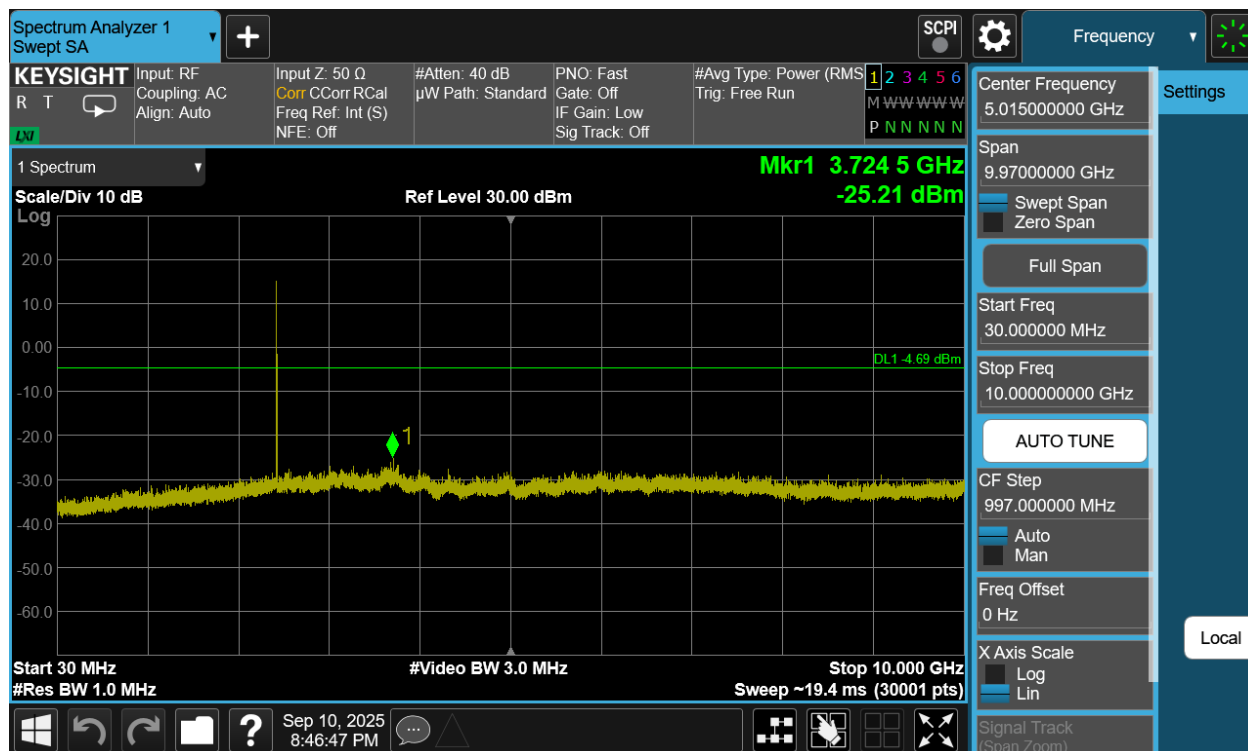

Plot 7-297. Conducted Spurious Plot Antenna WF7b (Bluetooth (HDT2), 2Mbps, ePA – Ch. 37)

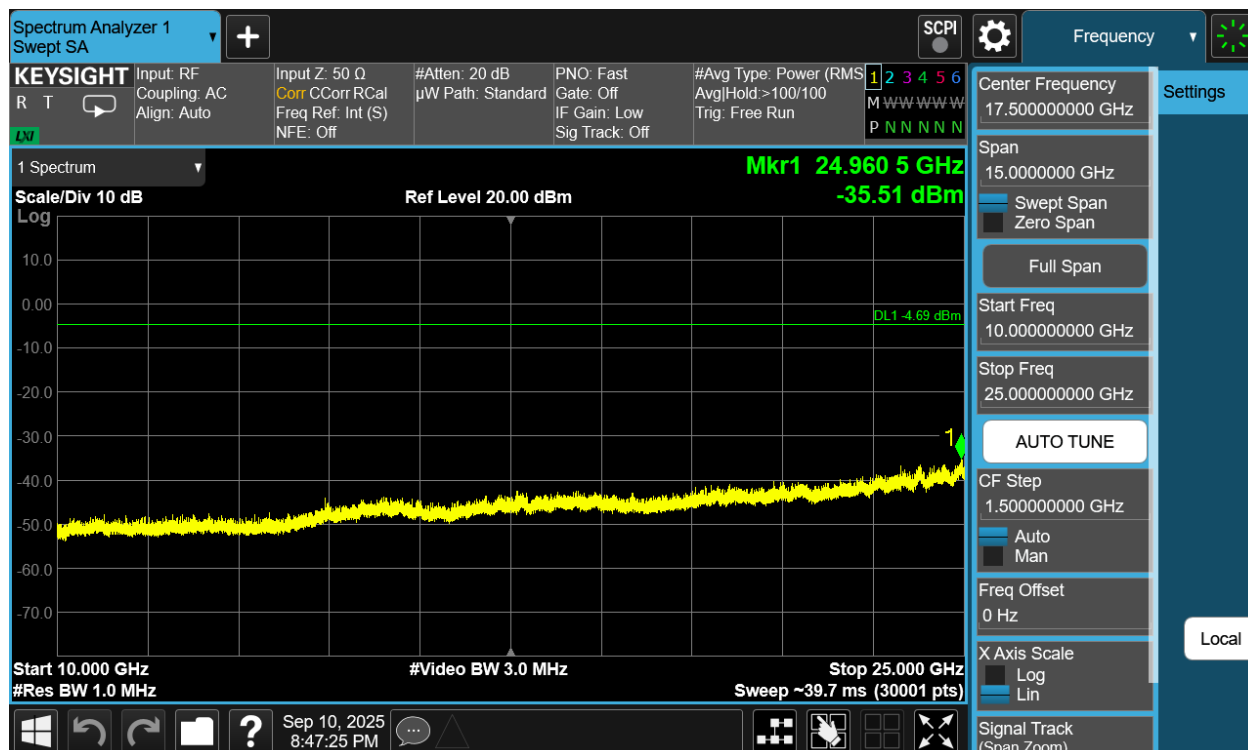


Plot 7-298. Conducted Spurious Plot Antenna WF7b (Bluetooth (HDT2), 2Mbps, ePA – Ch. 37)


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 188 of 222

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

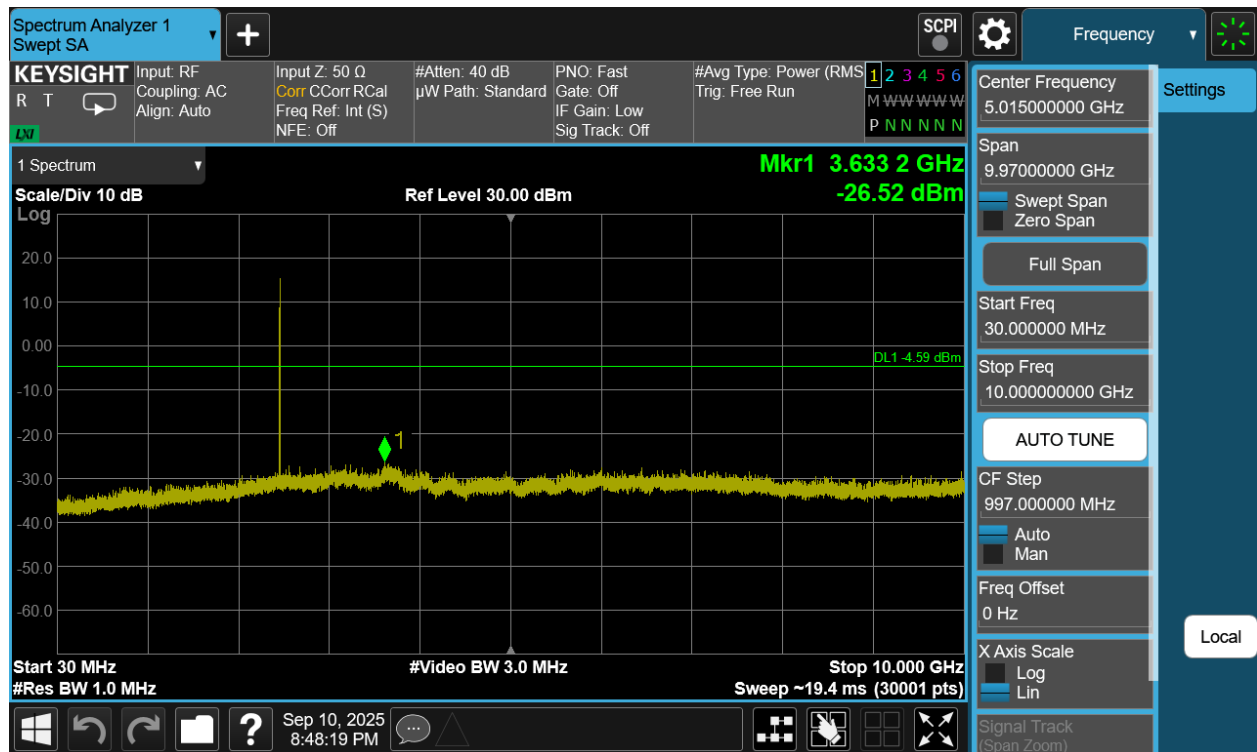

Plot 7-299. Conducted Spurious Plot Antenna WF7b (Bluetooth (HDT2), 2Mbps, ePA – Ch. 73)

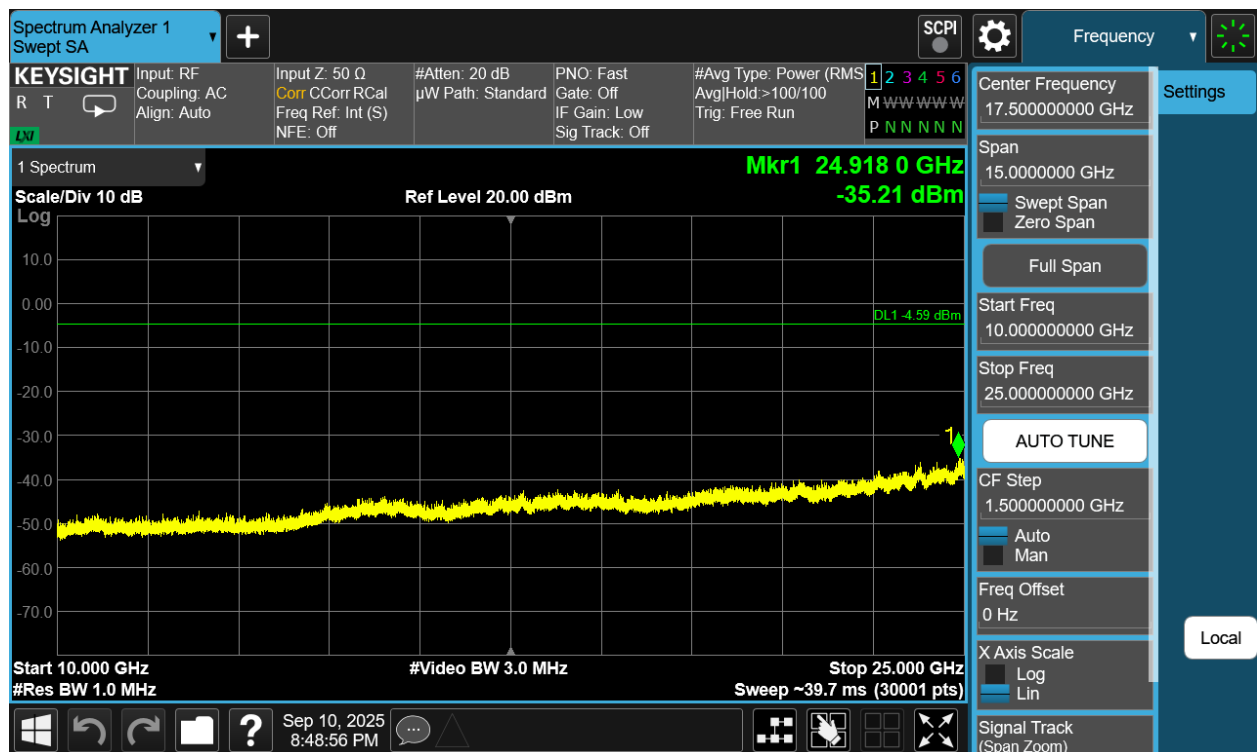

Plot 7-300. Conducted Spurious Plot Antenna WF7b (Bluetooth (HDT2), 2Mbps, ePA – Ch. 73)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 189 of 222

7.8 Radiated Spurious Emissions – Above 1GHz

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-15 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-15. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclause 6.6.4.3
KDB 558074 D01 v05r02 – Sections 8.6, 8.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 190 of 222

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

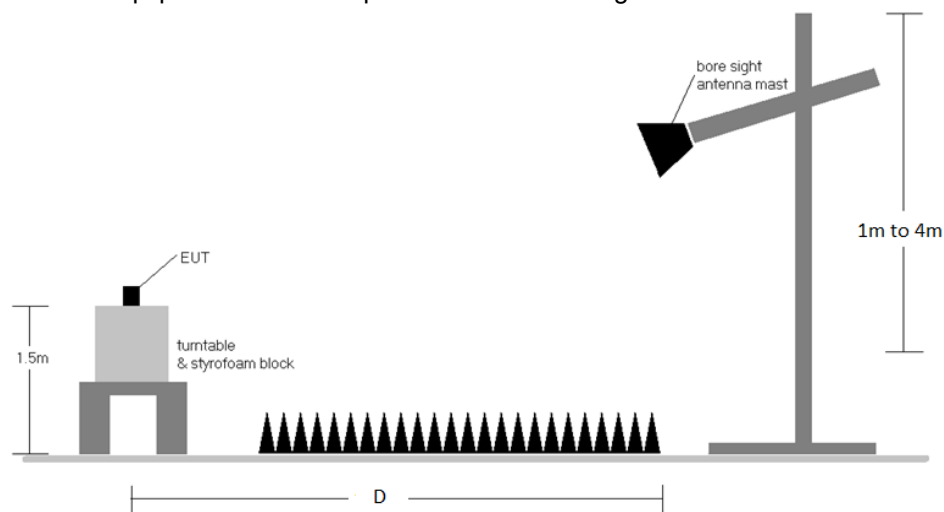


Figure 7-7. Radiated Test Setup >1GHz

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-15.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 191 of 222

V 11.0 05/2025

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in sections 7.8.2 to 7.8.4 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCGA3459 IC: 579C-A3459	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 192 of 222

V 11.0 05/2025

7.8.1 TxBF Radiated Spurious Emission Measurements (Above 1GHz)

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

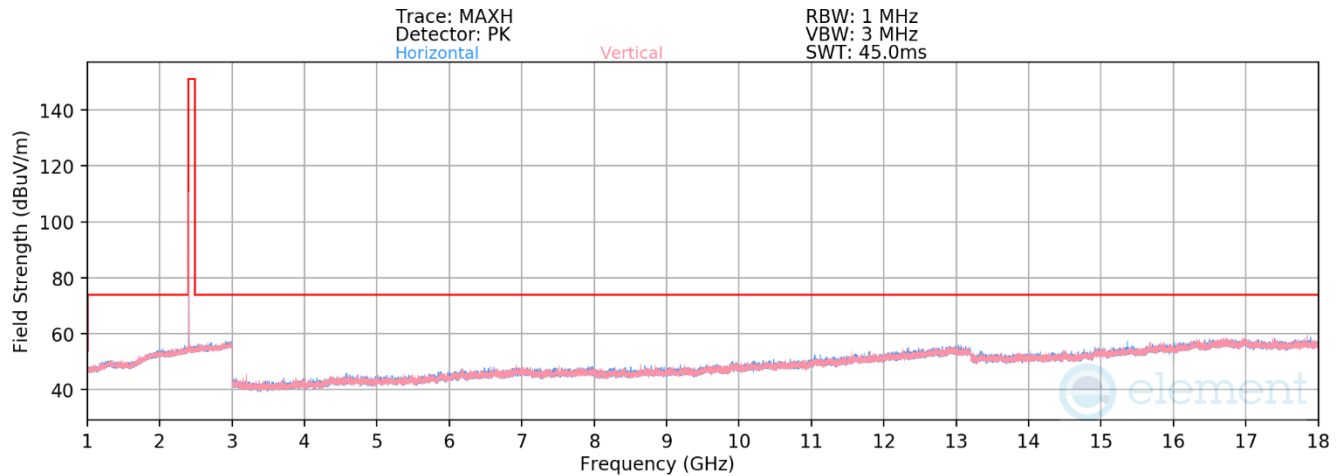

Plot 7-301. Radiated Spurious Emissions 1-18GHz TxBF (4Mbps, HDR4, ePA – Ch. 1)

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	2404MHz
Channel:	1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4808.00	Average	V	-	-	-80.84	7.67	33.83	53.98	-20.15
4808.00	Peak	V	-	-	-70.07	7.67	44.61	73.98	-29.37
12020.00	Average	H	-	-	-83.27	17.21	40.94	53.98	-13.04
12020.00	Peak	H	-	-	-71.94	17.21	52.27	73.98	-21.71

Table 7-16. Radiated Spurious Emission Measurements TxBF


FCC ID: BCGA3459 IC: 579C-A3459	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 193 of 222

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

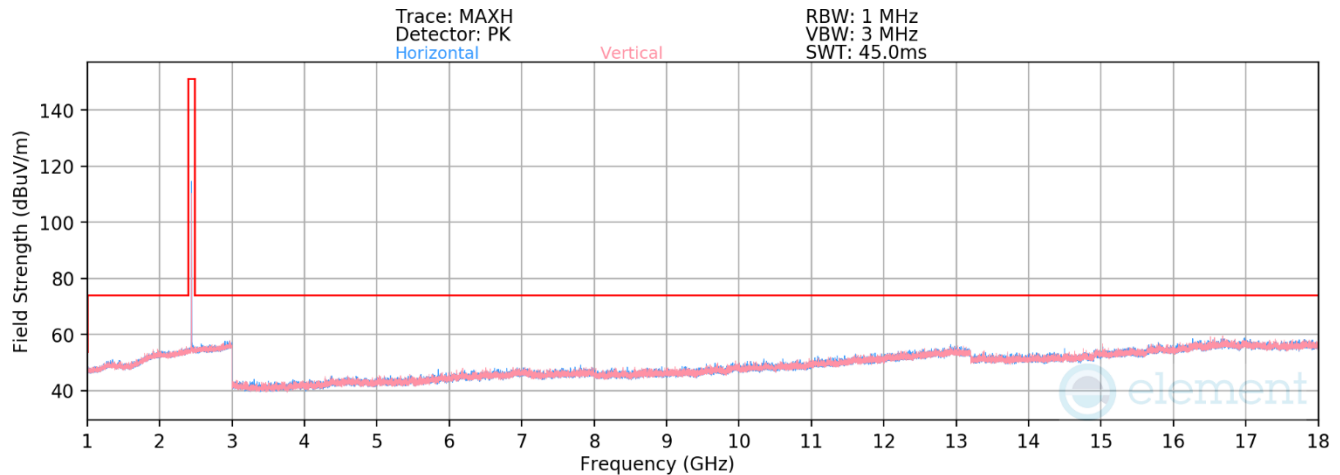

Plot 7-302. Radiated Spurious Emissions 1-18GHz TxBF (4Mbps, HDR4, ePA – Ch. 38)

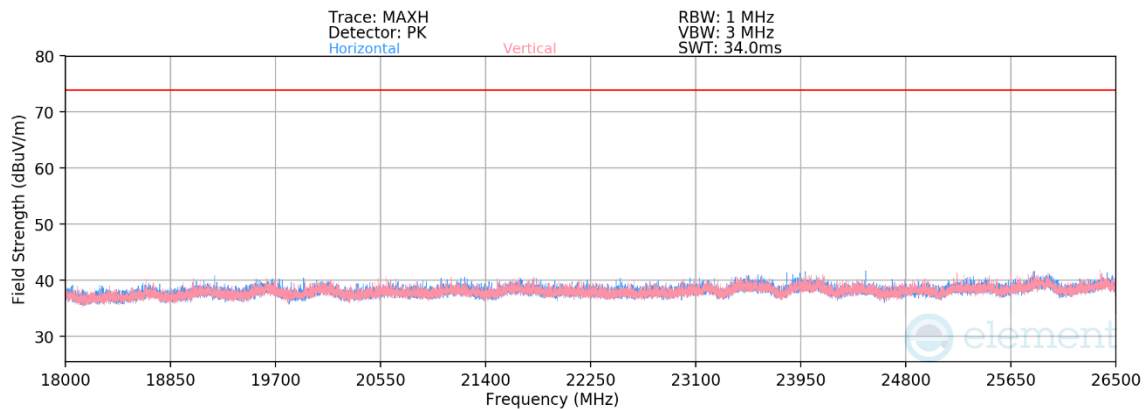


Plot 7-303. Radiated Spurious Emissions above 18GHz TxBF (4Mbps, HDR4, ePA – Ch. 38)

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	2441MHz
Channel:	38

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4882.00	Average	H	-	-	-81.30	8.01	0.00	33.71	53.98	-20.27
4882.00	Peak	H	-	-	-70.31	8.01	0.00	44.70	73.98	-29.28
7323.00	Average	H	-	-	-82.26	11.21	0.00	35.95	53.98	-18.03
7323.00	Peak	H	-	-	-71.42	11.21	0.00	46.79	73.98	-27.19
12205.00	Average	H	-	-	-83.06	17.22	0.00	41.16	53.98	-12.82
12205.00	Peak	H	-	-	-71.17	17.22	0.00	53.06	73.98	-20.92
19528.00	Average	H	-	-	-61.14	-7.97	-9.54	28.36	53.98	-25.62
19528.00	Peak	H	-	-	-49.54	-7.97	-9.54	39.95	73.98	-34.03

Table 7-17. Radiated Spurious Emission Measurements TxBF

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 194 of 222

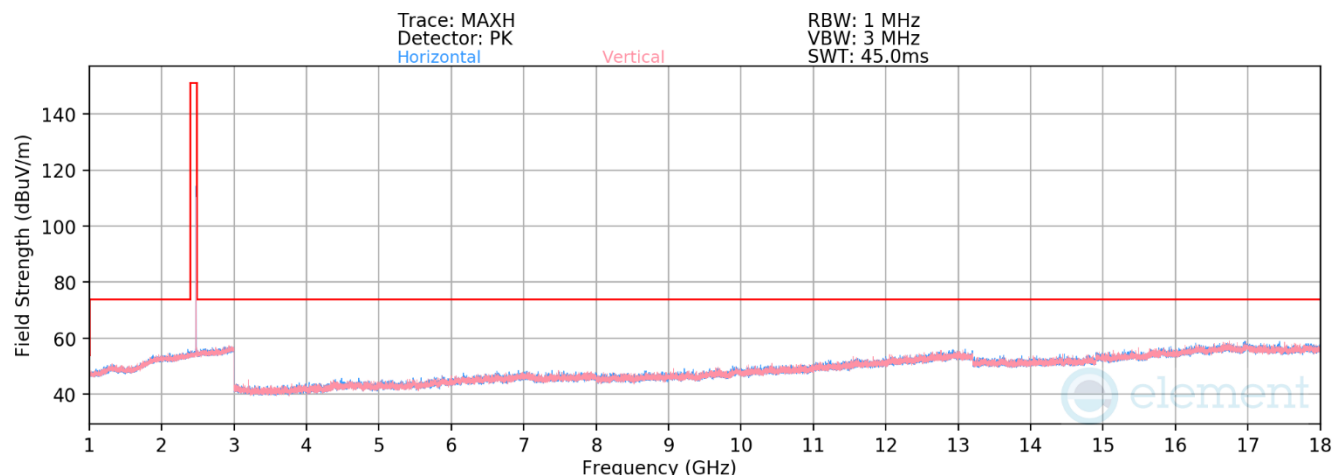

Plot 7-304. Radiated Spurious Emissions 1-18GHz TxBF (4Mbps, HDR4, ePA – Ch. 73)

Bluetooth Mode: HDR4
Data Rate: 4Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 2476MHz
Channel: 73

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4952.00	Average	H	-	-	-81.27	7.93	33.66	53.98	-20.32
4952.00	Peak	H	-	-	-69.91	7.93	45.01	73.98	-28.97
7428.00	Average	H	-	-	-82.35	11.08	35.73	53.98	-18.25
7428.00	Peak	H	-	-	-71.22	11.08	46.86	73.98	-27.12
12380.00	Average	H	-	-	-83.30	17.82	41.52	53.98	-12.46
12380.00	Peak	H	-	-	-72.09	17.82	52.73	73.98	-21.25

Table 7-18. Radiated Spurious Emission Measurements TxBF


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 195 of 222

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.8.2 Antenna WF8 Radiated Restricted Band Edge Measurements

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

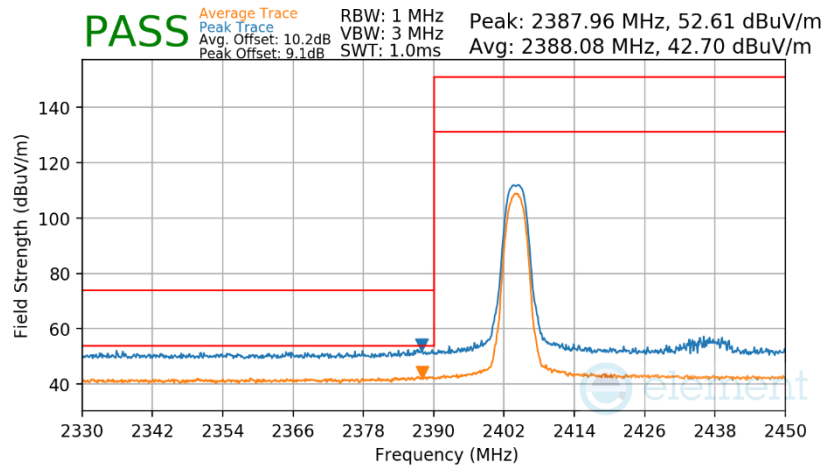

Plot 7-305. Radiated Restricted Lower Band Edge Measurement Antenna WF8


Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

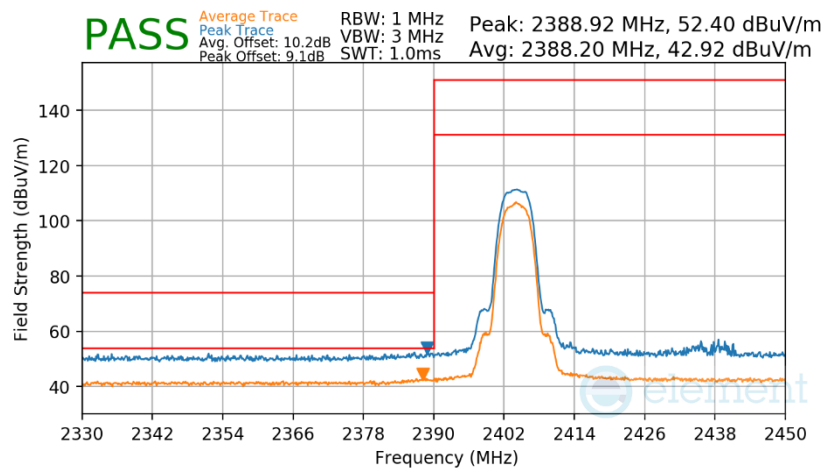

Plot 7-306. Radiated Restricted Lower Band Edge Measurement Antenna WF8


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 196 of 222

Bluetooth Mode: XHDRPS2
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

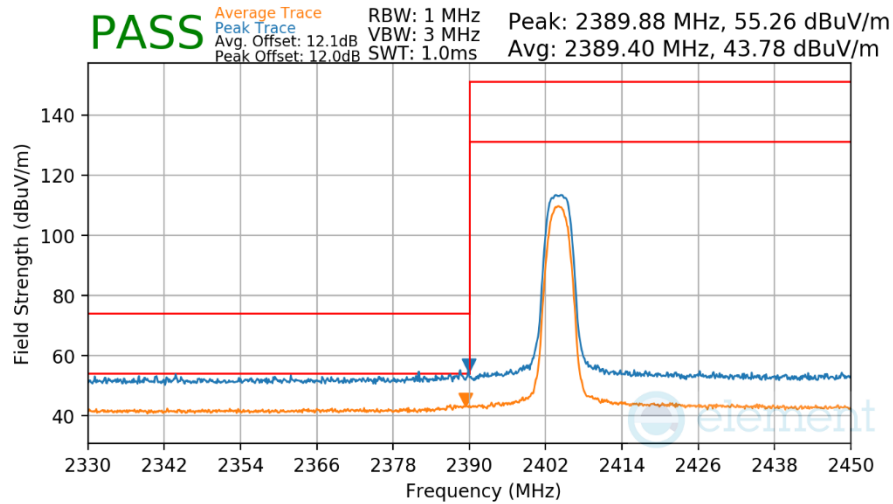

Plot 7-307. Radiated Restricted Lower Band Edge Measurement Antenna WF8


Bluetooth Mode: XHDRPM8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

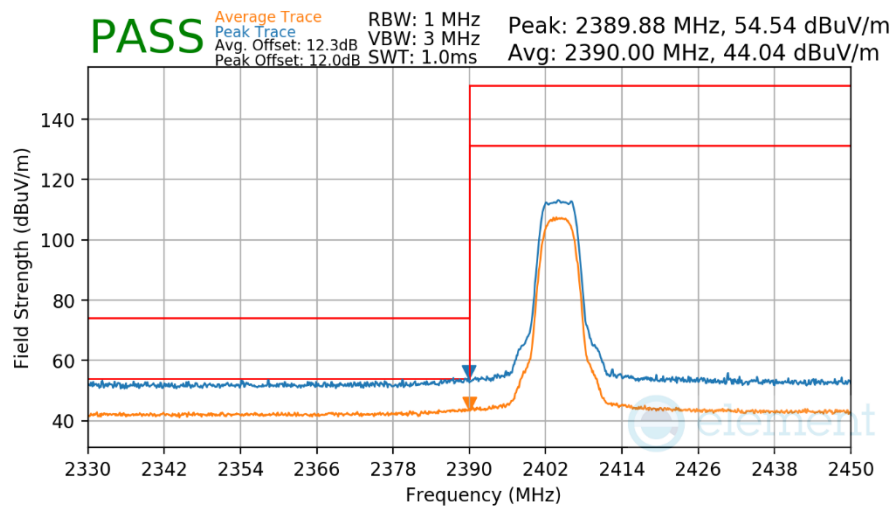

Plot 7-308. Radiated Restricted Lower Band Edge Measurement Antenna WF8


FCC ID: BCGA3459 IC: 579C-A3459	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 197 of 222

Bluetooth Mode: XHDRPM16
 Data Rate: 16Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

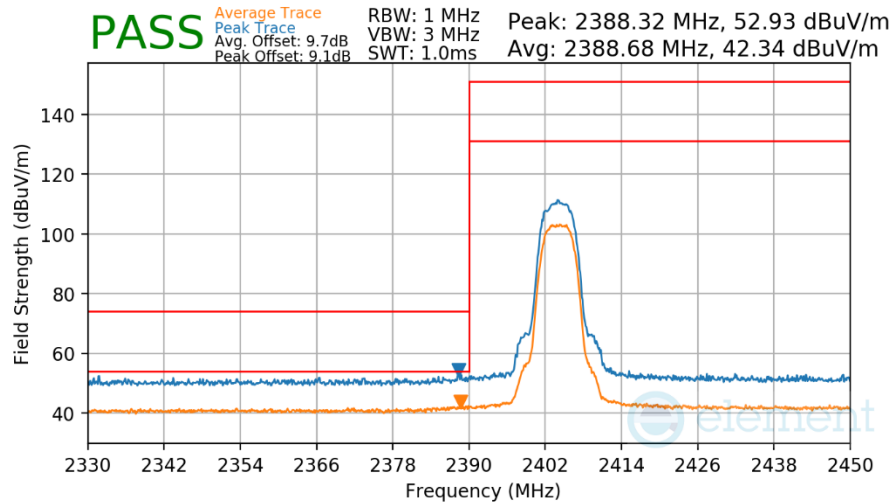

Plot 7-309. Radiated Restricted Lower Band Edge Measurement Antenna WF8


Bluetooth Mode: HDT8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

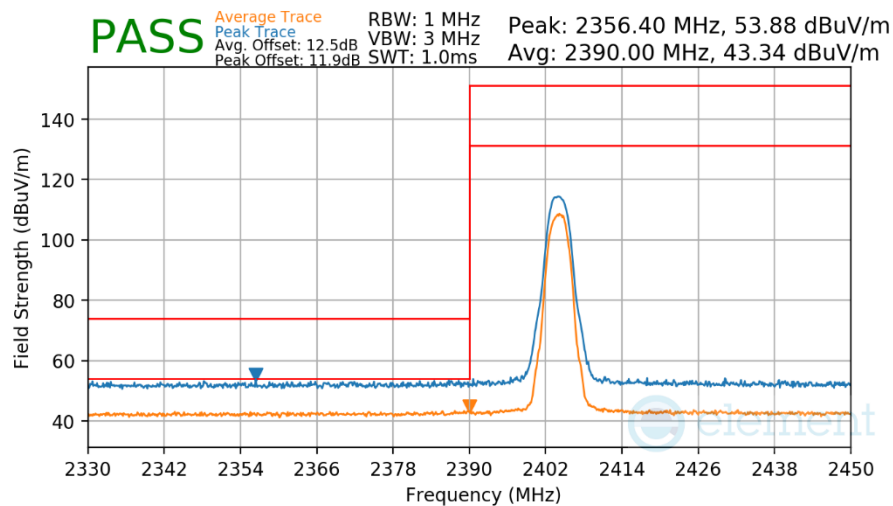

Plot 7-310. Radiated Restricted Lower Band Edge Measurement Antenna WF8


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 198 of 222

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

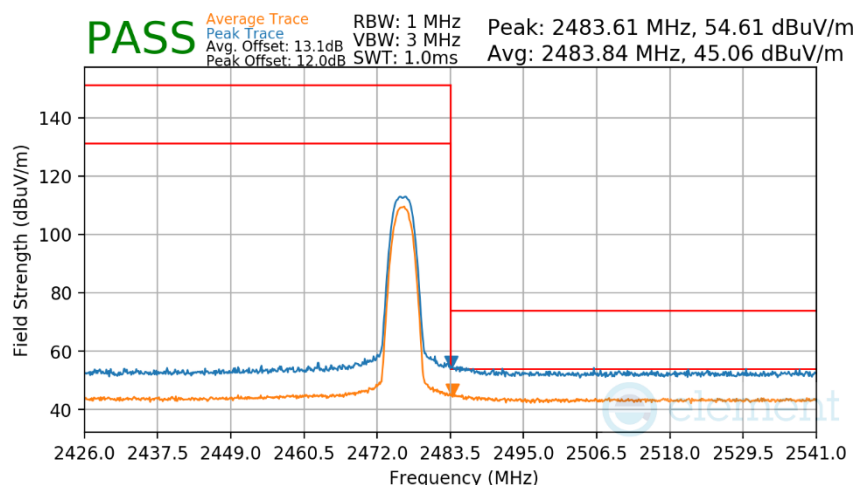

Plot 7-311. Radiated Restricted Upper Band Edge Measurement Antenna WF8


Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

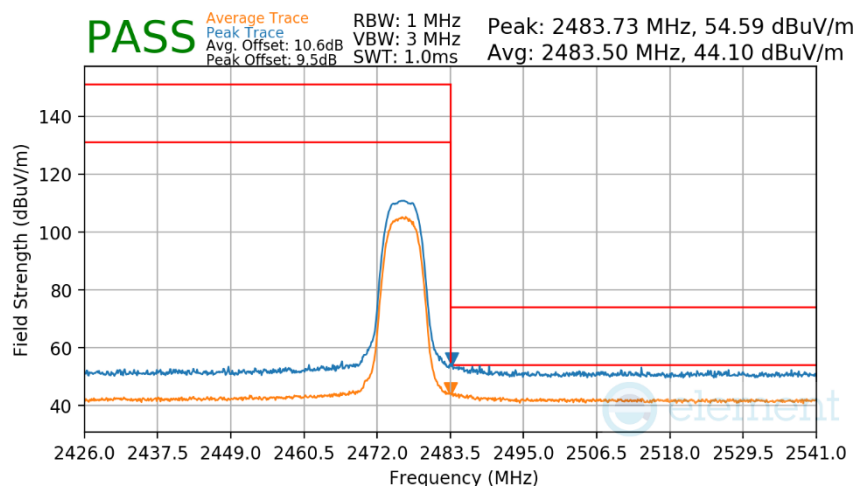

Plot 7-312. Radiated Restricted Upper Band Edge Measurement Antenna WF8


FCC ID: BCGA3459 IC: 579C-A3459	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 199 of 222

Bluetooth Mode: XHDRPS2
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

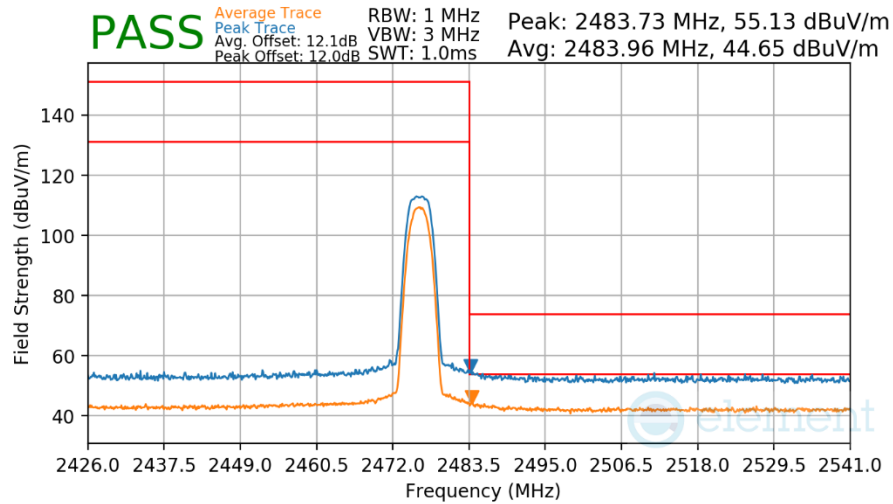

Plot 7-313. Radiated Restricted Upper Band Edge Measurement Antenna WF8


Bluetooth Mode: XHDRPM8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

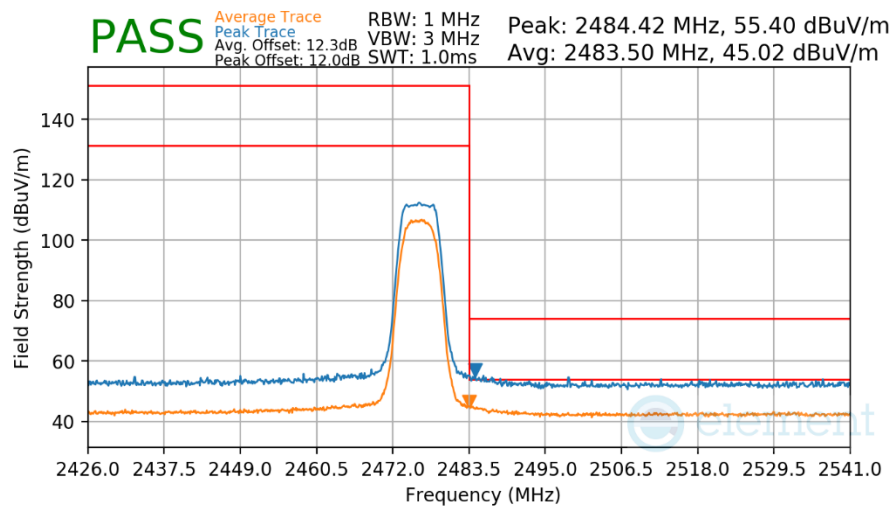

Plot 7-314. Radiated Restricted Upper Band Edge Measurement Antenna WF8


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 200 of 222

Bluetooth Mode: XHDRPM16
 Data Rate: 16Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

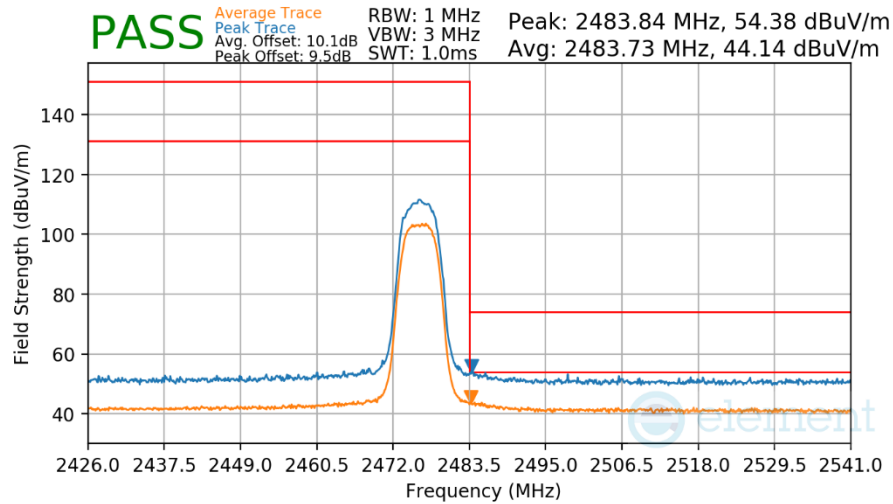

Plot 7-315. Radiated Restricted Upper Band Edge Measurement Antenna WF8

Bluetooth Mode: HDT8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

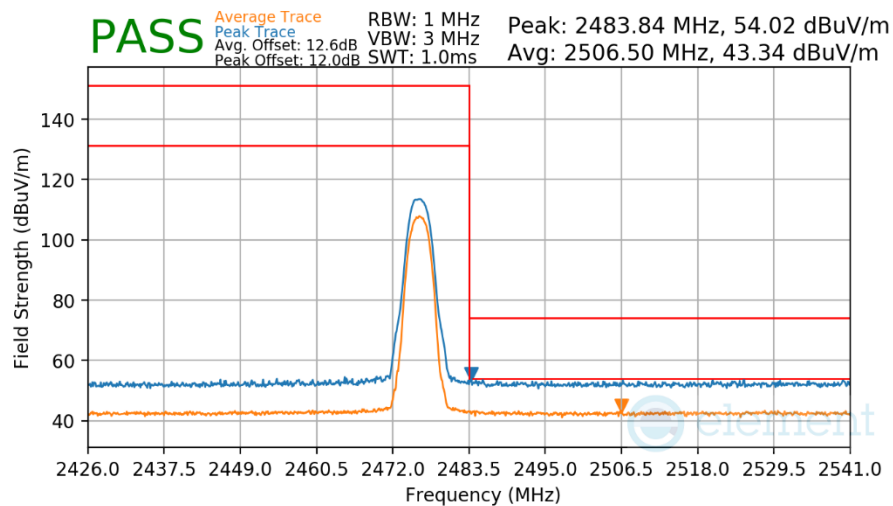


Plot 7-316. Radiated Restricted Upper Band Edge Measurement Antenna WF8

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 201 of 222


7.8.3 Antenna WF7b Radiated Restricted Band Edge Measurements

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

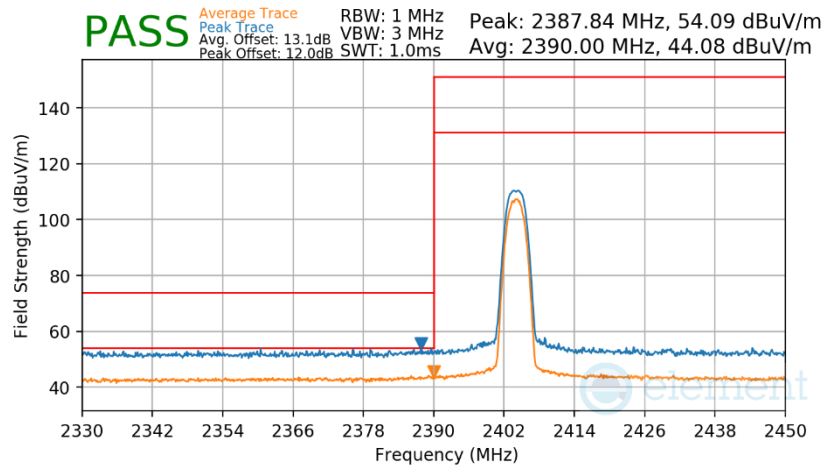

Plot 7-317. Radiated Restricted Lower Band Edge Measurement Antenna WF7b

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

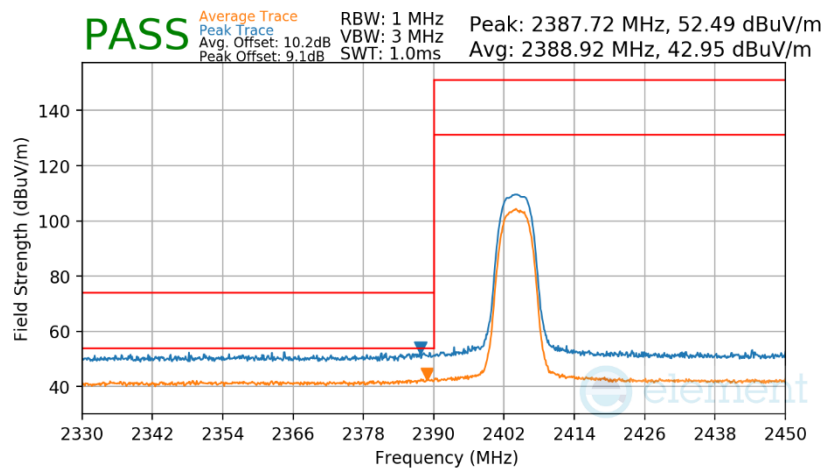


Plot 7-318. Radiated Restricted Lower Band Edge Measurement Antenna WF7b

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 202 of 222


V 11.0 05/2025

Bluetooth Mode: XHDRPS2
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

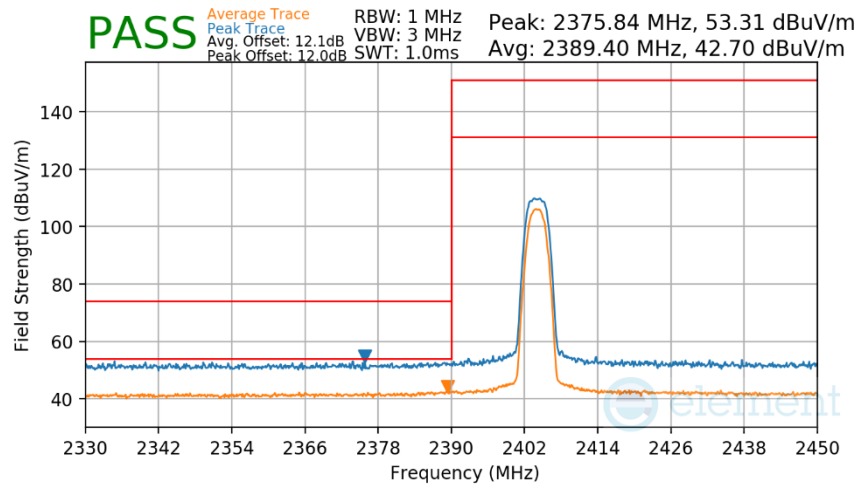

Plot 7-319. Radiated Restricted Lower Band Edge Measurement Antenna WF7b


Bluetooth Mode: XHDRPM8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

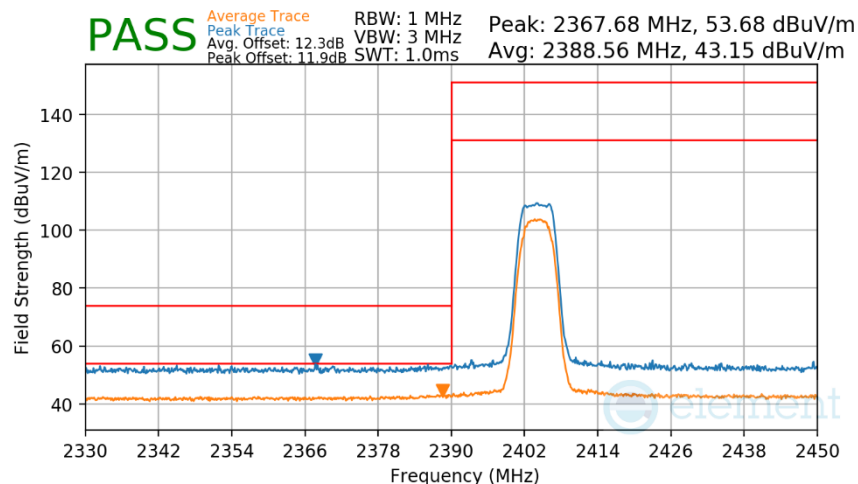

Plot 7-320. Radiated Restricted Lower Band Edge Measurement Antenna WF7b


FCC ID: BCGA3459 IC: 579C-A3459	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 203 of 222

Bluetooth Mode: XHDRPM16
 Data Rate: 16Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

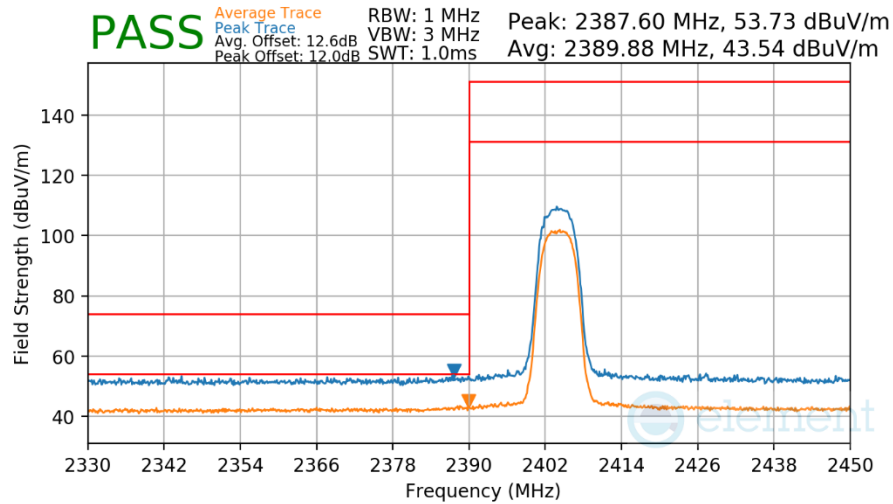

Plot 7-321. Radiated Restricted Lower Band Edge Measurement Antenna WF7b


Bluetooth Mode: HDT8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

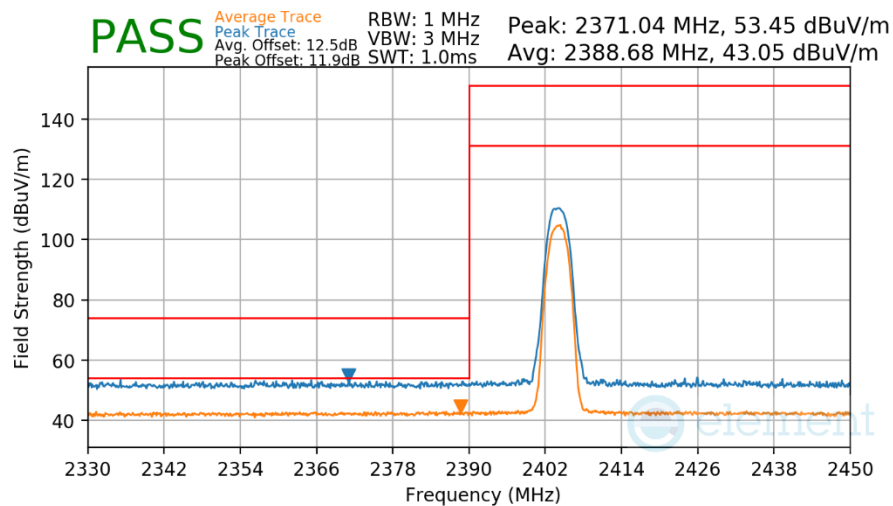

Plot 7-322. Radiated Restricted Lower Band Edge Measurement Antenna WF7b


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 204 of 222

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

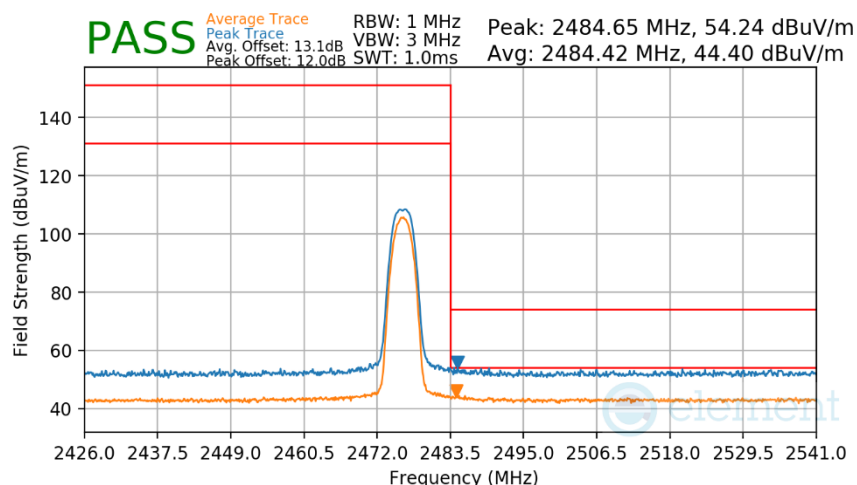

Plot 7-323. Radiated Restricted Upper Band Edge Measurement Antenna WF7b

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

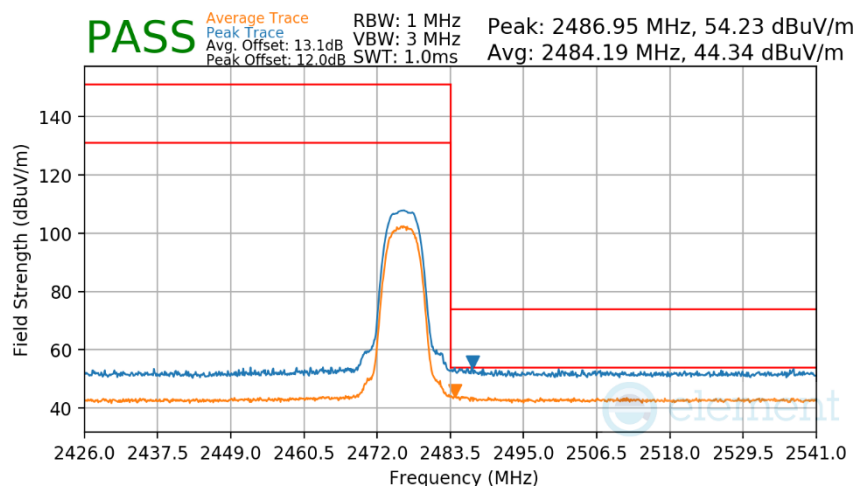


Plot 7-324. Radiated Restricted Upper Band Edge Measurement Antenna WF7b

FCC ID: BCGA3459 IC: 579C-A3459	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 205 of 222

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bluetooth Mode: XHDRPS2
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

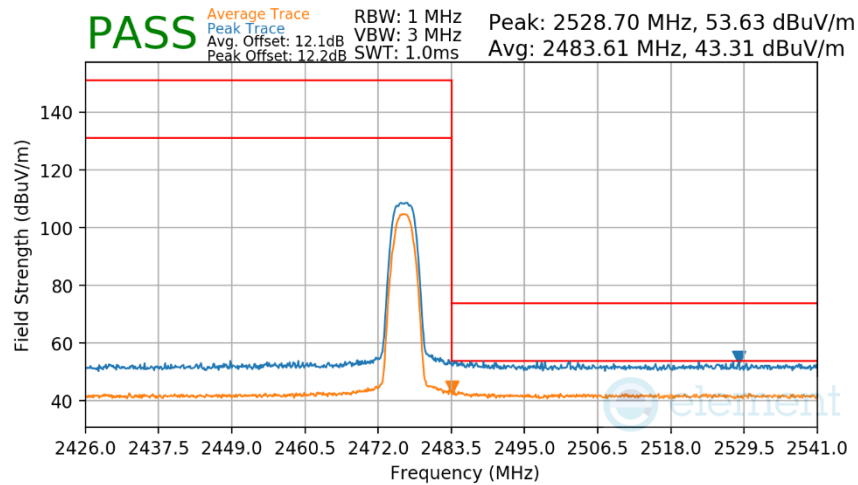

Plot 7-325. Radiated Restricted Upper Band Edge Measurement Antenna WF7b


Bluetooth Mode: XHDRPM8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

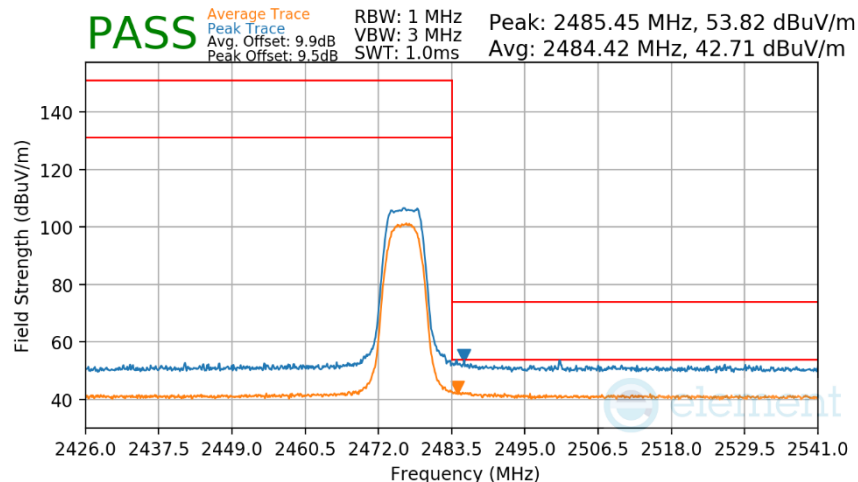

Plot 7-326. Radiated Restricted Upper Band Edge Measurement Antenna WF7b


FCC ID: BCGA3459 IC: 579C-A3459	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 206 of 222

Bluetooth Mode: XHDRPM16
 Data Rate: 16Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

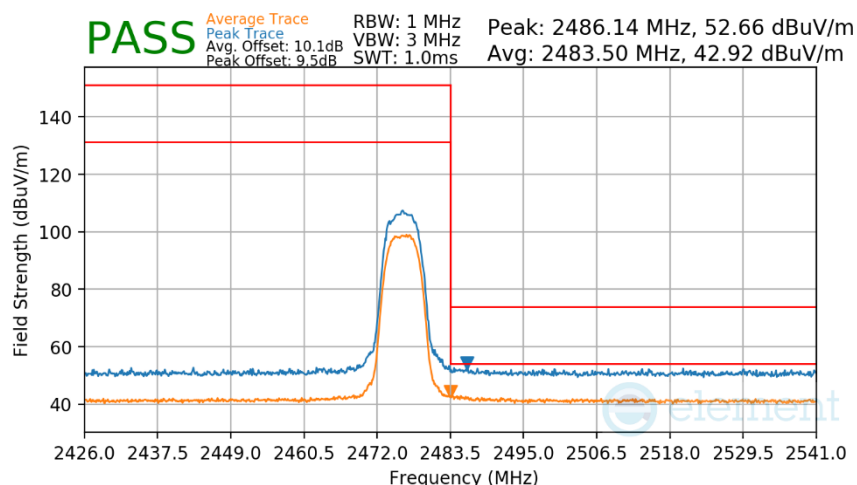

Plot 7-327. Radiated Restricted Upper Band Edge Measurement Antenna WF7b

Bluetooth Mode: HDT8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

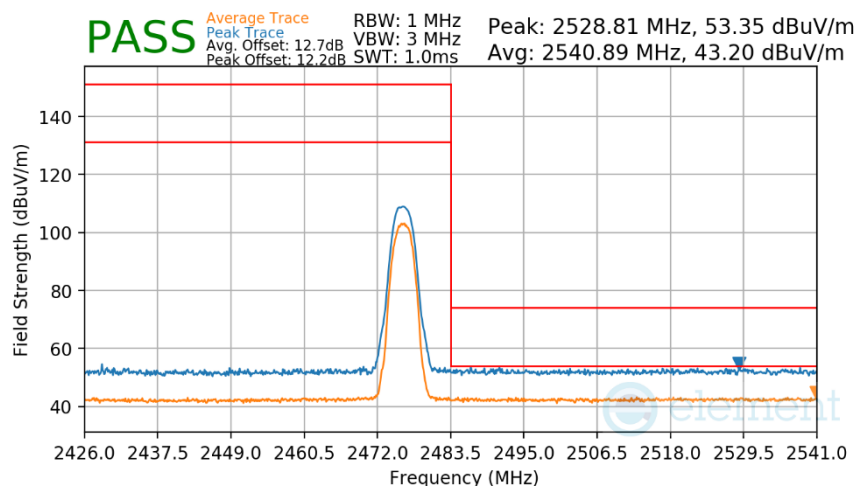


Plot 7-328. Radiated Restricted Upper Band Edge Measurement Antenna WF7b

FCC ID: BCGA3459 IC: 579C-A3459	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 207 of 222

V 11.0 05/2025


7.8.4 TxBF Radiated Restricted Band Edge Measurements

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

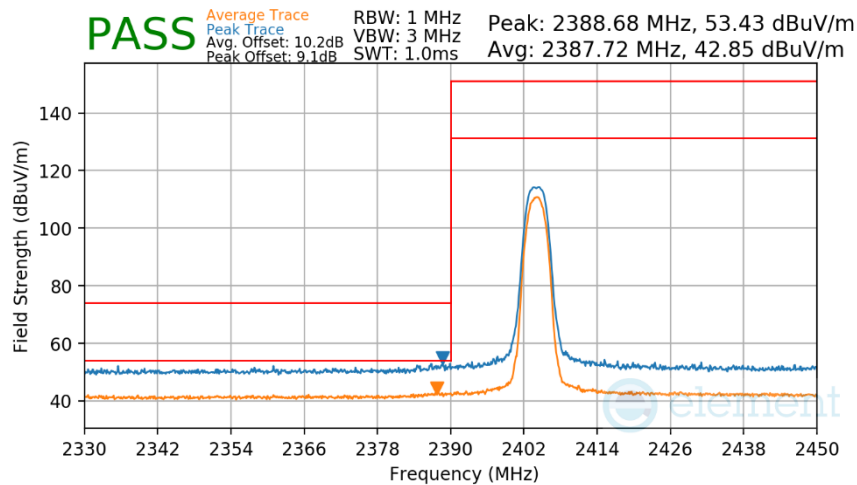

Plot 7-329. Radiated Restricted Lower Band Edge Measurement TxBF

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

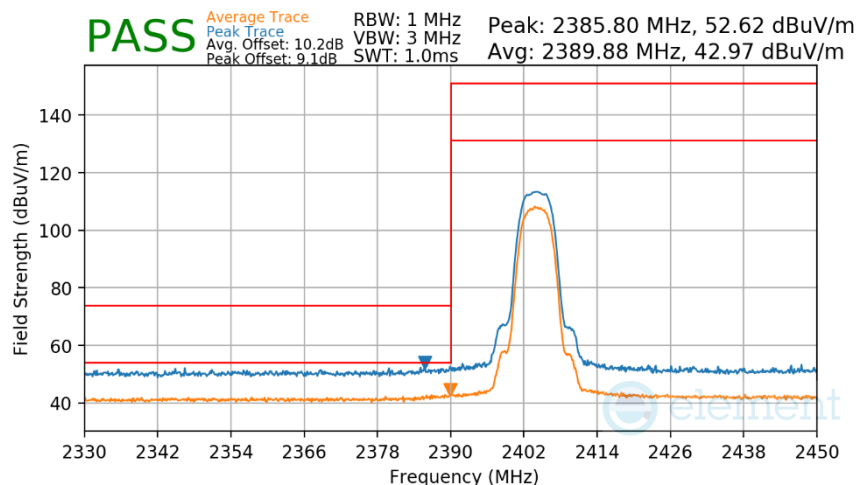


Plot 7-330. Radiated Restricted Lower Band Edge Measurement TxBF

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 208 of 222


V 11.0 05/2025

Bluetooth Mode: XHDRPS2
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

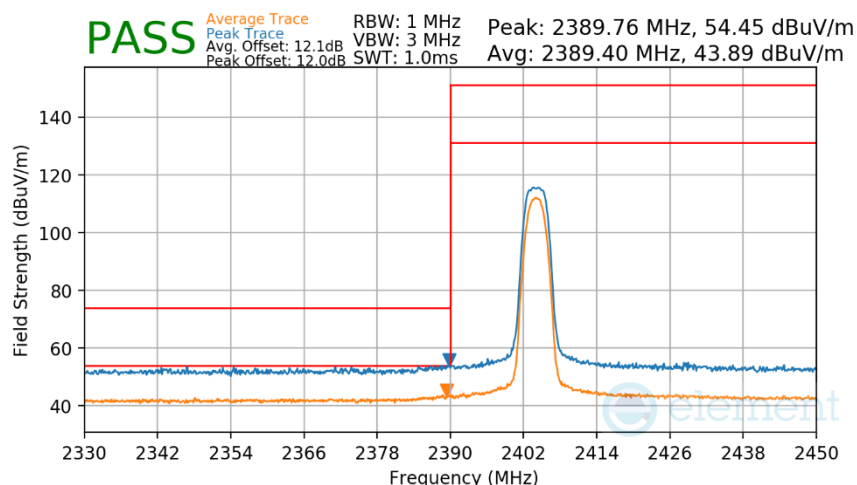

Plot 7-331. Radiated Restricted Lower Band Edge Measurement TxBF


Bluetooth Mode: XHDRPM8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

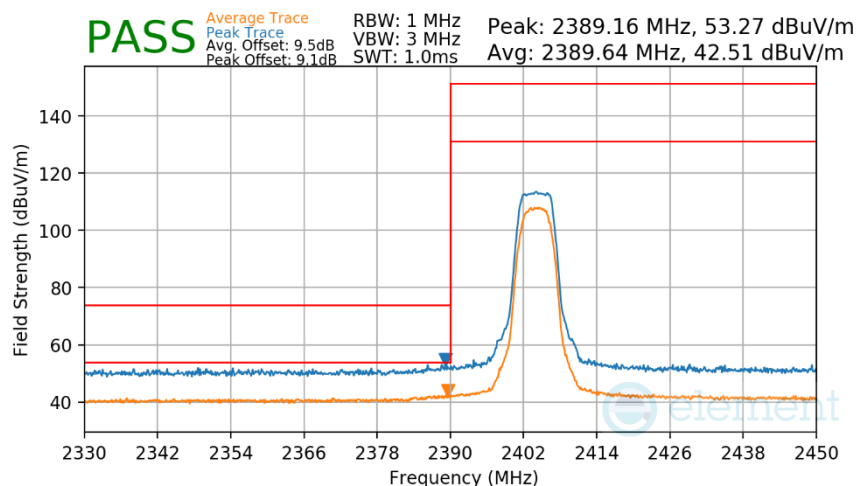

Plot 7-332. Radiated Restricted Lower Band Edge Measurement TxBF


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 209 of 222

Bluetooth Mode: XHDRPM16
 Data Rate: 16Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

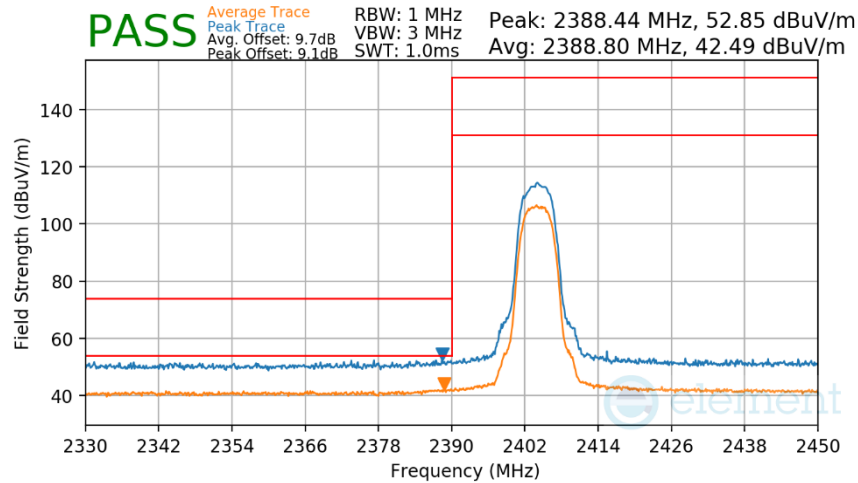

Plot 7-333. Radiated Restricted Lower Band Edge Measurement TxBF


Bluetooth Mode: HDT8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

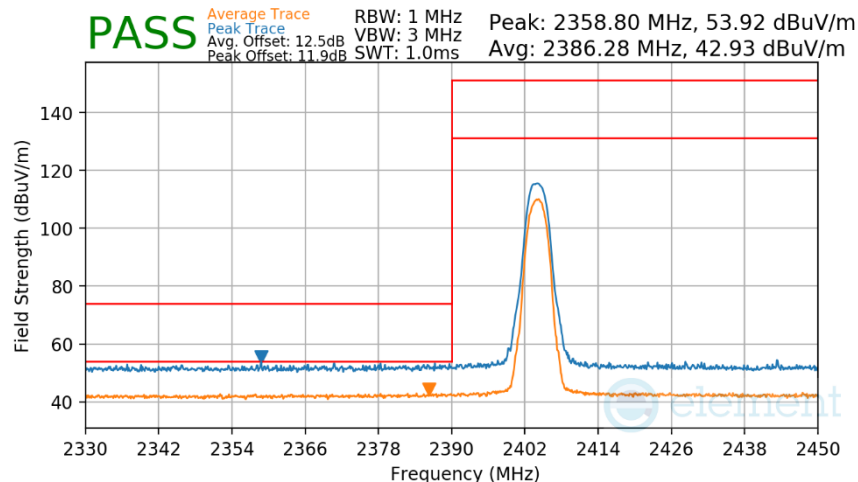

Plot 7-334. Radiated Restricted Lower Band Edge Measurement TxBF


FCC ID: BCGA3459 IC: 579C-A3459	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 210 of 222

Bluetooth Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

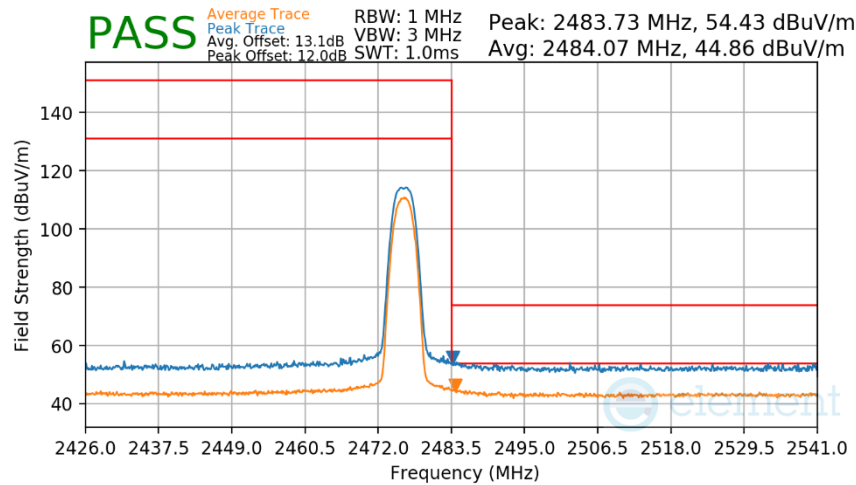

Plot 7-335. Radiated Restricted Upper Band Edge Measurement TxBF

Bluetooth Mode:	HDR8
Data Rate:	8Mbps
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2476MHz
Channel:	73

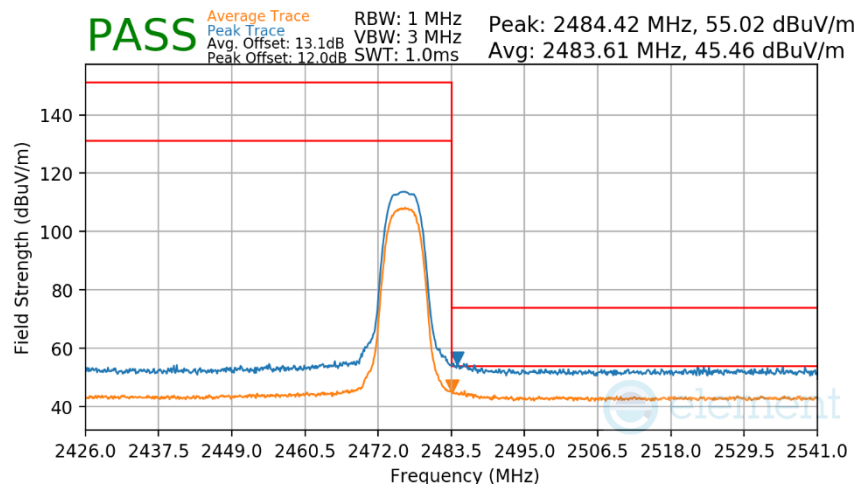


Plot 7-336. Radiated Restricted Upper Band Edge Measurement TxBF

FCC ID: BCGA3459 IC: 579C-A3459	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 211 of 222

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bluetooth Mode: XHDRPS2
 Data Rate: 2Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

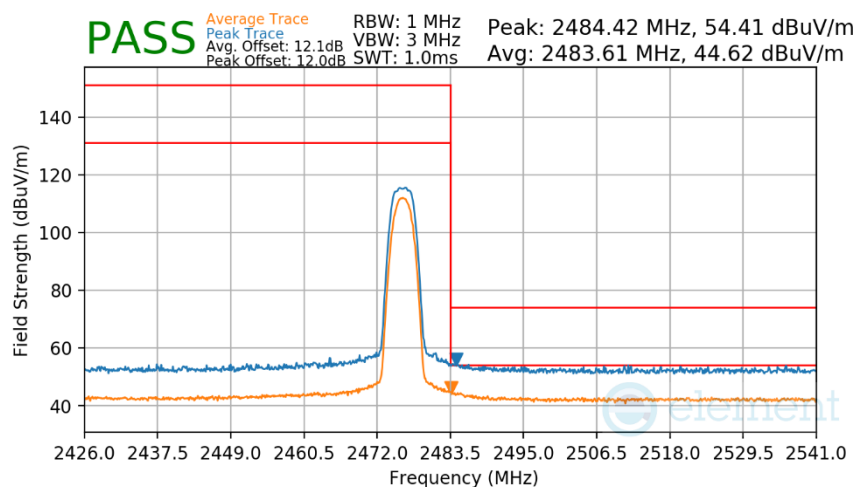

Plot 7-337. Radiated Restricted Upper Band Edge Measurement TxBF


Bluetooth Mode: XHDRPM8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

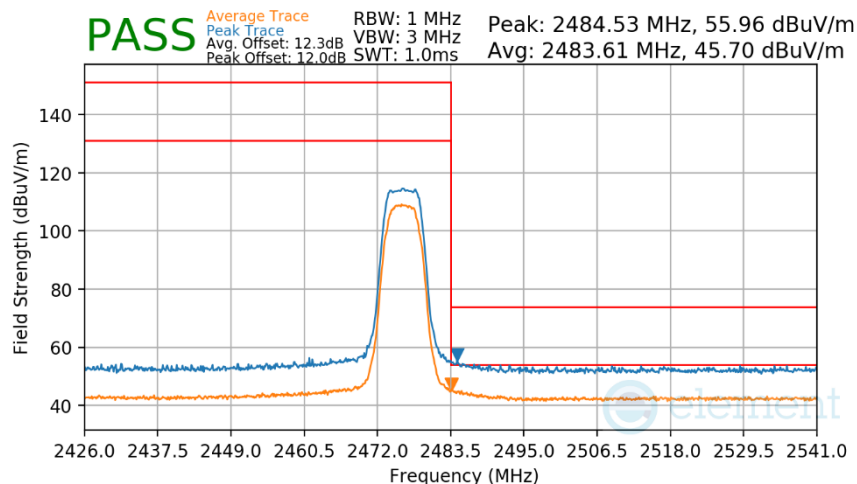

Plot 7-338. Radiated Restricted Upper Band Edge Measurement TxBF


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 212 of 222

Bluetooth Mode: XHDRPM16
 Data Rate: 16Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

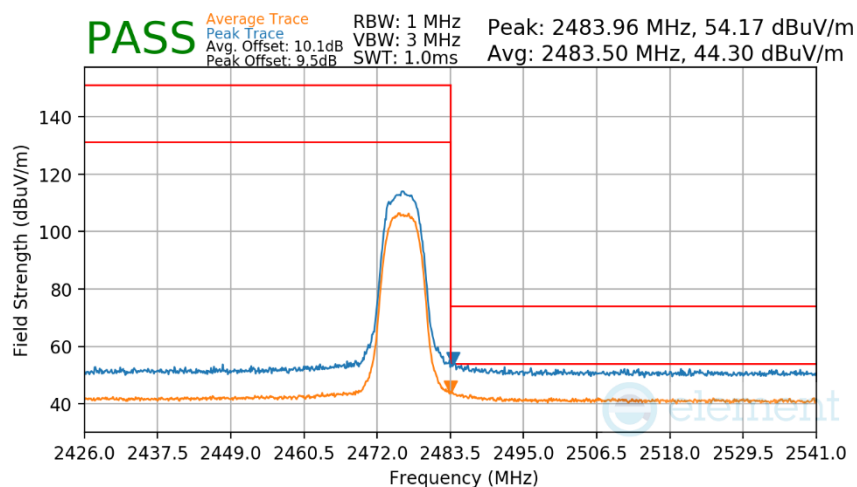

Plot 7-339. Radiated Restricted Upper Band Edge Measurement TxBF

Bluetooth Mode: HDT8
 Data Rate: 8Mbps
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2476MHz
 Channel: 73

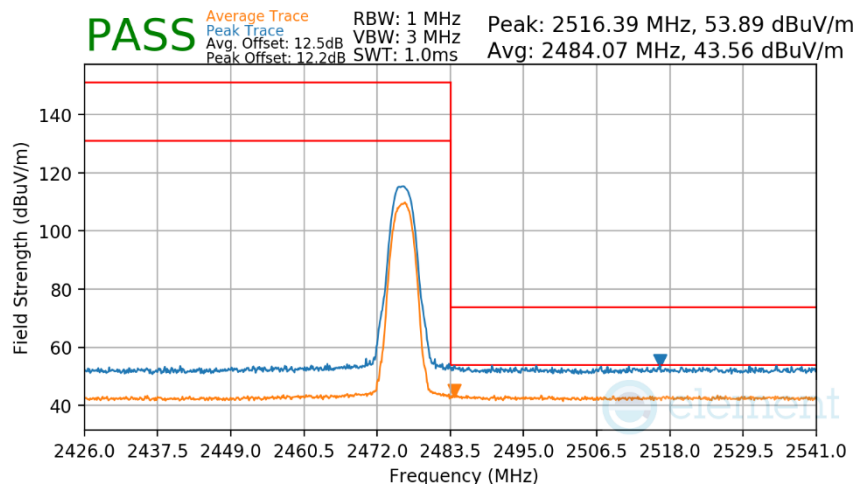

Plot 7-340. Radiated Restricted Upper Band Edge Measurement TxBF

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 213 of 222

7.9 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-19 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-19. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 214 of 222

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

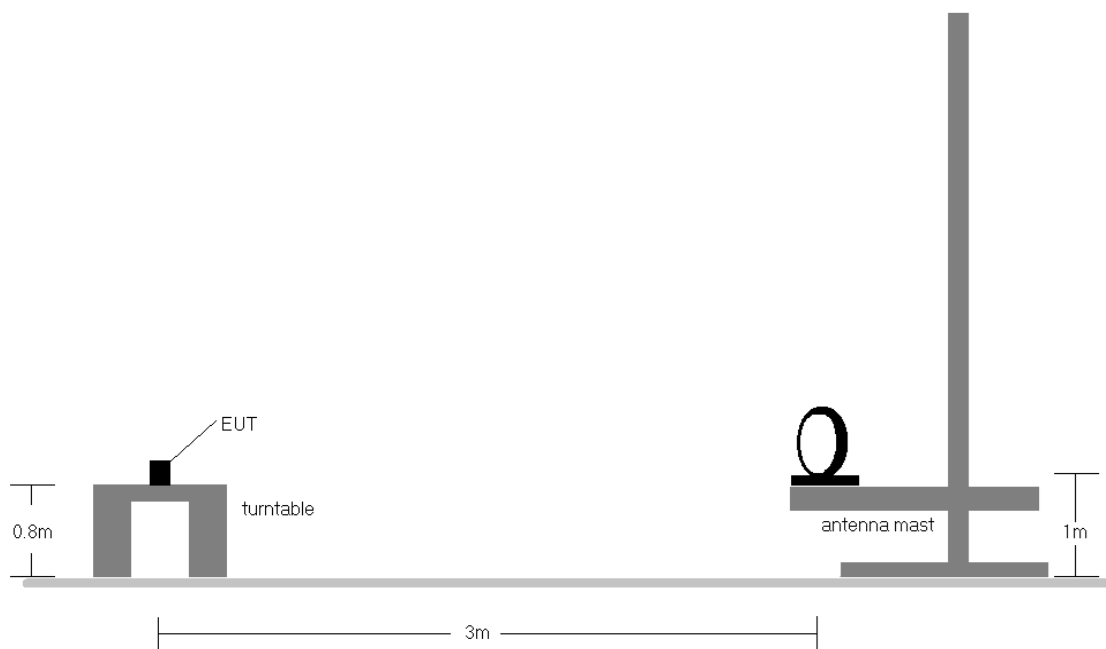


Figure 7-8. Radiated Test Setup < 30MHz

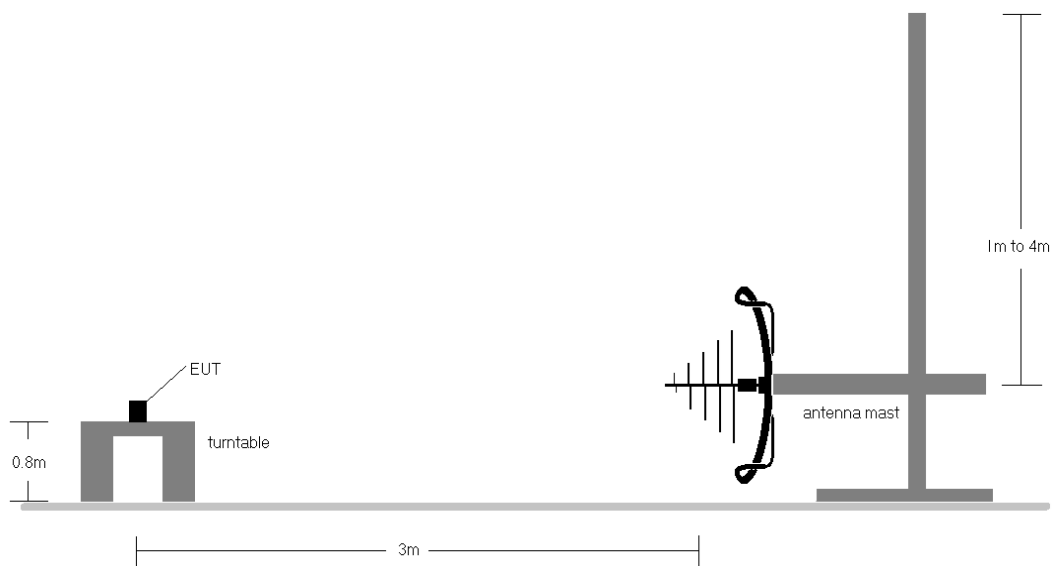


Figure 7-9. Radiated Test Setup < 1GHz

FCC ID: BCGA3459 IC: 579C-A3459	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 215 of 222

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-19.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation, antenna (including TxBF mode) and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$


FCC ID: BCGA3459 IC: 579C-A3459	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 216 of 222

V 11.0 05/2025

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

TxBF

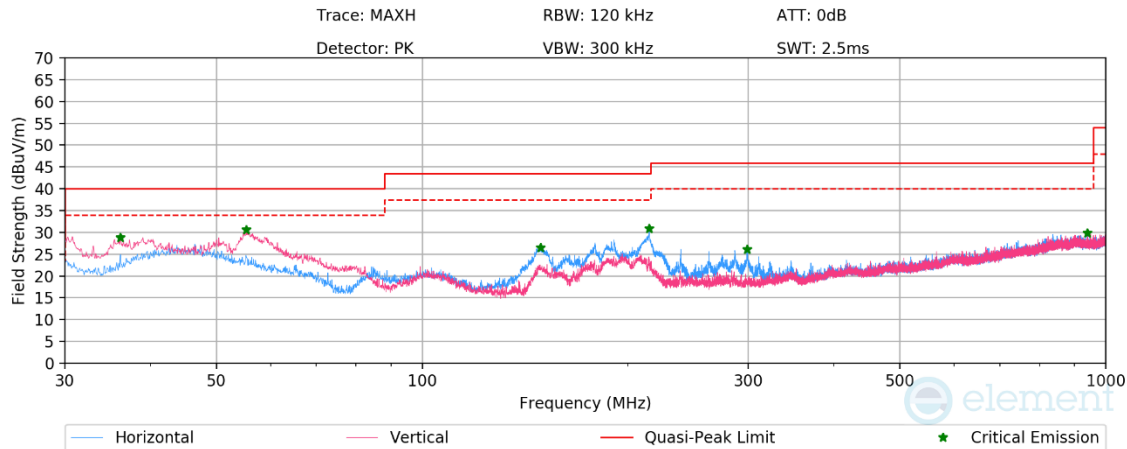

Plot 7-341. Radiated Spurious Emissions Below 1GHz TxBF (HDR4, ePA – Ch.38 with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.15	Max-Peak	V	100	-	-60.14	-18.04	28.82	40.00	-11.18
55.23	Max-Peak	V	100	-	-60.75	-15.61	30.64	40.00	-9.36
149.01	Max-Peak	H	200	-	-59.28	-21.18	26.54	43.50	-16.96
214.83	Max-Peak	H	100	-	-58.19	-17.92	30.90	43.50	-12.60
298.70	Max-Peak	H	100	-	-65.42	-15.40	26.18	46.00	-19.82
939.61	Max-Peak	H	300	-	-72.81	-4.30	29.89	46.00	-16.11

Table 7-20. Radiated Spurious Emissions Below 1GHz TxBF (HDR4, ePA – Ch.38 with AC/DC Adapter)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 217 of 222

7.10 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-21. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 218 of 222

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

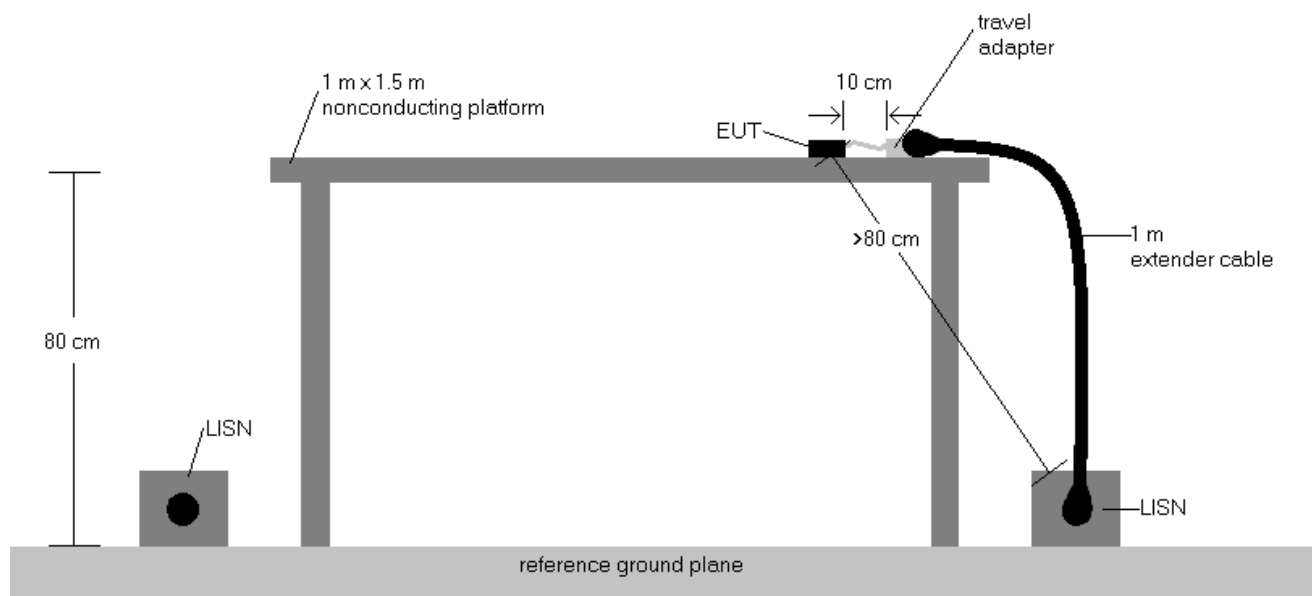


Figure 7-10. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 219 of 222

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

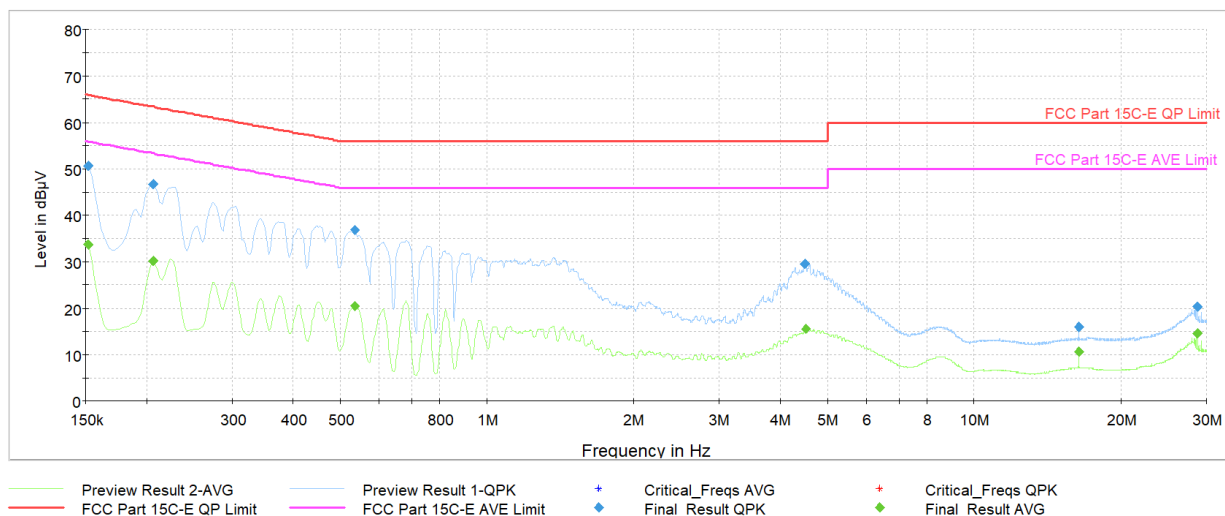


Plot 7-342. AC Line Conducted Plot with Bluetooth HDR TxBF (L1, HDR4 ePA - Ch.38 with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.152	FINAL	—	33.63	55.88	-22.25	L1	GND
0.152	FINAL	50.6	—	65.88	-15.29	L1	GND
0.206	FINAL	—	30.10	53.36	-23.26	L1	GND
0.206	FINAL	46.7	—	63.36	-16.69	L1	GND
0.535	FINAL	—	20.42	46.00	-25.58	L1	GND
0.535	FINAL	36.8	—	56.00	-19.19	L1	GND
4.502	FINAL	29.6	—	56.00	-26.39	L1	GND
4.506	FINAL	—	15.47	46.00	-30.53	L1	GND
16.370	FINAL	16.0	—	60.00	-43.99	L1	GND
16.370	FINAL	—	10.55	50.00	-39.45	L1	GND
28.687	FINAL	—	14.66	50.00	-35.34	L1	GND
28.687	FINAL	20.3	—	60.00	-39.66	L1	GND

Table 7-22. AC Line Conducted Data with Bluetooth HDR TxBF (L1, HDR4 ePA - Ch.38 with AC/DC Adapter)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 220 of 222

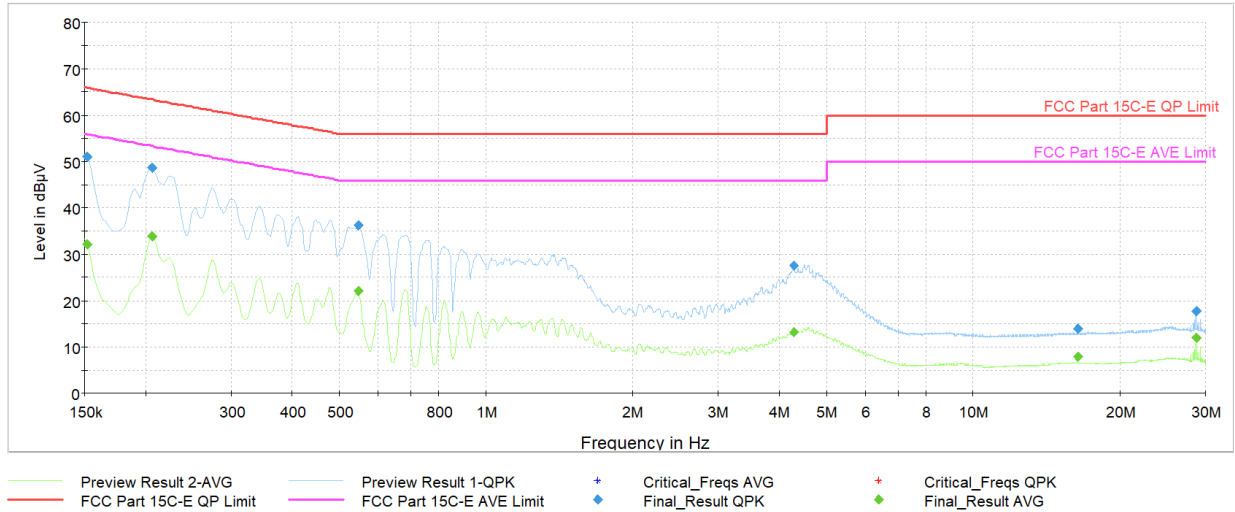

Plot 7-343. AC Line Conducted Plot with Bluetooth HDR Tx BF (N, HDR4 ePA - Ch.38 with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.152	FINAL	—	32.04	55.88	-23.84	N	GND
0.152	FINAL	51.1	—	65.88	-14.78	N	GND
0.206	FINAL	—	33.91	53.36	-19.45	N	GND
0.206	FINAL	48.7	—	63.36	-14.67	N	GND
0.548	FINAL	—	22.04	46.00	-23.96	N	GND
0.548	FINAL	36.2	—	56.00	-19.76	N	GND
4.292	FINAL	—	13.24	46.00	-32.76	N	GND
4.295	FINAL	27.5	—	56.00	-28.50	N	GND
16.375	FINAL	14.0	—	60.00	-45.99	N	GND
16.375	FINAL	—	7.85	50.00	-42.15	N	GND
28.685	FINAL	—	11.96	50.00	-38.04	N	GND
28.687	FINAL	17.6	—	60.00	-42.36	N	GND

Table 7-23. AC Line Conducted Data with Bluetooth HDR Tx BF (N, HDR4 ePA - Ch.38 with AC/DC Adapter)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 221 of 222

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3459 and IC: 579C-A3459** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-07-R6.BCG	Test Dates: 09/10/2025 - 12/23/2025	EUT Type: Tablet Device	Page 222 of 222

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.