


7.7.9 Antenna WF7a Radiated Band Edge Measurements (160MHz BW)


RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

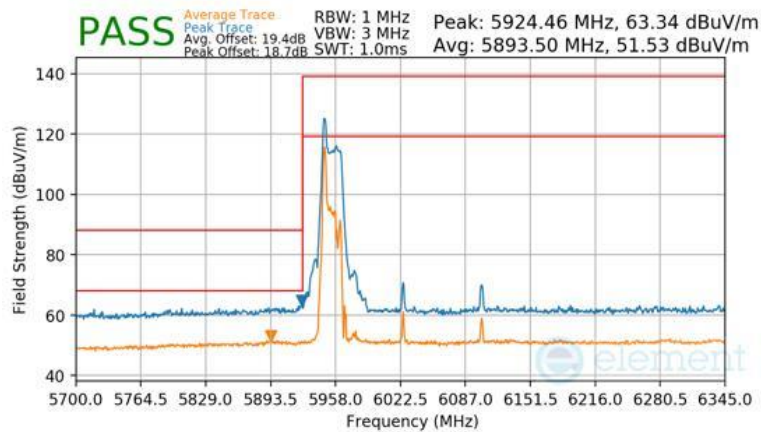

Plot 7-947 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 36
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

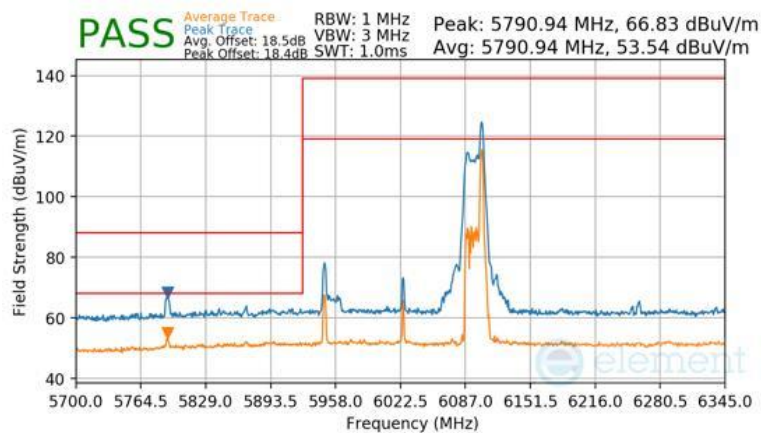


Plot 7-948 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 355 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

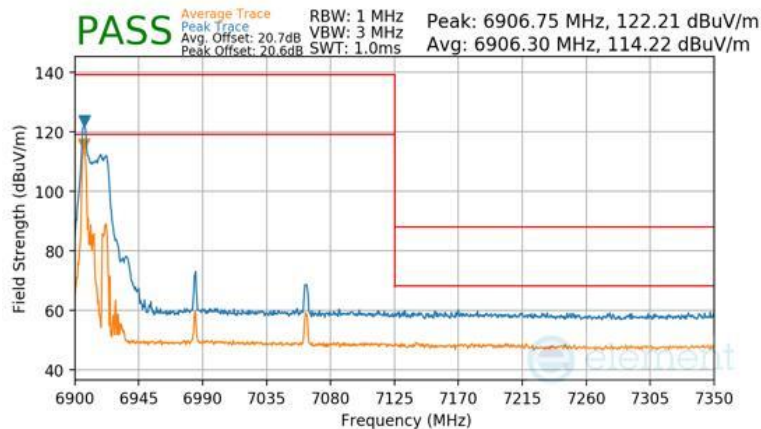

Plot 7-949 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 36
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

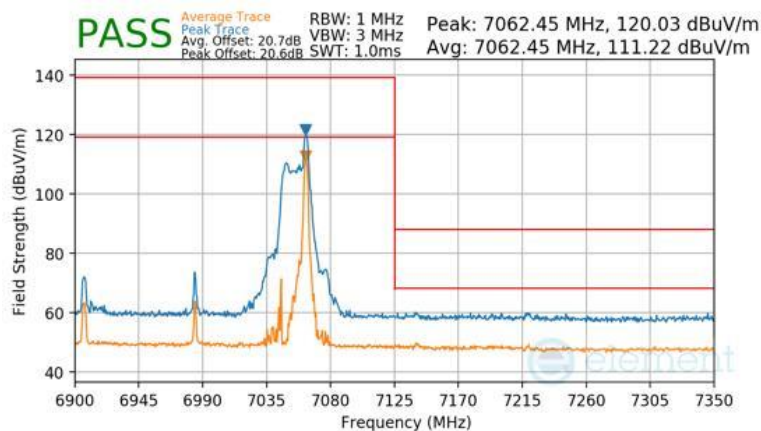

Plot 7-950 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26 (H)


FCC ID: BCGA3459 IC: 579C-A3459			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 356 of 418	

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

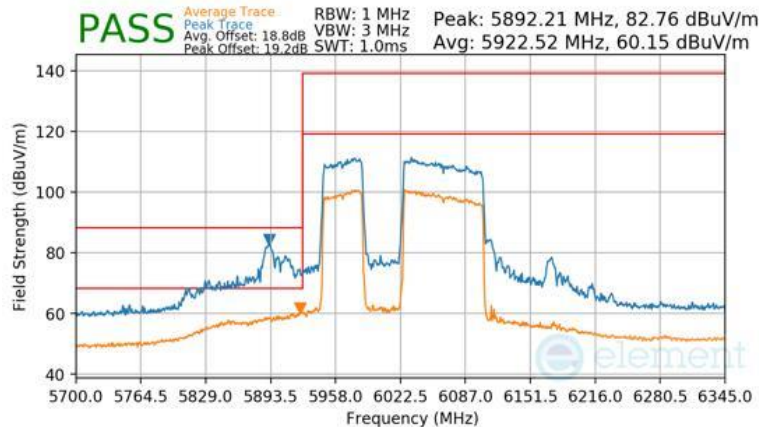

Plot 7-953 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

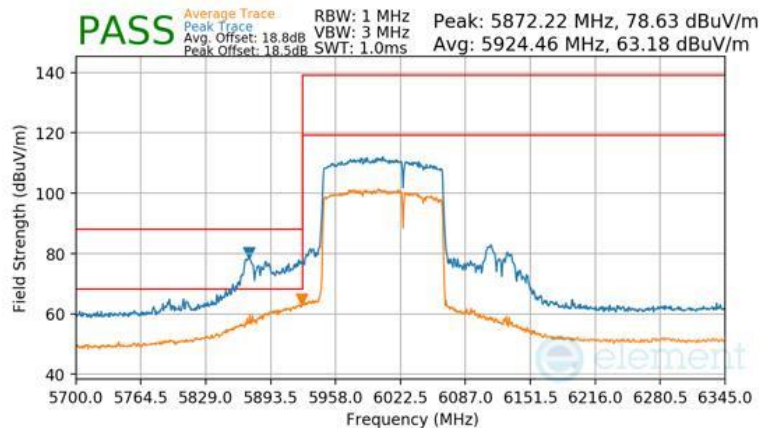


Plot 7-954 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 358 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

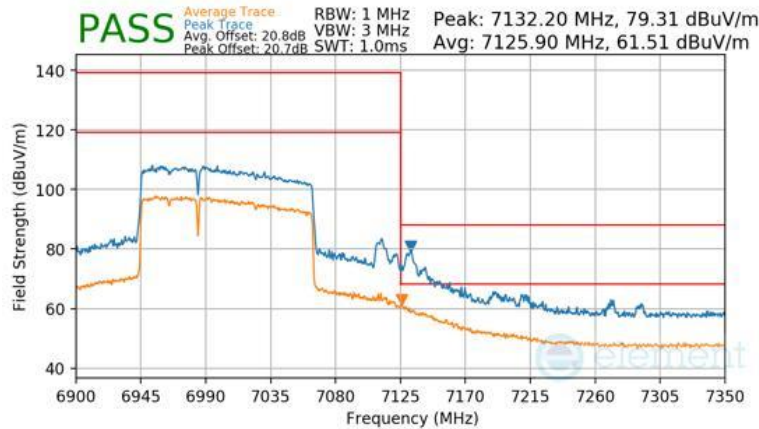

Plot 7-955 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

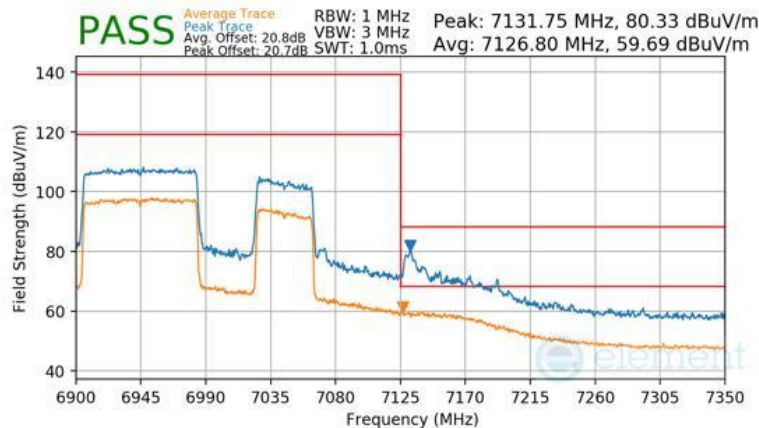


Plot 7-956 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 359 of 418

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

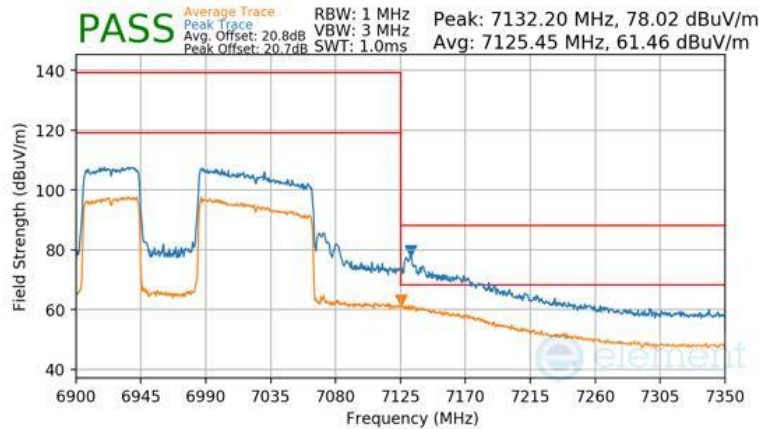

Plot 7-957 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

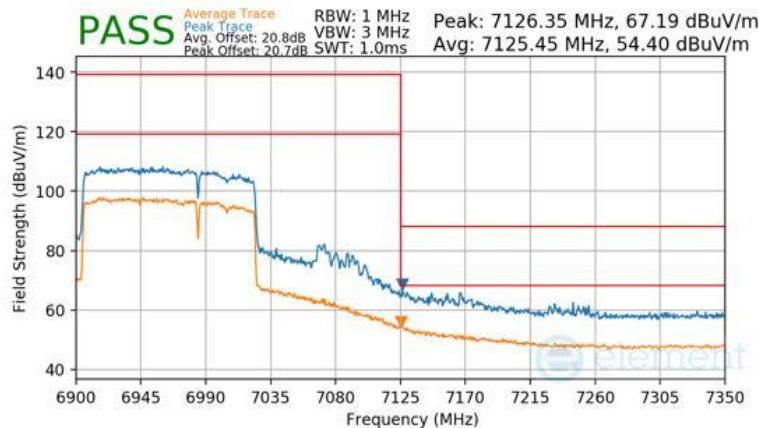


Plot 7-958 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 360 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

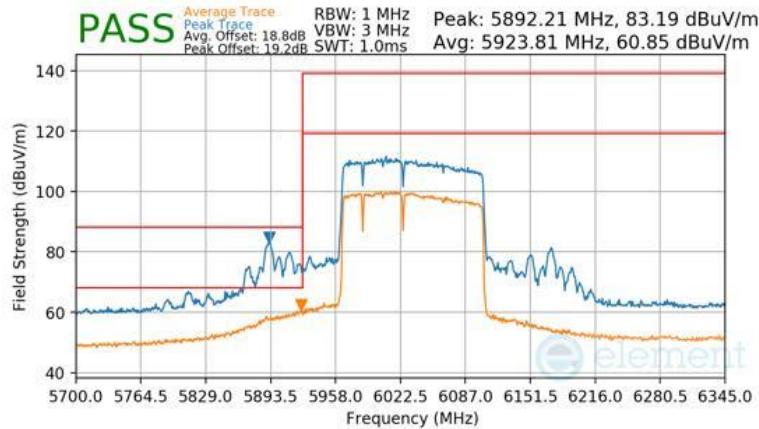

Plot 7-959 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

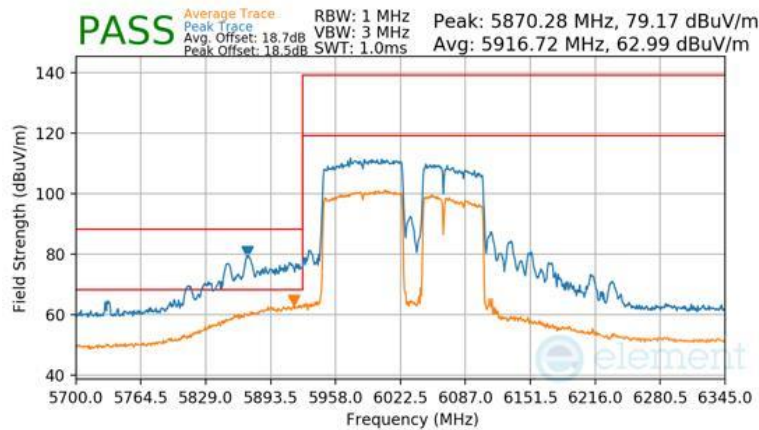


Plot 7-960 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 361 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

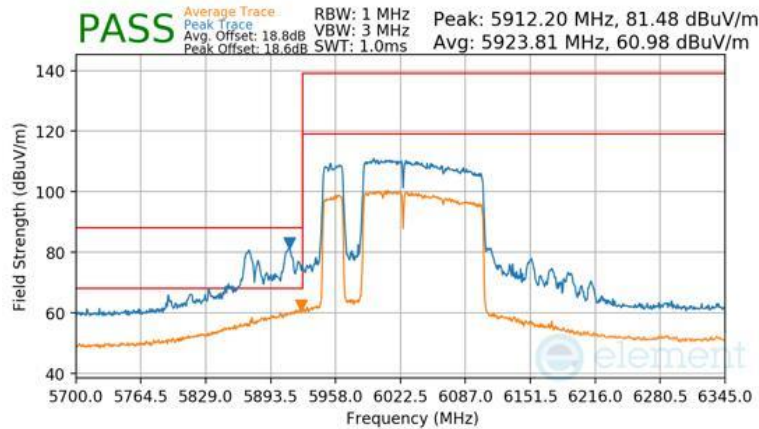

Plot 7-961 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

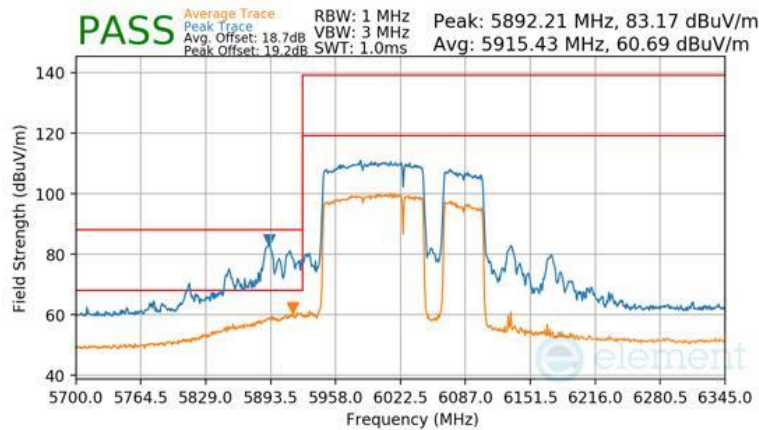


Plot 7-962 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 362 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

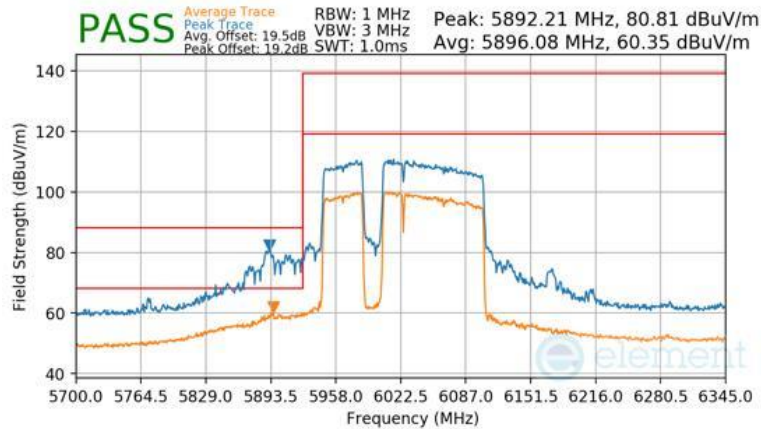

Plot 7-963 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

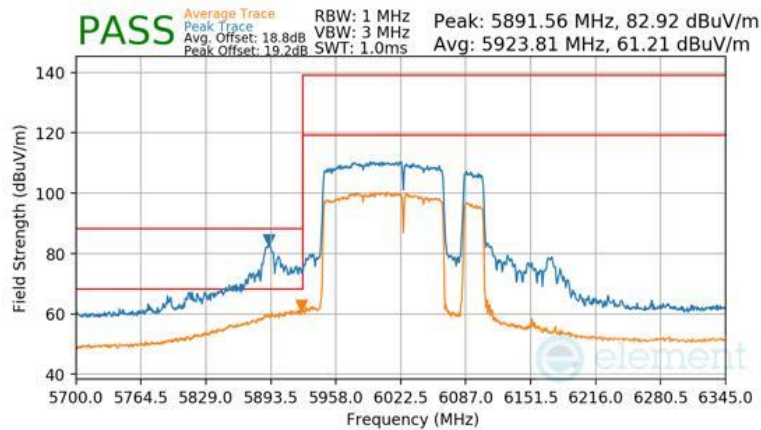


Plot 7-964 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 363 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

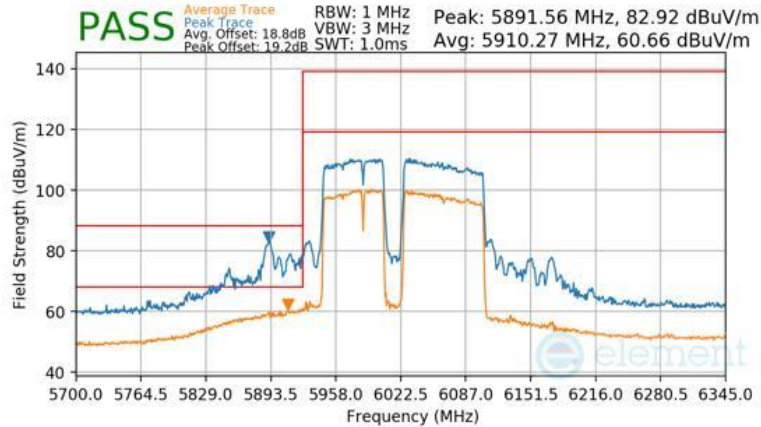

Plot 7-965 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

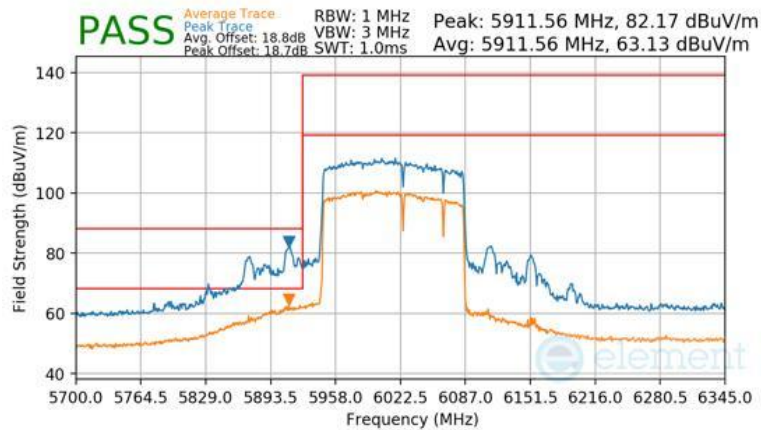


Plot 7-966 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 364 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

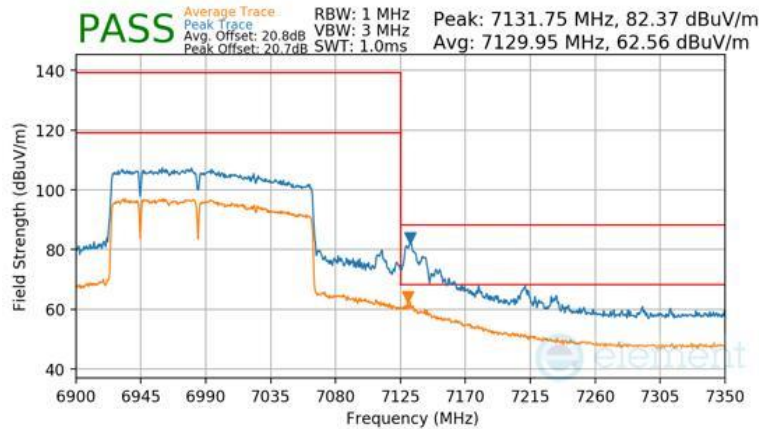

Plot 7-967 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

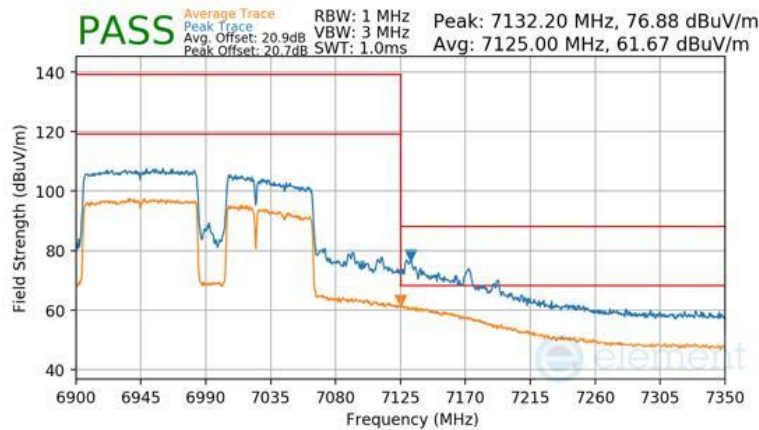


Plot 7-968 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 365 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

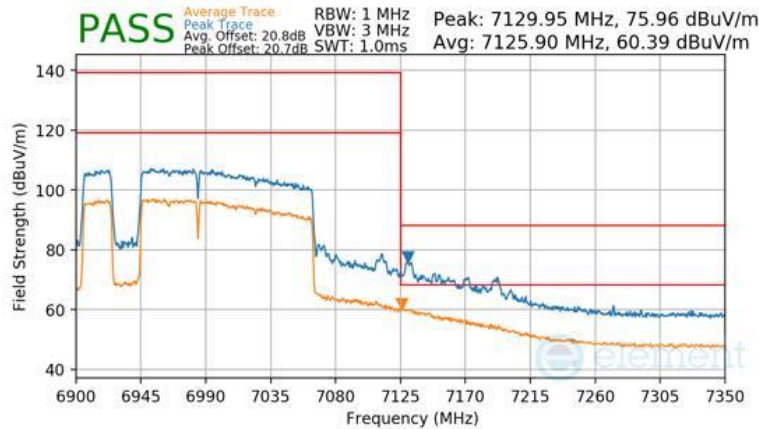

Plot 7-969 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

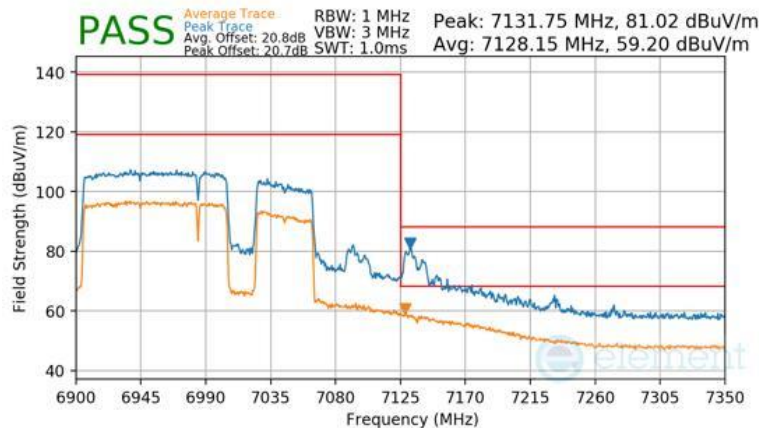


Plot 7-970 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 366 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

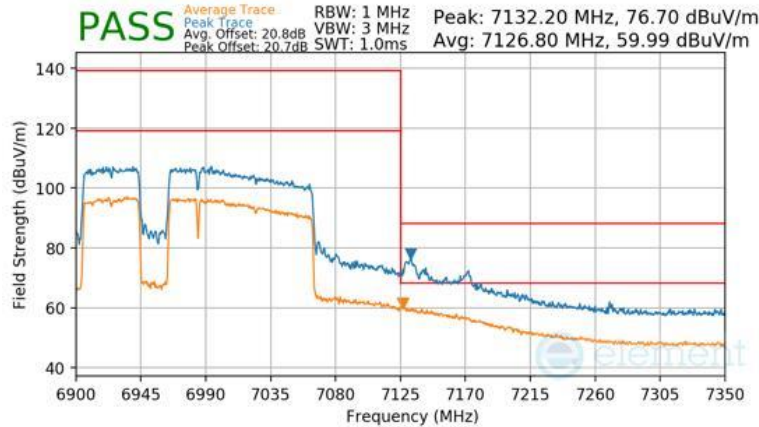

Plot 7-971 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

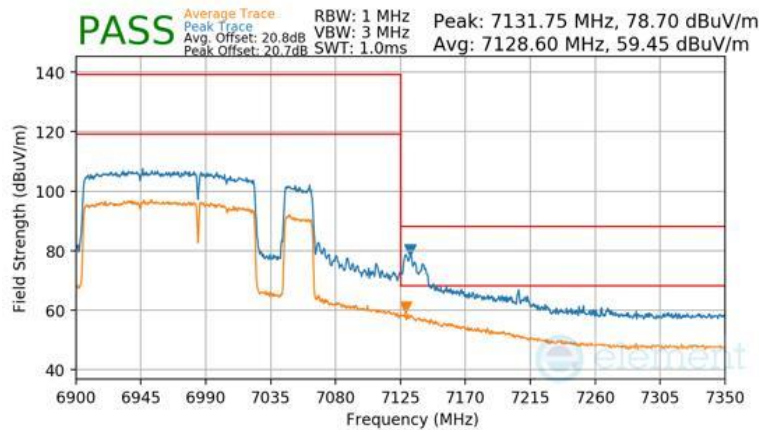


Plot 7-972 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 367 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

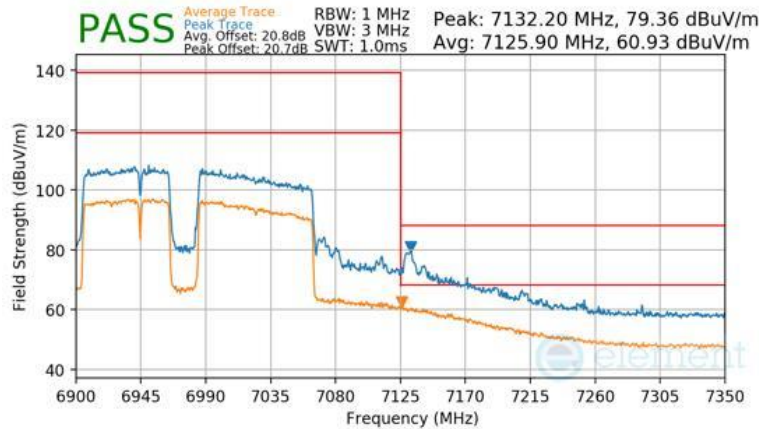

Plot 7-973 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

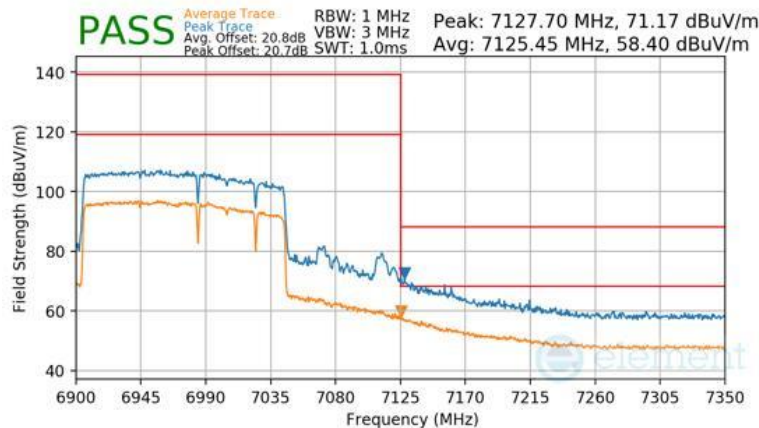


Plot 7-974 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 368 of 418

V 11.0 05/2025


RU996x2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

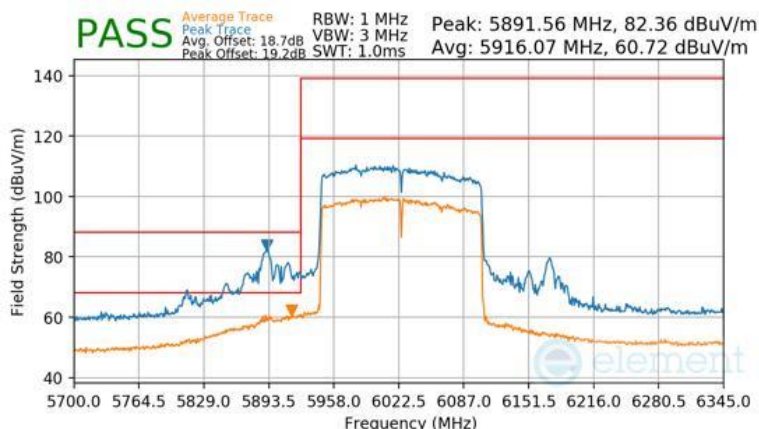

Plot 7-975 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996X2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

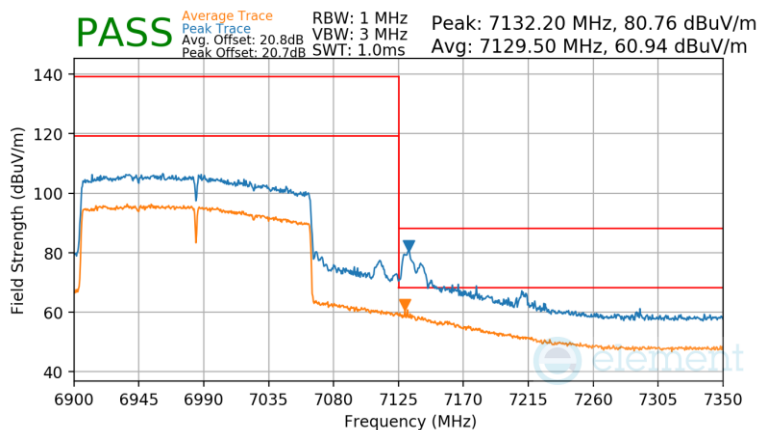

Plot 7-976 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996X2


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 369 of 418

V 11.0 05/2025

7.7.10 SDM Radiated Band Edge Measurements (20MHz BW)


RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

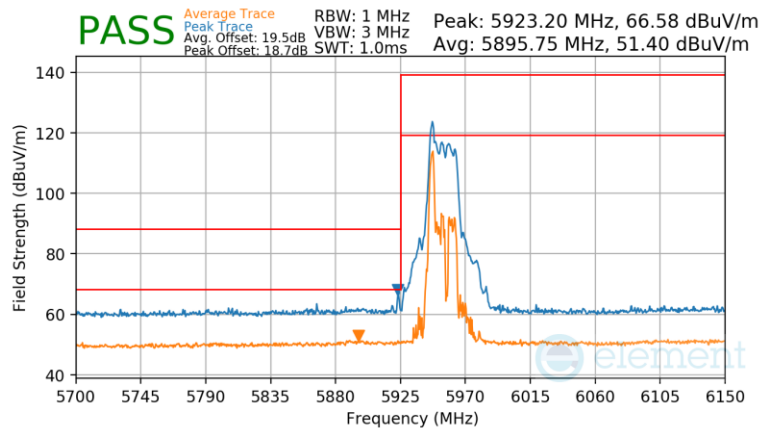

Plot 7-977 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 8
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

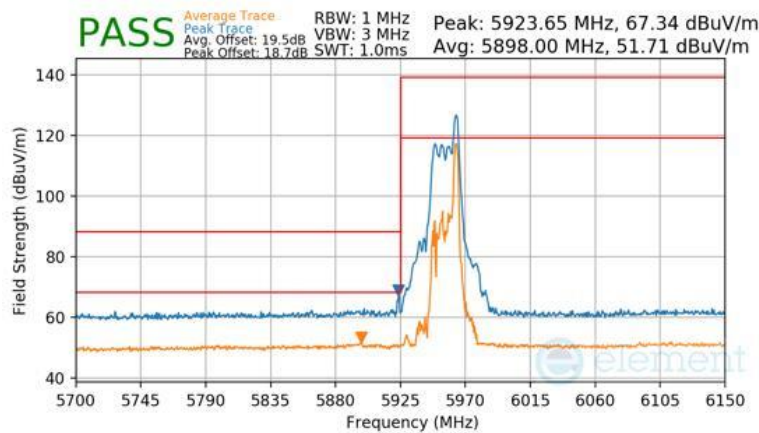


Plot 7-978 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 370 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

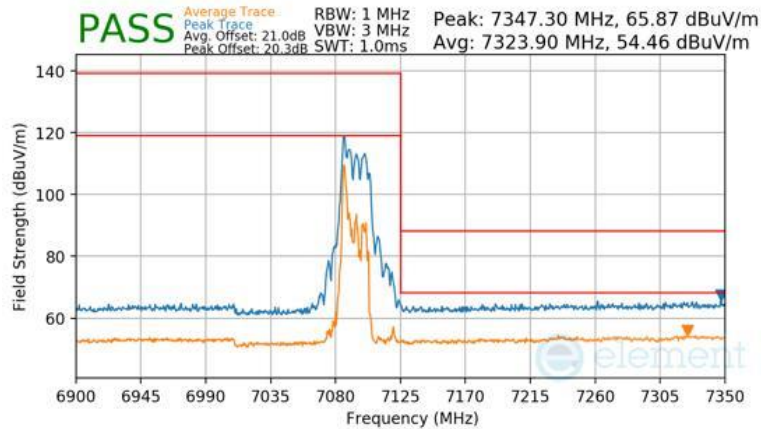

Plot 7-979 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 8
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

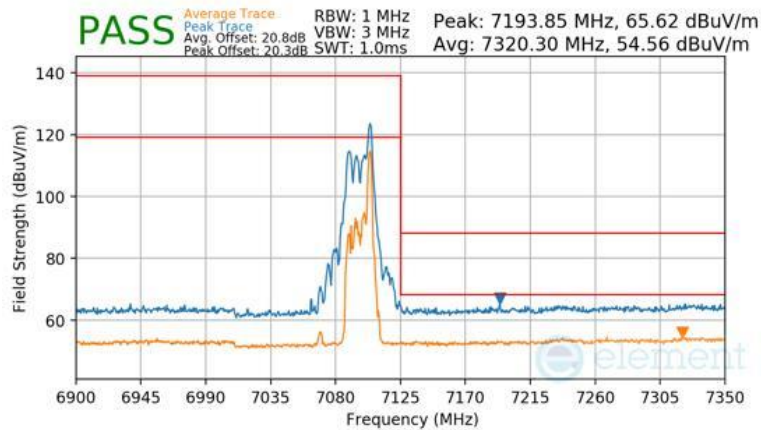


Plot 7-980 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 371 of 418


MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

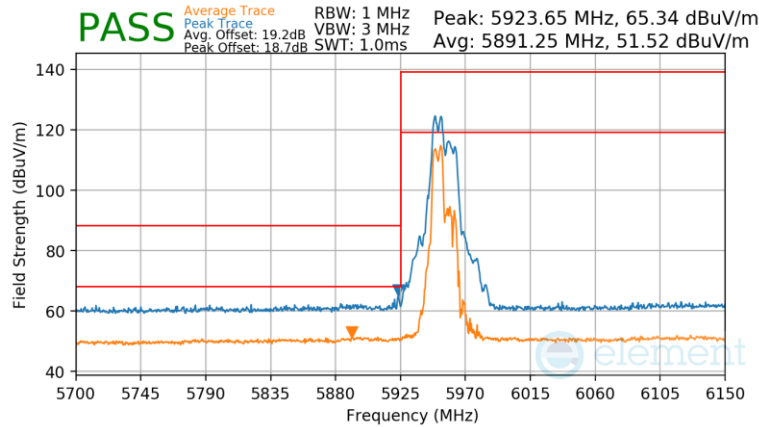

Plot 7-981 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU52+26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

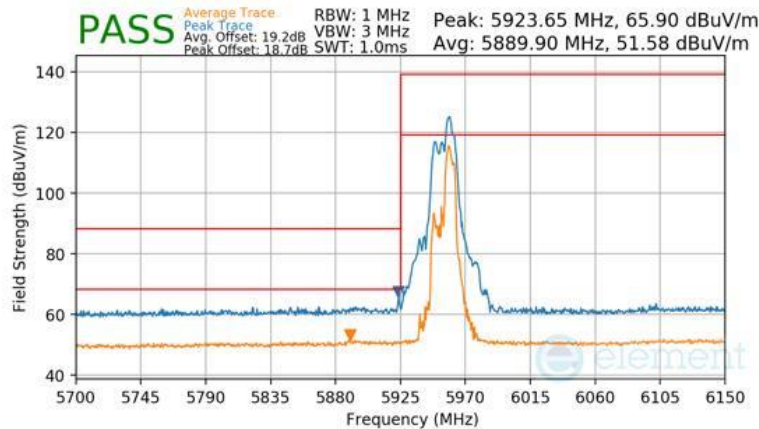


Plot 7-982 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU52+26

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 372 of 418

V 11.0 05/2025


RU242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

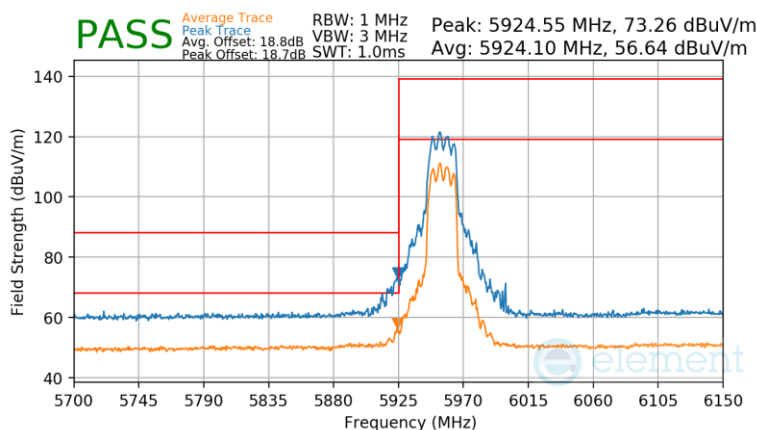

Plot 7-985 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

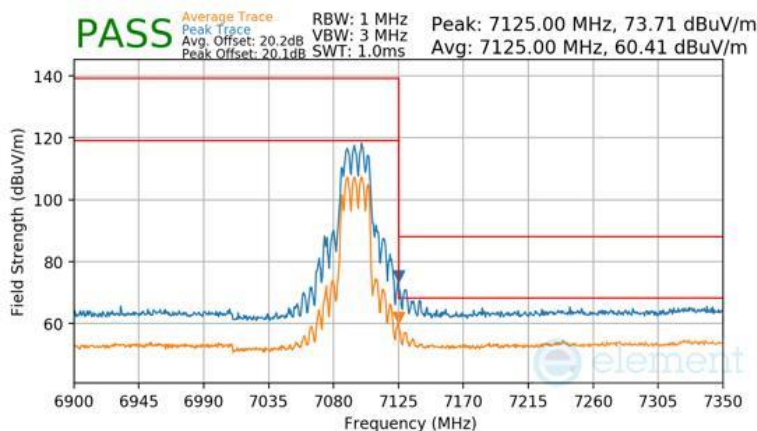


Plot 7-986 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU242

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 374 of 418


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 7115MHz
Channel: 233

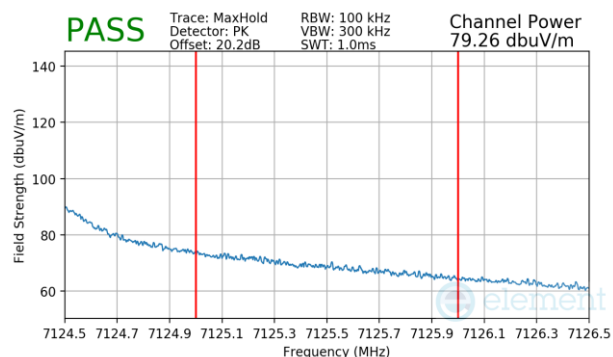

Plot 7-987 SDM Radiated Upper Band Edge (Peak – UNII Band 8) - RU242

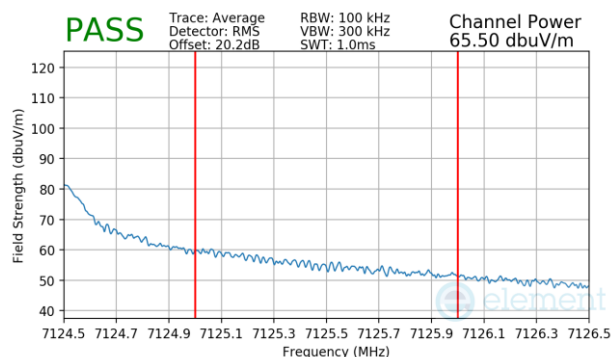

Plot 7-988 SDM Radiated Upper Band Edge (Average – UNII Band 8) - RU242


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device		Page 375 of 418

V 11.0 05/2025

7.7.11 SDM Radiated Band Edge Measurements (40MHz BW)


RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 5965MHz
Channel: 3

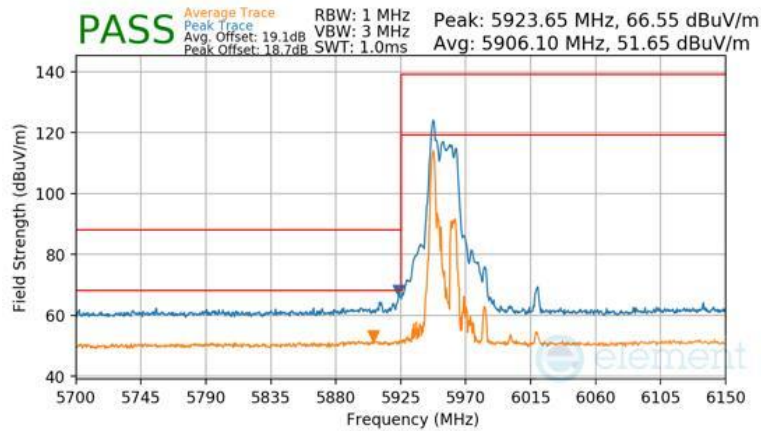

Plot 7-989 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 17
Distance of Measurements: 3 Meters
Operating Frequency: 5965MHz
Channel: 3

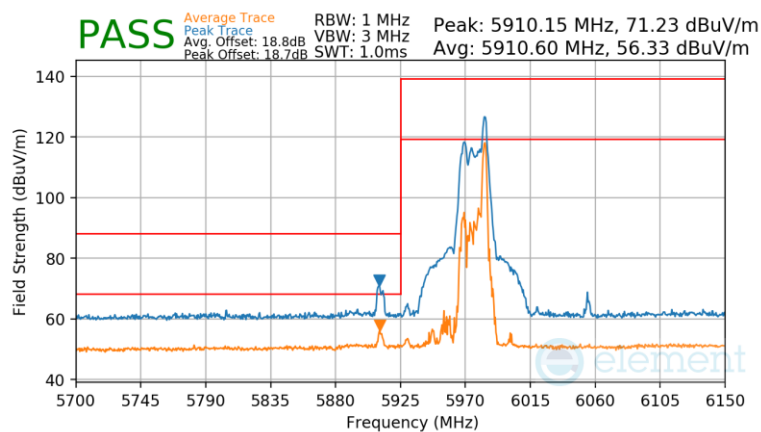


Plot 7-990 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 376 of 418

V 11.0 05/2025


RU484

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 65
Distance of Measurements: 3 Meters
Operating Frequency: 5965MHz
Channel: 3

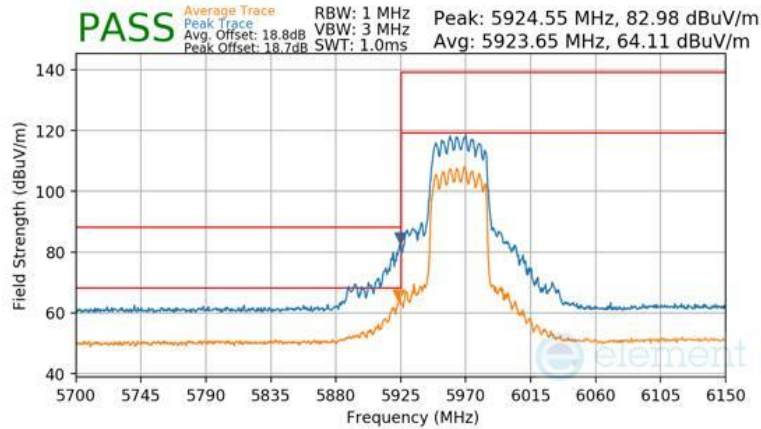

Plot 7-993 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 65
Distance of Measurements: 3 Meters
Operating Frequency: 7085MHz
Channel: 227

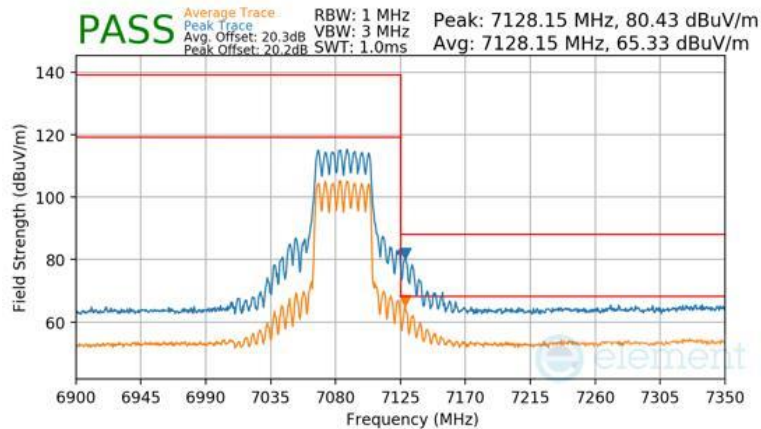

Plot 7-994 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 378 of 418

V 11.0 05/2025

7.7.12 SDM Radiated Band Edge Measurements (80MHz BW)


RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

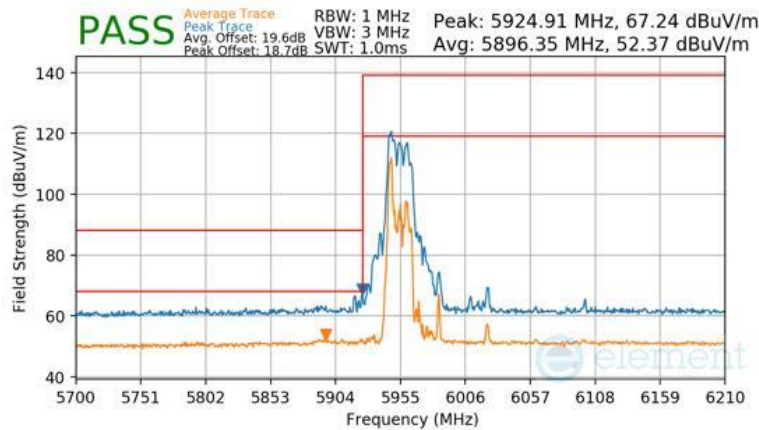

Plot 7-995 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 36
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

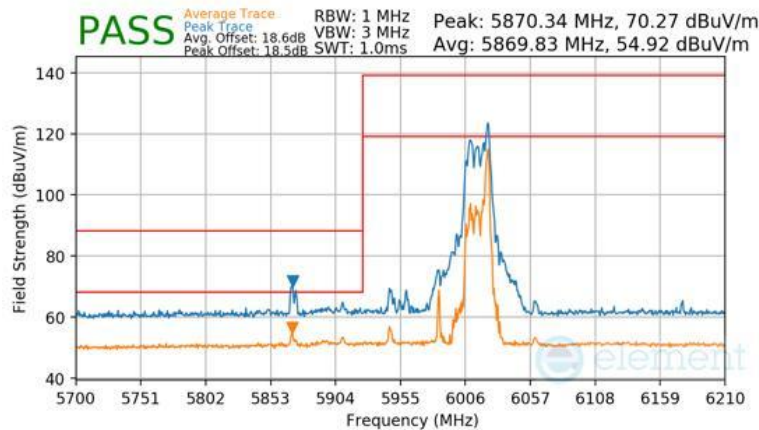


Plot 7-996 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 379 of 418

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

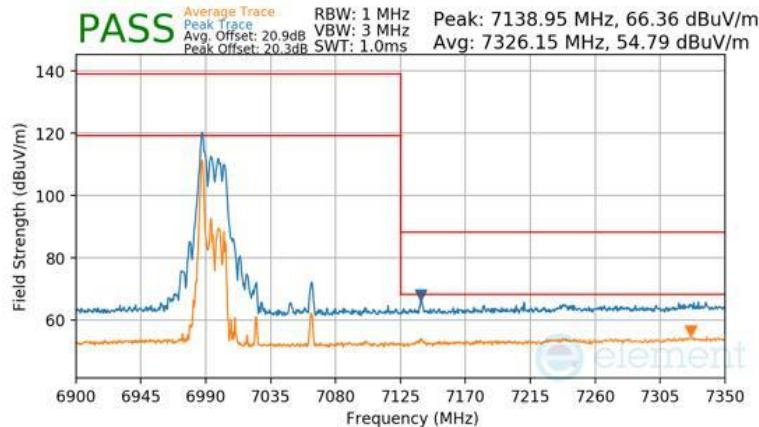

Plot 7-997 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 36
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

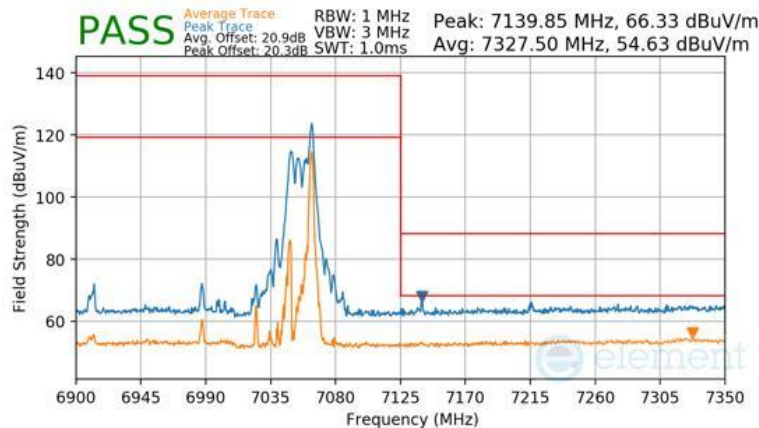


Plot 7-998 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 380 of 418


MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 90
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

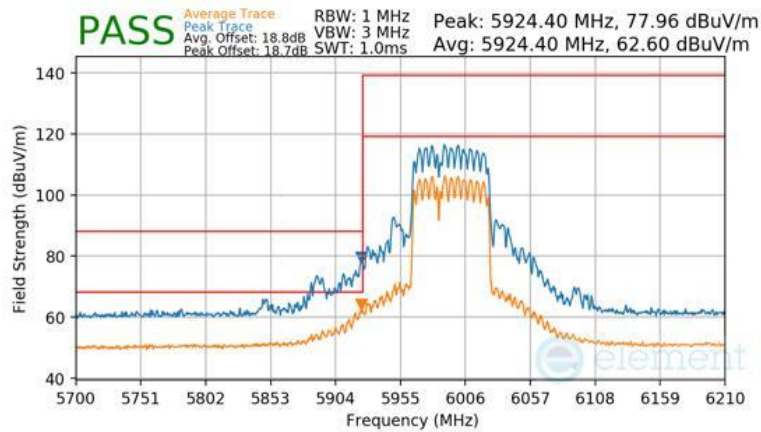

Plot 7-999 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 91
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

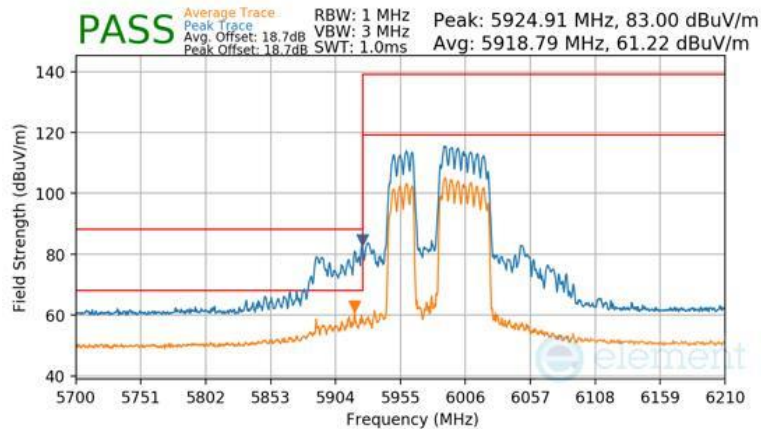


Plot 7-1000 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 381 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 92
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

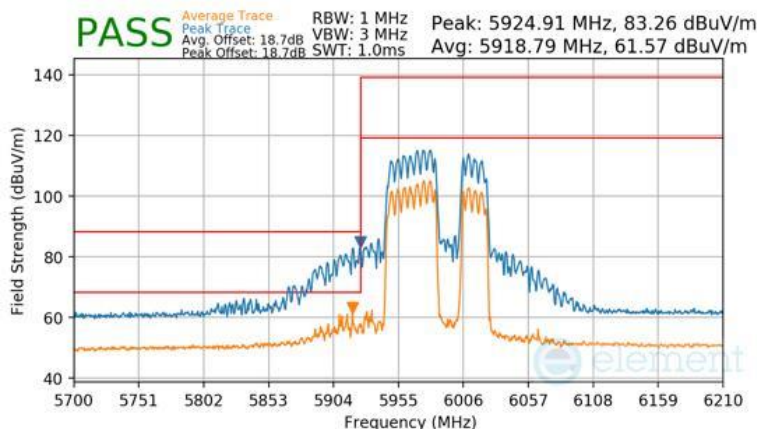

Plot 7-1001 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 93
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

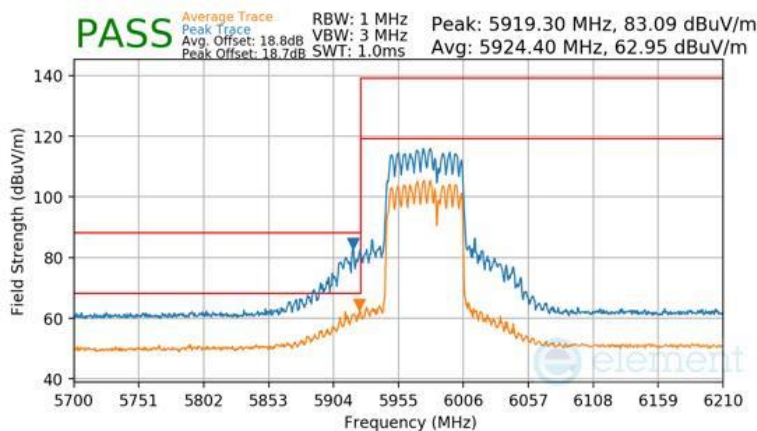


Plot 7-1002 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG			Page 382 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 90
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

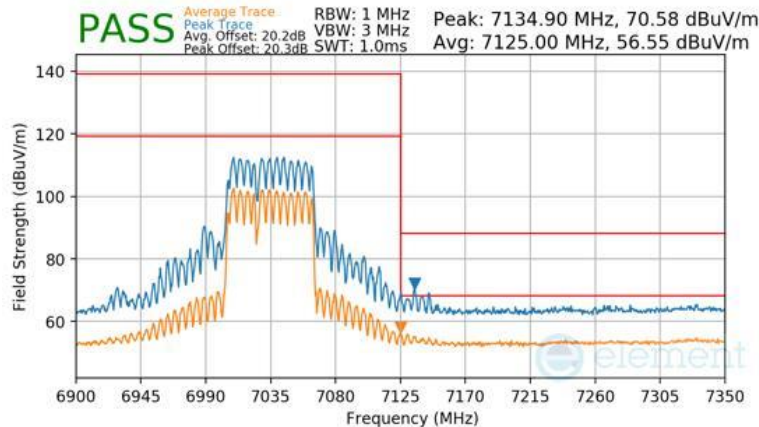

Plot 7-1003 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 91
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

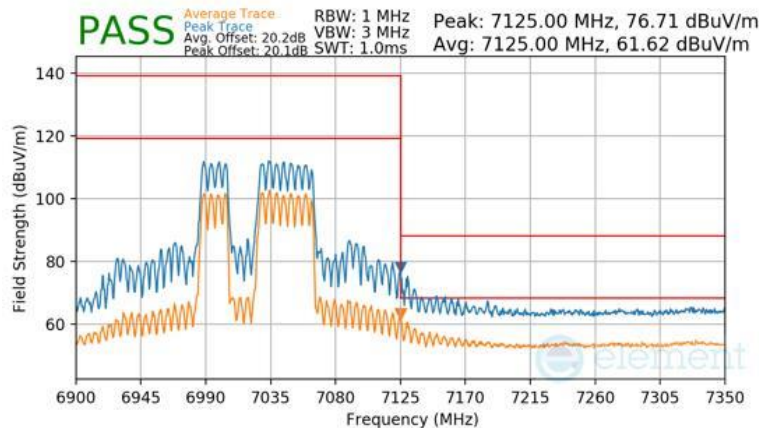

Plot 7-1004 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 383 of 418

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 92
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

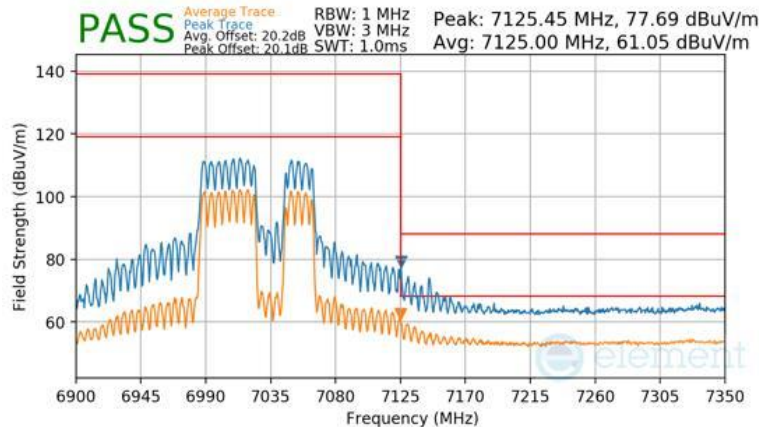

Plot 7-1005 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 93
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

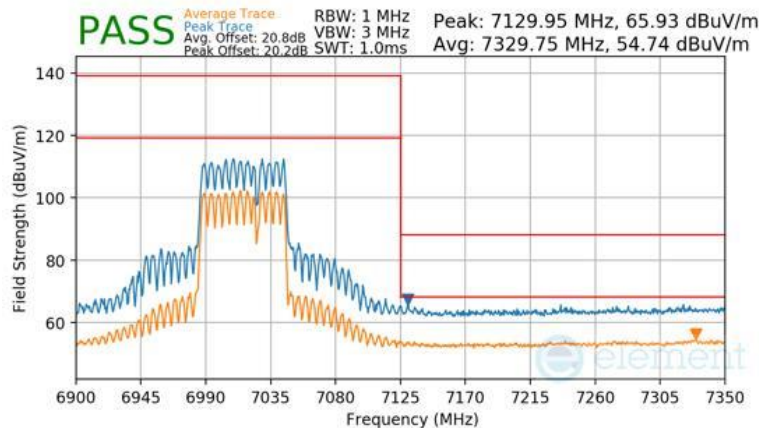


Plot 7-1006 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 384 of 418


RU996

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

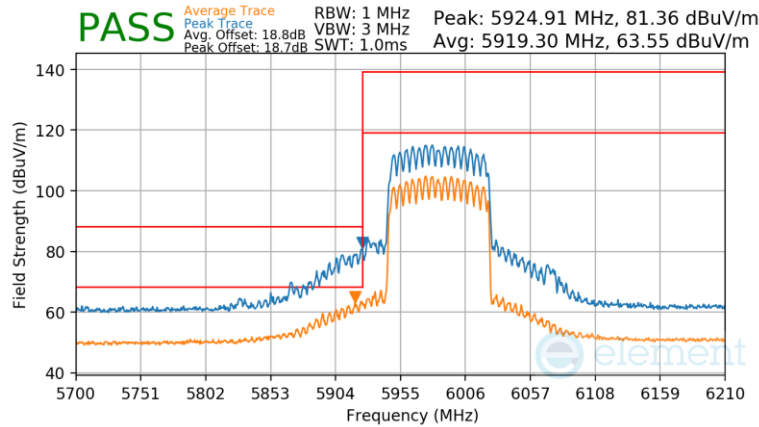

Plot 7-1007 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

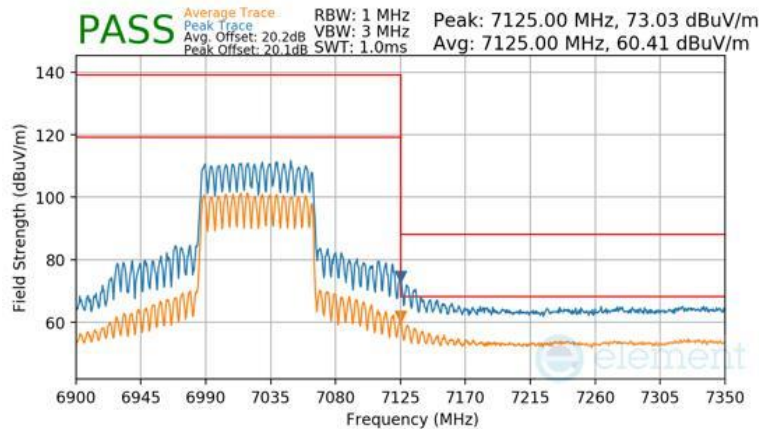

Plot 7-1008 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 385 of 418


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7.13 SDM Radiated Band Edge Measurements (160MHz BW)


RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

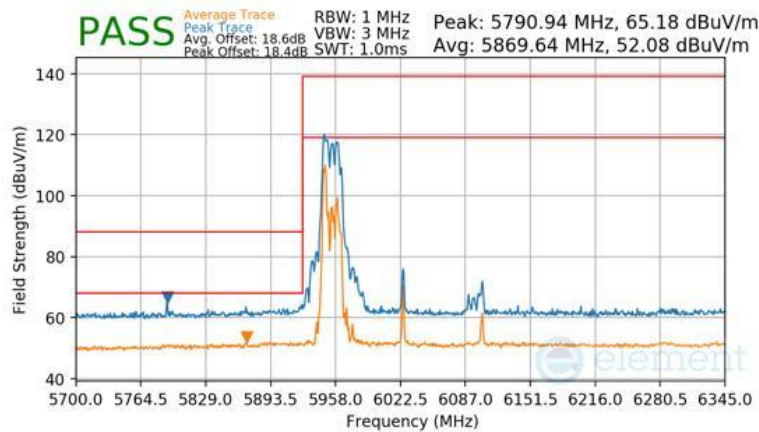

Plot 7-1009 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 36
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

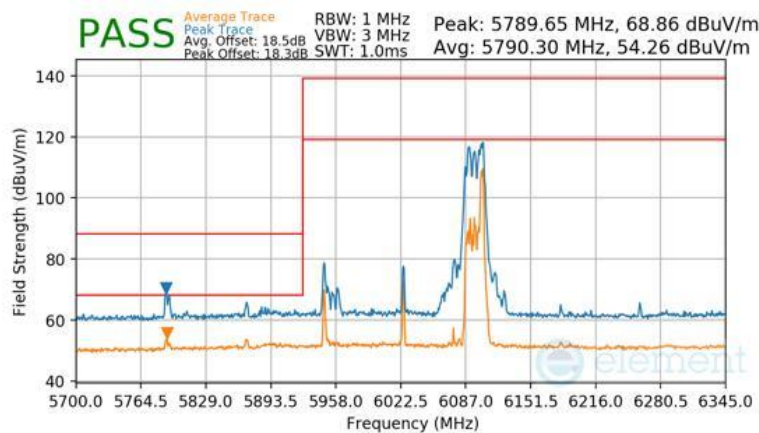


Plot 7-1010 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 386 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

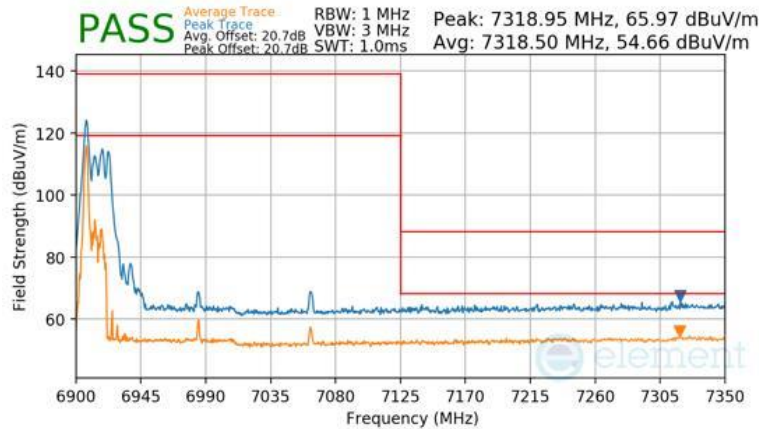

Plot 7-1011 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 36
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

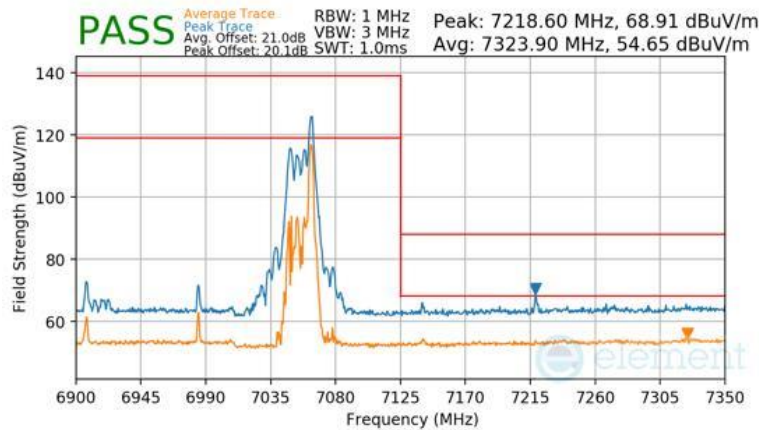


Plot 7-1012 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 387 of 418


MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

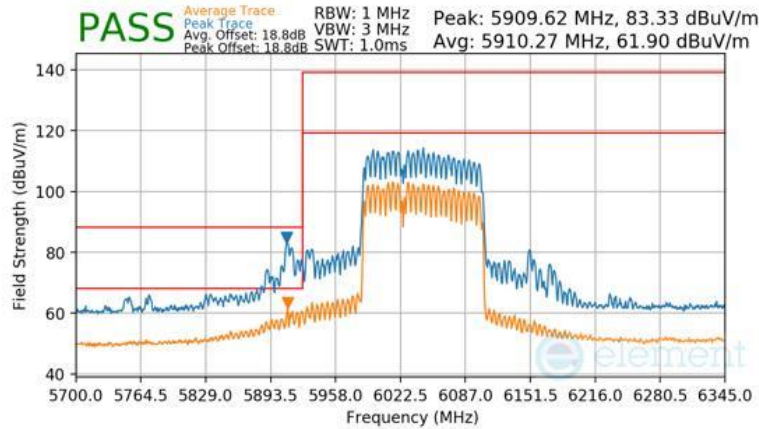

Plot 7-1013 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

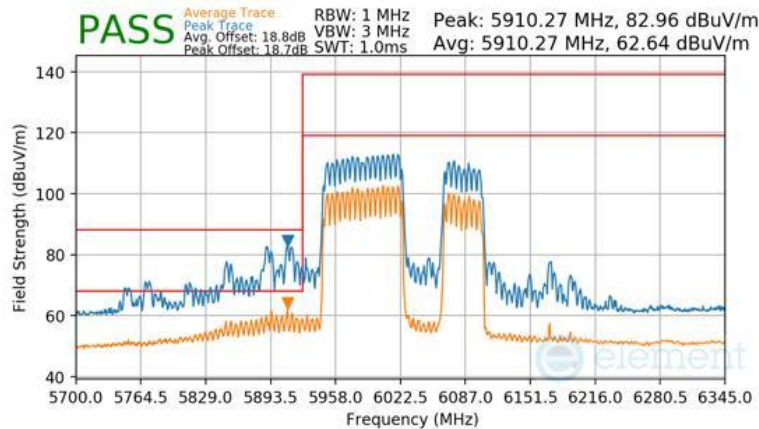


Plot 7-1014 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 388 of 418

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

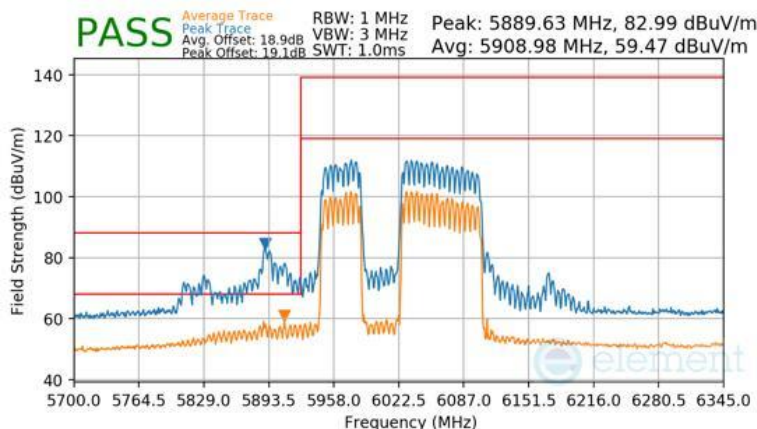

Plot 7-1015 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

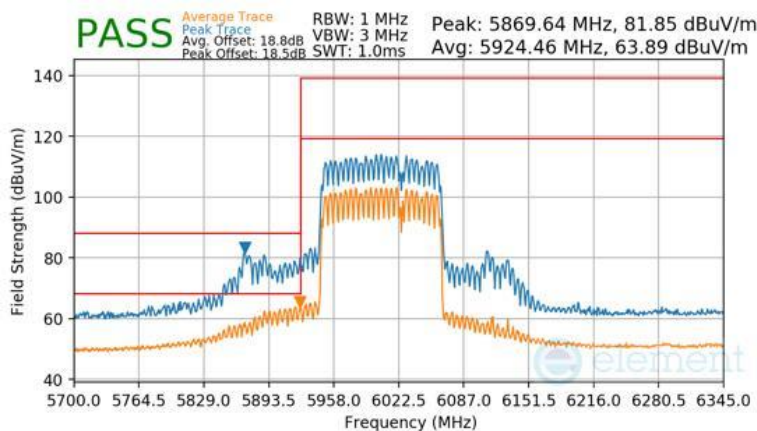


Plot 7-1016 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 389 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

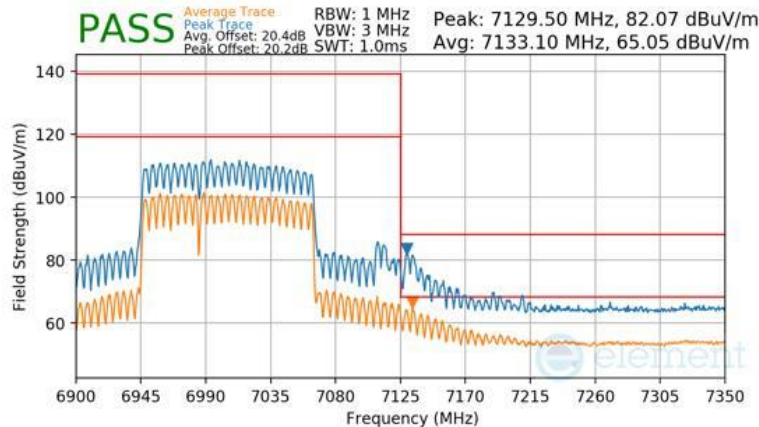

Plot 7-1017 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

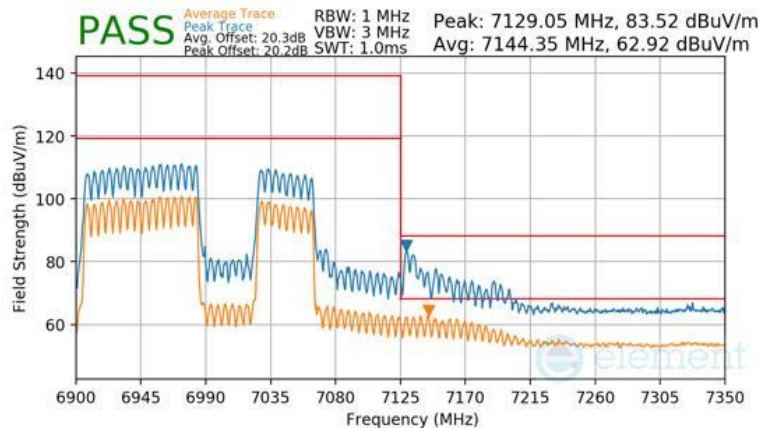

Plot 7-1018 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 390 of 418

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

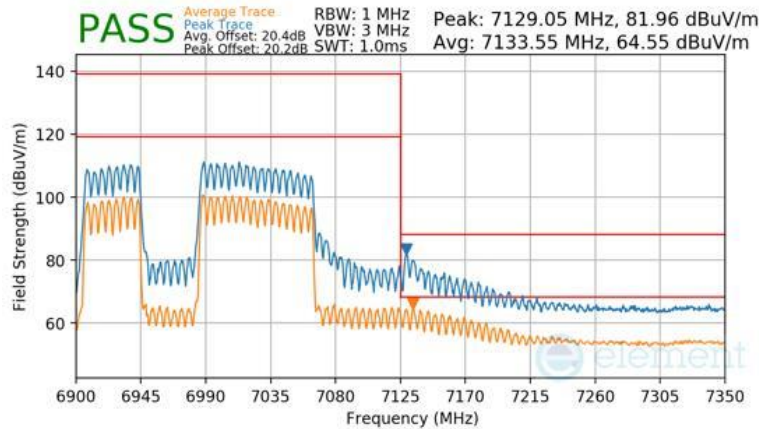

Plot 7-1019 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

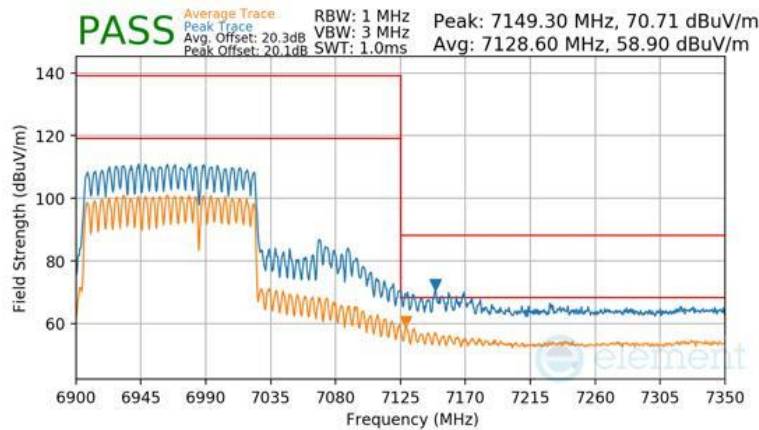


Plot 7-1020 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 391 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

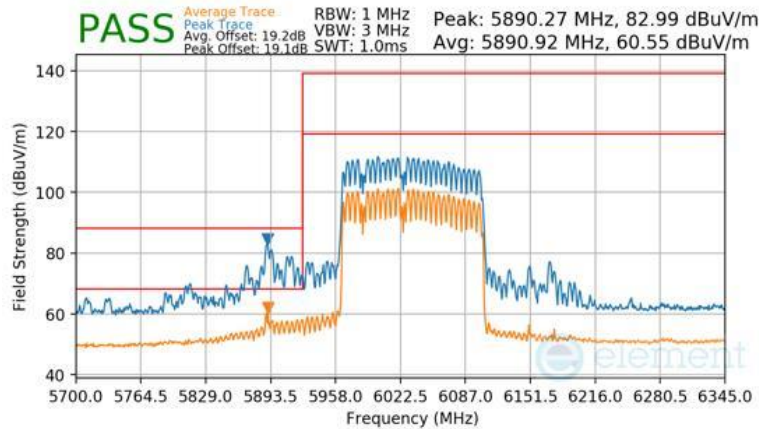

Plot 7-1021 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

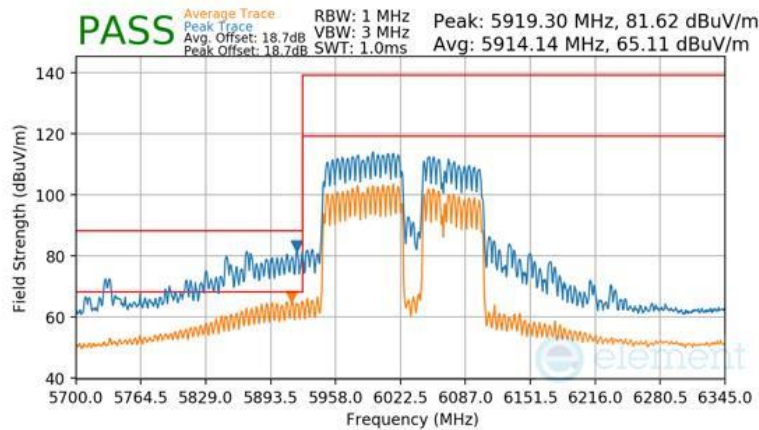


Plot 7-1022 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 392 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

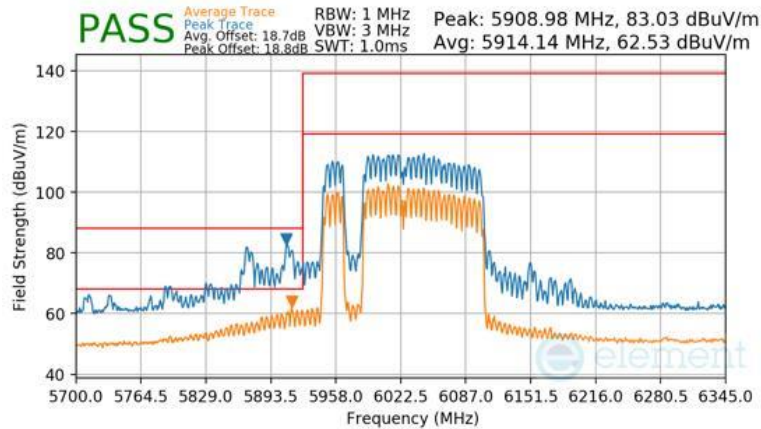

Plot 7-1023 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

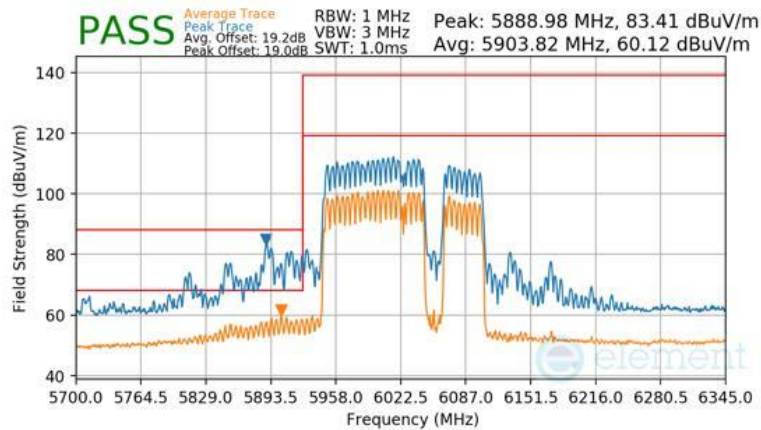


Plot 7-1024 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 393 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

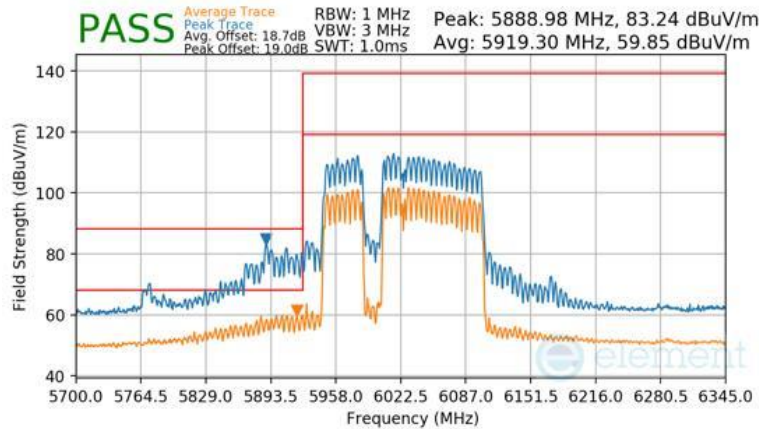

Plot 7-1025 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

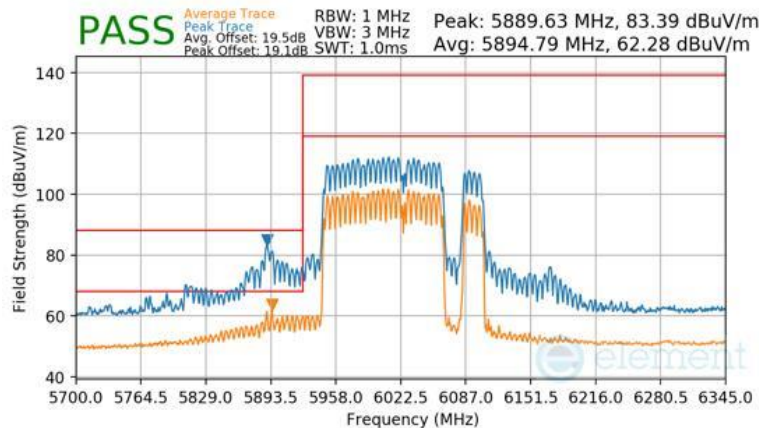


Plot 7-1026 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 394 of 418

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

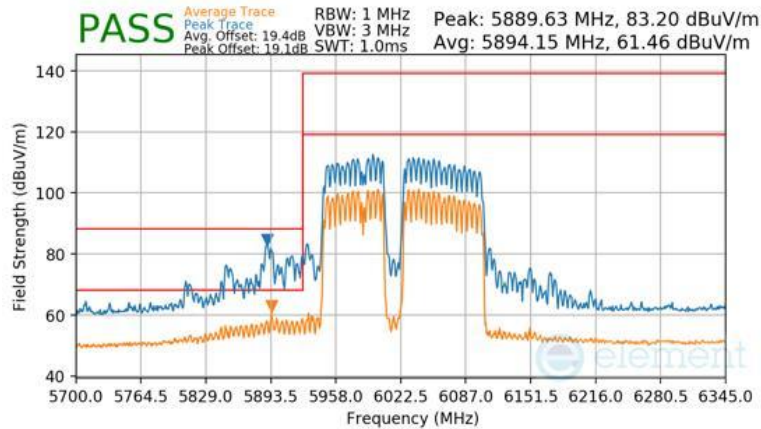

Plot 7-1027 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

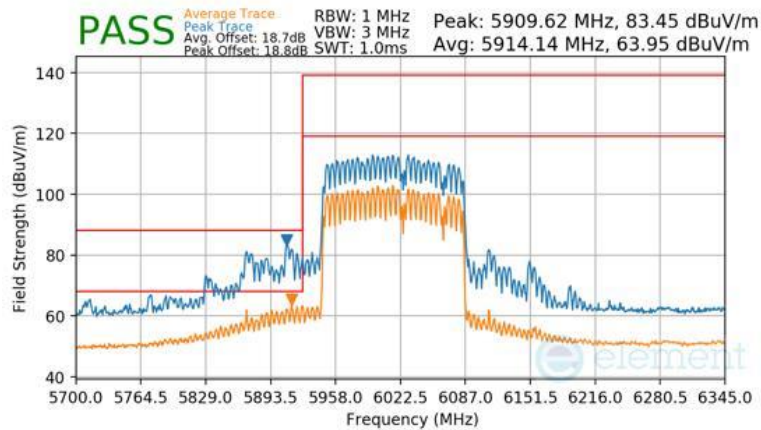

Plot 7-1028 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 395 of 418

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

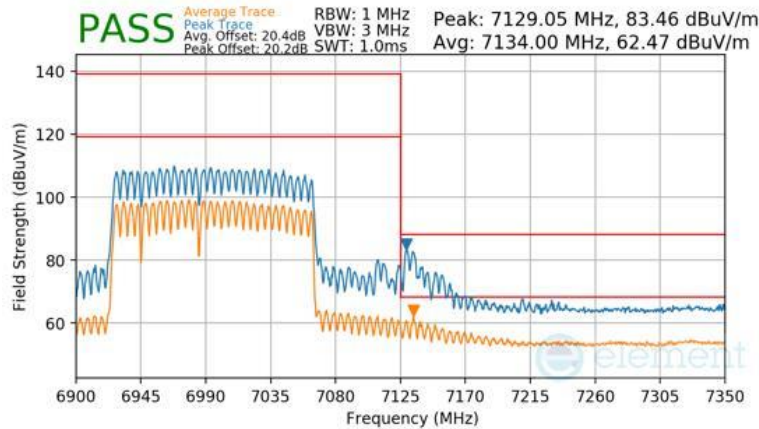

Plot 7-1029 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

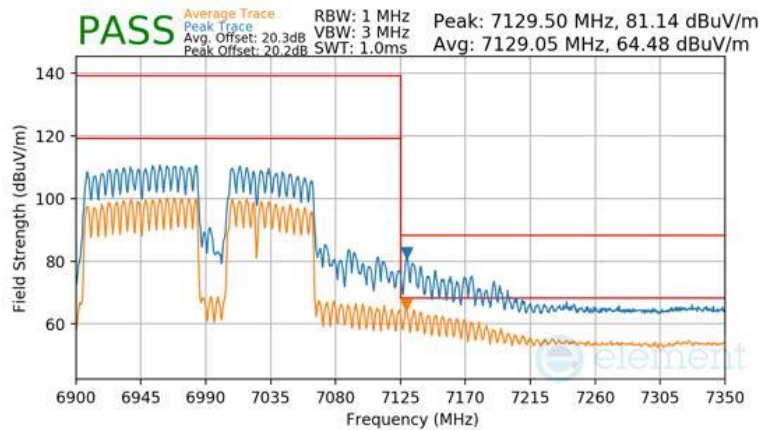


Plot 7-1030 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 396 of 418


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

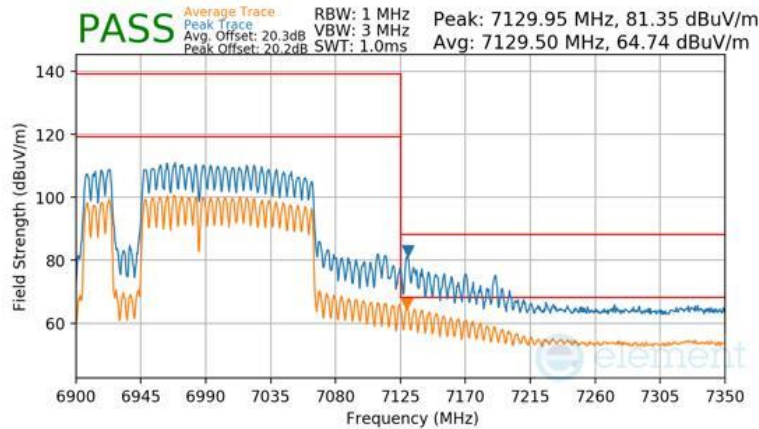

Plot 7-1031 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

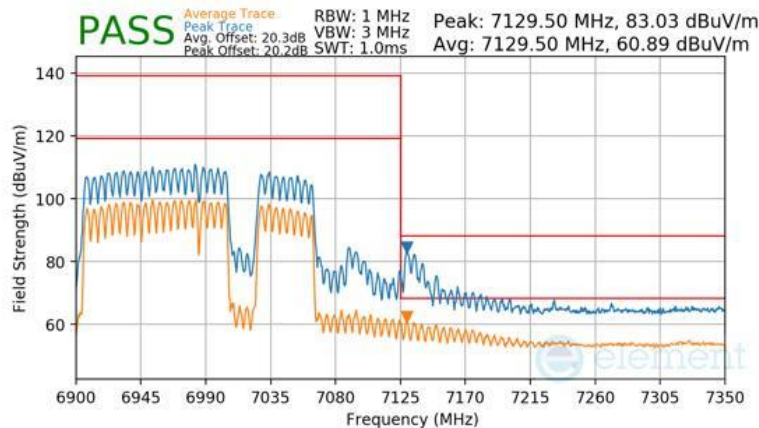

Plot 7-1032 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 397 of 418

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

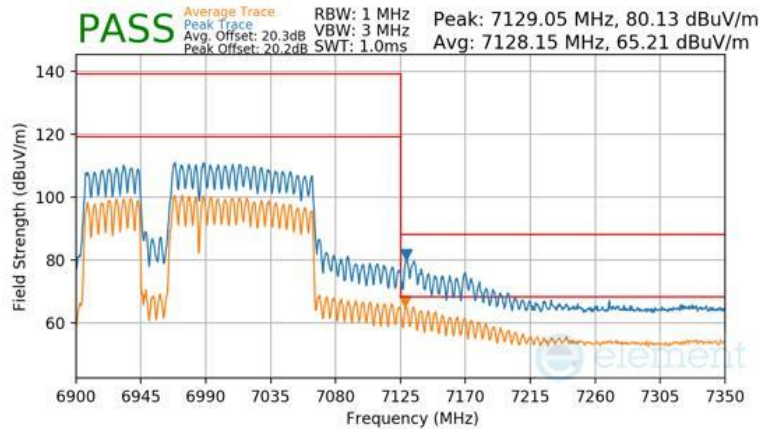

Plot 7-1033 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

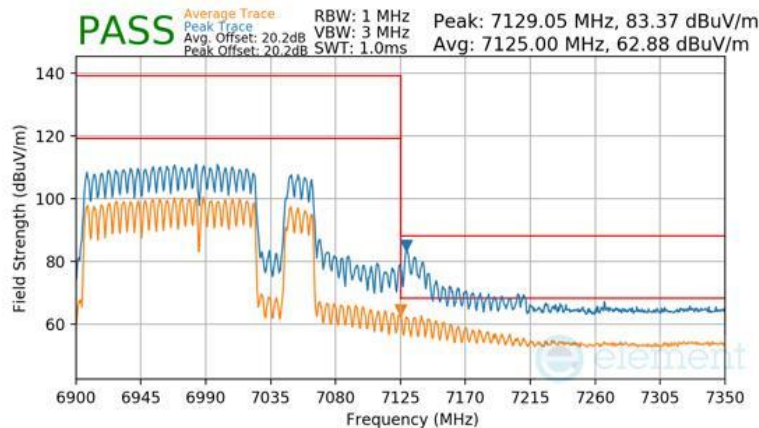


Plot 7-1034 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 398 of 418

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

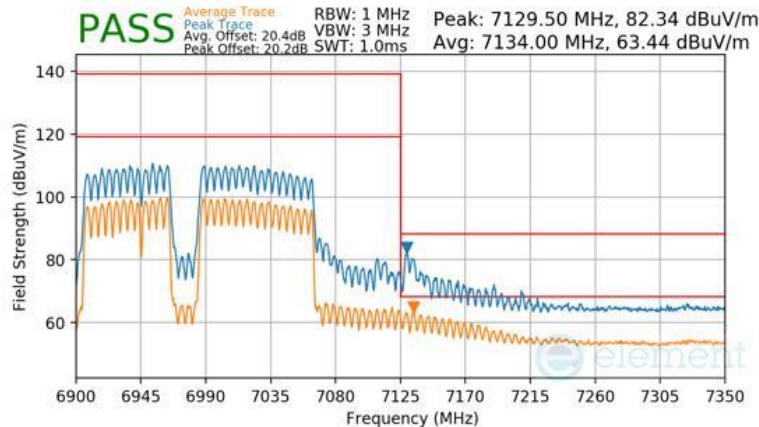

Plot 7-1035 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

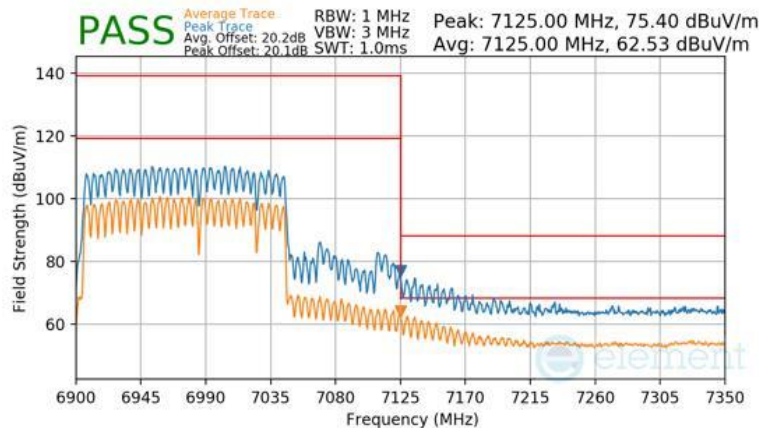

Plot 7-1036 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)


FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 399 of 418

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


RU996x2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

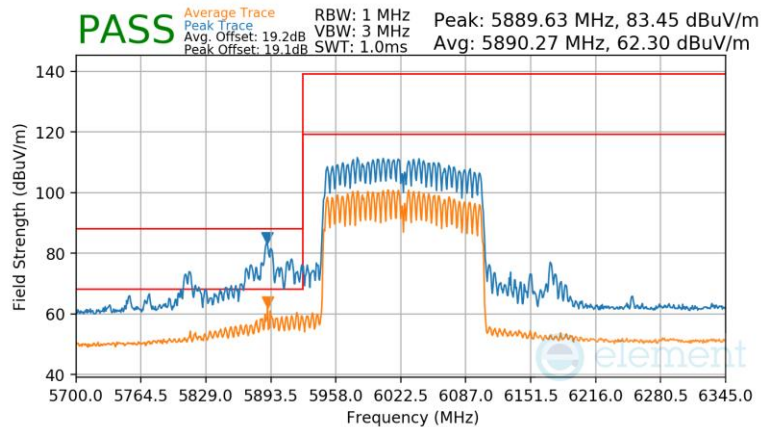

Plot 7-1037 SDM Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996X2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

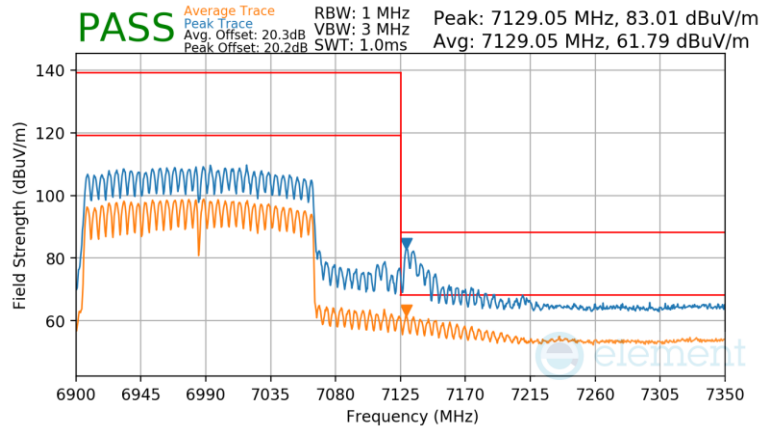

Plot 7-1038 SDM Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996X2

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 400 of 418

V 11.0 05/2025

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-150 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-150. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 401 of 418

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

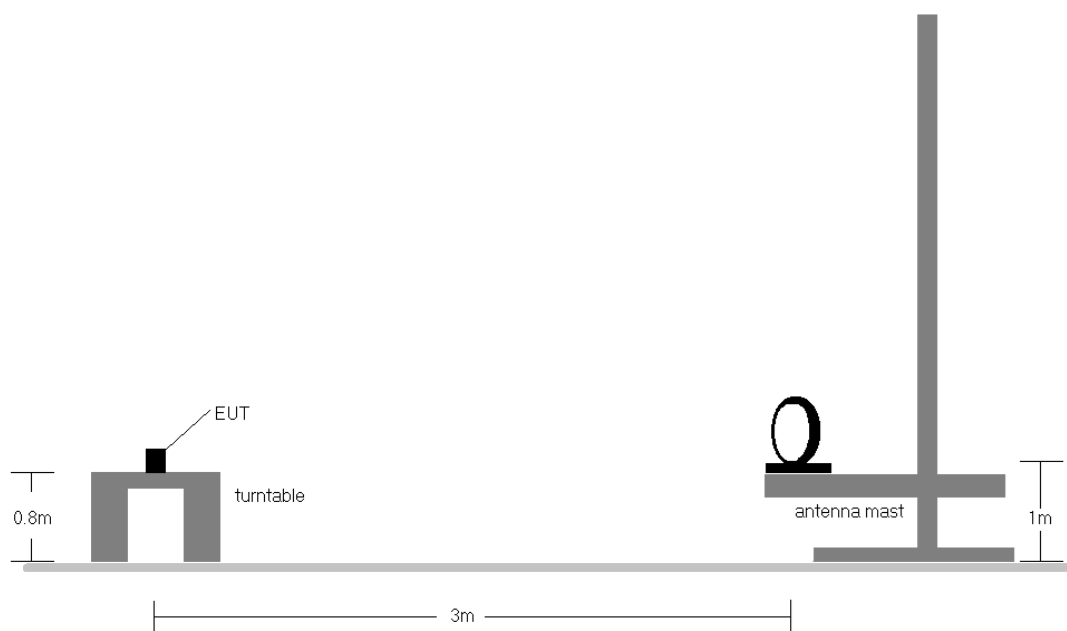


Figure 7-6. Radiated Test Setup < 30MHz

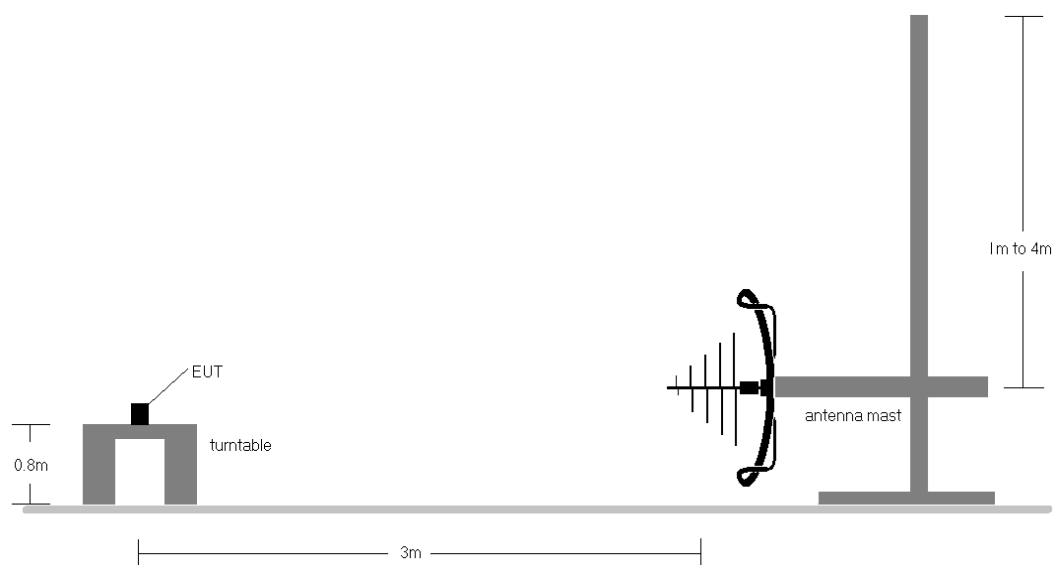


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 402 of 418

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-150.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamp Gain}_{[dB]}$
- Margin $_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 403 of 418

V 11.0 05/2025

7.8.1 SDM Radiated Spurious Emissions Measurements (Below 1GHz)

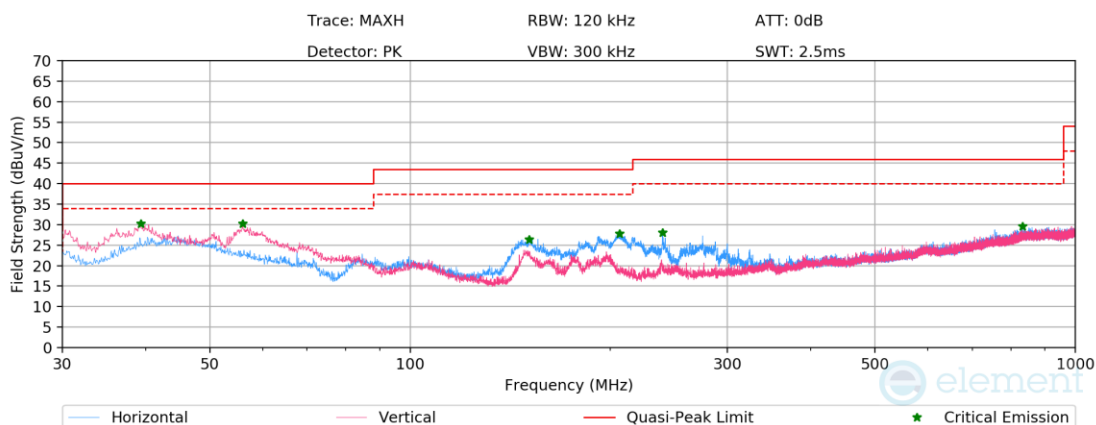


Plot 7-1039. Radiated Spurious Emissions below 1GHz SDM (802.11be – Ch.45 – RU26) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
39.33	Max-Peak	V	100	-	-60.35	-16.44	30.20	40.00	-9.80
55.95	Max-Peak	V	100	-	-60.91	-15.86	30.23	40.00	-9.77
151.05	Max-Peak	H	200	-	-59.64	-21.03	26.33	43.50	-17.17
206.31	Max-Peak	H	100	-	-61.08	-18.15	27.77	43.50	-15.73
239.49	Max-Peak	H	100	-	-62.46	-16.52	28.03	46.00	-17.97
833.17	Max-Peak	H	100	-	-72.37	-5.08	29.54	46.00	-16.46

Table 7-151. Radiated Spurious Emissions below 1GHz SDM (802.11be – Ch.45 – RU26) with AC/DC Adapter

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 404 of 418

V 11.0 05/2025

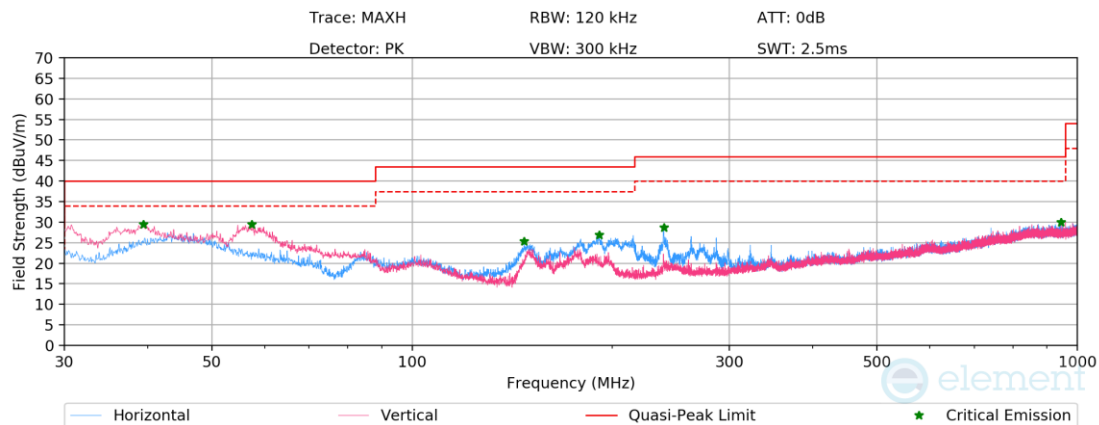

Plot 7-1040. Radiated Spurious Emissions below 1GHz SDM (802.11be – Ch.45 – RU242) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
39.45	Max-Peak	V	100	-	-61.09	-16.41	29.50	40.00	-10.50
57.39	Max-Peak	V	100	-	-61.30	-16.20	29.50	40.00	-10.50
147.39	Max-Peak	H	200	-	-60.36	-21.27	25.37	43.50	-18.13
191.13	Max-Peak	H	100	-	-61.88	-18.25	26.87	43.50	-16.63
238.95	Max-Peak	H	100	-	-61.74	-16.53	28.73	46.00	-17.27
945.07	Max-Peak	H	300	-	-72.82	-4.24	29.94	46.00	-16.06

Table 7-152. Radiated Spurious Emissions below 1GHz SDM (802.11be – Ch.45 – RU242) with AC/DC Adapter

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 405 of 418

V 11.0 05/2025

7.9 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-153. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 406 of 418

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

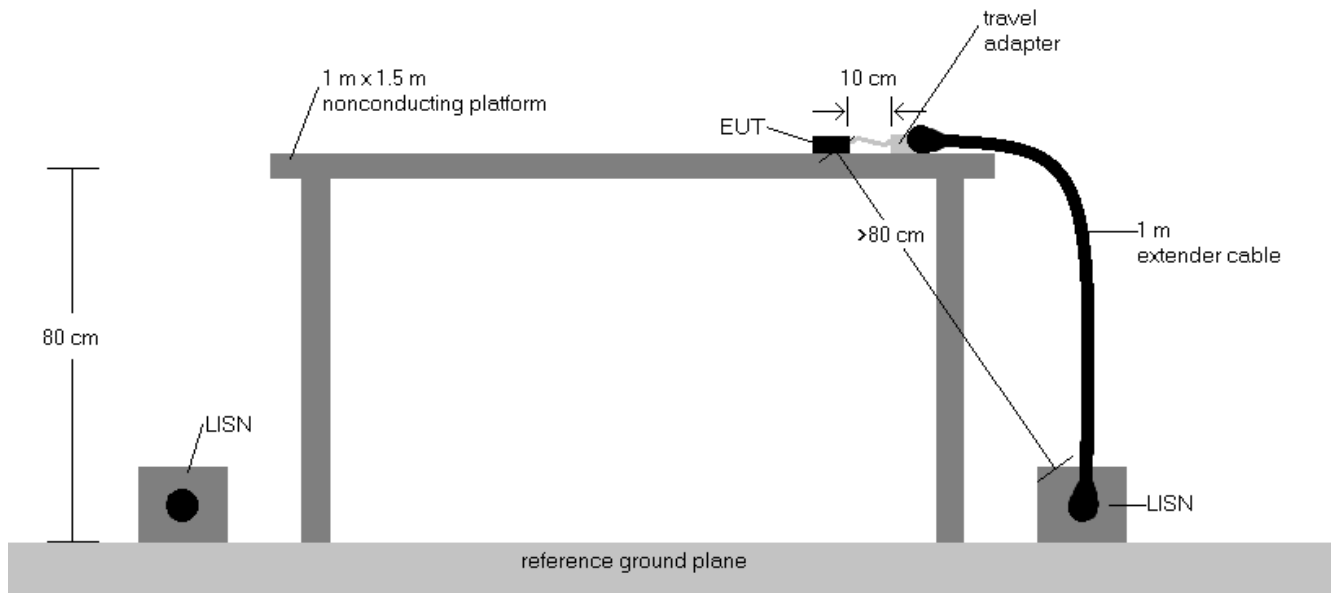


Figure 7-8. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 407 of 418

V 11.0 05/2025

7.9.1 SDM

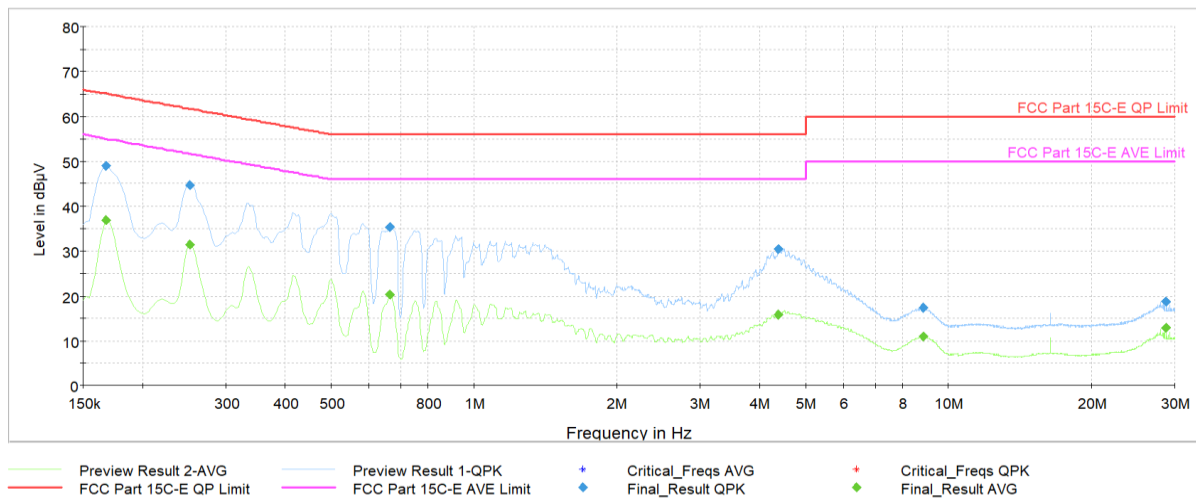

Plot 7-1041. AC Line Conducted Plot with 11be SDM UNII Band 5 – RU26 – Ch.45 (L1) with Laptop


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	---	36.89	55.06	-18.17	L1	GND
0.168	FINAL	48.97	---	65.06	-16.09	L1	GND
0.251	FINAL	---	31.36	51.72	-20.36	L1	GND
0.251	FINAL	44.73	---	61.72	-16.99	L1	GND
0.665	FINAL	---	20.34	46.00	-25.66	L1	GND
0.665	FINAL	35.25	---	56.00	-20.75	L1	GND
4.382	FINAL	30.42	---	56.00	-25.58	L1	GND
4.382	FINAL	---	15.73	46.00	-30.27	L1	GND
8.833	FINAL	17.30	---	60.00	-42.70	L1	GND
8.833	FINAL	---	10.91	50.00	-39.09	L1	GND
28.687	FINAL	---	12.83	50.00	-37.17	L1	GND
28.687	FINAL	18.78	---	60.00	-41.22	L1	GND

Table 7-154. AC Line Conducted Data with 11be SDM UNII Band 5 – RU26 – Ch.45 (L1) with Laptop

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 408 of 418

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

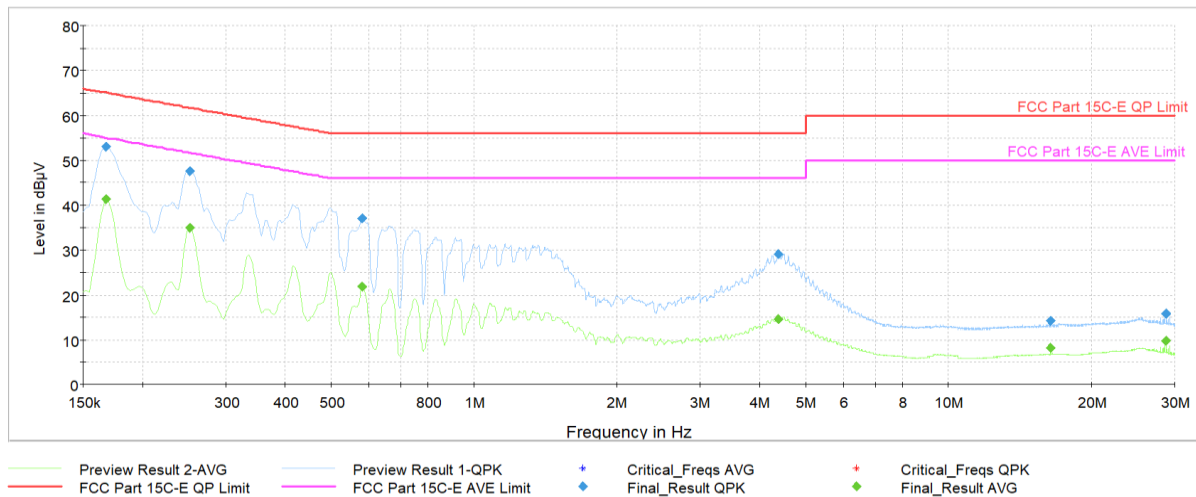

Plot 7-1042. AC Line Conducted Plot with 11be SDM UNII Band 5 – RU26 – Ch.45 (N) with Laptop


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	---	41.31	55.06	-13.75	N	GND
0.168	FINAL	53.00	---	65.06	-12.06	N	GND
0.251	FINAL	---	34.85	51.72	-16.87	N	GND
0.251	FINAL	47.66	---	61.72	-14.06	N	GND
0.582	FINAL	---	21.87	46.00	-24.13	N	GND
0.582	FINAL	37.00	---	56.00	-19.00	N	GND
4.378	FINAL	29.17	---	56.00	-26.83	N	GND
4.382	FINAL	---	14.55	46.00	-31.45	N	GND
16.429	FINAL	14.19	---	60.00	-45.81	N	GND
16.429	FINAL	---	8.10	50.00	-41.90	N	GND
28.687	FINAL	---	9.83	50.00	-40.17	N	GND
28.687	FINAL	15.90	---	60.00	-44.10	N	GND

Table 7-155. AC Line Conducted Data with 11be SDM UNII Band 5 – RU26 – Ch.45 (N) with Laptop

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 409 of 418

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

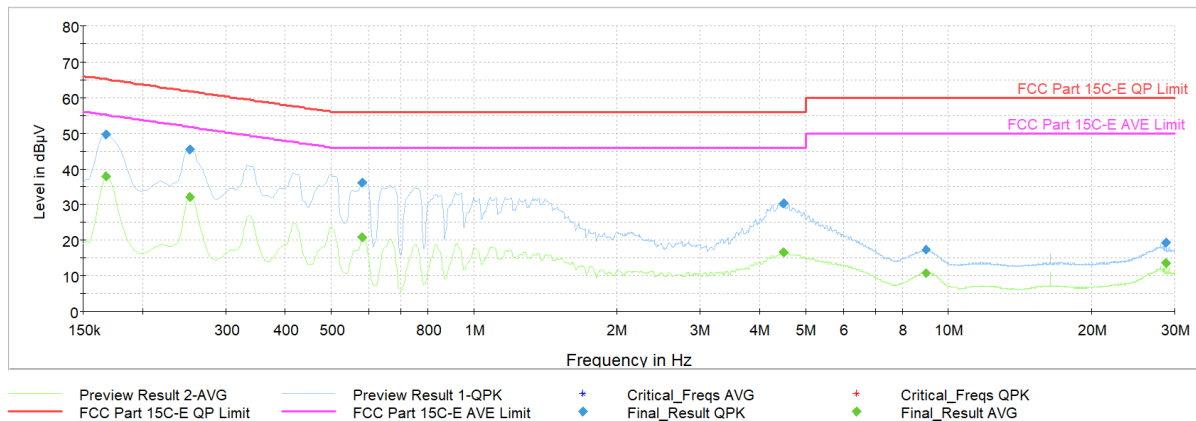


Plot 7-1043. AC Line Conducted Plot with 11be SDM UNII Band 5 – RU242 – Ch.45 (L1) with Laptop

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	---	37.83	55.06	-17.23	L1	GND
0.168	FINAL	49.69	---	65.06	-15.37	L1	GND
0.251	FINAL	---	32.13	51.72	-19.59	L1	GND
0.251	FINAL	45.27	---	61.72	-16.45	L1	GND
0.582	FINAL	---	20.84	46.00	-25.16	L1	GND
0.582	FINAL	36.19	---	56.00	-19.81	L1	GND
4.502	FINAL	30.46	---	56.00	-25.54	L1	GND
4.502	FINAL	---	16.59	46.00	-29.41	L1	GND
8.950	FINAL	17.20	---	60.00	-42.80	L1	GND
8.950	FINAL	---	10.87	50.00	-39.13	L1	GND
28.685	FINAL	19.20	---	60.00	-40.80	L1	GND
28.687	FINAL	---	13.47	50.00	-36.53	L1	GND

Table 7-156. AC Line Conducted Data with 11be SDM UNII Band 5 – RU242 – Ch.45 (L1) with Laptop

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 410 of 418

V 11.0 05/2025

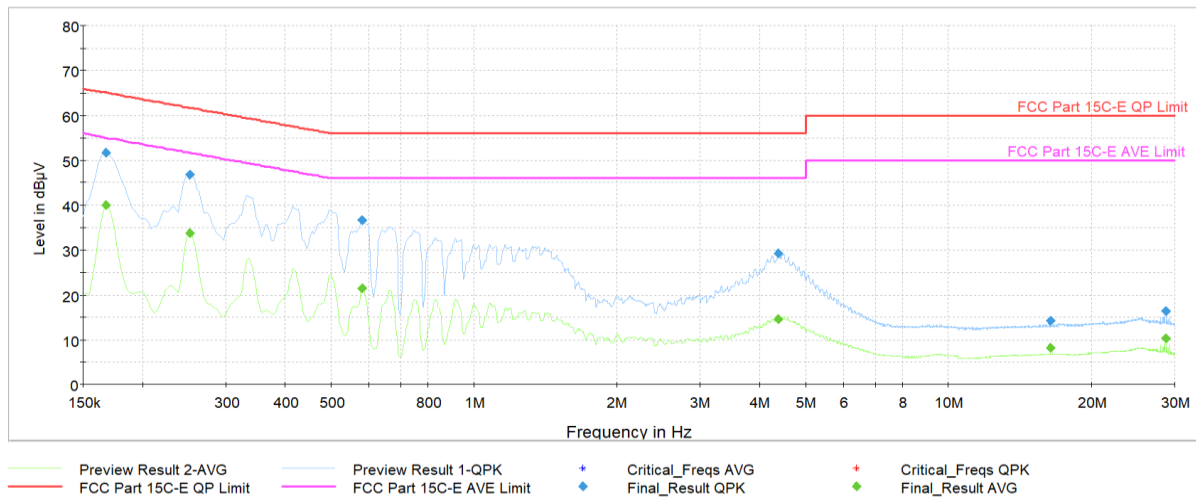

Plot 7-1044. AC Line Conducted Plot with 11be SDM UNII Band 5 – RU242 – Ch.45 (N) with Laptop

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	---	39.99	55.06	-15.07	N	GND
0.168	FINAL	51.75	---	65.06	-13.31	N	GND
0.251	FINAL	---	33.81	51.72	-17.91	N	GND
0.251	FINAL	46.77	---	61.72	-14.95	N	GND
0.582	FINAL	---	21.48	46.00	-24.52	N	GND
0.582	FINAL	36.65	---	56.00	-19.35	N	GND
4.371	FINAL	29.23	---	56.00	-26.77	N	GND
4.371	FINAL	---	14.54	46.00	-31.46	N	GND
16.424	FINAL	14.25	---	60.00	-45.75	N	GND
16.424	FINAL	---	8.10	50.00	-41.90	N	GND
28.687	FINAL	---	10.33	50.00	-39.67	N	GND
28.687	FINAL	16.42	---	60.00	-43.58	N	GND

Table 7-157. AC Line Conducted Data with 11be SDM UNII Band 5 – RU242 – Ch.45 (N) with Laptop

FCC ID: BCGA3459 IC: 579C-A3459			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device		Page 411 of 418

V 11.0 05/2025

7.10 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point

§15.407; RSS-248

Test Overview and Limits

A client device that connects to a Standard Power AP must limit its power to a minimum of 6 dB lower than its associated Standard Power access point's authorized transmit power. The term "authorized" means the AFC-approved power level for the AP to use on a particular channel.

Test Procedure Used

KDB 987594 D03 v03r04 – Section L

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 12.4.3.2 Method PM-G

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 14.4 Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

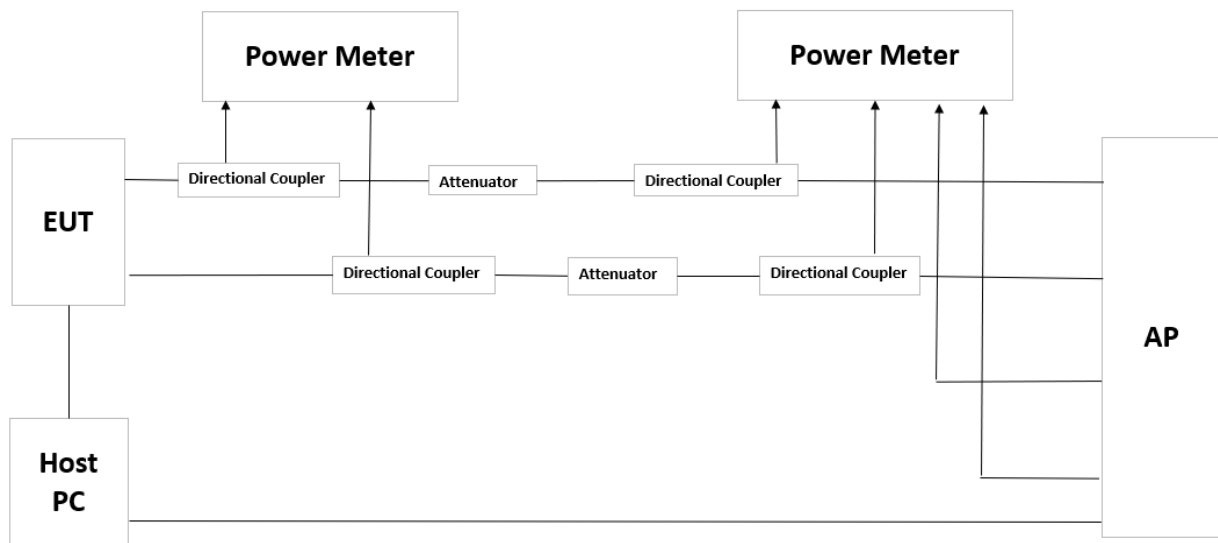


Figure 7-9. Test Instrument & Measurement Setup

Test Notes


1. CMX500 was used as the AP.
2. If the AP is allowed with a maximal value of 36dbm by the AFC, the AP should advertise the TPE (Transmit Power Envelope) with EIRP (30dBm with a 6dB back-off). The DUT only needs to follow the TPE that the AP is advertising.
3. AFC Limit was set to 36, 28 and 21 dBm EIRP (TPE 30, 22,15 dBm EIRP).

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 412 of 418

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

AFC Authorized Power 36dBm EIRP (TPE – 30dBm)

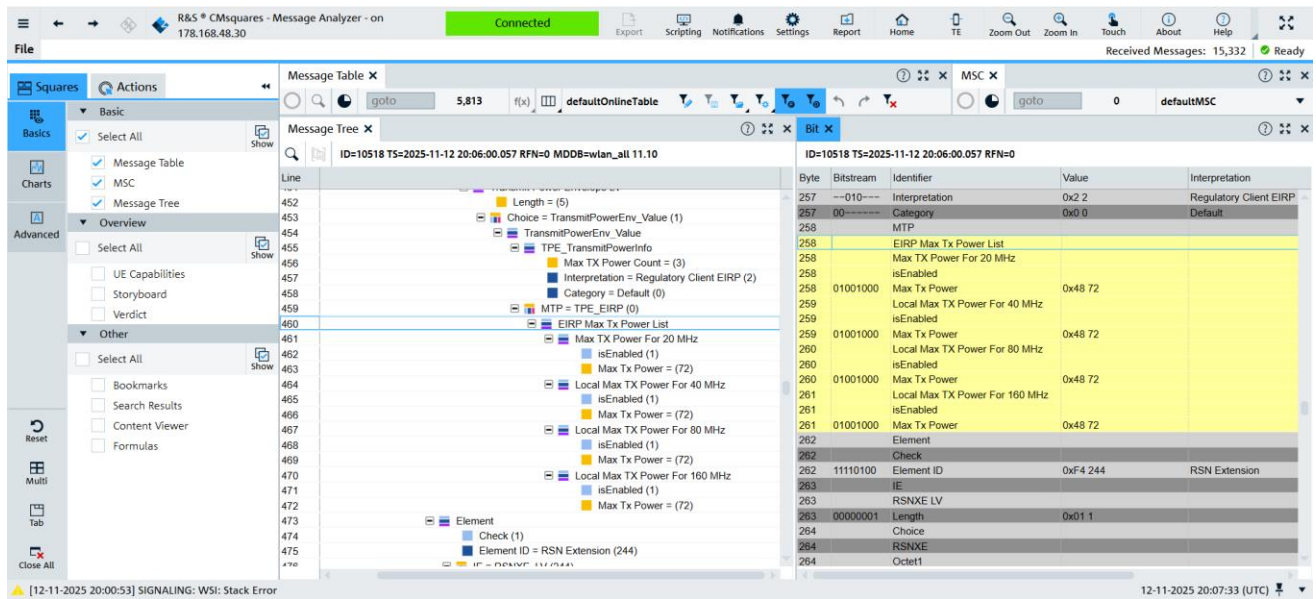

Plot 7-1045. AFC EIRP/PSD Authorization by channel – 36dBm

Channel	Frequency (MHz)	Power Measured (dBm)			Uncorrelated Gain (dBi)	Measured e.i.r.p (dBm)	Limit (dBm)	Margin (dB)
		Antenna WF8	Antenna WF7A	Summed				
53	6215	18.58	18.03	21.32	3.46	24.78	30.00	-5.22


Table 7-158: EUT measured e.i.r.p (MIMO)

FCC ID: BCGA3459 IC: 579C-A3459			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device		Page 413 of 418

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

AFC Authorized Power 28dBm EIRP (TPE – 22dBm)

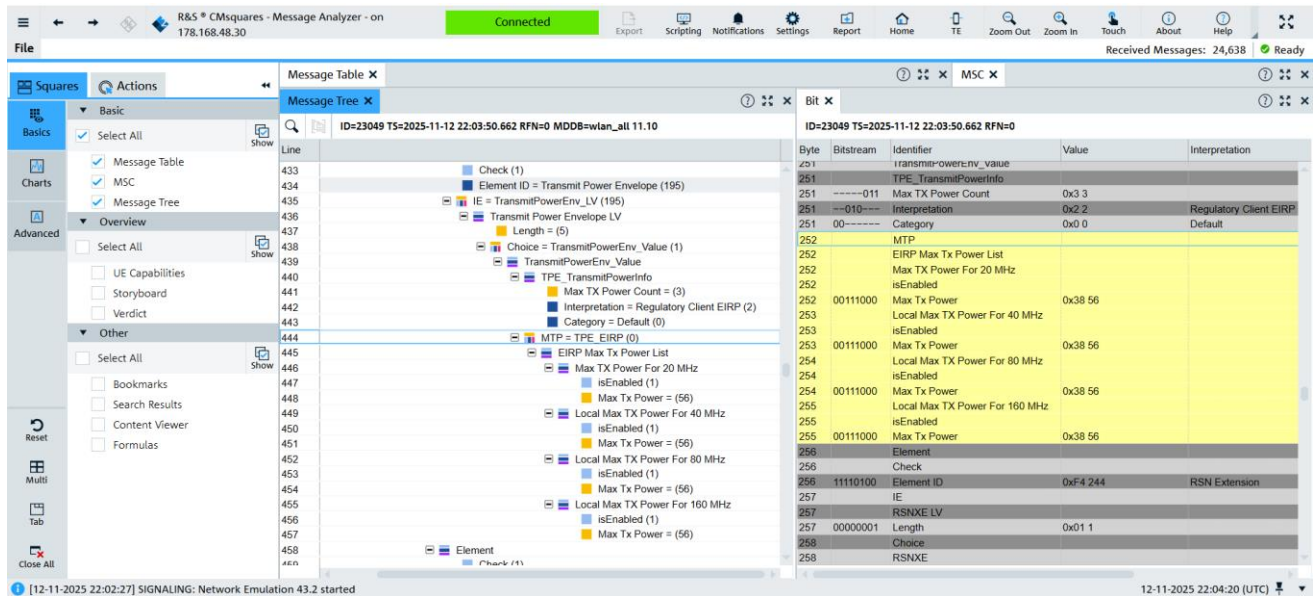

Plot 7-1046. AFC EIRP/PSD Auhorization by channel – 28dBm

Channel	Frequency (MHz)	Power Measured (dBm)			Uncorrelated Gain (dBi)	Measured e.i.r.p (dBm)	Limit (dBm)	Margin (dB)
		Antenna WF8	Antenna WF7A	Summed				
53	6215	14.32	14.31	17.33	3.46	20.79	22.00	-1.21


Table 7-159: EUT measured e.i.r.p (MIMO)

FCC ID: BCGA3459 IC: 579C-A3459			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device		Page 414 of 418

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

AFC Authorized Power 21dBm EIRP (TPE – 15dBm)

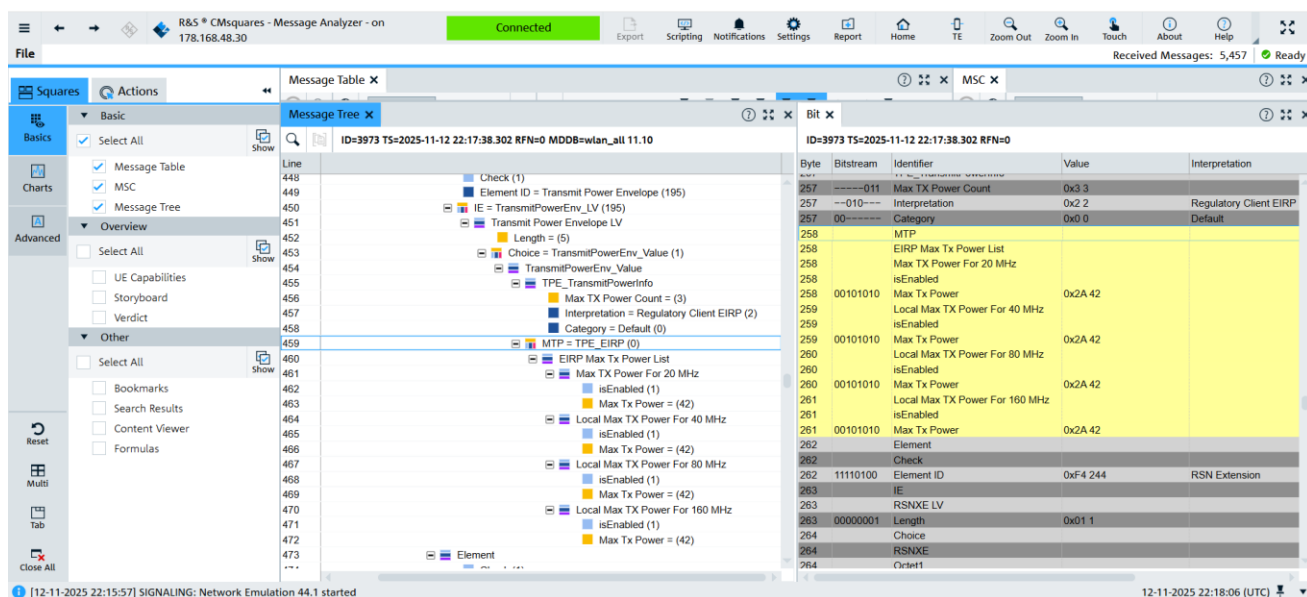

Plot 7-1047. AFC EIRP/PSD Auhorization by channel – 21dBm

Channel	Frequency (MHz)	Power Measured (dBm)			Uncorrelated Gain (dB)	Measured e.i.r.p (dBm)	Limit (dBm)	Margin (dB)
		Antenna WF8	Antenna WF7A	Summed				
53	6215	7.52	7.16	10.35	3.46	13.81	15.00	-1.19

Table 7-160: EUT measured e.i.r.p (SISO)

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device		Page 415 of 418

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.11 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

§15.407; RSS-248

Test Overview and Limits

A client device may connect to a Standard Power AP with a maximum power level of 30 dBm EIRP. A client may also connect to a Low Power indoor AP, but the power level is limited to a maximum of 24 dBm EIRP. If a client has the flexibility to connect to both APs, verification is needed to show that it can distinguish between the two configurations, and then control the power levels accordingly.

Test Procedure Used

KDB 987594 D02 v03 – Section K

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 12.4.3.2 Method PM-G

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 14.4 Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

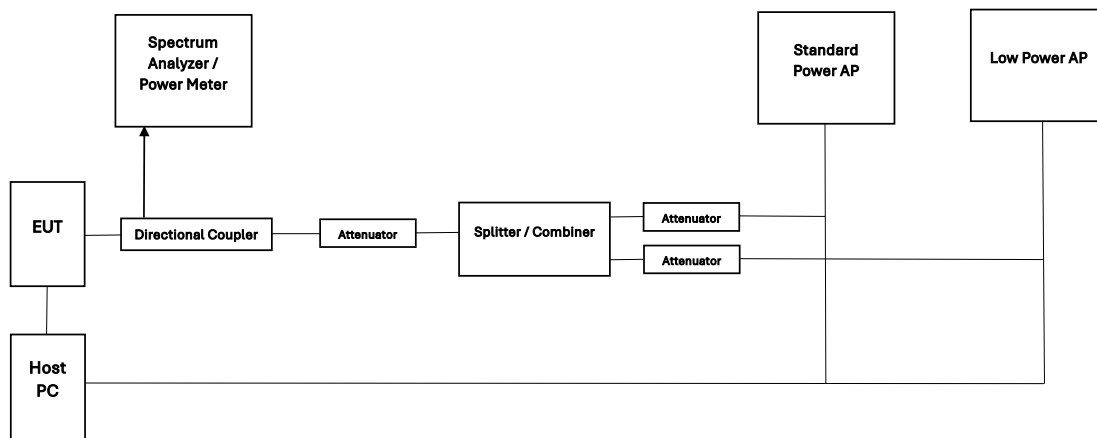


Figure 7-10. Test Instrument & Measurement Setup


Test Notes

1. Standard Power AP was set on highest power setting (36dBm EIRP)
2. Standard Power AP and Low Power Indoor AP were configured to transmit on same channel.
3. CMX500 was used as the Standard Power AP and RAXE500 was used as the Low Power Indoor AP

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 416 of 418

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

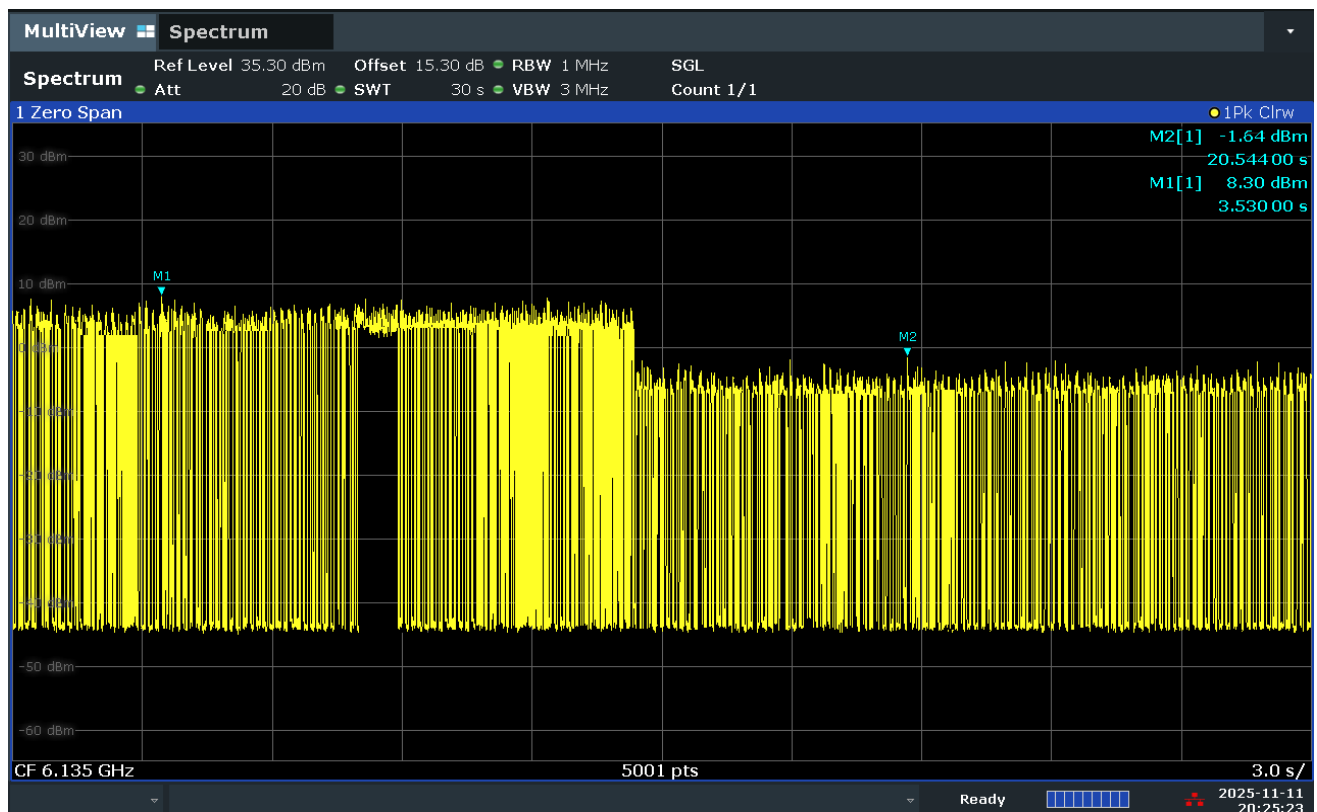

Plot 7-1048. Client device observation from Standard Power AP to Low Power Indoor AP

Channel	Frequency (MHz)	Power Measured (dBm)			Uncorrelated Gain (dBi)	Measured e.i.r.p (dBm)	Limit (dBm)	Margin (dB)
		Antenna WF8	Antenna WF7A	Summed				
53	6215	18.58	18.03	21.32	3.46	24.78	30.00	-5.22

Table 7-161: EUT measured e.i.r.p when established with Standard Power AP

Channel	Frequency (MHz)	Power Measured (dBm)			Uncorrelated Gain (dBi)	Measured e.i.r.p (dBm)	Limit (dBm)	Margin (dB)
		Antenna WF8	Antenna WF7A	Summed				
53	6215	1.63	1.53	4.59	3.46	8.05	24.00	-15.95

Table 7-162: EUT measured e.i.r.p when established with Low Power Indoor AP

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 417 of 418

V 11.0 05/2025

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3459** and **IC: 579C-A3459** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3459 IC: 579C-A3459		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100079-16-R5.BCG	Test Dates: 09/18/2025 - 12/2/2025	EUT Type: Tablet Device	Page 418 of 418

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.