

APPENDIX A: SAR TEST PLOTS

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: QXJK3

Communication System: UID:10011 - CAB, WCDMA; MAIA: Y; Frequency: 846.600 MHz

Medium: 835 Head; Medium parameters used:

$f = 846.600$ MHz; $\text{cond} = 0.915$ S/m; $\text{perm} = 43.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/26/2025; Ambient Temp: 23.2°C; Tissue Temp: 22.00°C

Probe: EX3DV4 - SN7551; ConvF:(9.82,9.71,9.99); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2025-04-15

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: UMTS 850, Antenna 3b, Exp: Body| Back Side, Ch. High

Area Scan (210.0 x 300.0): Measurement grid: $\text{dx}=15.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (57.6 x 52.8 x 31.2): Measurement grid: $\text{dx}=4.8$ mm, $\text{dy}=4.8$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5


Reference Value = 1.06 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.959 W/kg

Smallest distance from peaks to all points 3 dB below is 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

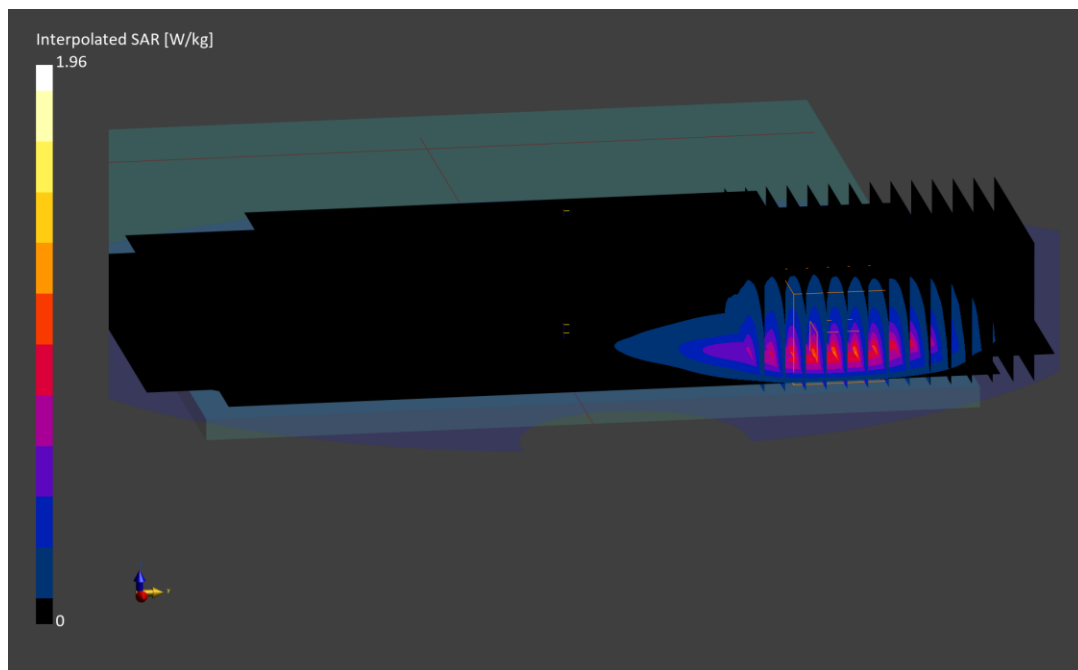

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 9L2QC

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 1752.600 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1752.600$ MHz; $\text{cond} = 1.39$ S/m; $\text{perm} = 38.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/09/2025; Ambient Temp: 22.1°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7421; ConvF:(7.44,8.39,7.85); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn604; Calibrated: 2025-03-06

Phantom: Twin-SAM V8.0; Serial: 1917

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: UMTS 1750, Antenna 4, Exp: Body| Top Edge, Ch. High

Area Scan (40.0 x 210.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $\text{dx}=6.0$ mm, $\text{dy}=6.0$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.03 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 1.06 W/kg

Smallest distance from peaks to all points 3 dB below is 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 83.9 %

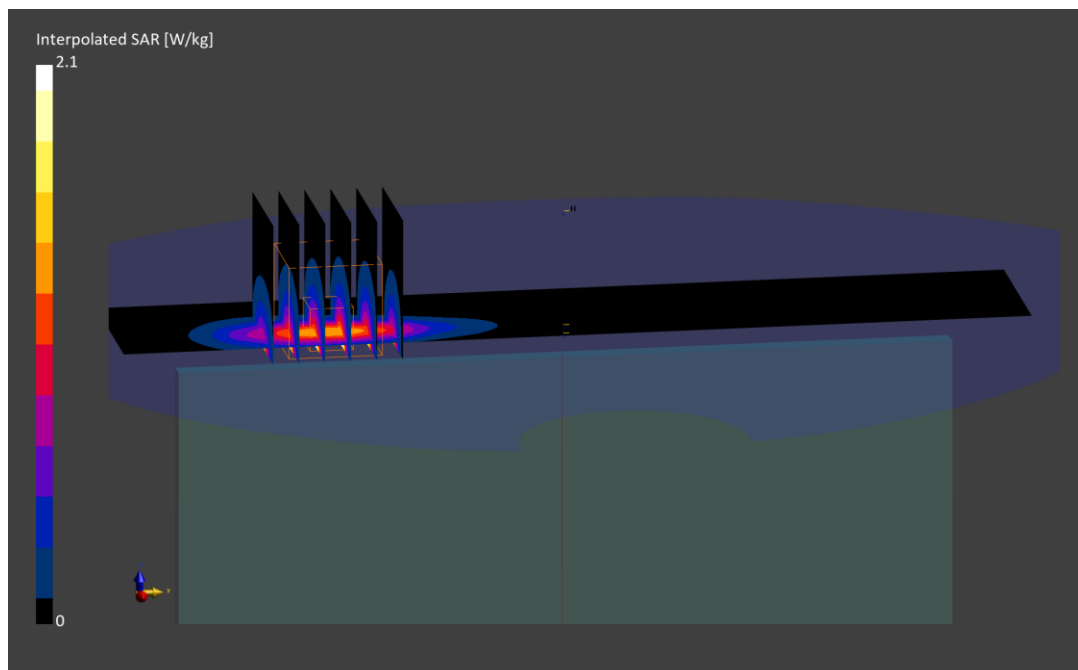

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: LLQ1X

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 1852.400 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1852.400$ MHz; $\text{cond} = 1.39$ S/m; $\text{perm} = 39.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 09/29/2025; Ambient Temp: 23.10°C; Tissue Temp: 22.00°C

Probe: EX3DV4 - SN7638; ConvF:(7.94,8.13,8.2); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn467; Calibrated: 2025-02-06

Phantom: Twin-SAM V8.0; Serial: 1692

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: UMTS 1900, Antenna 4, Exp: Body| Top Edge, Ch. Low

Area Scan (40.0 x 210.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.11 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 1.03 W/kg

Smallest distance from peaks to all points 3 dB below is 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 80.5 %

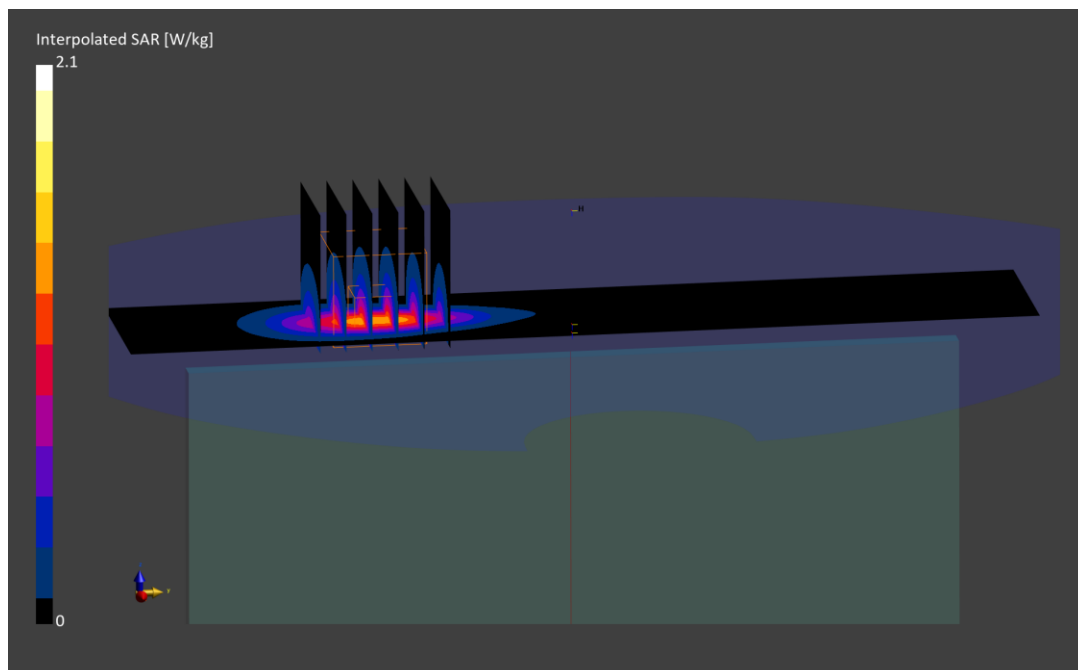

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: QXJK3

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 680.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 680.500$ MHz; $\text{cond} = 0.856$ S/m; $\text{perm} = 43.3$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/08/2025; Ambient Temp: 22.3°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 71, Antenna 3b, Exp: Body| Back Side, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (210.0 x 300.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (38.4 x 38.4 x 31.2): Measurement grid: $dx=4.8$ mm, $dy=4.8$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.71 W/kg; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 0.993 W/kg

Smallest distance from peaks to all points 3 dB below is 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

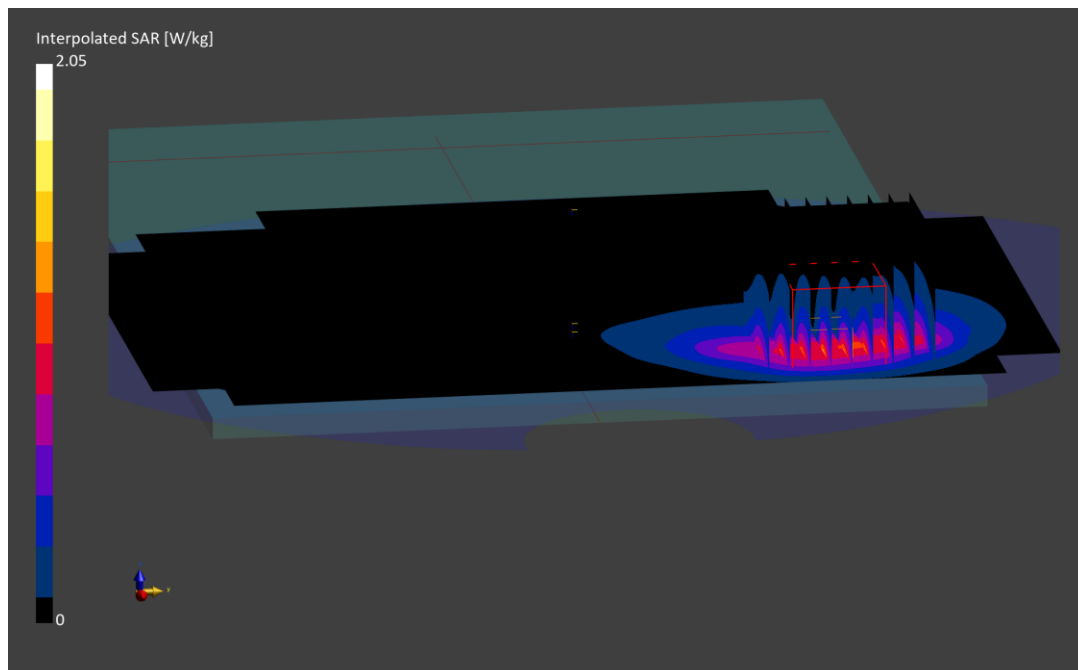

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 493NW

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 707.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 707.500$ MHz; $\text{cond} = 0.855$ S/m; $\text{perm} = 42.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/14/2025; Ambient Temp: 22.8°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 12, Antenna 4, Exp: Body| Top Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**

Area Scan (40.0 x 210.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.68 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.914 W/kg

Smallest distance from peaks to all points 3 dB below is 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 74.8 %

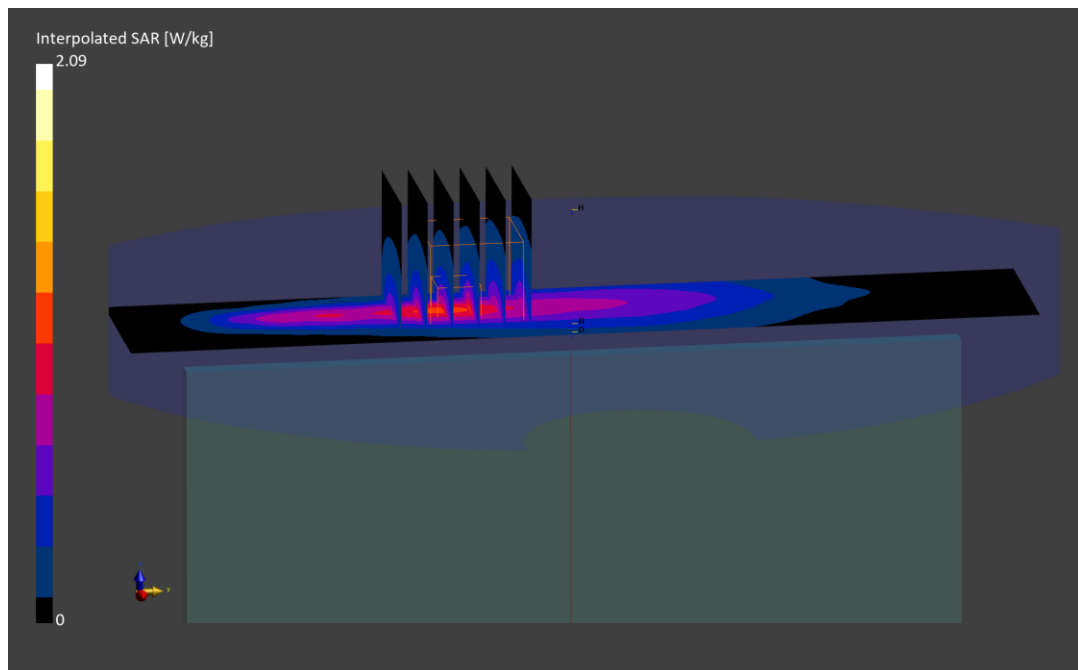

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 34KTP

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 782.000 MHz

Medium: 750 Head; Medium parameters used:

$f = 782.000$ MHz; $\text{cond} = 0.878$ S/m; $\text{perm} = 43.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/06/2025; Ambient Temp: 22.7°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 13, Antenna 4, Exp: Body| Top Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (40.0 x 210.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (42.0 x 42.0 x 31.2): Measurement grid: $\text{dx}=6.0$ mm, $\text{dy}=6.0$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.77 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.981 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.2 %

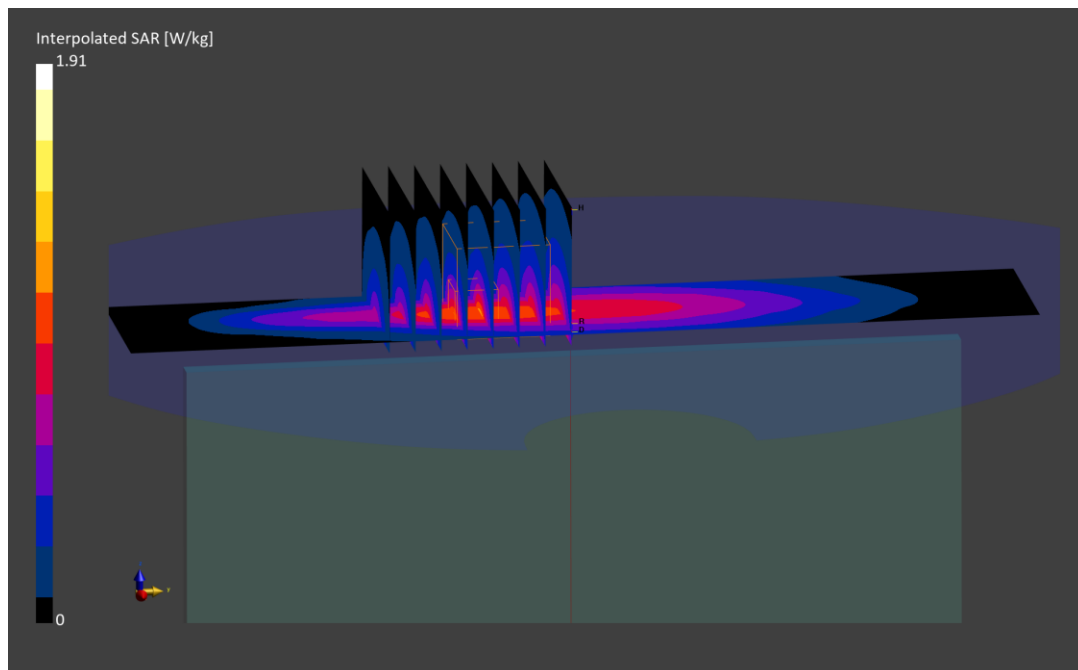

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: HPHC3

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 793.000 MHz

Medium: 750 Head; Medium parameters used:

$f = 793.000$ MHz; $\text{cond} = 0.882$ S/m; $\text{perm} = 43.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/06/2025; Ambient Temp: 22.7°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 14, Antenna 4, Exp: Body| Top Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (40.0 x 210.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 36.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.78 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.986 W/kg

Smallest distance from peaks to all points 3 dB below is 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

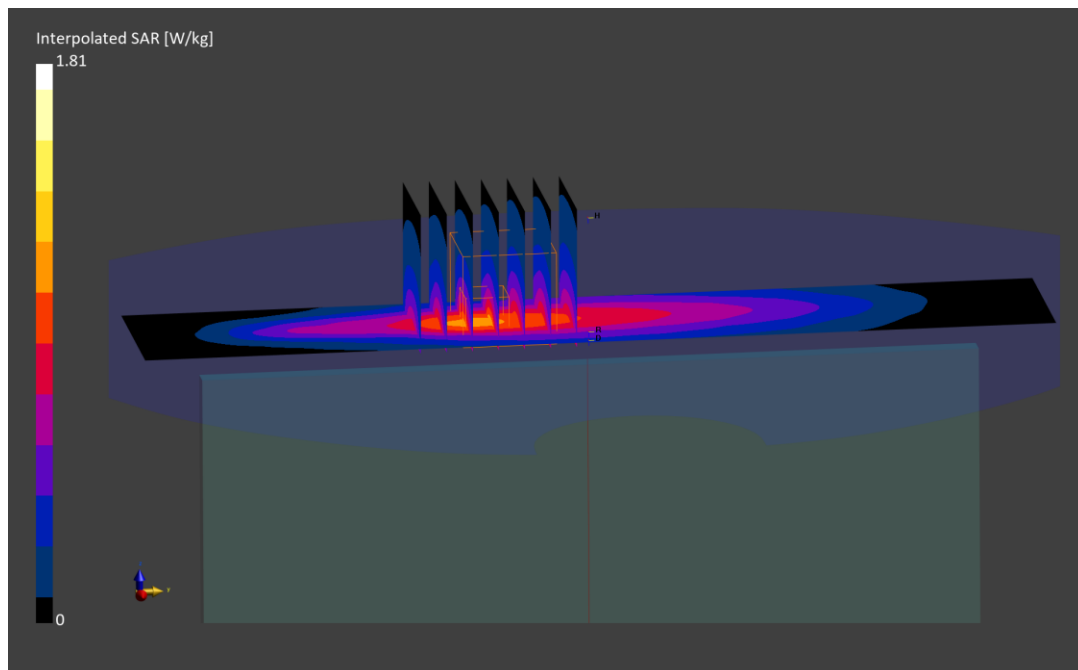

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: PNYJW

Communication System: UID:10160 - CAF, LTE-FDD; MAIA: Y; Frequency: 831.500 MHz

Medium: 835 Head; Medium parameters used:

$f = 831.500$ MHz; $\text{cond} = 0.912$ S/m; $\text{perm} = 41.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/10/2025; Ambient Temp: 20.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7551; ConvF:(9.82,9.71,9.99); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2025-04-15

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 26, Antenna 3b, Exp: Body| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 25 RB, 12 RB Offset**

Area Scan (210.0 x 300.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (38.4 x 38.4 x 31.2): Measurement grid: $dx=4.8$ mm, $dy=4.8$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.82 W/kg; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.816 W/kg

Smallest distance from peaks to all points 3 dB below is 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

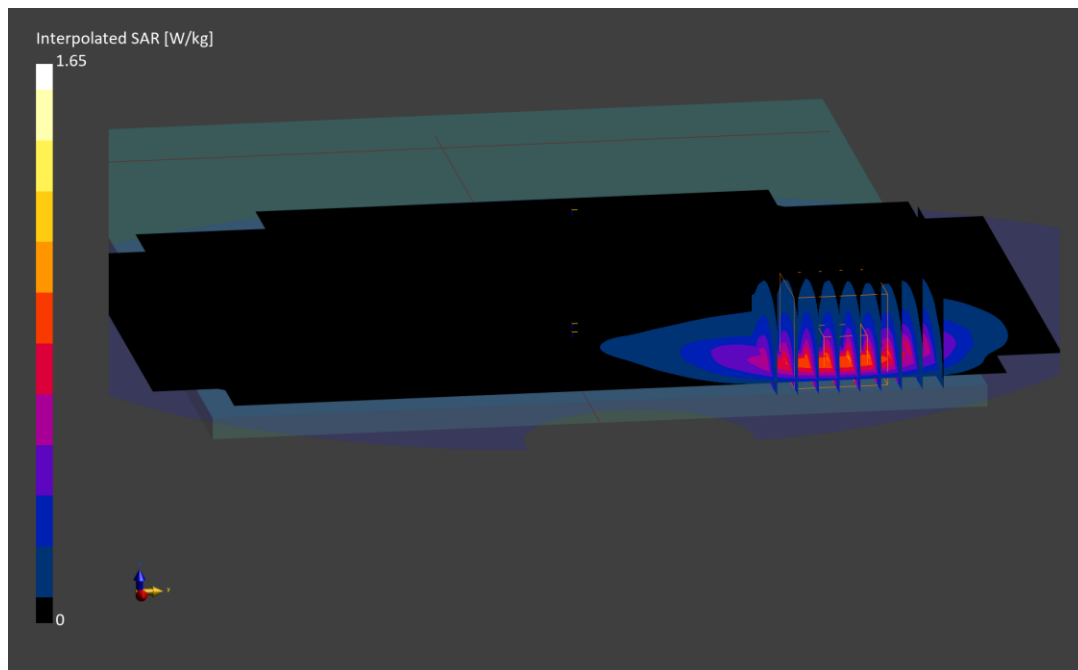

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 9L2QC

Communication System: UID:10108 - CAG, LTE-FDD; MAIA: Y; Frequency: 836.500 MHz

Medium: 835 Head; Medium parameters used:

$f = 836.500$ MHz; $\text{cond} = 0.871$ S/m; $\text{perm} = 41.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 09/21/2025; Ambient Temp: 22.8°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7551; ConvF:(9.82,9.71,9.99); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2025-04-15

Phantom: Twin-SAM V4.0; Serial: 1447

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 5, Antenna 3b, Exp: Body| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (210.0 x 300.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (34.2 x 34.2 x 31.2): Measurement grid: $dx=5.7$ mm, $dy=5.7$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 1.71 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.976 W/kg

Smallest distance from peaks to all points 3 dB below is 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 80.1 %

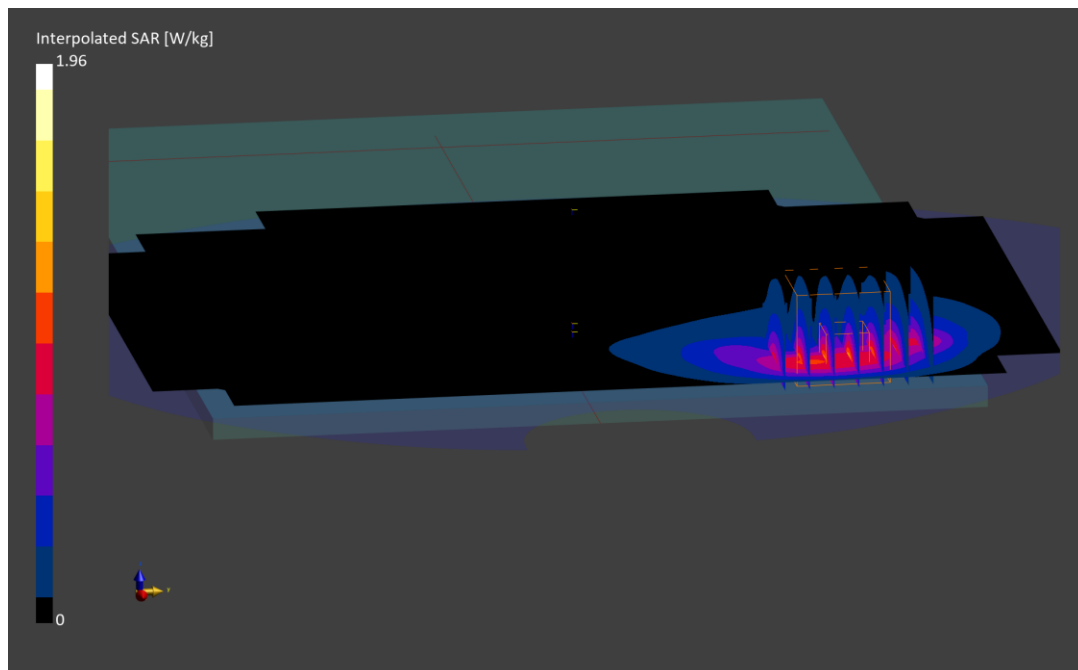

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: LLQ1X

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1745.000 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1745.000$ MHz; $\text{cond} = 1.36$ S/m; $\text{perm} = 39.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 09/21/2025; Ambient Temp: 22.5°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN7421; ConvF:(7.44,8.39,7.85); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn604; Calibrated: 2025-03-06

Phantom: Twin-SAM V8.0; Serial: 1917

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 66, Antenna 2b, Exp: Body| Bottom Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (45.0 x 210.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.95 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 1.06 W/kg

Smallest distance from peaks to all points 3 dB below is 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 84.3 %

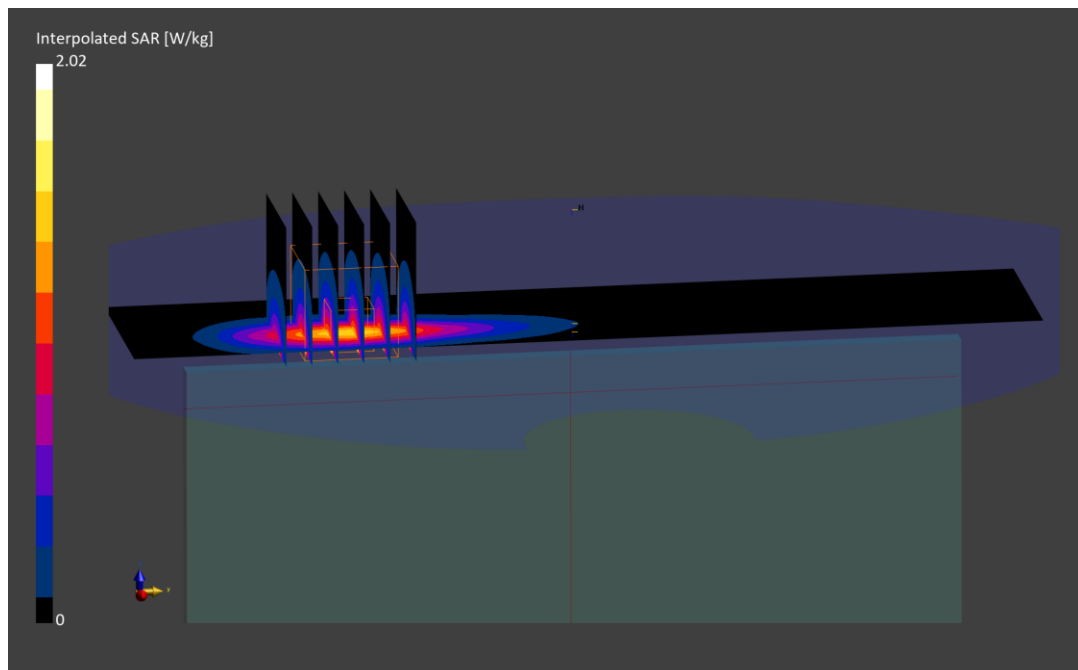

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: LLQ1X

Communication System: UID:10100 - CAF, LTE-FDD; MAIA: Y; Frequency: 1860.000 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1860.000$ MHz; $\text{cond} = 1.40$ S/m; $\text{perm} = 39.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 09/29/2025; Ambient Temp: 23.10°C; Tissue Temp: 22.00°C

Probe: EX3DV4 - SN7638; ConvF:(7.94,8.13,8.2); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn467; Calibrated: 2025-02-06

Phantom: Twin-SAM V8.0; Serial: 1692

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 25, Antenna 4, Exp: Body| Top Edge, Ch. Low,
20 MHz Bandwidth, QPSK, 100 RB, 0 RB Offset**

Area Scan (40.0 x 210.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.12 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 1.03 W/kg

Smallest distance from peaks to all points 3 dB below is 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

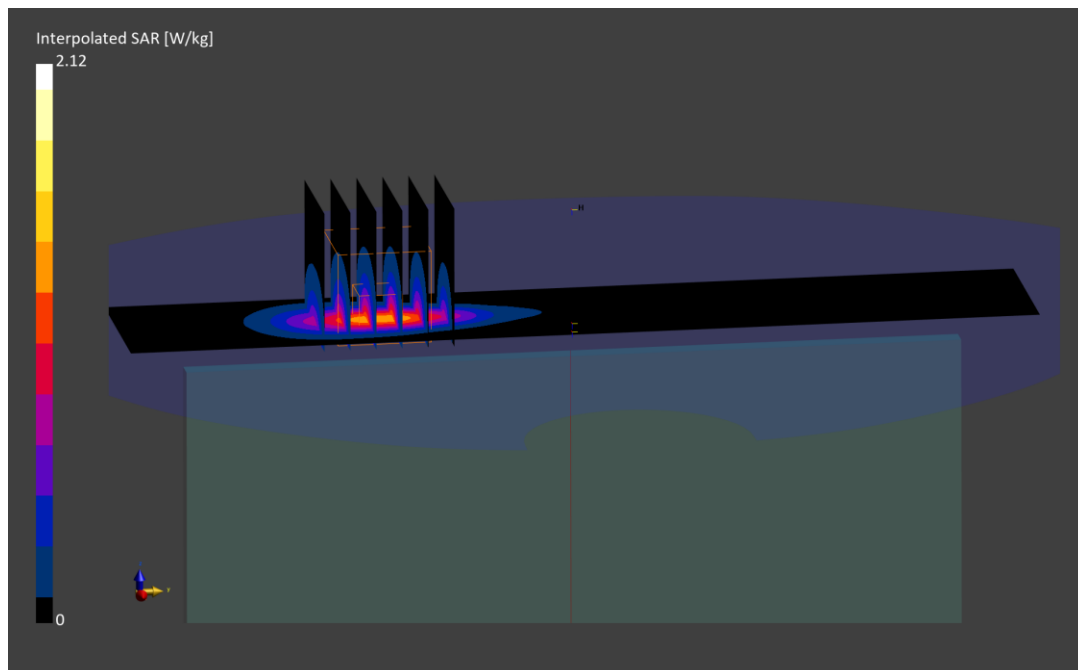

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 9H02H

Communication System: UID:10108 - CAH, LTE-FDD; MAIA: Y; Frequency: 2310.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2310.000$ MHz; $\text{cond} = 1.67$ S/m; $\text{perm} = 39.3$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 09/23/2025; Ambient Temp: 19.5°C; Tissue Temp: 19.1°C

Probe: EX3DV4 - SN7416; ConvF:(6.98,7.27,7.02); Calibrated: 2025-05-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn701; Calibrated: 2025-05-09

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 30, Antenna 4, Exp: Body| Top Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 1.11 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.14 W/kg

Smallest distance from peaks to all points 3 dB below is 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

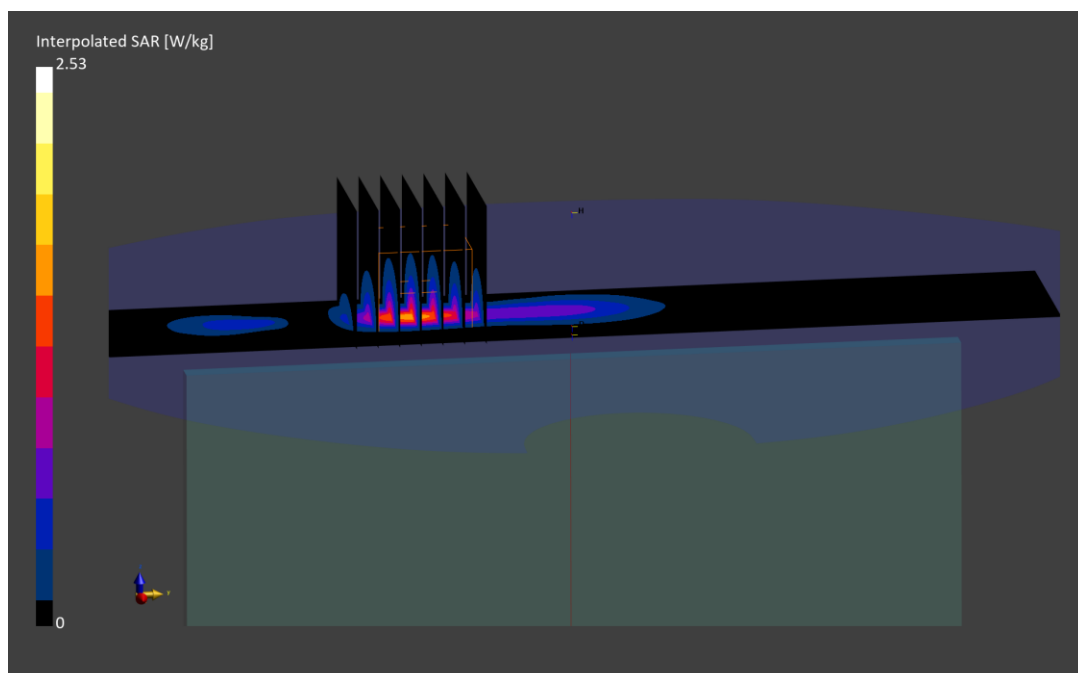

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: F76L1

Communication System: UID:10297 - AAE, LTE-FDD; MAIA: Y; Frequency: 2560.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2560.000$ MHz; $\text{cond} = 1.91$ S/m; $\text{perm} = 37.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/09/2025; Ambient Temp: 22.5°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7490; ConvF:(7.09,7.18,6.9); Calibrated: 2024-12-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1644; Calibrated: 2024-12-04

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 7, Antenna 2b, Exp: Body| Bottom Edge, Ch. High,
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (40.0 x 40.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 1.28 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.60 W/kg

SAR(1 g) = 1.12 W/kg

Smallest distance from peaks to all points 3 dB below is 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

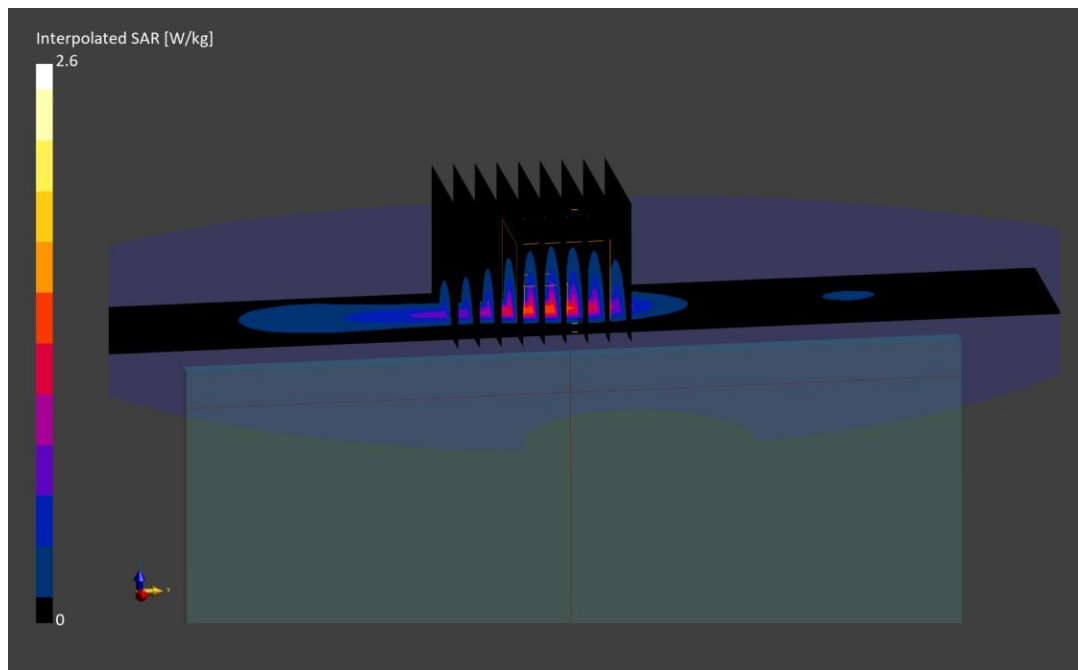

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: X2W1K

Communication System: UID:10494 - AAG, LTE-TDD; MAIA: Y; Frequency: 2549.500 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2549.500$ MHz; $\text{cond} = 1.91$ S/m; $\text{perm} = 37.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/11/2025; Ambient Temp: 22.2°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7490; ConvF:(7.09,7.18,6.9); Calibrated: 2024-12-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1644; Calibrated: 2024-12-04

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 41, Antenna 4, Exp: Body| Top Edge, Ch. Low-Mid,
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 1.31 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.68 W/kg

SAR(1 g) = 1.10 W/kg

Smallest distance from peaks to all points 3 dB below is 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.0 %

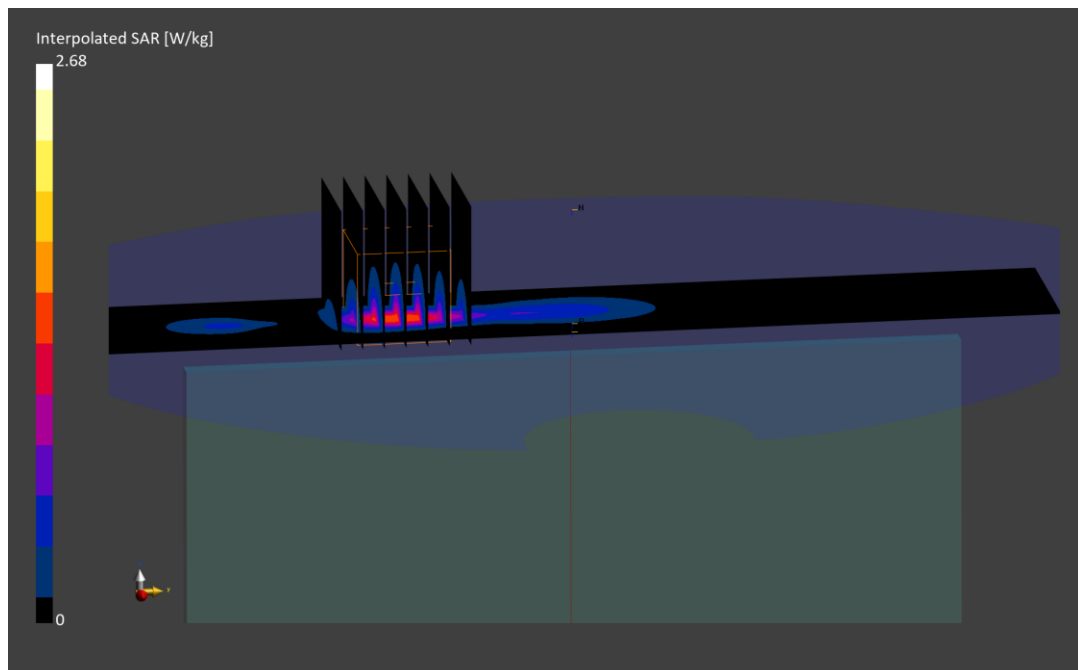

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: LLQ1X

Communication System: UID:10435 - AAG, LTE-TDD; MAIA: Y; Frequency: 3690.000 MHz

Medium: 3600 Head; Medium parameters used:

$f = 3690.000$ MHz; $\text{cond} = 3.05$ S/m; $\text{perm} = 37.3$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 09/15/2025; Ambient Temp: 23.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7360; ConvF:(6.62,6.52,7.42); Calibrated: 2025-03-07

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn534; Calibrated: 2025-03-11

Phantom: Twin-SAM V8.0; Serial: 2034

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 48, Antenna 2a, Exp: Body| Right Edge, Ch. High,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (40.0 x 280.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (40.0 x 40.0 x 29.1): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5


Reference Value = 0.75 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.87 W/kg

SAR(1 g) = 0.977 W/kg

Smallest distance from peaks to all points 3 dB below is 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 71.9 %

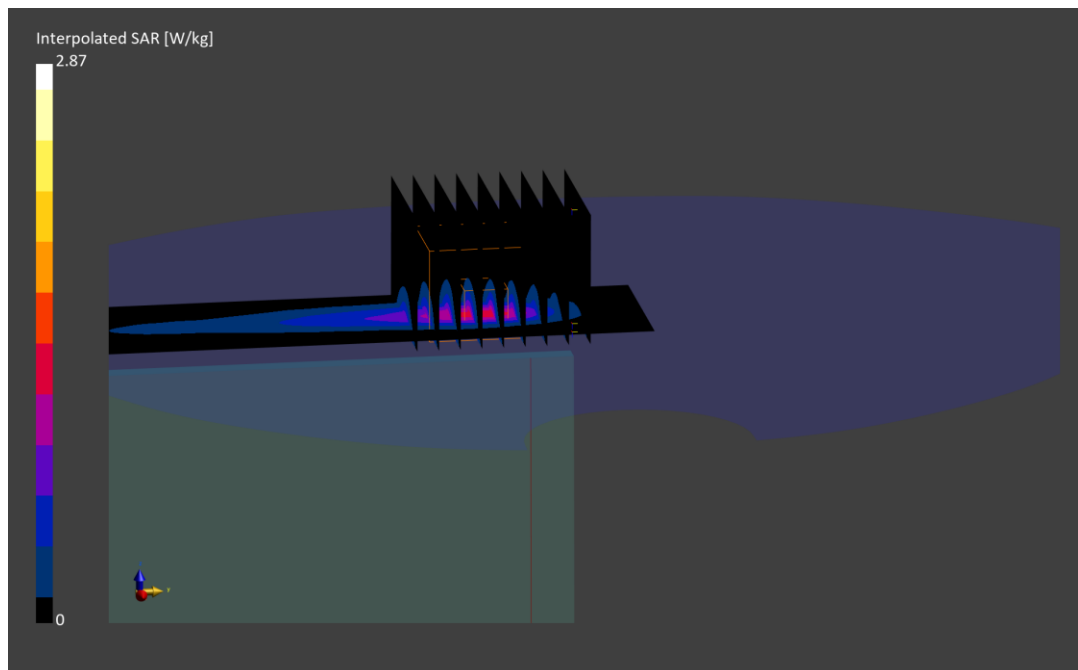

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: QXJK3

Communication System: UID:10770 - AAE, CW; MAIA: Y; Frequency: 680.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 680.500$ MHz; $\text{cond} = 0.865$ S/m; $\text{perm} = 43.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 12/01/2025; Ambient Temp: 21.8°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n71, Antenna 3b, Exp: Body| Back Side, Ch. 136100,
20 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (210.0 x 300.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (48.0 x 43.2 x 31.2): Measurement grid: $dx=4.8$ mm, $dy=4.8$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.82 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 1.05 W/kg

Smallest distance from peaks to all points 3 dB below is 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

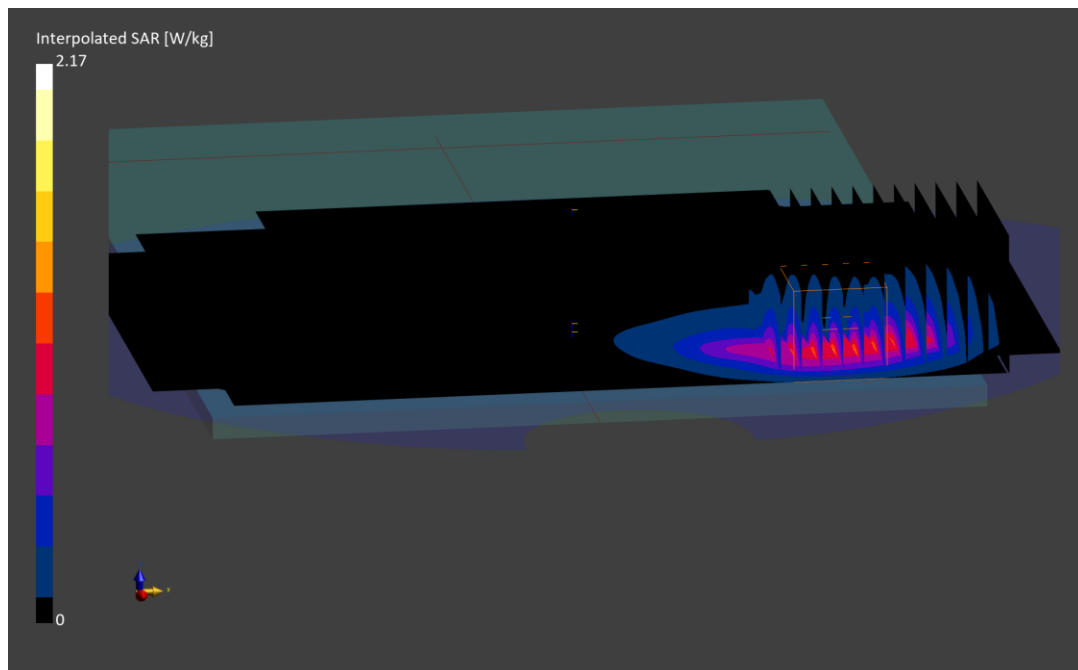

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: KPDH0

Communication System: UID:10938 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 707.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 707.500$ MHz; $\text{cond} = 0.856$ S/m; $\text{perm} = 43.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/06/2025; Ambient Temp: 22.7°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n12, Antenna 4, Exp: Body| Top Edge, Ch. 141500,
15 MHz Bandwidth, DFT-s-OFDM QPSK, 36 RB, 22 RB Offset**

Area Scan (40.0 x 210.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (33.0 x 33.0 x 31.2): Measurement grid: $dx=5.5$ mm, $dy=5.5$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.62 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.59 W/kg

SAR(1 g) = 0.907 W/kg

Smallest distance from peaks to all points 3 dB below is 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 67.7 %

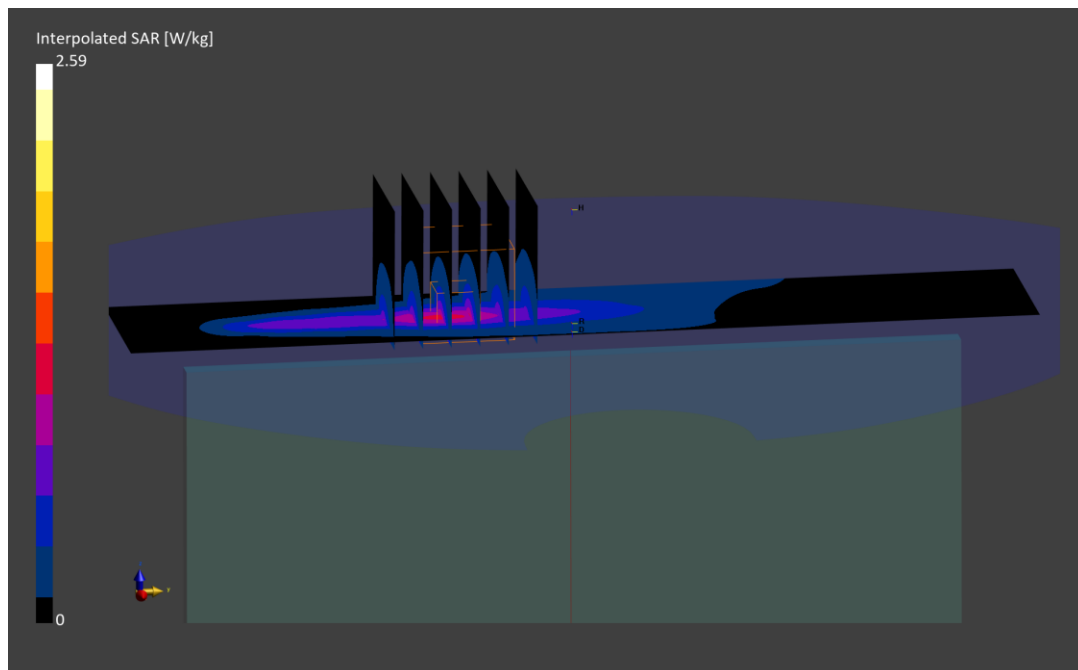

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 493NW

Communication System: UID:10937 - AAD, 5G NR FR1 FDD; MAIA: Y; Frequency: 793.000 MHz

Medium: 750 Head; Medium parameters used:

$f = 793.000$ MHz; $\text{cond} = 0.882$ S/m; $\text{perm} = 43.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/06/2025; Ambient Temp: 22.7°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n14, Antenna 4, Exp: Body| Top Edge, Ch. 158600,
10 MHz Bandwidth, DFT-s-OFDM QPSK, 25 RB, 14 RB Offset**

Area Scan (48.0 x 210.0): Measurement grid: $\text{dx}=8.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (30.0 x 36.0 x 31.2): Measurement grid: $\text{dx}=6.0$ mm, $\text{dy}=6.0$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.79 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 1.02 W/kg

Smallest distance from peaks to all points 3 dB below is 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

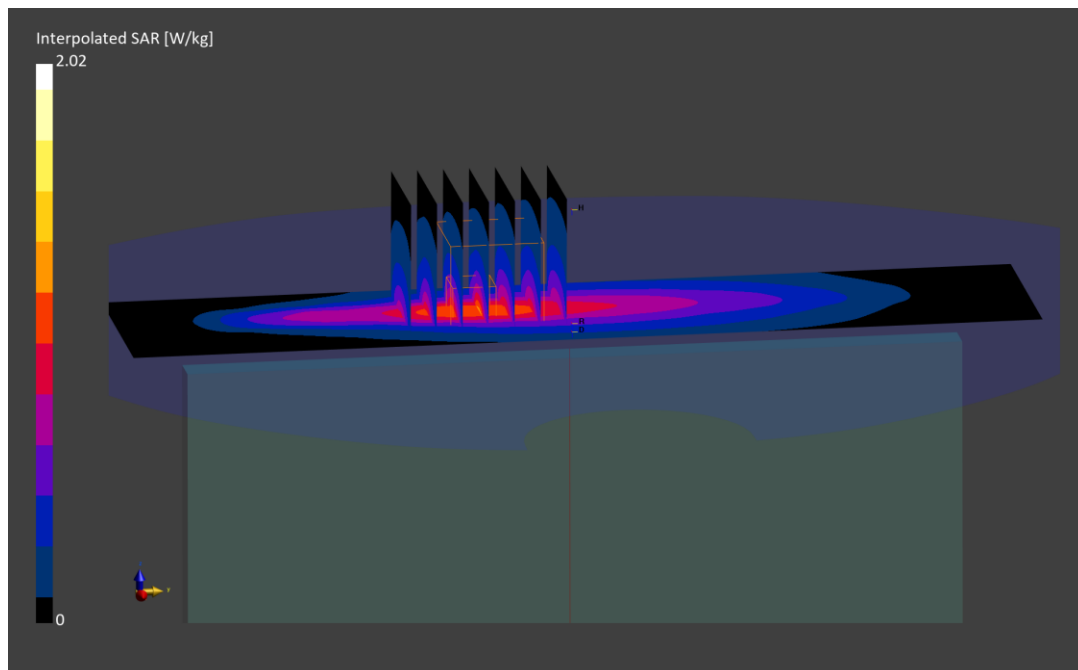

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: LLQ1X

Communication System: UID:10770 - AAD, CW; MAIA: Y; Frequency: 831.500 MHz

Medium: 835 Head; Medium parameters used:

$f = 831.500$ MHz; $\text{cond} = 0.897$ S/m; $\text{perm} = 42.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/22/2025; Ambient Temp: 23.0°C; Tissue Temp: 24.5°C

Probe: EX3DV4 - SN7551; ConvF:(9.82,9.71,9.99); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2025-04-15

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n26, Antenna 3b, Exp: Body| Back Side, Ch. 166300,
20 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (210.0 x 300.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (42.0 x 42.0 x 31.2): Measurement grid: $dx=3.5$ mm, $dy=3.5$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.91 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.863 W/kg

Smallest distance from peaks to all points 3 dB below is 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

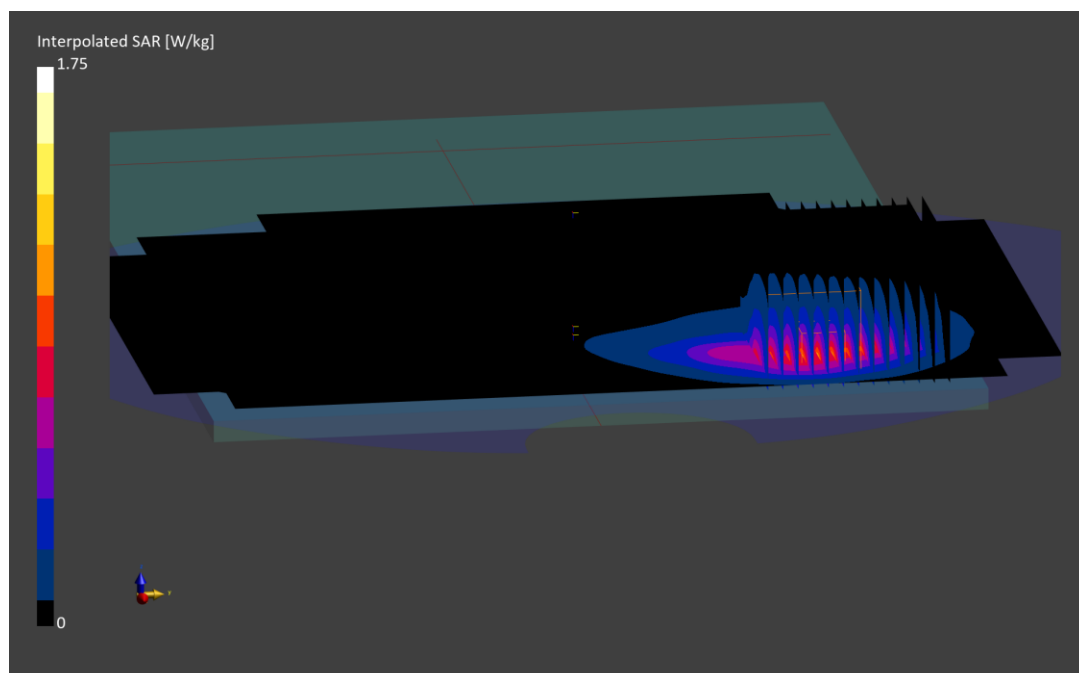

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: LLQ1X

Communication System: UID:10931 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 836.500 MHz

Medium: 835 Head; Medium parameters used:

$f = 836.500$ MHz; $\text{cond} = 0.912$ S/m; $\text{perm} = 41.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/06/2025; Ambient Temp: 22.8°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7551; ConvF:(9.82,9.71,9.99); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2025-04-15

Phantom: Twin-SAM V5; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n5, Antenna 4, Exp: Body| Back Side, Ch. 167300,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 104 RB Offset**

Area Scan (210.0 x 300.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (42.0 x 42.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.97 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.955 W/kg

Smallest distance from peaks to all points 3 dB below is 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 74.1 %

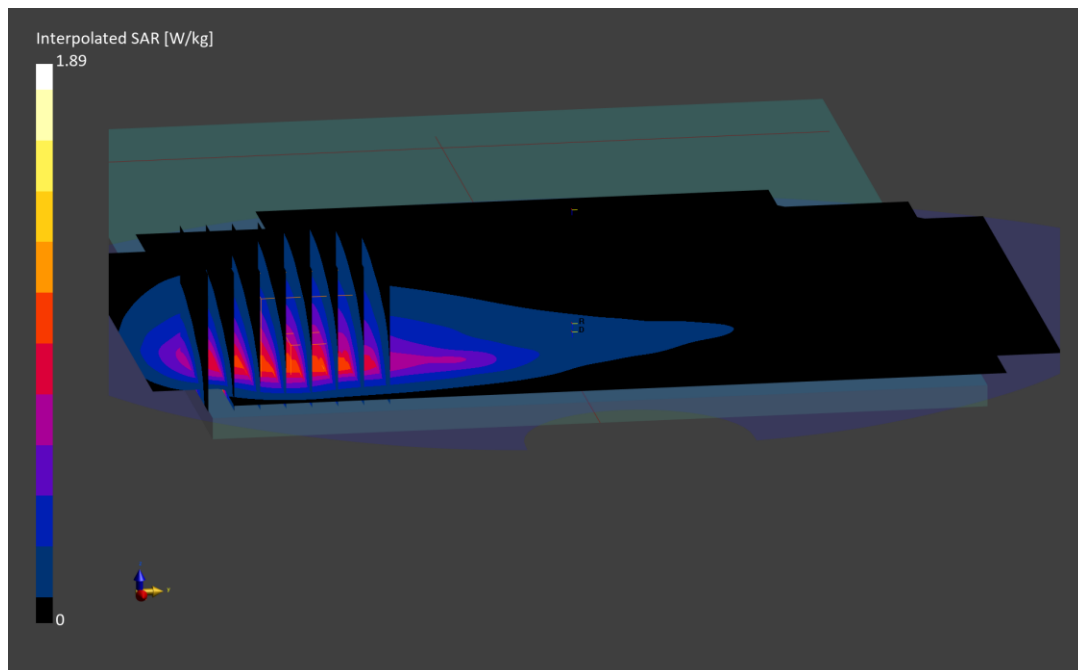

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 9L2QC

Communication System: UID:10938 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 1702.500 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1702.500$ MHz; $\text{cond} = 1.36$ S/m; $\text{perm} = 38.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/13/2025; Ambient Temp: 22.1°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7421; ConvF:(7.44,8.39,7.85); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn604; Calibrated: 2025-03-06

Phantom: Twin-SAM V8.0; Serial: 1917

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n70, Antenna 4, Exp: Body| Top Edge, Ch. 340500,
15 MHz Bandwidth, DFT-s-OFDM QPSK, 36 RB, 0 RB Offset**

Area Scan (40.0 x 210.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $\text{dx}=6.0$ mm, $\text{dy}=6.0$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.02 W/kg; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.968 W/kg

Smallest distance from peaks to all points 3 dB below is 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 84.0 %

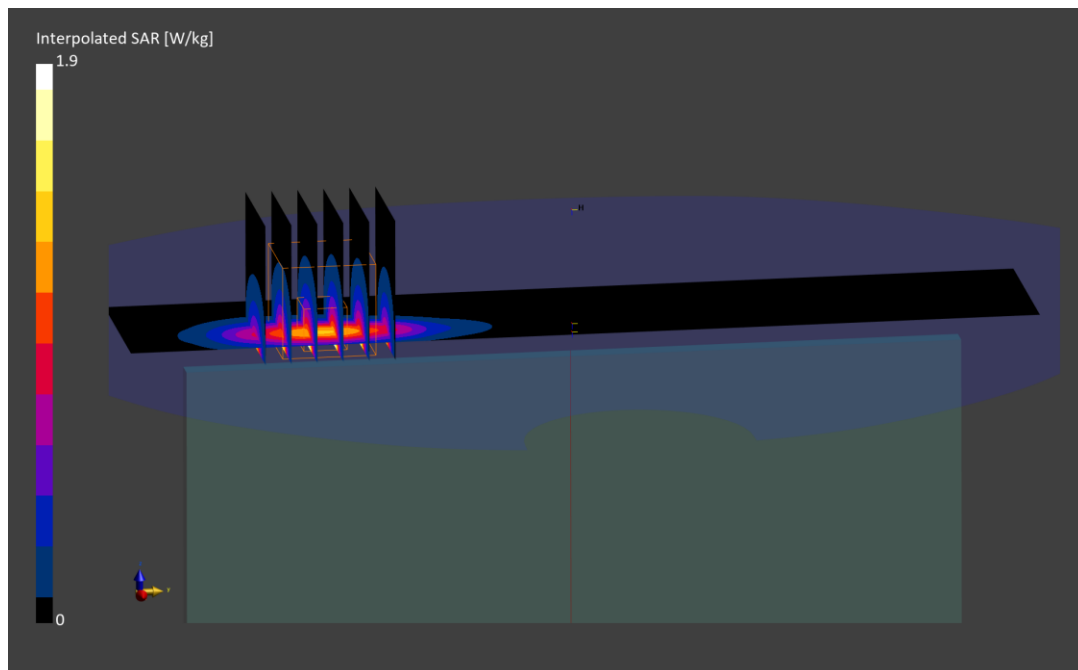

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: JMYKF

Communication System: UID:10942 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 1745.000 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1745.000$ MHz; $\text{cond} = 1.38$ S/m; $\text{perm} = 38.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/17/2025; Ambient Temp: 21.8°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7421; ConvF:(7.44,8.39,7.85); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn604; Calibrated: 2025-03-06

Phantom: Twin-SAM V8.0; Serial: 1917

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n66, Antenna 4, Exp: Body| Top Edge, Ch. 349000,
45 MHz Bandwidth, DFT-s-OFDM QPSK, 120 RB, 122 RB Offset**

Area Scan (40.0 x 210.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.07 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 1.10 W/kg

Smallest distance from peaks to all points 3 dB below is 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

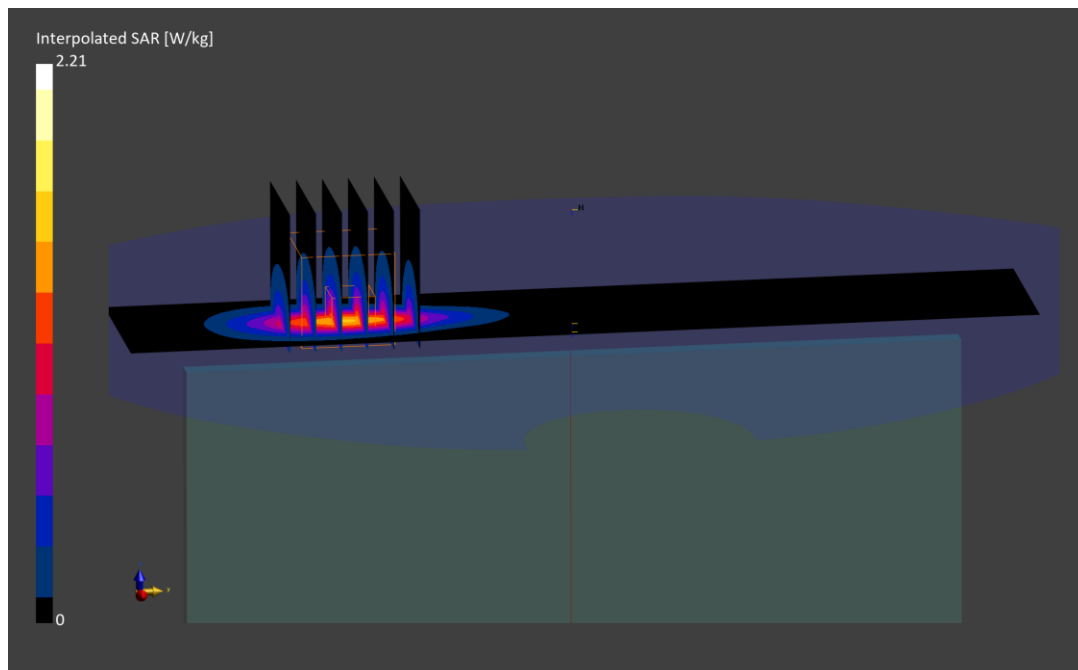

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: JMYKF

Communication System: UID:10773 - AAF, CW; MAIA: Y; Frequency: 1882.500 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1882.500$ MHz; $\text{cond} = 1.40$ S/m; $\text{perm} = 40.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/15/2025; Ambient Temp: 22.4°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7638; ConvF:(7.94,8.13,8.2); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn467; Calibrated: 2025-02-06

Phantom: Twin-SAM V8.0; Serial: 1692

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n25, Antenna 4, Exp: Body| Top Edge, Ch. 376500,
40 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 210.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.11 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 1.02 W/kg

Smallest distance from peaks to all points 3 dB below is 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

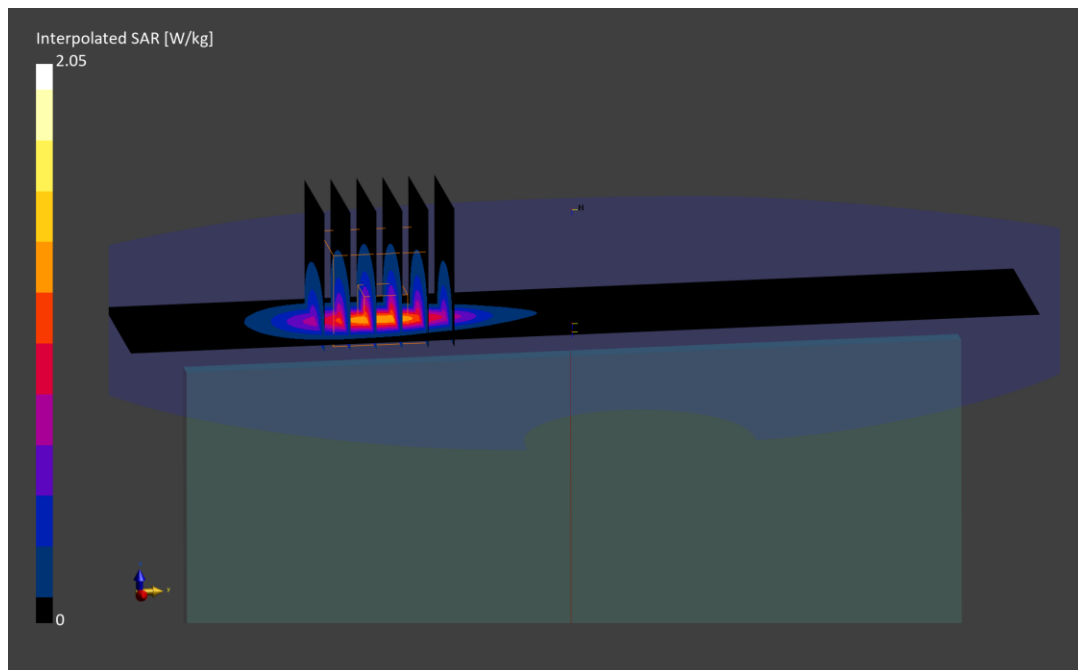

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 0JPKX

Communication System: UID:10929 - AAD, 5G NR FR1 FDD; MAIA: Y; Frequency: 2310.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2310.000$ MHz; $\text{cond} = 1.63$ S/m; $\text{perm} = 38.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/09/2025; Ambient Temp: 21.9°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7416; ConvF:(6.98,7.27,7.02); Calibrated: 2025-05-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn701; Calibrated: 2025-05-09

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n30, Antenna 3a, Exp: Body| Back Side, Ch. 462000,
10 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 50 RB Offset**

Area Scan (220.0 x 280.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 35.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.95 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 g) = 1.10 W/kg

Smallest distance from peaks to all points 3 dB below is 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 74.7 %

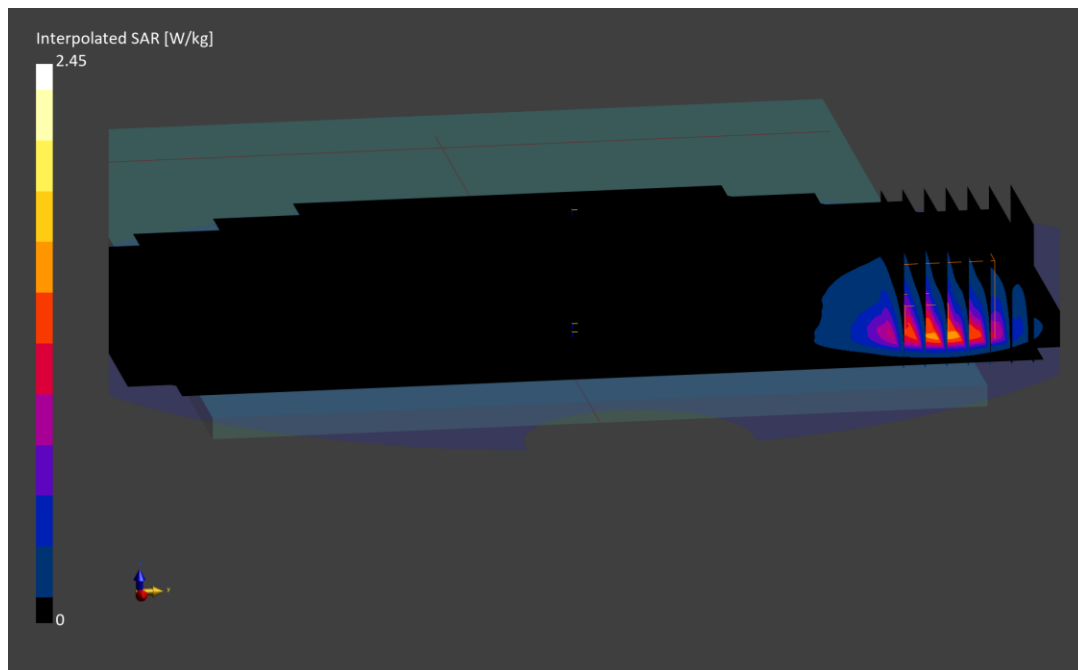

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: PNYJW

Communication System: UID:10942 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 2535.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2535.000$ MHz; $\text{cond} = 1.89$ S/m; $\text{perm} = 37.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/09/2025; Ambient Temp: 22.5°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7490; ConvF:(7.09,7.18,6.9); Calibrated: 2024-12-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1644; Calibrated: 2024-12-04

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n7, Antenna 3a, Exp: Body| Right Edge, Ch. 507000,
50 MHz Bandwidth, DFT-s-OFDM QPSK, 135 RB, 0 RB Offset**

Area Scan (40.0 x 280.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 35.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 1.17 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 1.07 W/kg

Smallest distance from peaks to all points 3 dB below is 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 76.7 %

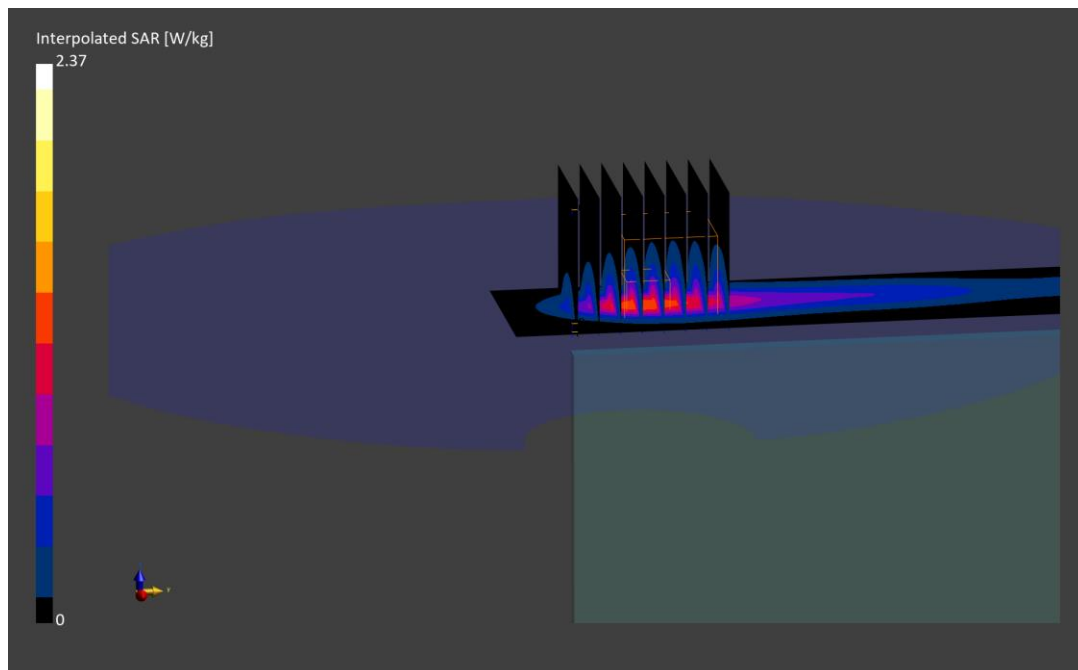

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: XXXX1

Communication System: UID:10866 - AAF, 5G NR FR1 TDD; MAIA: Y; Frequency: 2592.990 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2592.990$ MHz; $\text{cond} = 1.95$ S/m; $\text{perm} = 38.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 09/25/2025; Ambient Temp: 20.7°C; Tissue Temp: 20.2°C

Probe: EX3DV4 - SN7490; ConvF:(7.09,7.18,6.9); Calibrated: 2024-12-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1644; Calibrated: 2024-12-04

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n41, Antenna 2b, Exp: Body| Bottom Edge, Ch. 518598,
100 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 137 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 1.33 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.67 W/kg

SAR(1 g) = 1.14 W/kg

Smallest distance from peaks to all points 3 dB below is 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.3 %

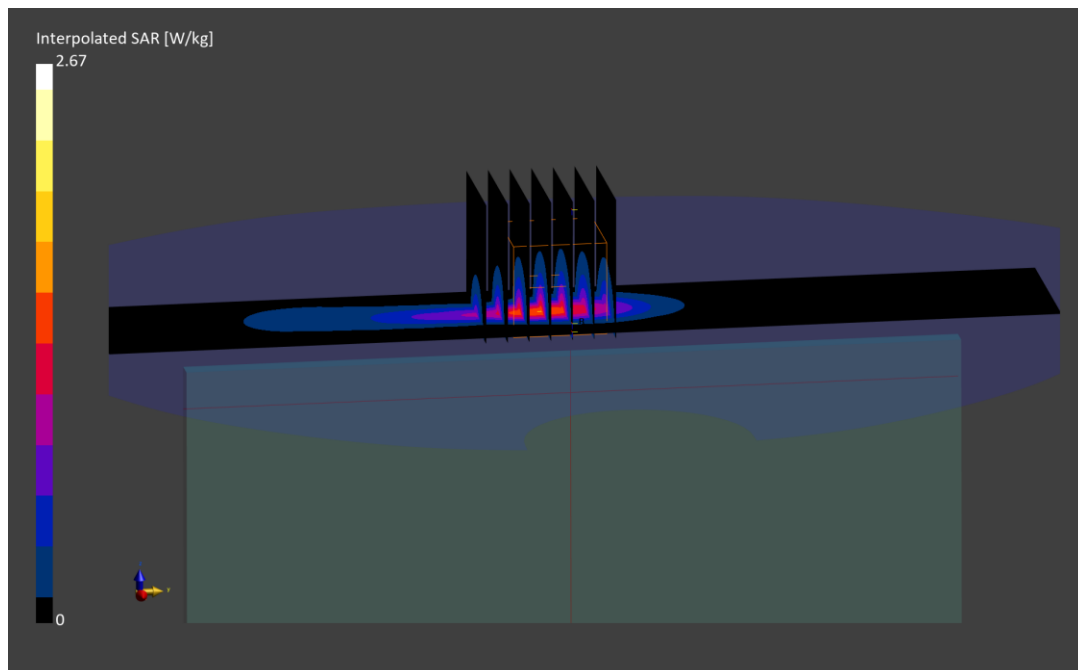

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: HPHC3

Communication System: UID:10913 - AAD, 5G NR FR1 TDD; MAIA: Y; Frequency: 3679.975 MHz

Medium: 3600 Head; Medium parameters used:

$f = 3679.975$ MHz; $\text{cond} = 2.97$ S/m; $\text{perm} = 38.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 12/21/2025; Ambient Temp: 20.0°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7552; ConvF:(5.88,6.52,6.34); Calibrated: 2025-05-14

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1676; Calibrated: 2025-05-13

Phantom: Twin-SAM V8.0; Serial: 1944

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n48, Antenna 1a, Exp: Body| Left Edge, Ch. 645332,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset**

Area Scan (40.0 x 280.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 29.1): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5


Reference Value = 0.74 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.77 W/kg

SAR(1 g) = 0.984 W/kg

Smallest distance from peaks to all points 3 dB below is 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 72.5 %

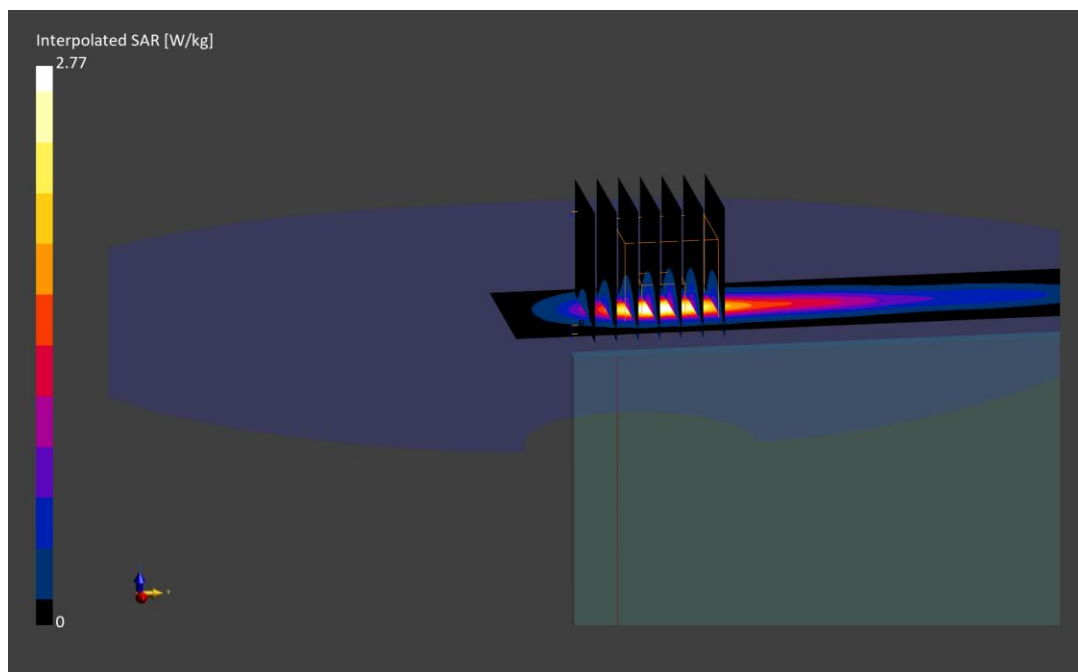

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 9L2QC

Communication System: UID:10803 - AAF, 5G NR FR1 TDD; MAIA: Y; Frequency: 3750.000 MHz

Medium: 3600 Head; Medium parameters used:

$f = 3750.000$ MHz; $\text{cond} = 3.16$ S/m; $\text{perm} = 36.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/12/2025; Ambient Temp: 22.4°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7360; ConvF:(6.62,6.52,7.42); Calibrated: 2025-03-07

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn534; Calibrated: 2025-03-11

Phantom: Twin-SAM V8.0; Serial: 2034

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n77, Antenna 1a, Exp: Body| Left Edge, Ch. 650000,
100 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 280.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (40.0 x 40.0 x 29.1): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5


Reference Value = 0.88 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.24 W/kg

SAR(1 g) = 1.13 W/kg

Smallest distance from peaks to all points 3 dB below is 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 72.9 %

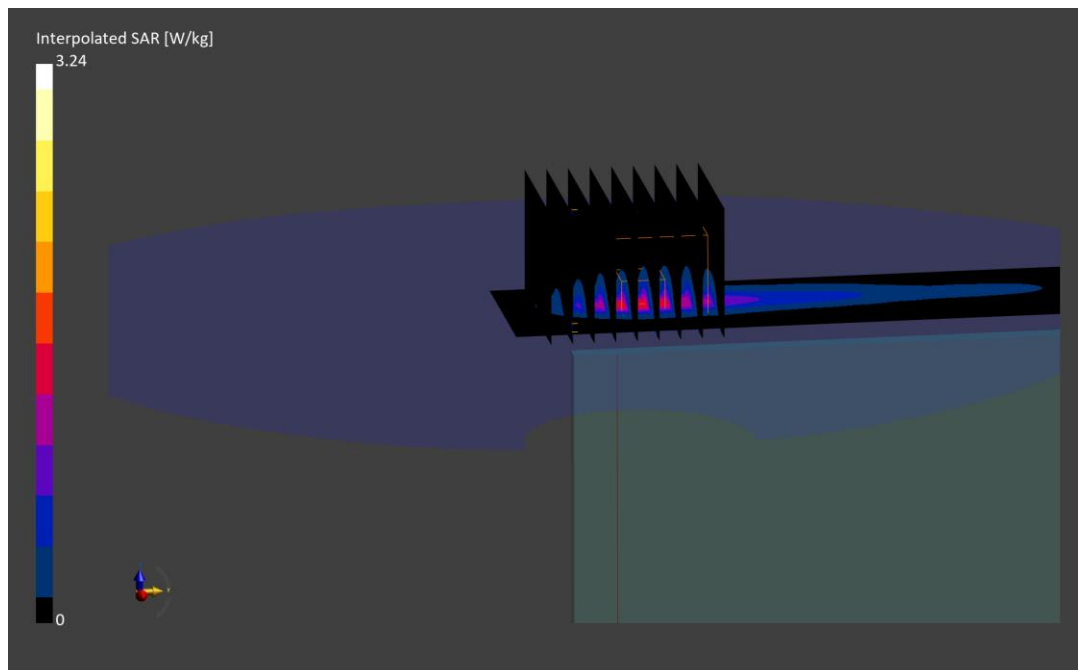

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 493NW

Communication System: UID:10868 - AAF, 5G NR FR1 TDD; MAIA: Y; Frequency: 3500.010 MHz

Medium: 3600 Head; Medium parameters used:

$f = 3500.010$ MHz; $\text{cond} = 2.79$ S/m; $\text{perm} = 39.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/09/2025; Ambient Temp: 22.6°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7552; ConvF:(5.94,6.58,6.41); Calibrated: 2025-05-14

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1676; Calibrated: 2025-05-13

Phantom: Twin-SAM V8.0; Serial: 1944

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n77 DoD, Antenna 2a, Exp: Body| Right Edge, Ch. 633334,
100 MHz Bandwidth, DFT-s-OFDM QPSK, 270 RB, 0 RB Offset**

Area Scan (40.0 x 280.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 35.0 x 29.1): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5


Reference Value = 0.77 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 1.02 W/kg

Smallest distance from peaks to all points 3 dB below is 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 71.6 %

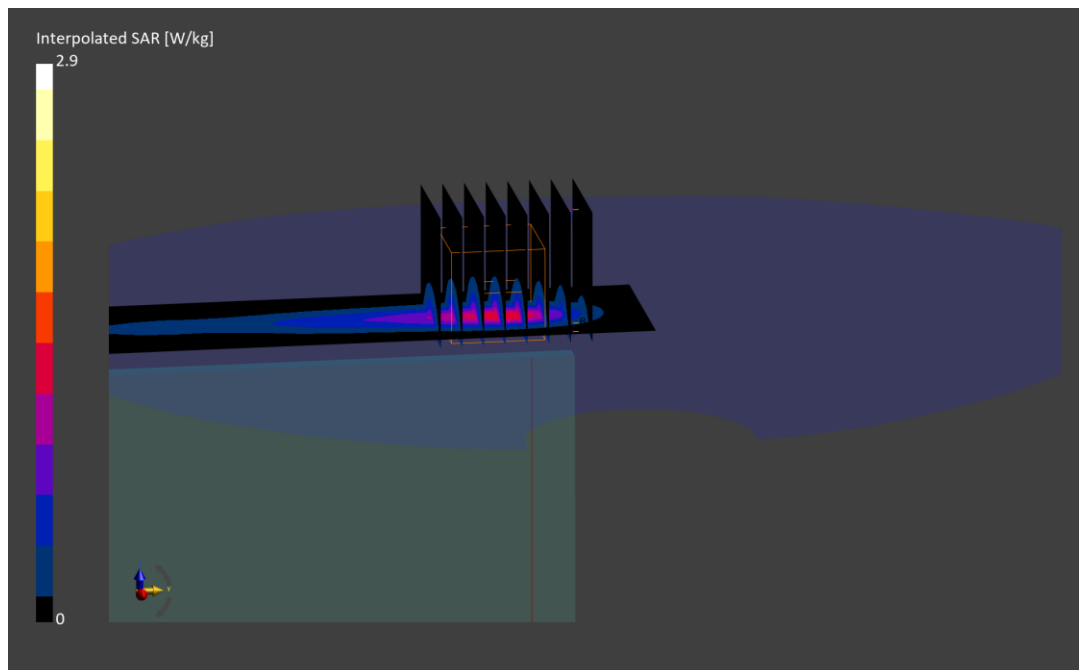

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 5R2JL

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2462.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2462.000$ MHz; $\text{cond} = 1.83$ S/m; $\text{perm} = 38.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/17/2025; Ambient Temp: 20.5°C; Tissue Temp: 24.4°C

Probe: EX3DV4 - SN7532; ConvF:(6.89,6.81,7.65); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; Calibrated: 2025-04-09

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 2.4 GHz WIFI/ IEEE 802.11b, Antenna 1a, 22 MHz Bandwidth, Exp: Body| Left Edge,
Ch. 11, 1Mbps**

Area Scan (40.0 x 280.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.78 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 g) = 1.02 W/kg

Smallest distance from peaks to all points 3 dB below is 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 74.7 %

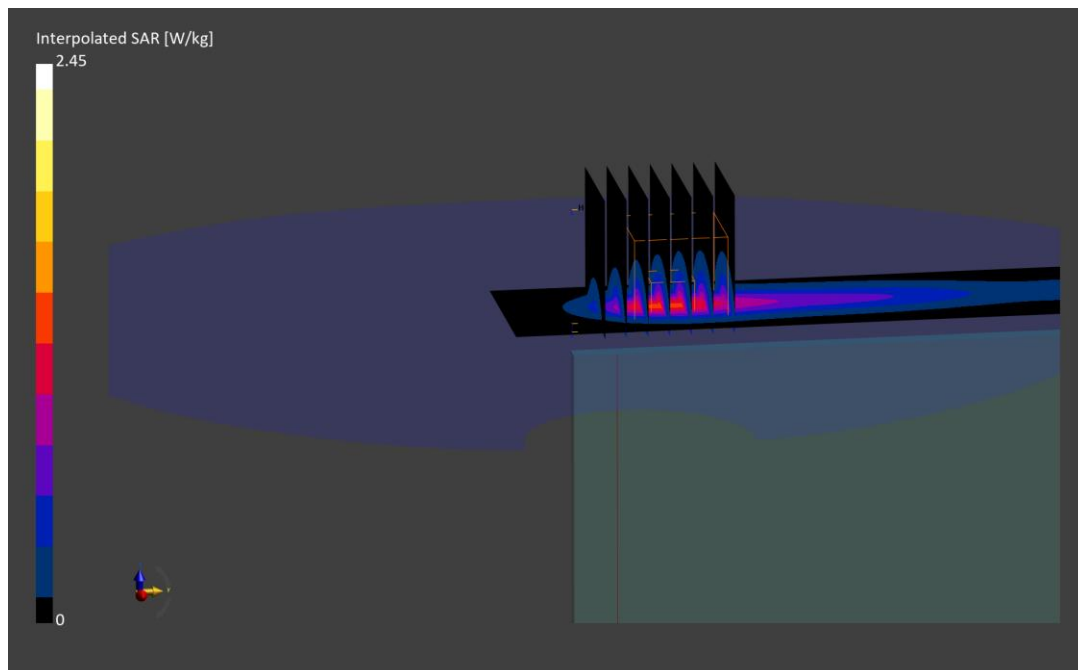

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 0JPKX

Communication System: UID:10117 - CAE, WLAN; MAIA: Y; Frequency: 5270.000 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5270.000$ MHz; $\text{cond} = 4.53$ S/m; $\text{perm} = 34.7$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/17/2025; Ambient Temp: 21.1°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7499; ConvF:(5.42,5.54,5.73); Calibrated: 2025-01-14
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1465; Calibrated: 2025-01-08
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 5 GHz WIFI/ IEEE 802.11n, Antenna 3c, 40 MHz Bandwidth, U-NII-2A, Exp: Body|
Top Edge, Ch. 54, 13.5 Mbps**

Area Scan (40.0 x 220.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=10.0$ mm

Zoom Scan (36.0 x 32.0 x 22.9): Measurement grid: $\text{dx}=4.0$ mm, $\text{dy}=4.0$ mm, $\text{dz}=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.60 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 0.958 W/kg

Smallest distance from peaks to all points 3 dB below is 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.8 %

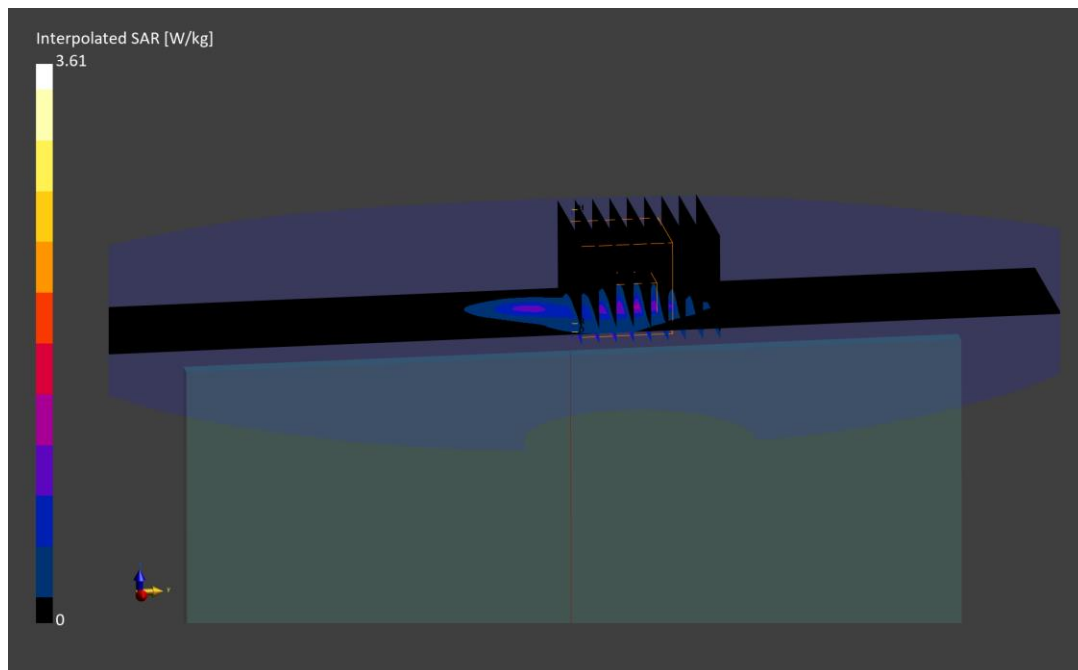

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 5R2JL

Communication System: UID:10755 - AAC, WLAN; MAIA: Y; Frequency: 6665.000 MHz

Medium: 6000 Head; Medium parameters used:

$f = 6665.000$ MHz; $\text{cond} = 6.05$ S/m; $\text{perm} = 35.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/24/2025; Ambient Temp: 21.5°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN3837; ConvF:(5.38,5.14,5.25); Calibrated: 2025-08-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2025-08-06

Phantom: Twin-SAM V4.0; Serial: 1275

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 6 GHz WIFI/ IEEE 802.11ax, Antenna 1b, 160 MHz Bandwidth, U-NII-7, Exp: Body|
Bottom Edge, Ch. 143, 68.1 Mbps**

Area Scan (40.0 x 221.0): Measurement grid: $dx=5.0$ mm, $dy=8.5$ mm

Zoom Scan (37.4 x 37.4 x 22.9): Measurement grid: $dx=3.4$ mm, $dy=3.4$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.33 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.1 W/kg

SAR(1 g) = 0.395 W/kg; APD(4cm²) = 2.41 W/m²

Smallest distance from peaks to all points 3 dB below is 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 49.1 %

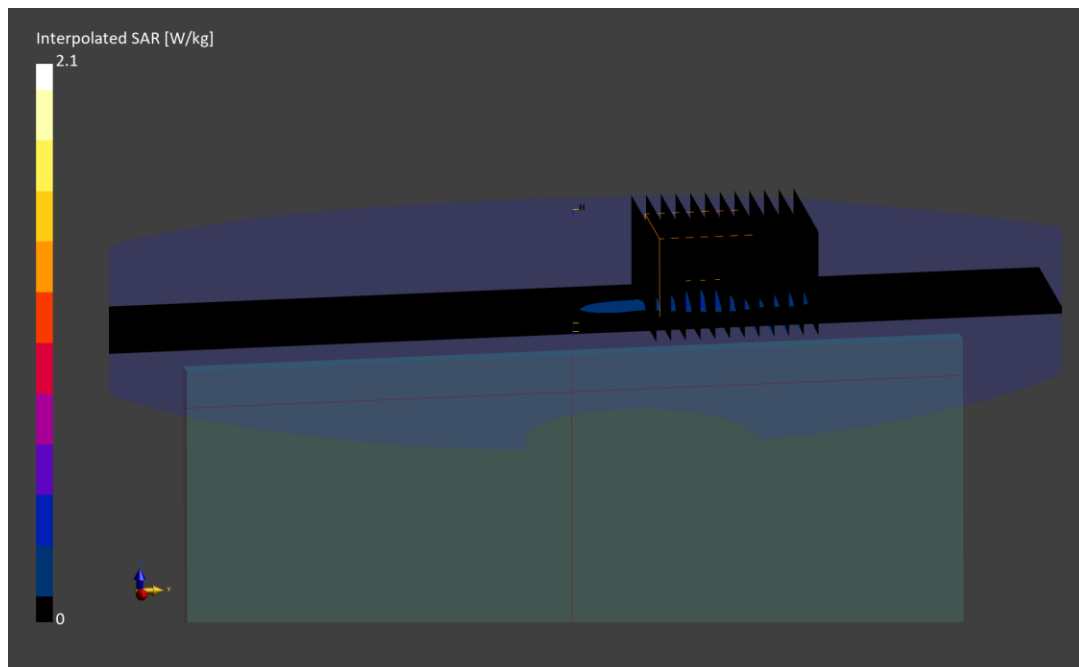

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 5R2JL

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2441.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2441.000$ MHz; $\text{cond} = 1.81$ S/m; $\text{perm} = 38.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/17/2025; Ambient Temp: 20.5°C; Tissue Temp: 24.4°C

Probe: EX3DV4 - SN7532; ConvF:(6.89,6.81,7.65); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; Calibrated: 2025-04-09

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: 2.4 GHz Bluetooth, Antenna 1a, Exp: Body| Left Edge, Ch. 39, 1 Mbps

Area Scan (40.0 x 280.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (40.0 x 40.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.56 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.753 W/kg

Smallest distance from peaks to all points 3 dB below is 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

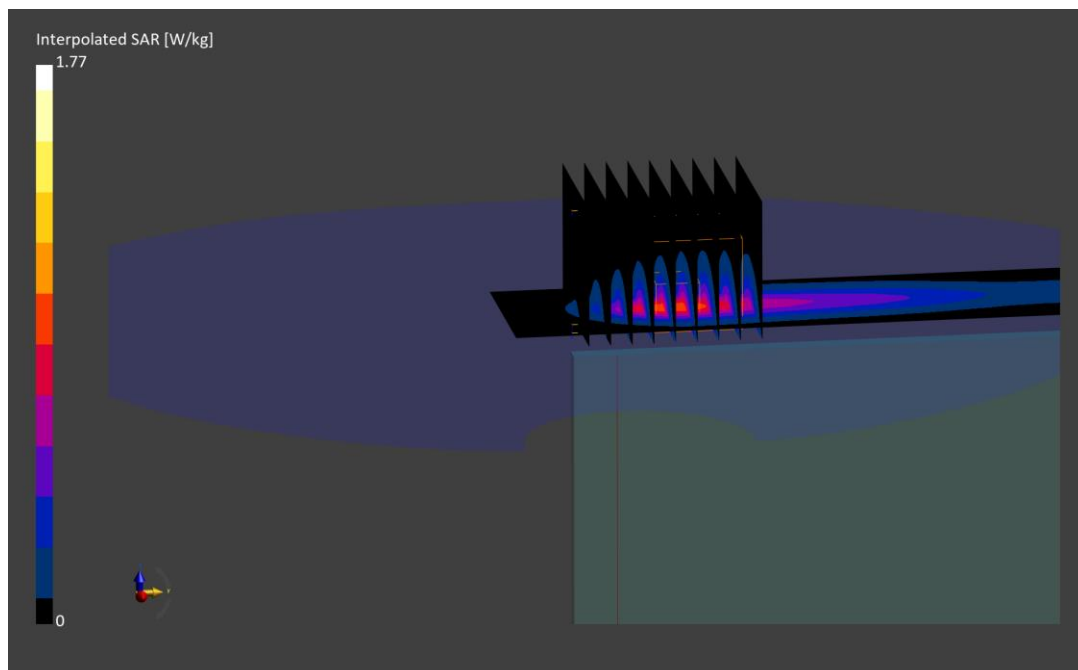

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 5R2JL

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 2475.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2475.000$ MHz; $\text{cond} = 1.80$ S/m; $\text{perm} = 39.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/23/2025; Ambient Temp: 21.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7532; ConvF:(6.89,6.81,7.65); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; Calibrated: 2025-04-09

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: 802.15.4, Antenna 1a, Exp: Body| Left Edge, Ch. 25, 1 Mbps

Area Scan (40.0 x 280.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=10.0$ mm

Zoom Scan (40.0 x 40.0 x 31.2): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=5.0$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.71 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 0.920 W/kg

Smallest distance from peaks to all points 3 dB below is 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 75.1 %

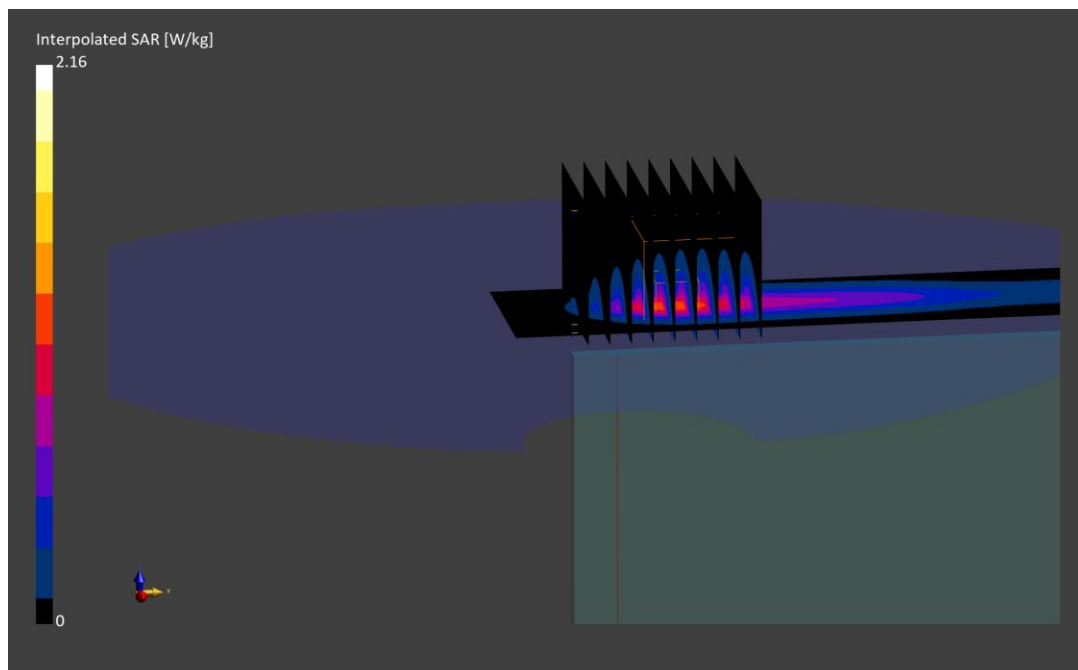

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: HPHC3

Communication System: UID:10032 - CAA, CW; MAIA: Y; Frequency: 5844.000 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5844.000$ MHz; $\text{cond} = 5.42$ S/m; $\text{perm} = 33.6$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/05/2025; Ambient Temp: 20.4°C; Tissue Temp: 19.4°C

Probe: EX3DV4 - SN7499; ConvF:(4.9,5.02,5.19); Calibrated: 2025-01-14
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1465; Calibrated: 2025-01-08
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.4.0.5005

Mode: NB U-NII 3, Antenna 3c, Exp: Body| Top Edge, Ch. High, 1 Mbps

Area Scan (40.0 x 220.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=10.0$ mm

Zoom Scan (32.0 x 32.0 x 22.9): Measurement grid: $\text{dx}=4.0$ mm, $\text{dy}=4.0$ mm, $\text{dz}=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.41 W/kg; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 0.779 W/kg

Smallest distance from peaks to all points 3 dB below is 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 57.8 %

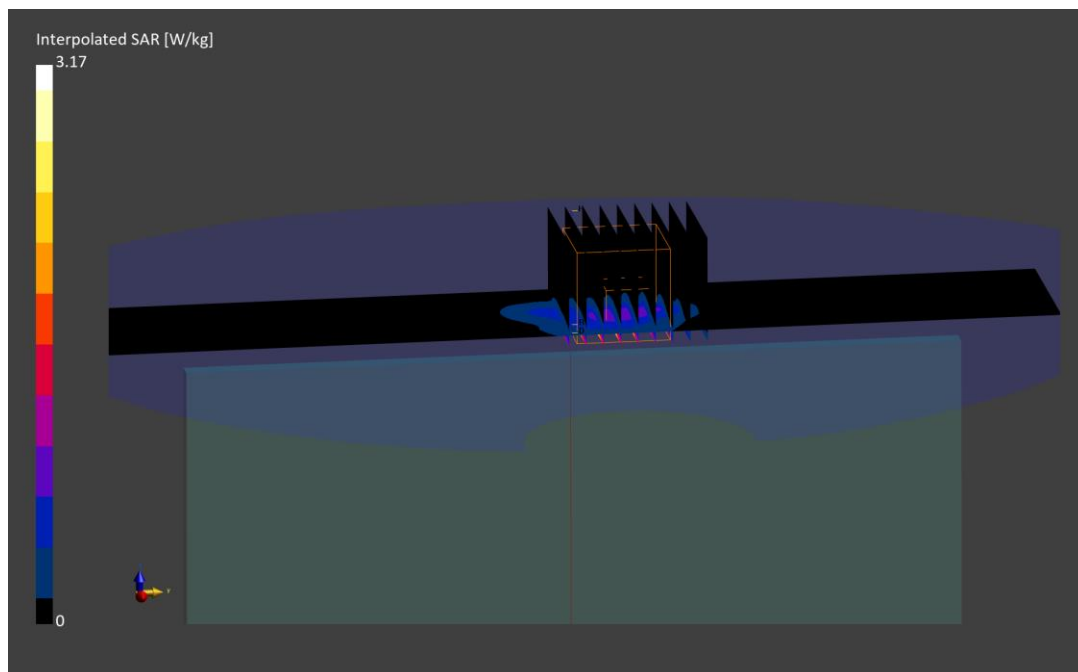

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 5R2JL

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 13.600 MHz

Medium: 30 Head; Medium parameters used:

$f = 13.600$ MHz; $\text{cond} = 0.751$ S/m; $\text{perm} = 52.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 12/17/2025; Ambient Temp: 21.20°C; Tissue Temp: 23.10°C

Probe: EX3DV4 - SN7782; ConvF:(18.49,15.42,16.82); Calibrated: 2025-09-15

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1646; Calibrated: 2025-09-10

Phantom: ELI V6.0; Serial: 2003

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: wPT, Body SAR, Back Side

Area Scan (210.0 x 300.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = -0.00 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.1 W/kg

SAR(1 g) = 0 W/kg

Smallest distance from peaks to all points 3 dB below is 2.4 mm

Ratio of SAR at M2 to SAR at M1 = 71.1 %

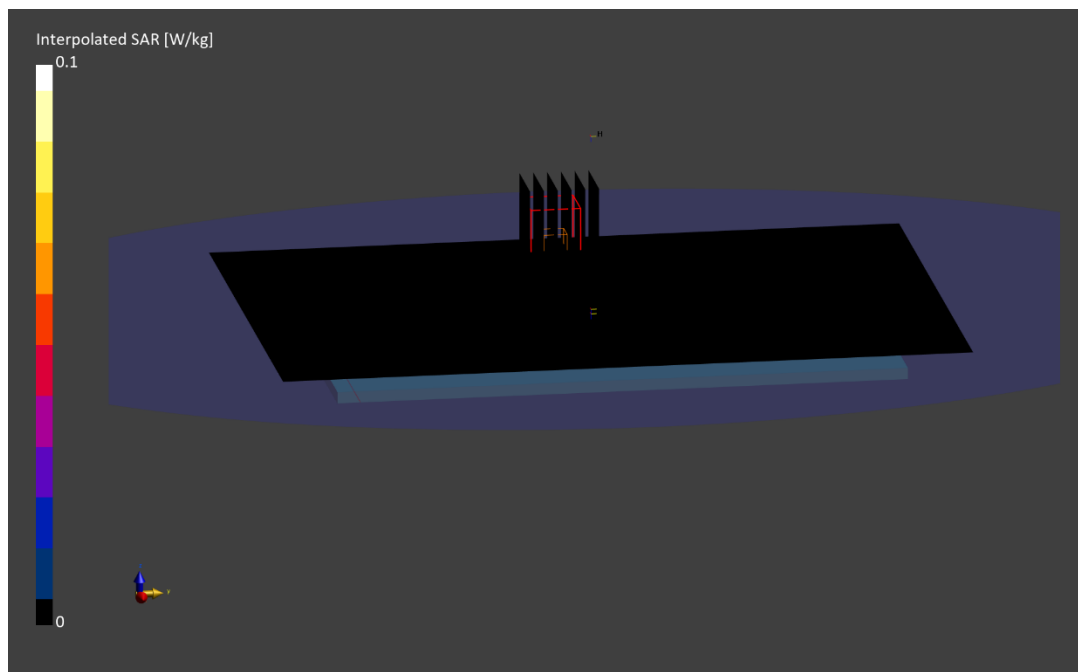

Date: 11/25/2025

Antenna 1b, Ch. 143, 802.11ax

Device Under Test Properties

DUT	Serial Number	DUT Type
BCGA3460	5R2JL	Tablet Device

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Channel	Group, UID	Frequency [MHz]
5G	EDGE BOTTOM	2.00	143	10755	6665.0

Hardware Setup

Probe, Calibration Date	DAE, Calibration Date
EUmmWV3 – SN9364, 06/11/2025	DAE4 – SN1402, 04/10/2025

Software Setup


Software	Software Version
cDASY6 Module mmWave	3.2.0.1840

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.041 x 0.041
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Avg. Area [cm²]	4.00
pS _{tot} avg [W/m²]	3.36
pS _n avg [W/m²]	2.04
E _{peak} [V/m]	66.5
Power Drift [dB]	0.10

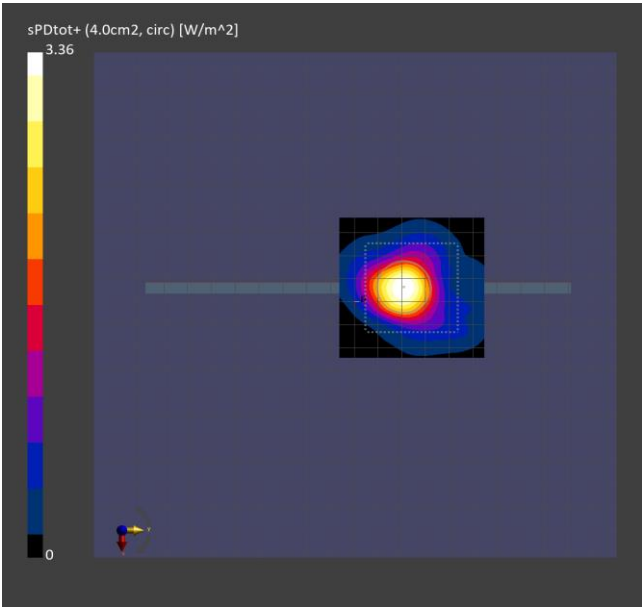

Date: 11/19/2025

Antenna 3a, Ch. High, HDRPL8

Device Under Test Properties

DUT	Serial Number	DUT Type
BCGA3460	5R2JL	Tablet Device

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Channel	Group, UID	Frequency [MHz]
5G	BACK	2.00	High	10982	6417.0

Hardware Setup

Probe, Calibration Date	DAE, Calibration Date
EUmmWV3 – SN9364, 06/11/2025	DAE4 – SN1402, 04/10/2025

Software Setup


Software	Software Version
cDASY6 Module mmWave	3.2.0.1840

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.041 x 0.041
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Avg. Area [cm²]	4.00
pS _{tot} avg [W/m²]	0.212
pS _n avg [W/m²]	0.187
E _{peak} [V/m]	15.9
Power Drift [dB]	-0.06

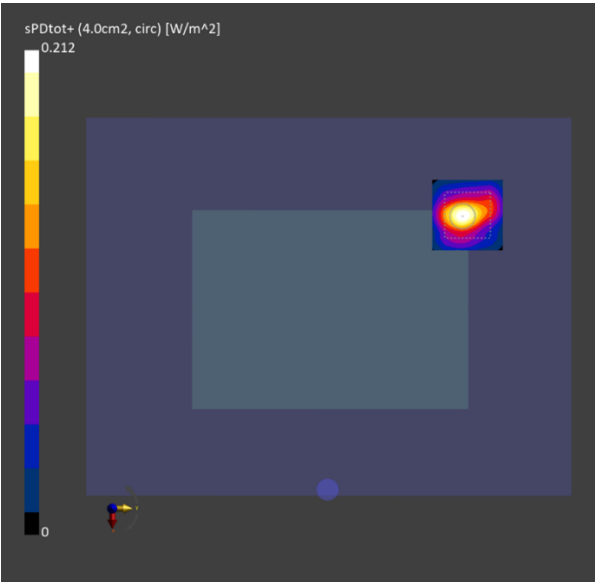

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: LL1QX

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1905.000 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1905.000$ MHz; $\text{cond} = 1.45$ S/m; $\text{perm} = 38.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 01/07/2026; Ambient Temp: 20.1°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7421; ConvF:(7.23,8.16,7.63); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn604; Calibrated: 2025-03-06

Phantom: Twin-SAM V8.0; Serial: 1917

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 25, Antenna 2b, Exp: Body| Bottom Edge, Ch. High,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (40.0 x 210.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (32.0 x 208.0 x 22.9): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.70 W/kg; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 0.954 W/kg

Smallest distance from peaks to all points 3 dB below is 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 79.8 %

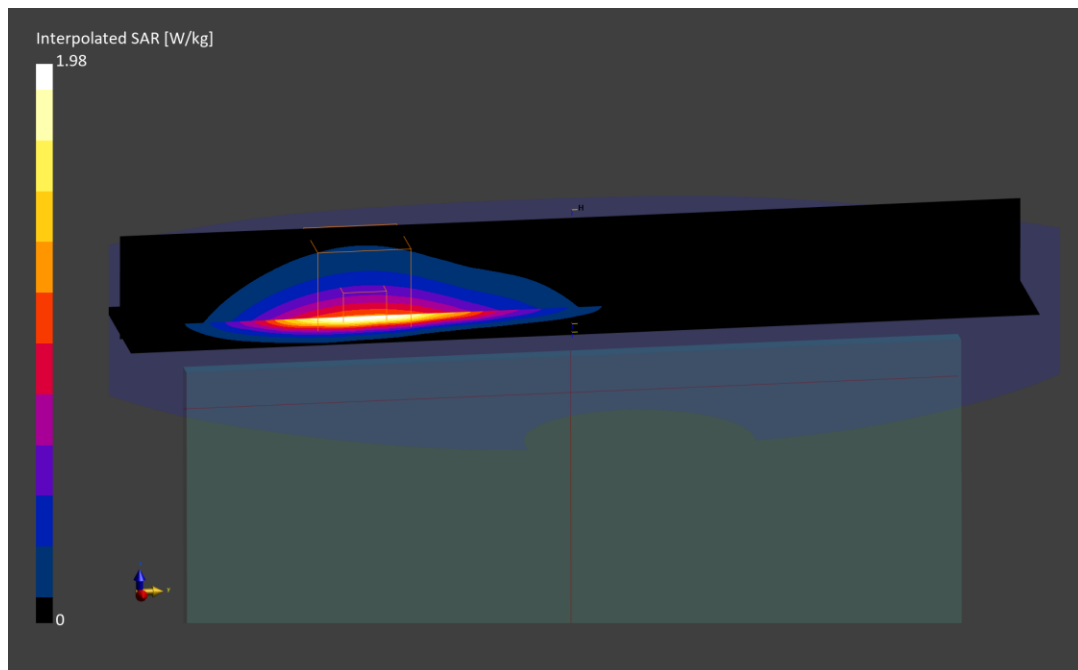

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 9H02H

Communication System: UID:10108 - CAH, LTE-FDD; MAIA: Y; Frequency: 2310.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2310.000$ MHz; $\text{cond} = 1.61$ S/m; $\text{perm} = 40.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 1/9/2026; Ambient Temp: 20.0°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7416; ConvF:(6.98,7.27,7.02); Calibrated: 2025-05-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn701; Calibrated: 2025-05-09

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 30, Antenna 2b, Exp: Body| Bottom Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 208.0 x 31.2): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.90 W/kg; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.971 W/kg

Smallest distance from peaks to all points 3 dB below is 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

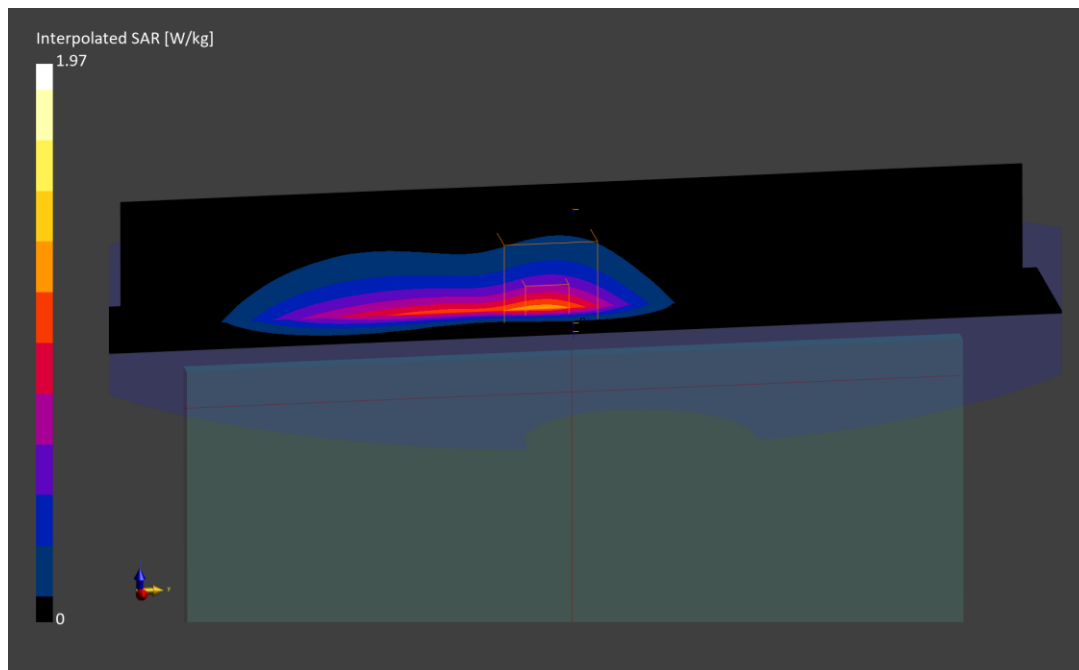

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: XRX1

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 2535.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2535.000$ MHz; $\text{cond} = 1.97$ S/m; $\text{perm} = 38.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 01/08/2026; Ambient Temp: 22.70°C; Tissue Temp: 22.50°C

Probe: EX3DV4 - SN7420; ConvF:(7.24,6.64,7.5); Calibrated: 2025-10-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2025-10-14

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 7, Antenna 2b, Exp: Body| Bottom Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 208.0 x 22.9): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 1.22 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.07 W/kg

Smallest distance from peaks to all points 3 dB below is 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.6 %

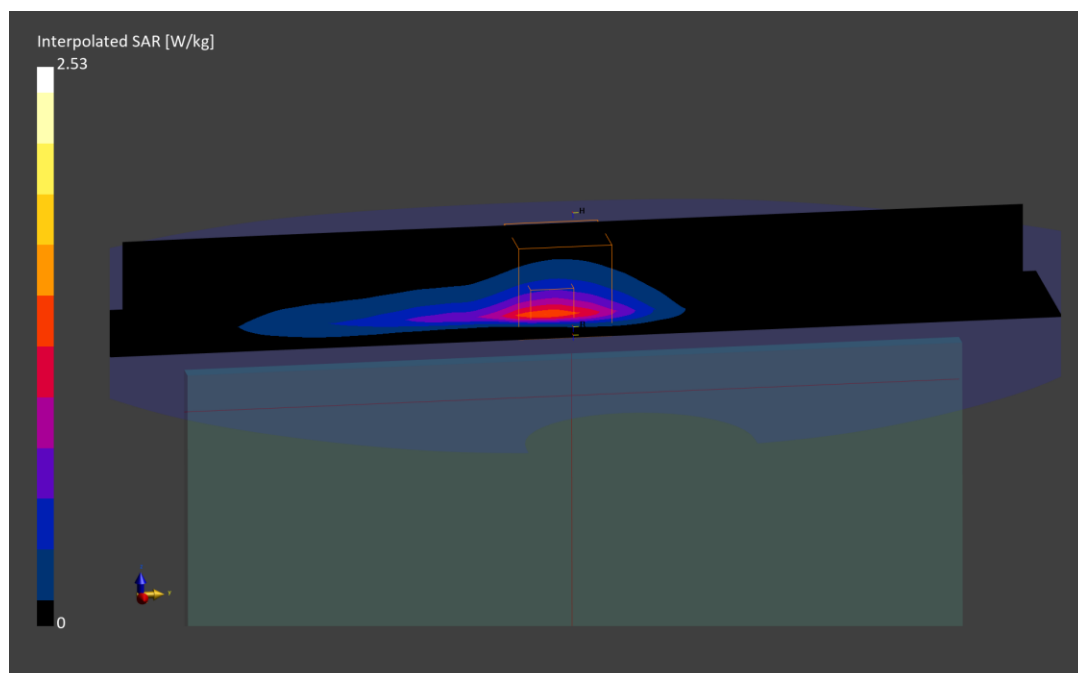

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: NN27J

Communication System: UID:10435 - AAG, LTE-TDD; MAIA: Y; Frequency: 2593.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2593.000$ MHz; $\text{cond} = 2.04$ S/m; $\text{perm} = 38.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 01/08/2026; Ambient Temp: 22.70°C; Tissue Temp: 22.50°C

Probe: EX3DV4 - SN7420; ConvF:(7.24,6.64,7.5); Calibrated: 2025-10-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2025-10-14

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 41, Antenna 2b, Exp: Body| Bottom Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (24.0 x 200.0 x 22.9): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.96 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.855 W/kg

Smallest distance from peaks to all points 3 dB below is 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.3 %

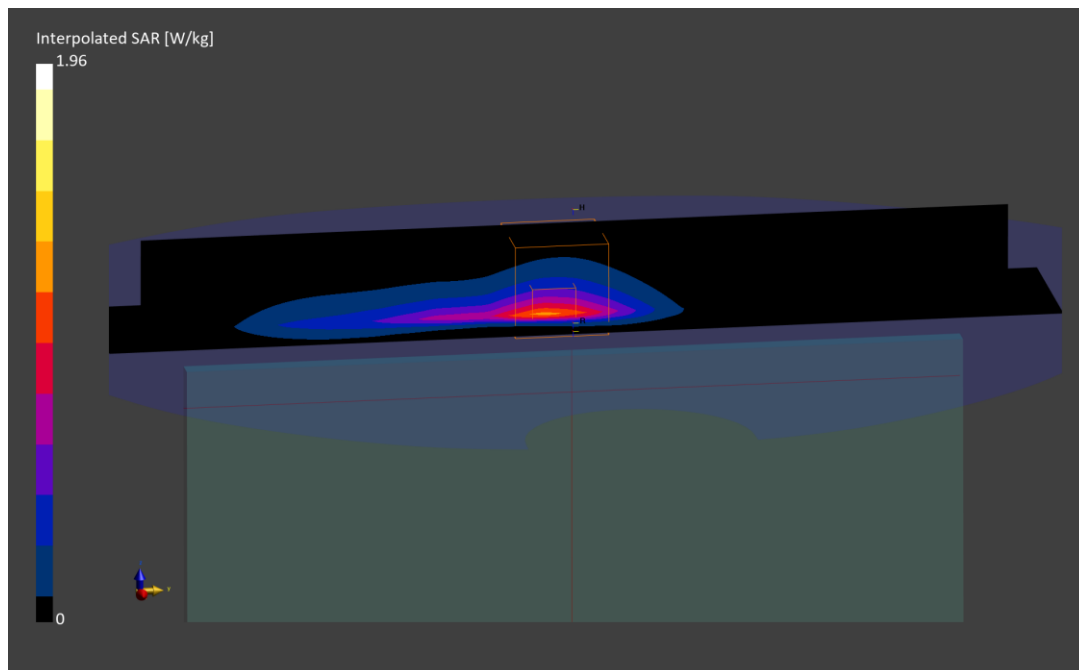

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 0JPKX

Communication System: UID:10773 - AAF, CW; MAIA: Y; Frequency: 1882.500 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1882.500$ MHz; $\text{cond} = 1.43$ S/m; $\text{perm} = 38.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 01/07/2026; Ambient Temp: 20.1°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7421; ConvF:(7.23,8.16,7.63); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn604; Calibrated: 2025-03-06

Phantom: Twin-SAM V8.0; Serial: 1917

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n25, Antenna 2b, Exp: Body| Bottom Edge, Ch. 376500,
40 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 210.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (28.0 x 200.0 x 22.9): Measurement grid: $\text{dx}=4.0$ mm, $\text{dy}=4.0$ mm, $\text{dz}=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.68 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 0.925 W/kg

Smallest distance from peaks to all points 3 dB below is 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

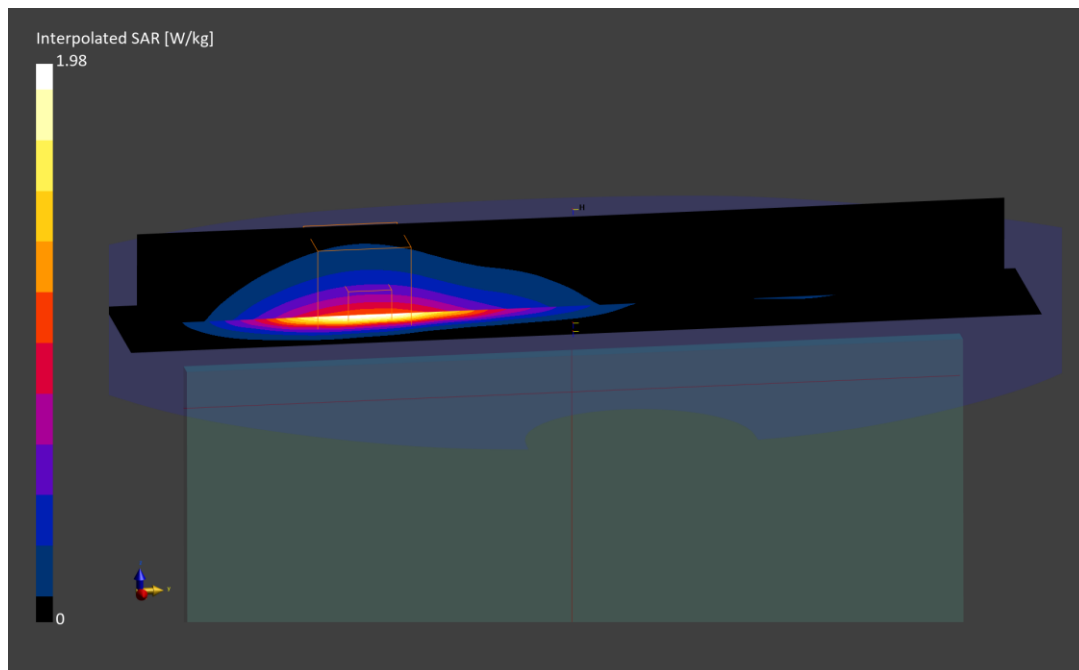

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: XXXX1

Communication System: UID:10945 - AAD, 5G NR FR1 FDD; MAIA: Y; Frequency: 2310.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2310.000$ MHz; $\text{cond} = 1.61$ S/m; $\text{perm} = 40.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 1/9/2026; Ambient Temp: 20.0°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7416; ConvF:(6.98,7.27,7.02); Calibrated: 2025-05-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn701; Calibrated: 2025-05-09

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n30, Antenna 2b, Exp: Body| Bottom Edge, Ch. 462000,
10 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 0 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 208.0 x 31.2): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.88 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.886 W/kg

Smallest distance from peaks to all points 3 dB below is 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

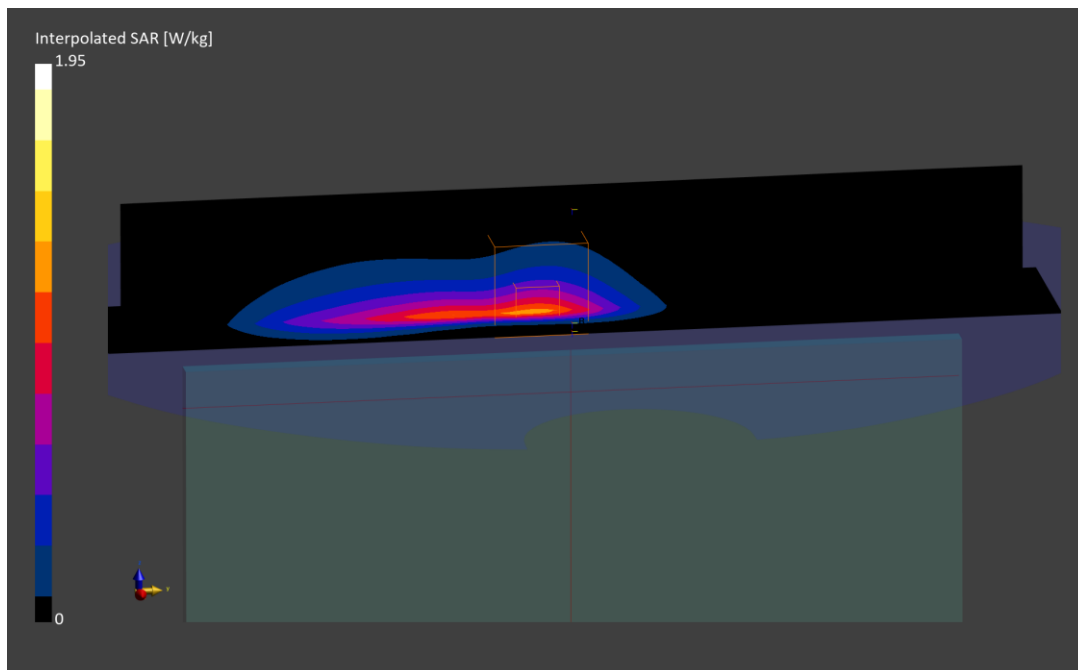

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: F76L1

Communication System: UID:10934 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 2535.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2535.000$ MHz; $\text{cond} = 1.91$ S/m; $\text{perm} = 37.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 01/10/2026; Ambient Temp: 20.1°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7420; ConvF:(7.24,6.64,7.5); Calibrated: 2025-10-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2025-10-14

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n7, Antenna 2b, Exp: Body| Bottom Edge, Ch. 507000,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 214 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 208.0 x 22.9): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 1.16 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 0.994 W/kg

Smallest distance from peaks to all points 3 dB below is 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

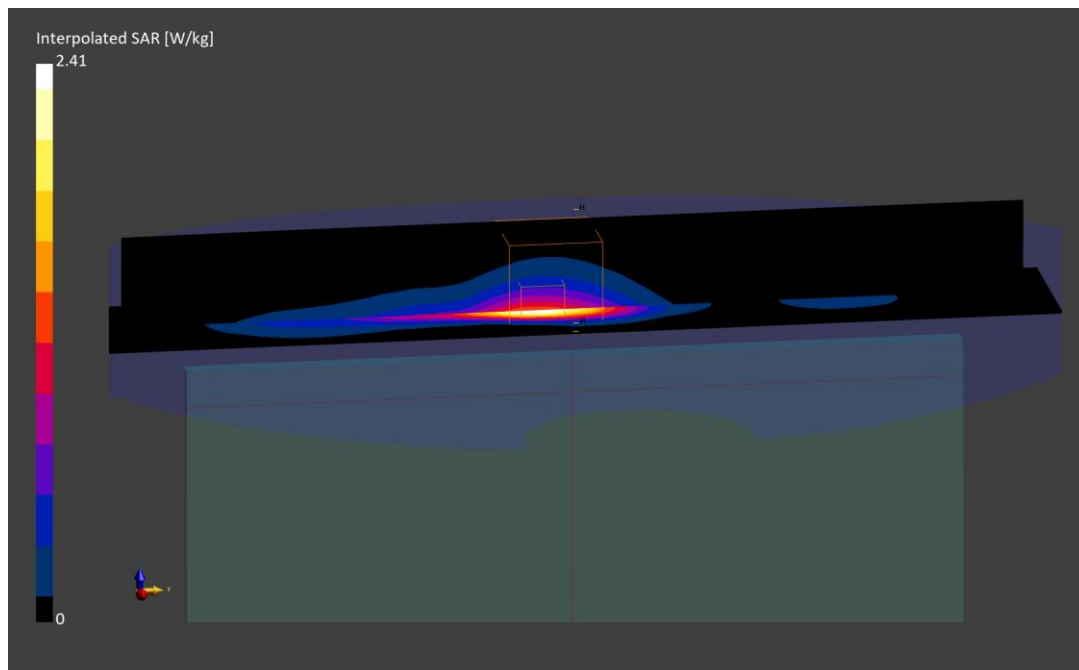

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: XXXX1

Communication System: UID:10866 - AAF, 5G NR FR1 TDD; MAIA: Y; Frequency: 2592.990 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2592.990$ MHz; $\text{cond} = 1.97$ S/m; $\text{perm} = 37.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 01/10/2026; Ambient Temp: 20.1°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7420; ConvF:(7.24,6.64,7.5); Calibrated: 2025-10-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2025-10-14

Phantom: Twin-SAM V8.0; Serial: 2067

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n41, Antenna 2b, Exp: Body| Bottom Edge, Ch. 518598,
100 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 137 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 208.0 x 22.9): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 1.17 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.44 W/kg

SAR(1 g) = 1.03 W/kg

Smallest distance from peaks to all points 3 dB below is 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

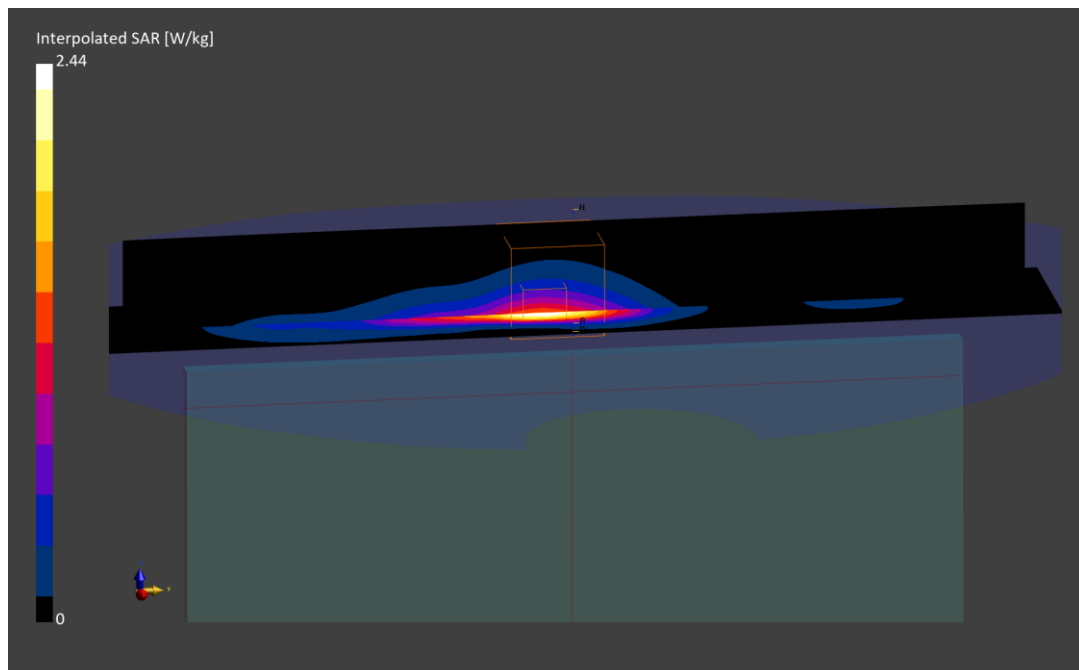

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: PNYJW

Communication System: UID:10117 - CAE, WLAN; MAIA: Y; Frequency: 5270.000 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5270.000$ MHz; $\text{cond} = 4.61$ S/m; $\text{perm} = 36.6$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 01/05/2026; Ambient Temp: 20.1°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7668; ConvF:(5.25,5.33,5.09); Calibrated: 2025-08-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2025-08-08
Phantom: Twin-SAM V8.0; Serial: 2027
Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 5 GHz WIFI/ IEEE 802.11n, Antenna 1b, 40 MHz Bandwidth, U-NII-2A, Exp: Body|
Bottom Edge, Ch. 54, 13.5 Mbps**

Area Scan (40.0 x 220.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=10.0$ mm

Zoom Scan (28.0 x 200.0 x 22.9): Measurement grid: $\text{dx}=4.0$ mm, $\text{dy}=4.0$ mm, $\text{dz}=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.67 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.95 W/kg

SAR(1 g) = 0.884 W/kg

Smallest distance from peaks to all points 3 dB below is 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 62.1 %

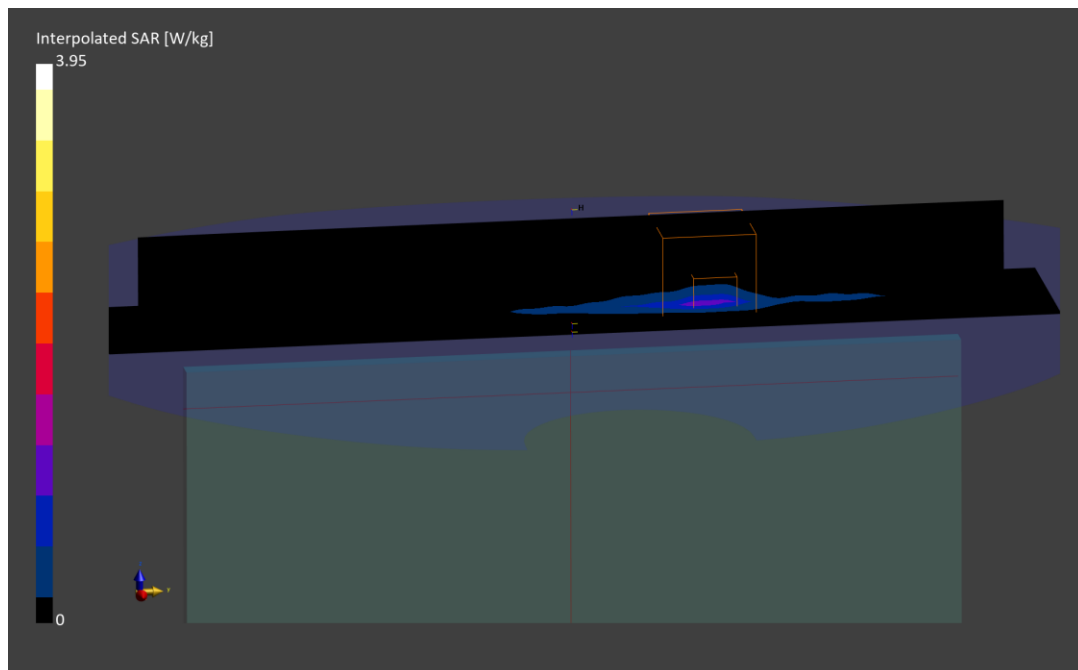

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: 5R2JL

Communication System: UID:10755 - AAC, WLAN; MAIA: Y; Frequency: 6665.000 MHz

Medium: 6000 Head; Medium parameters used:

$f = 6665.000$ MHz; $\text{cond} = 6.08$ S/m; $\text{perm} = 34.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 01/09/2026; Ambient Temp: 20.3°C; Tissue Temp: 19.6°C

Probe: EX3DV4 - SN3837; ConvF:(5.38,5.14,5.25); Calibrated: 2025-08-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2025-08-06

Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1275

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 6 GHz WIFI/ IEEE 802.11ax, Antenna 1b, 160 MHz Bandwidth, U-NII-7, Exp: Tablet|
Bottom Edge, Ch. 143, 68.1 Mbps**

Area Scan (40.0 x 221.0): Measurement grid: $dx=5.0$ mm, $dy=8.5$ mm

Zoom Scan (28.0 x 200.0 x 22.9): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.26 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.98 W/kg

SAR(1 g) = 0.343 W/kg; APD(4cm²) = 2.08 W/m²

Smallest distance from peaks to all points 3 dB below is 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.9 %

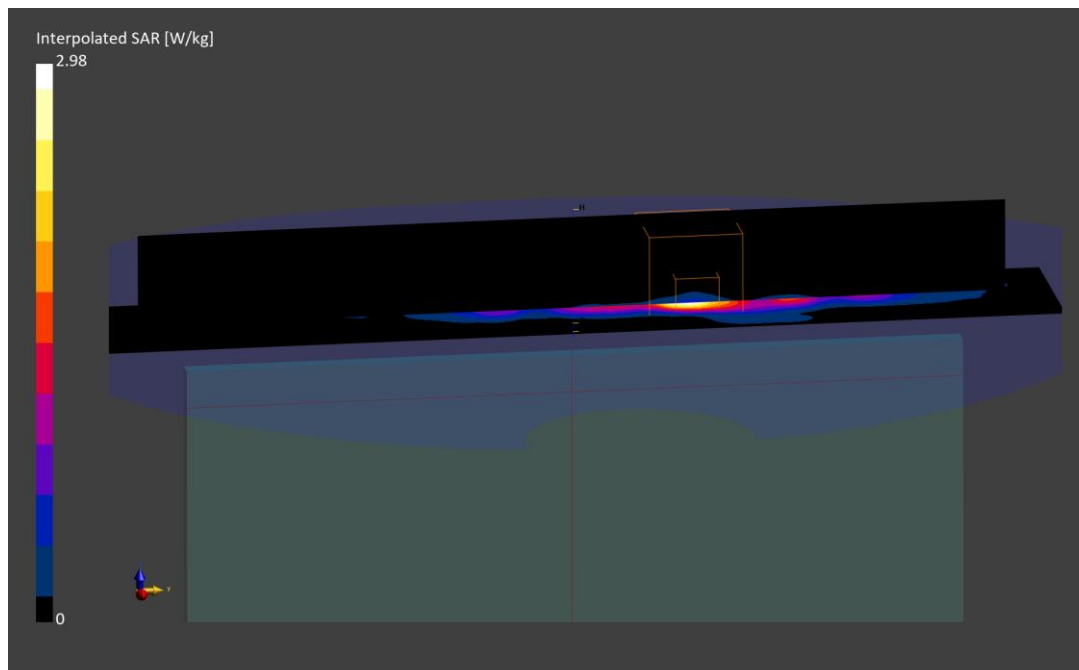

ELEMENT

DUT: BCGA3460; Type: Tablet Device; Serial: X4DW7

Communication System: UID:10032 - CAA, CW; MAIA: Y; Frequency: 5733.000 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5733.000$ MHz; $\text{cond} = 5.13$ S/m; $\text{perm} = 35.7$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 01/05/2026; Ambient Temp: 20.1°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7668; ConvF:(4.84,4.91,4.69); Calibrated: 2025-08-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2025-08-08
Phantom: Twin-SAM V8.0; Serial: 2027
Measurement SW: DASY Module SAR V16.4.0.5005

Mode: NB U-NII 3, Antenna 1b, Exp: Body| Bottom Edge, Ch. Low, 1 Mbps

Area Scan (40.0 x 220.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=10.0$ mm

Zoom Scan (28.0 x 200.0 x 22.9): Measurement grid: $\text{dx}=4.0$ mm, $\text{dy}=4.0$ mm, $\text{dz}=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.49 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.38 W/kg

SAR(1 g) = 0.669 W/kg

Smallest distance from peaks to all points 3 dB below is 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.1 %

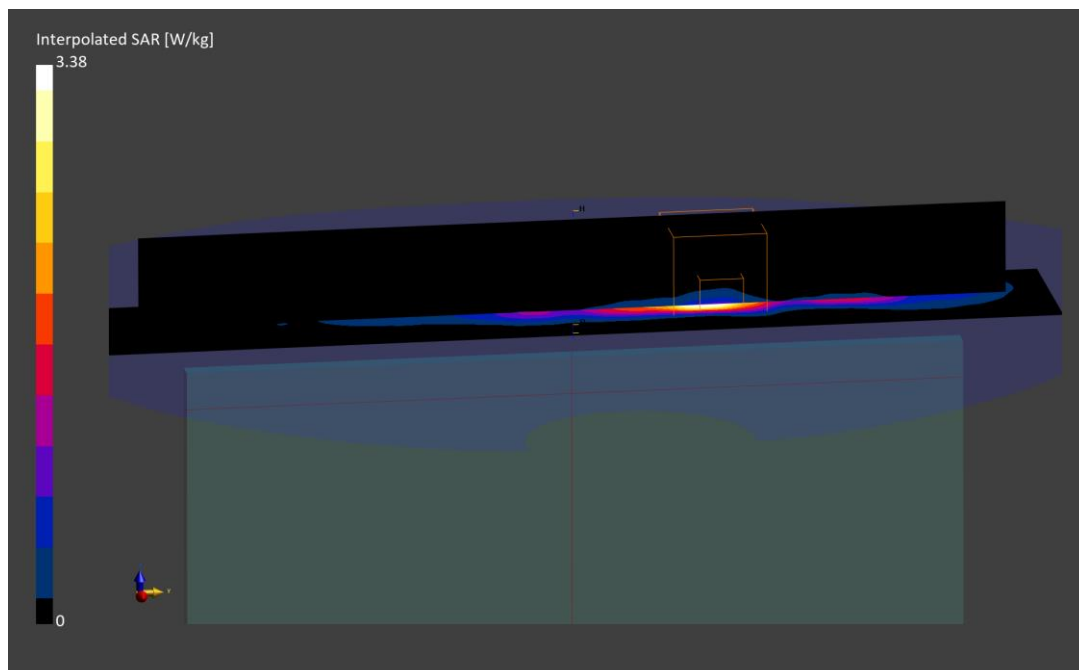

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: LTE Band 25, Antenna 2b, Exp: Body| Bottom Edge, Ch. High,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1905.000 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1905.000$ MHz; $\text{cond} = 1.45$ S/m; $\text{perm} = 38.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Mode: 5 GHz WIFI/ IEEE 802.11n, Antenna 1b, 40 MHz Bandwidth, U-NII-2A, Exp: Body|
Bottom Edge, Ch. 54, 13.5 Mbps**

Communication System: UID:10117 - CAE, WLAN; MAIA: Y; Frequency: 5270.000 MHz


Medium: 5200-5800 Head; Medium parameters used:

$f = 5270.000$ MHz; $\text{cond} = 4.61$ S/m; $\text{perm} = 36.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.03 W/kg

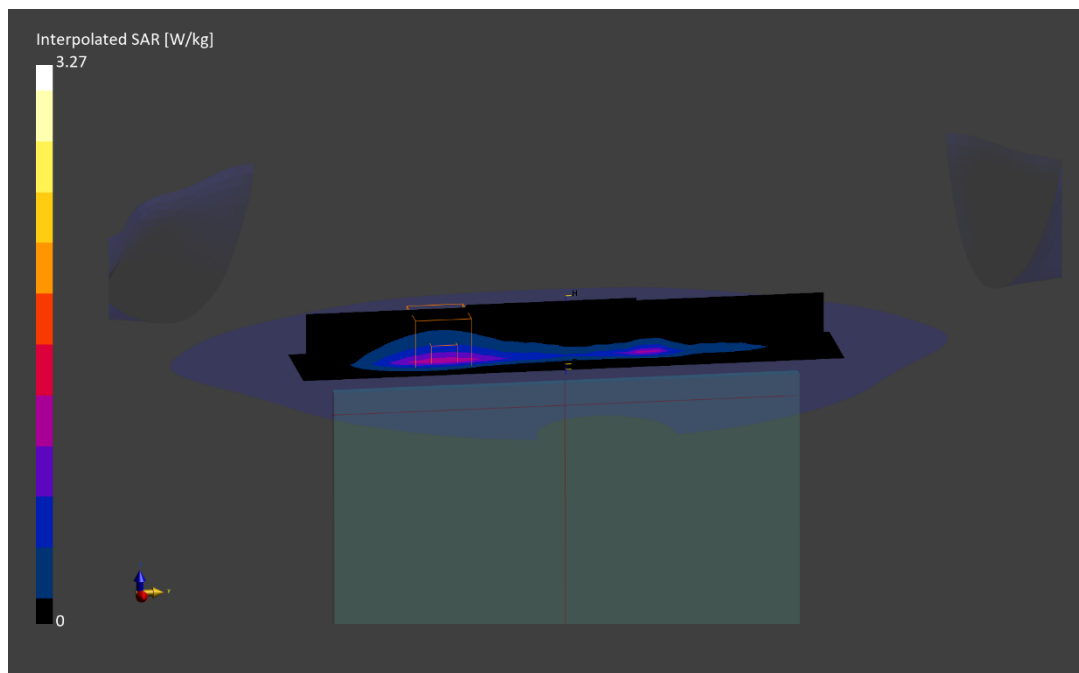

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: LTE Band 30, Antenna 2b, Exp: Body| Bottom Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Communication System: UID:10108 - CAH, LTE-FDD; MAIA: Y; Frequency: 2310.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2310.000$ MHz; $\text{cond} = 1.61$ S/m; $\text{perm} = 40.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Mode: 5 GHz WIFI/ IEEE 802.11n, Antenna 1b, 40 MHz Bandwidth, U-NII-2A, Exp: Body|
Bottom Edge, Ch. 54, 13.5 Mbps**

Communication System: UID:10117 - CAE, WLAN; MAIA: Y; Frequency: 5270.000 MHz


Medium: 5200-5800 Head; Medium parameters used:

$f = 5270.000$ MHz; $\text{cond} = 4.61$ S/m; $\text{perm} = 36.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.27 W/kg

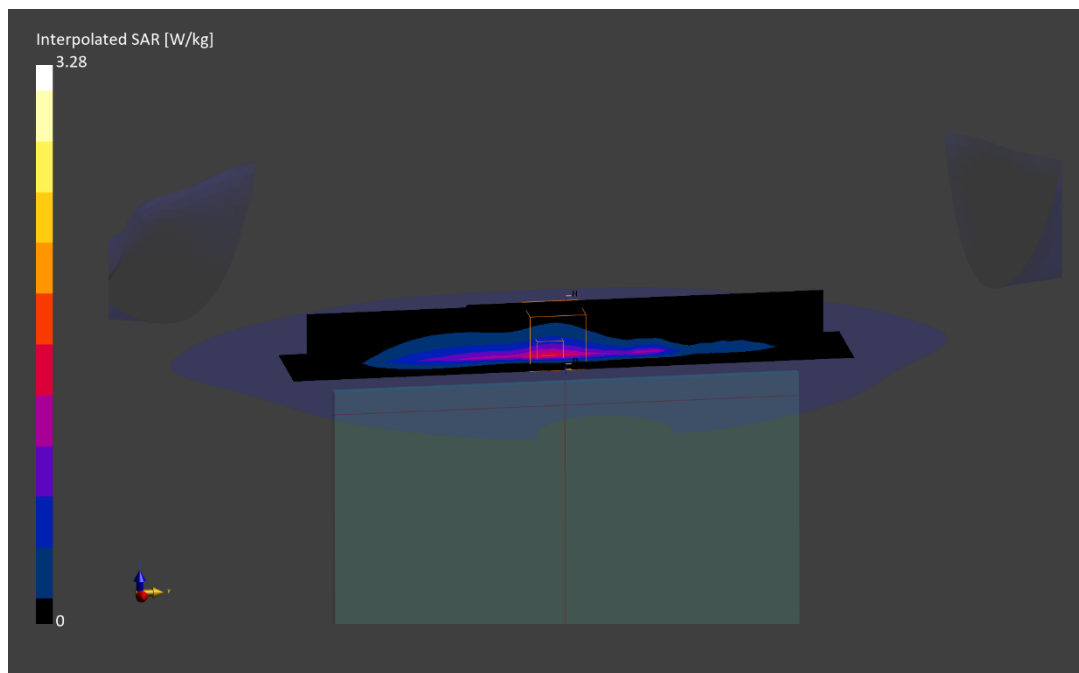

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: LTE Band 30, Antenna 2b, Exp: Body| Bottom Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Communication System: UID:10108 - CAH, LTE-FDD; MAIA: Y; Frequency: 2310.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2310.000$ MHz; $\text{cond} = 1.61$ S/m; $\text{perm} = 40.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Mode: 6 GHz WIFI/ IEEE 802.11ax, Antenna 1b, 160 MHz Bandwidth, U-NII-7, Exp: Tablet|
Bottom Edge, Ch. 143, 68.1 Mbps**


Communication System: UID:10755 - AAC, WLAN; MAIA: Y; Frequency: 6665.000 MHz

Medium: 6000 Head; Medium parameters used:

$f = 6665.000$ MHz; $\text{cond} = 6.08$ S/m; $\text{perm} = 34.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Multi-Band Result:
SAR(1 g) = 1.11 W/kg**

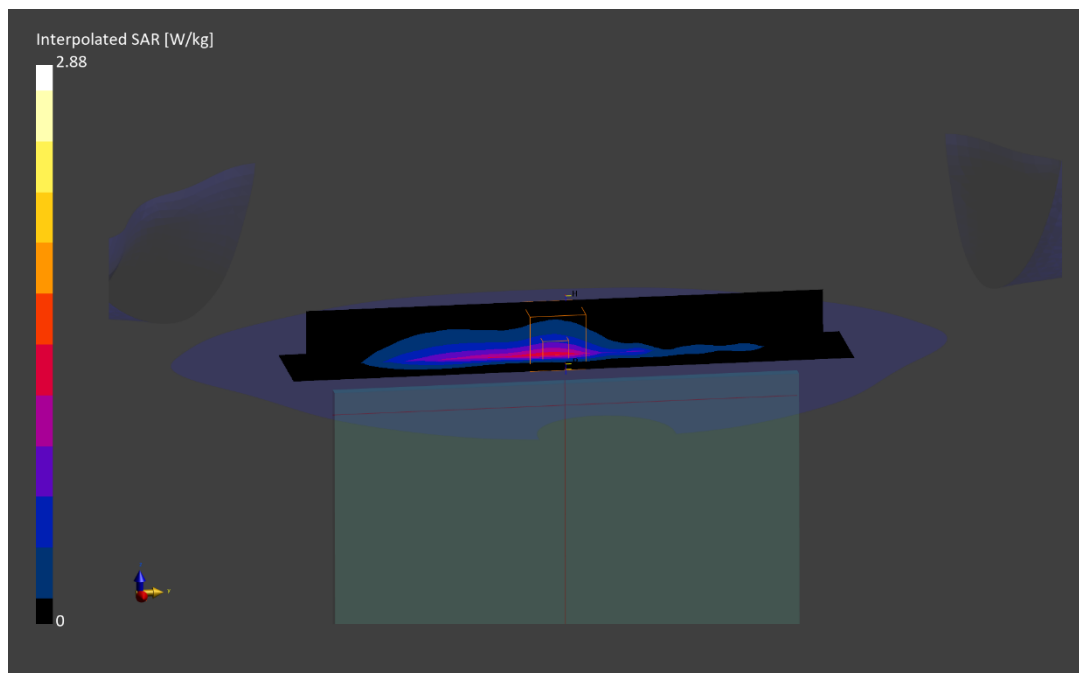

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: LTE Band 30, Antenna 2b, Exp: Body| Bottom Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Communication System: UID:10108 - CAH, LTE-FDD; MAIA: Y; Frequency: 2310.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2310.000$ MHz; $\text{cond} = 1.61$ S/m; $\text{perm} = 40.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Mode: NB U-NII 3, Antenna 1b, Exp: Body| Bottom Edge, Ch. Low, 1 Mbps

Communication System: UID:10032 - CAA, CW; MAIA: Y; Frequency: 5733.000 MHz


Medium: 5200-5800 Head; Medium parameters used:

$f = 5733.000$ MHz; $\text{cond} = 5.13$ S/m; $\text{perm} = 35.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.18 W/kg

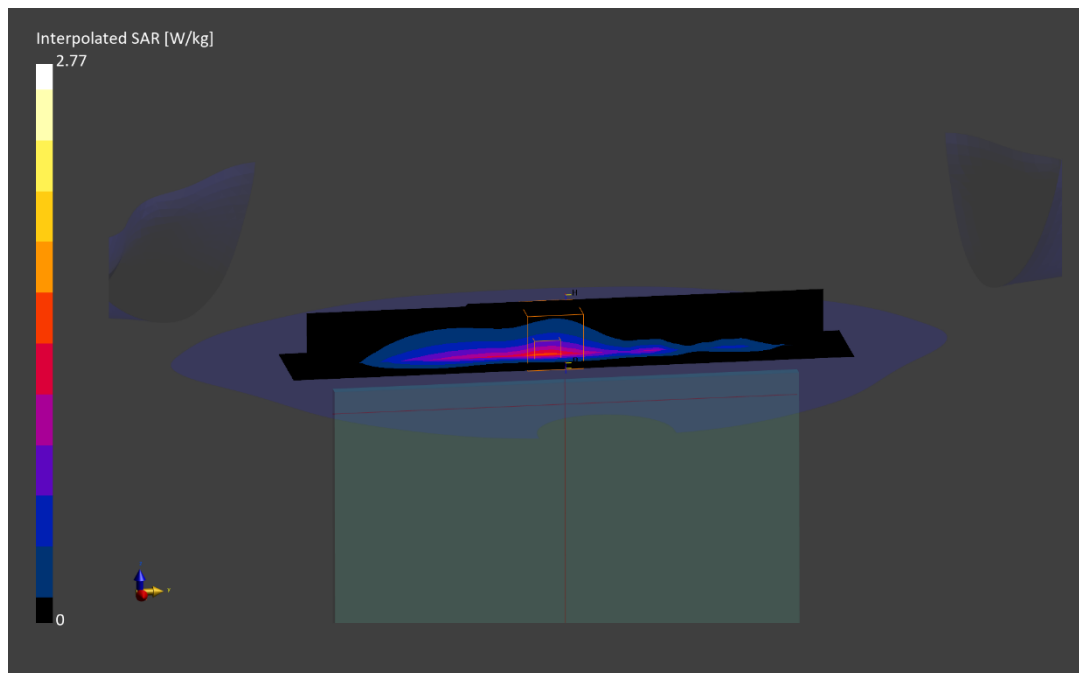

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: LTE Band 7, Antenna 2b, Exp: Body| Bottom Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 2535.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2535.000$ MHz; $\text{cond} = 1.97$ S/m; $\text{perm} = 38.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Mode: 5 GHz WIFI/ IEEE 802.11n, Antenna 1b, 40 MHz Bandwidth, U-NII-2A, Exp: Body|
Bottom Edge, Ch. 54, 13.5 Mbps**


Communication System: UID:10117 - CAE, WLAN; MAIA: Y; Frequency: 5270.000 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5270.000$ MHz; $\text{cond} = 4.61$ S/m; $\text{perm} = 36.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Multi-Band Result:
SAR(1 g) = 1.18 W/kg**

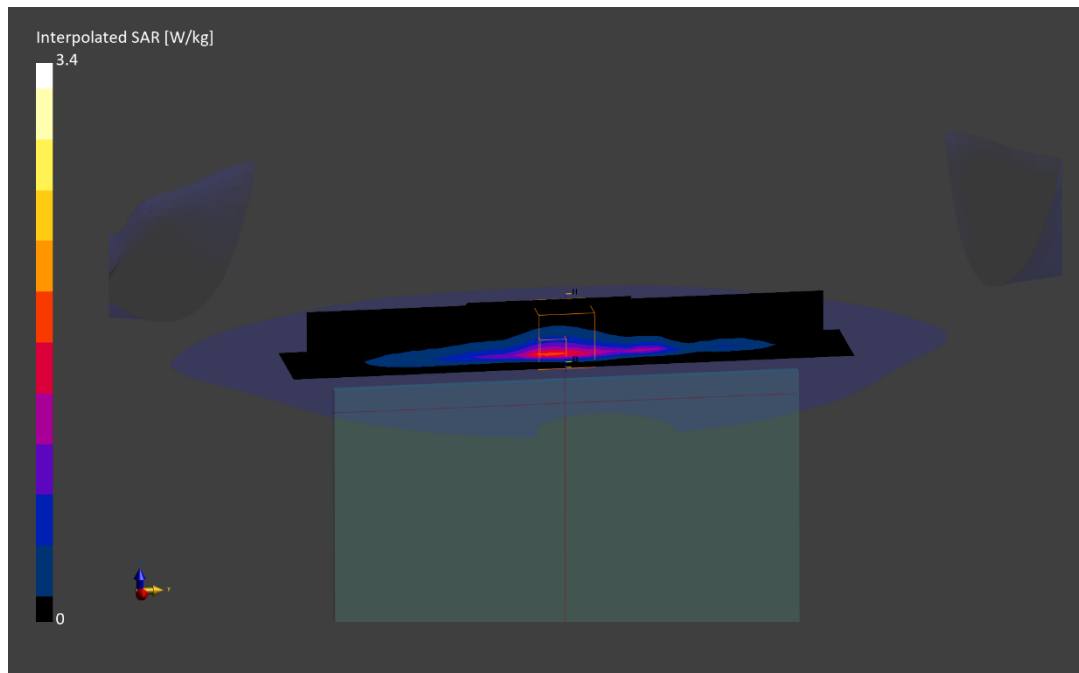

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: LTE Band 7, Antenna 2b, Exp: Body| Bottom Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 2535.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2535.000$ MHz; $\text{cond} = 1.97$ S/m; $\text{perm} = 38.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Mode: 6 GHz WIFI/ IEEE 802.11ax, Antenna 1b, 160 MHz Bandwidth, U-NII-7, Exp: Tablet|
Bottom Edge, Ch. 143, 68.1 Mbps**

Communication System: UID:10755 - AAC, WLAN; MAIA: Y; Frequency: 6665.000 MHz


Medium: 6000 Head; Medium parameters used:

$f = 6665.000$ MHz; $\text{cond} = 6.08$ S/m; $\text{perm} = 34.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.23 W/kg

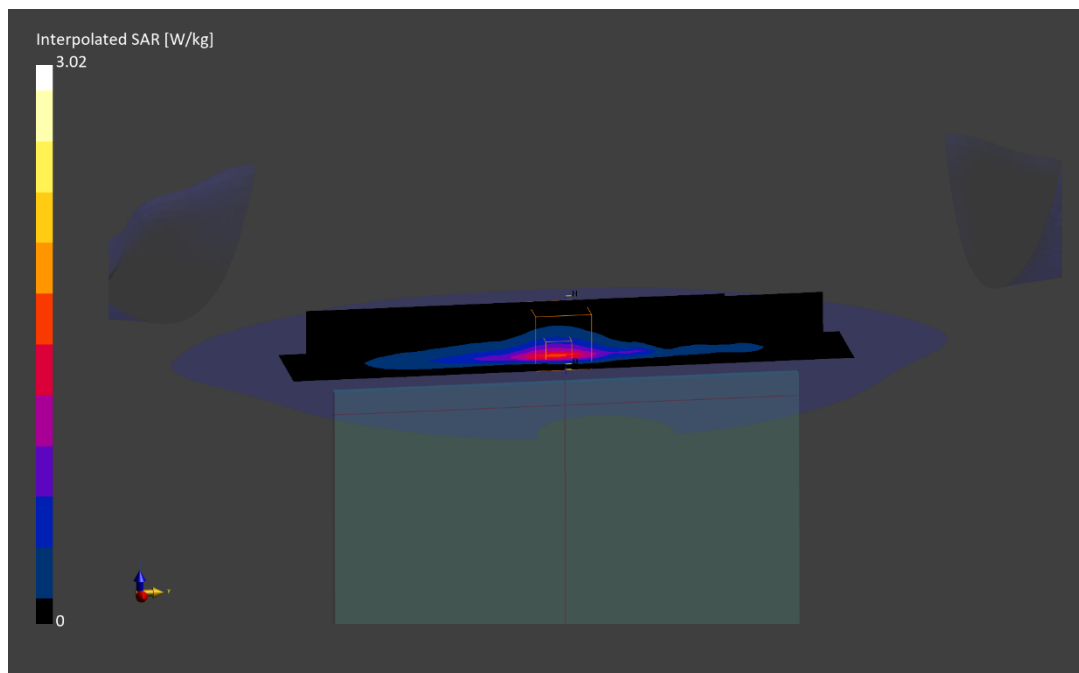

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: LTE Band 7, Antenna 2b, Exp: Body| Bottom Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 2535.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2535.000$ MHz; $\text{cond} = 1.97$ S/m; $\text{perm} = 38.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Mode: NB U-NII 3, Antenna 1b, Exp: Body| Bottom Edge, Ch. Low, 1 Mbps

Communication System: UID:10032 - CAA, CW; MAIA: Y; Frequency: 5733.000 MHz


Medium: 5200-5800 Head; Medium parameters used:

$f = 5733.000$ MHz; $\text{cond} = 5.13$ S/m; $\text{perm} = 35.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.27 W/kg

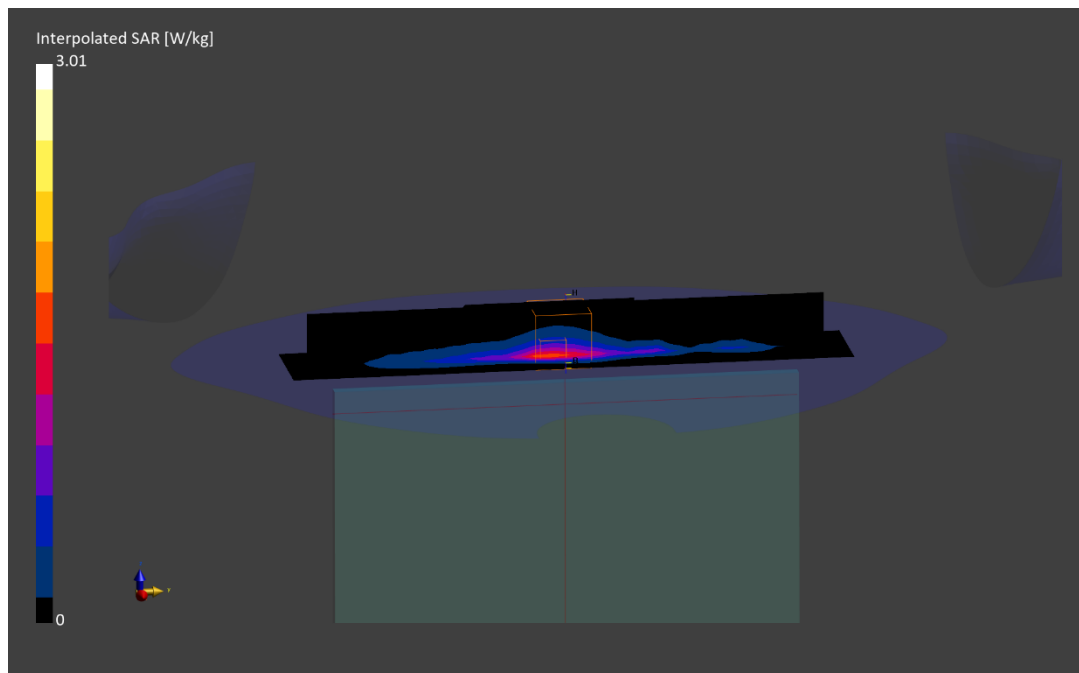

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: LTE Band 41, Antenna 2b, Exp: Body| Bottom Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Communication System: UID:10435 - AAG, LTE-TDD; MAIA: Y; Frequency: 2593.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2593.000$ MHz; $\text{cond} = 2.04$ S/m; $\text{perm} = 38.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

**Mode: 5 GHz WIFI/ IEEE 802.11n, Antenna 1b, 40 MHz Bandwidth, U-NII-2A, Exp: Body|
Bottom Edge, Ch. 54, 13.5 Mbps**

Communication System: UID:10117 - CAE, WLAN; MAIA: Y; Frequency: 5270.000 MHz


Medium: 5200-5800 Head; Medium parameters used:

$f = 5270.000$ MHz; $\text{cond} = 4.61$ S/m; $\text{perm} = 36.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.13 W/kg

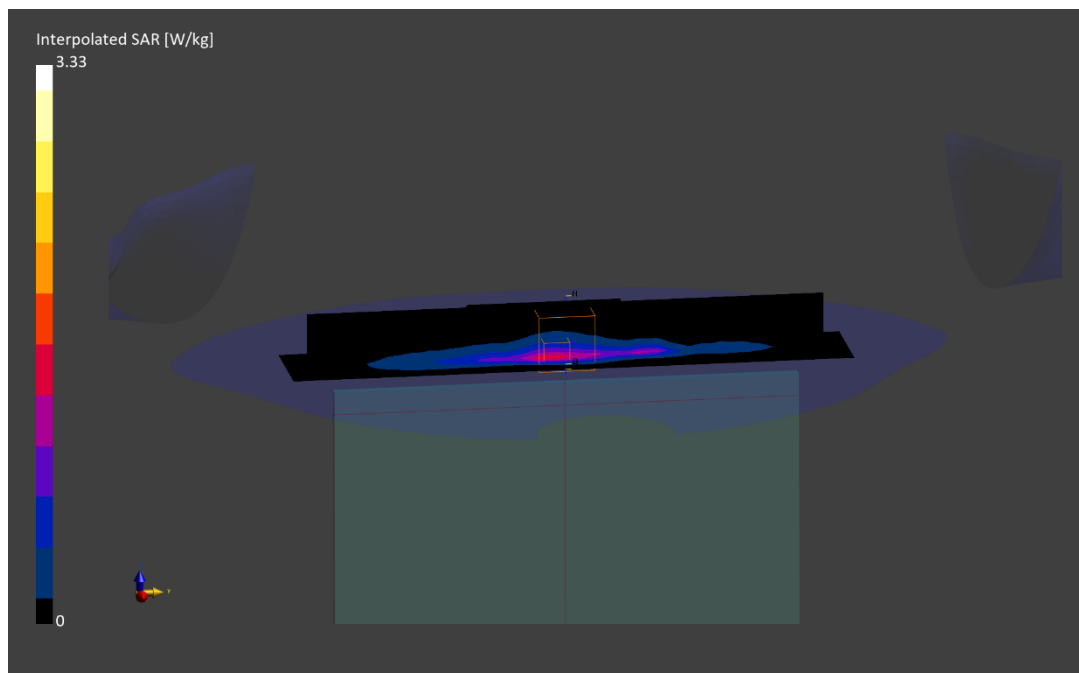

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: LTE Band 41, Antenna 2b, Exp: Body| Bottom Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Communication System: UID:10435 - AAG, LTE-TDD; MAIA: Y; Frequency: 2593.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2593.000$ MHz; $\text{cond} = 2.04$ S/m; $\text{perm} = 38.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

**Mode: 6 GHz WIFI/ IEEE 802.11ax, Antenna 1b, 160 MHz Bandwidth, U-NII-7, Exp: Tablet|
Bottom Edge, Ch. 143, 68.1 Mbps**


Communication System: UID:10755 - AAC, WLAN; MAIA: Y; Frequency: 6665.000 MHz

Medium: 6000 Head; Medium parameters used:

$f = 6665.000$ MHz; $\text{cond} = 6.08$ S/m; $\text{perm} = 34.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Multi-Band Result:
SAR(1 g) = 1.05 W/kg**

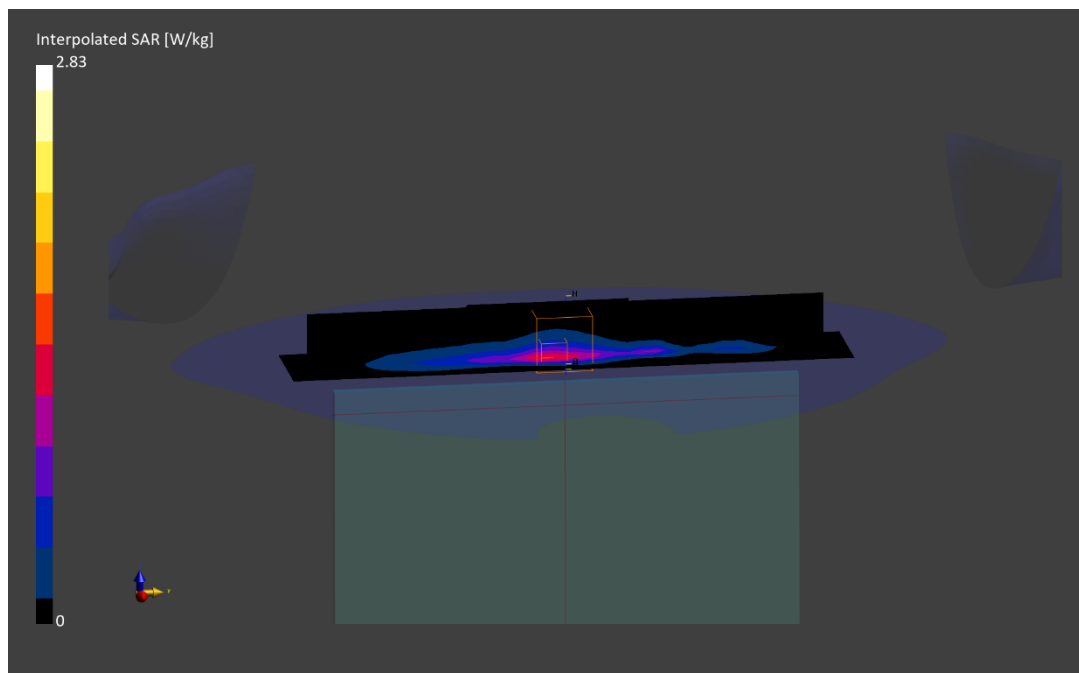

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: LTE Band 41, Antenna 2b, Exp: Body| Bottom Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Communication System: UID:10435 - AAG, LTE-TDD; MAIA: Y; Frequency: 2593.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2593.000$ MHz; $\text{cond} = 2.04$ S/m; $\text{perm} = 38.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Mode: NB U-NII 3, Antenna 1b, Exp: Body| Bottom Edge, Ch. Low, 1 Mbps

Communication System: UID:10032 - CAA, CW; MAIA: Y; Frequency: 5733.000 MHz


Medium: 5200-5800 Head; Medium parameters used:

$f = 5733.000$ MHz; $\text{cond} = 5.13$ S/m; $\text{perm} = 35.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.05 W/kg

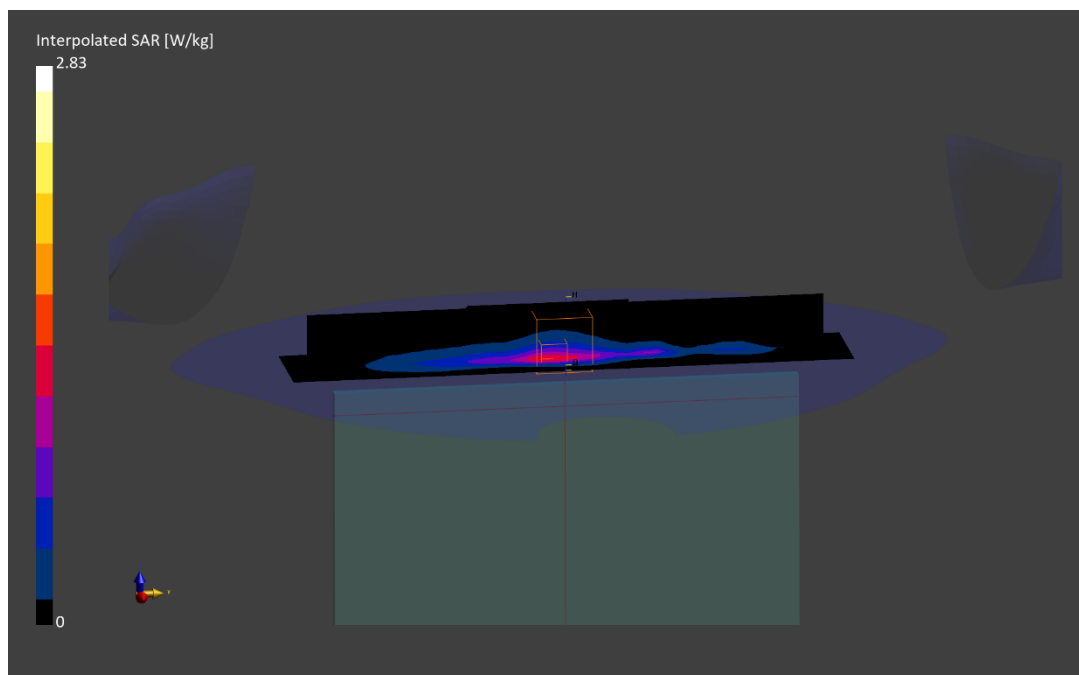

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: NR Band n25, Antenna 2b, Exp: Body| Bottom Edge, Ch. 376500,
40 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Communication System: UID:10773 - AAF, CW; MAIA: Y; Frequency: 1882.500 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1882.500$ MHz; $\text{cond} = 1.43$ S/m; $\text{perm} = 38.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Mode: 5 GHz WIFI/ IEEE 802.11n, Antenna 1b, 40 MHz Bandwidth, U-NII-2A, Exp: Body|
Bottom Edge, Ch. 54, 13.5 Mbps**


Communication System: UID:10117 - CAE, WLAN; MAIA: Y; Frequency: 5270.000 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5270.000$ MHz; $\text{cond} = 4.61$ S/m; $\text{perm} = 36.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Multi-Band Result:
SAR(1 g) = 1.00 W/kg**

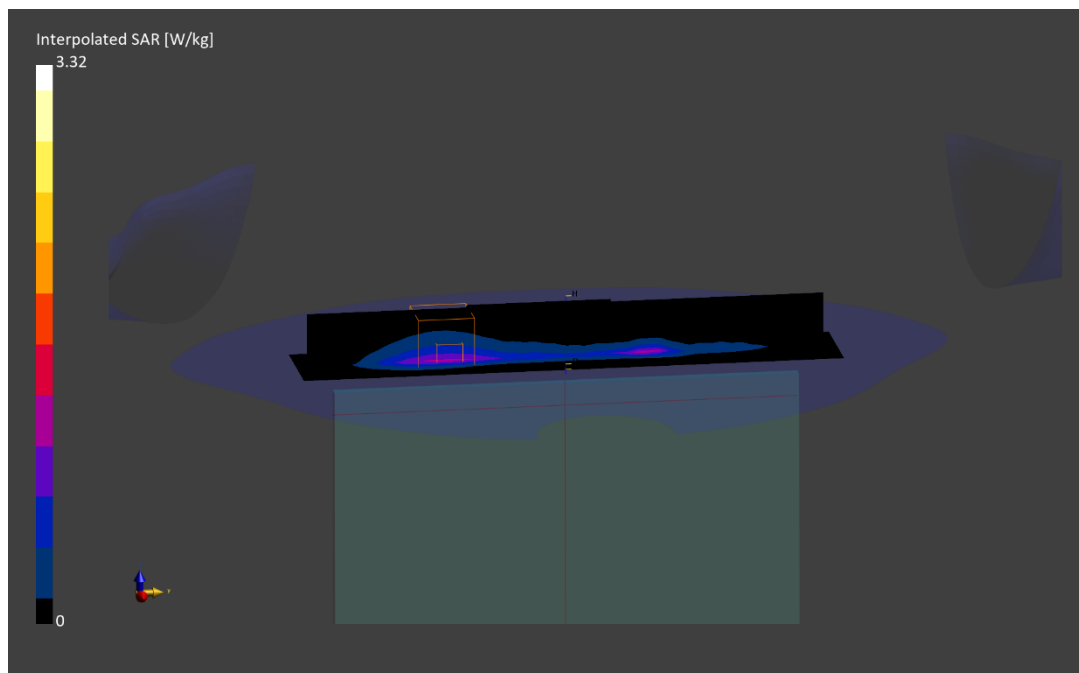

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: NR Band n30, Antenna 2b, Exp: Body| Bottom Edge, Ch. 462000,
10 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 0 RB Offset**

Communication System: UID:10945 - AAD, 5G NR FR1 FDD; MAIA: Y; Frequency: 2310.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2310.000$ MHz; $\text{cond} = 1.61$ S/m; $\text{perm} = 40.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Mode: 5 GHz WIFI/ IEEE 802.11n, Antenna 1b, 40 MHz Bandwidth, U-NII-2A, Exp: Body|
Bottom Edge, Ch. 54, 13.5 Mbps**

Communication System: UID:10117 - CAE, WLAN; MAIA: Y; Frequency: 5270.000 MHz


Medium: 5200-5800 Head; Medium parameters used:

$f = 5270.000$ MHz; $\text{cond} = 4.61$ S/m; $\text{perm} = 36.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.17 W/kg

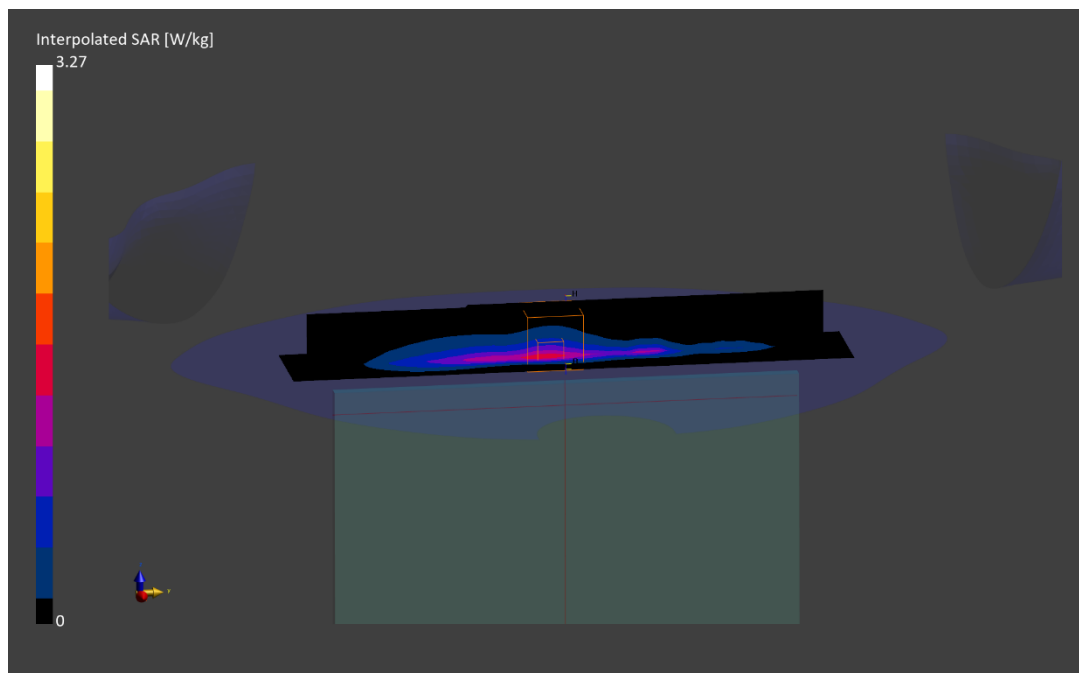

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: NR Band n30, Antenna 2b, Exp: Body| Bottom Edge, Ch. 462000,
10 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 0 RB Offset**

Communication System: UID:10945 - AAD, 5G NR FR1 FDD; MAIA: Y; Frequency: 2310.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2310.000$ MHz; $\text{cond} = 1.61$ S/m; $\text{perm} = 40.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Mode: 6 GHz WIFI/ IEEE 802.11ax, Antenna 1b, 160 MHz Bandwidth, U-NII-7, Exp: Tablet|
Bottom Edge, Ch. 143, 68.1 Mbps**


Communication System: UID:10755 - AAC, WLAN; MAIA: Y; Frequency: 6665.000 MHz

Medium: 6000 Head; Medium parameters used:

$f = 6665.000$ MHz; $\text{cond} = 6.08$ S/m; $\text{perm} = 34.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Multi-Band Result:
SAR(1 g) = 1.02 W/kg**

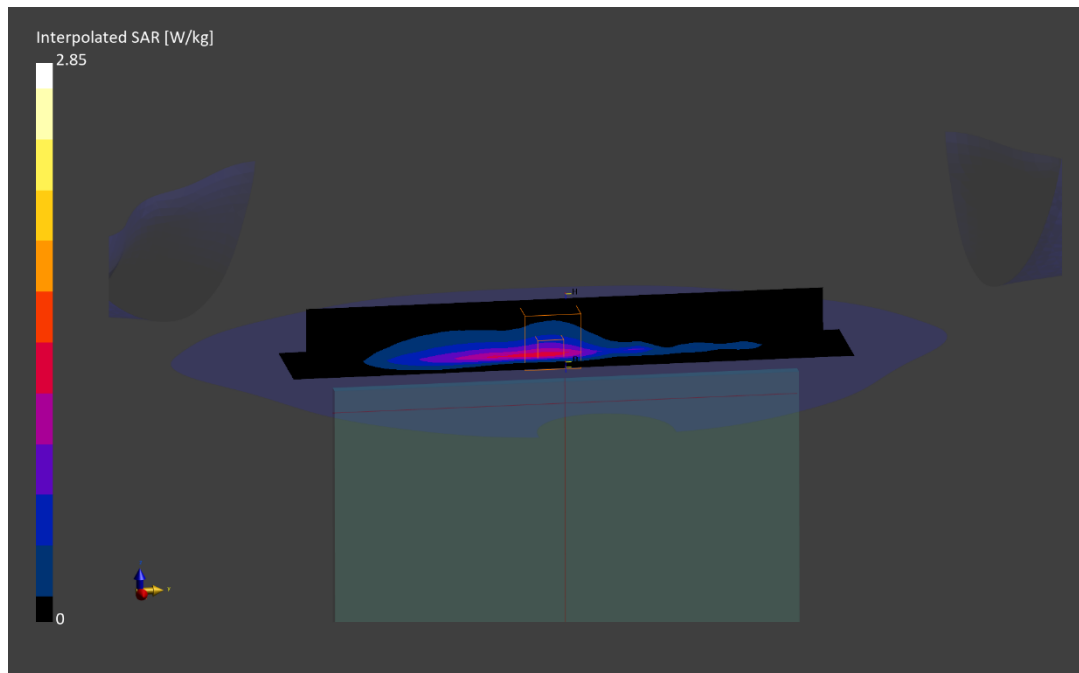

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: NR Band n30, Antenna 2b, Exp: Body| Bottom Edge, Ch. 462000,
10 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 0 RB Offset**

Communication System: UID:10945 - AAD, 5G NR FR1 FDD; MAIA: Y; Frequency: 2310.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2310.000$ MHz; $\text{cond} = 1.61$ S/m; $\text{perm} = 40.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Mode: NB U-NII 3, Antenna 1b, Exp: Body| Bottom Edge, Ch. Low, 1 Mbps

Communication System: UID:10032 - CAA, CW; MAIA: Y; Frequency: 5733.000 MHz


Medium: 5200-5800 Head; Medium parameters used:

$f = 5733.000$ MHz; $\text{cond} = 5.13$ S/m; $\text{perm} = 35.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.10 W/kg

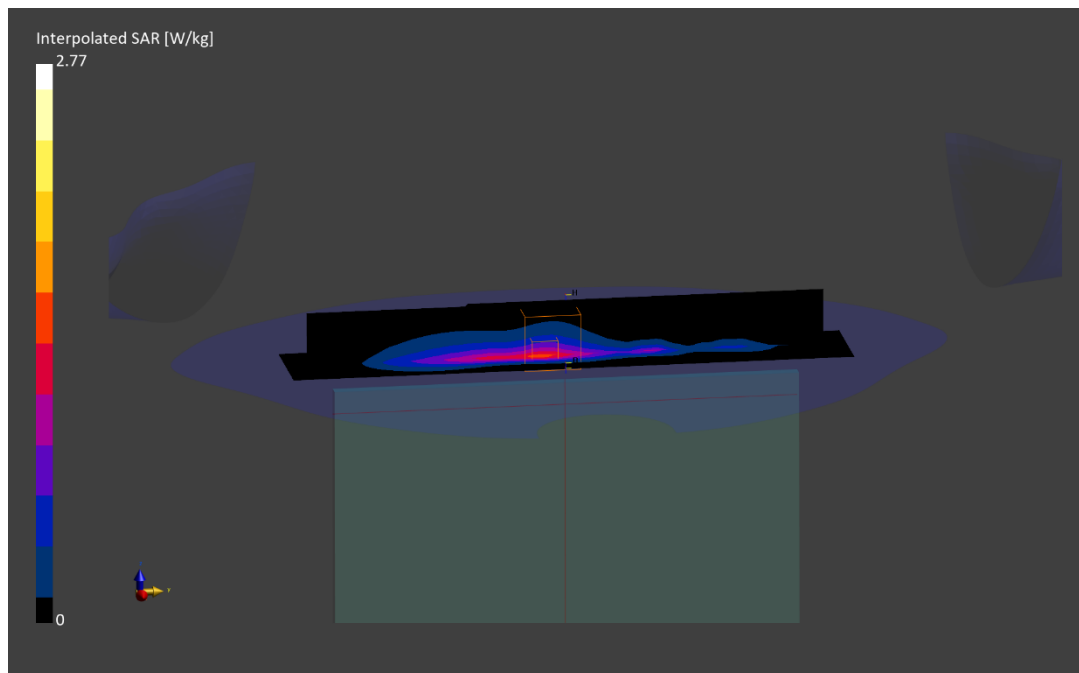

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: NR Band n7, Antenna 2b, Exp: Body| Bottom Edge, Ch. 507000,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 214 RB Offset**

Communication System: UID:10934 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 2535.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2535.000$ MHz; $\text{cond} = 1.91$ S/m; $\text{perm} = 37.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Mode: 5 GHz WIFI/ IEEE 802.11n, Antenna 1b, 40 MHz Bandwidth, U-NII-2A, Exp: Body|
Bottom Edge, Ch. 54, 13.5 Mbps**

Communication System: UID:10117 - CAE, WLAN; MAIA: Y; Frequency: 5270.000 MHz


Medium: 5200-5800 Head; Medium parameters used:

$f = 5270.000$ MHz; $\text{cond} = 4.61$ S/m; $\text{perm} = 36.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.29 W/kg

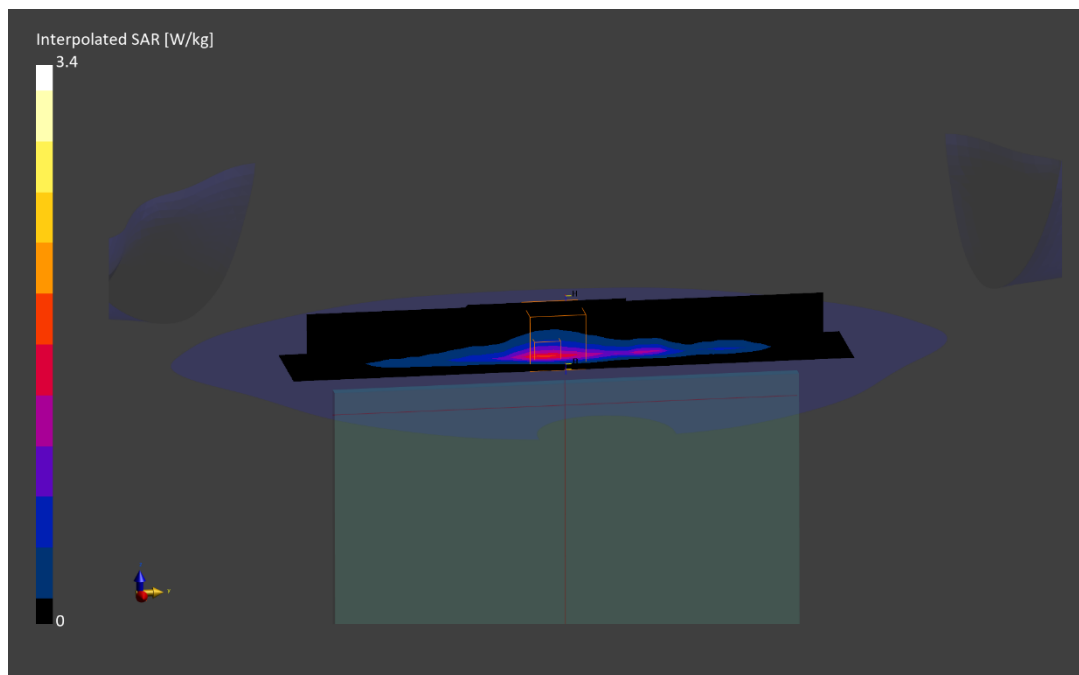

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: NR Band n7, Antenna 2b, Exp: Body| Bottom Edge, Ch. 507000,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 214 RB Offset**

Communication System: UID:10934 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 2535.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2535.000$ MHz; $\text{cond} = 1.91$ S/m; $\text{perm} = 37.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Mode: 6 GHz WIFI/ IEEE 802.11ax, Antenna 1b, 160 MHz Bandwidth, U-NII-7, Exp: Tablet|
Bottom Edge, Ch. 143, 68.1 Mbps**

Communication System: UID:10755 - AAC, WLAN; MAIA: Y; Frequency: 6665.000 MHz


Medium: 6000 Head; Medium parameters used:

$f = 6665.000$ MHz; $\text{cond} = 6.08$ S/m; $\text{perm} = 34.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.13 W/kg

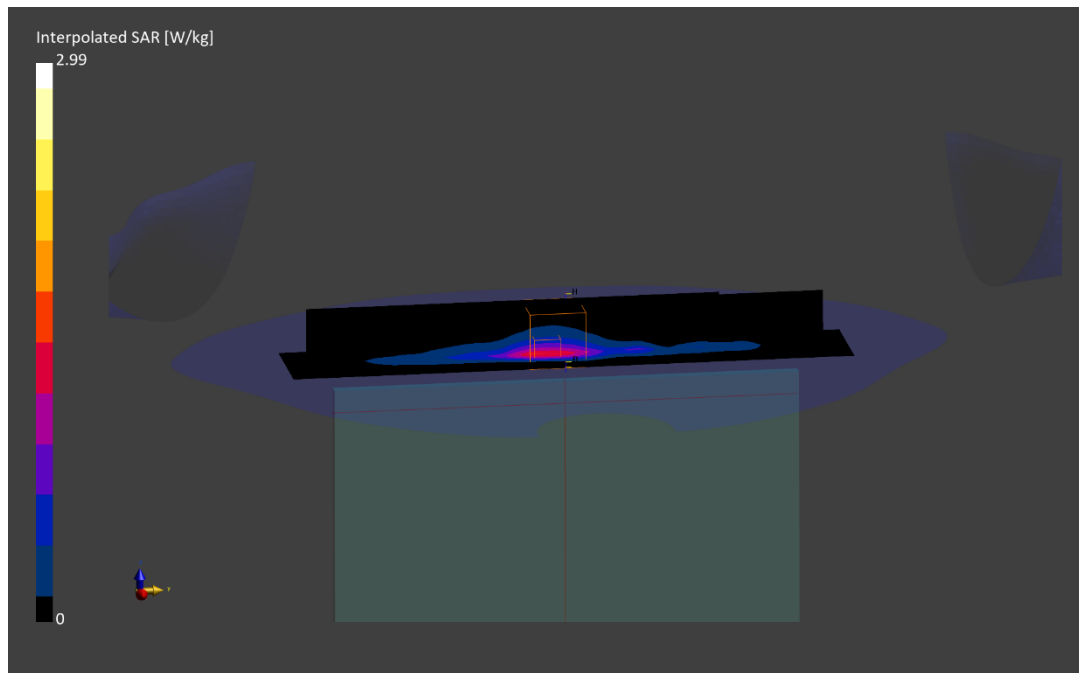

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: NR Band n7, Antenna 2b, Exp: Body| Bottom Edge, Ch. 507000,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 214 RB Offset**

Communication System: UID:10934 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 2535.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2535.000$ MHz; $\text{cond} = 1.91$ S/m; $\text{perm} = 37.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Mode: NB U-NII 3, Antenna 1b, Exp: Body| Bottom Edge, Ch. Low, 1 Mbps

Communication System: UID:10032 - CAA, CW; MAIA: Y; Frequency: 5733.000 MHz


Medium: 5200-5800 Head; Medium parameters used:

$f = 5733.000$ MHz; $\text{cond} = 5.13$ S/m; $\text{perm} = 35.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.20 W/kg

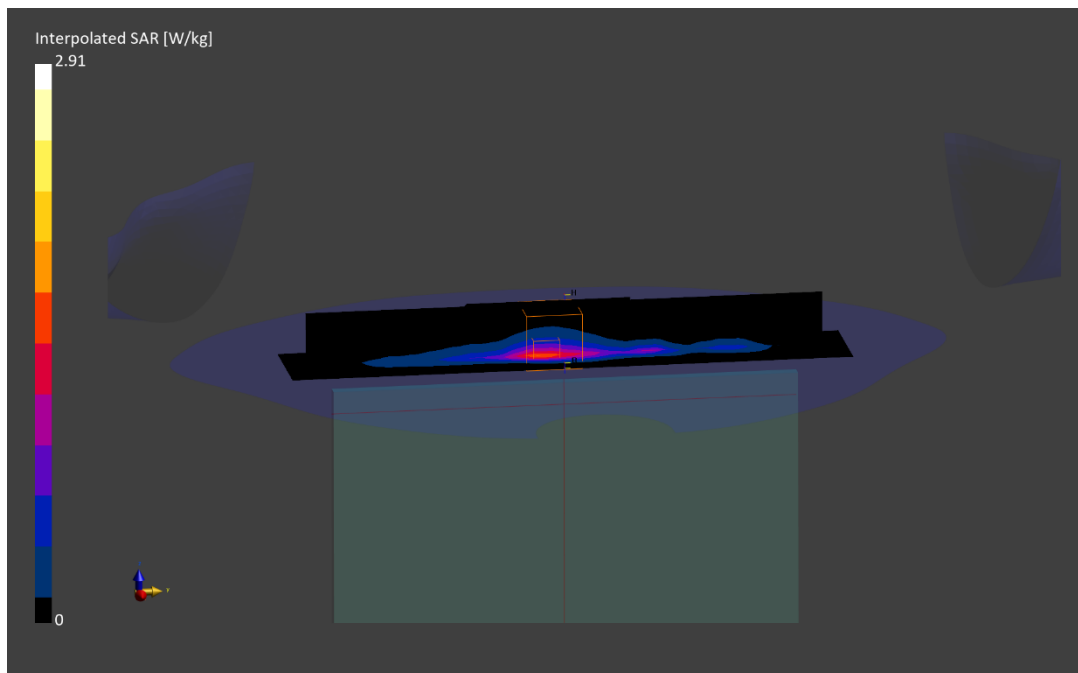

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: NR Band n41, Antenna 2b, Exp: Body| Bottom Edge, Ch. 518598,
100 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 137 RB Offset**

Communication System: UID:10866 - AAF, 5G NR FR1 TDD; MAIA: Y; Frequency: 2592.990 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2592.990$ MHz; $\text{cond} = 1.97$ S/m; $\text{perm} = 37.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Mode: 5 GHz WIFI/ IEEE 802.11n, Antenna 1b, 40 MHz Bandwidth, U-NII-2A, Exp: Body|
Bottom Edge, Ch. 54, 13.5 Mbps**

Communication System: UID:10117 - CAE, WLAN; MAIA: Y; Frequency: 5270.000 MHz


Medium: 5200-5800 Head; Medium parameters used:

$f = 5270.000$ MHz; $\text{cond} = 4.61$ S/m; $\text{perm} = 36.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.30 W/kg

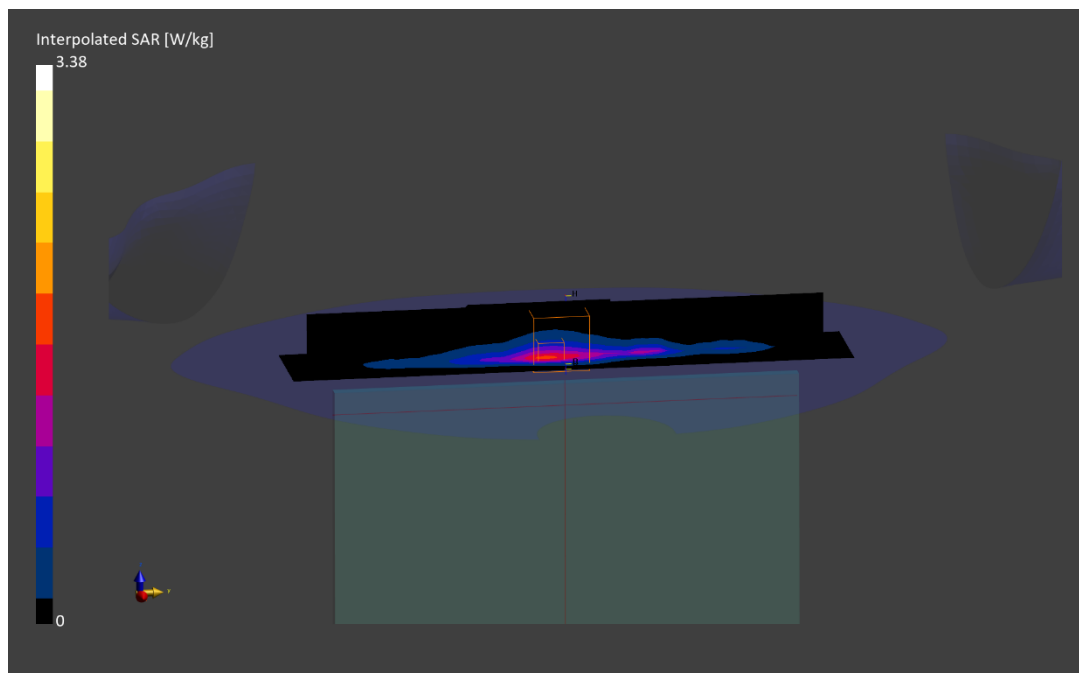

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: NR Band n41, Antenna 2b, Exp: Body| Bottom Edge, Ch. 518598,
100 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 137 RB Offset**

Communication System: UID:10866 - AAF, 5G NR FR1 TDD; MAIA: Y; Frequency: 2592.990 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2592.990$ MHz; $\text{cond} = 1.97$ S/m; $\text{perm} = 37.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

**Mode: 6 GHz WIFI/ IEEE 802.11ax, Antenna 1b, 160 MHz Bandwidth, U-NII-7, Exp: Tablet|
Bottom Edge, Ch. 143, 68.1 Mbps**

Communication System: UID:10755 - AAC, WLAN; MAIA: Y; Frequency: 6665.000 MHz


Medium: 6000 Head; Medium parameters used:

$f = 6665.000$ MHz; $\text{cond} = 6.08$ S/m; $\text{perm} = 34.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.15 W/kg

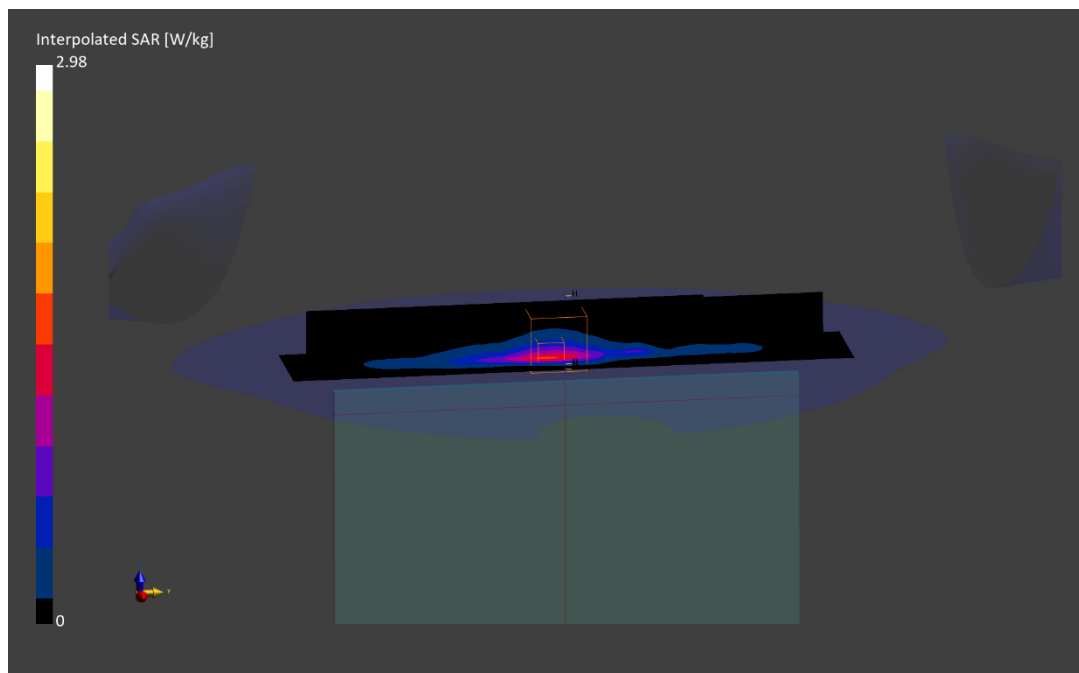

ELEMENT

DUT: BCGA3460; Type: Tablet Device

**Mode: NR Band n41, Antenna 2b, Exp: Body| Bottom Edge, Ch. 518598,
100 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 137 RB Offset**

Communication System: UID:10866 - AAF, 5G NR FR1 TDD; MAIA: Y; Frequency: 2592.990 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2592.990$ MHz; $\text{cond} = 1.97$ S/m; $\text{perm} = 37.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Mode: NB U-NII 3, Antenna 1b, Exp: Body| Bottom Edge, Ch. Low, 1 Mbps

Communication System: UID:10032 - CAA, CW; MAIA: Y; Frequency: 5733.000 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5733.000$ MHz; $\text{cond} = 5.13$ S/m; $\text{perm} = 35.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.23 W/kg

