



TAS CELLULAR VALIDATION REPORT

Applicant Name:
Apple, Inc.
One Apple Park Way
Cupertino, CA, 95014, USA

Date of Testing:
12/05/2025 – 01/17/2026
Test Report Issue Date:
01/28/2026
Test Site/Location:
Element, Morgan Hill, CA, USA
Document Serial No.:
1C2509100080-03.BCG-R2

FCC ID: BCGA3460

APPLICANT: APPLE INC.

DUT Type: Tablet Device
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Model: A3460, A3463
Device Serial Numbers: Pre-Production Samples [WH6YW, CMB7Y, VVHQ1, 27QQ7, 493NW, 3G2JD]

Note: This revised test report supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.



RJ Ortanez
Executive Vice President



FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 1 of 78

© 2026 Element

REV 1.0
05/06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.



Revision Summary

Revision	Description	Issue Date	Revised By
-	Initial Release	01/08/2026	WKRID009831
R1	Addressed Applicant's Comments	01/20/2026	WKRID009831
R2	Addressed Applicant's Comments	01/22/2026	WKRID009831

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 2 of 78

© 2026 Element

REV 1.0
05/06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

TABLE OF CONTENTS

1.	DEVICE UNDER TEST	4
2.	RF EXPOSURE LIMITS	13
3.	VALIDATION TEST CASES	15
4.	FCC MEASUREMENT PROCEDURES	16
5.	DYNAMIC BUDGET VALIDATION	25
6.	MEASUREMENT TEST SETUP	27
7.	TEST CONFIGURATIONS (FREQ < 6GHZ)	31
8.	CONDUCTED TX CASES	33
9.	SYSTEM VERIFICATION	55
10.	SAR TEST RESULTS	58
11.	LINEARITY VALIDATION	66
12.	EQUIPMENT LIST	74
13.	MEASUREMENT UNCERTAINTIES	75
14.	CONCLUSION	76
15.	REFERENCES	77

APPENDIX A: VERIFICATION PLOTS

APPENDIX B: SAR TISSUE SPECIFICATIONS

APPENDIX C: SAR SYSTEM VALDIATION

APPENDIX D: TEST SETUP PHOTOGRAPHS

APPENDIX E: TEST SEQUENCES

APPENDIX F: PROBE AND DIPOLE CALIBRATION CERTIFICATES

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 3 of 78

© 2026 Element

REV 1.0
05/06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1. DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
UMTS 850	Data	826.40 - 846.60 MHz
UMTS 1750	Data	1712.4 - 1752.6 MHz
UMTS 1900	Data	1852.4 - 1907.6 MHz
LTE Band 71	Data	665.5 - 695.5 MHz
LTE Band 12	Data	699.7 - 715.3 MHz
LTE Band 13	Data	779.5 - 784.5 MHz
LTE Band 14	Data	790.5 - 795.5 MHz
LTE Band 26 (Cell)	Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Data	1710.7 - 1779.3 MHz
LTE Band 25 (PCS)	Data	1850.7 - 1914.3 MHz
LTE Band 30	Data	2307.5 - 2312.5 MHz
LTE Band 7	Data	2502.5 - 2567.5 MHz
LTE Band 41	Data	2498.5 - 2687.5 MHz
LTE Band 48	Data	3552.5 - 3697.5 MHz
NR Band n71	Data	665.5 - 695.5 MHz
NR Band n12	Data	701.5 - 713.5 MHz
NR Band n14	Data	790.5 - 795.5 MHz
NR Band n26 (Cell)	Data	816.5 - 846.5 MHz
NR Band n5 (Cell)	Data	826.5 - 846.5 MHz
NR Band n70	Data	1697.5 - 1707.5 MHz
NR Band n66 (AWS)	Data	1712.5 - 1777.5 MHz
NR Band n25 (PCS)	Data	1852.5 - 1912.5 MHz
NR Band n30	Data	2307.5 - 2312.5 MHz
NR Band n7	Data	2502.5 - 2567.5 MHz
NR Band n41	Data	2505.0 - 2685.0 MHz
NR Band n48	Data	3550 - 3700 MHz
NR Band n77 DoD	Data	3460.02 - 3540 MHz
NR Band n77	Data	3710.01 - 3969.99 MHz
2.4 GHz WIFI	Voice/Data	2412 - 2472 MHz
5 GHz WIFI	Voice/Data	U-NII-1: 5180 - 5240 MHz U-NII-2A: 5260 - 5320 MHz U-NII-2C: 5500 - 5720 MHz U-NII-3: 5745 - 5825 MHz
6 GHz WIFI	Voice/Data	U-NII-5: 5935 - 6415 MHz U-NII-6: 6435 - 6515 MHz U-NII-7: 6535 - 6875 MHz U-NII-8: 6895 - 7115 MHz
2.4 GHz Bluetooth	Data	2402 - 2480 MHz
802.15.4	Data	2405 - 2475 MHz
NB U-NII 1	Data	5162 - 5245 MHz
NB U-NII 3	Data	5733 - 5844 MHz
NB U-NII 5	Data	6105 - 6420 MHz
WPT	N/A	13.56 MHz

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 4 of 78

1.2 Key Parameter Description

Operating parameters	Description
P_{limit}	The maximum possible time-averaged power for all device operating states where TAS is supported.
$P_{limit,nom}$	The target time-averaged power, excluding total device uncertainty.
P_{max}	The maximum possible instantaneous power for all device operating states where TAS is supported.
SARDesign Target	The maximum Spatial Peak averaged-SAR value, corresponding to $P_{limit,nom}$.
SARDesign Limit	The maximum Spatial Peak averaged-SAR value, corresponding to P_{limit} .

$P_{limit,nom}$, P_{limit} , and P_{max} values are defined for all antennas, technologies, bands, and operating state combinations supporting TAS on the DUT. The $P_{limit,nom}$ value is defined to ensure the RF exposure is never greater than SARDesign Limit.

1.3 Time-Averaging Algorithm for RF Exposure Compliance

This DUT supports time-averaging with dynamic budgeting for Cellular technologies to control and manage transmitting power, in real time. Consumed SAR from active radios is tracked and stored for the duration of the applicable regulatory averaging window. Rolling time-averaged SAR values are calculated from the consumed SAR reported from active radios. The time-averaged SAR is always maintained less than the applicable SARDesign Limit. Only Cellular technologies implement this dynamic budgeting method. Connectivity technologies (WLAN, BT, NB UNII, 802.15.4) implement an independent TAS algorithm for power and budget control.

The purpose of this document is to demonstrate the validity of the Cellular TAS and Budget Sharing feature.

1.4 Bibliography

Report Type	Report Serial Number
RF Exposure Report	1C2509100080-01.BCG
Time-Averaged SAR Connectivity Validation Report	1C2509100080-02.BCG

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 5 of 78



1.5 Time-Averaging Algorithm for RF Exposure Compliance

The maximum time-averaged output power (dBm) for any WWAN Sub6 technology, band, and device state is the minimum of (“P_{limit,nom}” and “Maximum tune-up output power P_{max,nom}”) + corresponding device uncertainty on the table above. SAR values in this report were scaled to this maximum time-averaged output power to determine compliance per KDB Publication 447498 D01v06.

The tables below define the following parameters (SAR_{target}, SAR Design_{limit}, P_{limit,nom} and P_{max,nom} values) for TAS operations.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 6 of 78

1.5.1 SAR Design Target Calculations

Table 1-1
Antenna 1a

SAR_design_target Calculations			
Mode/Band	1g SAR [W/kg]		
	SAR_design_target	SAR_Design_limit	SAR_regulatory_limit
LTE Band 48	0.91	1.2 W/kg	1.6 W/kg
LTE Band 48 ULCA	0.91		
NR Band n48	0.93		
NR Band n77 DoD (PC3) - [Ch. 633334]	0.93		
NR Band n77 DoD (PC2) - [Ch. 633334]	0.93		
NR Band n77 (PC3) - [Ch. 650000]	0.97		
NR Band n77 (PC2) - [Ch. 650000]	0.97		
NR Band n77 (PC3) - [Ch. 662000]	0.97		
NR Band n77 (PC2) - [Ch. 662000]	0.97		

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 7 of 78

Table 1-2
Antenna 1b

SAR_design_target Calculations			
Mode/Band	1g SAR [W/kg]		
	SAR_design_target	SAR_Design_limit	SAR_regulatory_limit
UMTS 1750	0.99	1.2 W/kg	1.6 W/kg
UMTS 1900	1.02		
LTE Band 4	0.99		
LTE Band 66	0.99		
LTE Band 2	1.02		
LTE Band 25	1.02		
LTE Band 30	0.99		
LTE Band 7	0.93		
LTE Band 7 ULCA	0.93		
LTE Band 41 (PC3)	0.91		
LTE Band 41 (PC3) ULCA	0.91		
LTE Band 41 (PC2)	0.91		
LTE Band 41 (PC2) ULCA	0.91		
NR Band n70	0.97		
NR Band n66	1.04		
NR Band n2	1.02		
NR Band n25	0.99		
NR Band n30	1.02		
NR Band n7	0.91		
NR Band n41 (PC3)	0.81		
NR Band n41 (PC2)	0.81		

Table 1-3
Antenna 2a

SAR_design_target Calculations			
Mode/Band	1g SAR [W/kg]		
	SAR_design_target	SAR_Design_limit	SAR_regulatory_limit
LTE Band 48	0.88	1.2 W/kg	1.6 W/kg
LTE Band 48 ULCA	0.88		
NR Band n48	0.86		
NR Band n77 DoD (PC3) - [Ch. 633334]	0.93		
NR Band n77 DoD (PC2) - [Ch. 633334]	0.93		
NR Band n77 (PC3) - [Ch. 650000]	0.97		
NR Band n77 (PC2) - [Ch. 650000]	0.97		
NR Band n77 (PC3) - [Ch. 662000]	0.93		
NR Band n77 (PC2) - [Ch. 662000]	0.93		
NR Band n77 (PC2) - [Ch. 662000]	0.93		

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 8 of 78

Table 1-4
Antenna 2b

SAR_design_target Calculations			
Mode/Band	1g SAR [W/kg]		
	SAR_design_target	SAR_Design_limit	SAR_regulatory_limit
UMTS 1750	1.02	1.2 W/kg	1.6 W/kg
UMTS 1900	1.02		
LTE Band 4	1.02		
LTE Band 66	1.02		
LTE Band 2	1.02		
LTE Band 25	1.02		
LTE Band 30	0.97		
LTE Band 7	0.93		
LTE Band 7 ULCA	0.93		
LTE Band 41 (PC3)	0.97		
LTE Band 41 (PC3) ULCA	0.97		
LTE Band 41 (PC2)	0.97		
LTE Band 41 (PC2) ULCA	0.97		
NR Band n70	0.97		
NR Band n66	1.02		
NR Band n2	1.02		
NR Band n25	0.97		
NR Band n30	0.97		
NR Band n7	0.95		
NR Band n41 (PC3)	0.79		
NR Band n41 (PC2)	0.79		

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 9 of 78

Table 1-5
Antenna 3a

SAR_design_target Calculations			
Mode/Band	1g SAR [W/kg]		
	SAR_design_target	SAR_Design_limit	SAR_regulatory_limit
UMTS 1750	1.09	1.2 W/kg	1.6 W/kg
UMTS 1900	1.04		
LTE Band 4	1.09		
LTE Band 66	1.09		
LTE Band 2	1.04		
LTE Band 25	1.04		
LTE Band 30	1.04		
LTE Band 7	1.04		
LTE Band 7 ULCA	1.04		
LTE Band 41 (PC3)	1.04		
LTE Band 41 (PC3) ULCA	1.04		
LTE Band 41 (PC2)	1.04		
LTE Band 41 (PC2) ULCA	1.04		
NR Band n70	0.97		
NR Band n66	1.04		
NR Band n2	1.04		
NR Band n25	1.02		
NR Band n30	1.04		
NR Band n7	0.99		
NR Band n41 (PC3)	0.95		
NR Band n41 (PC2)	0.95		

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 10 of 78

Table 1-6
Antenna 3b

SAR_design_target Calculations			
Mode/Band	1g SAR [W/kg]		
	SAR_design_target	SAR_Design_limit	SAR_regulatory_limit
UMTS 850	1.06	1.2 W/kg	1.6 W/kg
LTE Band 71	1.09		
LTE Band 12	1.09		
LTE Band 17	1.09		
LTE Band 13	0.99		
LTE Band 14	0.99		
LTE Band 26	1.04		
LTE Band 5	1.06		
LTE Band 5 ULCA	1.06		
LTE Band 48	0.86		
LTE Band 48 ULCA	0.86		
NR Band n71	0.97		
NR Band n12	0.99		
NR Band n14	0.97		
NR Band n26	0.99		
NR Band n5	1.02		
NR Band n48	0.86		
NR Band n77 DoD (PC3) - [Ch. 633334]	0.84		
NR Band n77 DoD (PC2) - [Ch. 633334]	0.84		
NR Band n77 (PC3) - [Ch. 650000]	0.88		
NR Band n77 (PC2) - [Ch. 650000]	0.88		
NR Band n77 (PC3) - [Ch. 662000]	0.88		
NR Band n77 (PC2) - [Ch. 662000]	0.88		

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 11 of 78

Table 1-7
Antenna 4

SAR_design_target Calculations			
Mode/Band	1g SAR [W/kg]		
	SAR_design_target	SAR_Design_limit	SAR_regulatory_limit
UMTS 850	1.06	1.2 W/kg	1.6 W/kg
UMTS 1750	1.04		
UMTS 1900	1.04		
LTE Band 71	1.04		
LTE Band 12	1.04		
LTE Band 17	1.04		
LTE Band 13	1.04		
LTE Band 14	1.06		
LTE Band 26	1.02		
LTE Band 5	1.06		
LTE Band 5 ULCA	1.06		
LTE Band 4	1.02		
LTE Band 66	1.04		
LTE Band 2	1.04		
LTE Band 25	0.99		
LTE Band 30	0.95		
LTE Band 7	0.99		
LTE Band 7 ULCA	0.99		
LTE Band 48	0.77		
LTE Band 48 ULCA	0.77		
LTE Band 41 (PC3)	0.97		
LTE Band 41 (PC3) ULCA	0.97		
LTE Band 41 (PC2)	0.97		
LTE Band 41 (PC2) ULCA	0.97		
NR Band n71	1.02		
NR Band n12	1.04		
NR Band n14	1.04		
NR Band n26	1.02		
NR Band n5	1.02		
NR Band n70	0.97		
NR Band n66	0.99		
NR Band n2	1.04		
NR Band n25	0.99		
NR Band n30	0.95		
NR Band n7	0.95		
NR Band n48	0.75		
NR Band n41 (PC3)	0.95		
NR Band n41 (PC2)	0.95		
NR Band n77 DoD (PC3) - [Ch. 633334]	0.83		
NR Band n77 DoD (PC2) - [Ch. 633334]	0.83		
NR Band n77 (PC3) - [Ch. 650000]	0.91		
NR Band n77 (PC2) - [Ch. 650000]	0.91		
NR Band n77 (PC3) - [Ch. 662000]	0.93		
NR Band n77 (PC2) - [Ch. 662000]	0.93		

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 12 of 78

2. RF EXPOSURE LIMITS

2.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

2.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

RF Exposure Limits for Frequencies Below 6 GHz

Table 2-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 13 of 78

© 2026 Element

REV 1.0

05/06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

2.3 Time Averaging Windows for FCC Compliance

Per October 2018 TCB Workshop Notes, the below time-averaging windows can be used for assessing time-averaged exposures for devices that are capable of actively monitoring and adjusting power output over time to comply with exposure limits.

Interim Guidance	Frequency (GHz)	Maximum Averaging Time (sec)
SAR	< 3	100
	3 – 6	60
MPE	6 - 10	30
	10 - 16	14
	16 – 24	8
	24 – 42	4
	42 – 95	2

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 14 of 78

3. VALIDATION TEST CASES

To validate the time averaging feature and demonstrate the compliance in Tx varying transmission conditions, the following transmission scenarios are covered in the TAS test:

- 1) Time-varying Tx power transmission: To prove that the algorithm accounts for Tx power variations in time accurately.
- 2) Antenna switching scenarios: To prove that the algorithm functions correctly during transitions in antenna.
- 3) Change in band: To prove that the algorithm functions correctly during transitions in bands.
- 4) Change in technology: To prove that the algorithm functions correctly during transitions in technology.
- 5) TDD/FDD Switch: To prove that the algorithm functions correctly during transitions between frequency division duplexing (FDD) and time division duplexing (TDD) configurations.
- 6) Call drop: To prove that the algorithm accounts for history of past Tx power transmissions accurately.
- 7) Linearity Validation: To validate linearity with TAS operation turned off.

The RF exposure is proportional to the Tx power for a SAR-characterized wireless device. Thus, feature validation in TAS can be effectively performed through conducted (for $f < 6\text{GHz}$) power measurement. Therefore, the compliance demonstration under dynamic transmission conditions and feature validation are done in conducted/radiated power measurement setup for transmission scenario 1 through 7.

Conducted power measurements will be used to validate all TAS test cases. In addition, single point SAR measurements will be performed to validate linearity.

Note: Changes in modulation schemes was omitted, as the Plimit values are identical across all modulation schemes for all configurations.

Changes in operating state was omitted.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 15 of 78

© 2026 Element

REV 1.0

05/06/2025

4. FCC MEASUREMENT PROCEDURES

This chapter provides the test plan and test procedure for validating Cellular TAS algorithm for sub-6 transmission. The 100 seconds time window for operating $f < 3\text{GHz}$ is used as an example to detail the test procedures in this chapter. The same test plan and test procedures described in this chapter apply to 100 seconds time window for operating $f \leq 3\text{GHz}$. The same test plan and test procedures described in this chapter apply to 60 seconds time window for operating $f \geq 3\text{GHz}$.

4.1 Test Configuration and Procedure for Test Case 1: Time-varying Tx power transmission via Conducted Power Measurements

Test Case 1a – Test Sequence A: Tx power is requested to be at P_{max} for a period of time (duration dependent on configuration being tested), followed by $0.5 \times P_{limit}$ for a period of time (duration dependent on configuration being tested).

Test Case 1b – Test Sequence B: Tx power is requested to be at 1mW (0dBm) for a period of time (duration dependent on configuration being tested), then at P_{max} for a period of time (duration dependent on configuration being tested).

Test Case 1c – Pseudo-Random Validation Sequence: Tx power is requested to vary with time. A unique pseudo-random sequence with 150 independent power requests according to RSS-102.SAR.MEAS is obtained based on the following formula:

$$P_{req} = P_{max,nom} \left(\frac{P_{limit,nom}}{P_{max,nom}} \right)^x$$

- P_{req} is the requested power in watts.
- x is a random value drawn from the Weibull distribution with shape and scale parameters of 2.0 and 0.8 respectively.
- The corresponding request durations are given by:

$$T_{req} = 2(1 + 2y)$$
- P_{req} is the duration of the power request in seconds.
- y is a uniform distributed random value between 0 and 1.

The details for generating test sequences A, B, and pseudo-random are described and listed in Appendix D.

4.1.1 Configuration

Conducted power measurements shall be performed for at least one band per technology. The P_{limit} value associated with the chosen band should be several dB lower than the corresponding value of P_{max} . Whenever possible, the same band should not be repeated for different technologies. FDD, TDD, ENDC, and ULCA configurations shall be treated as separate technologies.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 16 of 78

© 2026 Element

REV 1.0
05/06/2025

4.1.2 Procedure

Step 1: Measure P_{max} , measure P_{limit} for all the RATs and selected bands.

Step 2: Apply TAS on EUT to initialize time-averaging behavior.

Step 3: Establish radio link with callbox in the selected RAT/band.

Step 4: Callbox requests the EUT's Tx power according to time-varying test cases.

Step 5: Convert the measured conducted TX power from Step 4 into rolling time-averaged power (P_{avg}) for the n th step using equation 1a.

$$P_{avg}(n) = \frac{1}{M} \sum_{m=0}^{M-1} P_{meas}[n-m] \quad (1a)$$

Where 'M' is the total number of reporting periods per time-averaging window and 'm' is the index of the time-averaging window. The TAS algorithm is validated when P_{avg} is maintained less than or equal to P_{limit} .

In test cases where P_{limit} is not constant, the equation 1b below is used to calculate the normalized, rolling time-averaged power (P_{avg}).

$$P_{avg}(n) = \frac{1}{M} \sum_{m=0}^{M-1} \frac{P_{meas}[n-m]}{P_{limit}[n-m]} \quad (1b)$$

Step 6: Plot results.

- A. Make one power perspective plot containing
 1. Requested power
 2. Measured instantaneous conducted TX power
 3. Power limit P_{limit} in mW
 4. Capable maximum TX power P_{max} in mW
- B. Make one time-averaged validation perspective plot containing
 1. Rolling power average P_{avg} in mW
 2. Power limit P_{limit} in mW

Step 7: repeat steps 2~6 for time varying test case B and pseudo-random test case.

The validation criteria are, at all times, the calculated rolling power average P_{avg} does not exceed P_{limit} .

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 17 of 78

4.2 Test Configuration and Procedure for Test Case 2: Antenna Switching via Conducted Power Measurements

4.2.1 Configuration

When different P_{max} and P_{limit} values are associated with each transmitting antenna, consideration shall be given to the combinations of antennas and operating state(s) for which the P_{limit} values are several dB below the corresponding P_{max} values. Of these combinations, the performance of the TAS algorithm shall be validated when the EUT switches from the antenna with the highest P_{limit} value to that with the lowest.

Among RATs/bands supporting TX antenna switches, select the RAT/band with the highest P_{limit} difference between a pair of supported TX antennas.

A single test case covering antenna switch may be performed to display compliance.

4.2.2 Procedure

Step 1: Measure P_{max} measure P_{limit} for both selected antennas.

Step 2: Apply TAS on EUT to initialize time-averaging behavior.

Step 3: Establish radio link with callbox in the selected RAT/band.

Step 4: Request EUT's Tx power at 0 dBm for at least one time window specified for the selected technology/band, then request EUT's Tx power to be at maximum for at least one time window. Switch the radio link to second antenna selected. For the remaining time, continue callbox requesting EUT's TX power to be at maximum power at least one time window.

Step 5: Convert the measured conducted TX power from Step 4 into normalized rolling time-averaged power (P_{avg}) using equation 1b.

Step 6: Plot results.

- A. Make one power perspective plot containing
 1. Requested power
 2. Measured instantaneous conducted TX power
 3. Power limit P_{limit} in mW
 4. Capable maximum TX power P_{max} in mW
- B. Make one time-averaged validation perspective plot containing
 1. Normalized total rolling power average P_{avg} in mW
 2. Normalized rolling power average P_{avg} in mW for each antenna/technology
 3. Normalized power limit P_{limit} in mW

The validation criteria are, at all times, the normalized total rolling power average P_{avg} does not exceed P_{limit} .

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 18 of 78

4.3 Test Configuration and Procedure for Test Case 3: Change in Band via Conducted Power Measurements

4.3.1 Configuration

Conducted power measurements shall be performed to validate the TAS algorithm when the EUT switches between frequency bands with different P_{limit} values.

The TAS algorithm shall be validated for the following changes in frequency band:

- Among the frequency band configuration for which the P_{limit} values are several dB below the corresponding P_{max} values, changing from one frequency band to another with a lower P_{limit} value.
- If applicable, changing from a frequency for which the TAS algorithm is transparent $P_{limit} \geq P_{max}$, to one for which P_{limit} is several dB below P_{max} .

A single test case covering frequency band switch may be performed to display compliance.

4.3.2 Procedure

Step 1: Measure P_{max} , measure P_{limit} for both selected bands.

Step 2: Apply TAS on EUT to initialize time-averaging behavior.

Step 3: Establish radio link with callbox in the selected RAT/band.

Step 4: Request EUT's Tx power at 0 dBm for at least one time window specified for the selected technology/band, then request EUT's Tx power to be at maximum for at least one time window. Switch the radio link to second selected band. For the remaining time, continue callbox requesting EUT's TX power to be at maximum power at least one time window.

Step 5: Convert the measured conducted TX power from Step 4 into normalized rolling time-averaged power (P_{avg}) using equation 1b.

Step 6: Plot results.

- A. Make one power perspective plot containing
 1. Requested power
 2. Measured instantaneous conducted TX power
 3. Power limit P_{limit} in mW
 4. Capable maximum TX power P_{max} in mW
- B. Make one time-averaged validation perspective plot containing
 1. Normalized total rolling power average P_{avg} in mW
 2. Normalized rolling power average P_{avg} in mW for each antenna/technology
 3. Normalized power limit P_{limit} in mW

The validation criteria are, at all times, the normalized total rolling power average P_{avg} does not exceed P_{limit} .

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 19 of 78

4.4 Test Configuration and Procedure for Test Case 4: Change in Technology via Conducted Power Measurements

4.4.1 Configuration

4.4.1 Configuration

Conducted power measurements shall be performed to validate the TAS algorithm when the EUT switches between technologies with different P_{limit} values.

Among the technology configuration for which the P_{limit} values are several dB below the corresponding P_{max} values, changing from one technology to another with a lower P_{limit} value.

4.4.2 Procedures

4.4.2 Procedure

Step 1: Measure P_{max} , measure P_{limit} for both selected technologies.

Step 2: Apply TAS on EUT to initialize time-averaging behavior.

Step 3: Establish radio link with callbox in the selected RAT/band.

Step 4: Request EUT's Tx power at 0 dBm for at least one time window specified for the selected technology/band, then request EUT's Tx power to be at maximum for at least one time window. Switch the radio link to second technology/band selected. For the remaining time, continue callbox requesting EUT's TX power to be at maximum power at least one time window.

Step 5: Convert the measured conducted TX power from Step 4 into normalized rolling time-averaged power (P_{avg}) using equation 1b.

Step 6: Plot results.

- A. Make one power perspective plot containing
 1. Requested power
 2. Measured instantaneous conducted TX power
 3. Power limit P_{limit} in mW
 4. Capable maximum TX power P_{max} in mW
- B. Make one time-averaged validation perspective plot containing
 1. Normalized total rolling power average P_{avg} in mW
 2. Normalized rolling power average P_{avg} in mW for each antenna/technology
 3. Normalized power limit P_{limit} in mW

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 20 of 78

The validation criteria are, at all times, the normalized total rolling power average P_{avg} does not exceed P_{limit} .

4.5 Test Configuration and Procedure for Test Case 5: TDD/FDD Switch Configurations via Conducted Power Measurements

4.5.1 Configuration

Conducted power measurements shall be performed to validate the TAS algorithm when the EUT switches between TDD and FDD configurations with different P_{limit} values, both of which should be several dB lower than the corresponding P_{max} values.

4.5.2 Procedure

Step 1: Measure P_{max} , measure P_{limit} for both selected technologies with TDD and FDD.

Step 2: Apply TAS on EUT to initialize time-averaging behavior.

Step 3: Establish radio link with callbox in the selected RAT/band.

Step 4: Request EUT's Tx power at 0 dBm for at least one time window specified for the selected technology/band, then request EUT's Tx power to be at maximum for at least one time window. Switch the radio link to second technology/band selected. For the remaining time, continue callbox requesting EUT's TX power to be at maximum power at least one time window.

Step 5: Convert the measured conducted TX power from Step 4 into normalized rolling time-averaged power (P_{avg}) using equation 1b.

Step 6: Plot results.

- A. Make one power perspective plot containing
 1. Requested power
 2. Measured instantaneous conducted TX power
 3. Power limit P_{limit} in mW
 4. Capable maximum TX power P_{max} in mW
- B. Make one time-averaged validation perspective plot containing
 1. Normalized total rolling power average P_{avg} in mW
 2. Normalized rolling power average P_{avg} in mW for each antenna/technology
 3. Normalized power limit P_{limit} in mW

The validation criteria are, at all times, the normalized total rolling power average P_{avg} does not exceed P_{limit} .

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 21 of 78

4.6 Test Configuration and Procedure for Test Case 6: Call Drop via Conducted Power Measurements

4.6.1 Configuration

Conducted power measurements shall be performed to validate the TAS algorithm during dropped connections to ensure the algorithm is able to account for previous connection states.

Only one test is required with one of the configurations for which P_{limit} is below P_{max} .

4.6.2 Procedure

Step 1: Measure P_{max} , measure P_{limit} for the selected technology.

Step 2: Apply TAS on EUT to initialize time-averaging behavior.

Step 3: Establish radio link with callbox in the selected RAT/band.

Step 4: Request EUT's Tx power at 0 dBm for at least one time window specified for the selected technology/band, then drop the call for ~10 seconds. Re-establish another call in the same radio configuration at first link. For the remaining time, continue callbox requesting EUT's Tx power to be at maximum power at least one time window.

Step 5: Convert the measured conducted TX power from Step 4 into rolling time-averaged power (P_{avg}) for the nth step using equation 1a.

Step 6: Plot results.

- A. Make one power perspective plot containing
 1. Requested power
 2. Measured instantaneous conducted TX power
 3. Power limit P_{limit} in mW
 4. Capable maximum TX power P_{max} in mW
- B. Make one time-averaged validation perspective plot containing
 1. Rolling power average P_{avg} in mW
 2. Power limit P_{limit} in mW

The validation criteria are, at all times, the calculated rolling power average P_{avg} does not exceed P_{limit} .

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 22 of 78

4.7 Technology Specific Validations

4.7.1 ENDC

ENDC operation is validated by performing a single test sequence. A transition is initiated from cellular operation at all down bits/lower power configuration + NR requesting Pmax to cellular requesting Pmax + NR requesting Pmax to cellular requesting Pmax + NR at all down bits / lower power configuration. The configurations and operating states selected for single point SAR measurements shall match those selected for conducted power measurements and for SAR compliance assessment. This requirement facilitates the correlation of the single point SAR results with both the conducted power measurements and the SAR_{target} results in the RF exposure technical brief.

4.7.2 ULCA

ULCA operation is validated by performing a single test sequence. A transition is initiated from PCC at 0dBm + SCC at Pmax to PCC at Pmax + SCC at 0dBm to PCC at Pmax + SCC at Pmax.

4.8 Test Configuration and Procedure for Test Case 1: Time-varying TX power transmission via Single Point SAR Measurements

4.8.1 Configuration

Single point SAR measurements shall be performed to validate the TAS algorithm; however, compared with the requirements for conducted power measurements, fewer test cases are required:

- Single point SAR measurements need be performed only for changes in requested power.
- To account for linearity, single point SAR measurements shall be performed on each antenna for at least one frequency. If possible, each antenna should be validated using a different frequency.
- Single point SAR measurements shall be performed only for configurations involving a single transmitter.

The configurations and operating states selected for single point SAR measurements shall match those selected for conducted power measurements and for SAR compliance assessment. This requirement facilitates the correlation of the single point SAR results with both the conducted power measurements and the SAR_{target} results in the RF exposure technical brief.

4.8.2 Procedure

Step 1: Perform area scan with DUT set to transmit at a fixed output of P_{limit} , and callbox set to request maximum power for all RATs and selected bands. Measure *pointSAR* at peak location of the area scan. This *pointSAR* value corresponds to *pointSAR* at the measured P_{limit}

Step 2: Apply TAS on EUT to initialize time-averaging behavior.

Step 3: Establish radio link in selected radio configuration.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 23 of 78

© 2026 Element

REV 1.0

05/06/2025

Step 4: Measure and record *pointSAR* versus time at peak location of the area scan. Configure callbox to request the DUT's Tx power accordingly to pre-defined test sequences.

Step 5: Convert the measured SAR into time-averaged SAR.

Convert the instantaneous measured SAR from Step 4 into 1gSAR value. Perform the running time average to 1gSAR to determine time-averaged value versus time as follows,

$$1gSAR \text{ or } 10gSAR(t) = \frac{pointSAR(t)}{PointSAR_P_{limit}} * SAR_{target,nom} \quad (2a)$$

Step 6: Plot results.

- A. Make one SAR perspective plot containing
 1. Calculated time-averaged 1gSAR or 10gSAR
 2. $SAR_{target,nom}$ and SAR_{target}
($SAR_{target} = SAR_{target,nom} \times 10^{1dB \text{ uncertainty}/10}$)
 3. FCC limit of 1.6 W/kg (1gSAR) or 4.0 W/kg (10gSAR)
 4. Maximum time-averaged 1gSAR or 10gSAR value
 5. Measured instantaneous single point SAR

Step 7: Repeat steps 2~6 with the pre-defined test sequence 2

Step 8: Repeat steps 2~6 with the pre-defined pseudo-random test sequence

Step 9: Repeat steps 2~6 for all the selected technologies and bands

The validation criteria are, at all times, the calculated time-averaged 1gSAR or 10gSAR versus time shall not exceed SAR_{target}

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 24 of 78

5. DYNAMIC BUDGET VALIDATION

This DUT supports dynamic budget sharing for Cellular technologies. The SAR budget for cellular technologies is allocated dynamically over time considering usage statistics and consumed SAR from all active radios. The device total exposure ratio (TER) is always maintained less than 1.

To validate the dynamic budgeting algorithm, the following configurations are applicable:

- 1) Cellular standalone -> Cellular + WLAN -> WLAN standalone
 - a) Pmax will be requested for this test scenario in all operating conditions. The test time for each connection will be sufficient to allow steady state to be reached.
- 2) Sub-6GHz Cellular standalone -> Sub-6GHz Cellular + FR2
 - a) Pseudo-random time-varying TX power will be used for this test scenario to display budget adjustment activity for varying Tx power values. The determination of power values will be outlined in the validation report.
- 3) Dynamic budget mode -> Static budget mode
 - a) This test case will display the transition between a mode that uses the dynamic budget algorithm to a mode that uses a fixed budget implementation.
 - b) Pmax will be requested for this test scenario in all operating conditions. The test time for each connection will be sufficient to allow steady state to be reached.

These cases are validated using log information collected from the application processor (AP). Only validation cases applicable for the device under test will be performed.

5.1 Test Exclusion

FR2 is not supported in this DUT, which excludes test case 2 for dynamic budget validation.

5.2 Dynamic Budget Validation Test Case

Test cases 1 and 3 reference the continuity assessment listed below in Table 5-1.

Table 5-1 TAS Parameters setting for Dynamic Budget Validation Test Case

Test Scenario	Technology/Band	Core/Antenna	Plimit [dBm]	Test Duration
Dynamic Budget Validation Test	LTE Band 30	Ant 3a	19.60	100s
	LTE Band 30	Ant 3a	19.60	100s
	2.4 GHz Wi-Fi	Core 1 (Ant 3a)	18.75	
	2.4 GHz Wi-Fi	Core 1 (Ant 3a)	18.75	30s

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 25 of 78

© 2026 Element

REV 1.0
05/06/2025

Test result for Dynamic Budget Validation Test Case

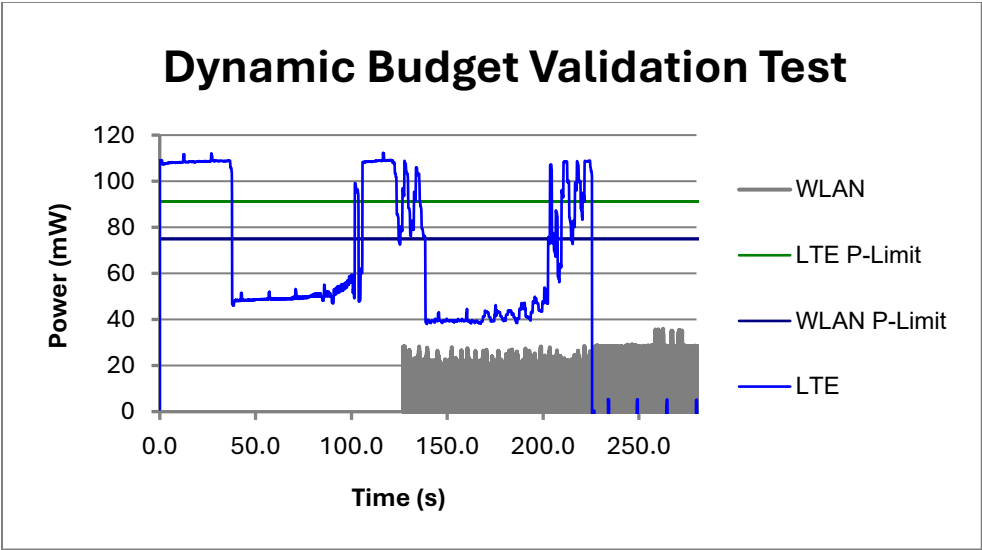


Figure 5-1(a) Dynamic Budget Validation Time-averaged conducted TX power

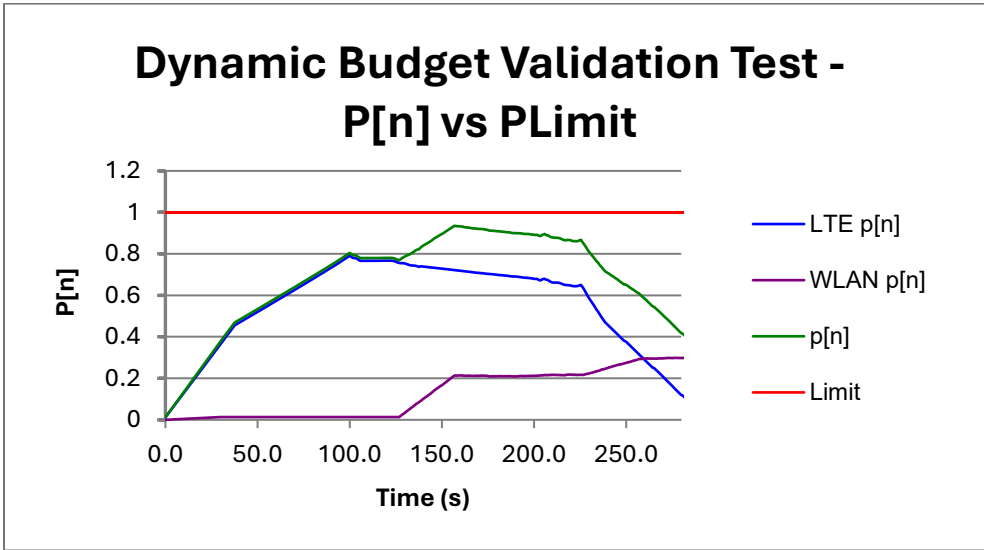


Figure 5-1(b) Dynamic Budget Validation Normalized Time-averaged conducted power

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 26 of 78

6. MEASUREMENT TEST SETUP

6.1 Conducted Measurement

LTE test setup

The Rohde & Schwarz CMW500 callbox was used in this test. The test setup schematic is shown in Figure 6-1(a) (Appendix D – Test Setup Photo 1) for measurements with a single antenna of DUT and in Figure 6-1(b) (Appendix D – Test Setup Photo 3) for measurements involving antenna switch. For single antenna measurement, one port (RF1 COM) of the callbox is connected to the RF port of the DUT using a directional coupler. For technology/band switch measurement, one port (RF1 COM) of the callbox used for signaling two different technologies is connected to a combiner, which is in turn connected to a directional coupler. The other end of the directional coupler is connected to a splitter to connect to two RF ports of the DUT corresponding to the two antennas of interest. In the setups, power meter is used to tap the directional coupler for measuring the conducted output power of the DUT. For all conducted tests, only RF1 COM port of the callbox is used to communicate with the DUT.

All the path losses from RF port of DUT to the callbox RF COM port and to the power meter are calibrated and automatically entered as offsets in the callbox and the power meter via test scripts on the PC used to control callbox and power meter

Sub6 NR test setup:

The Keysight UXM 5G callbox was used in this test. The test setup schematic is the same as the LTE Test Setup shown in Figure 6-1(a) (Appendix D – Test Setup Photo 2). One port of the callbox is connected to the RF port of the DUT using a directional coupler. In the setup, the power meter is used to tap the directional coupler for measuring the conducted output power of the DUT.

All the path losses from RF port of DUT to the callbox RF COM port and to the power meter are calibrated and automatically entered as offsets in the callbox and the power meter via test scripts on the PC used to control callbox and power meter.

LTE+Sub6 NR test setup:

LTE conducted port and Sub6 NR conducted port are different on this EUT, therefore, the LTE and Sub6 NR signals for power meter measurement are performed on separate paths as shown below in Figure 6-1(c) (Appendix D – Test Setup Photo 4).


All the path losses from RF port of DUT to the callbox RF COM port and to the power meter are calibrated and automatically entered as offsets in the callbox and the power meter via test scripts on the PC used to control callbox and power meter.

LTE+LTE Inter-band ULCA test setup:


LTE conducted PCC port and LTE conducted SCC conducted port are different on this EUT, therefore, the LTE PCC and LTE SCC signals for power meter measurement are performed on separate paths as shown below in Figure 6-1(d) (Appendix D – Test Setup Photo 5).

All the path losses from RF port of DUT to the callbox RF COM port and to the power meter are calibrated and automatically entered as offsets in the callbox and the power meter via test scripts on the PC used to control callbox and power meter.


FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 27 of 78

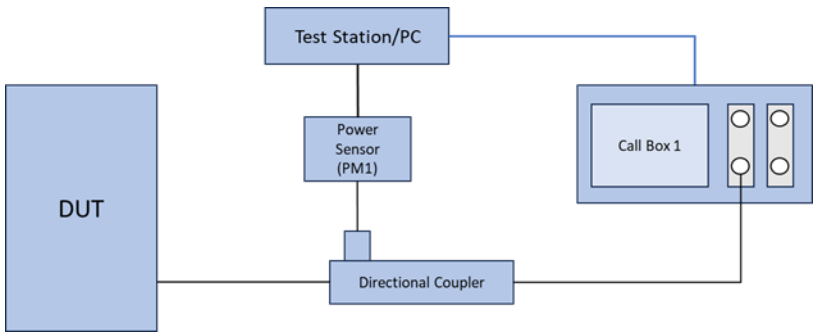

(a) Appendix D – Test Setup Photo 1 and 2

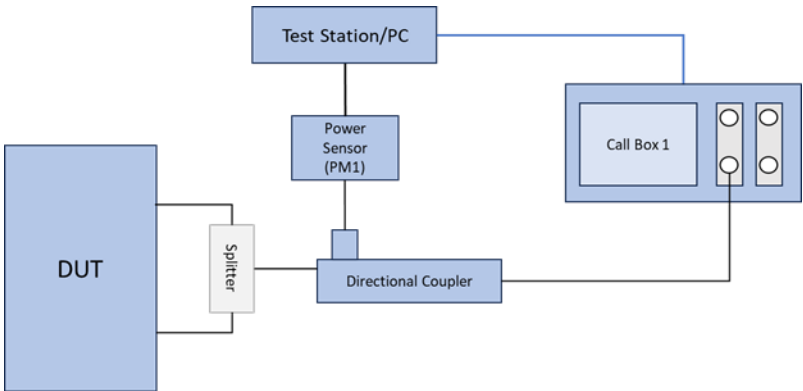


(b) Appendix D – Test Setup Photo 3

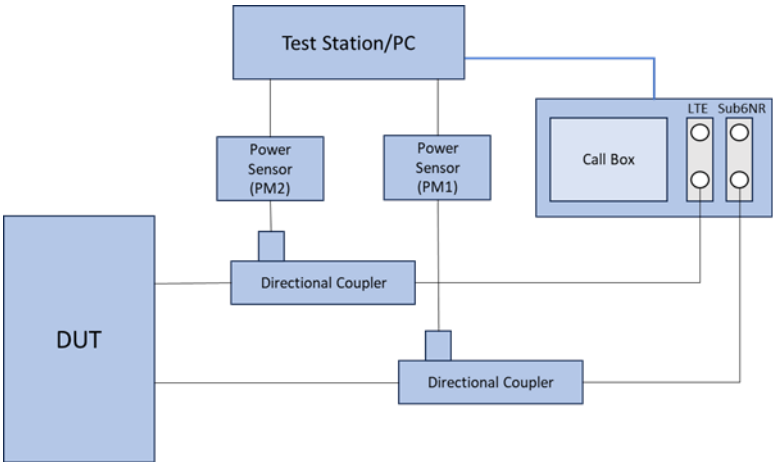

(c) Appendix D – Test Setup Photo 4

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 28 of 78

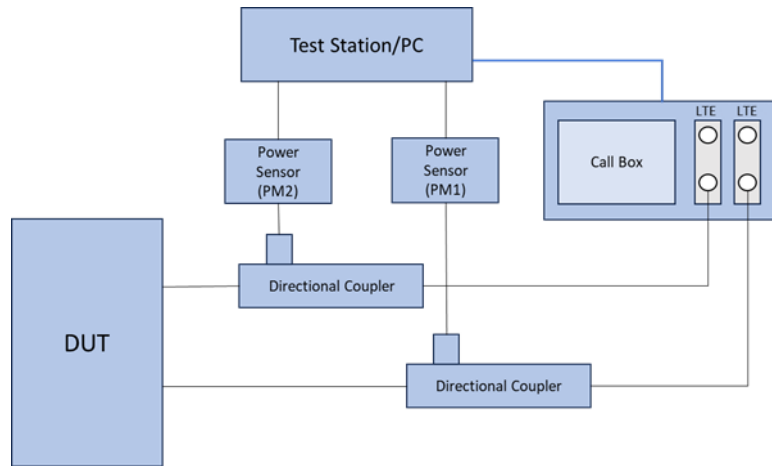

(d) Appendix D – Test Setup Photo 5

Figure 6-1
Conducted power measurement setup

Both the callbox and power meter are connected to the PC using ethernet cables. Test scripts are custom made for automation, and the test duration set in the test scripts is 500 seconds.

For time-varying Tx power measurement, the PC runs the 1st test script to send GPIB commands to control the callbox's requested power versus time, while at the same time to record the conducted power measured at DUT RF port using the power meter. The commands sent to the callbox to request power are:

- 0dBm for 100 seconds
- test sequence A, test sequence B, or pseudo-random test sequence (defined in Section 4.1 and generated in Section 4.2.1), for 100 seconds.
- stay at the last power level of test sequence A, test sequence B, or pseudo-random sequence for the remaining time.

Power meter readings are periodically recorded every 100ms. A running average of this measured Tx power over 100 seconds is performed in the post-data processing to determine the 100s-time averaged power.

For call drop, technology/band/antenna switch, and device state switch tests, after the call is established, the callbox is set to request the DUT's Tx power at 0dBm for 100 seconds while simultaneously starting the 2nd test script runs at the same time to start recording the Tx power measured at DUT RF port using the power meter. After the initial 100 seconds since starting the Tx power recording, the callbox is set to request maximum power from the DUT for the rest of the test. Note that the call drop/re-establish, or technology/band/antenna switch or device state switch is manually performed when the Tx power of DUT is at the time-averaged reduced level. See Section 4.2-4.8 for detailed test procedure of call drop test, technology/band/antenna switch test and device state switch test.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 29 of 78

SAR Measurement

The measurement setup is similar to normal SAR measurements as described in the RF Exposure Report. The difference in SAR measurement setup for time averaging feature validation is that the callbox is signaling in close loop power control mode (instead of requesting maximum power in open loop control mode) and callbox is connected to the PC using ethernet so that the test script executed on PC can send commands to control the callbox's requested power over time (test sequence). The same test script used in conducted setup for time-varying Tx power measurements is also used in this section for running the test sequences during SAR measurements, and the recorded values from the disconnected power meter by the test script were discarded.

As mentioned in Section 4.8, for DUT to follow TPC command sent from the callbox wirelessly, the "path loss" between callbox antenna and the DUT needs to be very well calibrated. Since the SAR chamber is in uncontrolled environment, precautions must be taken to minimize the environmental influences on "path loss".

The DUT is placed in worst-case position according to Table 7-2.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 30 of 78

7. TEST CONFIGURATIONS (FREQ < 6GHZ)

7.1 WWAN Sub6 Transmission

The P_{limit} values for technologies and bands supported by EUT are derived in RF Exposure Validation report Power Level Summary Table and summarized in Table 7-1.

Table 7-1
 P_{limit} and P_{max} for supported technologies and bands

Exposure Scenario:	Ant 1a	Ant 1b	Ant 2a	Ant 2b	Ant 3a	Ant 3b	Ant 4
Averaging Volume:	1g	1g	1g	1g	1g	1g	1g
Test Distance:	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm	5 mm
OBD:	1, Body	1, Body	1, Body	1, Body	1, Body	1, Body	1, Body
Technology/Band	P_{limit} (Inclusive of Total Device Uncertainty)	P_{max} (Max Allowed Power)	P_{limit} (Inclusive of Total Device Uncertainty)	P_{max} (Max Allowed Power)	P_{limit} (Inclusive of Total Device Uncertainty)	P_{max} (Max Allowed Power)	P_{limit} (Inclusive of Total Device Uncertainty)
UMTS 850	N/A	N/A	N/A	N/A	N/A	N/A	N/A
UMTS 1700	N/A	N/A	N/A	N/A	N/A	N/A	N/A
UMTS 1900	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 7	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 12	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 17	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 13	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 14	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 26	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 5	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 5 ULC A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 4	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 66	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 2	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 25	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 30	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 7	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 7 ULC A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 41 (PC3)	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 41 (PC3) ULC A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 41 (PC2)	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 41 (PC2) ULC A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 48	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LTE Band 48 ULC A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n71	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n12	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n14	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n26	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n15	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n70	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n66	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n2	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n16	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n30	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n7	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n41 (PC3)	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n41 (PC2)	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n48	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR Band n77 DSD (PC3) - [Ch. 633334]	19.00	26.00	N/A	N/A	N/A	N/A	N/A
NR Band n77 DSD (PC2) - [Ch. 633334]	19.00	26.00	N/A	N/A	N/A	N/A	N/A
NR Band n77 (PC3) - [Ch. 620000]	20.00	26.00	N/A	N/A	N/A	N/A	N/A
NR Band n77 (PC2) - [Ch. 620000]	20.00	26.00	N/A	N/A	N/A	N/A	N/A
NR Band n77 (PC3) - [Ch. 660000]	20.00	26.00	N/A	N/A	N/A	N/A	N/A
NR Band n77 (PC2) - [Ch. 660000]	20.00	26.00	N/A	N/A	N/A	N/A	N/A

Note all P_{limit} and maximum tune up output power P_{max} levels entered in above Table correspond to average power levels after accounting for duty cycle in the case of TDD modulation schemes (for e.g., LTE TDD).

Note: The target powers listed in Table 7-1 for Plim account for the total device uncertainty, while the P_{max} values include the specified tolerance.

The selected technologies/bands for testing time-varying test sequences are highlighted in yellow in Table 7-1.

The radio configurations used in time-averaged SAR validation test for selected technologies, bands, and antennas and the corresponding worst-case radio configuration 1gSAR values for selected technology/band/device state are listed in Table 7-2.

The P_{limit} for all the selected radio configurations are listed in below Table 7-2. P_{max} was also used for radio configurations selected for testing time-varying Tx power transmission scenarios in order to generate test sequences following the test procedures in Section 4.1.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 31 of 78

Table 7-2
Radio configurations selected for TAS Validation test

CONDUCTED TEST CASES												
Test Case #	Test Scenario	Tech	Band	Antenna	OBD	Channel	Frequency [MHz]	Test Configurations	SAR Exposure Scenario	RF Exposure Worst Case Measured SAR at Plimit (W/kg)	Plimit [dBm]	Pmax [dBm]
1a	Time-varying Tx Power: Sequence A	LTE FDD	66	4	1	132322	1745	QPSK 1/50/20 MHz BW	Top, 5mm	0.998	15.0	25.7
1b	Time-varying Tx Power: Sequence B	WCDMA	2	2b	1	9400	1880	RMC	Bottom, 5mm	0.995	20.1	25.2
		LTE FDD	66	4	1	132322	1745	QPSK 1/50/20 MHz BW	Top, 5mm	0.998	15.0	25.7
		LTE TDD	41 PC3	4	1	40620	2593	QPSK 1/50/20 MHz BW	Top, 5mm	1.100	20.2	25.7
		NR FR1 FDD	n66	4	1	349000	1745	DFT-s-OFDM 1/108/40 MHz BW	Top, 5mm	1.100	15.0	25.7
		NR FR1 TDD	77A PC3	3b	1	633334	3500.01	DFT-s-OFDM 135/138/100 BW	Top, 5mm	0.899	19.3	26.0
1c	Time-varying Tx Power: Pseudo-Random Sequence	LTE FDD	66	4	1	132322	1745	QPSK 1/50/20 MHz BW	Top, 5mm	0.998	15.0	25.7
2	Antenna Switch	LTE	66	3a	1	132322	1745	QPSK 1/50/20 MHz BW	Back, 5mm	0.848	21.6	25.7
			25	4	1	26365	1882.5	QPSK 1/50/20 MHz BW	Top, 5mm	1.030	14.8	25.7
3	Change in Band/Frequency	LTE	7	4	1	21100	2535	QPSK 1/50/20 MHz BW	Top, 5mm	1.100	18.0	25.7
			25		1	26365	1882.5	QPSK 1/50/20 MHz BW	Top, 5mm	1.030	14.8	25.7
4	Change in Technology	LTE	7	4	1	21100	2535	QPSK 1/50/20 MHz BW	Top, 5mm	1.100	18.0	25.7
		WCDMA	2	4	1	9400	1880	RMC	Top, 5mm	1.030	14.8	25.7
5	TDD/FDD Switch	LTE	66	3a	1	132322	1745	QPSK 1/50/20 MHz BW	Back, 5mm	0.848	21.6	25.7
			41 PC3		1	40620	2593	QPSK 1/50/20 MHz BW	Right, 5mm	1.010	20.6	25.7
6	Call Drop	LTE	66	3a	1	132322	1745	QPSK 1/50/20 MHz BW	Back, 5mm	0.848	21.6	25.7
7	Technology Hand-Off (EN-DC)	LTE	5	4	1	20525	836.5	QPSK 1/25/10 MHz BW	Back, 5mm	0.921	25.2	25.7
		NR FR1 FDD	n66	3a	1	349000	1745	DFT-s-OFDM 1/108/40 MHz BW	Back, 5mm	0.771	21.6	25.7
8	Technology Hand-Off (Inter-Band ULCA)	PCC LTE	5	4	1	20525	836.5	QPSK 1/25/10 MHz BW	Back, 5mm	0.921	25.2	25.7
		SCC LTE	2	3a	1	18900	1880	QPSK 1/50/20 MHz BW	Back, 5mm	0.925	21.2	25.7

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 32 of 78

8. CONDUCTED TX CASES

8.1 Scenario 1: Change in Requested Power

In this scenario, the TAS algorithm is tested under dynamic power test sequences. The test sequences A, B, and Pseudo-Random are shown and tabulated in Appendix E. All of the test cases for this scenario are relegated in Table 7-2, and the test procedure follows section 4.1.2. The measurement setup is shown in Figure 6-1. The following details will demonstrate case-by-case to show how the TAS algorithm behaves for each RAT.

The test case for 3G WCDMA are conducted under WCDMA Band 2, the test cases for 4G LTE are conducted under LTE bands B66 and B41, and the test cases for 5G NR are conducted under NR bands n66 and n77. The corresponding detailed test procedure is described in section 4.1.2. For the figure set of each case, the first figure demonstrates the DUT's instantaneous conducted TX power, the requested power over time, P_{limit} , and P_{max} . The second figure illustrates the corresponding rolling average power over time. For all test cases, the time-averaged SAR does not exceed the FCC limit.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 33 of 78

© 2026 Element

REV 1.0
05/06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

WCDMA Band 2, Antenna 2b

Test result for Test Sequence B

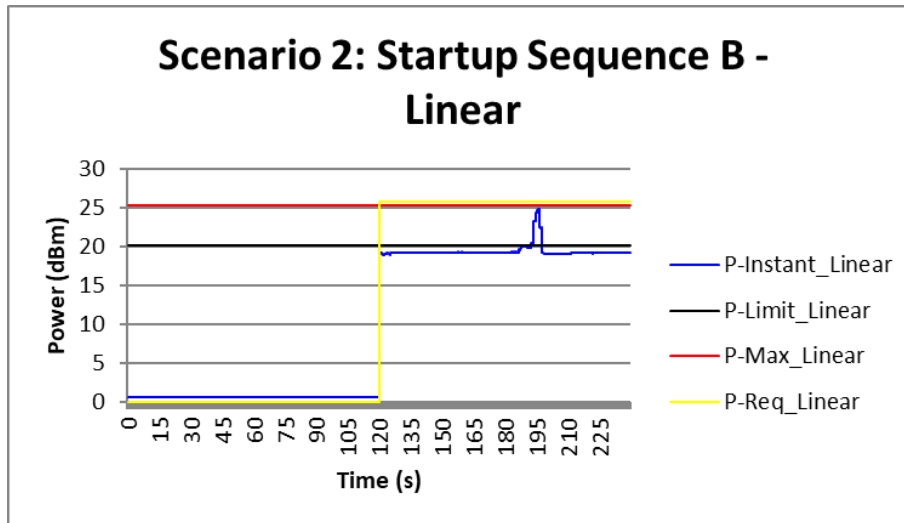


Figure 8-1: Time-averaged conducted TX power over time for Changes in Power case (WCDMA Band 2 Ant 2b – Test Sequence B)

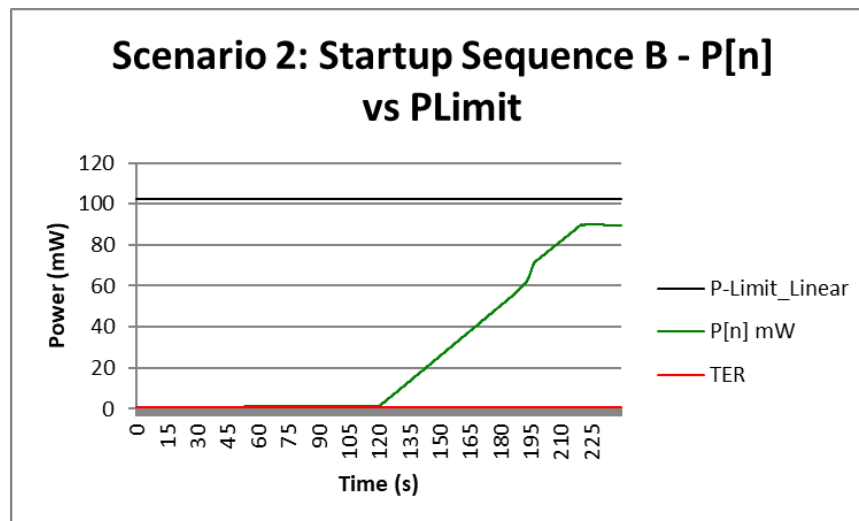


Figure 8-2: Time-averaged Power for Changes in Power case (WCDMA Band 2 Ant 2b – Test Sequence B)

Plimit (Plimit,nom with uncertainty)	102.33 mW
Max P[n]	89.77 mW
Validation: $P[n] \leq P_{limit}$ for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 34 of 78

© 2026 Element

REV 1.0

05/06/2025

LTE Band 66, Antenna 4

Test result for Test Sequence A

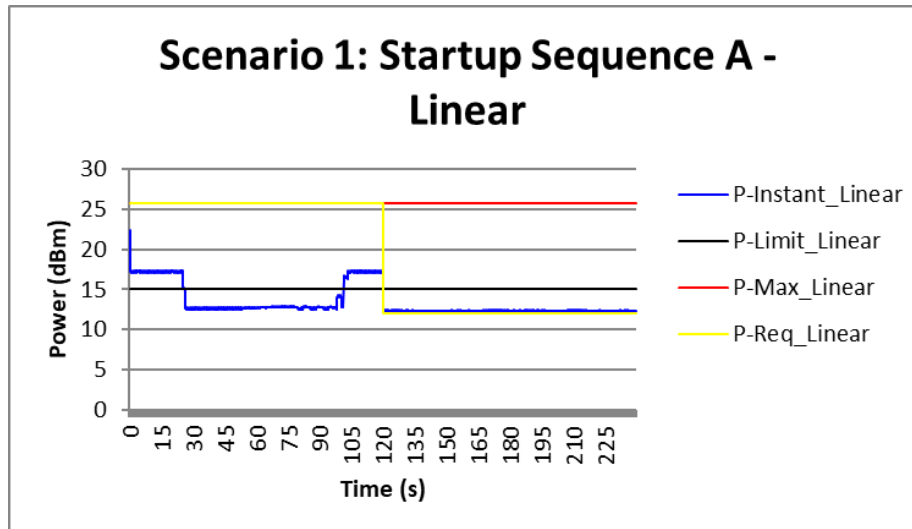


Figure 8-3: Time-averaged conducted TX power over time for Changes in Power case (LTE Band 66 Ant 4 – Test Sequence A)

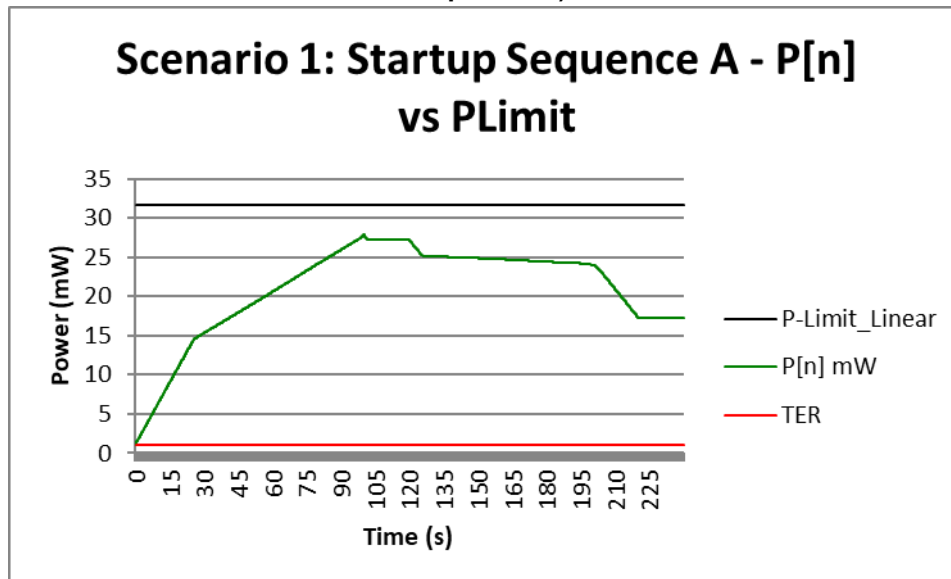


Figure 8-4: Time-averaged Power for Changes in Power case (LTE Band 66 Ant 4 – Test Sequence A)

Plimit (Plimit,nom with uncertainty)	31.62 mW
Max P[n]	27.85 mW
Validation: $P[n] \leq P_{limit}$ for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 35 of 78

© 2026 Element

REV 1.0
05/06/2025

Test result for Test Sequence B

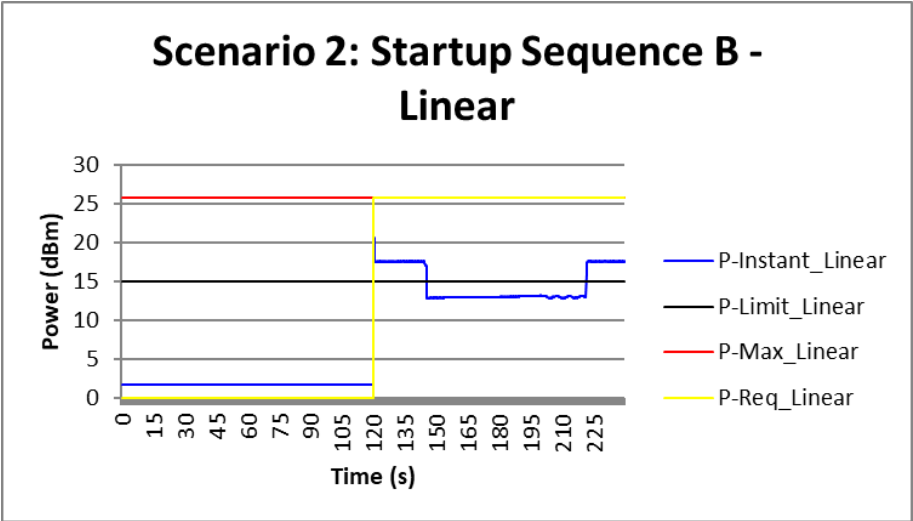


Figure 8-5: Time-averaged conducted TX power over time for Changes in Power case (LTE Band 66 Ant 4 – Test Sequence B)

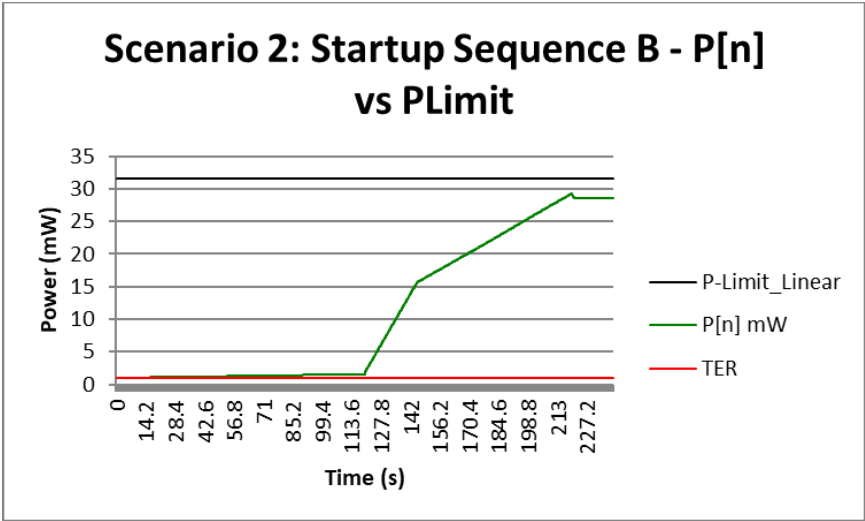


Figure 8-6: Time-averaged Power for Changes in Power case (LTE Band 66 Ant 4 – Test Sequence B)

Plimit (Plimit,nom with uncertainty)	31.62 mW
Max P[n]	29.27 mW
Validation: P[n] ≤ Plimit for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 36 of 78

Test result for Pseudo-Random Test Sequence

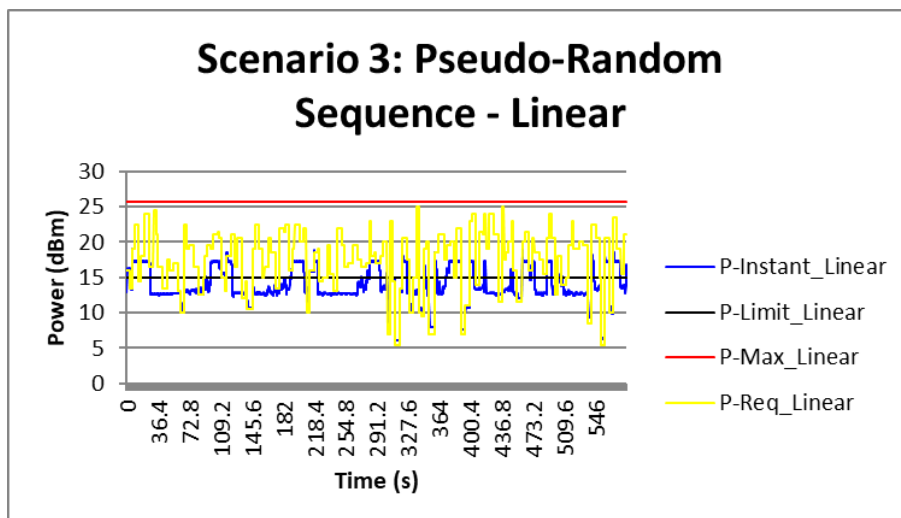


Figure 8-7: Time-averaged conducted TX power over time for Changes in Power case (LTE Band 66 Ant 4 – Pseudo-Random Test Sequence)

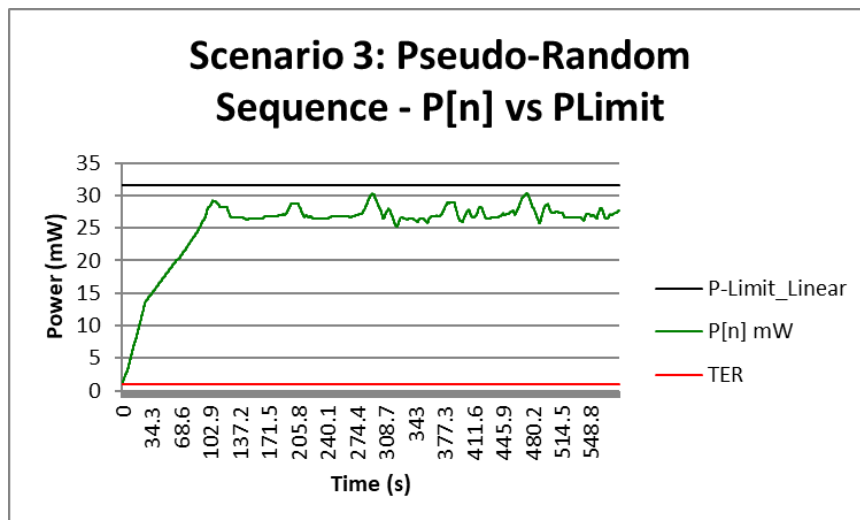


Figure 8-8: Time-averaged Power for Changes in Power case (LTE Band 66 Ant 4 – Pseudo-Random Test Sequence)

Plimit (Plimit,nom with uncertainty)	31.62 mW
Max P[n]	30.33 mW
Validation: $P[n] \leq P_{limit}$ for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 37 of 78

LTE Band 41, Antenna 4

Test result for Test Sequence B

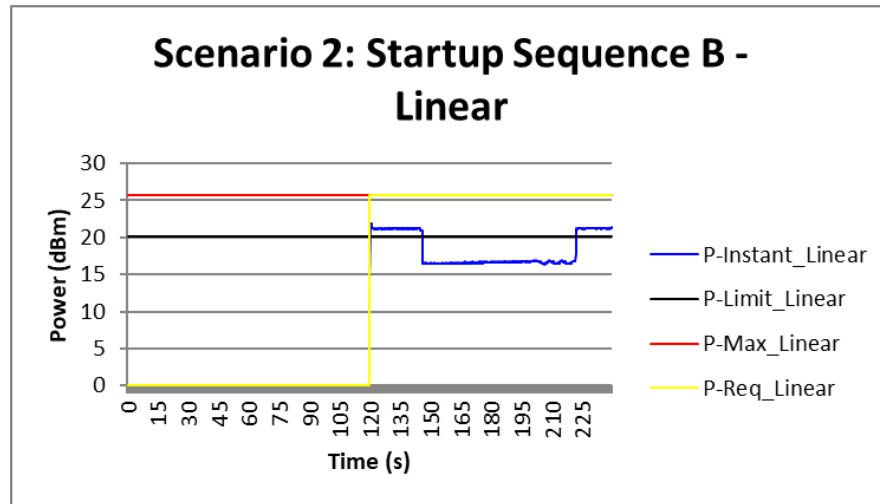


Figure 8-9: Time-averaged conducted TX power over time for Changes in Power case (LTE Band 41 Ant 4 – Test Sequence B)

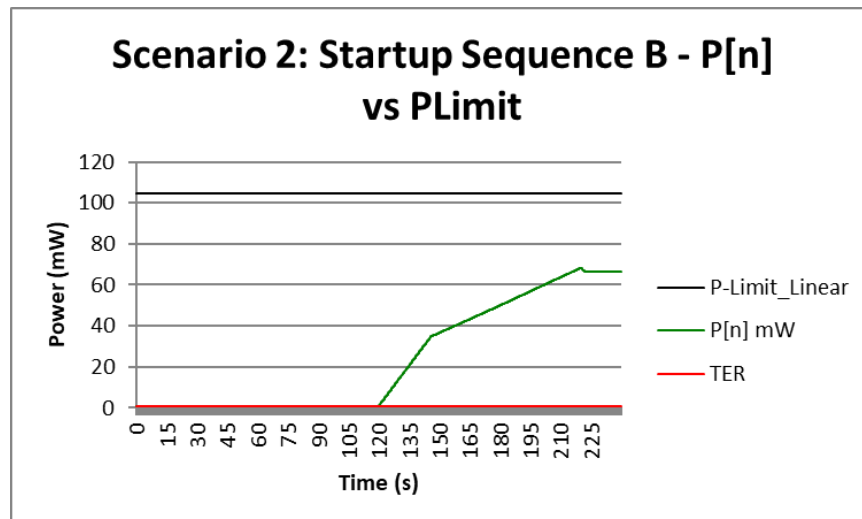


Figure 8-10: Time-averaged Power for Changes in Power case (LTE Band 41 Ant 4 – Test Sequence B)

Plimit (Plimit,nom with uncertainty)	104.71 mW
Max P[n]	68.25 mW
Validation: $P[n] \leq P_{limit}$ for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 38 of 78

© 2026 Element

REV 1.0

05/06/2025

NR n66 SA, Antenna 4

Test result for Test Sequence B

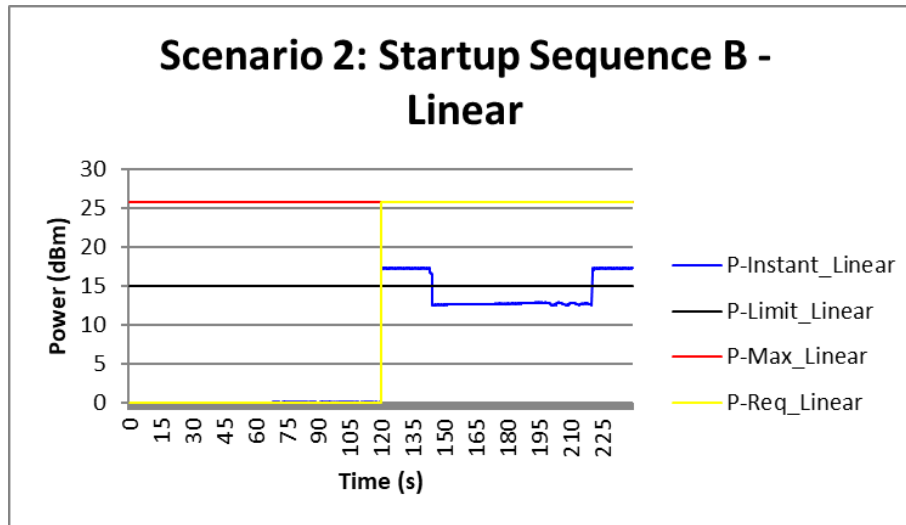


Figure 8-11: Time-averaged conducted TX power over time for Changes in Power case (NR n66 SA Ant 4 – Test Sequence B)

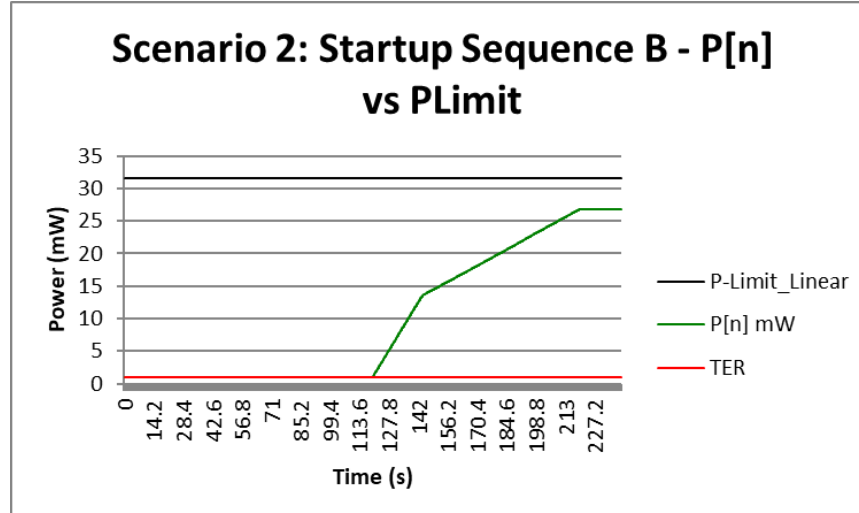


Figure 8-12: Time-averaged Power for Changes in Power case (NR n66 SA Ant 4 – Test Sequence B)

Plimit (Plimit,nom with uncertainty)	31.62 mW
Max P[n]	26.81 mW
Validation: $P[n] \leq P_{limit}$ for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 39 of 78

NR n77 SA, Antenna 3b

Test result for Test Sequence B

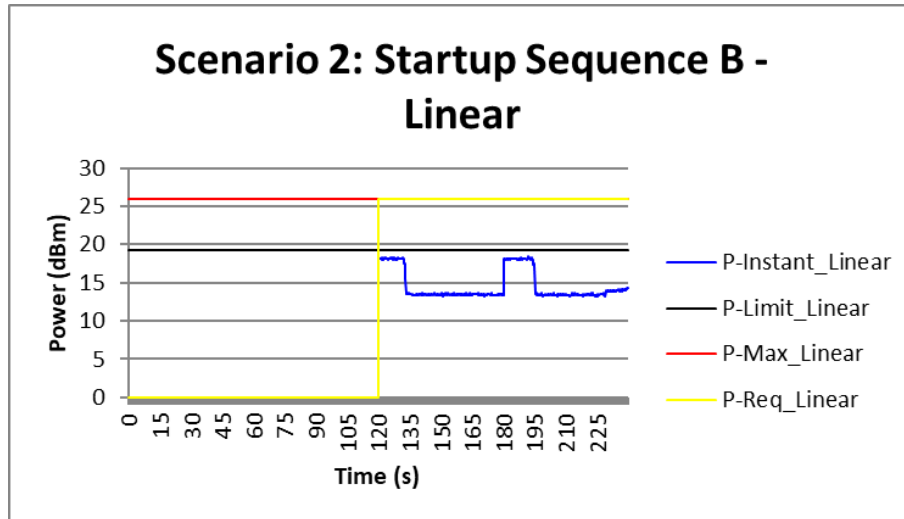


Figure 8-13: Time-averaged conducted TX power over time for Changes in Power case (NR n77 SA Ant 3b – Test Sequence B)

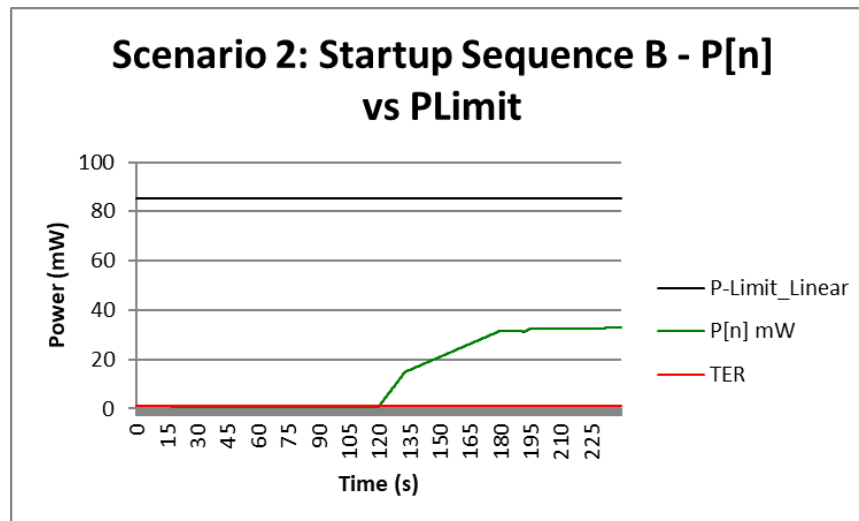


Figure 8-14: Time-averaged Power for Changes in Power case (NR n77 SA Ant 3b – Test Sequence B)

Plimit (Plimit,nom with uncertainty)	85.11 mW
Max P[n]	33.11 mW
Validation: $P[n] \leq P_{limit}$ for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 40 of 78

8.2 Scenario 2: Antenna Switching

In this scenario, maximum TX power is requested by a call box for each RAT, and the antenna change at the EUT side is manually configured at a specific time instance. The test case for this scenario is relegated in Table 7-2, and the test procedure follows section 4.2.2. The measurement setup is shown in Figure 6-1.

This test aims to validate the TAS algorithm with antenna change during the test period for 4G LTE Band 66 to LTE Band 25. The corresponding detailed test procedure is described in section 4.2.2. Figure 8-15 demonstrates the DUT's instantaneous conducted TX power, the requested power over time, P_{limit} , and P_{max} . During the test period, the antenna change event is configured to switch at the time instance 120 seconds. The change is from Ant 3a to Ant 4 and maximum power is requested for the remainder of the test. It is observed in the figure that the rolling power average of the individual RAT is below its own P_{limit} . Figure 8-16 illustrates the corresponding normalized total rolling power average over time by using the equation listed in section 4.1. As seen in this figure, the total normalized rolling power average does not exceed the normalized P_{limit} .

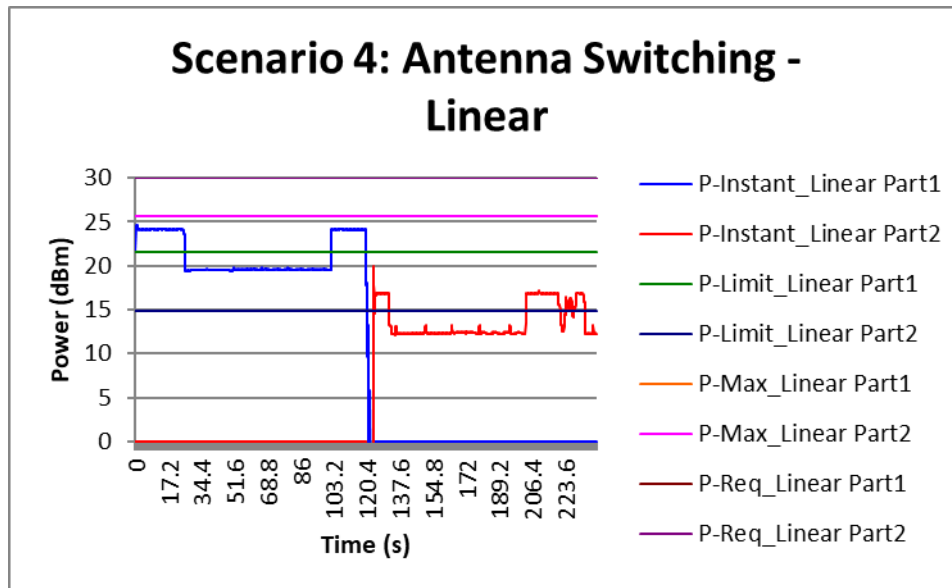


Figure 8-15: Time-averaged conducted TX power over time for Antenna Switch case (Part1 LTE Band 66 Ant 3a to Part2 LTE Band 25 Ant 4)

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 41 of 78

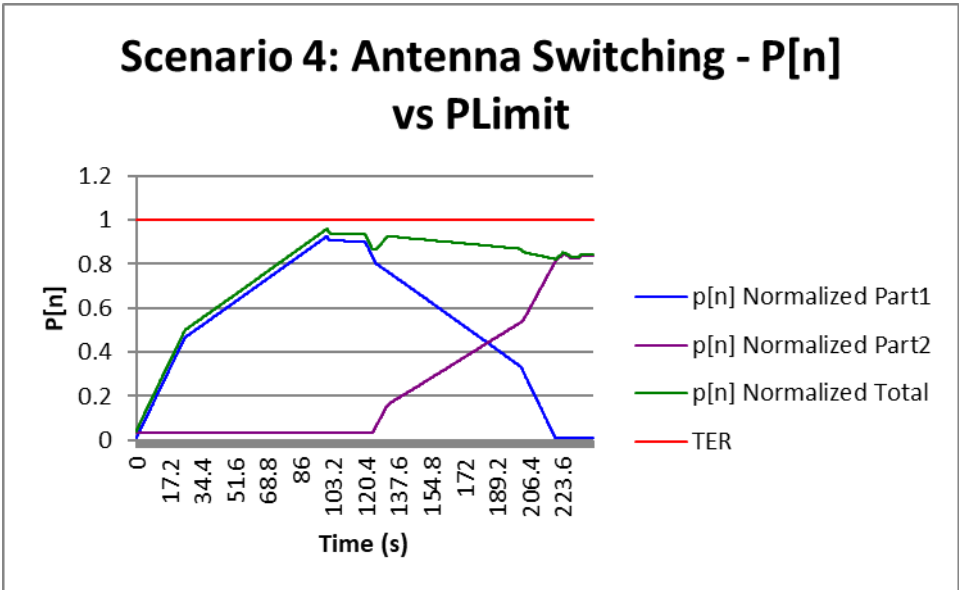


Figure 8-16: Normalized Time-averaged Power for Antenna Switch case (Part1 LTE Band 66 Ant 3a to Part2 LTE Band 25 Ant 4)

Normalized P_{limit}	1.00
Highest normalized P_{avg}	0.959
Validation result: Pass	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 42 of 78

8.3 Scenario 3: Change in Band/Frequency

In this scenario, maximum TX power is requested by a call box for each RAT, and the change in band is manually configured at a specific time instance. The test case covers change in band scenario between two frequencies. The test case for this scenario is relegated in Table 7-2, and the test procedure follows section 4.3.2. The measurement setup is shown in Figure 6-1.

This test aims to validate the TAS algorithm with band change from 4G LTE Band 7 Ant 4 to LTE Band 25 Ant 4. The corresponding detailed test procedure is described in section 4.3.2. Figure 8-17 demonstrates the DUT's instantaneous conducted TX power, the requested power over time, P_{limit} , and P_{max} . The hand-off is configured at the time instance of 120 seconds. It is observed in the figure that the rolling power average of the individual RAT is below its own P_{limit} . Figure 8-18 illustrates the corresponding normalized total rolling power average over time by using the equation listed in section 4.1. Note that in the plots below, Part 1 signifies the measurements for 4G LTE Band 7 Ant 4, while Part 2 signifies the measurements for LTE Band 25 Ant 4. As seen in this figure, the total normalized rolling power average does not exceed the normalized P_{limit} .

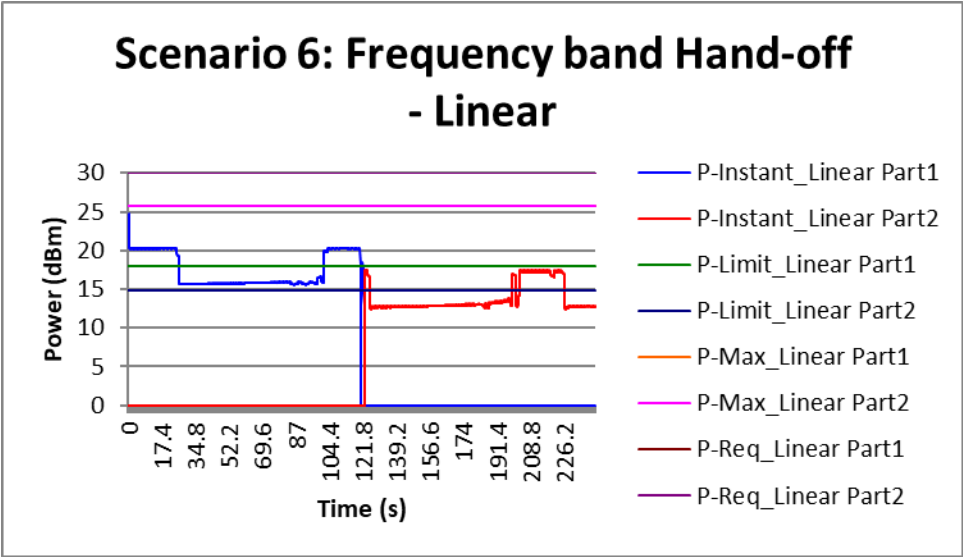


Figure 8-17: Time-averaged conducted TX power over time for Change in Band case (Part1 LTE Band 7 Ant 4 to Part2 LTE Band 25 Ant 4)

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 43 of 78

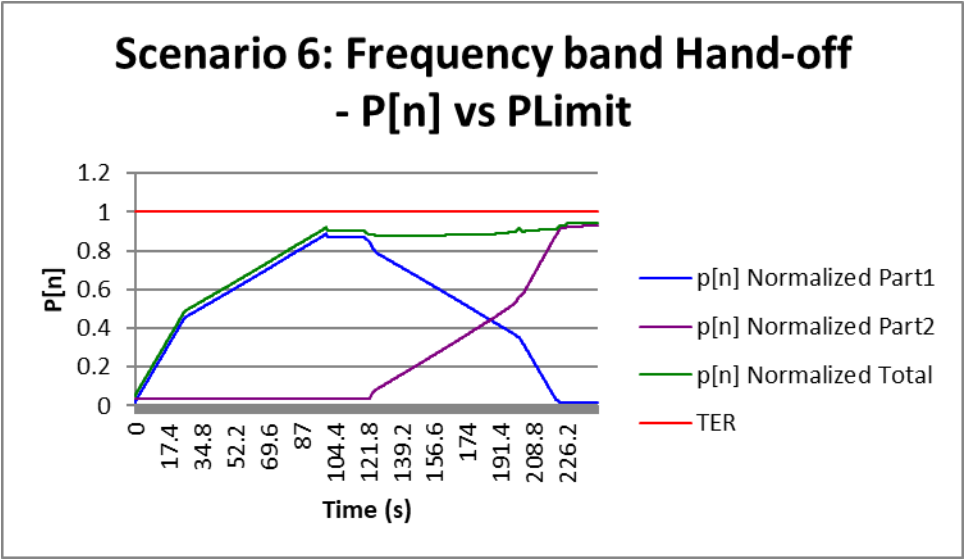


Figure 8-18: Normalized Time-averaged Power for Change in Band case (Part1 LTE Band 7 Ant 4 to Part2 LTE Band 25 Ant 4)

Normalized P_{limit}	1.00
Highest normalized P_{avg}	0.943
Validation result: Pass	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 44 of 78

8.4 Scenario 4: Change in Technology

In this scenario, maximum TX power is requested by a call box for each RAT, and the change in technology is manually configured at a specific time instance. The test case for this scenario is relegated in Table 7-2, and the test procedure follows section 4.4.2. The measurement setup is shown in Figure 6-1.

This test aims to validate the TAS algorithm with change in technology during the test period from 4G LTE Band 7 Ant 4 to WCDMA Band 2 Ant 4. The corresponding detailed test procedure is described in section 4.4.2. Figure 8-19 demonstrates the DUT's instantaneous conducted TX power, the requested power over time, P_{limit} , and P_{max} . The hand-off is configured at the time instance of 120 seconds. It is observed in the figure that the rolling power average of the individual RAT is below its own P_{limit} . Figure 8-20 illustrates the corresponding normalized total rolling power average over time by using the equation listed in section 4.1. Note that in the plots below, Part 1 signifies the measurements for 4G LTE Band 7 Ant 4, while Part 2 signifies the measurements for WCDMA Band 2 Ant 4. As seen in this figure, the total normalized rolling power average does not exceed the normalized P_{limit} .

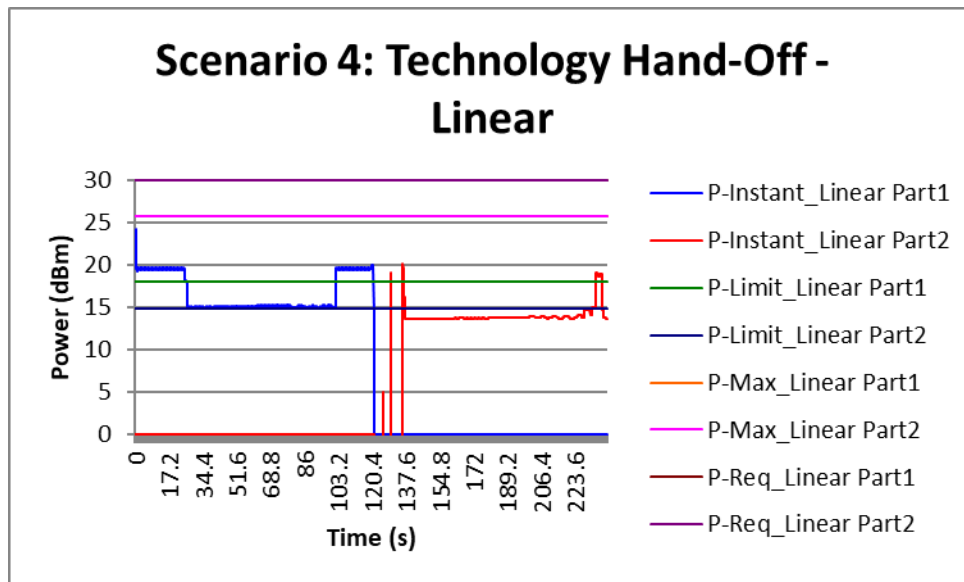


Figure 8-19: Time-averaged conducted TX power over time for Technology Hand-Off case (Part1 LTE Band 7 Ant 4 to Part2 WCDMA Band 2 Ant 4)

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 45 of 78

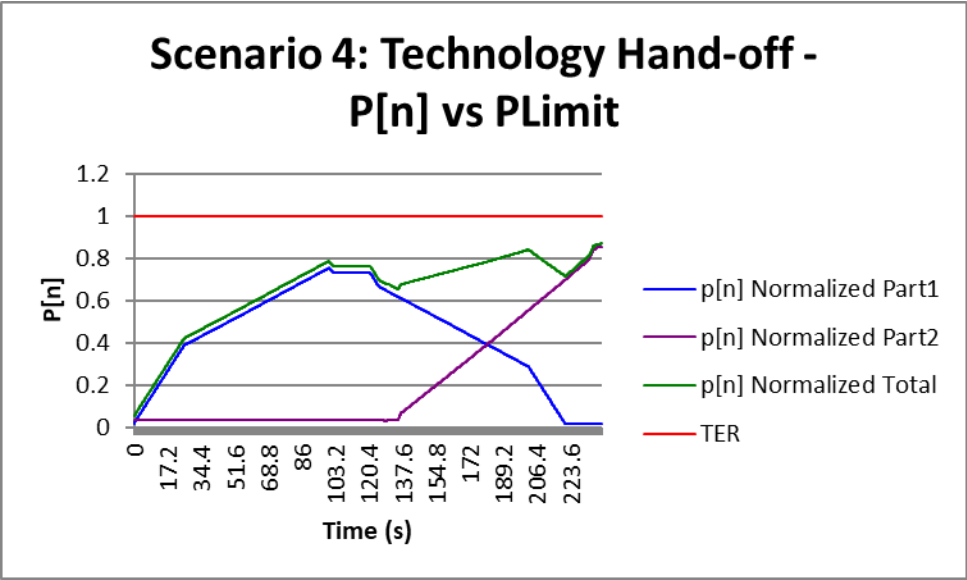


Figure 8-20: Normalized Time-averaged Power for Technology Hand-Off case (Part1 LTE Band 7 Ant 4 to Part2 WCDMA Band 2 Ant 4)

Normalized P_{limit}	1.00
Highest normalized P_{avg}	0.867
Validation result: Pass	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 46 of 78

8.5 Scenario 5: TDD/FDD Switch

In this scenario, maximum TX power is requested by a call box for each RAT, and FDD to TDD switching at the EUT side is manually configured at a specific time instance. The test case for this scenario is relegated in Table 7-2, and the test procedure follows section 4.5.2. The measurement setup is shown in Figure 6-1.

This test aims to validate the TAS algorithm with FDD to TDD switching during the test period from 4G LTE Band 66 Ant 3a to LTE Band 41 PC3 Ant 3a. The corresponding detailed test procedure is described in section 4.5.2. Figure 8-21 demonstrates the DUT's instantaneous conducted TX power, the requested power over time, P_{limit} , and P_{max} . The hand-off is configured at the time instance of 120 seconds. It is observed in the figure that the rolling power average of the individual RAT is below its own P_{limit} . Figure 8-22 illustrates the corresponding normalized total rolling power average over time by using the equation listed in section 4.1. Note that in the plots below, Part 1 signifies the measurements for 4G LTE Band 66 Ant 3a, while Part 2 signifies the measurements for LTE Band 41 PC3 Ant 3a. As seen in this figure, the total normalized rolling power average does not exceed the normalized P_{limit} .

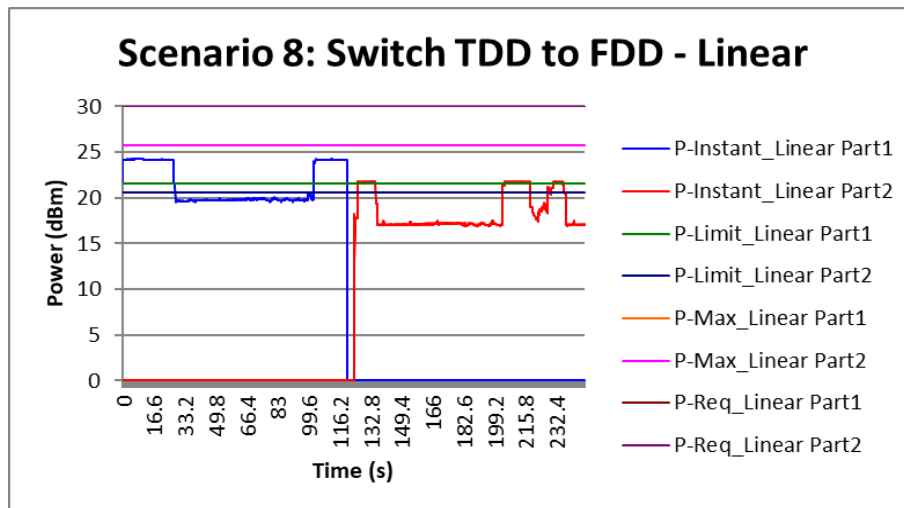


Figure 8-21: Time-averaged conducted TX power over time for TDD/FDD Switch case (Part1 LTE Band 66 Ant 3a to Part2 LTE Band 41 PC3 Ant 3a)

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 47 of 78

© 2026 Element

REV 1.0
05/06/2025

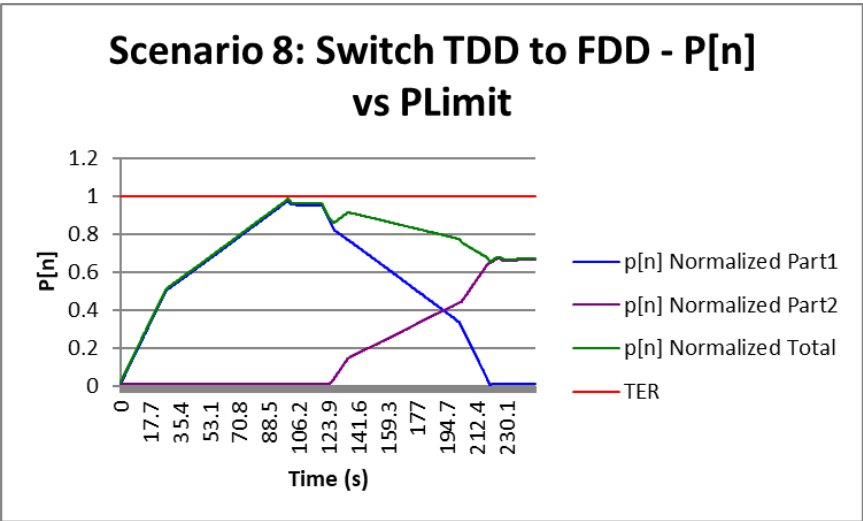


Figure 8-22: Normalized Time-averaged Power for TDD/FDD Switch case (Part1 LTE Band 66 Ant 3a to Part2 LTE Band 41 PC3 Ant 3a)

Normalized P_{limit}	1.00
Highest normalized P_{avg}	0.984
Validation result: Pass	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 48 of 78

8.6 Scenario 6: Call Drop

In this scenario, maximum TX power is requested by a call box for each RAT, and call drop at the EUT side is manually configured at a specific time instance. The test case for this scenario is relegated in Table 7-2, and the test procedure follows section 4.6.2. The measurement setup is shown in Figure 6-1.

This test aims to validate the TA-SAR algorithm with call disconnection during the test period from 4G LTE Band 66 Ant 3a. The corresponding detailed test procedure is described in section 4.6.2. Figure 8-23 demonstrates the DUT's instantaneous conducted TX power, the requested power over time, P_{limit} , and P_{max} . The call disconnection is configured at the time instance of 120 seconds and is configured to re-establish connection after 10 seconds. It is observed in the figure that the rolling power average of the individual RAT is below its own P_{limit} . Figure 8-24 illustrates the corresponding calculated rolling power average over time by using the equation listed in section 4.1. As seen in this figure, the calculated rolling power average does not exceed the normalized P_{limit} .

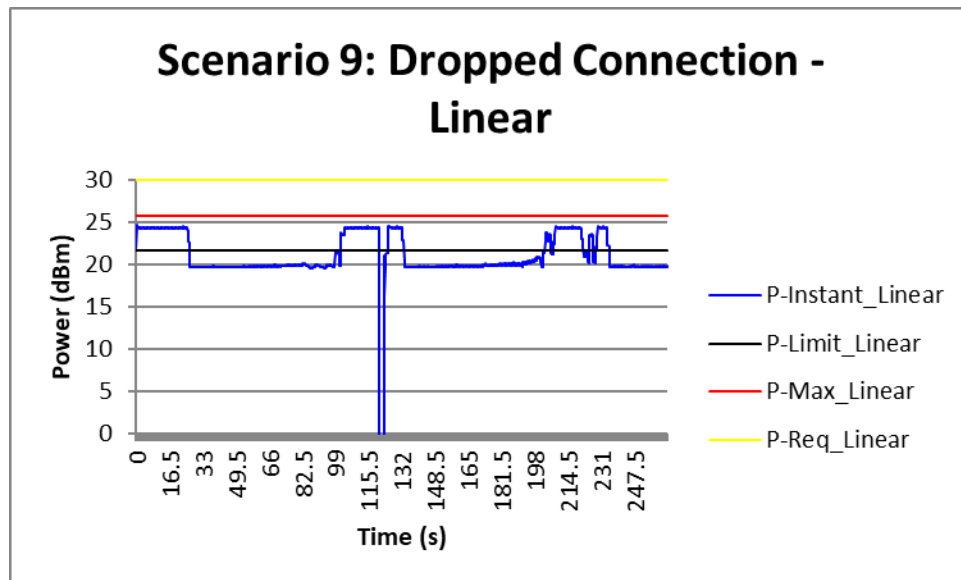


Figure 8-23: Time-averaged conducted TX power over time for Call Disconnection case (LTE Band 66 Ant 3a)

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 49 of 78

© 2026 Element

REV 1.0

05/06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

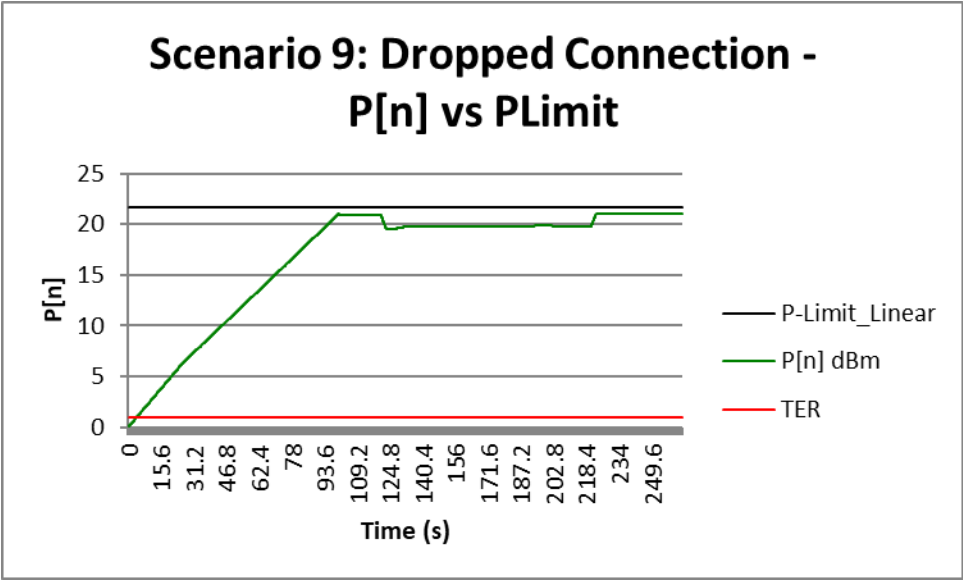


Figure 8-24: Normalized Time-averaged Power for Call Disconnection case (LTE Band 66 Ant 3a)

Plimit (Plimit,nom with uncertainty)	144.54 mW
Max P[n]	141.44 mW
Validation: $P[n] \leq P_{limit}$ for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 50 of 78

8.7 Scenario 7: Time-Varying Tx Power (ENDC)

In this scenario, maximum TX power is requested by a call box for each RAT, and technology hand-off at the EUT side is manually configured at a specific time instance. The test case for this scenario is relegated in Table 7-2, and the test procedure follows section 4.7.1. The measurement setup is shown in Figure 6-1.

This test aims to validate the TA-SAR algorithm with technology hand-off during the test period from LTE Band 5 Ant 4 to NR n66 NSA Ant 3a. The corresponding detailed test procedure is described in section 4.7.1. Figure 8-25 demonstrates the DUT's instantaneous conducted TX power, the time-averaged conducted TX power behavior over time, the P_{limit} , and P_{max} . The hand-off is configured at the time instance of 120 seconds and 240 seconds. It is observed in the figure that the time-averaged TX power of the individual RAT is below its own P_{limit} . Figure 8-26 illustrates the corresponding time-averaged SAR over time converted from the TX time-averaged power by using the equation listed in section 4.1. As seen in this figure, the time-averaged normalized SAR does not exceed the normalized limit of 1.

Note: "Cellular" in this scenario refers to LTE

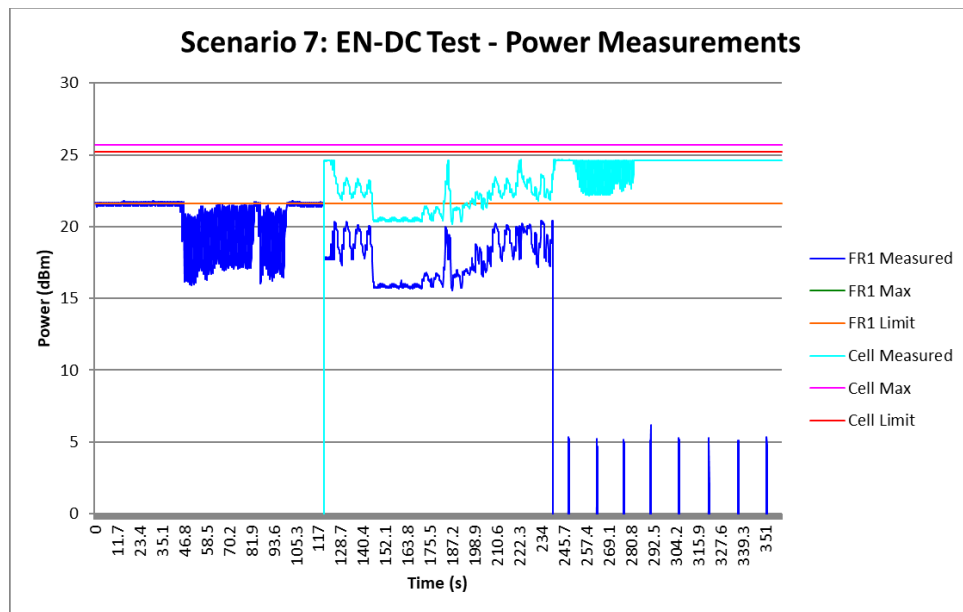


Figure 8-25: Time-averaged conducted TX power over time for Technology Hand-Off (ENDC) case (LTE Band 5 Ant 4 to NR n66 NSA Ant 3a)

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 51 of 78

© 2026 Element

REV 1.0

05/06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

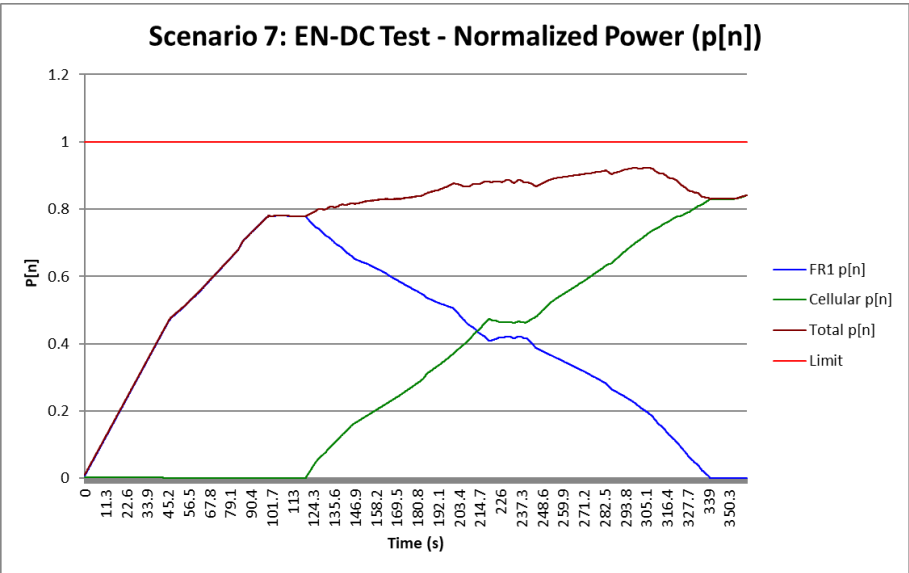


Figure 8-26: Normalized Time-averaged Power for Technology Hand-Off (ENDC) case (LTE Band 5 Ant 4 to NR n66 NSA Ant 3a)

Normalized P_{limit}	1.00
Highest normalized P_{avg}	0.923
Validation: $P[n] \leq P_{limit}$ for all n , that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 52 of 78

8.8 Scenario 8: Time-Varying Tx Power (Inter-Band ULCA)

In this scenario, maximum TX power is requested by a call box for each RAT, and technology hand-off at the EUT side is manually configured at a specific time instance. The test case for this scenario is relegated in Table 7-2, and the test procedure follows section 4.7.2. The measurement setup is shown in Figure 6-1.

This test aims to validate the TA-SAR algorithm with technology hand-off during the test period from LTE Band 5 Ant 4 to LTE Band 2 Ant 3a. The corresponding detailed test procedure is described in section 4.7.2. Figure 8-27 demonstrates the DUT’s instantaneous conducted TX power, the time-averaged conducted TX power behavior over time, the P_{limit} , and P_{max} . The hand-off is configured at the time instance of 160 seconds and 320 seconds. It is observed in the figure that the time-averaged TX power of the individual RAT is below its own P_{limit} . Figure 8-28 illustrates the corresponding time-averaged SAR over time converted from the TX time-averaged power by using the equation listed in section 4.1. As seen in this figure, the time-averaged normalized SAR does not exceed the normalized limit of 1.

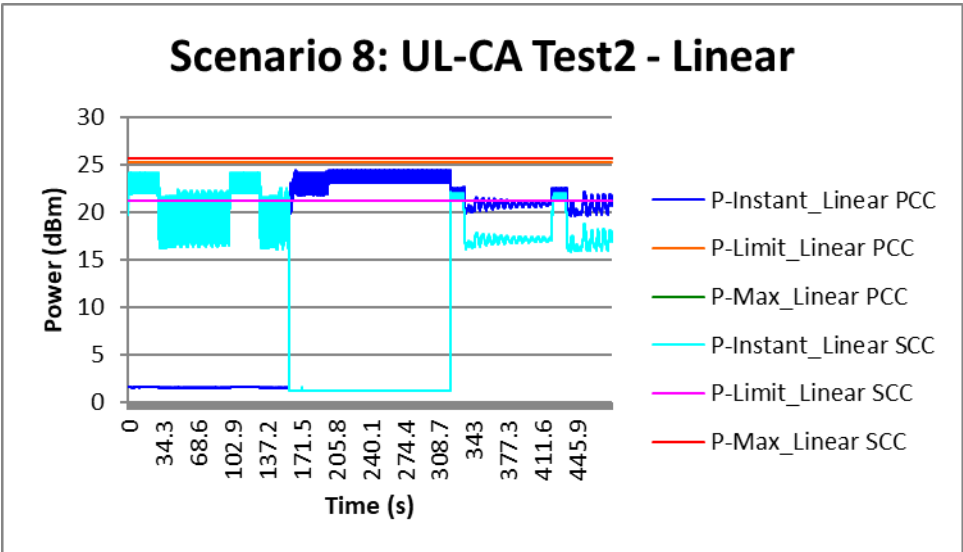


Figure 8-27: Time-averaged conducted TX power over time for Technology Hand-Off case (LTE Band 5 Ant 4 to LTE Band 2 Ant 3a)

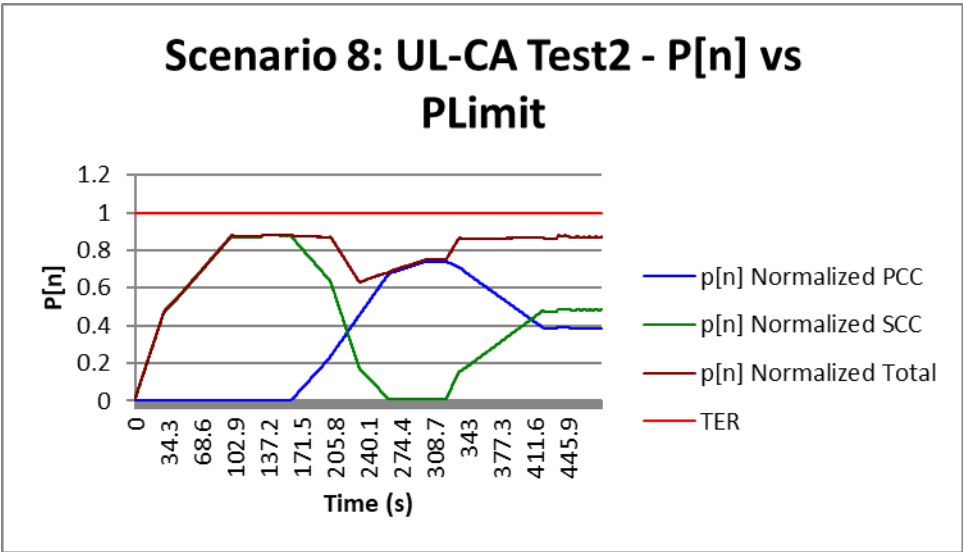


Figure 8-28: Normalized Time-averaged Power for Technology Hand-Off case (LTE Band 5 to LTE Band 2)

Normalized P_{limit}	1.00
Highest normalized P_{avg}	0.883
Validation: $P[n] \leq P_{limit}$ for all n , that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 54 of 78

9. SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
12/16/2025	1750 Head	21.0	1700	1.358	40.283	1.343	40.145	1.12%	0.34%
			1705	1.364	40.283	1.345	40.141	1.41%	0.30%
			1710	1.369	40.284	1.348	40.136	1.66%	0.27%
			1720	1.380	40.284	1.354	40.126	1.90%	0.19%
			1745	1.404	40.082	1.368	40.087	2.63%	-0.01%
			1750	1.408	40.054	1.371	40.079	2.70%	-0.06%
			1770	1.427	39.863	1.383	40.047	3.88%	-0.23%
			1790	1.448	39.883	1.394	40.016	3.67%	-0.38%
			1700	1.292	41.343	1.343	40.145	-3.80%	2.98%
			1705	1.294	41.337	1.345	40.141	-3.79%	2.98%
12/17/2025	1750 Head	21.5	1710	1.297	41.331	1.348	40.136	-3.78%	2.98%
			1720	1.302	41.314	1.354	40.126	-3.64%	2.96%
			1745	1.315	41.246	1.368	40.087	-3.67%	2.90%
			1750	1.318	41.236	1.371	40.079	-3.67%	2.89%
			1770	1.330	41.130	1.383	40.047	-3.62%	2.86%
			1790	1.341	41.173	1.394	40.016	-3.80%	2.88%
			1850	1.335	40.217	1.400	40.000	-4.64%	0.75%
			1880	1.340	40.201	1.400	40.000	-4.29%	0.75%
			1890	1.345	40.246	1.400	40.000	-3.64%	0.62%
			1900	1.356	40.186	1.400	40.000	-3.14%	0.46%
12/15/2025	1900 Head	19.0	1905	1.358	40.170	1.400	40.000	-3.00%	0.43%
			1910	1.361	40.154	1.400	40.000	-2.79%	0.39%
			1920	1.366	40.126	1.400	40.000	-2.42%	0.31%
			1950	1.339	40.523	1.400	40.000	-4.36%	1.31%
			1880	1.346	40.503	1.400	40.000	-3.86%	1.26%
			1890	1.358	40.499	1.400	40.000	-3.00%	1.17%
			1900	1.368	40.446	1.400	40.000	-2.29%	1.09%
			1925	1.371	40.432	1.400	40.000	-2.07%	0.81%
			1910	1.373	40.423	1.400	40.000	-1.93%	1.06%
			1920	1.379	40.404	1.400	40.000	-1.50%	1.01%
12/15/2025	2450 Head	19.0	2300	1.641	39.650	1.670	39.500	-1.74%	0.38%
			2310	1.646	39.621	1.678	39.460	-1.97%	0.38%
			2320	1.651	39.589	1.687	39.400	-2.13%	0.33%
			2400	1.729	39.429	1.756	39.289	-1.54%	0.36%
			2450	1.763	39.296	1.800	39.200	-2.06%	0.50%
			2480	1.778	39.239	1.833	39.162	-2.11%	0.25%
			2500	1.790	39.183	1.855	39.136	-3.50%	0.12%
			2510	1.800	39.162	1.866	39.123	-3.54%	0.10%
			2535	1.830	39.146	1.893	39.092	-3.33%	0.14%
			2550	1.846	39.143	1.909	39.073	-3.42%	0.18%
			2560	1.855	39.138	1.920	39.060	-3.39%	0.20%
			2600	1.879	39.044	1.964	39.009	-4.33%	0.09%
			2650	1.924	38.938	2.018	38.945	-4.66%	-0.02%
			2680	1.935	38.916	2.051	38.907	-4.68%	0.02%
			2700	1.972	38.869	2.073	38.882	-4.67%	0.02%
			2300	1.688	38.993	1.670	39.500	1.08%	-1.28%
			2310	1.700	38.958	1.679	39.480	1.25%	-1.32%
			2320	1.711	38.926	1.687	39.460	1.42%	-1.36%
			2400	1.790	38.600	1.756	39.289	2.45%	-1.75%
1/17/2026	2450 Head	24.5	2450	1.857	38.408	1.800	39.200	3.17%	-2.02%
			2480	1.890	38.296	1.833	39.162	3.11%	-2.29%
			2500	1.913	38.176	1.855	39.136	3.13%	-2.46%
			2510	1.925	38.139	1.868	39.123	3.16%	-2.52%
			2535	1.954	38.047	1.880	39.092	3.22%	-2.67%
			2550	1.970	37.987	1.909	39.073	3.20%	-2.75%
			2560	1.981	37.959	1.920	39.060	3.18%	-2.82%
			2600	2.027	37.770	1.964	39.009	3.21%	-3.18%
			2650	2.085	37.588	2.018	38.945	3.32%	-3.48%
			2680	2.118	37.467	2.051	38.907	3.27%	-3.79%
			2700	2.139	37.373	2.073	38.882	3.18%	-3.88%
			3300	2.599	39.288	2.708	38.157	-4.02%	2.96%
			3350	2.648	39.215	2.759	38.100	-4.02%	2.93%
			3450	2.740	39.021	2.861	37.986	-4.23%	2.72%
			3500	2.784	38.901	2.913	37.929	-4.43%	2.56%
			3550	2.839	38.818	2.964	37.871	-4.22%	2.53%
			3600	2.847	38.831	2.974	37.860	-4.27%	2.56%
			3600	2.884	38.760	3.015	37.814	-4.34%	2.50%
			3650	2.940	38.672	3.066	37.757	-4.11%	2.42%
12/4/2025	3600 Head	19.0	3690	2.983	38.614	3.107	37.711	-3.98%	2.39%
			3700	2.993	38.592	3.117	37.700	-3.98%	2.37%
			3750	3.050	38.495	3.169	37.643	-3.76%	2.26%
			3800	3.212	38.254	3.323	37.471	-3.34%	2.09%
			3830	3.255	38.188	3.353	37.407	-3.92%	2.01%
			4100	3.451	37.959	3.528	37.243	-2.18%	1.92%
			4150	3.504	37.876	3.579	37.186	-2.10%	1.84%
			4350	3.717	37.557	3.781	36.943	-1.69%	1.66%
			4400	3.781	37.490	3.833	36.886	-1.36%	1.53%
			4450	3.817	37.324	3.884	36.829	-1.70%	1.34%
			4500	3.888	37.209	3.936	36.771	-1.22%	1.19%
			4550	3.933	37.140	3.987	36.714	-1.35%	1.16%
			4600	3.985	36.991	4.039	36.657	-1.34%	0.91%
			4650	4.045	36.865	4.090	36.600	-1.10%	0.81%
			4700	4.101	36.768	4.141	36.543	-0.97%	0.62%
			4750	4.166	36.695	4.193	36.486	-0.64%	0.46%
			4800	4.227	36.536	4.244	36.429	-0.40%	0.35%
			4850	4.284	36.451	4.296	36.371	-0.28%	0.22%
			4900	4.359	36.342	4.347	36.314	0.28%	0.08%
			4950	4.428	36.285	4.399	36.257	0.69%	0.02%
			5000	4.482	36.154	4.450	36.200	0.72%	-0.13%

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 55 of 78



Table 9-2
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ'	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ'	% dev σ	% dev ϵ'
12/9/2025	3600 Head	19.0	3300	2.698	38.281	2.708	38.157	-3.69%	2.95%
			3350	2.653	38.175	2.759	38.100	-3.64%	2.82%
			3450	2.734	38.933	2.861	37.986	-4.44%	2.49%
			3500	2.777	38.730	2.913	37.929	-4.67%	2.29%
			3550	2.830	38.700	2.964	37.871	-4.52%	2.19%
			3600	2.839	38.676	2.974	37.860	-4.54%	2.16%
			3600	2.877	38.595	3.015	37.814	-4.58%	2.04%
			3650	2.925	38.485	3.066	37.757	-4.60%	1.93%
			3690	2.959	38.467	3.107	37.711	-4.45%	1.85%
			3700	2.979	38.389	3.117	37.700	-4.43%	1.83%
			3750	3.035	38.293	3.189	37.643	-4.23%	1.72%
			3800	3.197	38.072	3.323	37.471	-3.75%	1.60%
			3900	3.229	38.053	3.353	37.437	-3.43%	1.59%
			4100	3.420	37.817	3.528	37.243	-3.06%	1.54%
			4150	3.473	37.710	3.579	37.186	-2.96%	1.41%
			4350	3.688	37.363	3.761	36.943	-2.46%	1.14%
			4400	3.746	37.288	3.833	36.886	-2.27%	1.04%
			4450	3.787	37.140	3.884	36.829	-2.50%	0.84%
			4500	3.851	37.015	3.936	36.771	-2.16%	0.66%
			4550	3.902	36.925	3.987	36.714	-2.13%	0.57%
			4600	3.959	36.817	4.038	36.657	-1.98%	0.44%
			4650	4.007	36.714	4.090	36.600	-2.03%	0.31%
			4700	4.069	36.575	4.141	36.543	-1.74%	0.09%
			4750	4.129	36.502	4.193	36.486	-1.53%	0.04%
			4800	4.191	36.394	4.244	36.429	-1.26%	-0.12%
			4850	4.248	36.306	4.295	36.371	-1.12%	-0.18%
			4900	4.313	36.183	4.347	36.314	-0.78%	-0.36%
			4950	4.381	36.120	4.399	36.257	-0.41%	-0.38%
			5000	4.437	36.031	4.450	36.200	-0.29%	-0.47%
12/21/2025	3600 Head	19.0	3300	2.620	38.287	2.708	38.157	-3.25%	2.91%
			3350	2.680	38.219	2.759	38.100	-2.86%	2.94%
			3450	2.756	39.037	2.861	37.986	-3.67%	2.77%
			3500	2.788	38.885	2.913	37.929	-4.29%	2.47%
			3550	2.857	38.814	2.964	37.871	-3.61%	2.49%
			3600	2.864	38.812	2.974	37.860	-3.70%	2.51%
			3600	2.884	38.696	3.015	37.814	-4.34%	2.33%
			3650	2.944	38.554	3.066	37.757	-3.98%	2.11%
			3690	2.981	38.533	3.107	37.711	-4.06%	2.18%
			3700	2.988	38.501	3.117	37.700	-4.14%	2.13%
			3750	3.050	38.352	3.189	37.643	-3.76%	1.88%
			3800	3.211	38.135	3.323	37.471	-3.37%	1.63%
			3900	3.251	38.074	3.353	37.437	-3.04%	1.70%
			4100	3.438	37.910	3.528	37.243	-2.55%	1.79%
			4150	3.478	37.796	3.579	37.186	-2.62%	1.53%
			3300	2.597	38.638	2.708	38.157	-4.10%	1.78%
			3350	2.642	38.542	2.759	38.100	-4.24%	1.69%
			3450	2.735	38.547	2.861	37.986	-4.37%	1.48%
			3500	2.780	38.434	2.913	37.929	-4.57%	1.33%
			3550	2.833	38.357	2.964	37.871	-4.42%	1.28%
			3600	2.842	38.336	2.974	37.860	-4.44%	1.26%
			3600	2.879	38.248	3.015	37.814	-4.51%	1.15%
			3650	2.930	38.169	3.066	37.757	-4.44%	1.09%
			3690	2.967	38.101	3.107	37.711	-4.51%	1.03%
			3700	2.977	38.080	3.117	37.700	-4.48%	1.01%
			3750	3.030	37.996	3.189	37.643	-4.39%	0.94%
			3800	3.187	37.736	3.323	37.471	-4.09%	0.69%
			3900	3.219	37.681	3.353	37.437	-4.00%	0.65%
			4100	3.403	37.580	3.528	37.243	-3.54%	0.99%
			4150	3.456	37.588	3.579	37.186	-3.44%	0.27%
1/15/2026	3600 Head	19.0	3300	2.620	38.287	2.708	38.157	-3.25%	2.91%
			3350	2.680	38.219	2.759	38.100	-2.86%	2.94%
			3450	2.756	39.037	2.861	37.986	-3.67%	2.77%
			3500	2.788	38.885	2.913	37.929	-4.29%	2.47%
			3550	2.857	38.814	2.964	37.871	-3.61%	2.49%
			3600	2.864	38.812	2.974	37.860	-3.70%	2.51%
			3600	2.884	38.696	3.015	37.814	-4.34%	2.33%
			3650	2.944	38.554	3.066	37.757	-3.98%	2.11%
			3690	2.981	38.533	3.107	37.711	-4.06%	2.18%
			3700	2.988	38.501	3.117	37.700	-4.14%	2.13%
			3750	3.050	38.352	3.189	37.643	-3.76%	1.88%
			3800	3.211	38.135	3.323	37.471	-3.37%	1.63%
			3900	3.251	38.074	3.353	37.437	-3.04%	1.70%
			4100	3.438	37.910	3.528	37.243	-2.55%	1.79%
			4150	3.478	37.796	3.579	37.186	-2.62%	1.53%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix C.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 56 of 78

Table 9-3
System Verification Results – 1g

System Verification TARGET & MEASURED													
SAR System	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp. (C)	Liquid Temp. (C)	Input Power (W)	Source SN	Probe SN	DAE	Measured SAR 1g (W/kg)	1W Target SAR 1g (W/kg)	1W Normalized SAR 1g (W/kg)	Deviation 1g (%)
AM13	1750	HEAD	12/16/2025	23.0	19.3	0.10	1040	7421	604	3.820	36.300	38.200	5.23%
AM3	1750	HEAD	12/17/2025	22.5	21.9	0.10	1083	7552	1676	3.570	36.500	35.700	-2.19%
AM15	1900	HEAD	12/15/2025	19.1	19.0	0.10	5d131	7638	467	4.100	39.800	41.000	3.02%
AM15	1900	HEAD	12/17/2025	21.1	19.1	0.10	5d180	7638	467	4.210	39.200	42.100	7.40%
AM15	2450	HEAD	12/15/2025	19.1	19.0	0.10	750	7638	467	5.430	53.300	54.300	1.88%
AM16	2450	HEAD	01/17/2026	19.8	23.0	0.10	855	7532	501	5.380	53.300	53.800	0.94%
AM15	2600	HEAD	12/15/2025	19.1	19.0	0.10	1042	7638	467	5.550	54.900	55.500	1.09%
AM16	2600	HEAD	01/17/2026	19.8	23.0	0.10	1068	7532	501	5.680	56.100	56.800	1.25%
AM3	3500	HEAD	12/09/2025	22.1	20.4	0.10	1126	7552	1676	6.640	66.200	66.400	0.30%
AM3	3500	HEAD	01/15/2026	21.1	20.3	0.10	1055	7552	1676	6.860	65.100	68.600	5.38%
AM3	3700	HEAD	12/09/2025	22.1	20.4	0.10	1097	7552	1676	6.900	67.900	69.000	1.62%
AM3	3700	HEAD	01/15/2026	21.1	20.3	0.10	1097	7552	1676	6.700	67.900	67.000	-1.33%
AM3	3900	HEAD	12/21/2025	20.0	20.0	0.10	1062	7552	1676	7.240	68.700	72.400	5.39%
AM3	3900	HEAD	01/15/2026	21.1	20.3	0.10	1062	7552	1676	7.030	68.700	70.300	2.33%

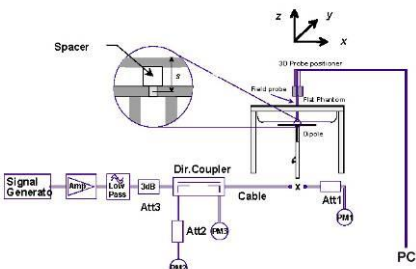


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 57 of 78

10. SAR TEST RESULTS

10.1 SAR Measurement Results for Test Case 1: Time-varying TX power transmission

In this scenario, the TAS algorithm is tested under more dynamic power test sequences. Test sequences A, B, and pseudo-random are tabulated in Appendix E. All the test cases for this scenario are relegated in Table 7-2, and the test procedure follows section 4.8.2. The following sections will demonstrate case-by-case to show how the TAS algorithm behaves for each RAT.

The test case for 3G WCDMA are conducted under WCDMA Band 2, the test cases for 4G LTE are conducted under LTE bands B66 and B41, and the test cases for 5G NR are conducted under NR bands n66 and n77. The corresponding detailed test procedure is described in section 4.1.2. For the figure set of each case, the first figure demonstrates the DUT's instantaneous conducted TX power, the time-averaged conducted TX power behavior over time, the P_{limit} , and P_{max} . The second figure illustrates the corresponding time-averaged SAR over time converted from the TX time-averaged power by using equation 2a in section 4.1. For all test cases, the time-averaged SAR does not exceed the FCC limit.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 58 of 78

© 2026 Element

REV 1.0
05/06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

WCDMA Band 2, Antenna 2b

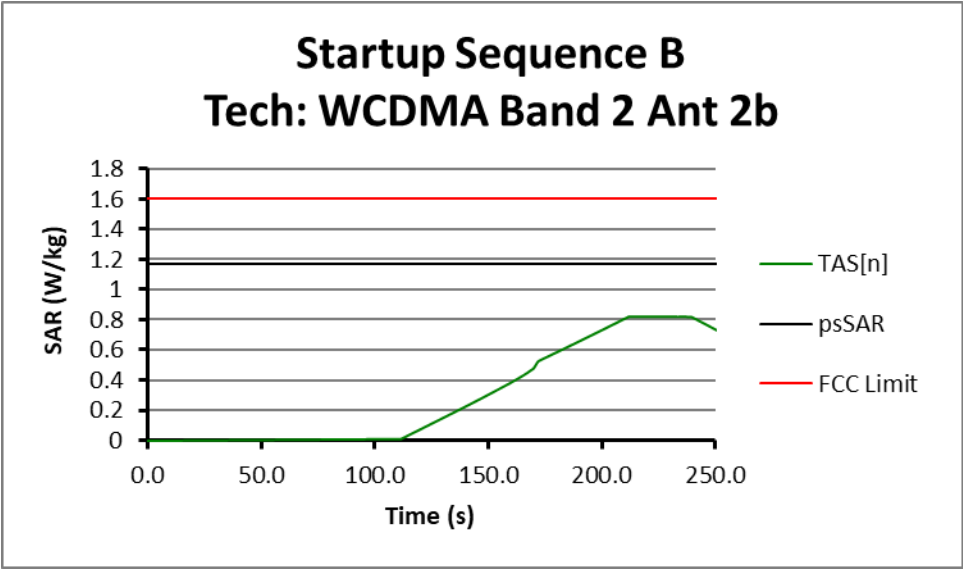


Figure 10-1: Time-averaged SAR for Change in Requested Power case (WCDMA Band 2 – Test Sequence B)

FCC 1gSAR limit	1.60 W/kg
psSAR (including all applicable tolerances and uncertainties)	1.17 W/kg
Max TAS[n] 100s Time-Averaged 1gSAR	0.817 W/kg
Validation: TAS[n] ≤ reported psSAR for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 59 of 78

LTE Band 66, Antenna 4

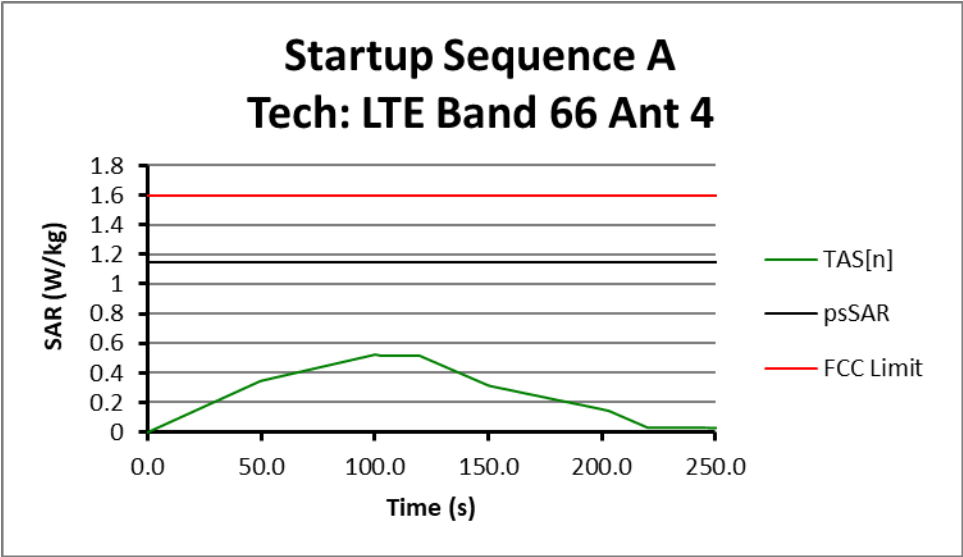


Figure 10-2: Time-averaged SAR for Change in Requested Power case (LTE Band 66 – Test Sequence A)

FCC 1gSAR limit	1.60 W/kg
psSAR (including all applicable tolerances and uncertainties)	1.15 W/kg
Max TAS[n] 100s Time-Averaged 1gSAR	0.527 W/kg
Validation: TAS[n] ≤ reported psSAR for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 60 of 78

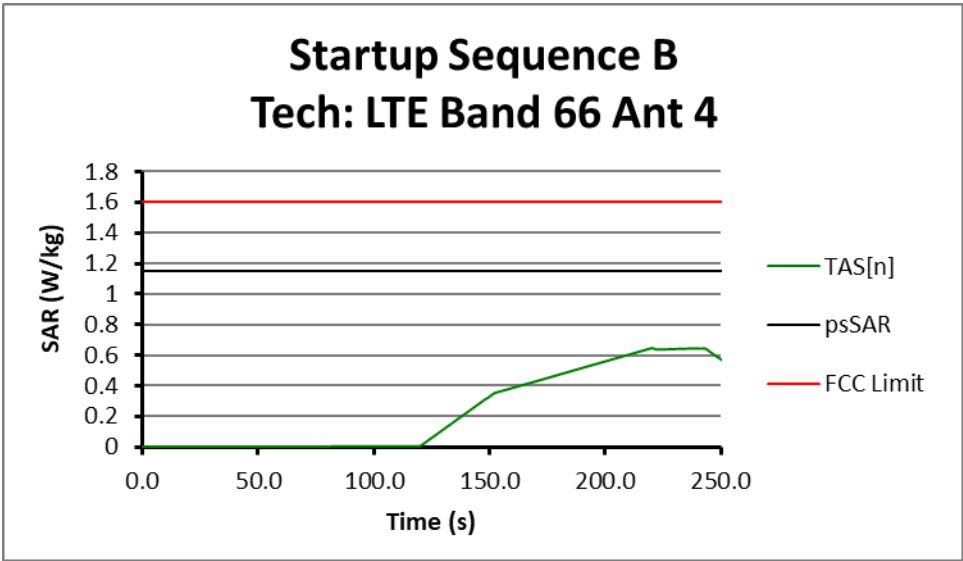


Figure 10-3: Time-averaged SAR for Change in Requested Power case (LTE Band 66 – Test Sequence B)

FCC 1gSAR limit	1.60 W/kg
psSAR (including all applicable tolerances and uncertainties)	1.15 W/kg
Max TAS[n] 100s Time-Averaged 1gSAR	0.646 W/kg
Validation: TAS[n] ≤ reported psSAR for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 61 of 78

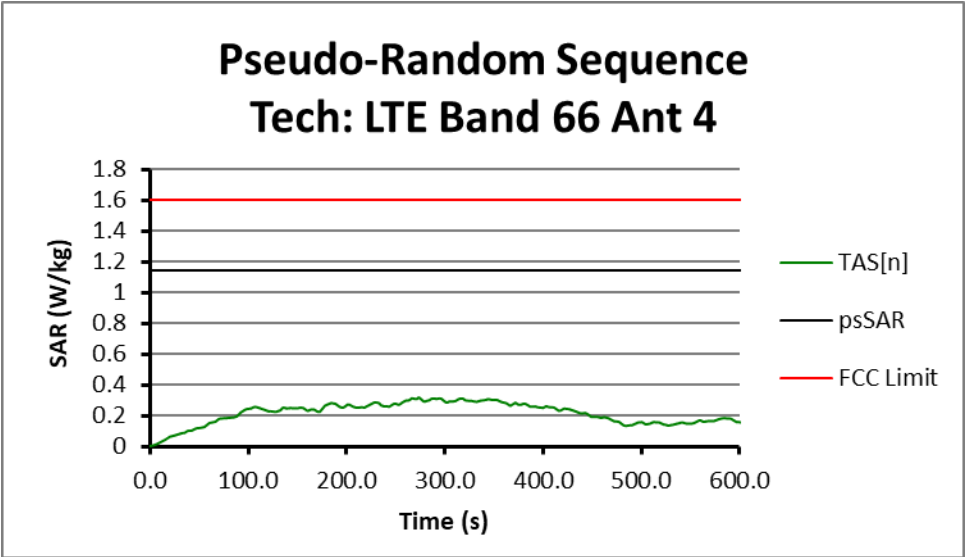


Figure 10-4: Time-averaged SAR for Change in Requested Power case (LTE Band 66 – Pseudo-Random Test Sequence)

FCC 1gSAR limit	1.60 W/kg
psSAR (including all applicable tolerances and uncertainties)	1.15 W/kg
Max TAS[n] 100s Time-Averaged 1gSAR	0.318 W/kg
Validation: TAS[n] ≤ reported psSAR for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 62 of 78

LTE Band 41, Antenna 4

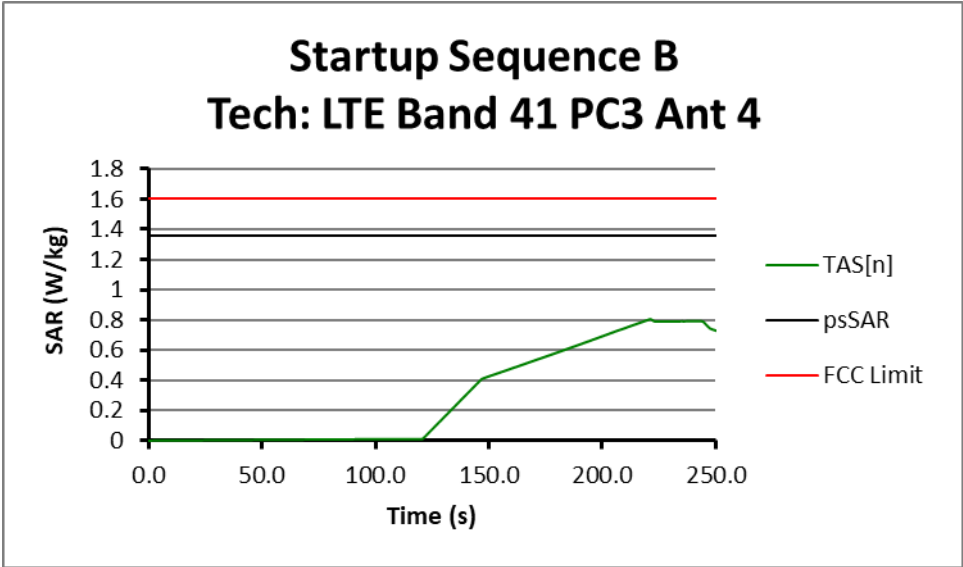


Figure 10-5: Time-averaged SAR for Change in Requested Power case (LTE Band 41 – Test Sequence B)

FCC 1gSAR limit	1.60 W/kg
psSAR (including all applicable tolerances and uncertainties)	1.35 W/kg
Max TAS[n] 100s Time-Averaged 1gSAR	0.806 W/kg
Validation: TAS[n] ≤ reported psSAR for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 63 of 78

NR n66 SA, Antenna 4

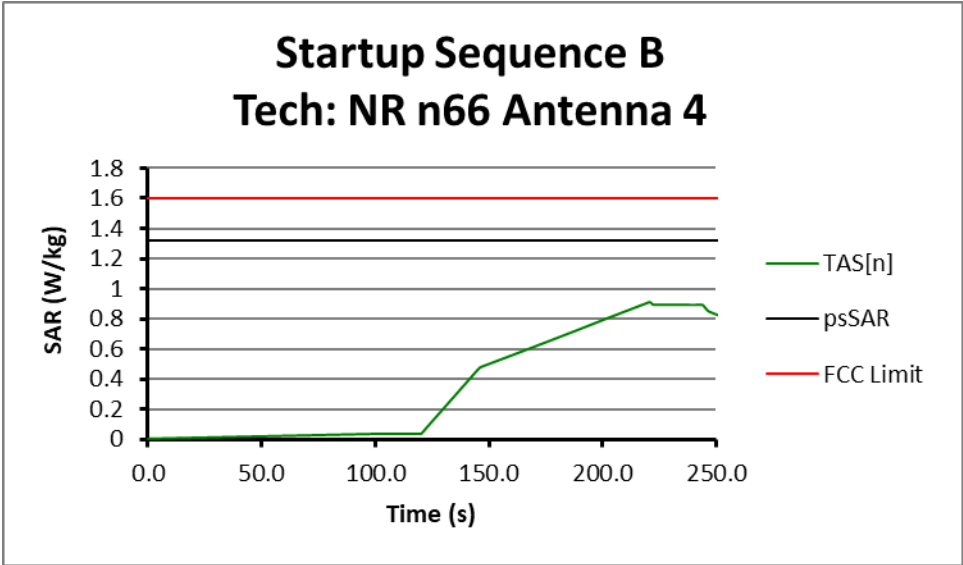


Figure 10-6: Time-averaged SAR for Change in Requested Power case (NR n66 SA – Test Sequence B)

FCC 1gSAR limit	1.60 W/kg
psSAR (including all applicable tolerances and uncertainties)	1.32 W/kg
Max TAS[n] 100s Time-Averaged 1gSAR	0.913 W/kg
Validation: TAS[n] ≤ reported psSAR for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 64 of 78

NR n77 SA, Antenna 3b

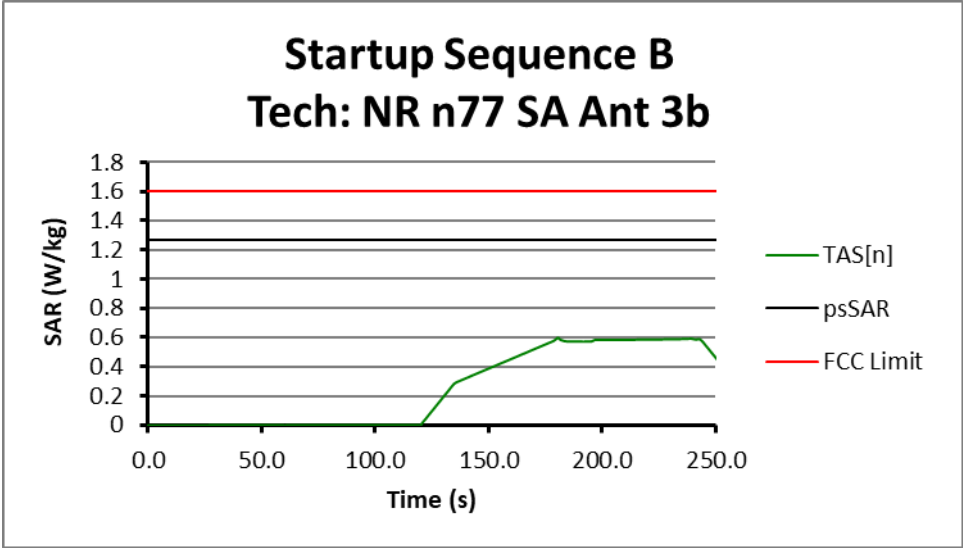


Figure 10-7: Time-averaged SAR for Change in Requested Power case (NR n77 SA – Test Sequence B)

FCC 1gSAR limit	1.60 W/kg
psSAR (including all applicable tolerances and uncertainties)	1.27 W/kg
Max TAS[n] 60s Time-Averaged 1gSAR	0.598 W/kg
Validation: TAS[n] ≤ reported psSAR for all n, that is for every time step associated with the test	

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 65 of 78

11. LINEARITY VALIDATION

11.1 Measurement Results for Linearity Validation: Time-varying TX power transmission via Single Point SAR Measurements

To validate linearity, point SAR measurements are performed with TAS operation turned off. Per antenna, the mode with the largest difference between P_{limit} and P_{max} will be selected for measurement. When possible, different frequency bands will be assessed per antenna.

Point SAR measurements are performed in 2dB step intervals from P_{max} to P_{limit} minus 4dB.

Linearity is sufficiently validated when the SAR versus requested power is within the defined device parameters.

Note: The upper and lower bounds (dash lines) correspond to the conducted power tolerance of each technology/band/antenna.

Table 11-1
Linearity Validation Configurations

Linearity Validation					
	Antenna	Band	Pmax [dBm]	Plimit [dBm]	Pmax - Plimit delta [dBm]
	1a	NR Band n77 sub-band A (PC2)	26.5	19.6	6.9
	1b	LTE Band 41 (PC2)	28.2	20.1	8.1
	2a	NR Band n77 sub-band C (PC2)	26.9	16.6	10.3
	2b	LTE Band 41 (PC2)	28.2	16.5	11.7
	3a	LTE Band 41 (PC2)	27.7	18.6	9.1
	3b	NR Band n77 sub-band C (PC2)	26.5	16.1	10.4
	4	LTE Band 25	25.7	14.8	10.9

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 66 of 78

Table 11-2
NR Band n77 sub-band A (PC2) Ant 1a Linearity Validation Results

Ant 1a: NR Band n77 sub-band A (PC2) - [Ch. 633334]				
Nominal Power (dBm)	Power (mW)	Time-Averaged SAR (W/kg)	Lower Bound (-1.1 dB)	Upper Bound (+1.1 dB)
26.50	446.68	5.200	4.50	7.47
24.50	281.84	3.510	2.84	4.71
22.50	177.83	2.230	1.79	2.98
20.50	112.20	1.410	1.13	1.88
18.50	70.79	0.891	0.71	1.19
16.50	44.67	0.560	0.45	0.75
14.50	28.18	0.353	0.29	0.48

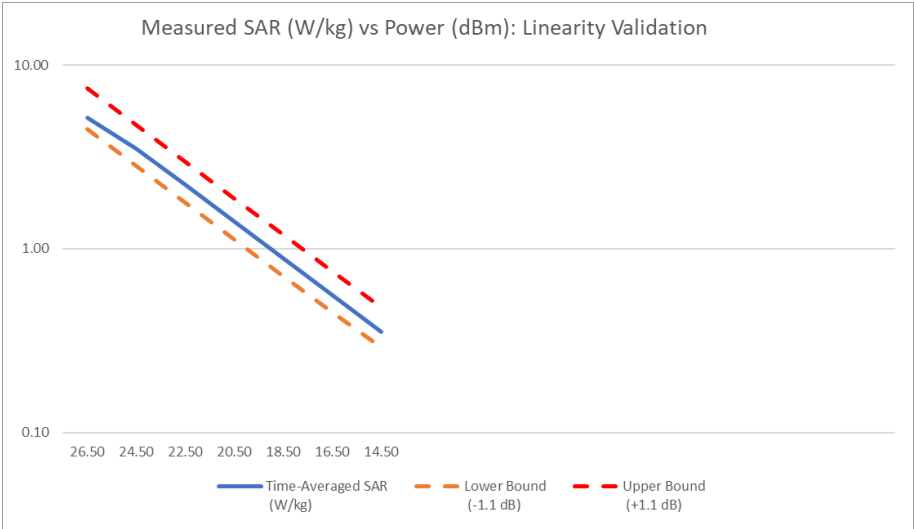


Figure 11-1
NR Band n77 sub-band A (PC2) Ant 1a Linearity Validation Results

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 67 of 78

Table 11-3
LTE Band 41 PC2 Ant 1b Linearity Validation Results

Ant 1b: LTE Band 41 (PC2) - [Ch. 40620]				
Nominal Power (dBm)	Power (mW)	Time-Averaged SAR (W/kg)	Lower Bound (-1.2 dB)	Upper Bound (+1.2 dB)
28.20	660.69	1.510	1.20	2.08
26.20	416.87	1.190	0.76	1.32
24.20	263.03	0.762	0.48	0.83
22.20	165.96	0.478	0.30	0.53
20.20	104.71	0.302	0.19	0.33
18.20	66.07	0.189	0.12	0.21
16.20	41.69	0.119	0.08	0.13
14.20	26.30	0.074	0.05	0.08

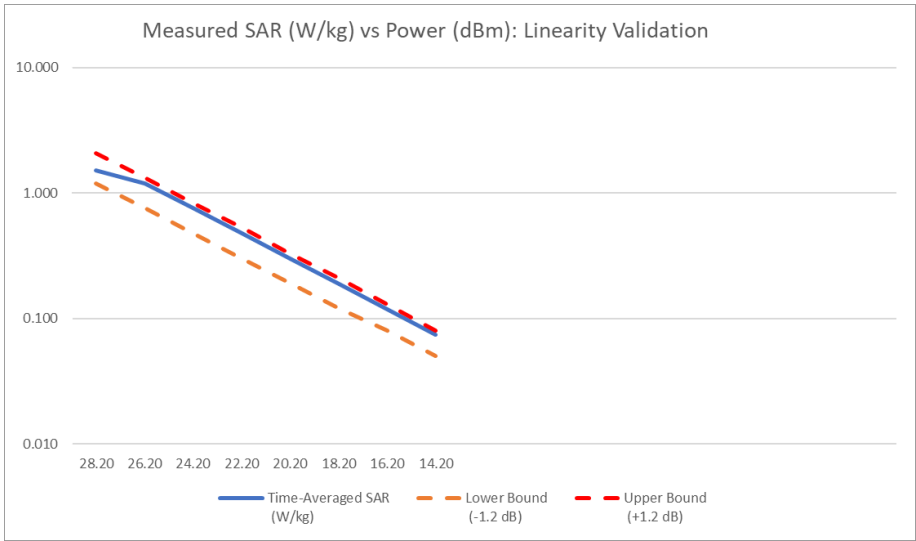


Figure 11-2
LTE Band 41 PC2 Ant 1b Linearity Validation Results

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 68 of 78

Table 11-4
NR Band n77 sub-band C (PC2) Ant 2a Linearity Validation Results

Ant 2a: NR Band n77 sub-band C - [Ch. 662000]				
Nominal Power (dBm)	Power (mW)	Time-Averaged SAR (W/kg)	Lower Bound (-1.1 dB)	Upper Bound (+1.1 dB)
26.90	489.78	7.110	6.16	10.22
24.90	309.03	5.020	3.88	6.44
22.90	194.98	3.270	2.45	4.07
20.90	123.03	2.110	1.54	2.56
18.90	77.62	1.310	0.98	1.62
16.90	48.98	0.793	0.61	1.02
14.90	30.90	0.543	0.39	0.64
12.90	19.50	0.327	0.25	0.41
10.90	12.30	0.217	0.16	0.26
8.90	7.76	0.124	0.10	0.17
6.90	4.90	0.081	0.06	0.10

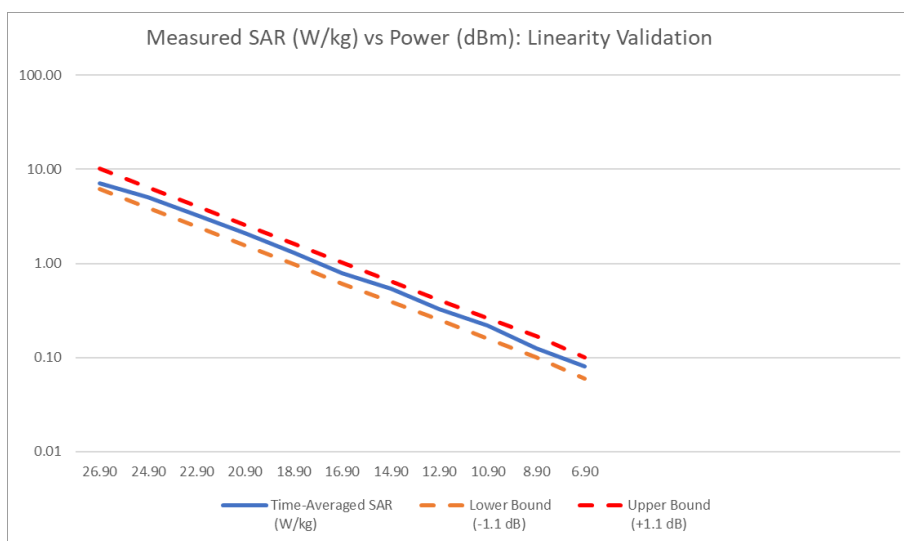


Figure 11-3
NR Band n77 sub-band C (PC2) Ant 2a Linearity Validation Results

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 69 of 78

Table 11-5
LTE Band 41 PC2 Ant 2b Linearity Validation Results

Ant 2b: LTE Band 41 PC2 - [Ch. 40620]				
Nominal Power (dBm)	Power (mW)	Time-Averaged SAR (W/kg)	Lower Bound (-0.9 dB)	Upper Bound (+0.9 dB)
28.20	660.69	2.290	1.72	2.61
26.20	416.87	1.450	1.09	1.65
24.20	263.03	0.915	0.68	1.03
22.20	165.96	0.570	0.43	0.65
20.20	104.71	0.361	0.28	0.42
18.20	66.07	0.229	0.17	0.26
16.20	41.69	0.145	0.11	0.16
14.20	26.30	0.092	0.07	0.10
12.20	16.60	0.055	0.04	0.06

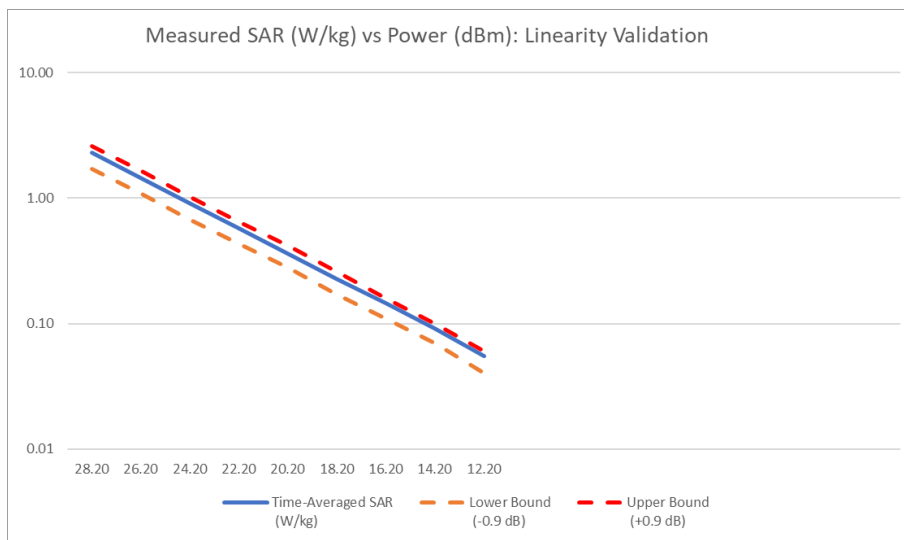


Figure 11-4
LTE Band 41 PC2 Ant 2b Linearity Validation Results

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 70 of 78

Table 11-6
LTE Band 41 PC2 Ant 3a Linearity Validation Results

Ant 3a: LTE Band 41 PC2 - [Ch.40620]				
Nominal Power (dBm)	Power (mW)	Time-Averaged SAR (W/kg)	Lower Bound (-1.1 dB)	Upper Bound (+1.1 dB)
27.70	588.84	2.360	1.85	3.07
25.70	371.54	1.440	1.16	1.93
23.70	234.42	0.910	0.74	1.22
21.70	147.91	0.571	0.47	0.77
19.70	93.33	0.358	0.29	0.49
17.70	58.88	0.224	0.19	0.31
15.70	37.15	0.139	0.12	0.19
13.70	23.44	0.087	0.07	0.12
11.70	14.79	0.055	0.05	0.08

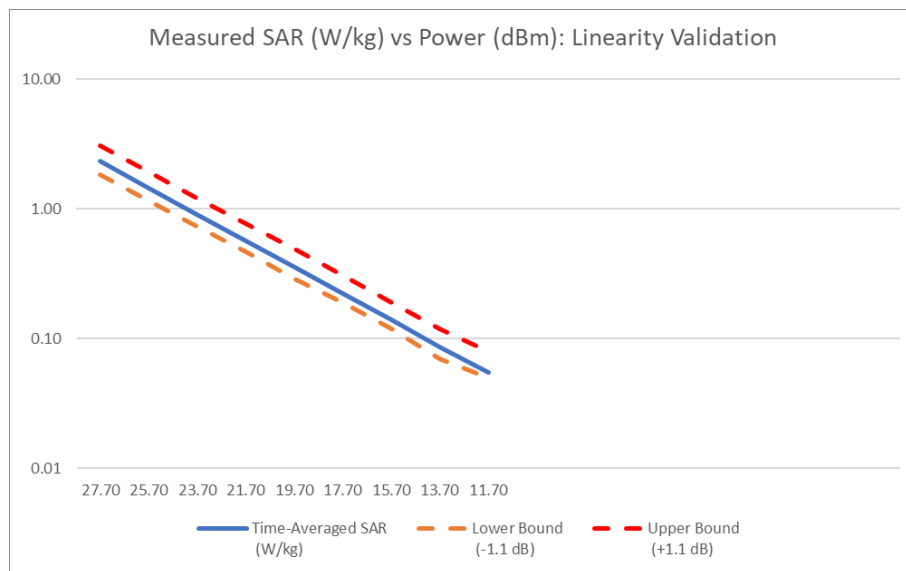


Figure 11-5
LTE Band 41 PC2 Ant 3a Linearity Validation Results

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 71 of 78

Table 11-7
NR Band n77 sub-range C (PC2), Ant 3b Linearity Validation Results

Ant 3b: NR Band n77 sub-band C - [Ch. 662000]				
Nominal Power (dBm)	Power (mW)	Time-Averaged SAR (W/kg)	Lower Bound (-1.3 dB)	Upper Bound (+1.3 dB)
26.50	446.68	19.400	11.38	20.71
24.50	281.84	10.600	7.18	13.07
22.50	177.83	6.760	4.53	8.24
20.50	112.20	4.260	2.86	5.21
18.50	70.79	2.930	1.80	3.28
16.50	44.67	1.740	1.14	2.08
14.50	28.18	1.130	0.72	1.31
12.50	17.78	0.643	0.45	0.82
10.50	11.22	0.301	0.29	0.53

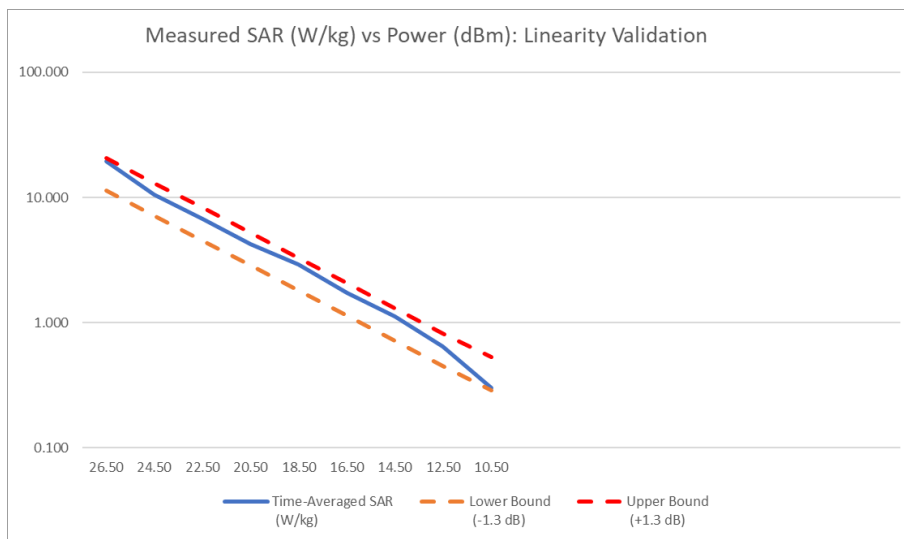


Figure 11-6
NR Band n77 sub-range C (PC2), Ant 3b Linearity Validation Results

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 72 of 78

Table 11-8
LTE Band 25, Ant 4 Linearity Validation Results

Ant 4: LTE FDD Band 25 [Ch. 26140]				
Nominal Power (dBm)	Power (mW)	Time-Averaged SAR (W/kg)	Lower Bound (-0.6 dB)	Upper Bound (+0.6 dB)
25.70	371.54	12.600	12.14	16.01
23.70	234.42	7.940	7.66	10.10
21.70	147.91	5.020	4.83	6.37
19.70	93.33	3.220	3.05	4.02
17.70	58.88	2.540	1.92	2.54
15.70	37.15	1.280	1.21	1.60
13.70	23.44	0.804	0.77	1.01
11.70	14.79	0.504	0.49	0.64
9.70	9.33	0.318	0.30	0.40
7.70	5.89	0.211	0.19	0.25
5.70	3.72	0.132	0.12	0.16

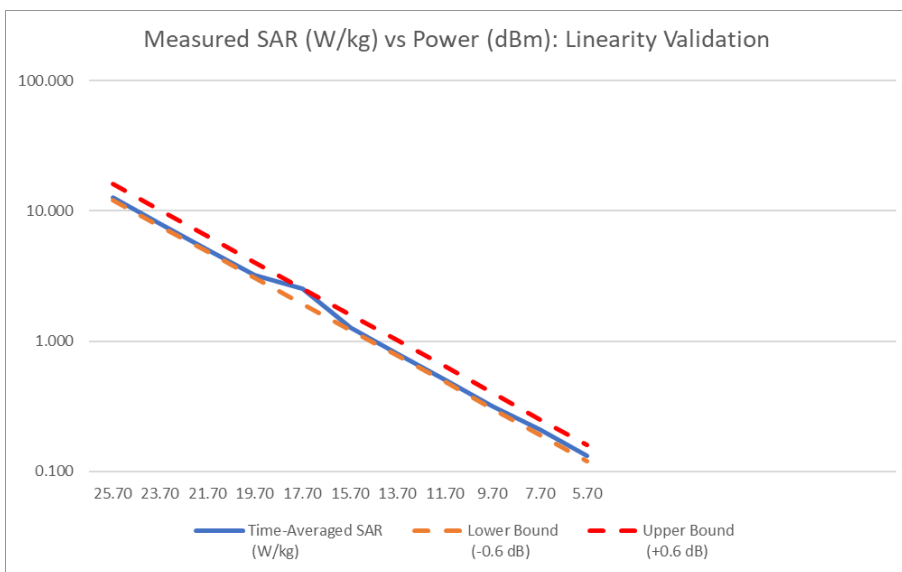


Figure 11-7
LTE Band 25, Ant 4 Linearity Validation Results

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 73 of 78

12. EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E4438C	ESG Vector Signal Generator	11/2/2025	Annual	11/2/2026	MY45093852
Agilent	E4438C	ESG Vector Signal Generator	5/12/2025	Annual	5/12/2026	MY45093678
Agilent	N5182A	MXG Vector Signal Generator	5/30/2025	Annual	5/30/2026	MY48180366
Agilent	E4404B	Spectrum Analyzer	N/A	N/A	N/A	MY45113242
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433973
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433974
Anritsu	MA24106A	USB Power Sensor	8/4/2025	Annual	8/4/2026	1827530
Anritsu	MA24106A	USB Power Sensor	4/28/2025	Annual	4/28/2026	1520501
Anritsu	MA24106A	USB Power Sensor	5/29/2025	Annual	5/29/2026	1344554
Agilent	8753ES	S-Parameter Vector Network Analyzer	10/28/2025	Annual	10/28/2026	MY40003841
Control Company	4052	Long Stem Thermometer	2/27/2024	Biennial	2/27/2026	240174346
Control Company	4052	Long Stem Thermometer	2/27/2024	Biennial	2/27/2026	240171096
Control Company	4040	Therm./ Clock/ Humidity Monitor	4/15/2024	Biennial	4/15/2026	240310280
Keysight Technologies	E7515B	UXM 5G Wireless Test Platform	9/5/2025	Annual	9/5/2026	MY61349011
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini-Circuits	VLF-6000+	Low Pass Filter DC to 6000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	ZUDC10-83-S+	Directional Coupler	CBT	N/A	CBT	2050
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-53W2	Attenuator (3dB)	CBT	N/A	CBT	120
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	3/4/2025	Annual	3/4/2026	164715
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/10/2025	Annual	10/10/2026	166869
Rohde & Schwarz	NRP85	3-Path Dipole Power Sensor	2/19/2025	Annual	2/19/2026	109322
Rohde & Schwarz	NRP85	3-Path Dipole Power Sensor	10/1/2025	Annual	10/1/2026	109052
Rohde & Schwarz	NRP85	3-Path Dipole Power Sensor	2/19/2025	Annual	2/19/2026	108523
Agilent	N9020A	MXA Signal Analyzer	7/7/2025	Biennial	7/7/2027	MY56470202
SPEAG	D1750V2	1750 MHz SAR Dipole	2/26/2025	Annual	2/26/2026	1083
SPEAG	D1750V2	1750 MHz SAR Dipole	11/6/2025	Annual	11/6/2026	1040
SPEAG	D1900V2	1900 MHz SAR Dipole	10/23/2024	Biennial	10/23/2026	5d131
SPEAG	D1900V2	1900 MHz SAR Dipole	8/8/2023	Triennial	8/8/2026	5d180
SPEAG	D2450V2	2450 MHz SAR Dipole	5/13/2025	Annual	5/13/2026	750
SPEAG	D2450V2	2450 MHz SAR Dipole	11/10/2025	Annual	11/10/2026	855
SPEAG	D2600V2	2600 MHz SAR Dipole	5/7/2025	Annual	5/7/2026	1042
SPEAG	D2600V2	2600 MHz SAR Dipole	11/10/2025	Annual	11/10/2026	1068
SPEAG	D3500V2	3500 MHz SAR Dipole	8/5/2025	Annual	8/5/2026	1055
SPEAG	D3500V2	3500 MHz SAR Dipole	6/10/2024	Biennial	6/10/2026	1126
SPEAG	D3700V2	3700 MHz SAR Dipole	6/10/2024	Biennial	6/10/2026	1097
SPEAG	D3900V2	3900 MHz SAR Dipole	11/7/2024	Biennial	11/7/2026	1062
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/6/2025	Annual	3/6/2026	604
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/9/2025	Annual	4/9/2026	501
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/13/2025	Annual	5/13/2026	1676
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/6/2025	Annual	2/6/2026	467
SPEAG	EX3DV4	SAR Probe	3/6/2025	Annual	3/6/2026	7638
SPEAG	EX3DV4	SAR Probe	5/14/2025	Annual	5/14/2026	7552
SPEAG	EX3DV4	SAR Probe	3/6/2025	Annual	3/6/2026	7421
SPEAG	EX3DV4	SAR Probe	4/16/2025	Annual	4/16/2026	7532

Notes:

- CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler, or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.
- Each equipment item is used solely within its respective calibration period.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 74 of 78

13. MEASUREMENT UNCERTAINTIES

For SAR Measurements

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)						RSS	11.5	11.3
Expanded Uncertainty (95% CONFIDENCE LEVEL)						k=2	23.0	22.6

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 75 of 78

14. CONCLUSION

14.1 Measurement Conclusion

The SAR evaluation indicates that the DUT complies with the RF radiation exposure limits of the FCC with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested. The above analysis is sufficient in displaying the validation of this Cellular TAS algorithm.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 76 of 78

15. REFERENCES

- Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 77 of 78

© 2026 Element

REV 1.0
05/06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.

Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – RF Exposure Validation: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.

Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.

Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015

FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07

SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01

FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04

FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04

FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02

FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02

Anexo à Resolução No. 533, de 10 de Setembro de 2009.

IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures – Time-Averaged SAR Validation: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: BCGA3460	TAS CELLULAR VALIDATION REPORT	Approved by: Technical Manager
Document S/N: 1C2509100080-03.BCG-R2	DUT Type: Tablet Device	Page 78 of 78

© 2026 Element

REV 1.0
05/06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.