




Plot 7-480. PSD Tx BF Diversity Antenna 3c (NB UNII HDT6, iPA - 5788MHz)

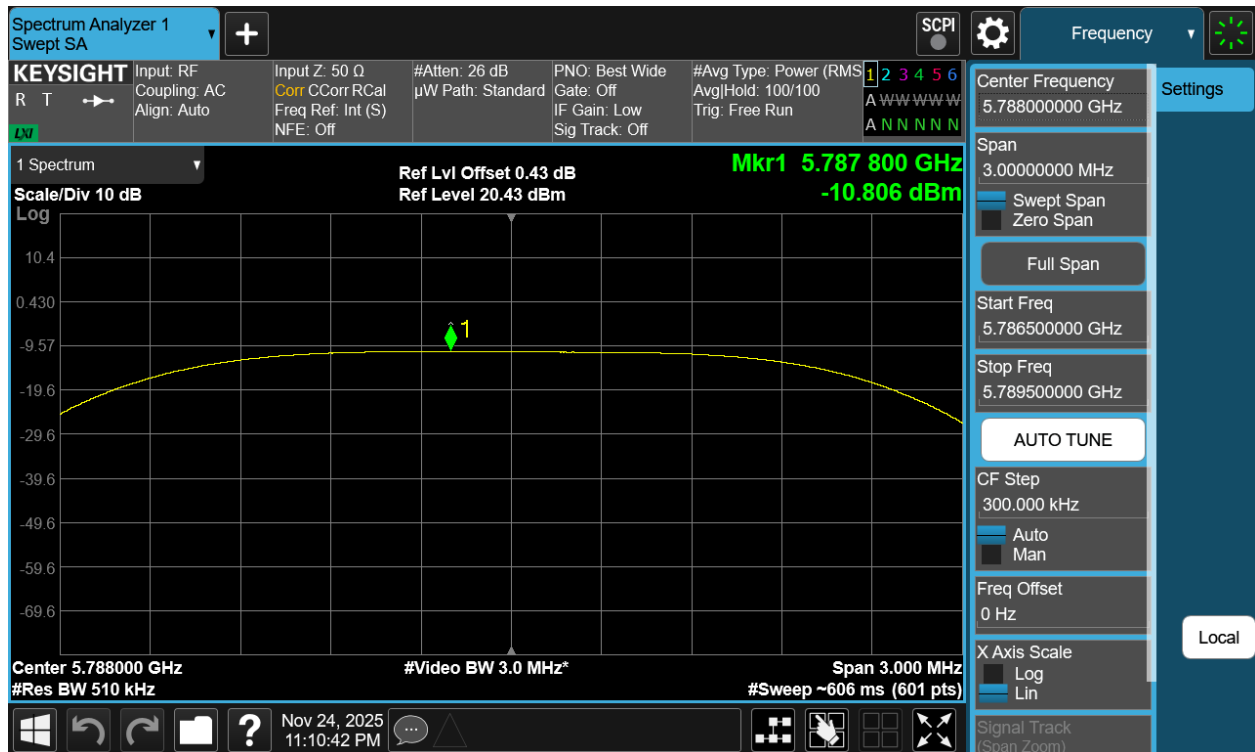

Plot 7-481. PSD Tx BF Diversity Antenna 1b (NB UNII HDT6, iPA - 5788MHz)

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 297 of 439

Note:

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 662911 v02r01 Section E)1), the conducted powers at Antenna 3c and Antenna 3a were first measured separately during TxBF transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Section 14.6.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Section 14.6.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample TxBF Calculation:

At 5162MHz, the average conducted output power was measured to be 6.19 dBm for Antenna 3c and 4.73 dBm for Antenna 3a.

$$\text{Antenna 3c} + \text{Antenna 3a} = \text{TxBF}$$

$$(6.19 \text{ dBm} + 4.73 \text{ dBm}) = (4.159 \text{ mW} + 2.971 \text{ mW}) = 7.128 \text{ mW} = 8.53 \text{ dBm}$$

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 298 of 439

V 11.0 06/2025

7.6 Radiated Spurious Emission – Above 1GHz

§15.407(b) §15.205 §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels and power schemes were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.25 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725 – 5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-31 per Section 15.209.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-31. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclauses 12.7.7, 12.7.6
KDB 789033 D02 v02r01 – Section G

FCC ID: BCGA3460	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 299 of 439

V 11.0 06/2025

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span}/\text{RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

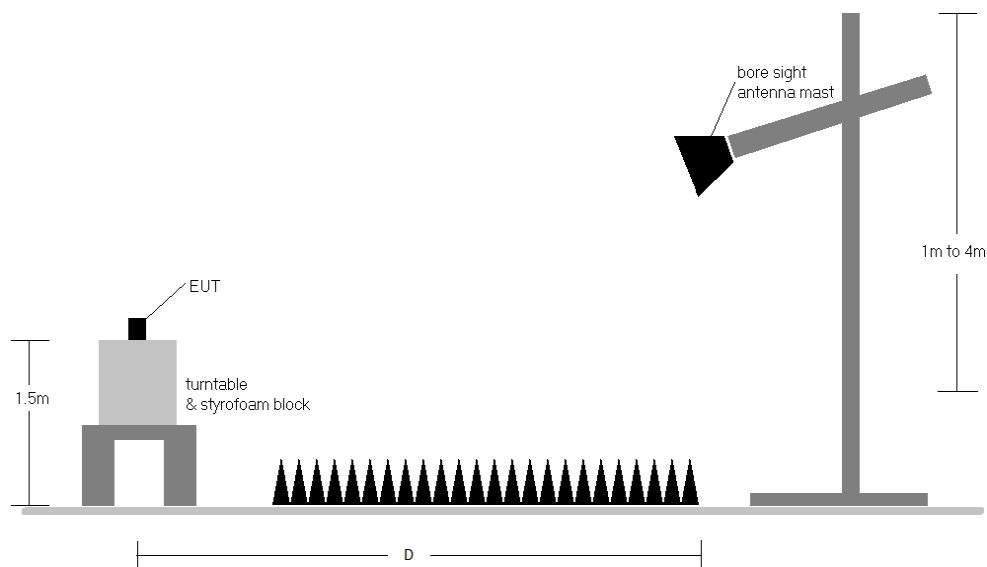


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 300 of 439

V 11.0 06/2025

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 7-31.
2. All spurious emissions lying in restricted bands specified in §15.205 is below the limit shown in Table 7-31. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
8. All supported modulation and power schemes have been tested on the unit and only worst case configuration is reported.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6.3 to 7.6.12 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 301 of 439

V 11.0 06/2025

7.6.1 TxBF Primary Radiated Spurious Emission (Above 1GHz) BDR

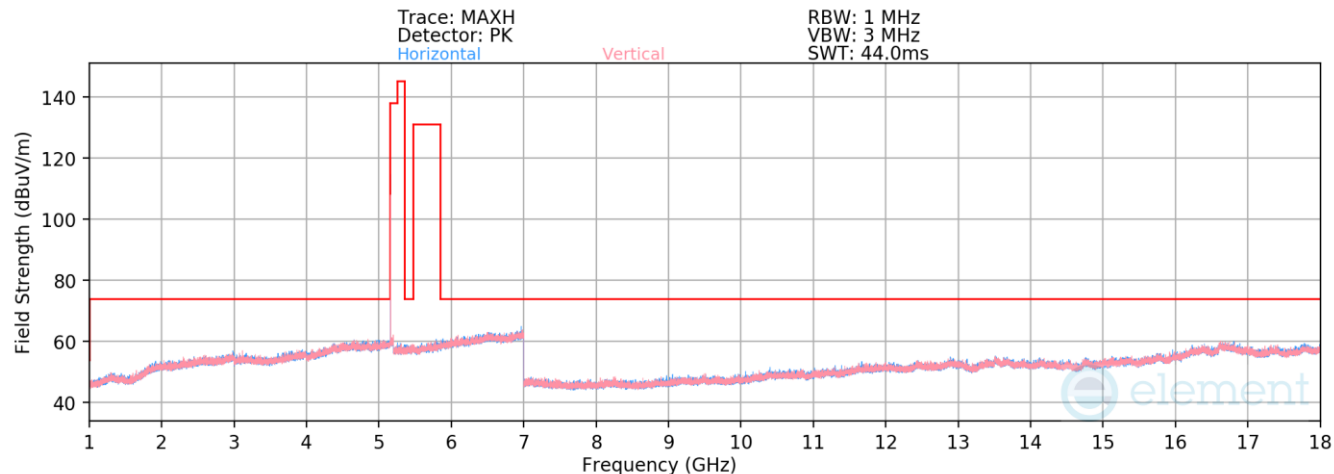

Plot 7-482. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 5162MHz)


Mode:	BDR
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5162MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
	10324.00	Peak	H	-	-	-70.59	13.52	49.94	68.23	-18.29
*	15486.00	Average	V	-	-	-84.28	20.76	43.48	53.98	-10.50
*	15486.00	Peak	V	-	-	-72.66	20.76	55.10	73.98	-18.88


Table 7-32. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 302 of 439

V 11.0 06/2025

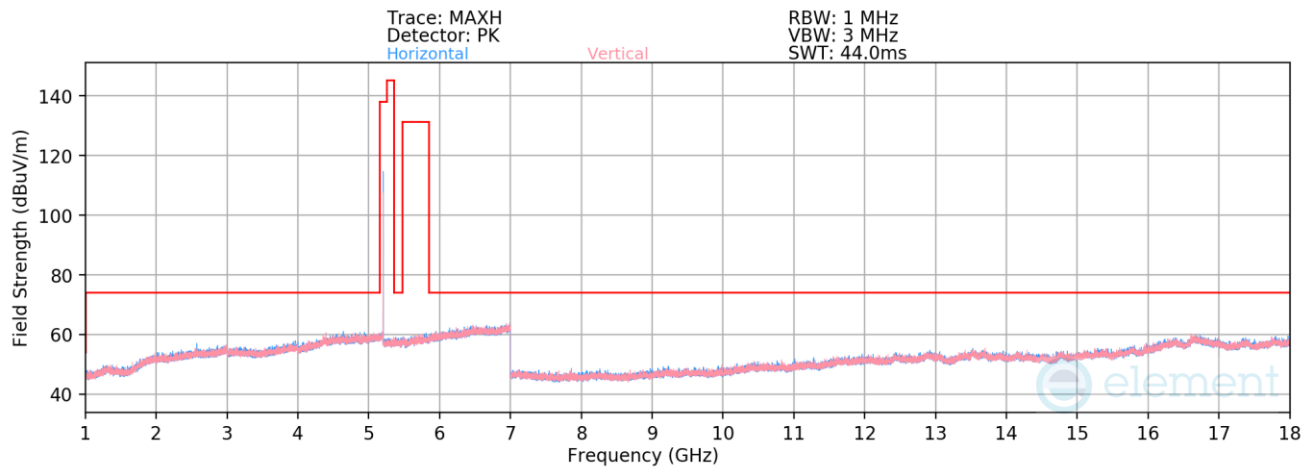

Plot 7-483. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 5203MHz)

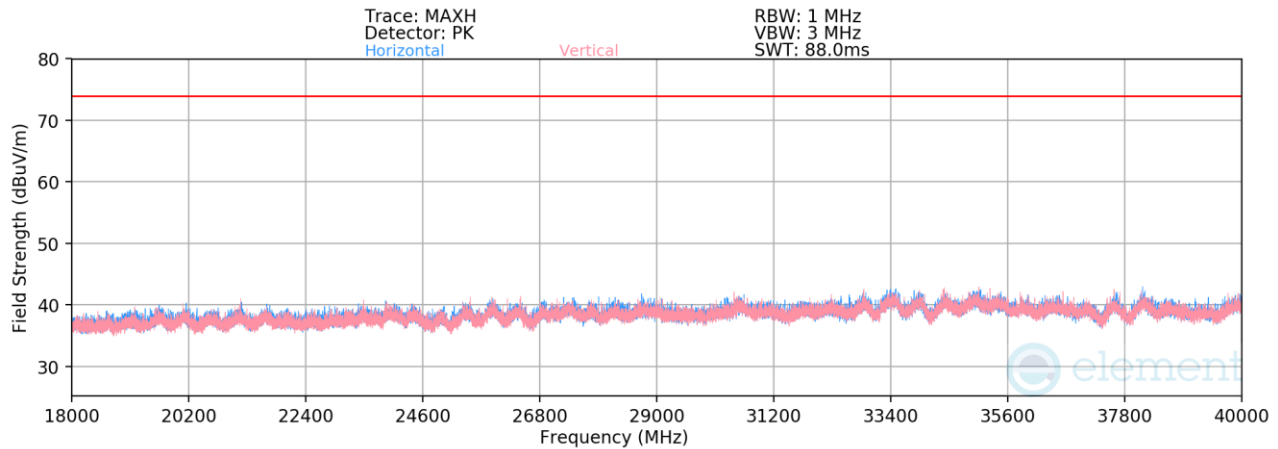

Plot 7-484. Radiated Spurious Emissions Above 18GHz (BDR GFSK ePA – 5203MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 5203MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10406.00	Peak	H	-	-	-70.80	14.53	0.00	50.73	68.23	-17.50
* 15609.00	Average	H	-	-	-84.51	21.71	0.00	44.20	53.98	-9.78
* 15609.00	Peak	H	-	-	-73.72	21.71	0.00	54.99	73.98	-18.99
* 20812.00	Average	V	-	-	-62.06	-7.55	-9.54	27.85	53.98	-26.13
* 20812.00	Peak	V	-	-	-50.58	-7.55	-9.54	39.32	73.98	-34.66
26015.00	Peak	H	-	-	-50.50	-5.83	-9.54	41.13	68.23	-27.10

Table 7-33. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)							Approved by: Technical Manager	
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device							Page 303 of 439	

V 11.0 06/2025

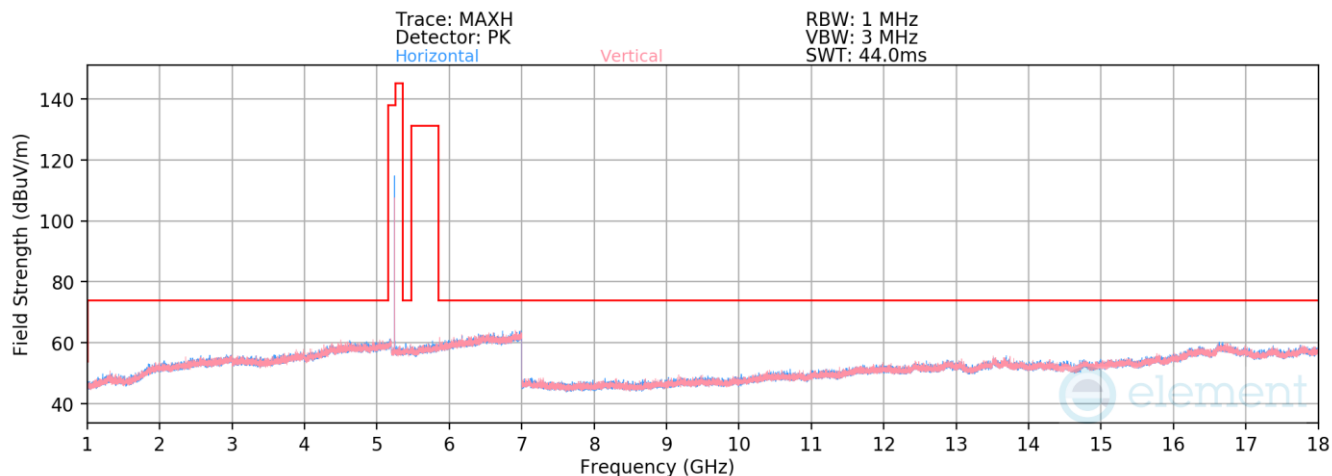

Plot 7-485. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 5245MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10490.00	Peak	H	-	-	-71.56	14.79	50.23	68.23	-18.00
* 15735.00	Average	V	-	-	-84.60	22.48	44.88	53.98	-9.10
* 15735.00	Peak	V	-	-	-73.18	22.48	56.30	73.98	-17.68

Table 7-34. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 304 of 439

V 11.0 06/2025

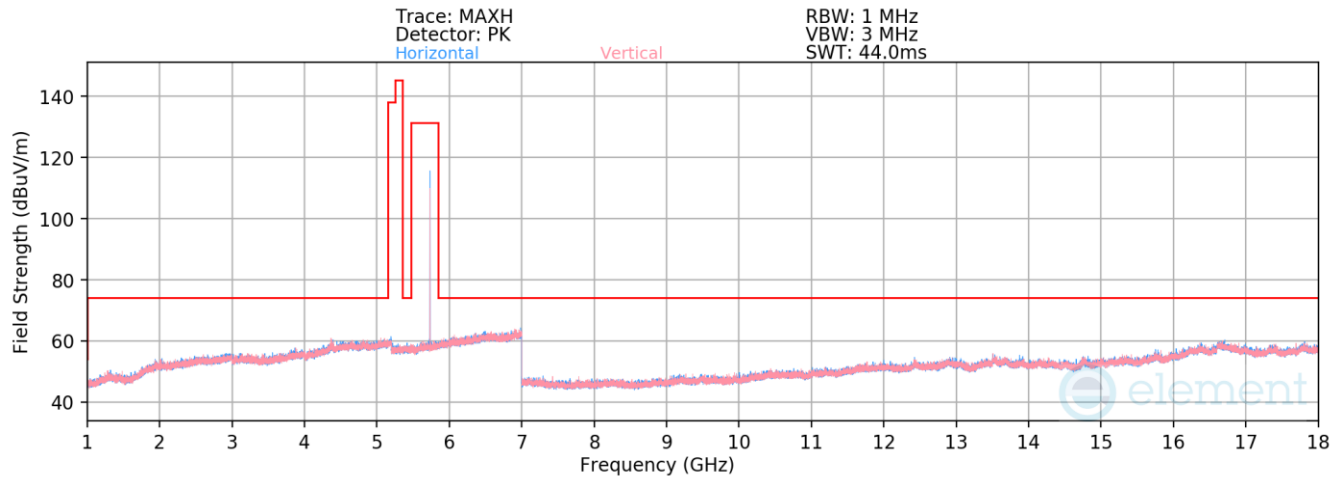

Plot 7-486. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 5733MHz)

Mode:	BDR
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5733MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11466.00	Average	H	-	-	-82.74	16.22	40.48	53.98	-13.50
*	11466.00	Peak	H	-	-	-71.94	16.22	51.28	73.98	-22.70
	17199.00	Peak	V	-	-	-73.34	24.08	57.74	68.23	-10.49

Table 7-35. Radiated Spurious Emissions Measurements TxBF Primary


FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 305 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

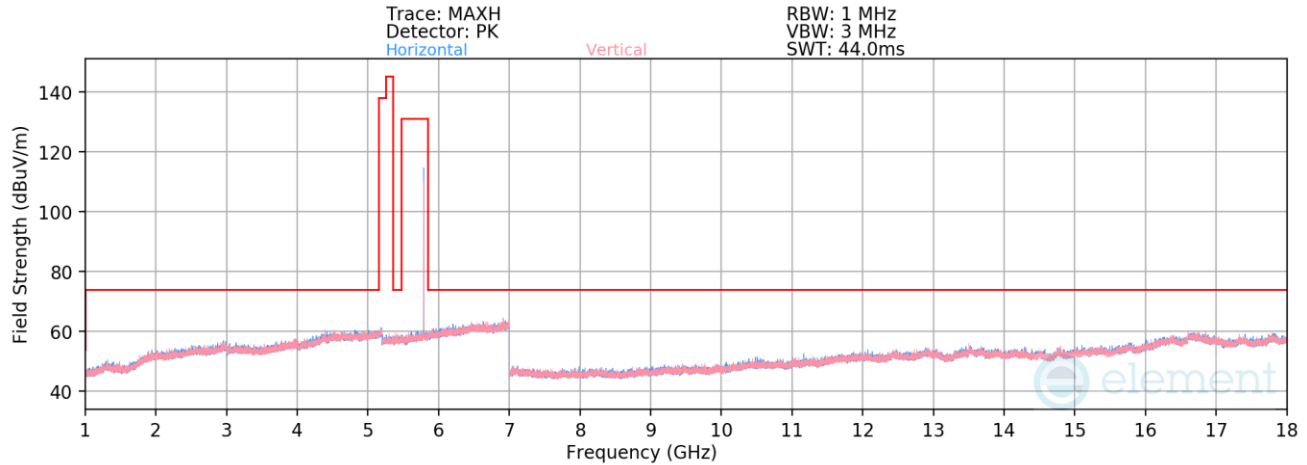

Plot 7-487. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 5788MHz)

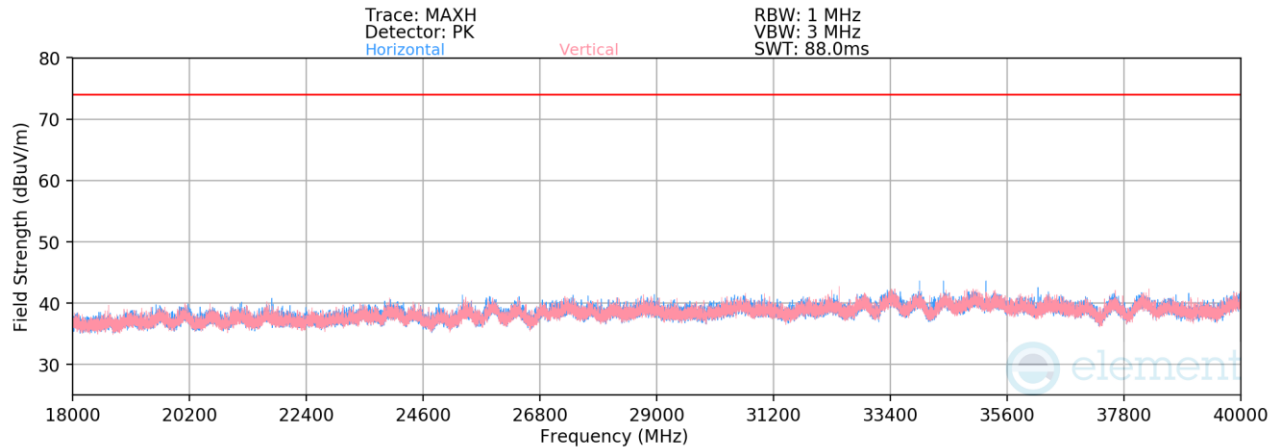


Plot 7-488. Radiated Spurious Emissions Above 18GHz (BDR GFSK ePA – 5788MHz)

Mode:	BDR
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5788MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11576.00	Average	H	-	-	-82.75	16.22	0.00	40.47	53.98	-13.51
*	11576.00	Peak	H	-	-	-71.37	16.22	0.00	51.85	73.98	-22.13
	17364.00	Peak	H	-	-	-73.25	24.68	0.00	58.43	68.23	-9.80
	23152.00	Peak	V	-	-	-51.37	-7.12	-9.54	38.97	68.23	-29.26
	28940.00	Peak	H	-	-	-52.17	-3.95	-9.54	41.34	68.23	-26.89
	34728.00	Peak	H	-	-	-51.06	-4.76	-9.54	41.64	68.23	-26.59

Table 7-36. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 306 of 439

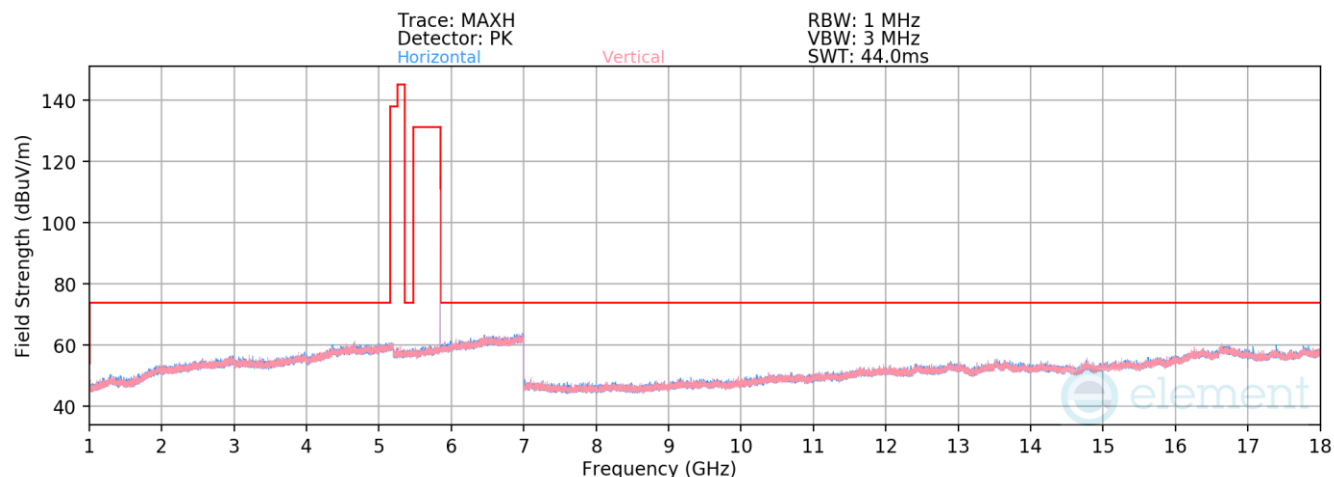

Plot 7-489. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 5844MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 5844MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11688.00	Average	H	-	-	-82.50	16.39	40.89	53.98	-13.09
* 11688.00	Peak	H	-	-	-71.32	16.39	52.07	73.98	-21.91
* 17532.00	Peak	H	-	-	-73.68	24.42	57.74	68.23	-10.49

Table 7-37. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 307 of 439

V 11.0 06/2025

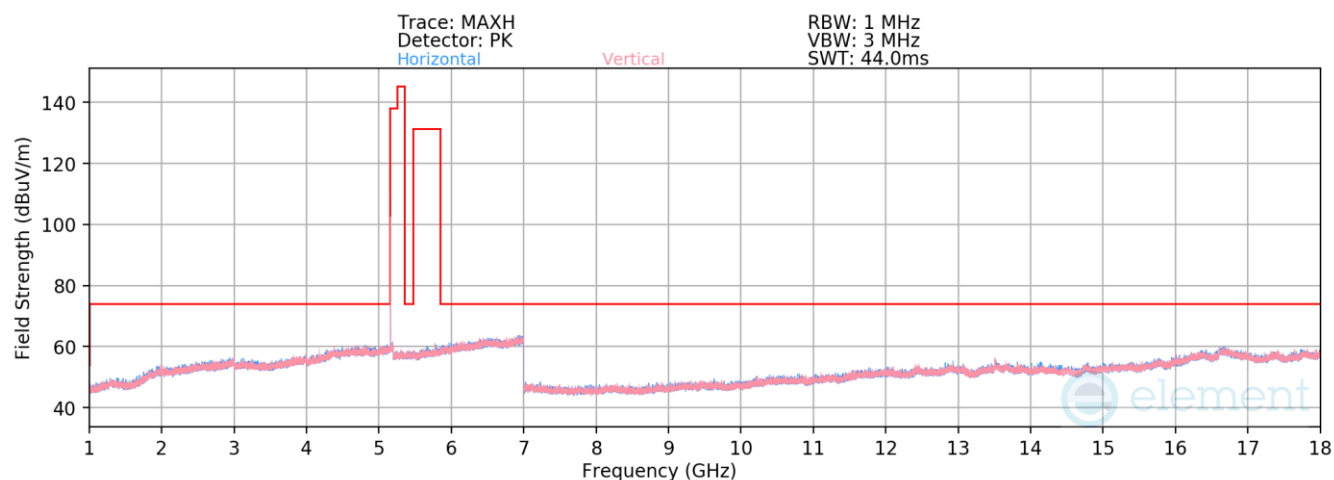


Plot 7-490. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR HDR4 ePA – 5162MHz)

Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5162MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10324.00	Peak	V	-	-	-70.49	13.52	50.03	68.23	-18.20
* 15486.00	Average	V	-	-	-84.00	20.76	43.76	53.98	-10.22
* 15486.00	Peak	V	-	-	-72.95	20.76	54.81	73.98	-19.17

Table 7-38. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 308 of 439

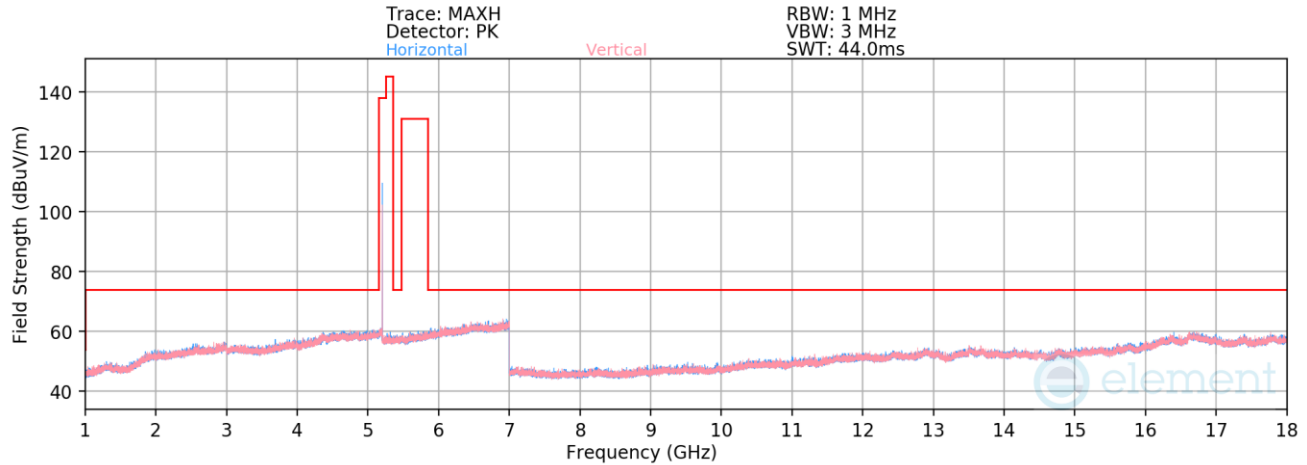

Plot 7-491. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR HDR4 ePA – 5203MHz)

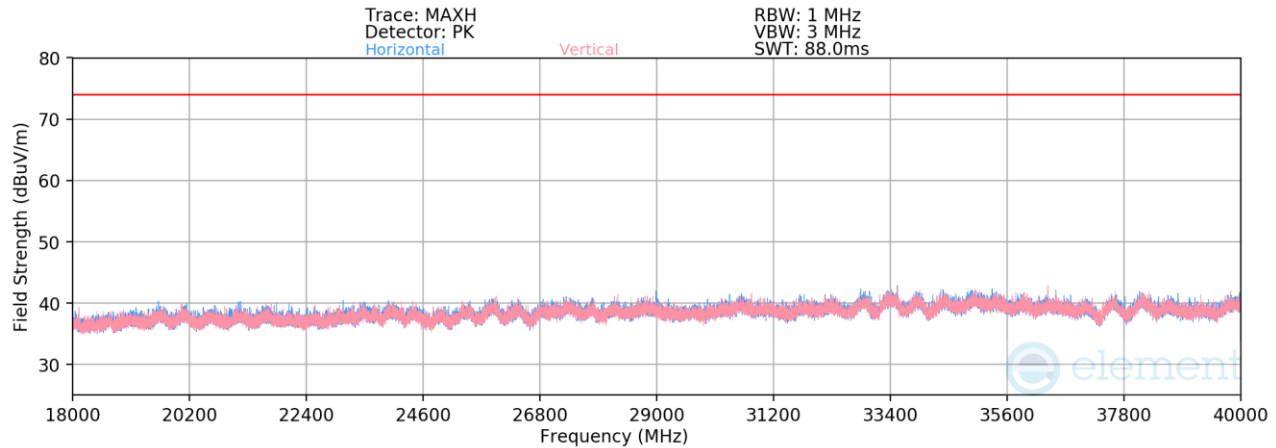

Plot 7-492. Radiated Spurious Emissions Above 18GHz (HDR HDR4 ePA – 5203MHz)


Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5203MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10406.00	Peak	H	-	-	-71.07	14.53	0.00	50.46	68.23	-17.77
* 15609.00	Average	V	-	-	-84.66	21.71	0.00	44.05	53.98	-9.93
* 15609.00	Peak	V	-	-	-72.75	21.71	0.00	55.97	73.98	-18.01
* 20812.00	Average	H	-	-	-61.73	-7.67	-9.54	28.06	53.98	-25.92
* 20812.00	Peak	H	-	-	-50.73	-7.67	-9.54	39.06	73.98	-34.92
26015.00	Peak	V	-	-	-50.72	-5.95	-9.54	40.80	68.23	-27.43

Table 7-39. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 309 of 439

V 11.0 06/2025

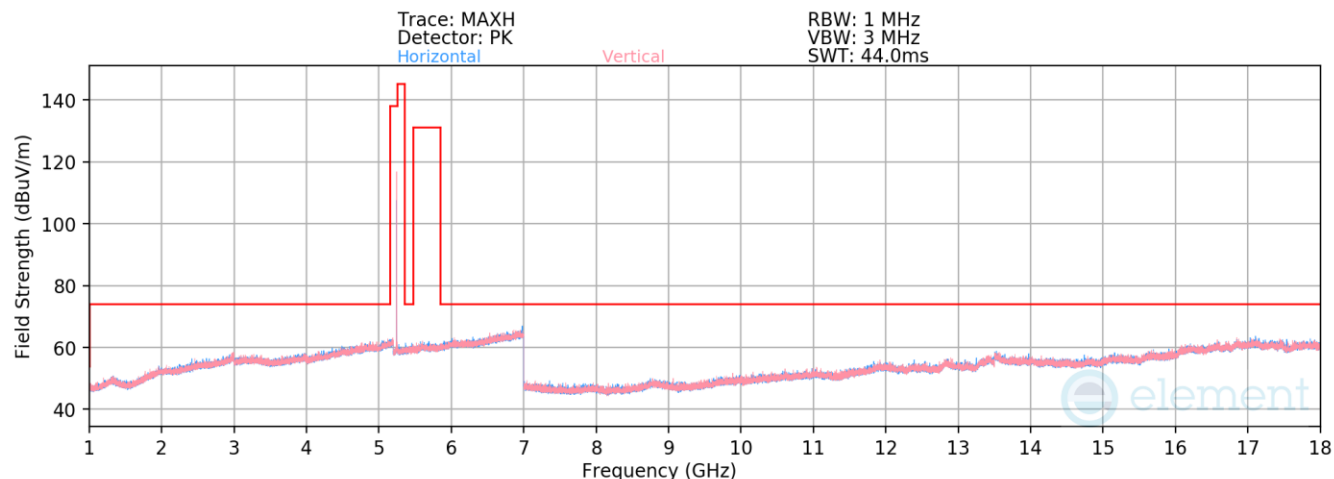

Plot 7-493. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR HDR4 ePA – 5245MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 5245MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
	10490.00	Peak	V	-	-	-71.02	14.25	50.23	68.23	-18.00
*	15735.00	Average	V	-	-	-84.84	22.48	44.64	53.98	-9.34
*	15735.00	Peak	V	-	-	-72.25	22.48	57.23	73.98	-16.75

Table 7-40. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 310 of 439

V 11.0 06/2025

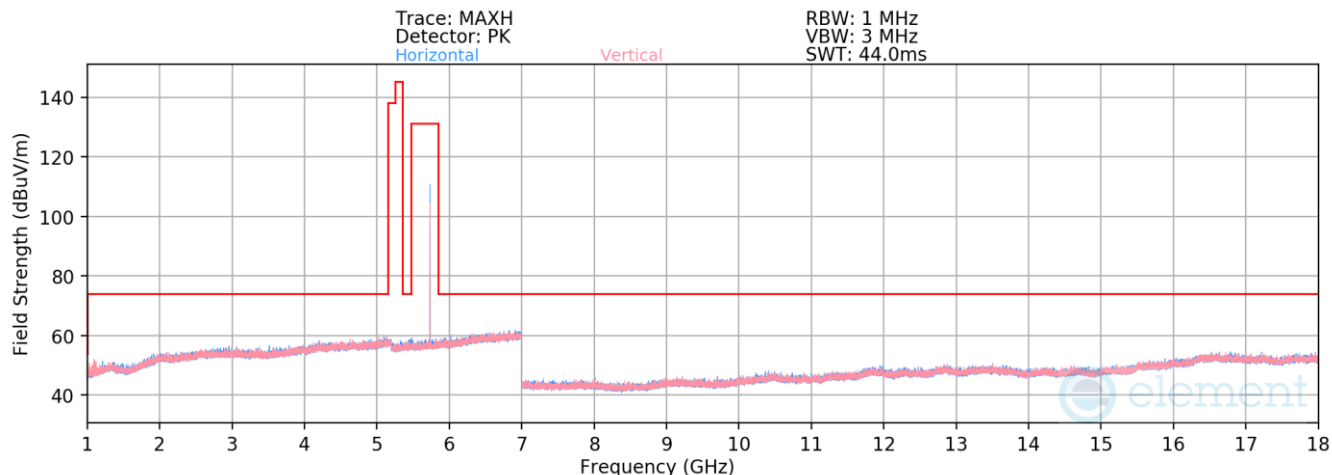

Plot 7-494. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR HDR4 ePA – 5733MHz)


Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5733MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11466.00	Average	H	-	-	-80.27	10.07	36.80	53.98	-17.18
* 11466.00	Peak	H	-	-	-68.78	10.07	48.29	73.98	-25.69
17199.00	Peak	V	-	-	-72.43	19.42	53.99	68.23	-14.24


Table 7-41. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 311 of 439

V 11.0 06/2025

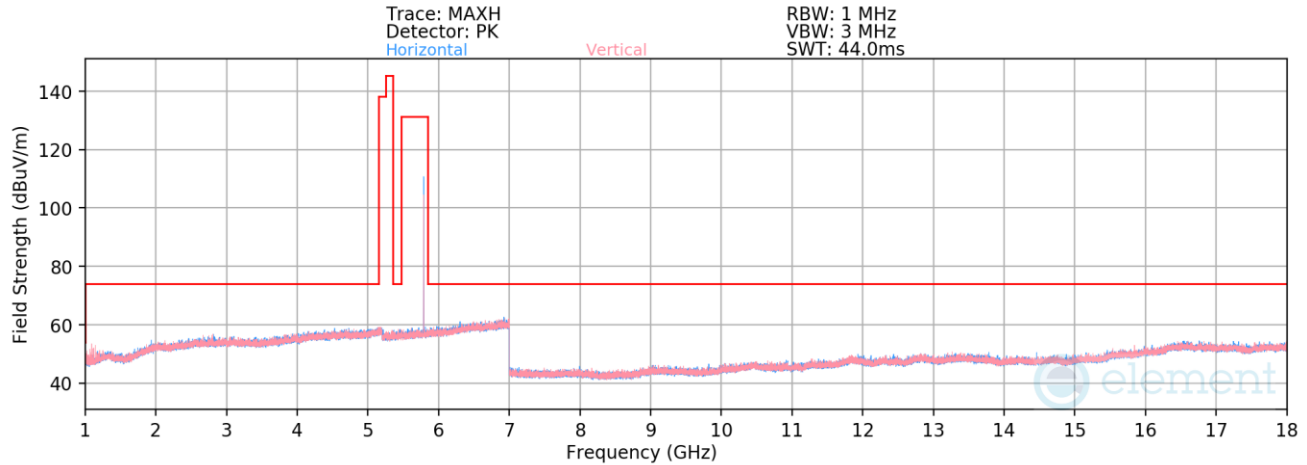

Plot 7-495. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR HDR4 ePA – 5788MHz)

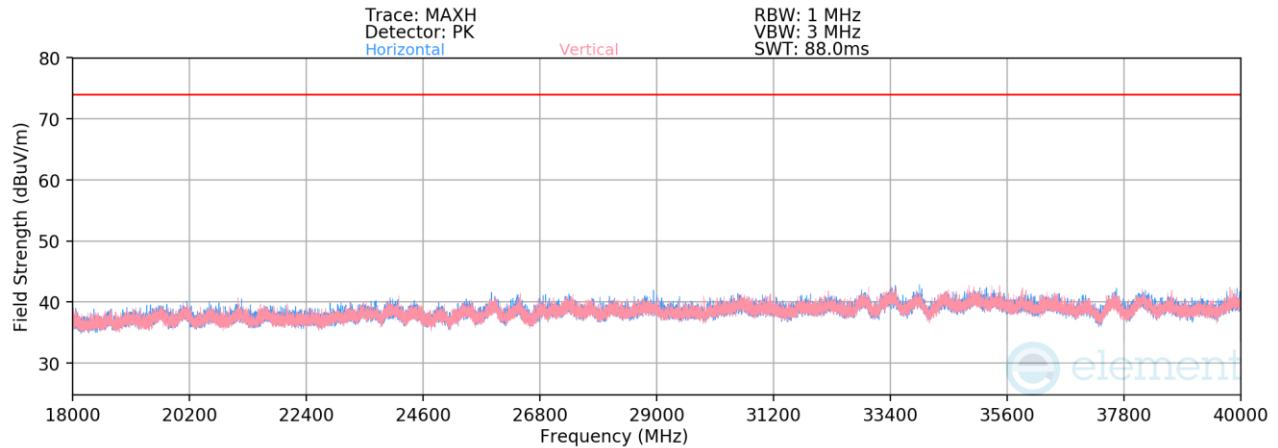

Plot 7-496. Radiated Spurious Emissions Above 18GHz (HDR HDR4 ePA – 5788MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5788MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11576.00	Average	H	-	-	-80.42	10.02	0.00	36.60	53.98	-17.38
*	11576.00	Peak	H	-	-	-67.91	10.02	0.00	49.11	73.98	-24.87
	17364.00	Peak	V	-	-	-72.16	19.06	0.00	53.90	68.23	-14.33
	23152.00	Peak	V	-	-	-51.44	-7.12	-9.54	38.90	68.23	-29.33
	28940.00	Peak	V	-	-	-51.96	-3.99	-9.54	41.51	68.23	-26.72
	34728.00	Peak	H	-	-	-51.35	-4.70	-9.54	41.41	68.23	-26.82

Table 7-42. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 312 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

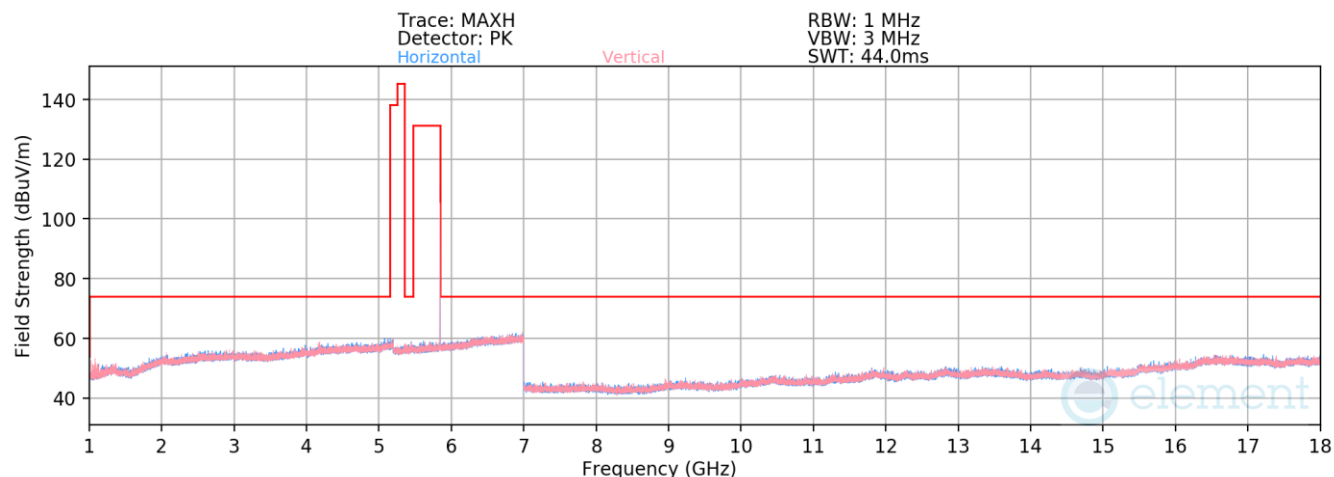

Plot 7-497. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR HDR4 ePA – 5844MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5844MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11688.00	Average	V	-	-	-79.75	10.37	37.61	53.98	-16.37
* 11688.00	Peak	V	-	-	-68.56	10.37	48.81	73.98	-25.17
17532.00	Peak	V	-	-	-72.10	19.19	54.09	68.23	-14.14

Table 7-43. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 313 of 439

V 11.0 06/2025

LE

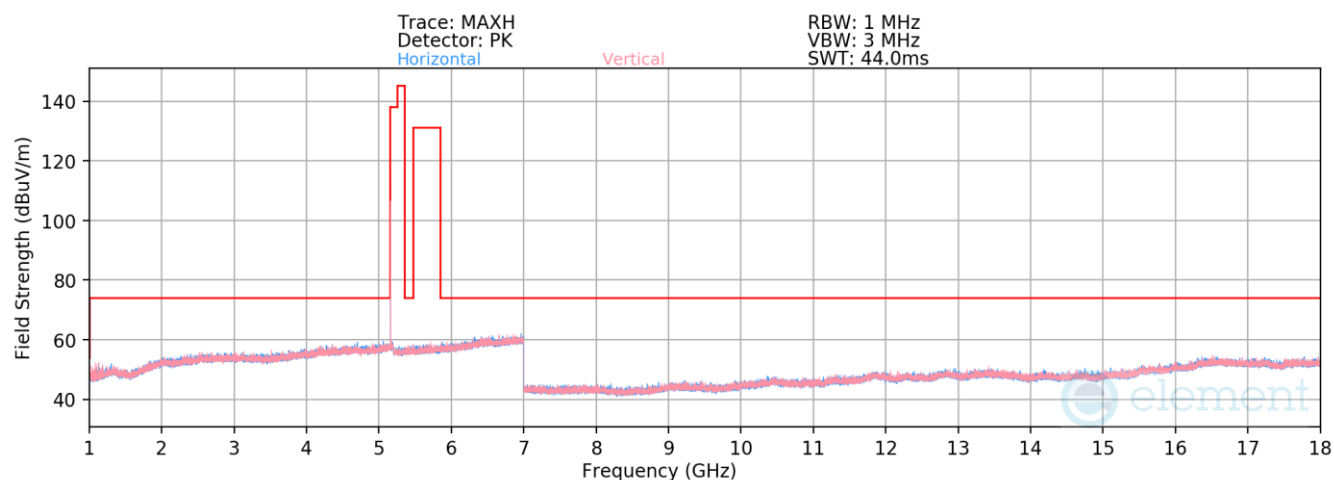

Plot 7-498. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 5162MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5162MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10324.00	Peak	H	-	-	-67.62	8.07	47.45	68.23	-20.78
* 15486.00	Average	V	-	-	-82.58	15.57	39.99	53.98	-13.99
* 15486.00	Peak	V	-	-	-71.58	15.57	50.99	73.98	-22.99

Table 7-44. Radiated Spurious Emissions Measurements TxBF Primary


FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 314 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

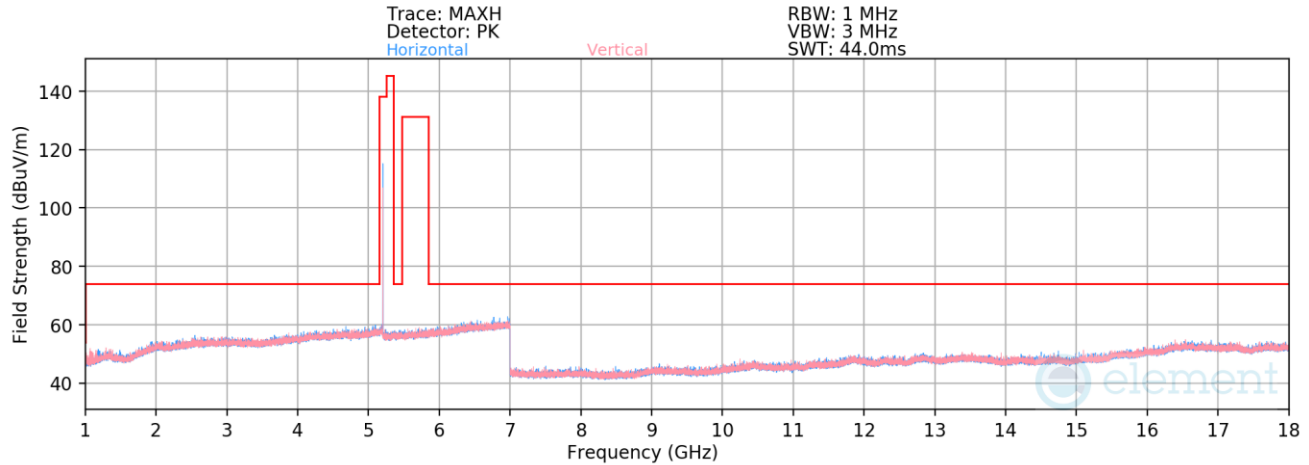

Plot 7-499. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 5203MHz)

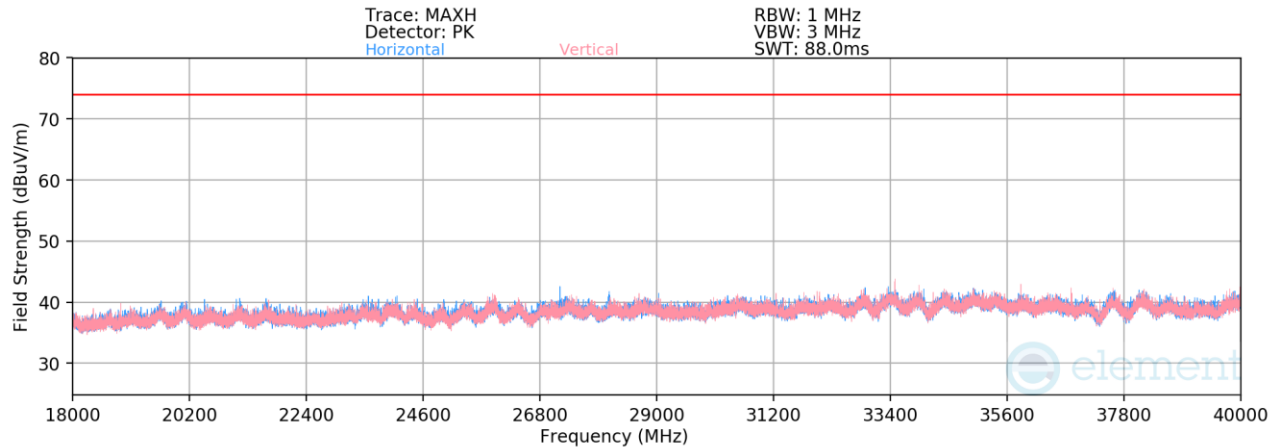

Plot 7-500. Radiated Spurious Emissions Above 18GHz (LE1M ePA – 5203MHz)


Mode:	LE1M
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5203MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10406.00	Peak	H	-	-	-68.05	8.54	0.00	47.49	68.23	-20.74
* 15609.00	Average	V	-	-	-82.58	15.93	0.00	40.35	53.98	-13.63
* 15609.00	Peak	V	-	-	-71.13	15.93	0.00	51.80	73.98	-22.18
* 20812.00	Average	V	-	-	-61.82	-7.64	-9.54	28.00	53.98	-25.98
* 20812.00	Peak	V	-	-	-50.67	-7.64	-9.54	39.15	73.98	-34.83
26015.00	Peak	H	-	-	-50.22	-5.94	-9.54	41.30	68.23	-26.93

Table 7-45. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 315 of 439

V 11.0 06/2025

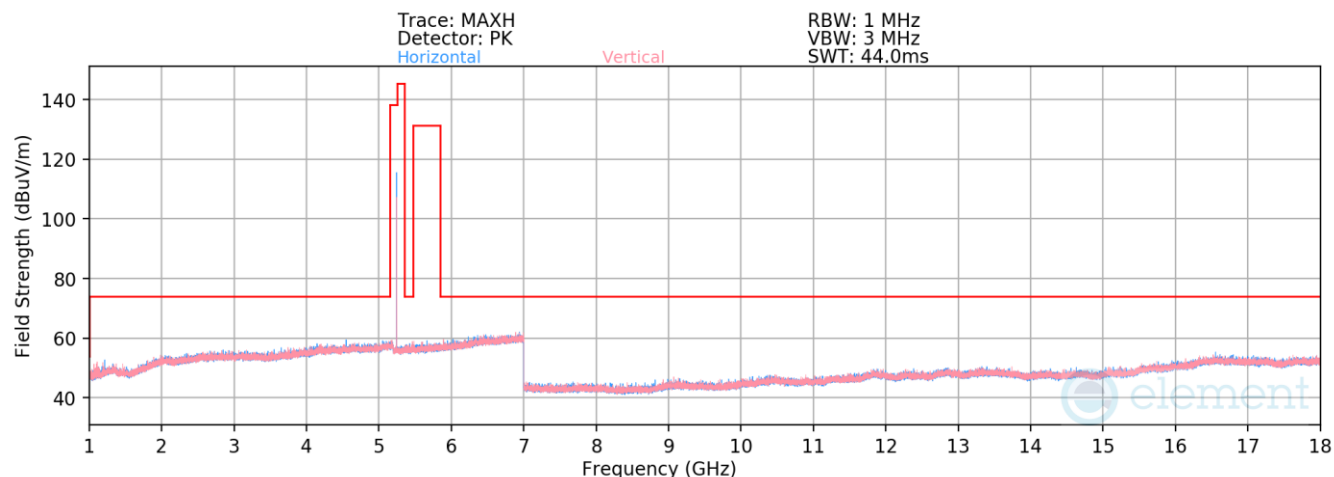

Plot 7-501. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 5245MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10490.00	Peak	H	185	167	-68.36	8.90	47.53	68.23	-20.70
* 15735.00	Average	H	-	-	-83.01	16.40	40.38	53.98	-13.60
* 15735.00	Peak	H	-	-	-70.87	16.40	52.52	73.98	-21.46

Table 7-46. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 316 of 439

V 11.0 06/2025

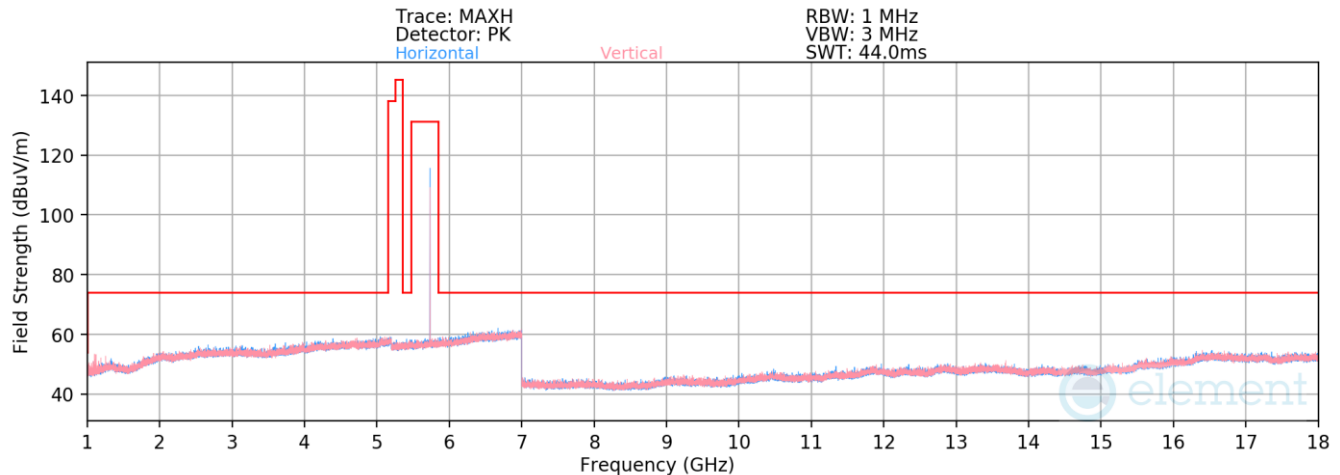

Plot 7-502. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 5733MHz)


Mode:	LE1M
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5733MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11466.00	Average	H	-	-	-80.32	10.07	36.75	53.98	-17.23
* 11466.00	Peak	H	-	-	-68.36	10.07	48.71	73.98	-25.27
17199.00	Peak	V	-	-	-72.14	19.41	54.27	68.23	-13.96


Table 7-47. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 317 of 439

V 11.0 06/2025

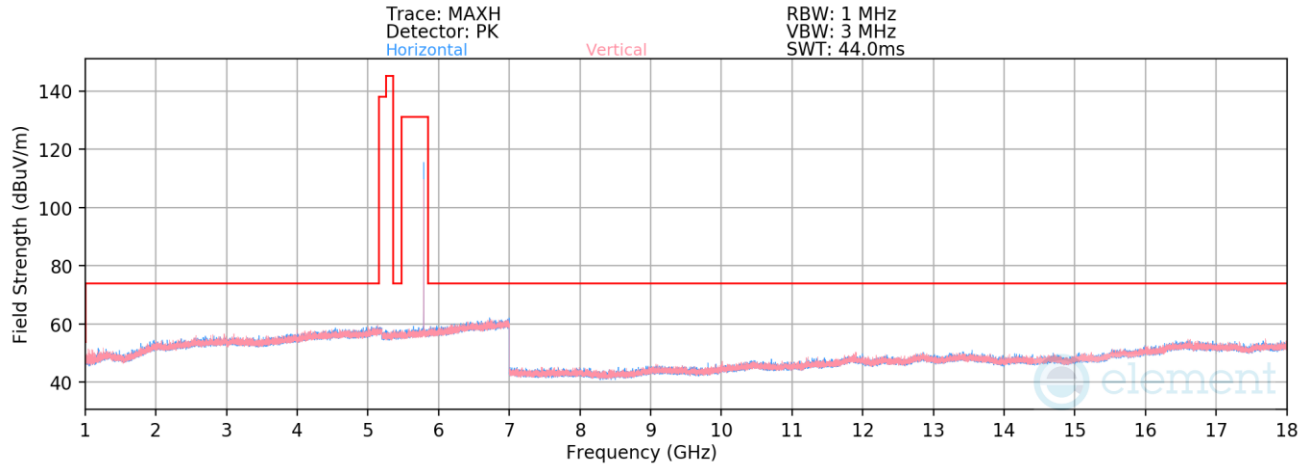

Plot 7-503. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 5788MHz)

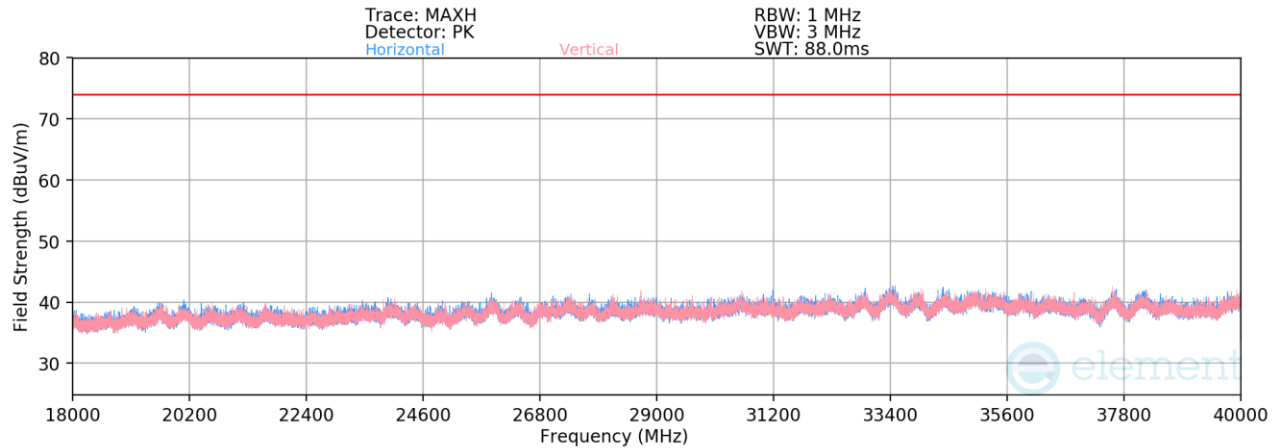

Plot 7-504. Radiated Spurious Emissions Above 18GHz (LE1M ePA – 5788MHz)


Mode:	LE1M
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5788MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11576.00	Average	H	-	-	-80.53	10.02	0.00	36.49	53.98	-17.49
*	11576.00	Peak	H	-	-	-68.62	10.02	0.00	48.40	73.98	-25.58
	17364.00	Peak	V	-	-	-72.52	19.02	0.00	53.50	68.23	-14.73
	23152.00	Peak	H	-	-	-51.25	-7.12	-9.54	39.09	68.23	-29.14
	28940.00	Peak	V	-	-	-51.81	-3.95	-9.54	41.70	68.23	-26.53
	34728.00	Peak	V	-	-	-50.85	-4.81	-9.54	41.80	68.23	-26.43

Table 7-48. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 318 of 439

V 11.0 06/2025

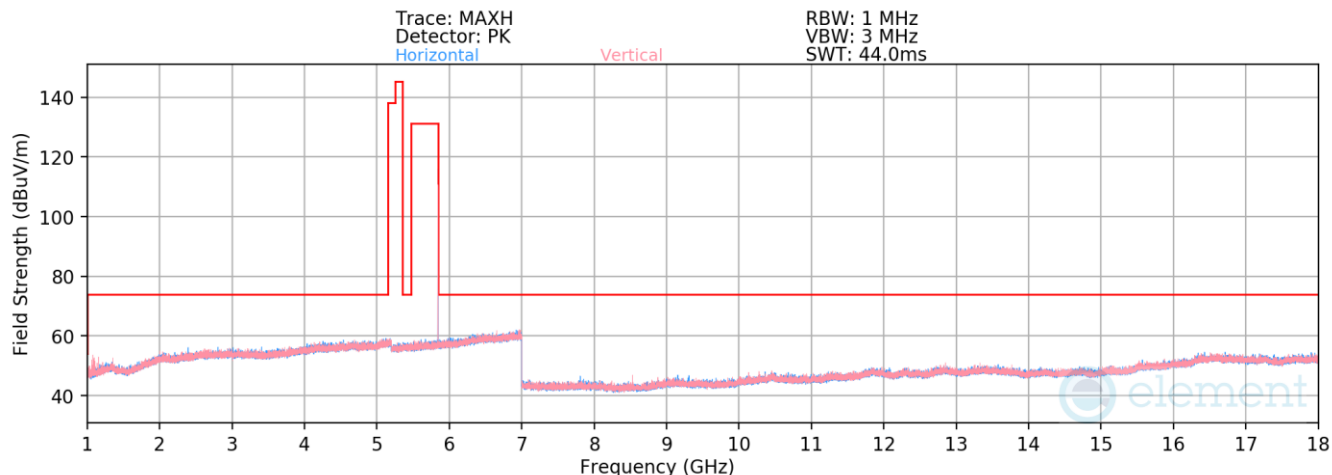

Plot 7-505. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 5844MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5844MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11688.00	Average	V	-	-	-80.16	10.24	37.08	53.98	-16.90
* 11688.00	Peak	V	-	-	-69.15	10.24	48.09	73.98	-25.89
17532.00	Peak	H	-	-	-72.49	19.37	53.88	68.23	-14.35

Table 7-49. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 319 of 439

V 11.0 06/2025

7.6.2 TxBF Diversity Radiated Spurious Emission (Above 1GHz) BDR

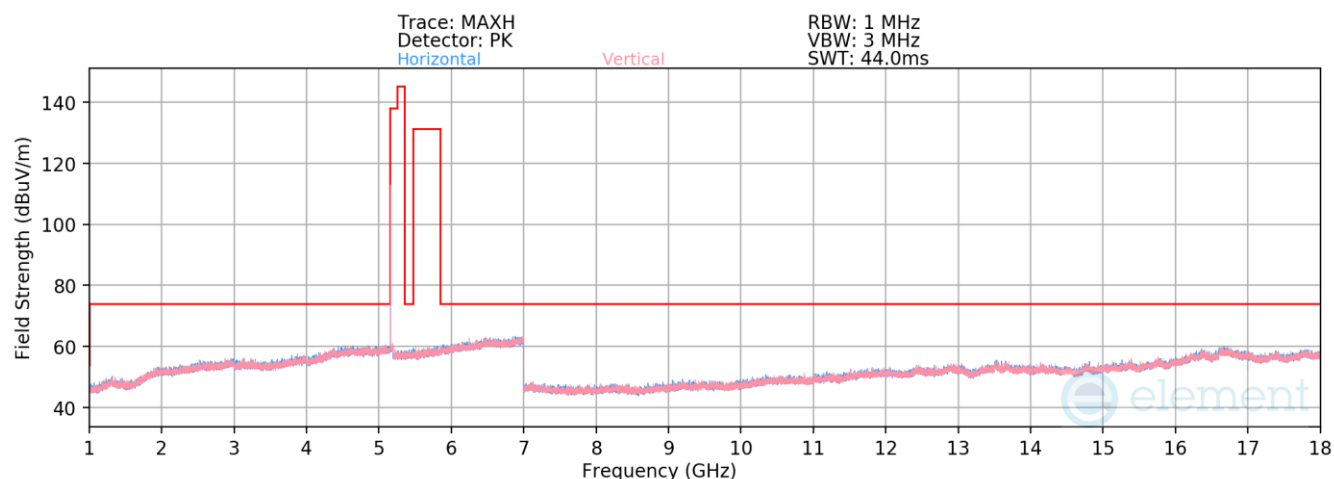

Plot 7-506. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 5162MHz)


Mode:	BDR
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5162MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10324.00	Peak	V	-	-	-70.67	13.52	49.85	68.23	-18.38
* 15486.00	Average	H	-	-	-84.12	20.53	43.41	53.98	-10.57
* 15486.00	Peak	H	-	-	-72.94	20.53	54.59	73.98	-19.39


Table 7-50. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 320 of 439

V 11.0 06/2025

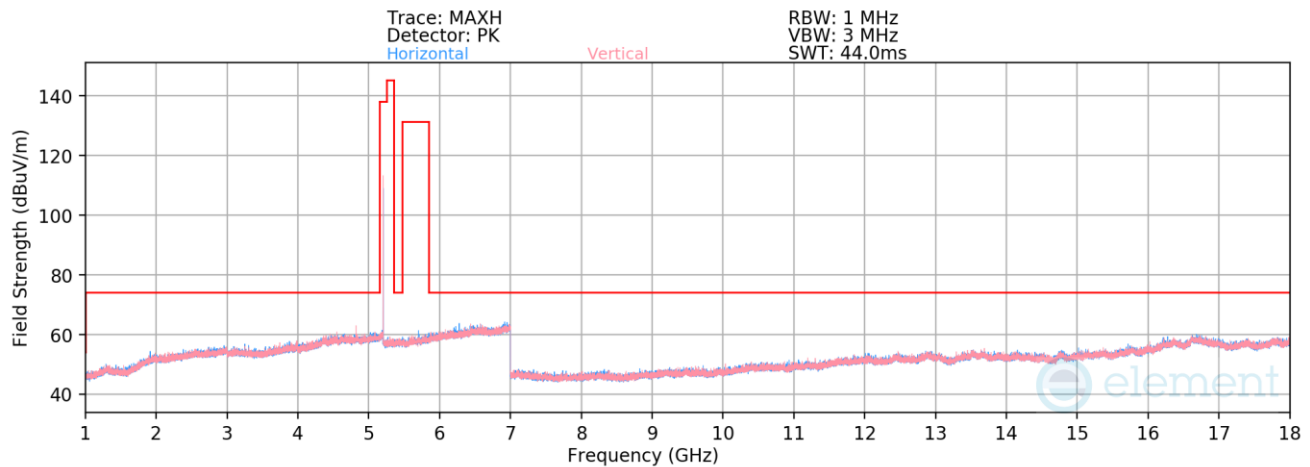

Plot 7-507. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 5203MHz)

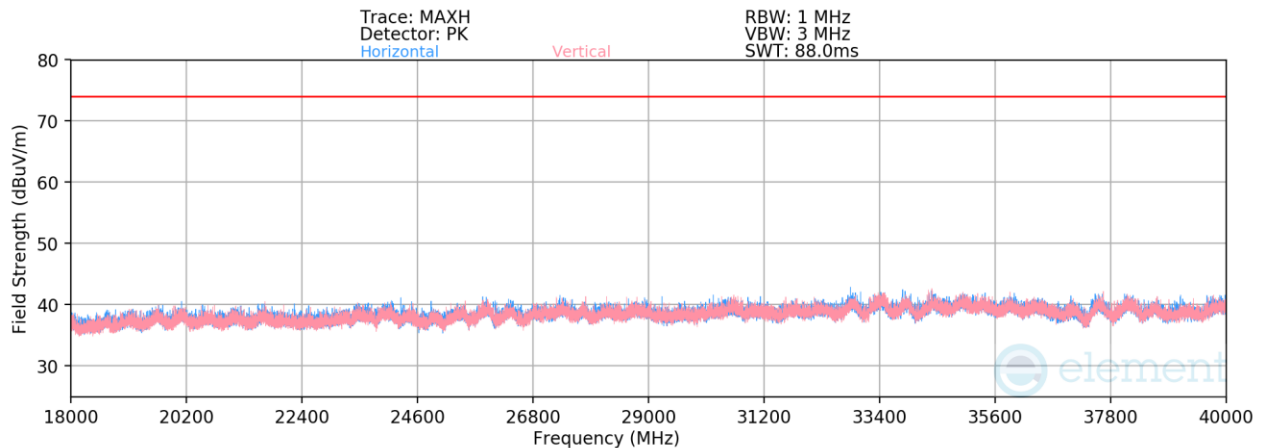

Plot 7-508. Radiated Spurious Emissions Above 18GHz (BDR GFSK ePA – 5203MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5203MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10406.00	Peak	V	-	-	-70.52	14.63	0.00	51.11	68.23	-17.12
* 15609.00	Average	V	-	-	-84.67	21.71	0.00	44.05	53.98	-9.93
* 15609.00	Peak	V	-	-	-73.42	21.71	0.00	55.29	73.98	-18.69
* 20812.00	Average	H	-	-	-61.94	-7.57	-9.54	27.95	53.98	-26.03
* 20812.00	Peak	H	-	-	-50.72	-7.57	-9.54	39.17	73.98	-34.81
26015.00	Peak	V	-	-	-50.18	-5.83	-9.54	41.45	68.23	-26.78

Table 7-51. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 321 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

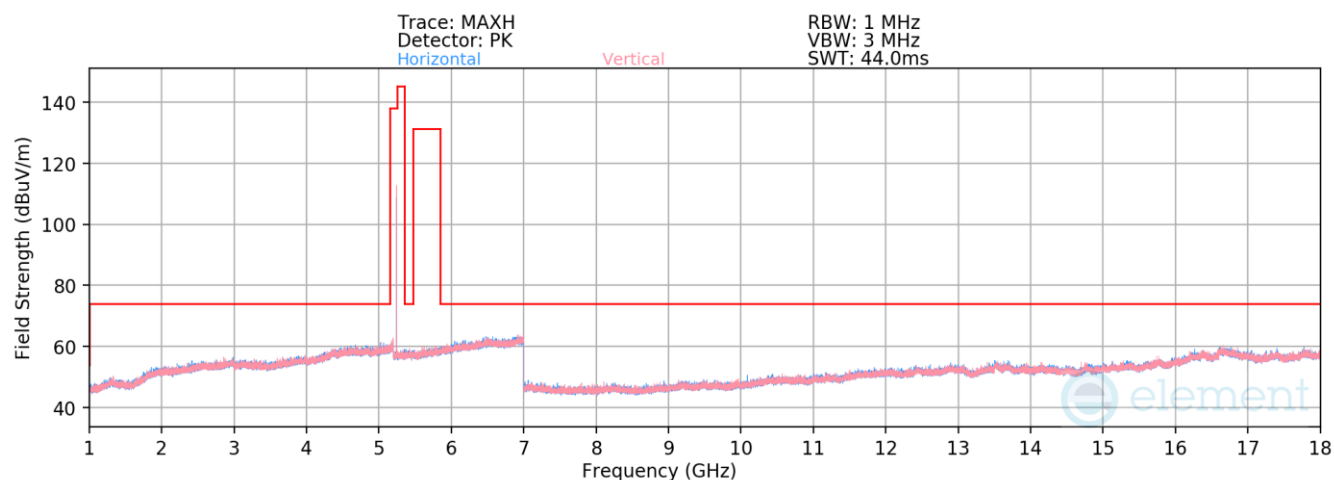

Plot 7-509. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 5245MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10490.00	Peak	V	-	-	-71.46	14.48	50.03	68.23	-18.20
* 15735.00	Average	H	-	-	-84.39	22.73	45.34	53.98	-8.64
* 15735.00	Peak	H	-	-	-72.88	22.73	56.85	73.98	-17.13

Table 7-52. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 322 of 439

V 11.0 06/2025

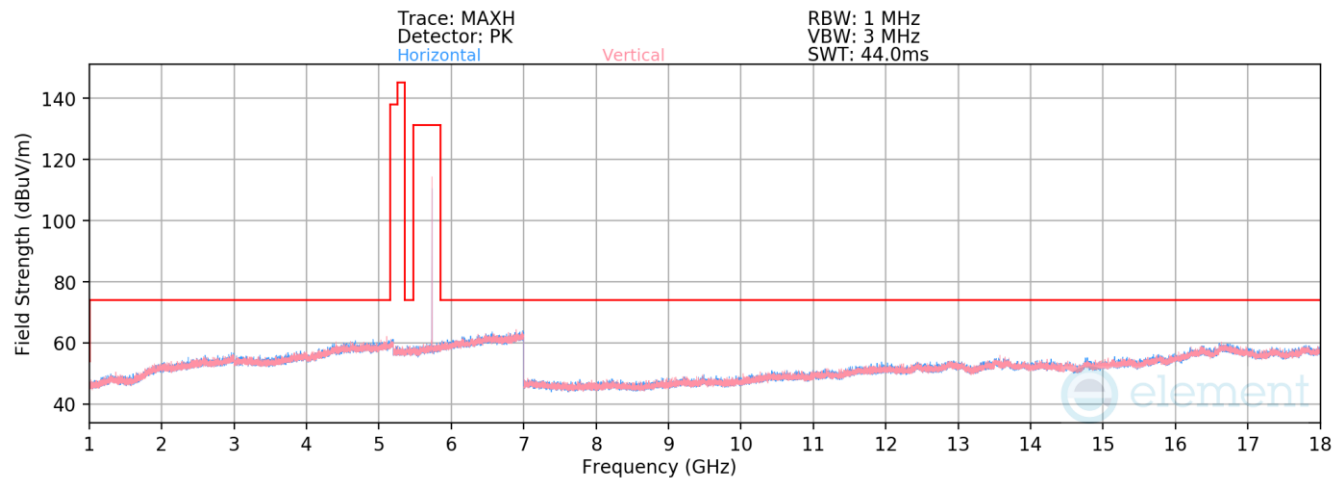

Plot 7-510. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA - 5733MHz)

Mode: BDR
Data Rate: 1Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 5733MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11466.00	Average	H	-	-	-83.10	16.22	40.12	53.98	-13.86
* 11466.00	Peak	H	-	-	-71.76	16.22	51.46	73.98	-22.52
17199.00	Peak	V	-	-	-73.36	24.27	57.91	68.23	-10.32

Table 7-53. Radiated Spurious Emissions Measurements TxBF Diversity


FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 323 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

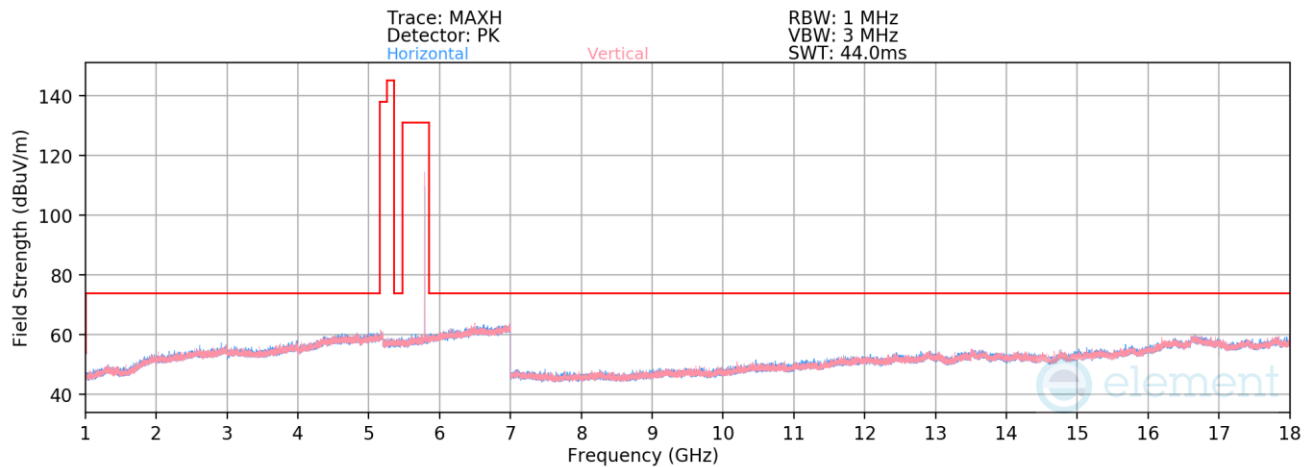

Plot 7-511. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 5788MHz)

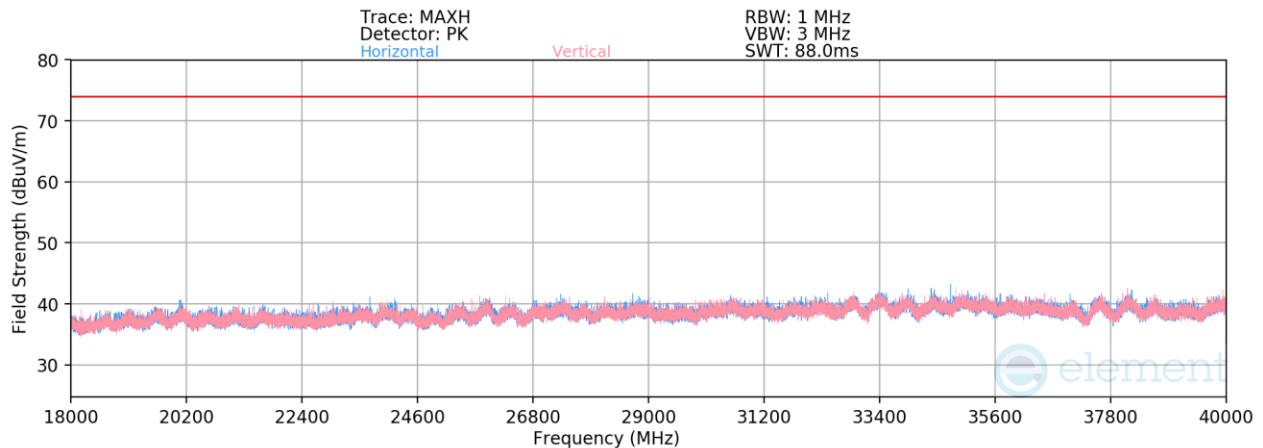

Plot 7-512. Radiated Spurious Emissions Above 18GHz (BDR GFSK ePA – 5788MHz)

Mode: BDR
 Data Rate: 1Mbps
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 5788MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11576.00	Average	V	-	-	-82.67	16.22	0.00	40.55	53.98	-13.43
*	11576.00	Peak	V	-	-	-71.41	16.22	0.00	51.81	73.98	-22.17
	17364.00	Peak	V	-	-	-73.27	24.75	0.00	58.48	68.23	-9.75
	23152.00	Peak	H	-	-	-51.34	-7.13	-9.54	38.99	68.23	-29.24
	28940.00	Peak	V	-	-	-51.93	-3.96	-9.54	41.57	68.23	-26.66
	34728.00	Peak	V	-	-	-50.44	-4.76	-9.54	42.25	68.23	-25.98

Table 7-54. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 324 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

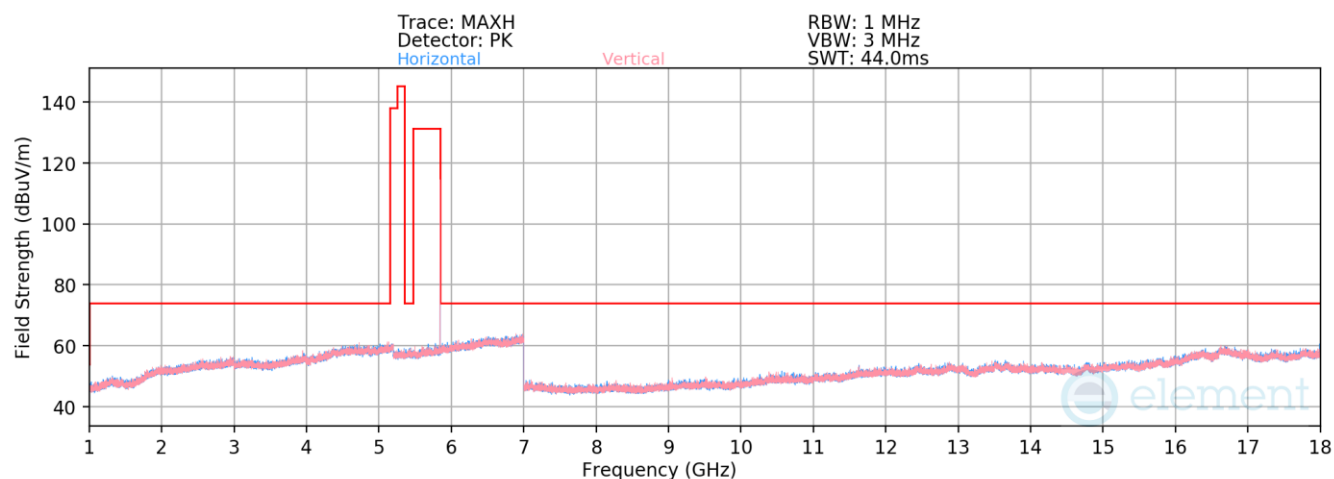

Plot 7-513. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 5844MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5844MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11688.00	Average	V	-	-	-82.45	16.36	40.91	53.98	-13.07
* 11688.00	Peak	V	-	-	-70.73	16.36	52.63	73.98	-21.35
17532.00	Peak	H	-	-	-73.24	24.42	58.18	68.23	-10.05

Table 7-55. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 325 of 439

V 11.0 06/2025

HDR

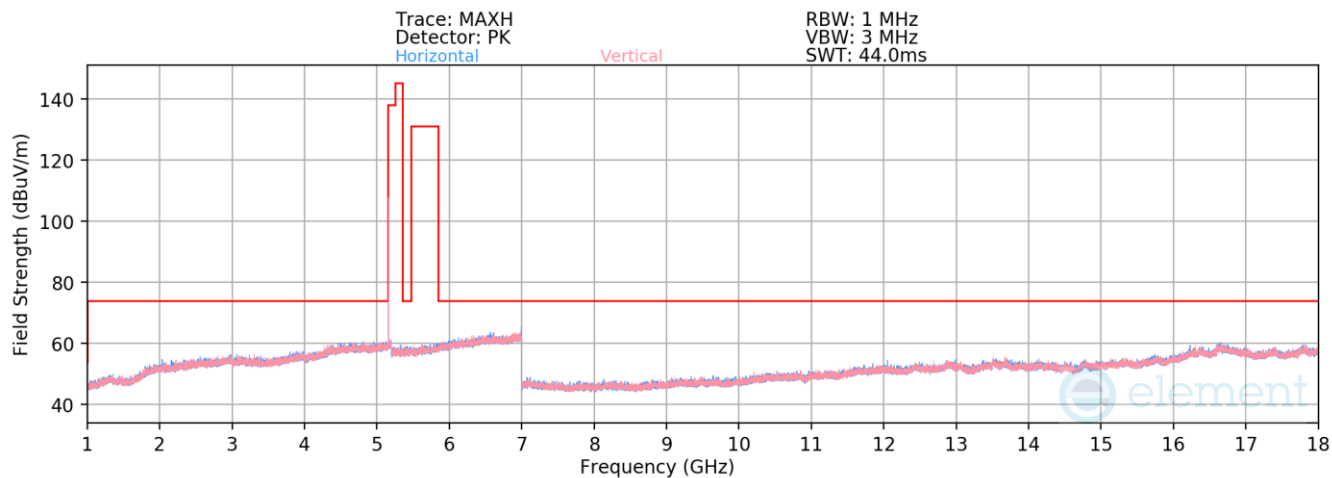

Plot 7-514. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR HDR4 ePA – 5162MHz)


Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5162MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10324.00	Peak	H	-	-	-71.26	14.07	49.81	68.23	-18.42
* 15486.00	Average	H	-	-	-84.09	20.60	43.51	53.98	-10.47
* 15486.00	Peak	H	-	-	-72.67	20.60	54.93	73.98	-19.05


Table 7-56. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 326 of 439

V 11.0 06/2025

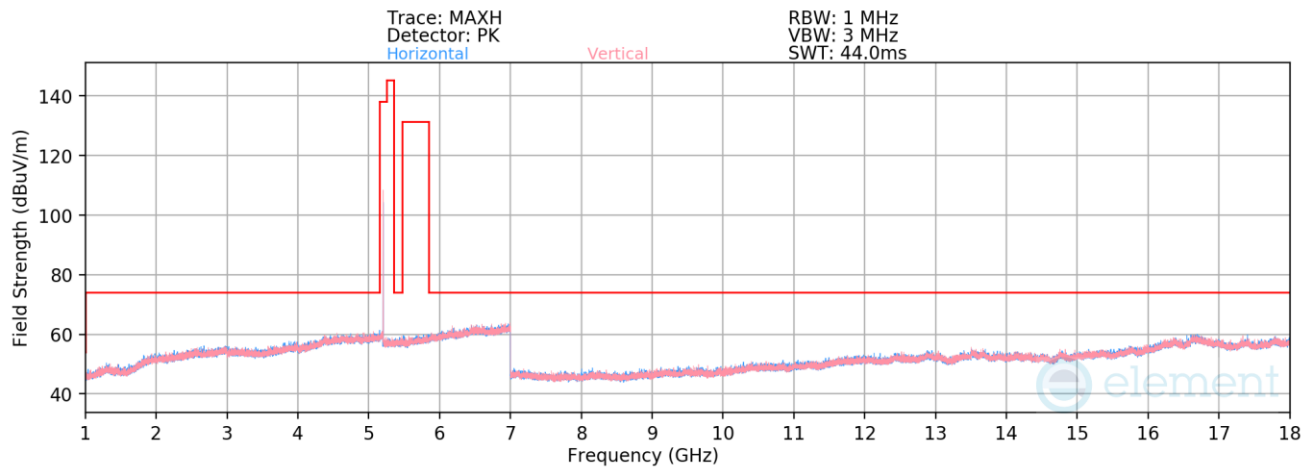

Plot 7-515. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR HDR4 ePA – 5203MHz)

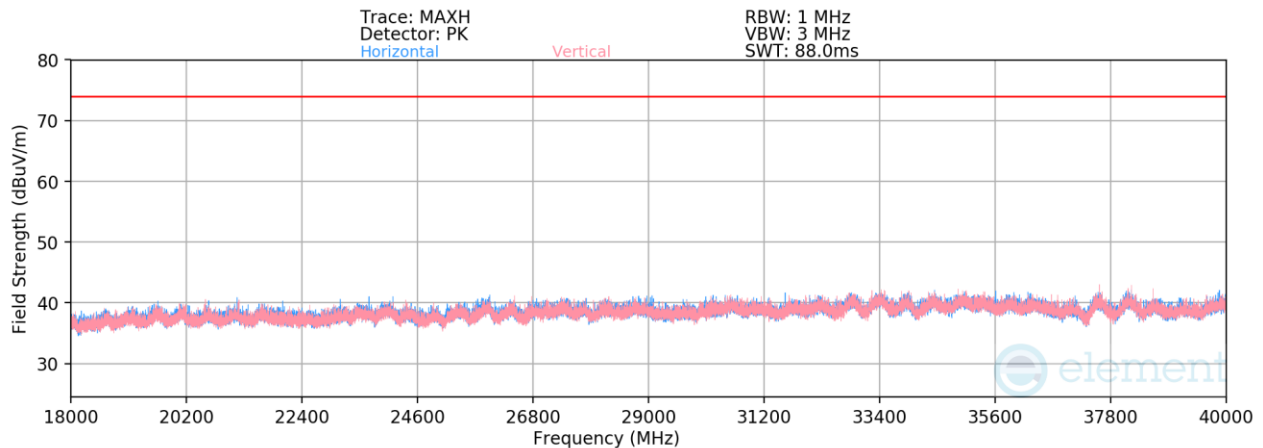

Plot 7-516. Radiated Spurious Emissions Above 18GHz (HDR HDR4 ePA – 5203MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5203MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10406.00	Peak	V	-	-	-70.67	14.48	0.00	50.81	68.23	-17.42
* 15609.00	Average	H	-	-	-84.55	21.71	0.00	44.16	53.98	-9.82
* 15609.00	Peak	H	-	-	-72.24	21.71	0.00	56.48	73.98	-17.50
* 20812.00	Average	V	-	-	-61.82	-7.57	-9.54	28.08	53.98	-25.90
* 20812.00	Peak	V	-	-	-50.06	-7.57	-9.54	39.83	73.98	-34.15
26015.00	Peak	V	-	-	-50.41	-5.95	-9.54	41.10	68.23	-27.13

Table 7-57. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 327 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

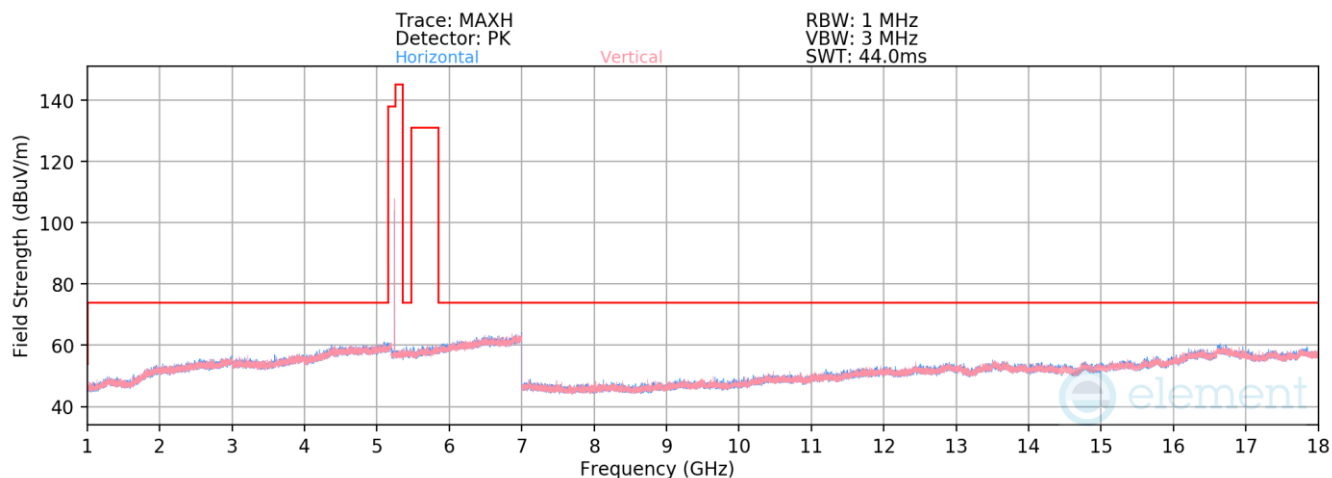

Plot 7-517. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR HDR4 ePA – 5245MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10490.00	Peak	V	-	-	-70.57	14.25	50.69	68.23	-17.54
* 15735.00	Average	V	-	-	-84.74	22.48	44.74	53.98	-9.24
* 15735.00	Peak	V	-	-	-72.74	22.48	56.74	73.98	-17.24

Table 7-58. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 328 of 439

V 11.0 06/2025

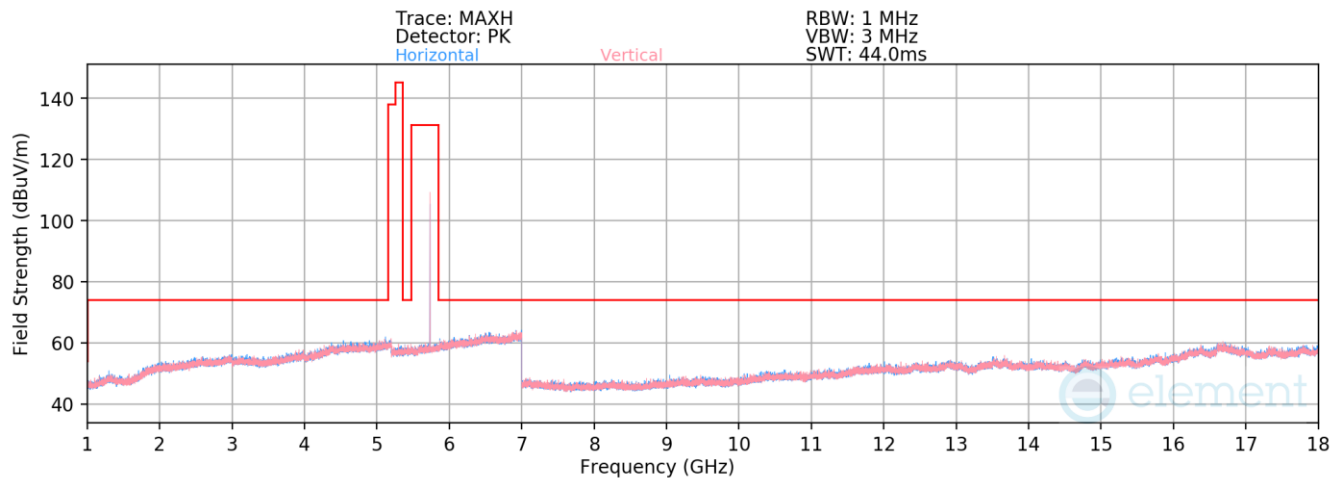

Plot 7-518. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR HDR4 ePA – 5733MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5733MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11466.00	Average	V	-	-	-83.21	16.32	40.11	53.98	-13.87
*	11466.00	Peak	V	-	-	-71.69	16.32	51.63	73.98	-22.35
	17199.00	Peak	H	-	-	-73.15	24.27	58.12	68.23	-10.11

Table 7-59. Radiated Spurious Emissions Measurements TxBF Diversity


FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 329 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

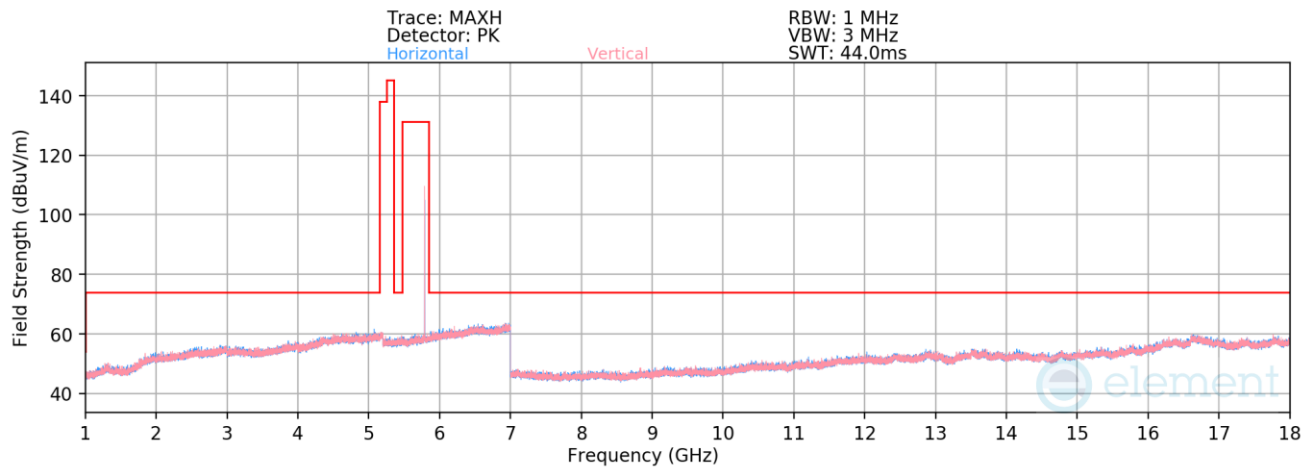

Plot 7-519. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR HDR4 ePA – 5788MHz)

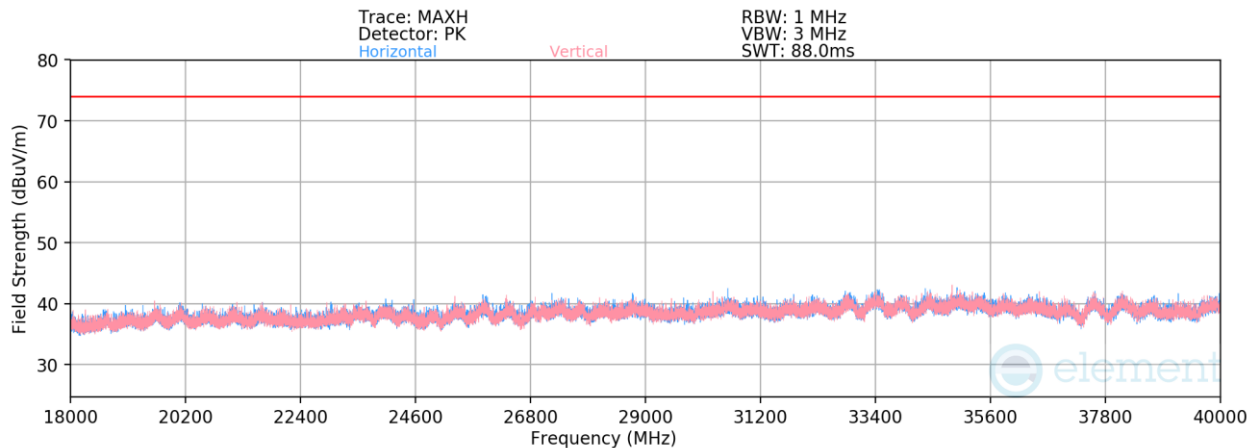

Plot 7-520. Radiated Spurious Emissions Above 18GHz (HDR HDR4 ePA – 5788MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5788MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11576.00	Average	H	-	-	-82.75	16.22	0.00	40.47	53.98	-13.51
*	11576.00	Peak	H	-	-	-71.47	16.22	0.00	51.75	73.98	-22.23
	17364.00	Peak	H	-	-	-71.73	24.75	0.00	60.02	68.23	-8.21
	23152.00	Peak	H	-	-	-51.22	-7.13	-9.54	39.11	68.23	-29.12
	28940.00	Peak	H	-	-	-52.03	-3.95	-9.54	41.48	68.23	-26.75
	34728.00	Peak	H	-	-	-50.71	-4.76	-9.54	41.98	68.23	-26.25

Table 7-60. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 330 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

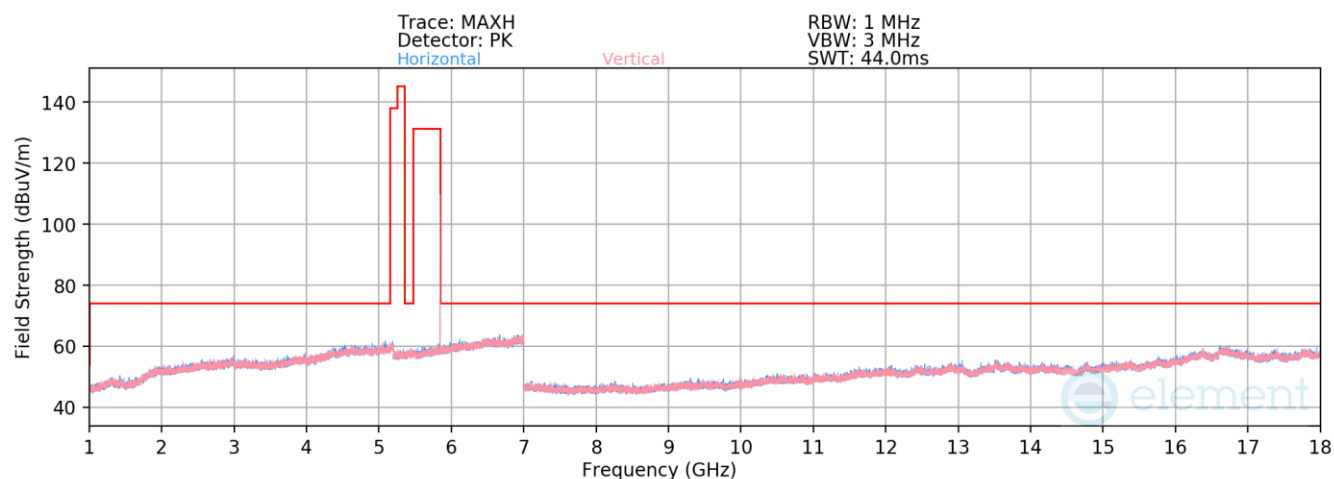

Plot 7-521. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR HDR4 ePA – 5844MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5844MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11688.00	Average	V	-	-	-82.60	16.64	41.04	53.98	-12.94
* 11688.00	Peak	V	-	-	-70.58	16.64	53.06	73.98	-20.92
17532.00	Peak	V	-	-	-72.55	24.50	58.95	68.23	-9.28

Table 7-61. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 331 of 439

V 11.0 06/2025

LE

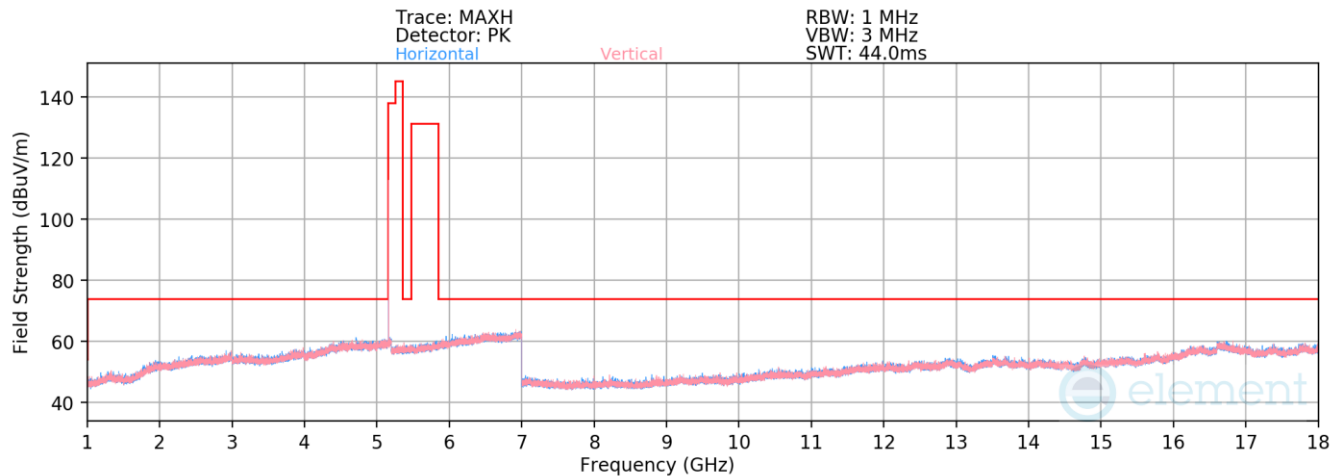

Plot 7-522. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 5162MHz)

Mode:	LE1M
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5162MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10324.00	Peak	V	-	-	-71.06	14.07	50.01	68.23	-18.22
* 15486.00	Average	H	-	-	-83.92	20.60	43.68	53.98	-10.30
* 15486.00	Peak	H	-	-	-72.30	20.60	55.30	73.98	-18.68

Table 7-62. Radiated Spurious Emissions Measurements TxBF Diversity


FCC ID: BCGA3460	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 332 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

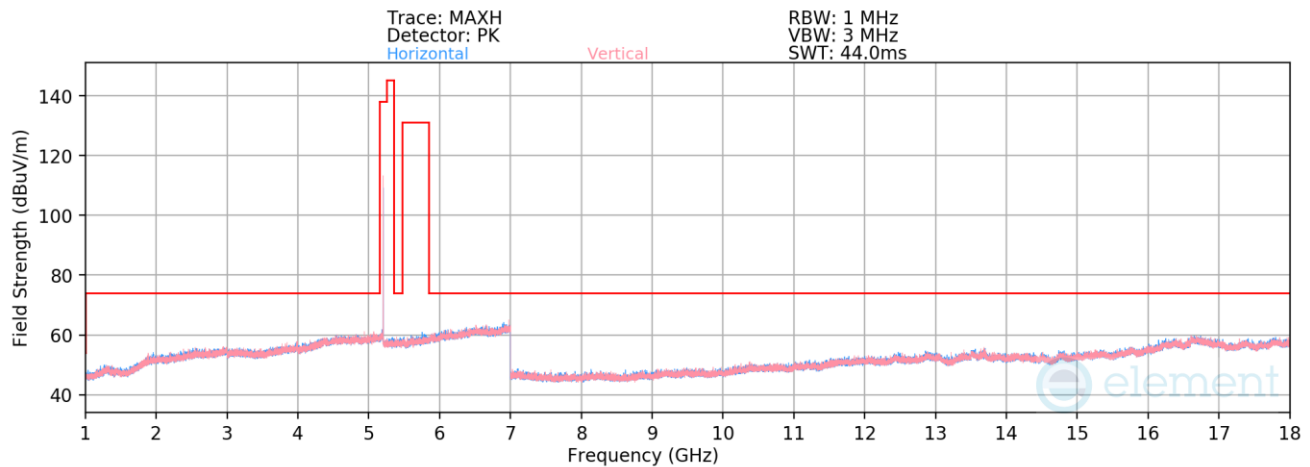

Plot 7-523. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 5203MHz)

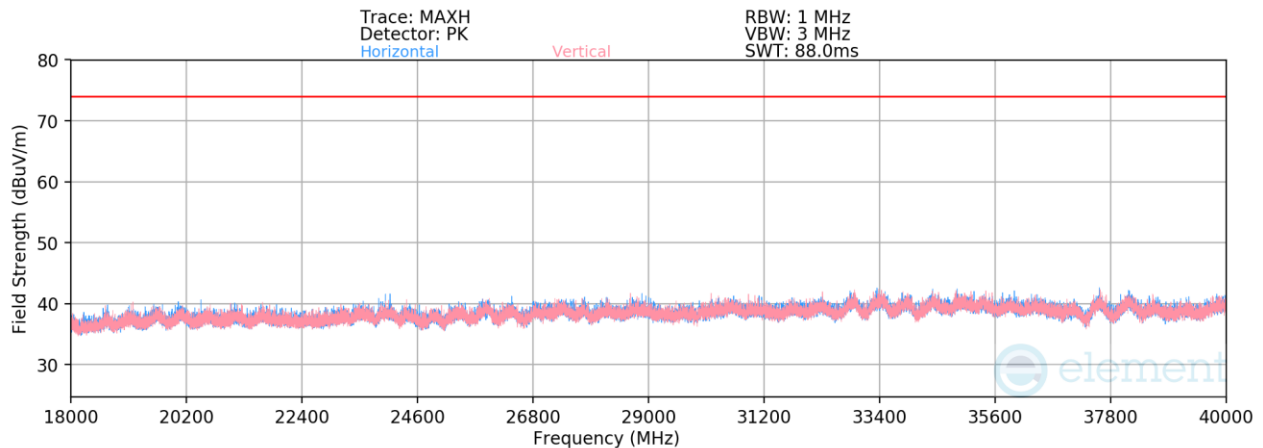

Plot 7-524. Radiated Spurious Emissions Above 18GHz (LE1M ePA – 5203MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5203MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10406.00	Peak	V	-	-	-70.44	14.63	0.00	51.19	68.23	-17.04
* 15609.00	Average	H	-	-	-84.23	21.70	0.00	44.47	53.98	-9.51
* 15609.00	Peak	H	-	-	-73.03	21.70	0.00	55.67	73.98	-18.31
* 20812.00	Average	H	-	-	-61.74	-7.64	-9.54	28.08	53.98	-25.90
* 20812.00	Peak	H	-	-	-50.58	-7.64	-9.54	39.24	73.98	-34.74
26015.00	Peak	V	-	-	-50.56	-5.95	-9.54	40.95	68.23	-27.28

Table 7-63. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device		Page 333 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

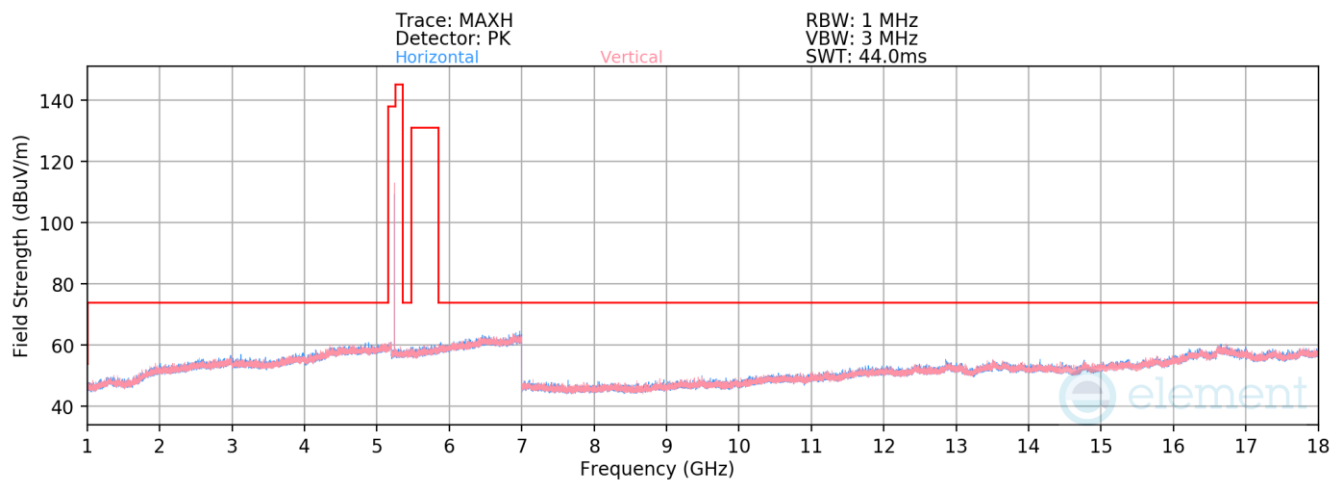

Plot 7-525. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 5245MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10490.00	Peak	V	-	-	-71.14	14.44	50.31	68.23	-17.92
* 15735.00	Average	H	-	-	-84.54	22.48	44.94	53.98	-9.04
* 15735.00	Peak	H	-	-	-73.29	22.48	56.19	73.98	-17.79

Table 7-64. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 334 of 439

V 11.0 06/2025

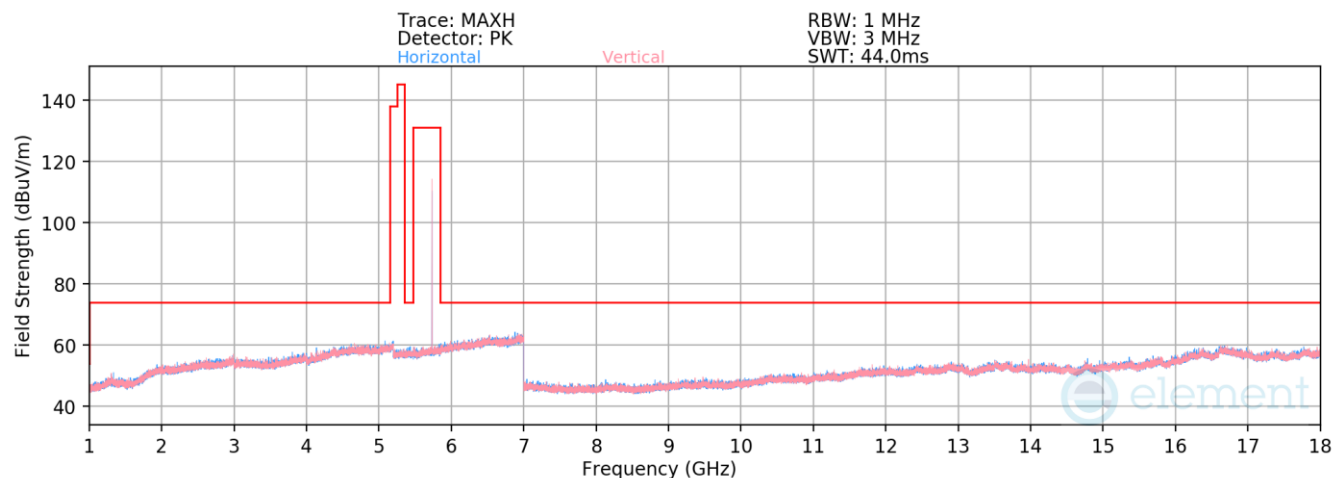

Plot 7-526. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA - 5733MHz)


Mode: LE1M
Data Rate: 1Mbps
Power Scheme: ePA
Distance of Measurements: 3 Meters
Operating Frequency: 5733MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11466.00	Average	H	-	-	-83.22	16.22	40.01	53.98	-13.97
*	11466.00	Peak	H	-	-	-71.71	16.22	51.52	73.98	-22.46
	17199.00	Peak	V	-	-	-73.42	24.10	57.68	68.23	-10.55


Table 7-65. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 335 of 439

V 11.0 06/2025

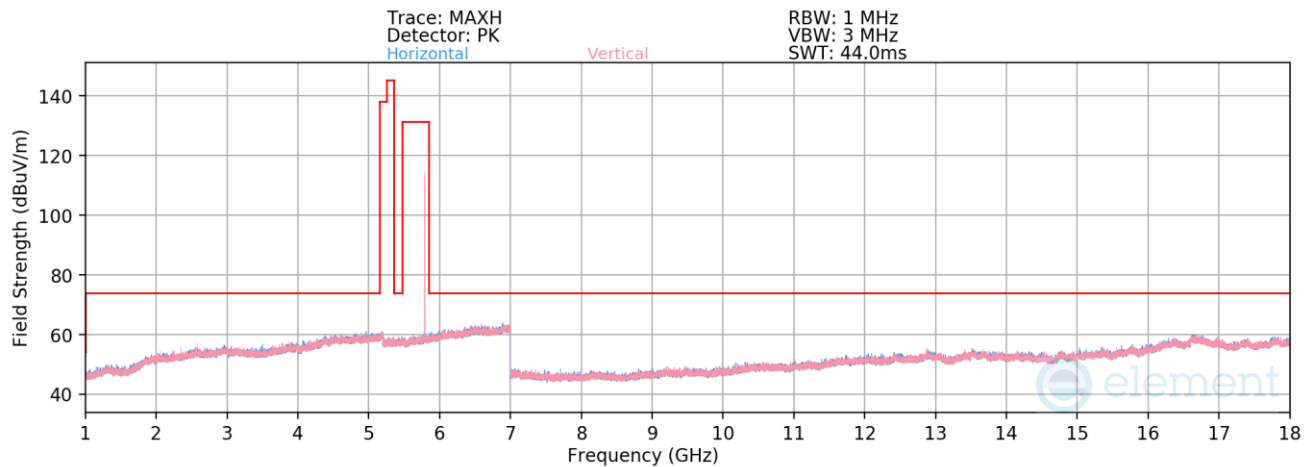

Plot 7-527. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 5788MHz)

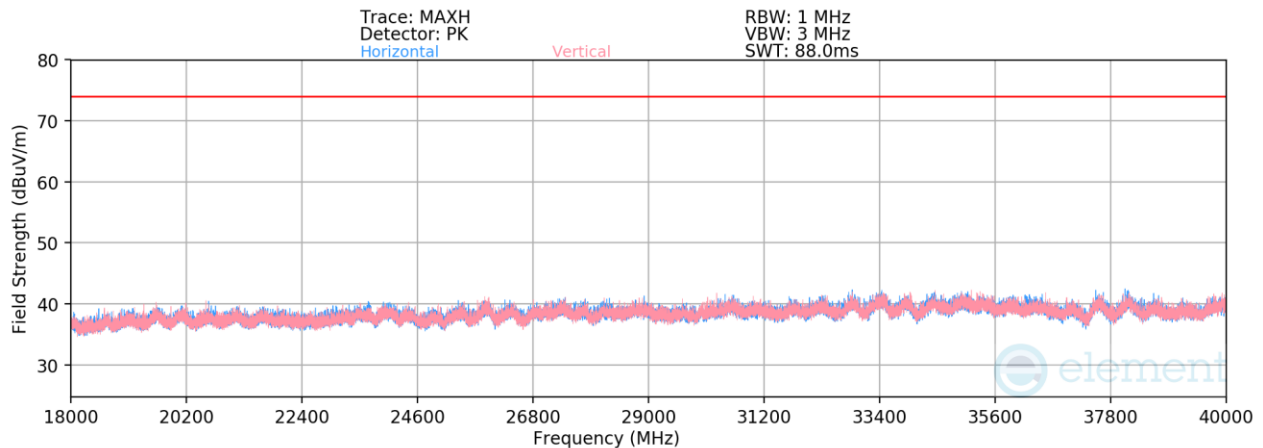

Plot 7-528. Radiated Spurious Emissions Above 18GHz (LE1M ePA – 5788MHz)


Mode:	LE1M
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5788MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11576.00	Average	V	-	-	-82.76	16.22	0.00	40.46	53.98	-13.52
* 11576.00	Peak	V	-	-	-71.56	16.22	0.00	51.66	73.98	-22.32
17364.00	Peak	H	-	-	-73.02	24.82	0.00	58.80	68.23	-9.43
23152.00	Peak	V	-	-	-50.76	-7.12	-9.54	39.58	68.23	-28.65
28940.00	Peak	V	-	-	-52.24	-3.95	-9.54	41.27	68.23	-26.96
34728.00	Peak	V	-	-	-51.03	-4.76	-9.54	41.66	68.23	-26.57

Table 7-66. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 336 of 439

V 11.0 06/2025

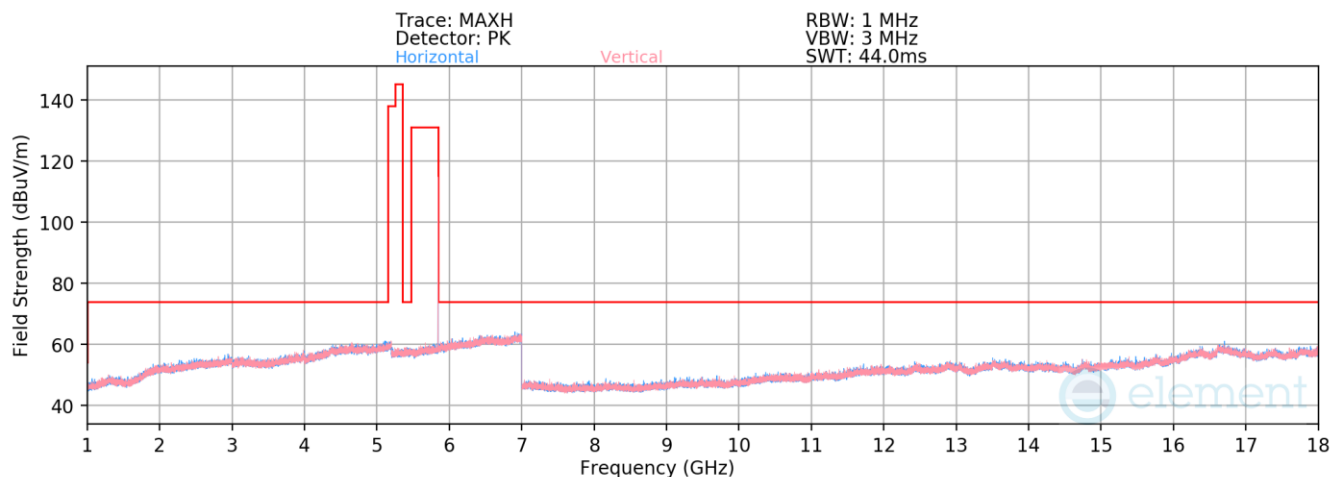

Plot 7-529. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 5844MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5844MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11688.00	Average	H	-	-	-82.55	16.64	41.08	53.98	-12.90
* 11688.00	Peak	H	-	-	-70.95	16.64	52.69	73.98	-21.29
17532.00	Peak	V	-	-	-73.28	24.42	58.14	68.23	-10.09


Table 7-67. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 337 of 439

V 11.0 06/2025


7.6.3 Antenna 3c Radiated Band Edge Measurements (U-NII-1)

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	5162MHz

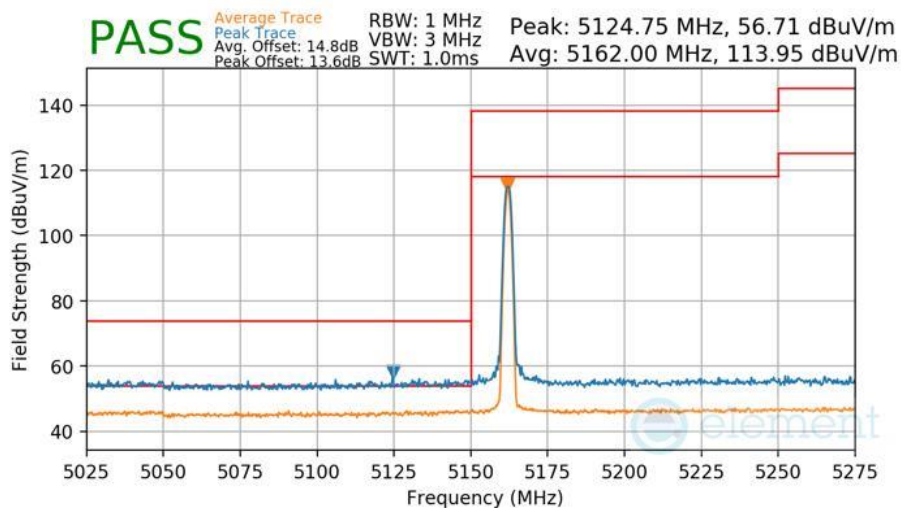

Plot 7-530 Radiated Lower Band Edge Measurement Antenna 3c

Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	5162MHz

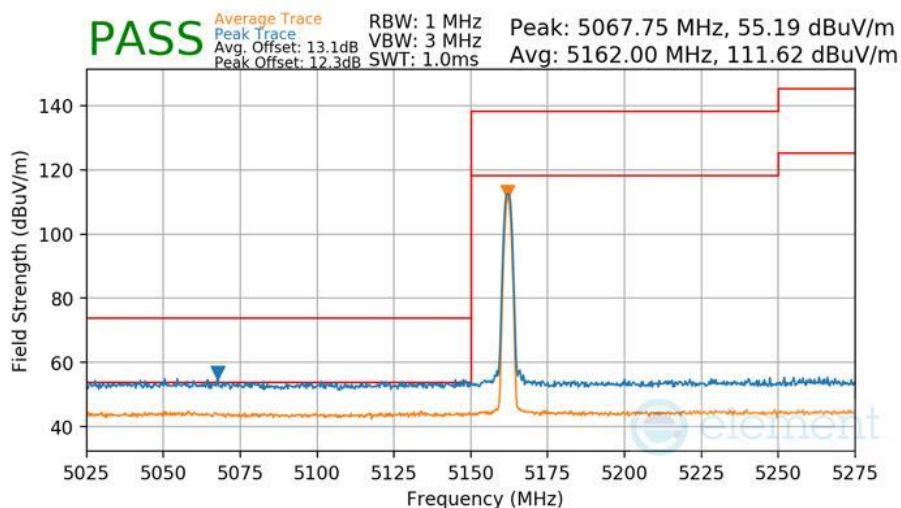


Plot 7-531 Radiated Lower Band Edge Measurement Antenna 3c

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 338 of 439

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

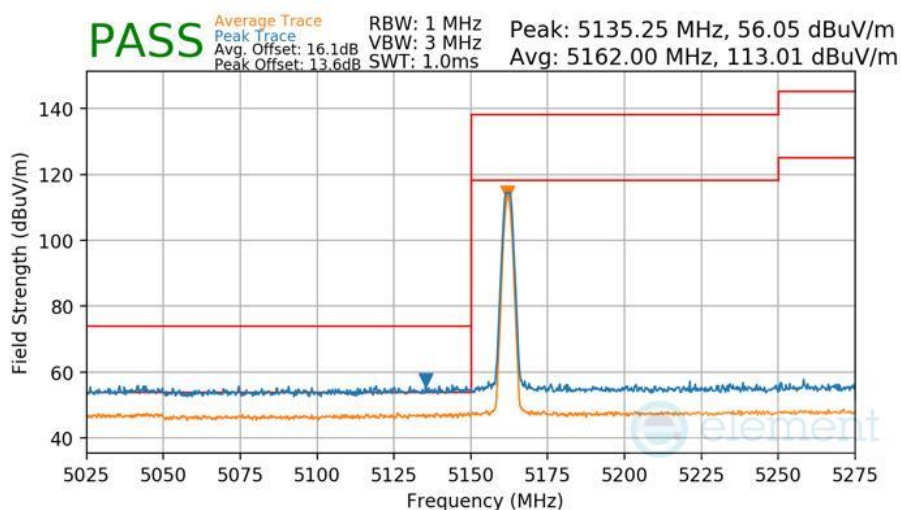

Plot 7-532 Radiated Lower Band Edge Measurement Antenna 3c

Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

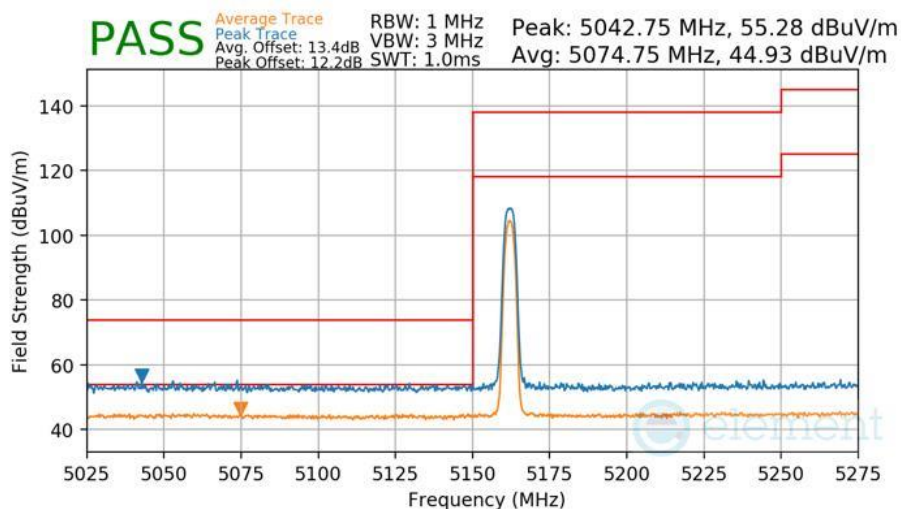


Plot 7-533 Radiated Lower Band Edge Measurement Antenna 3c

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 339 of 439


V 11.0 06/2025

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

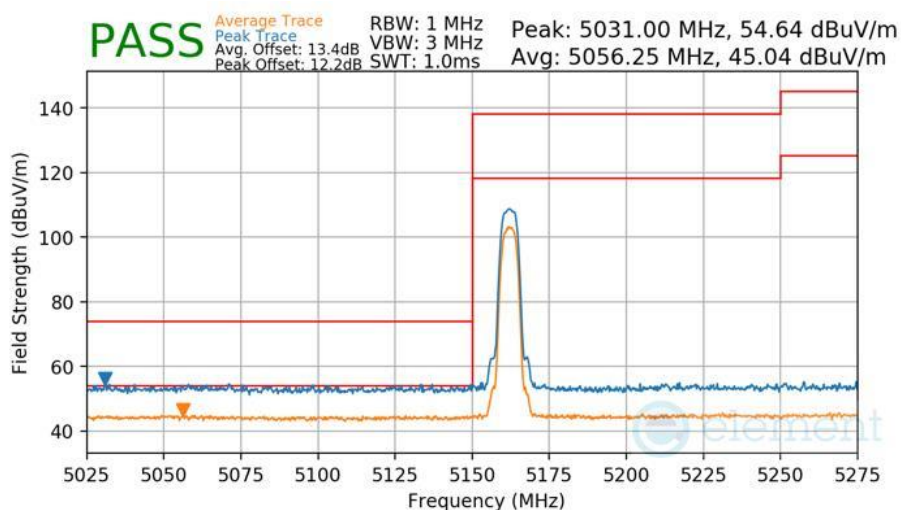

Plot 7-534 Radiated Lower Band Edge Measurement Antenna 3c

Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

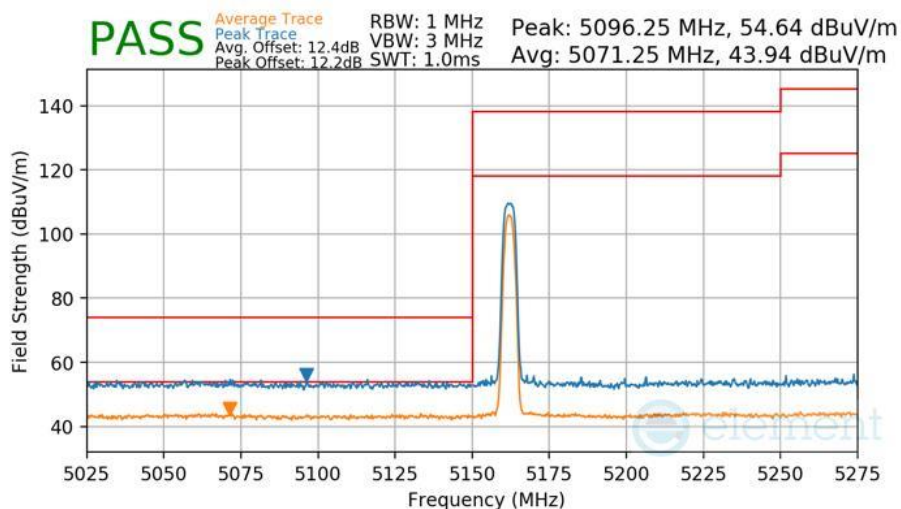


Plot 7-535 Radiated Lower Band Edge Measurement Antenna 3c

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 340 of 439


V 11.0 06/2025

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

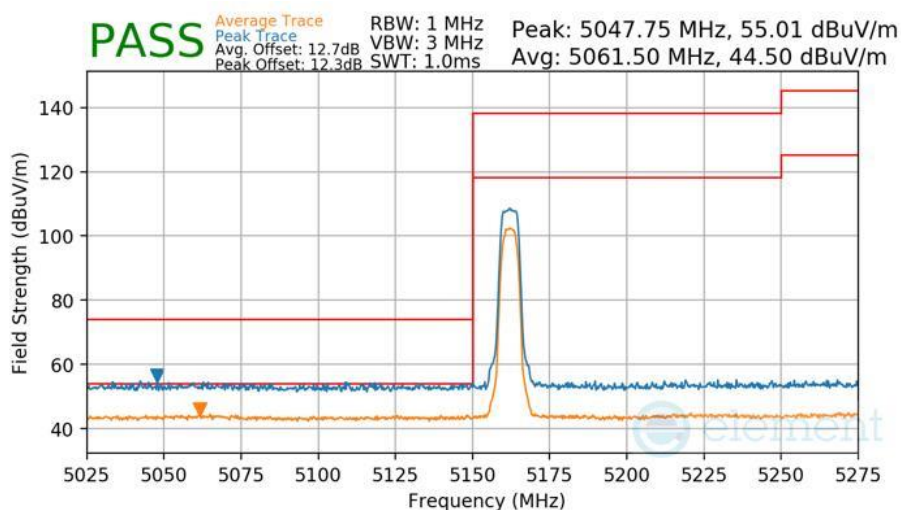

Plot 7-536 Radiated Lower Band Edge Measurement Antenna 3c

Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

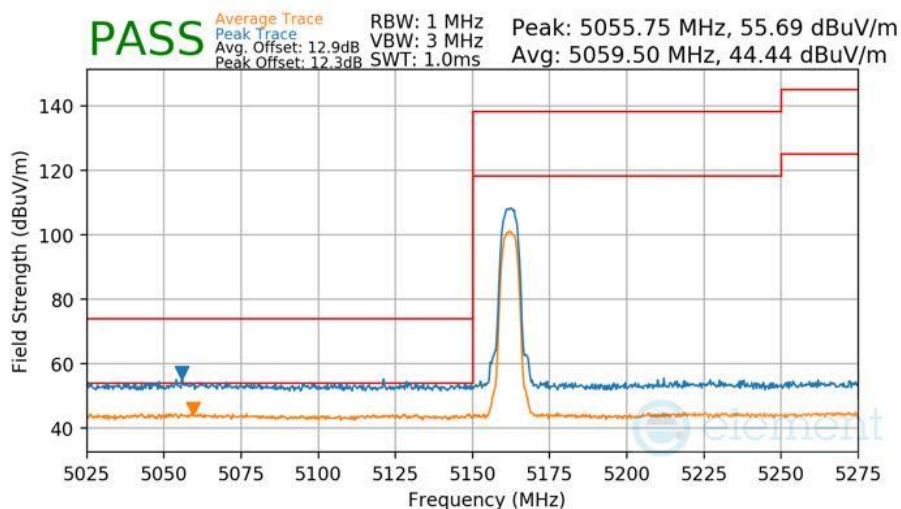


Plot 7-537 Radiated Lower Band Edge Measurement Antenna 3c

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 341 of 439


V 11.0 06/2025

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5164MHz

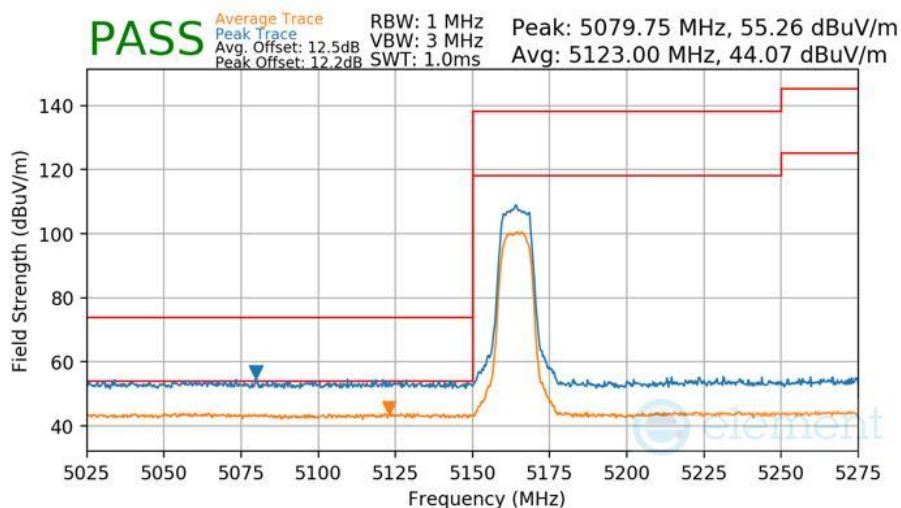

Plot 7-538 Radiated Lower Band Edge Measurement Antenna 3c

Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5164MHz

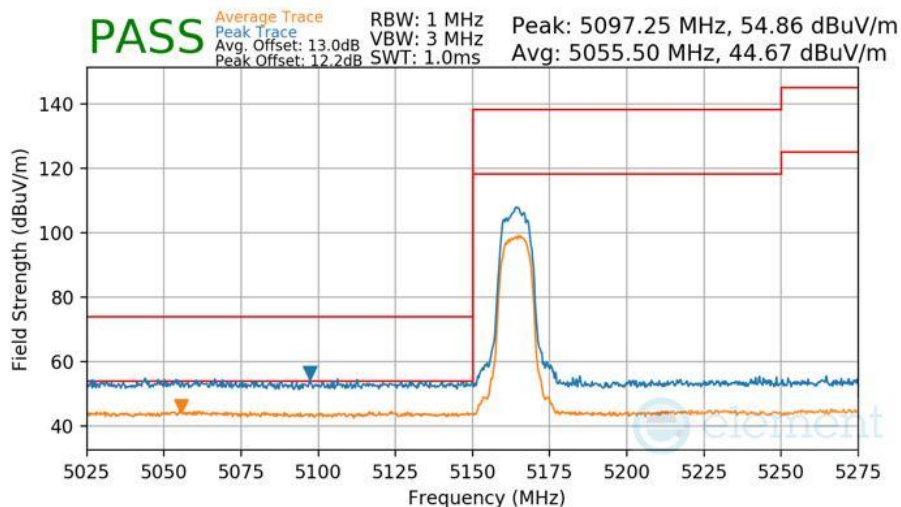


Plot 7-539 Radiated Lower Band Edge Measurement Antenna 3c

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 342 of 439


V 11.0 06/2025

Mode HDT2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

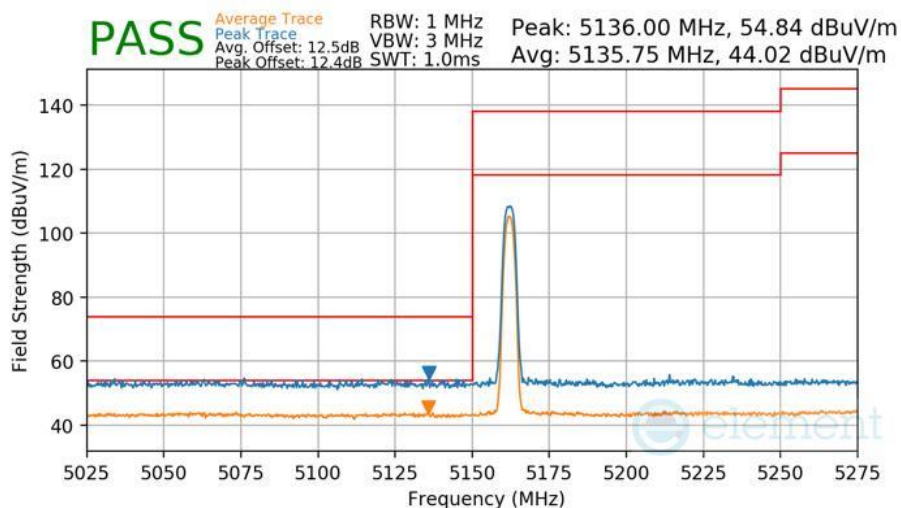

Plot 7-540 Radiated Lower Band Edge Measurement Antenna 3c

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

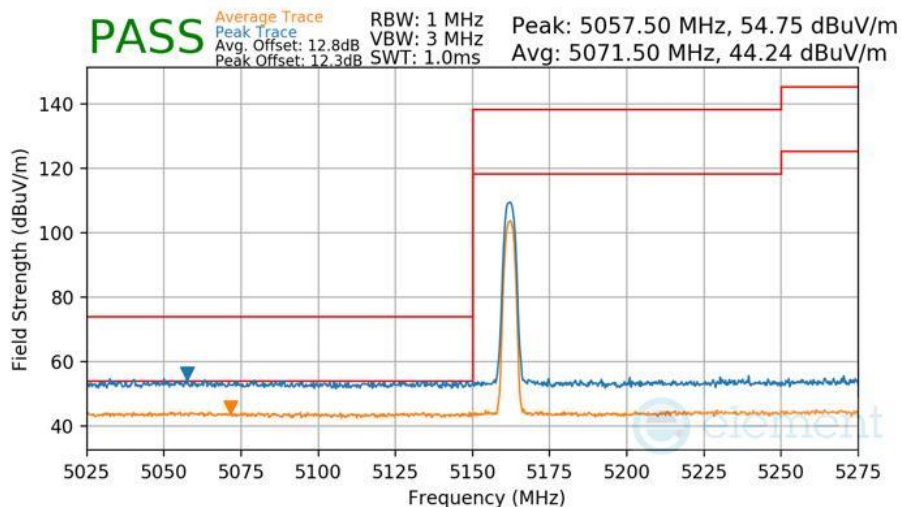

Plot 7-541 Radiated Lower Band Edge Measurement Antenna 3c

FCC ID: BCGA3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-19-R2.BCG	Test Dates: 09/15/2025 - 12/3/2025	EUT Type: Tablet Device	Page 343 of 439

V 11.0 06/2025