




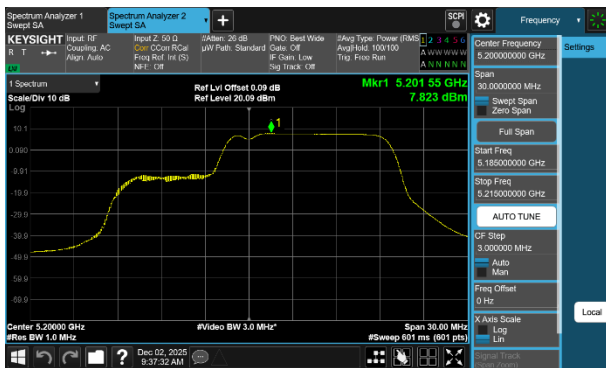


Plot 7-254 PSD SDM Diversity Antenna 1b (20MHz BW 802.11be(RU) RU106+26 Index83 - Ch.40)

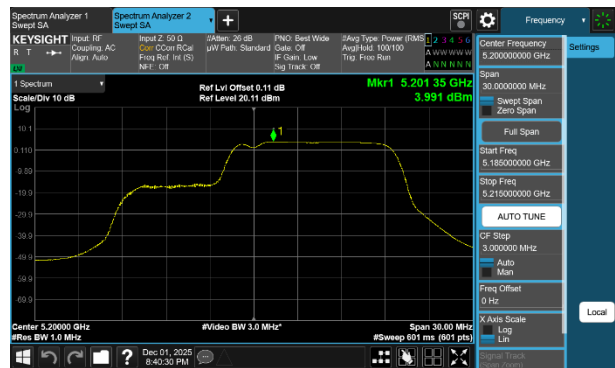


Plot 7-257 PSD SDM Diversity Antenna 3c (20MHz BW 802.11be(RU) RU106+26 Index83 - Ch.40)

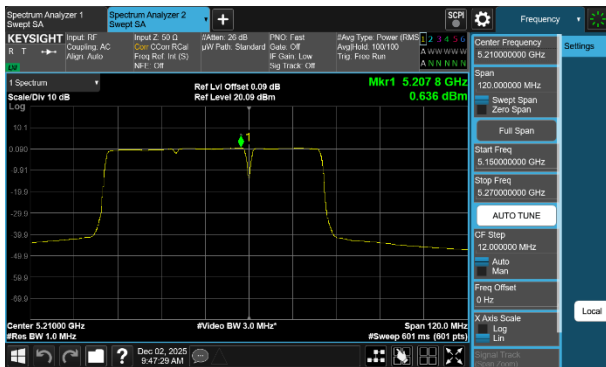


Plot 7-255 PSD CDD Diversity Antenna 1b (80MHz BW 802.11be(RU) RU484+242 Index93 - Ch.42)

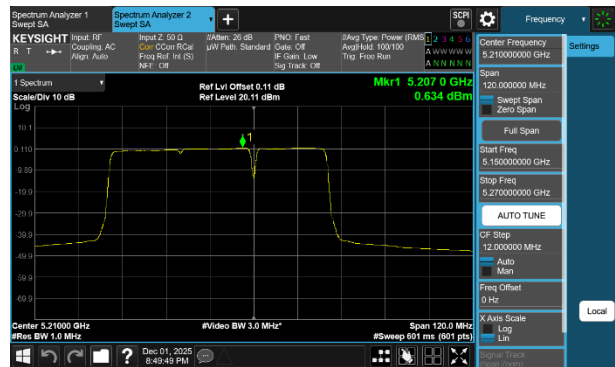

Plot 7-258 PSD CDD Diversity Antenna 3c (80MHz BW 802.11be(RU) RU484+242 Index93 - Ch.42)

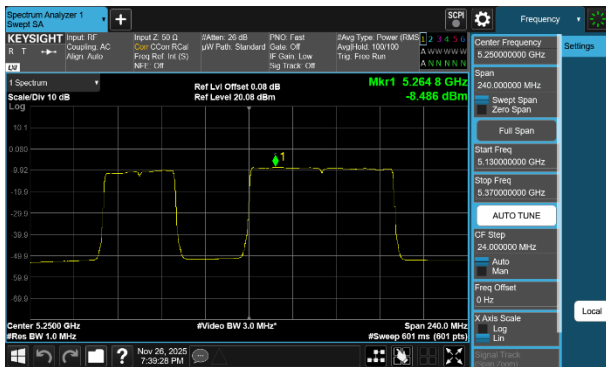

Plot 7-256 PSD CDD Diversity Antenna 1b (160MHz BW 802.11be(RU) RU996+484 Index95 - Ch.50)

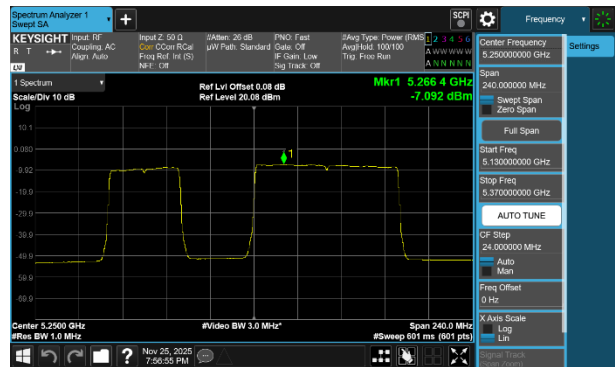


Plot 7-259 PSD CDD Diversity Antenna 3c (160MHz BW 802.11be(RU) RU996+484 Index95 - Ch.50)


FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 144 of 398




Plot 7-260 PSD SDM Diversity Antenna 1b (20MHz BW 802.11be(RU) RU242 Index61 - Ch.48)

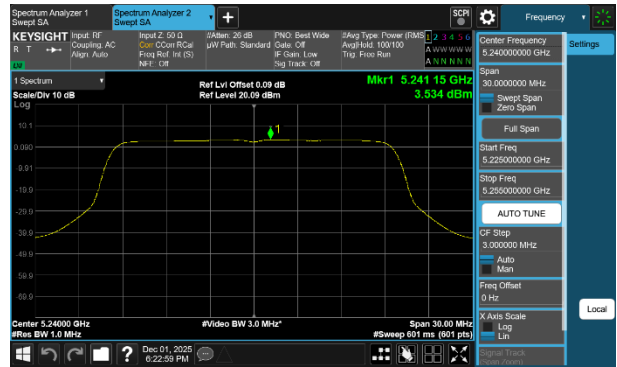


Plot 7-264 PSD SDM Diversity Antenna 3c (20MHz BW 802.11be(RU) RU242 Index61 - Ch.48)

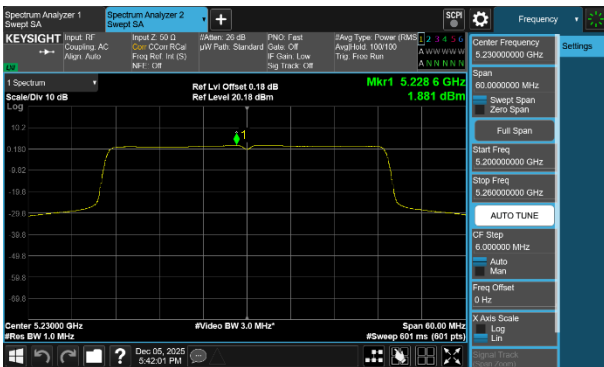


Plot 7-261 PSD SDM Diversity Antenna 1b (40MHz BW 802.11be(RU) RU484 Index65 - Ch.46)

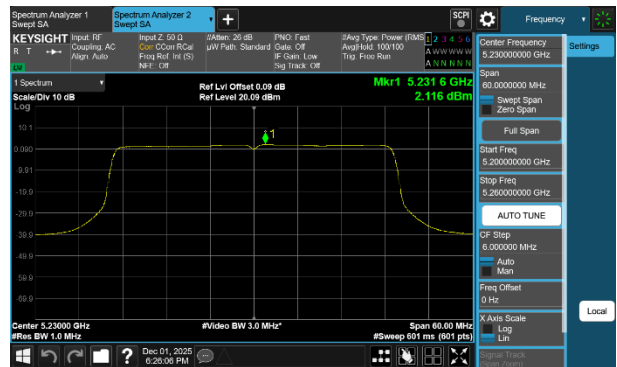


Plot 7-265 PSD SDM Diversity Antenna 3c (40MHz BW 802.11be(RU) RU484 Index65 - Ch.46)

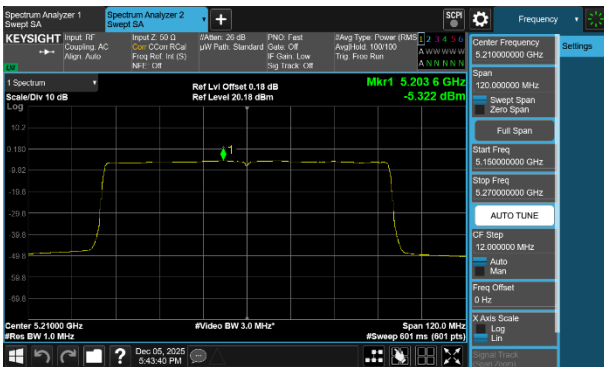

Plot 7-262 PSD CDD Diversity Antenna 1b (80MHz BW 802.11be(RU) RU996 Index67 - Ch.42)

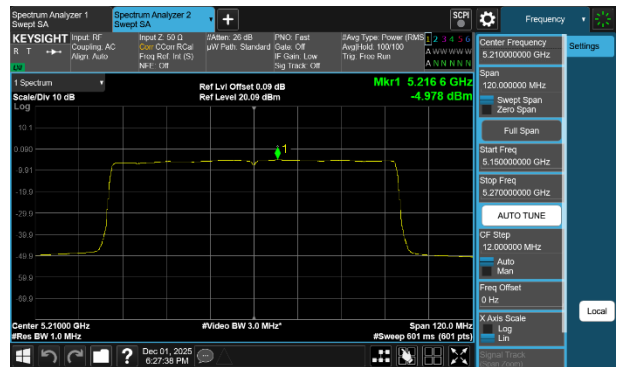


Plot 7-266 PSD CDD Diversity Antenna 3c (80MHz BW 802.11be(RU) RU996 Index67 - Ch.42)

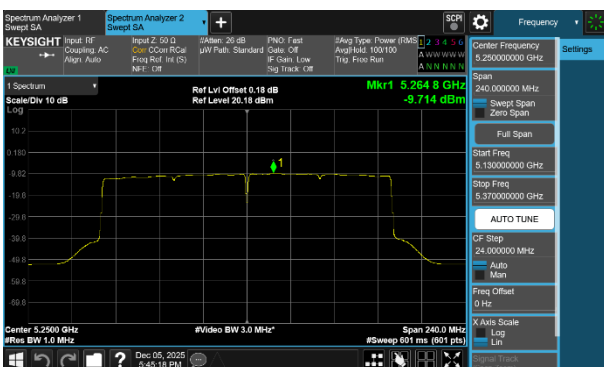

Plot 7-263 PSD CDD Diversity Antenna 1b (160MHz BW 802.11be(RU) RU996X2 Index68 - Ch.50)



Plot 7-267 PSD CDD Diversity Antenna 3c (160MHz BW 802.11be(RU) RU996X2 Index68 - Ch.50)

FCC ID: BCGA3460 IC: 579C-A3460 Test Report S/N: 1C2509100080-23-R3.BCG	 Test Dates: 09/15/2025 - 1/5/2025	MEASUREMENT REPORT (CERTIFICATION) EUT Type: Tablet Device	Approved by: Technical Manager Page 145 of 398
---	--	--	--

Note:

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 662911 v02r01 Section E1), the conducted powers at Antenna 3c and Antenna 3a were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Section 14.6.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Section 14.6.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample CDD/SDM Calculation:

At 5180MHz in 802.11be(RU) (20MHz BW) mode, the power spectral density was measured to be 3.90 dBm for Antenna 3c and 3.81 dBm for Antenna 3a.

$$\text{Antenna 3c} + \text{Antenna 3a} = \text{CDD/SDM}$$

$$(3.90 \text{ dBm} + 3.81 \text{ dBm}) = (2.455 \text{ mW} + 2.404 \text{ mW}) = 4.859 \text{ mW} = 6.87 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 5180MHz in 802.11be(RU) (20MHz BW) mode, the average MIMO power spectral density was calculated to be 6.87 dBm with directional gain of 1.27 dBi.

$$\begin{aligned} \text{e.i.r.p. (dBm)} &= \text{Power Density (dBm)} + \text{Ant gain (dBi)} \\ 6.87 \text{ dBm} + 1.27 \text{ dBi} &= 8.14 \text{ dBm} \end{aligned}$$

FCC ID: BCGA3460 IC: 579C-A3460	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 146 of 398

V 10.6 10/27/2023

7.6 Radiated Spurious Emission – Above 1GHz

\$15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. RU26, 52 Tones, RU106, RU242, RU484, RU996 and RU996x2), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-194 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-194. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclauses 12.7.7, 12.7.6
KDB 789033 D02 v02r01 – Section G

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 147 of 398

V 10.6 10/27/2023

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

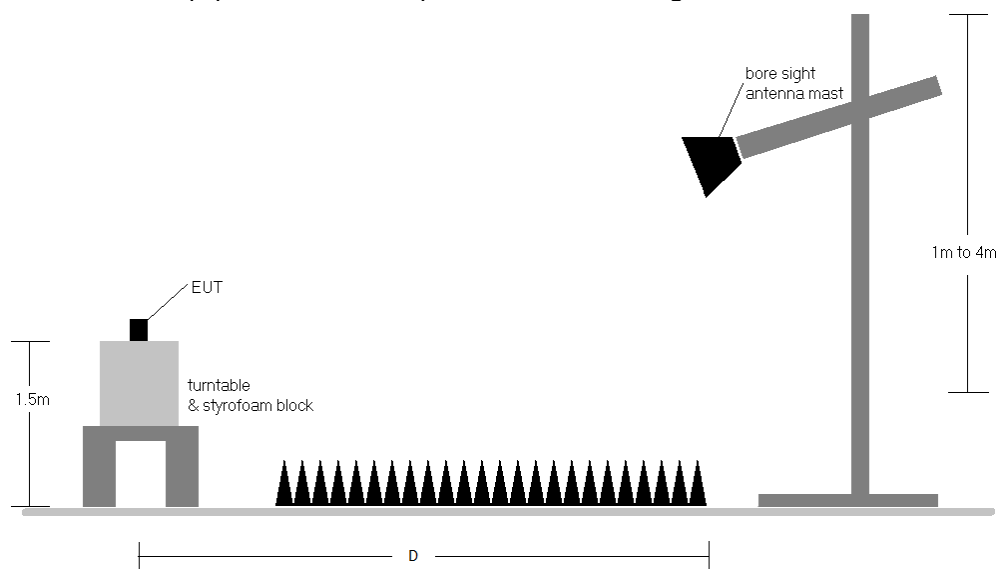


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 148 of 398

V 10.6 10/27/2023

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-194.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-194. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

FCC ID: BCGA3460 IC: 579C-A3460	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 149 of 398

V 10.6 10/27/2023

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6.3 to 7.6.22 was calculated using the formula:


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: BCGA3460 IC: 579C-A3460	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 150 of 398

V 10.6 10/27/2023

7.6.1 CDD Primary Radiated Spurious Emissions

RU26

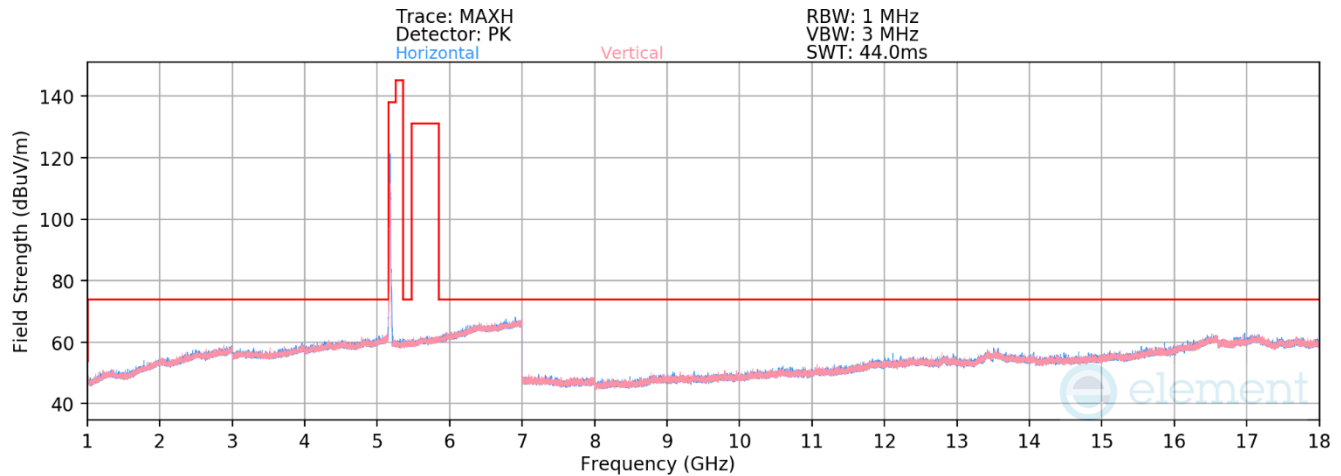

Plot 7-268. RSE above 1GHz CDD Primary (11be – Ch.36 – RU26)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	H	-	-	-72.97	17.05	51.08	68.23	-17.15
* 15540.00	Average	H	-	-	-85.08	24.96	46.89	53.98	-7.09
* 15540.00	Peak	H	-	-	-73.38	24.96	58.59	73.98	-15.39


Table 7-195. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device		Page 151 of 398

V 10.6 10/27/2023

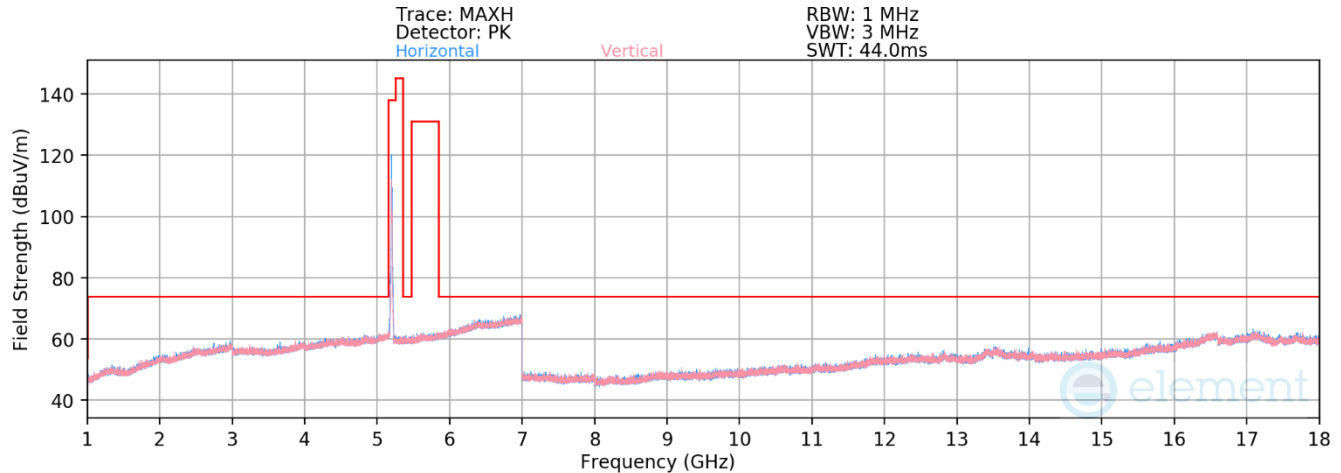

Plot 7-269. RSE above 1GHz CDD Primary (11be - Ch.40 - RU26)

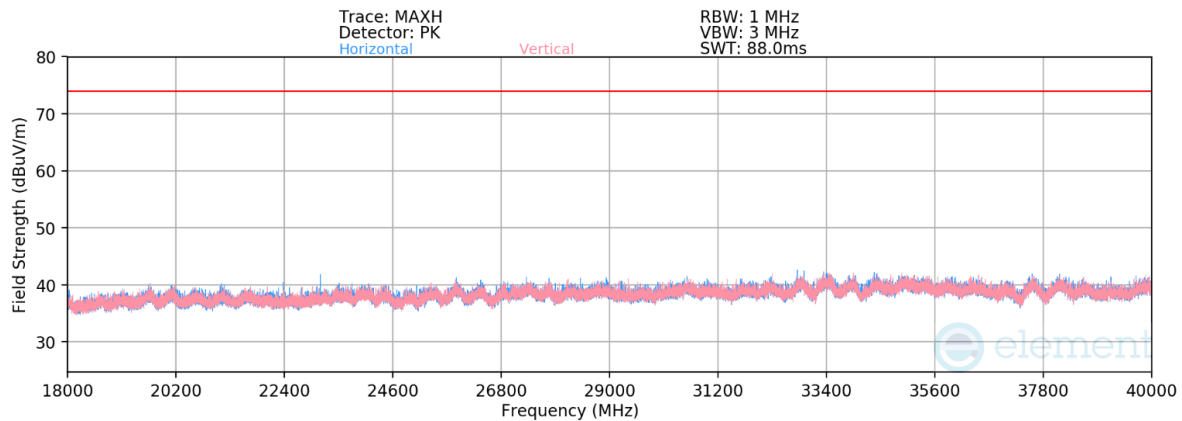

Plot 7-270. Radiated Spurious Emissions 18 GHz - 40GHz CDD Primary (11be Ch.40 - RU26)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters

Operating Frequency: 5200MHz


Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	H	-	-	-72.92	17.27	0.00	51.36	68.23	-16.87
15600.00	Average	H	-	-	-85.22	24.81	0.00	46.59	53.98	-7.39
15600.00	Peak	H	-	-	-74.29	24.81	0.00	57.53	73.98	-16.45
20800.00	Average	H	-	-	-61.79	-7.57	-9.54	28.10	53.98	-25.88
20800.00	Peak	H	-	-	-50.63	-7.57	-9.54	39.26	73.98	-34.72
26000.00	Peak	H	-	-	-50.34	-5.88	-9.54	41.24	68.23	-26.99
31200.00	Average	H	-	-	-63.73	-3.74	-9.54	29.99	53.98	-23.99
31200.00	Peak	H	-	-	-52.36	-3.74	-9.54	41.36	73.98	-32.62

Table 7-196. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 152 of 398

V 10.6 10/27/2023

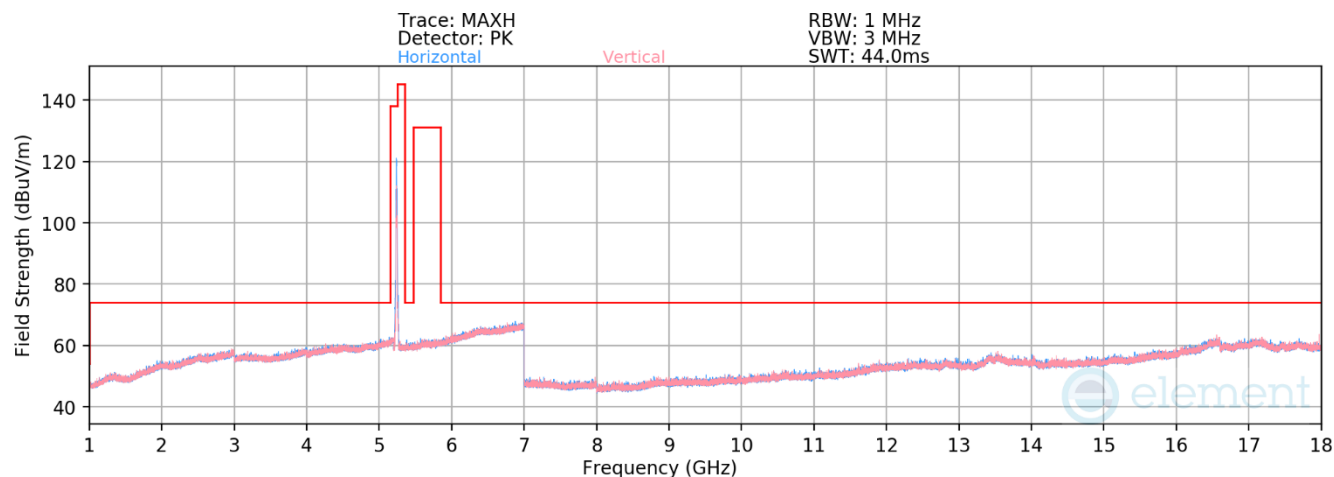

Plot 7-271. RSE above 1GHz CDD Primary (11be – Ch.48 – RU26)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters

Operating Frequency: 5240MHz


Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	V	-	-	-72.96	17.66	51.69	68.23	-16.54
* 15720.00	Average	V	-	-	-85.84	25.61	46.77	53.98	-7.21
* 15720.00	Peak	V	-	-	-74.43	25.61	58.18	73.98	-15.80

Table 7-197. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 153 of 398

V 10.6 10/27/2023

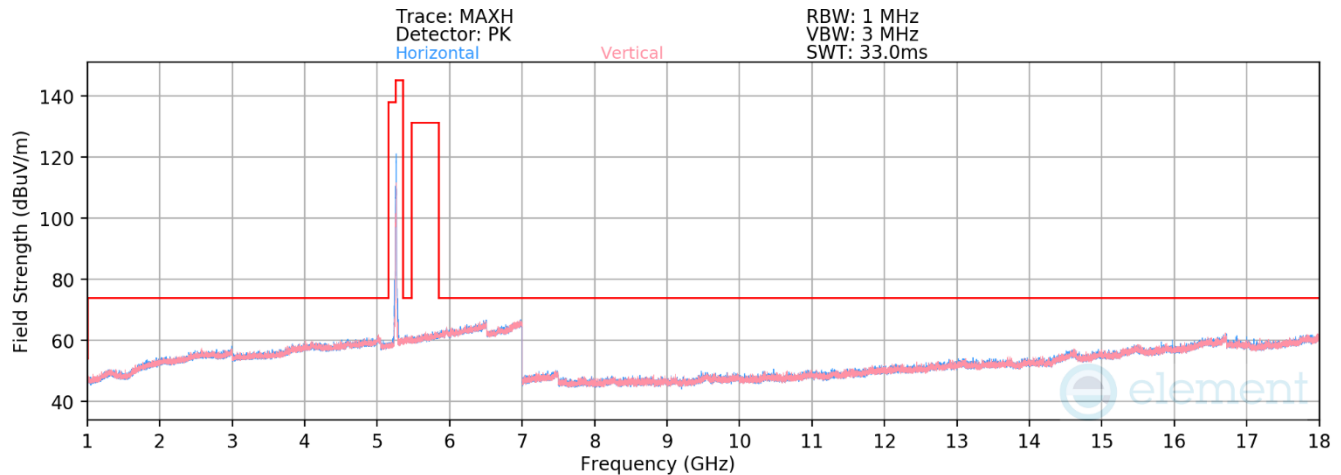


Plot 7-272. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.52 – RU26)

Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	H	-	-	-69.53	12.36	49.83	68.23	-18.40
* 15780.00	Average	H	-	-	-81.53	20.70	46.17	53.98	-7.81
* 15780.00	Peak	H	-	-	-71.01	20.70	56.69	73.98	-17.29

Table 7-198. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 154 of 398

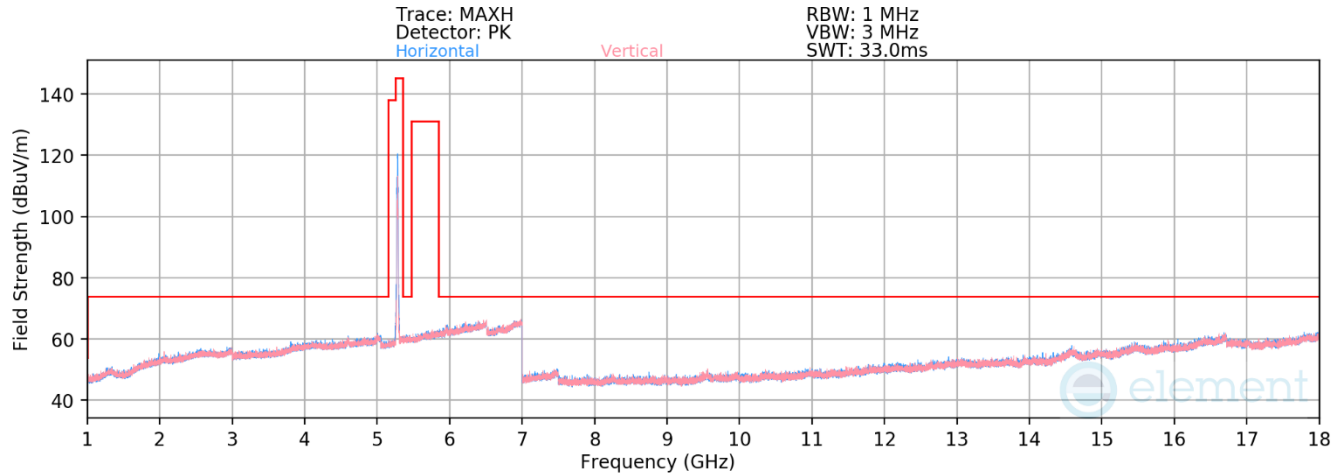

Plot 7-273. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.56 – RU26)

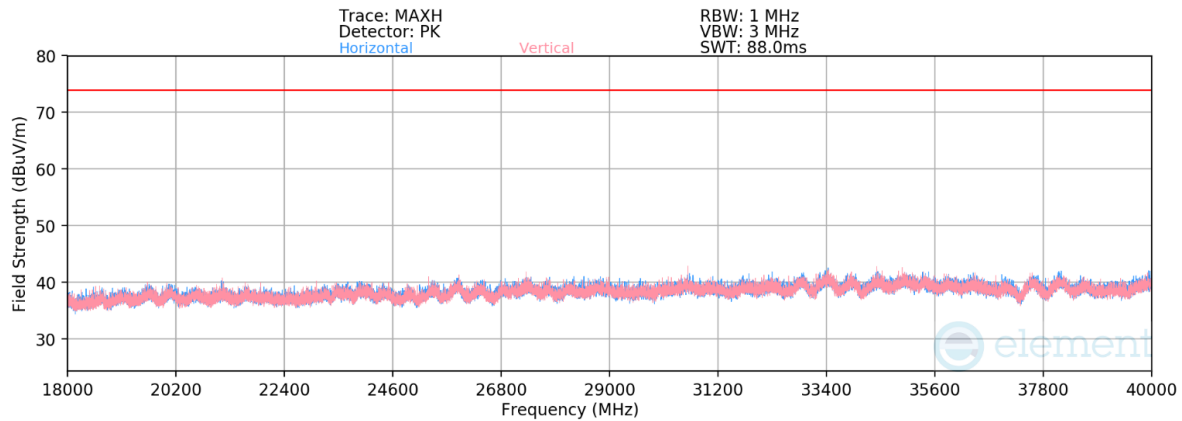

Plot 7-274. Radiated Spurious Emissions 18 GHz - 40GHz CDD Primary (11be Ch.56 — RU26)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters


Operating Frequency: 5280MHz

Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	H	-	-	-70.16	12.16	0.00	49.00	68.23	-19.23
* 15840.00	Average	H	-	-	-81.62	20.87	0.00	46.25	53.98	-7.73
* 15840.00	Peak	H	-	-	-69.90	20.87	0.00	57.97	73.98	-16.01
* 21120.00	Average	H	-	-	-60.97	-7.64	-9.54	28.85	53.98	-25.13
* 21120.00	Peak	H	-	-	-49.13	-7.64	-9.54	40.68	73.98	-33.30
* 26400.00	Peak	H	-	-	-49.92	-5.38	-9.54	42.16	68.23	-26.07
* 31680.00	Average	H	-	-	-63.37	-4.05	-9.54	30.04	53.98	-23.94
* 31680.00	Peak	H	-	-	-51.92	-4.05	-9.54	41.49	73.98	-32.49

Table 7-199. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 155 of 398

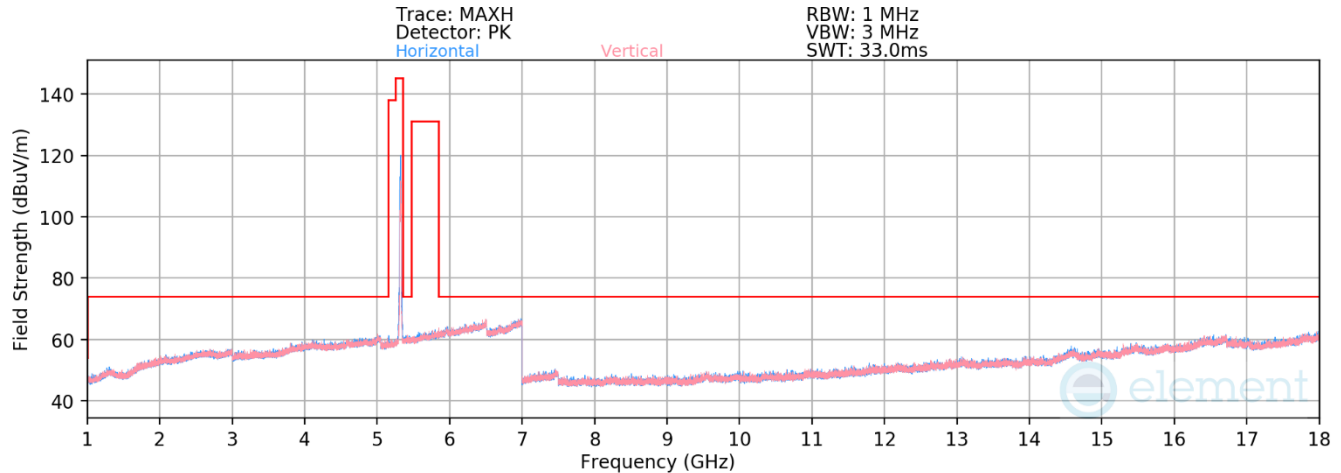

Plot 7-275. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.64 – RU26)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 10640.00	Average	V	-	-	-81.21	12.83	38.63	53.98	-15.35
* 10640.00	Peak	V	-	-	-69.68	12.83	50.15	73.98	-23.83
* 15960.00	Average	H	-	-	-81.94	21.07	46.13	53.98	-7.85
* 15960.00	Peak	H	-	-	-71.40	21.07	56.67	73.98	-17.31

Table 7-200. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 156 of 398

V 10.6 10/27/2023

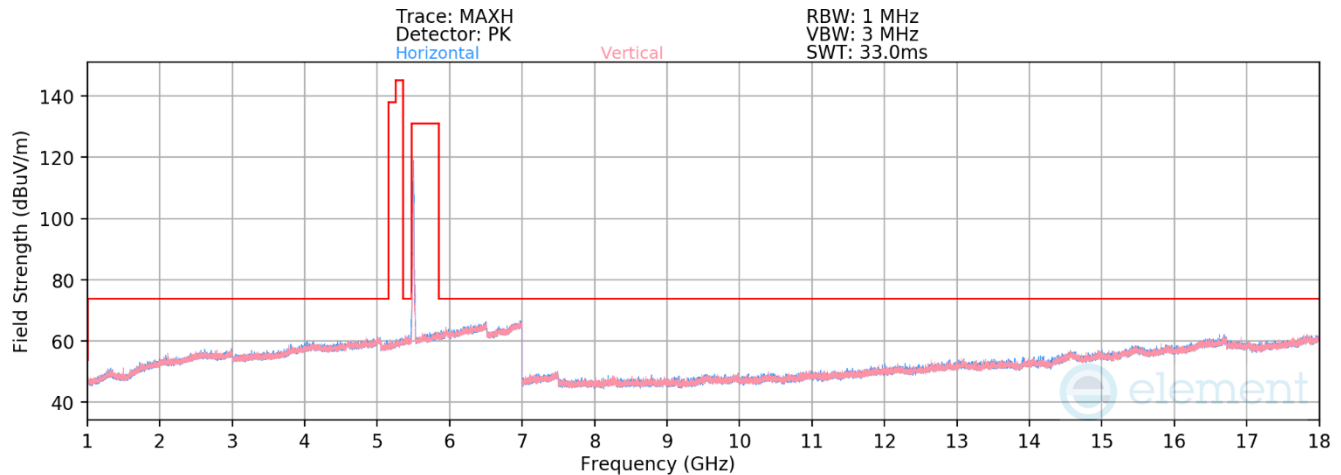

Plot 7-276. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.100 – RU26)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11000.00	Average	H	-	-	-81.43	13.72	39.29	53.98	-14.69
* 11000.00	Peak	H	-	-	-70.55	13.72	50.17	73.98	-23.81
16500.00	Peak	V	-	-	-71.75	22.98	58.23	68.23	-10.00


Table 7-201. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 157 of 398

V 10.6 10/27/2023

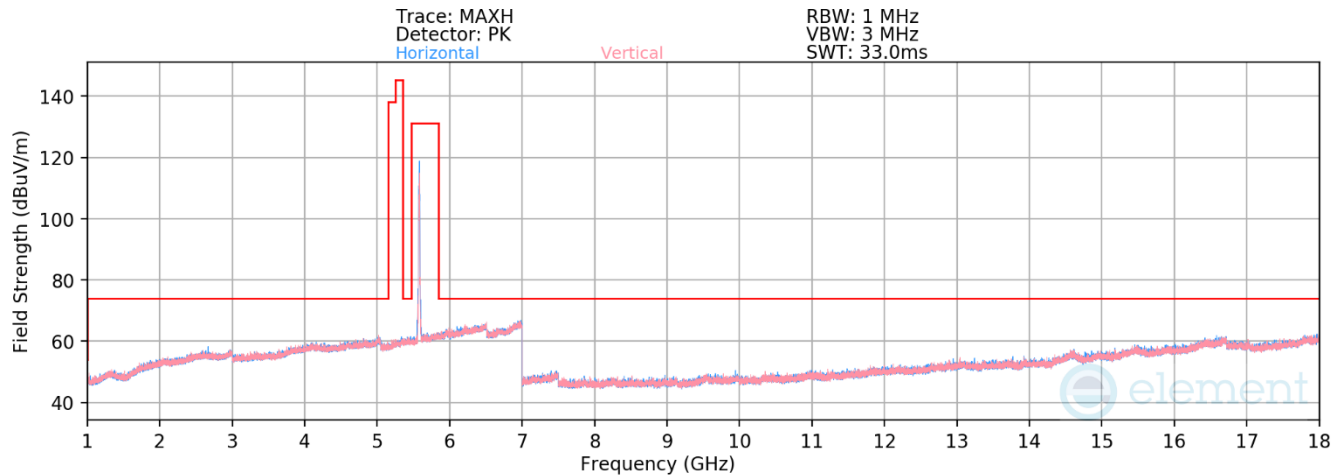

Plot 7-277. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.116 – RU26)

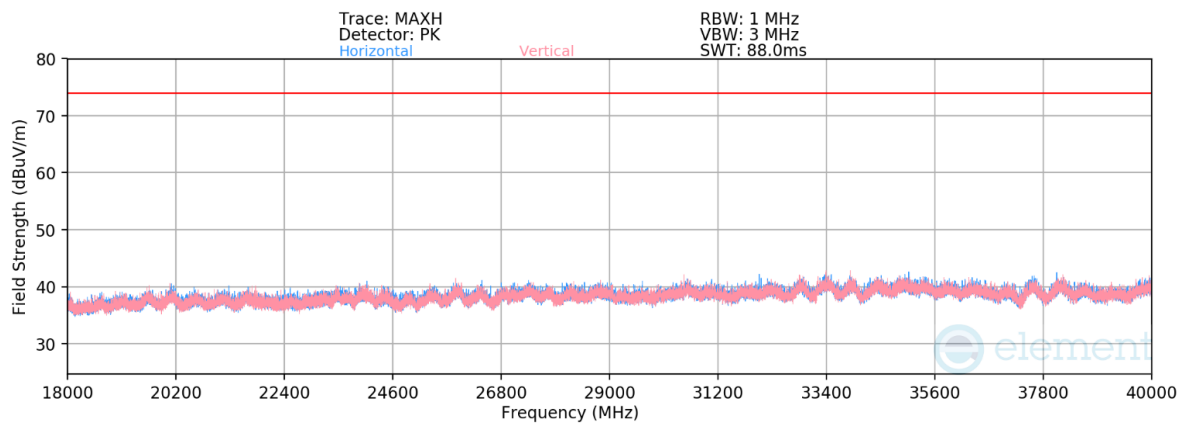

Plot 7-278. Radiated Spurious Emissions 18 GHz - 40GHz CDD Primary (11be Ch.116 — RU26)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters


Operating Frequency: 5580MHz

Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	H	-	-	-80.95	12.75	0.00	38.81	53.98	-15.17
* 11160.00	Peak	H	-	-	-70.20	12.75	0.00	49.56	73.98	-24.42
16740.00	Peak	V	-	-	-68.95	23.11	0.00	61.15	68.23	-7.08
* 22320.00	Average	V	-	-	-61.89	-7.57	-9.54	28.00	53.98	-25.97
* 22320.00	Peak	V	-	-	-50.71	-7.57	-9.54	39.18	73.98	-34.80
27900.00	Peak	V	-	-	-51.83	-4.49	-9.54	41.14	68.23	-27.09
33480.00	Peak	V	-	-	-50.38	-4.28	-9.54	42.80	68.23	-25.43

Table 7-202. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 158 of 398

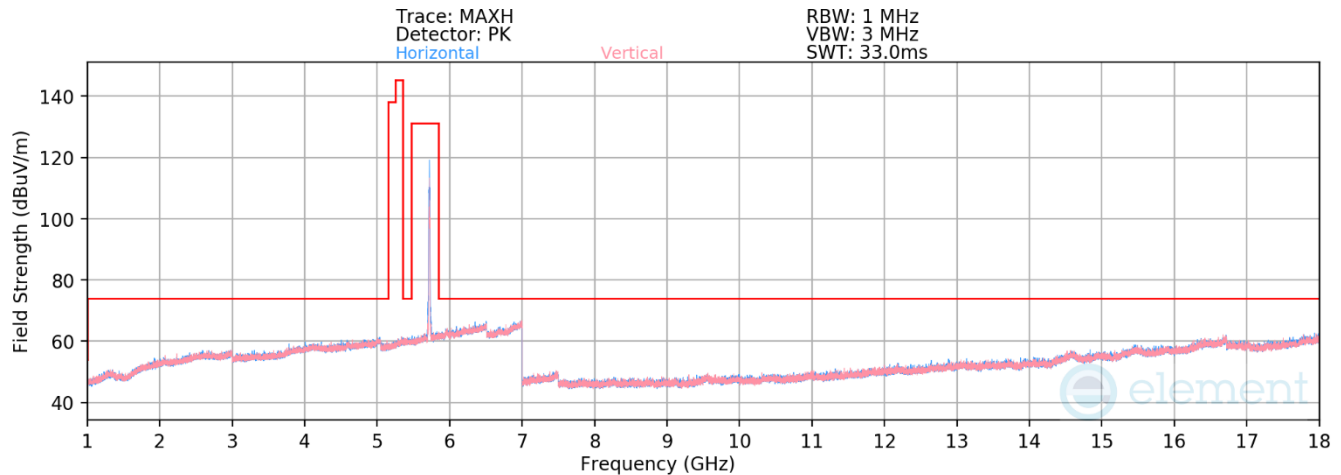

Plot 7-279. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.144 – RU26)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-81.17	13.73	39.56	53.98	-14.42
* 11440.00	Peak	V	-	-	-70.46	13.73	50.27	73.98	-23.71
17160.00	Peak	V	-	-	-71.97	24.19	59.23	68.23	-9.00

Table 7-203. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 159 of 398

V 10.6 10/27/2023

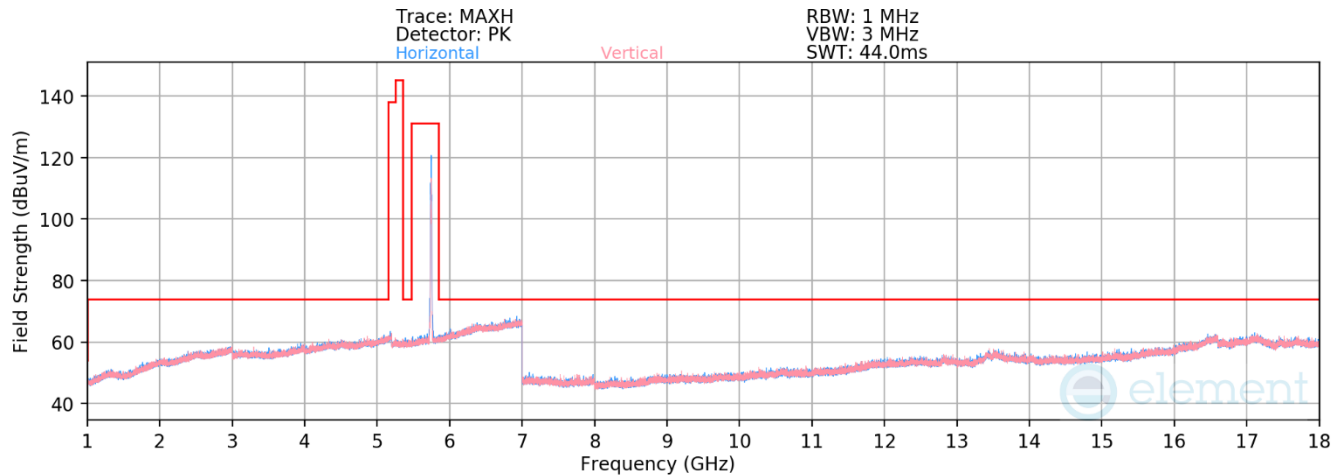

Plot 7-280. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.149 – RU26)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11490.00	Average	H	-	-	-84.63	19.09	41.46	53.98	-12.52
* 11490.00	Peak	H	-	-	-73.44	19.09	52.65	73.98	-21.33
17235.00	Peak	V	-	-	-73.58	27.79	61.21	68.23	-7.02


Table 7-204. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 160 of 398

V 10.6 10/27/2023

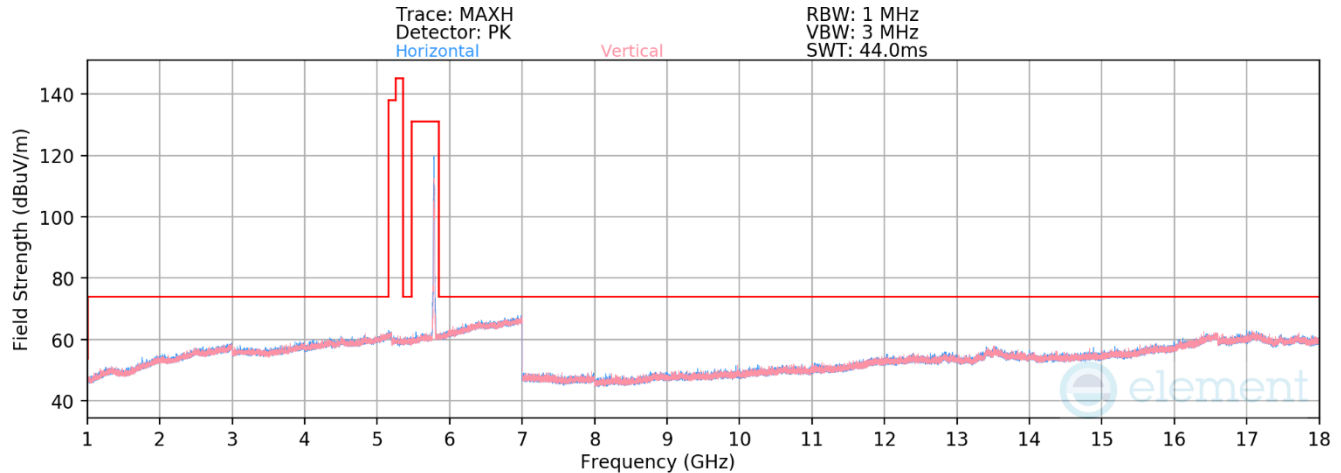

Plot 7-281. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.157 – RU26)

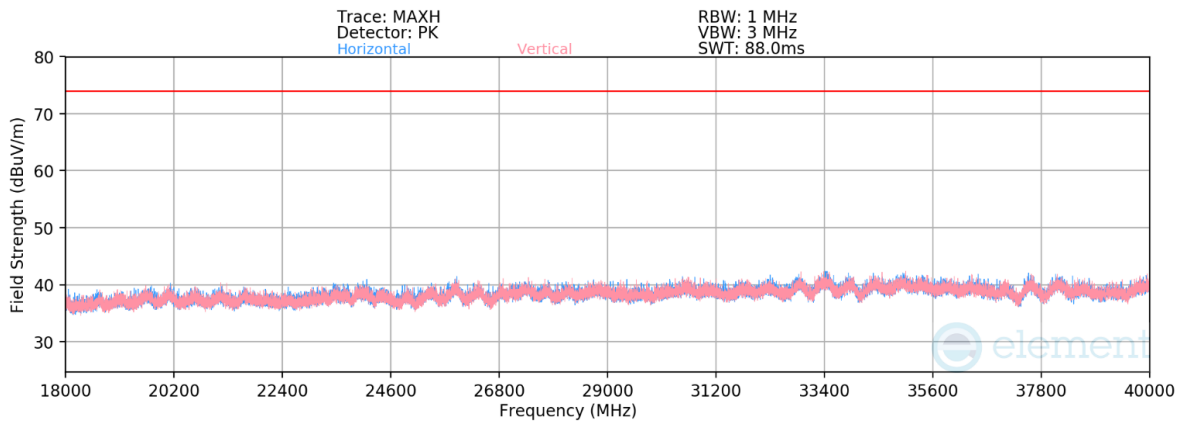

Plot 7-282. Radiated Spurious Emissions 18 GHz - 40GHz CDD Primary (11be Ch.157 — RU26)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters

Operating Frequency: 5785MHz

Channel: 157


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11570.00	Average	H	-	-	-84.24	19.04	0.00	41.80	53.98	-12.18
* 11570.00	Peak	H	-	-	-73.06	19.04	0.00	52.97	73.98	-21.01
17355.00	Peak	V	-	-	-72.97	27.61	0.00	61.64	68.23	-6.59
23140.00	Peak	H	-	-	-51.47	-7.12	-9.54	38.87	68.23	-29.36
28925.00	Peak	H	-	-	-52.02	-3.95	-9.54	41.49	68.23	-26.74
34710.00	Peak	H	-	-	-51.07	-4.81	-9.54	41.57	68.23	-26.66

Table 7-205. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device		Page 161 of 398

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

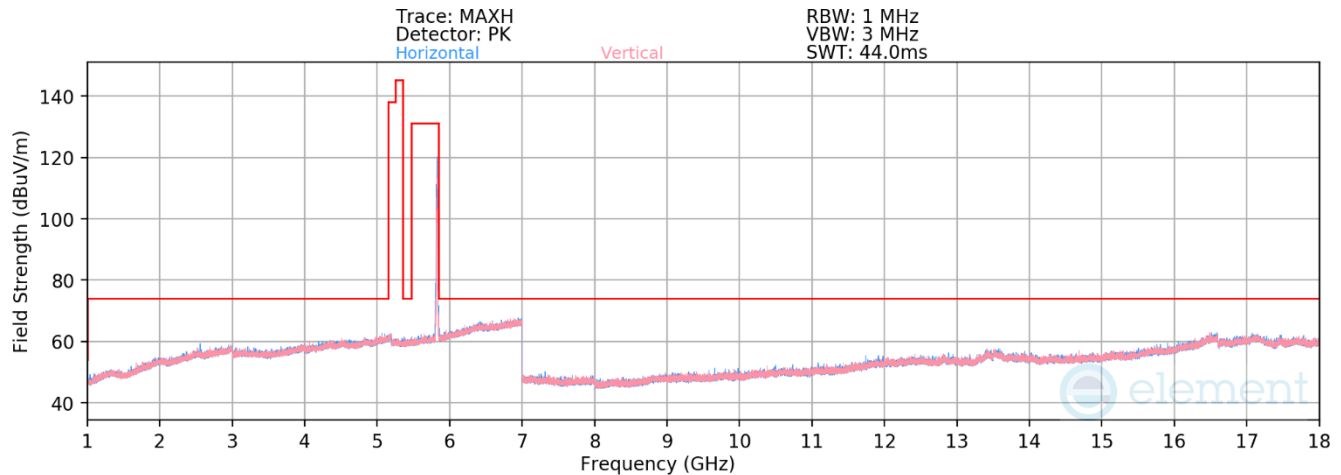

Plot 7-283. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.165 – RU26)

Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11650.00	Average	V	-	-	-84.33	19.48	42.15	53.98	-11.83
* 11650.00	Peak	V	-	-	-72.92	19.48	53.56	73.98	-20.42
17475.00	Peak	V	-	-	-74.58	28.77	61.19	68.23	-7.04

Table 7-206. Radiated Measurements CDD Primary (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 162 of 398

V 10.6 10/27/2023

RU242

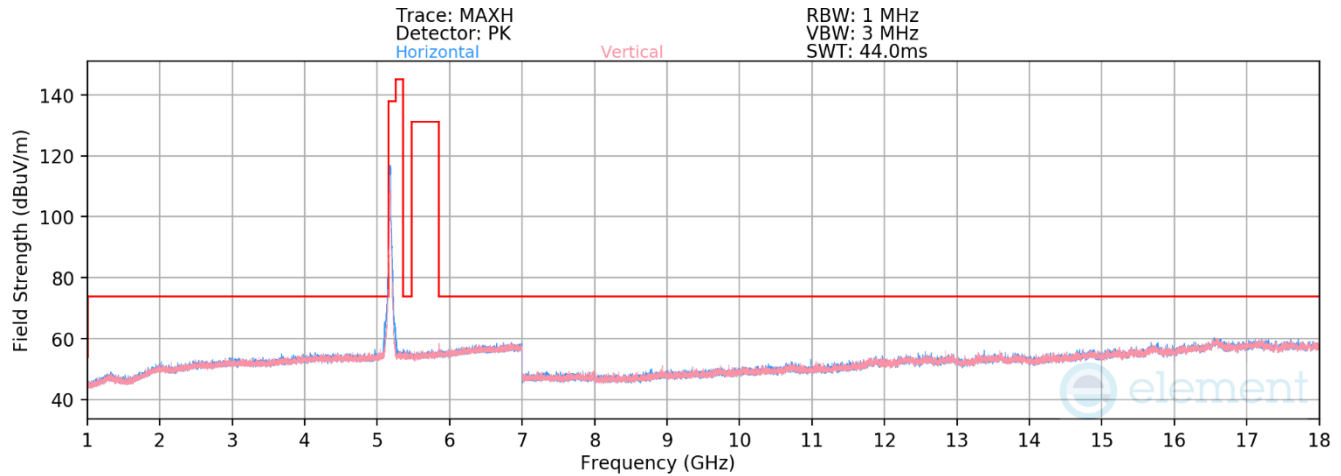

Plot 7-284. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.36 – RU242)


Mode: 11be (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	H	-	-	-73.30	17.05	50.75	68.23	-17.48
* 15540.00	Average	H	-	-	-85.00	24.73	46.72	53.98	-7.25
* 15540.00	Peak	H	-	-	-73.39	24.73	58.34	73.98	-15.64


Table 7-207. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 163 of 398

V 10.6 10/27/2023

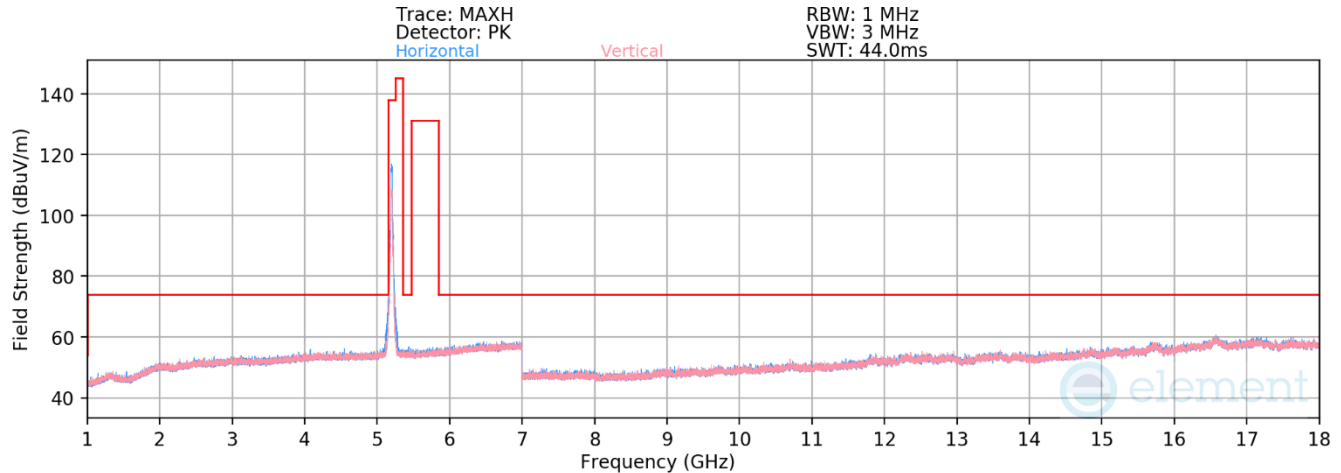

Plot 7-285. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.40 – RU242)

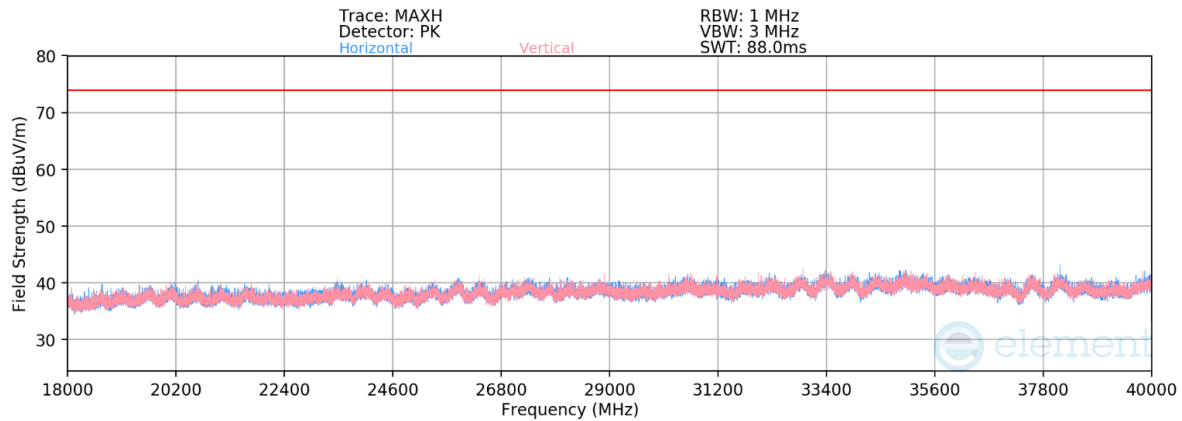


Plot 7-286. Radiated Spurious Emissions 18 GHz - 40GHz CDD Primary (11be Ch.40 — RU242)

Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-72.65	17.27	0.00	51.62	68.23	-16.61
* 15600.00	Average	H	-	-	-85.64	24.91	0.00	46.26	53.98	-7.72
* 15600.00	Peak	H	-	-	-74.38	24.91	0.00	57.53	73.98	-16.45
* 20800.00	Average	V	-	-	-56.37	-7.67	-9.54	33.41	53.98	-20.57
* 20800.00	Peak	V	-	-	-45.12	-7.67	-9.54	44.67	73.98	-29.31
* 26000.00	Peak	H	-	-	-50.24	-5.88	-9.54	41.34	68.23	-26.89
* 31200.00	Average	V	-	-	-63.81	-3.75	-9.54	29.90	53.98	-24.08
* 31200.00	Peak	V	-	-	-52.01	-3.75	-9.54	41.70	73.98	-32.28

Table 7-208. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 164 of 398

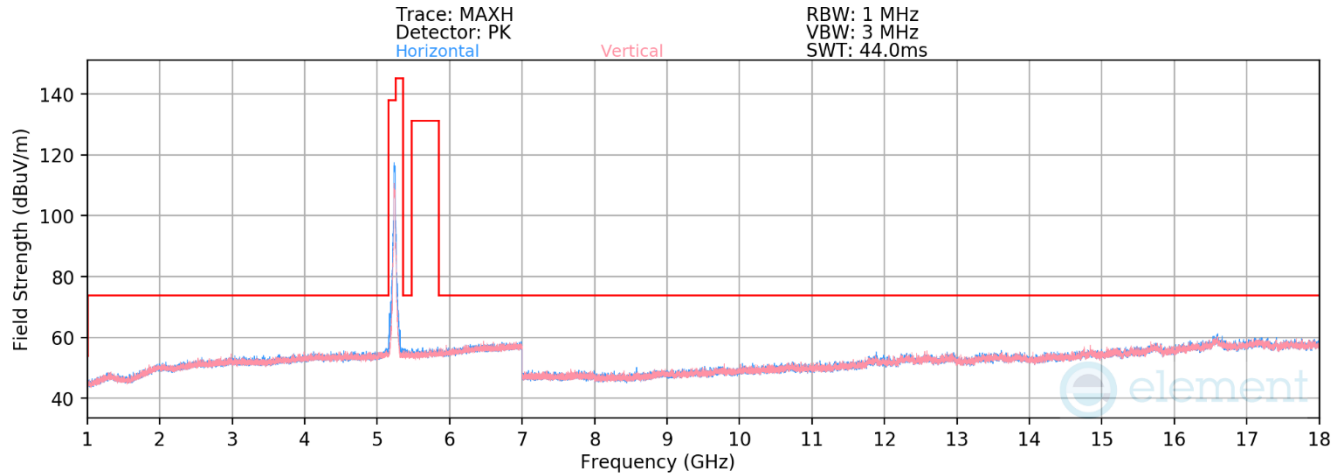

Plot 7-287. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.48 – RU242)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters

Operating Frequency: 5240MHz


Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	H	-	-	-73.07	17.55	51.48	68.23	-16.75
* 15720.00	Average	H	-	-	-85.46	25.65	47.19	53.98	-6.79
* 15720.00	Peak	H	-	-	-73.71	25.65	58.94	73.98	-15.04

Table 7-209. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device		Page 165 of 398

V 10.6 10/27/2023

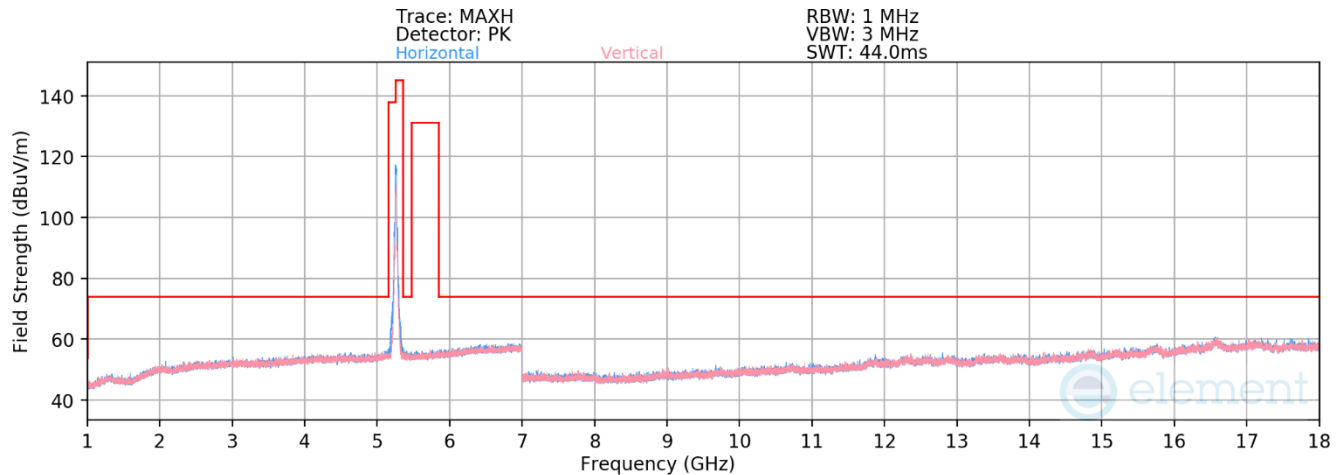

Plot 7-288. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.52 – RU242)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters

Operating Frequency: 5260MHz


Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	H	-	-	-72.63	17.53	51.90	68.23	-16.33
* 15780.00	Average	H	-	-	-86.03	25.78	46.75	53.98	-7.23
* 15780.00	Peak	H	-	-	-74.24	25.78	58.54	73.98	-15.44


Table 7-210. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 166 of 398

V 10.6 10/27/2023

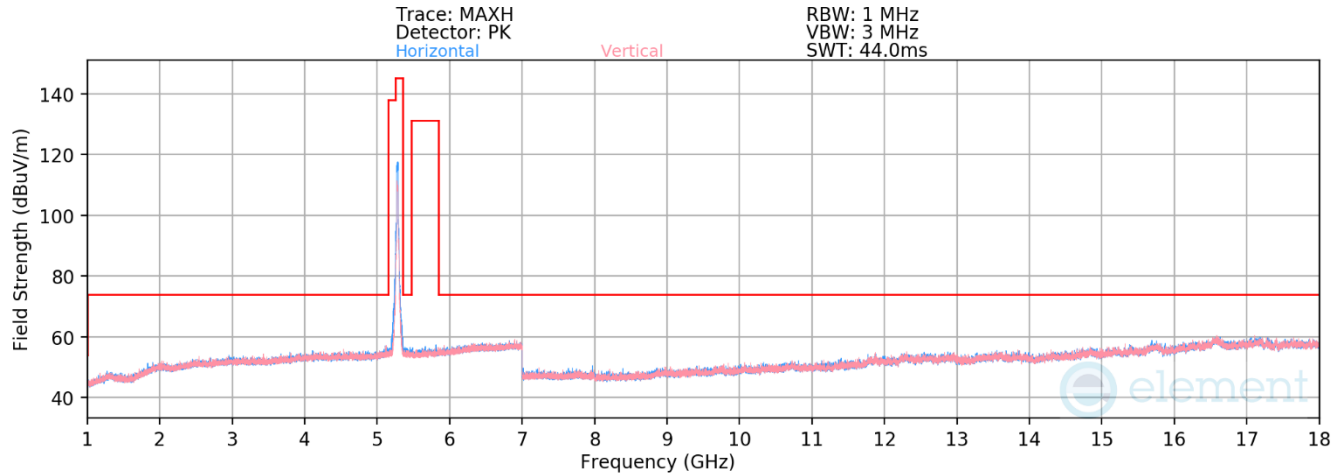

Plot 7-289. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.56 – RU242)

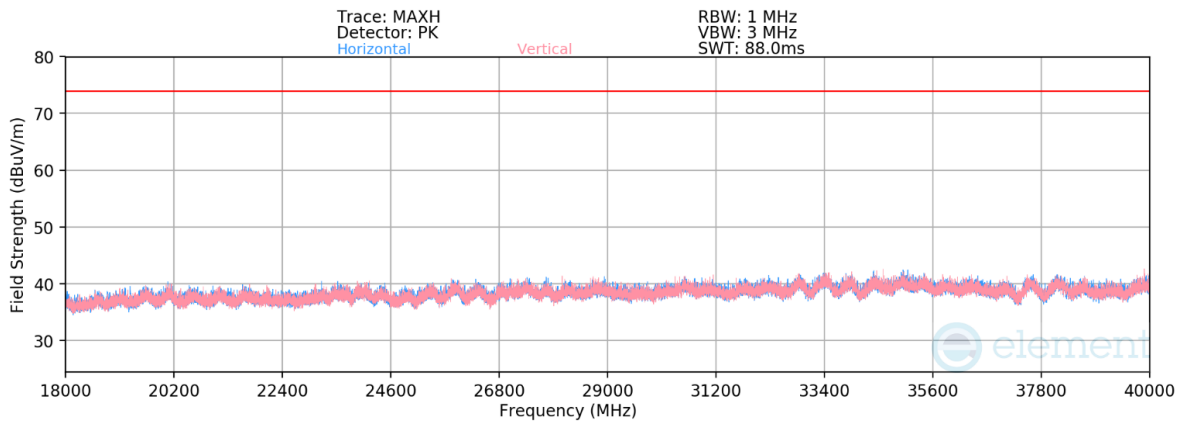

Plot 7-290. Radiated Spurious Emissions 18 GHz - 40GHz CDD Primary (11be Ch.56 — RU242)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters


Operating Frequency: 5280MHz

Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	V	-	-	-72.93	17.68	0.00	51.75	68.23	-16.48
* 15840.00	Average	V	-	-	-85.55	25.78	0.00	47.23	53.98	-6.75
* 15840.00	Peak	V	-	-	-74.70	25.78	0.00	58.09	73.98	-15.89
* 21120.00	Average	H	-	-	-57.85	-7.55	-9.54	32.06	53.98	-21.92
* 21120.00	Peak	H	-	-	-45.75	-7.55	-9.54	44.17	73.98	-29.81
26400.00	Peak	V	-	-	-50.13	-5.30	-9.54	42.04	68.23	-26.19
* 31680.00	Average	V	-	-	-63.10	-4.05	-9.54	30.31	53.98	-23.67
* 31680.00	Peak	V	-	-	-51.86	-4.05	-9.54	41.55	73.98	-32.43

Table 7-211. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 167 of 398

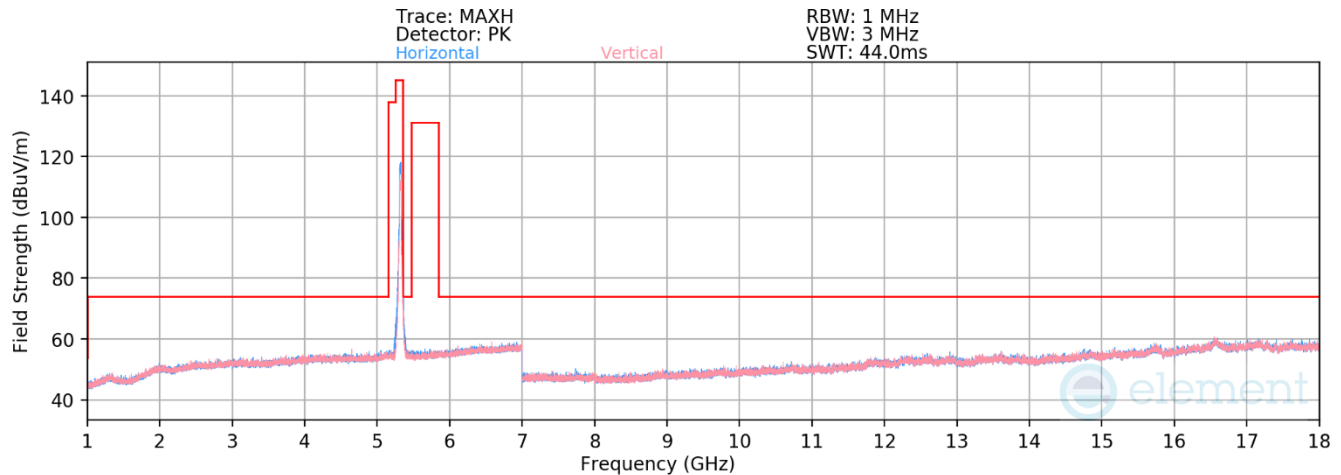

Plot 7-291. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.64 – RU242)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters


Operating Frequency: 5320MHz

Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 10640.00	Average	V	-	-	-84.26	18.08	40.82	53.98	-13.15
* 10640.00	Peak	V	-	-	-72.76	18.08	52.32	73.98	-21.66
* 15960.00	Average	V	-	-	-85.52	25.81	47.29	53.98	-6.69
* 15960.00	Peak	V	-	-	-74.45	25.81	58.36	73.98	-15.62

Table 7-212. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 168 of 398

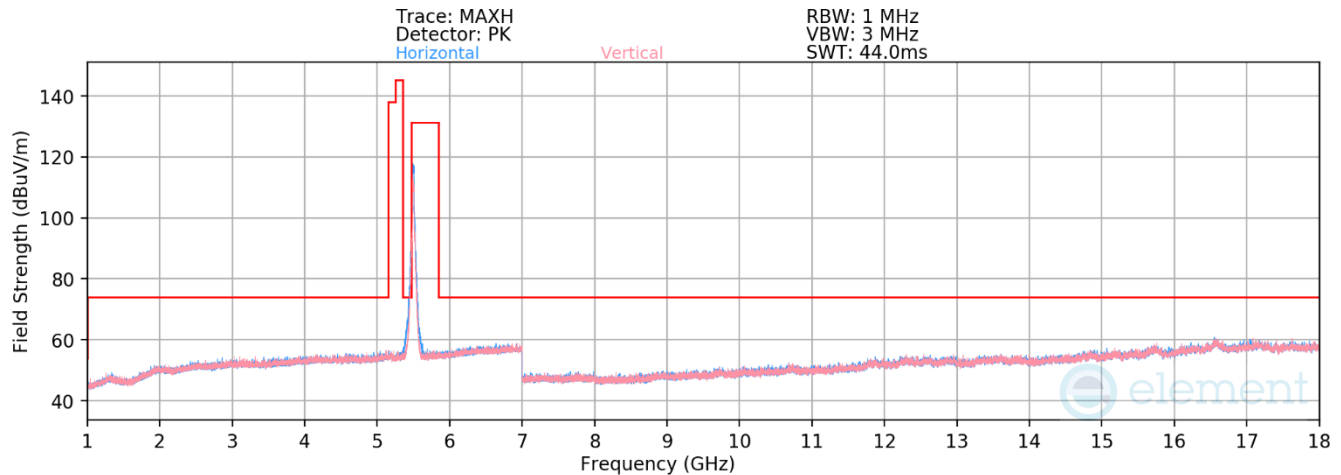

Plot 7-292. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.100 – RU242)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11000.00	Average	V	-	-	-84.41	18.23	40.82	53.98	-13.16
* 11000.00	Peak	V	-	-	-73.14	18.23	52.09	73.98	-21.89
16500.00	Peak	H	-	-	-73.24	27.82	61.57	68.23	-6.66


Table 7-213. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 169 of 398

V 10.6 10/27/2023

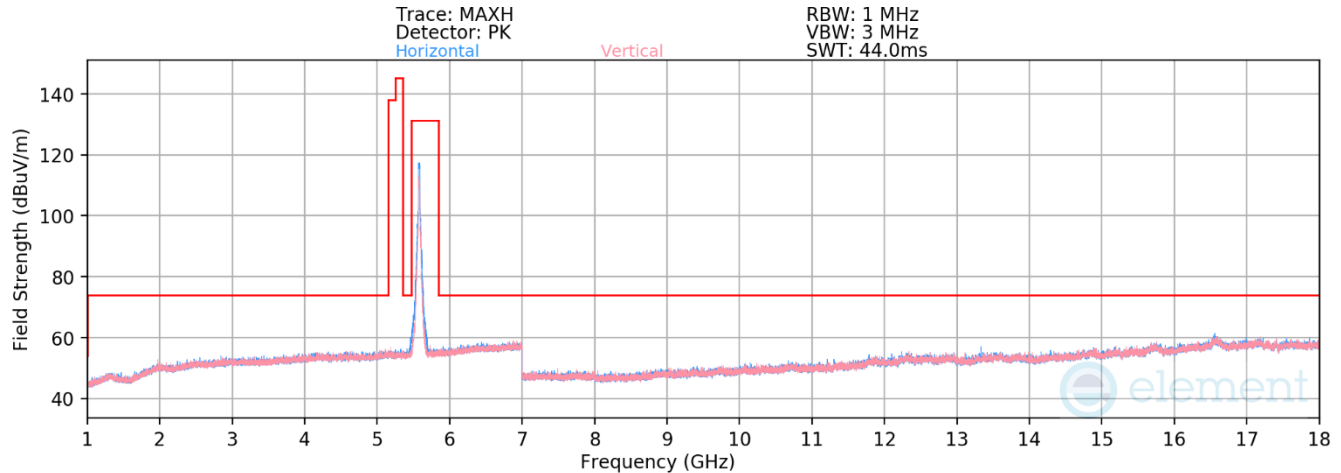

Plot 7-293. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.116 – RU242)

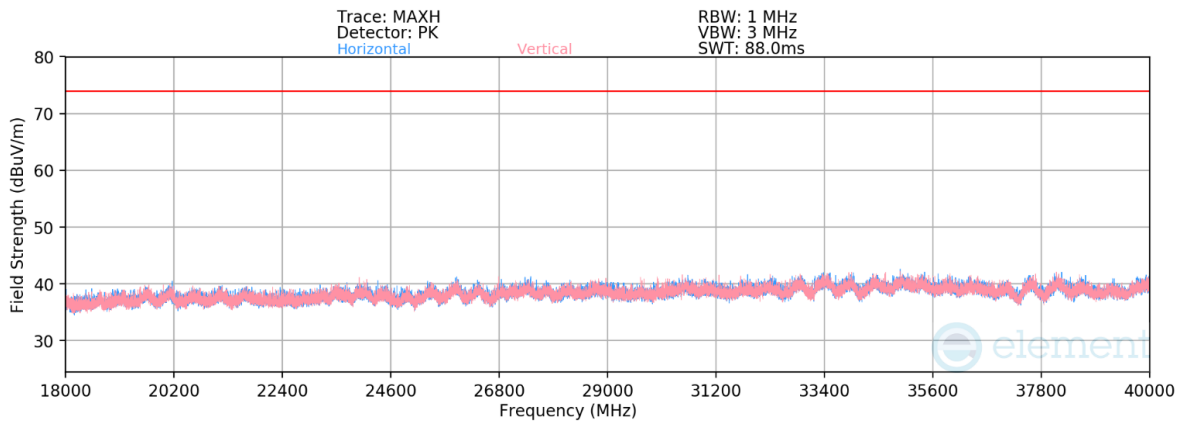

Plot 7-294. Radiated Spurious Emissions 18 GHz - 40GHz CDD Primary (11be Ch.116 — RU242)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters

Operating Frequency: 5580MHz


Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11160.00	Average	V	-	-	-84.21	18.42	0.00	41.21	53.98	-12.77
* 11160.00	Peak	V	-	-	-73.45	18.42	0.00	51.97	73.98	-22.01
16740.00	Peak	H	-	-	-73.49	28.09	0.00	61.60	68.23	-6.63
* 22320.00	Average	V	-	-	-56.26	-7.57	-9.54	33.63	53.98	-20.35
* 22320.00	Peak	V	-	-	-44.93	-7.57	-9.54	44.96	73.98	-29.02
27900.00	Peak	V	-	-	-52.68	-4.49	-9.54	40.29	68.23	-27.94
33480.00	Peak	V	-	-	-50.50	-4.38	-9.54	42.58	68.23	-25.65

Table 7-214. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 170 of 398

V 10.6 10/27/2023

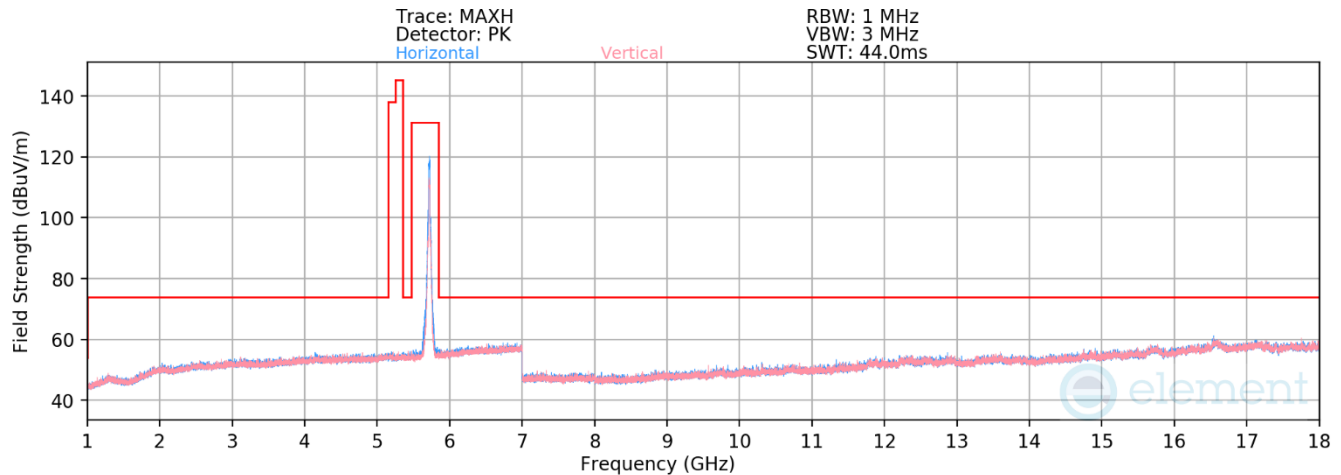

Plot 7-295. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.144 – RU242)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	H	-	-	-84.69	18.93	41.25	53.98	-12.73
* 11440.00	Peak	H	-	-	-73.44	18.93	52.49	73.98	-21.49
17160.00	Peak	V	-	-	-73.35	28.13	61.78	68.23	-6.45

Table 7-215. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 171 of 398

V 10.6 10/27/2023

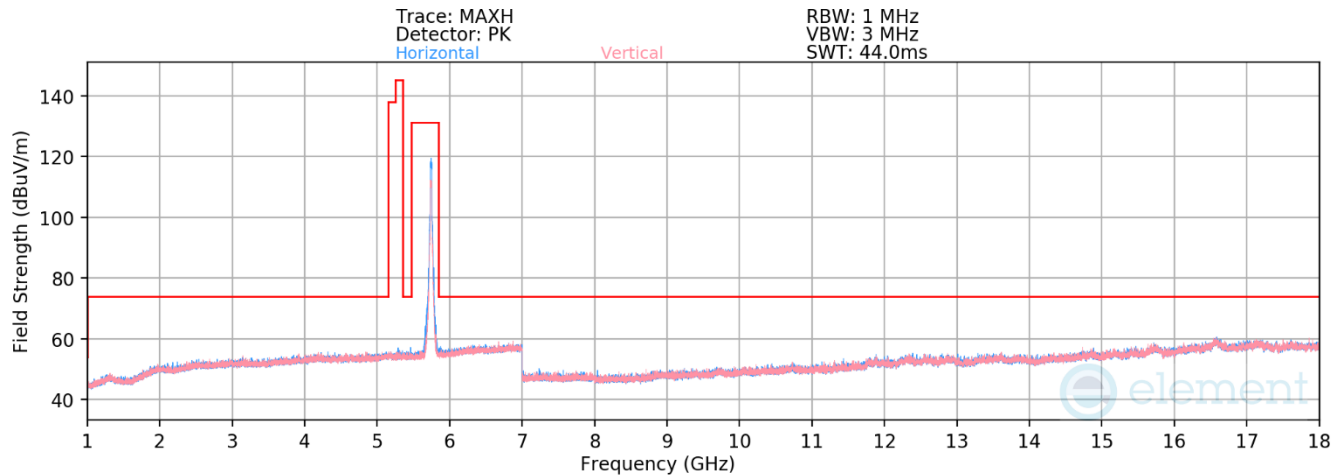

Plot 7-296. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.149 – RU242)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	H	-	-	-84.97	19.09	41.12	53.98	-12.86
* 11490.00	Peak	H	-	-	-73.50	19.09	52.59	73.98	-21.39
17235.00	Peak	H	-	-	-73.15	27.85	61.70	68.23	-6.53


Table 7-216. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 172 of 398

V 10.6 10/27/2023

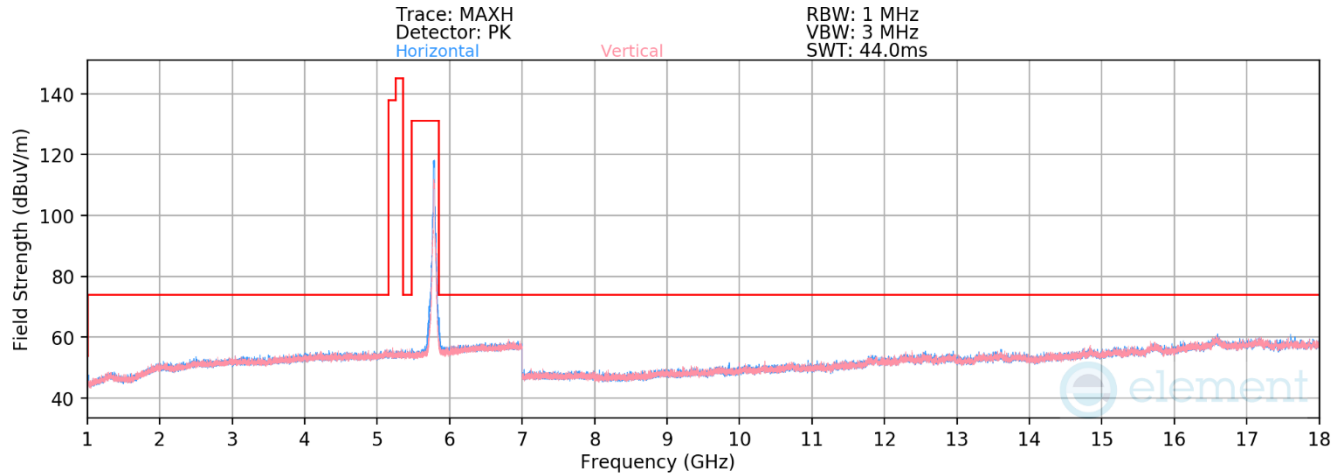

Plot 7-297. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.157 – RU242)

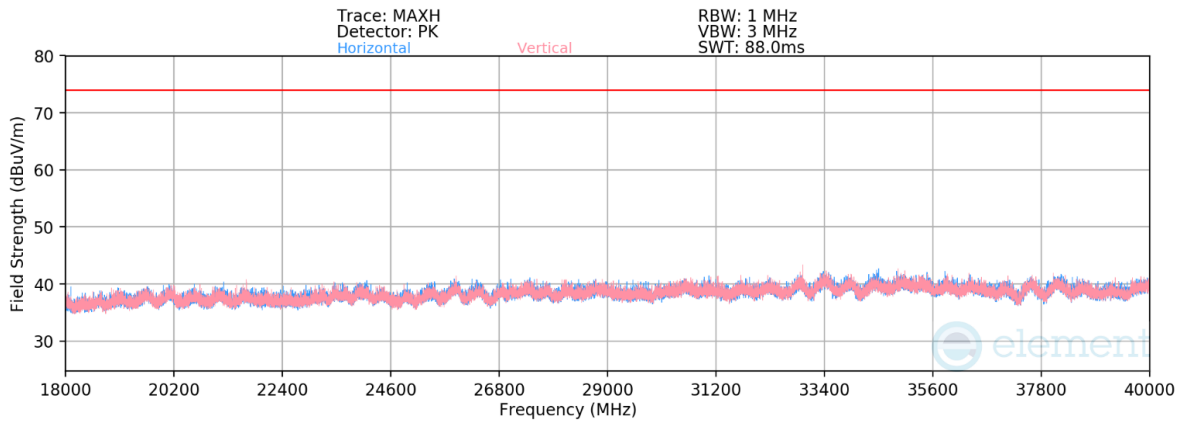

Plot 7-298. Radiated Spurious Emissions 18 GHz - 40GHz CDD Primary (11be Ch.157 — RU242)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 61

Distance of Measurements: 3 Meters


Operating Frequency: 5785MHz

Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
11570.00	Average	V	-	-	-84.50	19.25	0.00	41.76	53.98	-12.22
11570.00	Peak	V	-	-	-73.18	19.25	0.00	53.08	73.98	-20.90
17355.00	Peak	H	-	-	-73.44	27.54	0.00	61.11	68.23	-7.12
23140.00	Peak	H	-	-	-55.37	-7.12	-9.54	34.98	68.23	-33.25
28925.00	Peak	H	-	-	-51.88	-3.99	-9.54	41.59	68.23	-26.64
34710.00	Peak	H	-	-	-50.69	-4.70	-9.54	42.07	68.23	-26.16

Table 7-217. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 173 of 398

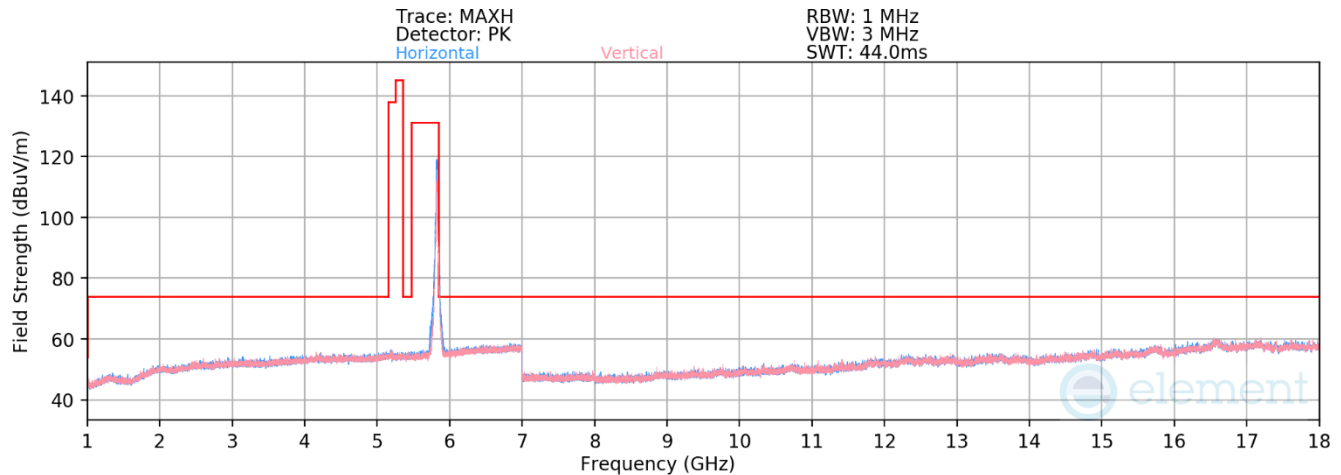

Plot 7-299. Radiated Spurious Emissions above 1GHz CDD Primary (11be – Ch.165 – RU242)

Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11650.00	Average	V	-	-	-84.32	19.48	42.16	53.98	-11.82
*	11650.00	Peak	V	-	-	-72.85	19.48	53.63	73.98	-20.35
	17475.00	Peak	V	-	-	-73.77	28.77	62.00	68.23	-6.23


Table 7-218. Radiated Measurements CDD Primary (RU242)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 174 of 398

V 10.6 10/27/2023

7.6.2 CDD Diversity Radiated Spurious Emissions

RU26

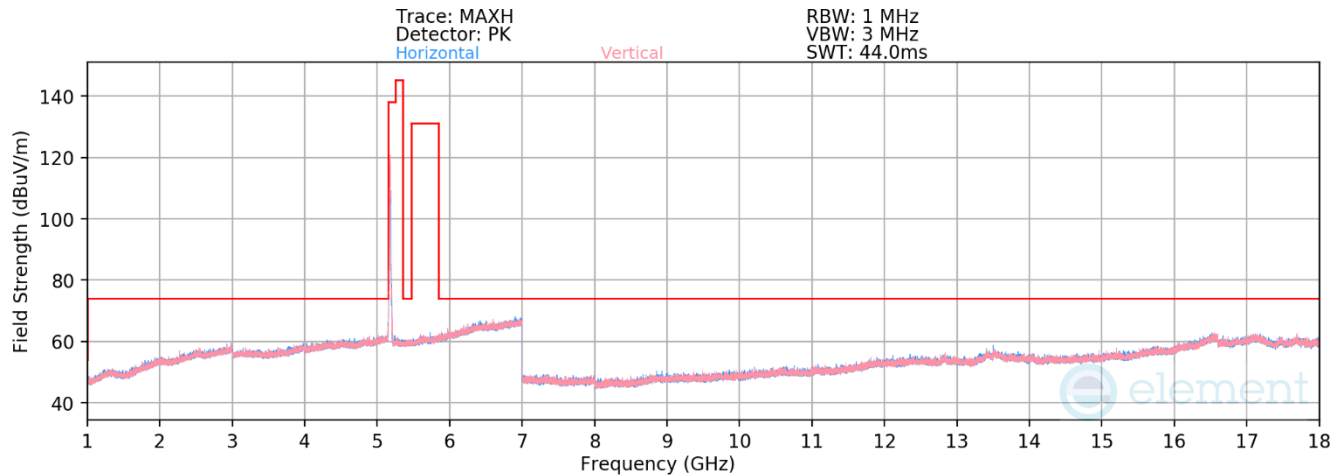

Plot 7-300. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.36 – RU26)


Mode:	802.11be (20MHz BW)
Data Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	V	-	-	-72.64	17.05	51.41	68.23	-16.82
* 15540.00	Average	V	-	-	-84.99	24.86	46.87	53.98	-7.11
* 15540.00	Peak	V	-	-	-73.47	24.86	58.39	73.98	-15.59


Table 7-219. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 175 of 398

V 10.6 10/27/2023

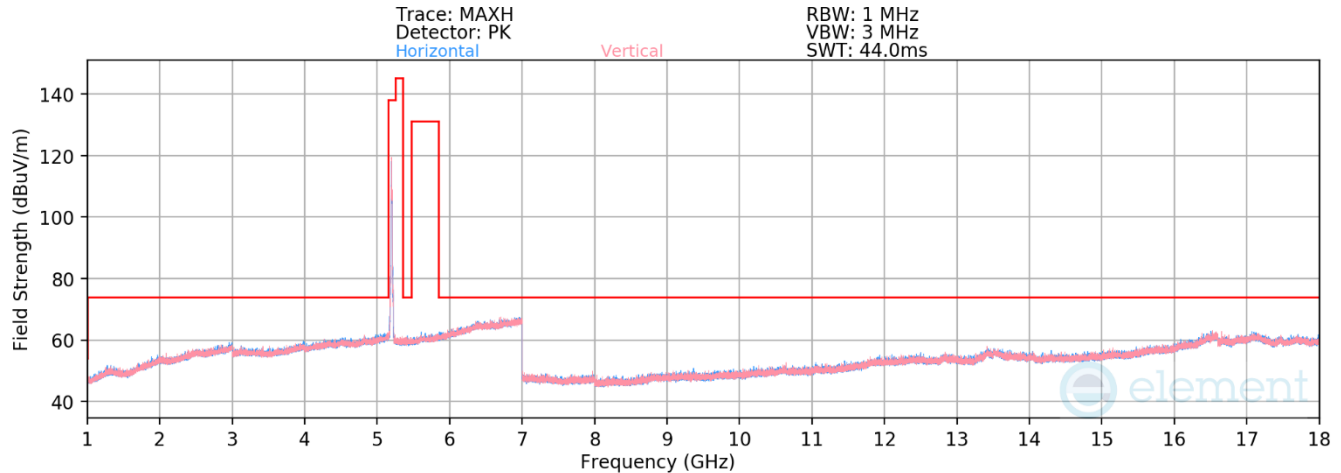

Plot 7-301. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.40 – RU26)

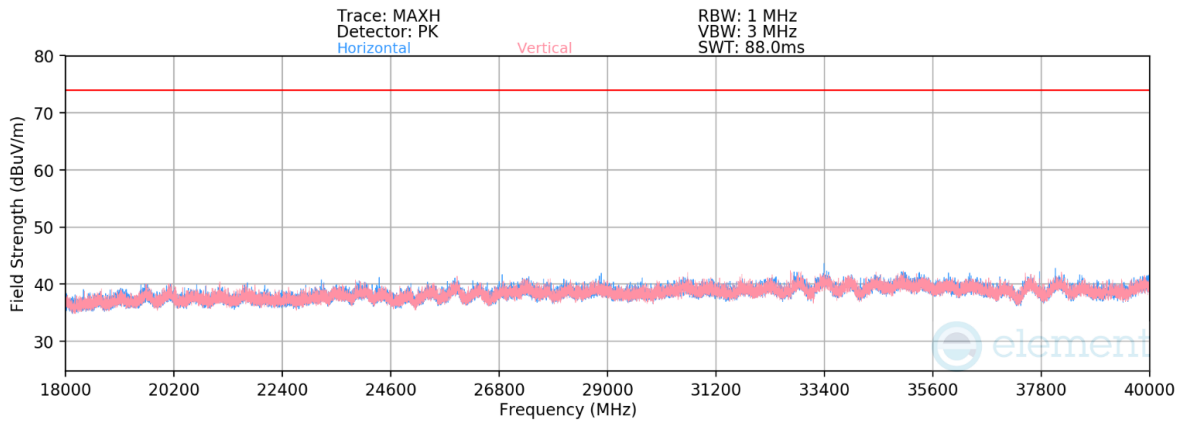

Plot 7-302. Radiated Spurious Emissions 18 GHz - 40GHz CDD Diversity (11be Ch.40 — RU26)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	H	-	-	-72.55	17.27	0.00	51.72	68.23	-16.51
* 15600.00	Average	V	-	-	-85.20	24.91	0.00	46.71	53.98	-7.27
* 15600.00	Peak	V	-	-	-73.87	24.91	0.00	58.04	73.98	-15.94
* 20800.00	Average	H	-	-	-61.55	-7.67	-9.54	28.24	53.98	-25.74
* 20800.00	Peak	H	-	-	-50.04	-7.67	-9.54	39.75	73.98	-34.23
* 26000.00	Peak	V	-	-	-50.24	-5.88	-9.54	41.34	68.23	-26.89
* 31200.00	Average	H	-	-	-63.68	-3.74	-9.54	30.04	53.98	-23.94
* 31200.00	Peak	H	-	-	-52.50	-3.74	-9.54	41.22	73.98	-32.75

Table 7-220. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 176 of 398

V 10.6 10/27/2023

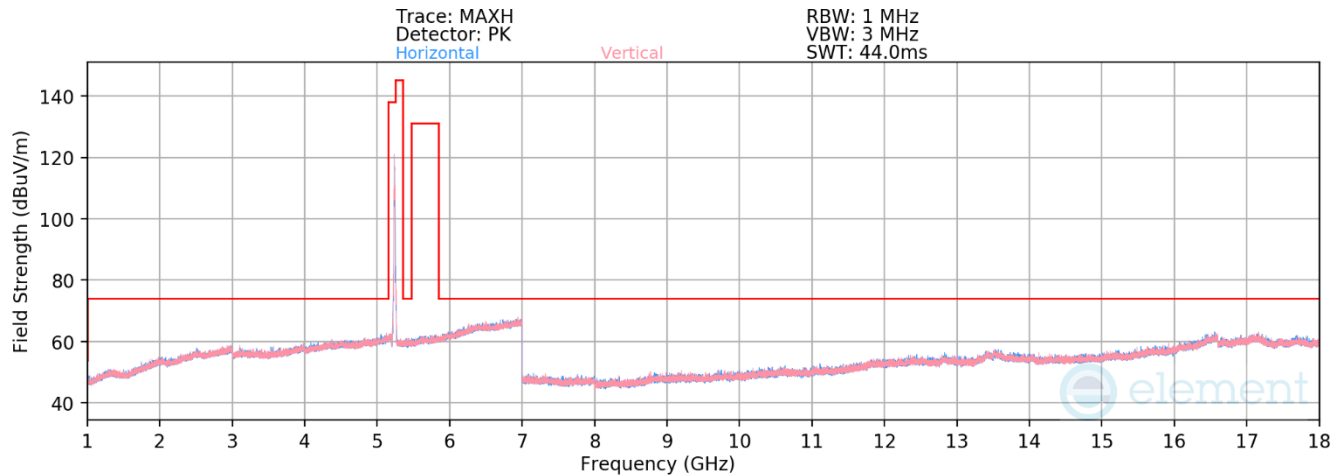

Plot 7-303. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.48 – RU26)


Mode: 802.11be (20MHz BW)
 Data Rate: MCS0
 RU Index: 4
 Distance of Measurements: 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	V	-	-	-73.49	17.77	51.28	68.23	-16.95
* 15720.00	Average	H	-	-	-85.67	25.61	46.94	53.98	-7.04
* 15720.00	Peak	H	-	-	-73.55	25.61	59.06	73.98	-14.92

Table 7-221. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 177 of 398

V 10.6 10/27/2023

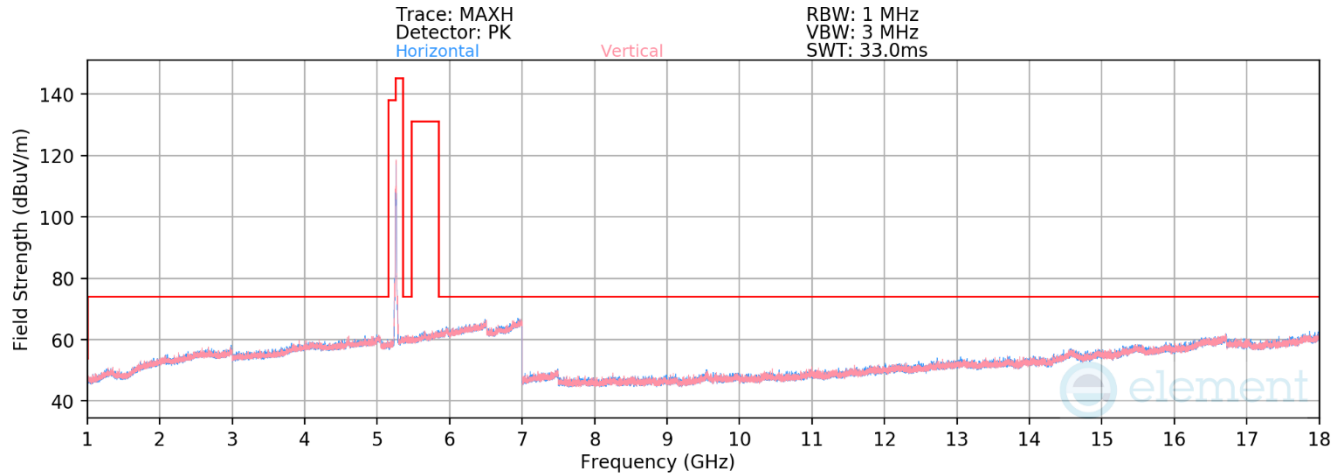

Plot 7-304. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.52 – RU26)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	V	-	-	-69.83	12.34	49.51	68.23	-18.72
* 15780.00	Average	H	-	-	-81.72	20.33	45.61	53.98	-8.37
* 15780.00	Peak	H	-	-	-71.12	20.33	56.21	73.98	-17.77


Table 7-222. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 178 of 398

V 10.6 10/27/2023

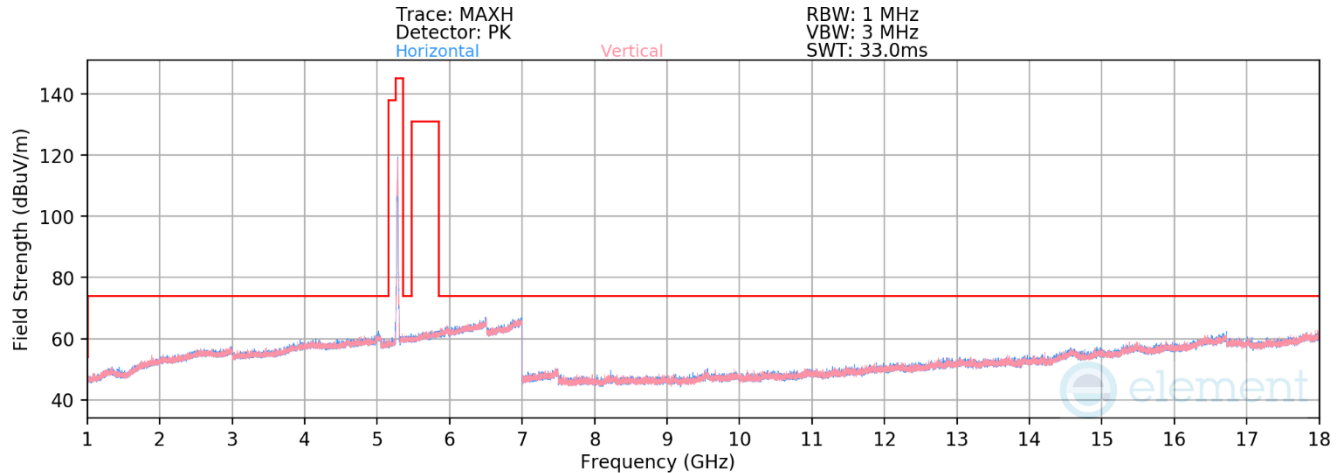

Plot 7-305. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.56 – RU26)

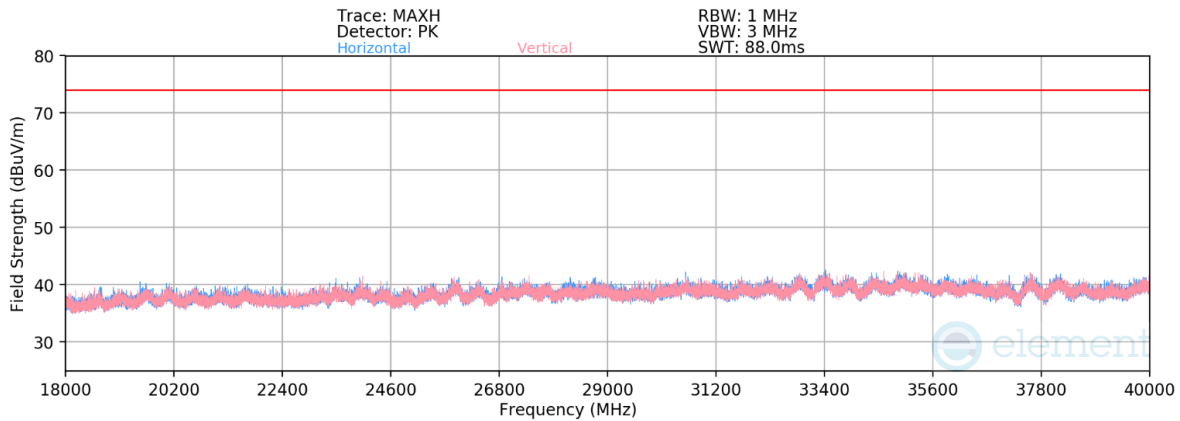

Plot 7-306. Radiated Spurious Emissions 18 GHz - 40GHz CDD Diversity (11be Ch.56 — RU26)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters


Operating Frequency: 5280MHz

Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	-	-	-70.21	12.83	0.00	49.61	68.23	-18.62
* 15840.00	Average	V	-	-	-81.46	20.87	0.00	46.40	53.98	-7.58
* 15840.00	Peak	V	-	-	-70.76	20.87	0.00	57.10	73.98	-16.88
* 21120.00	Average	V	-	-	-60.68	-7.55	-9.54	29.23	53.98	-24.75
* 21120.00	Peak	V	-	-	-49.09	-7.55	-9.54	40.82	73.98	-33.16
26400.00	Peak	V	-	-	-50.67	-5.30	-9.54	41.50	68.23	-26.73
* 31680.00	Average	V	-	-	-63.12	-3.93	-9.54	30.41	53.98	-23.57
* 31680.00	Peak	V	-	-	-52.32	-3.93	-9.54	41.22	73.98	-32.76

Table 7-223. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 179 of 398

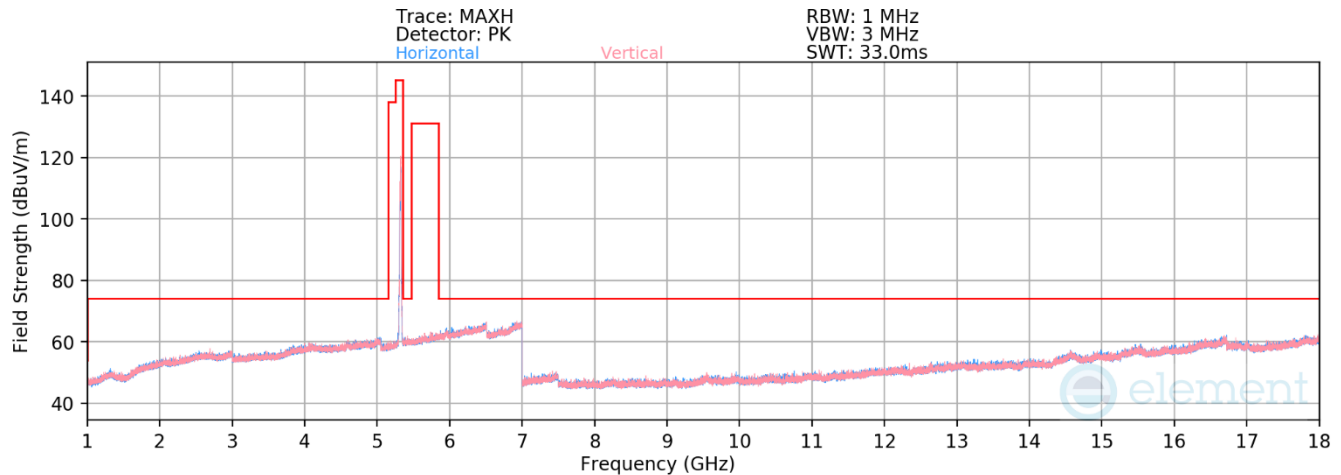

Plot 7-307. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.64 – RU26)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	V	-	-	-80.75	12.44	38.69	53.98	-15.29
* 10640.00	Peak	V	-	-	-69.72	12.44	49.72	73.98	-24.26
* 15960.00	Average	V	-	-	-81.95	21.07	46.12	53.98	-7.86
* 15960.00	Peak	V	-	-	-71.70	21.07	56.37	73.98	-17.61

Table 7-224. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 180 of 398

V 10.6 10/27/2023

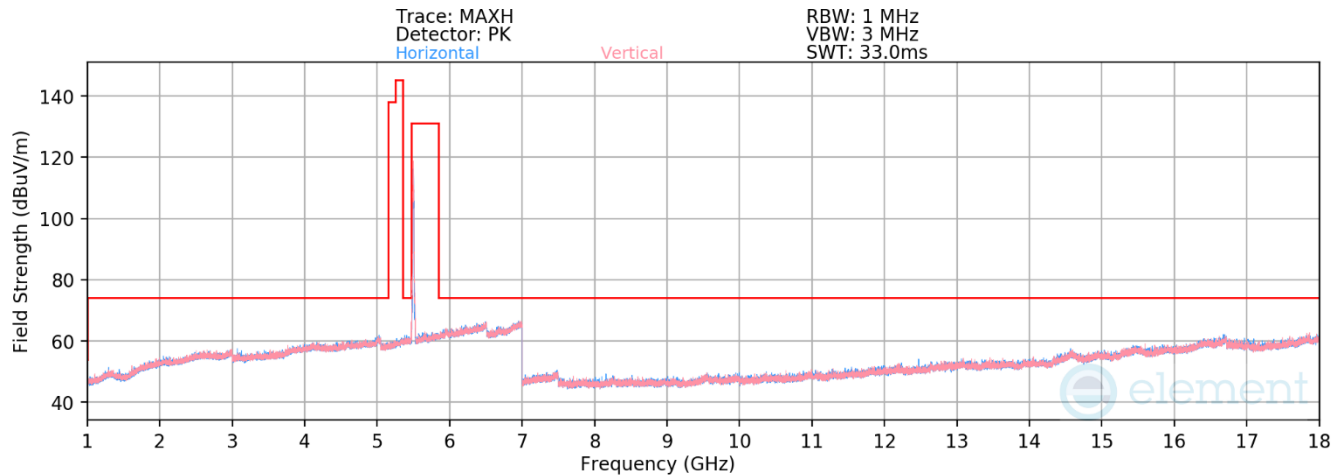

Plot 7-308. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.100 – RU26)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11000.00	Average	H	-	-	-81.45	13.86	39.41	53.98	-14.57
* 11000.00	Peak	H	-	-	-70.54	13.86	50.32	73.98	-23.66
16500.00	Peak	V	-	-	-71.76	22.98	58.22	68.23	-10.01


Table 7-225. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 181 of 398

V 10.6 10/27/2023

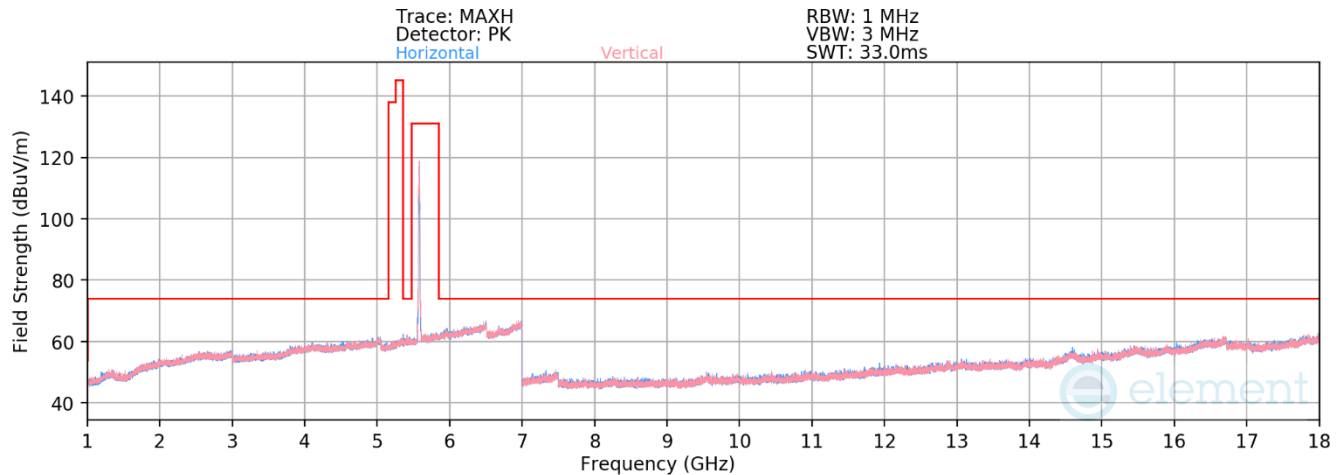

Plot 7-309. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.116 – RU26)

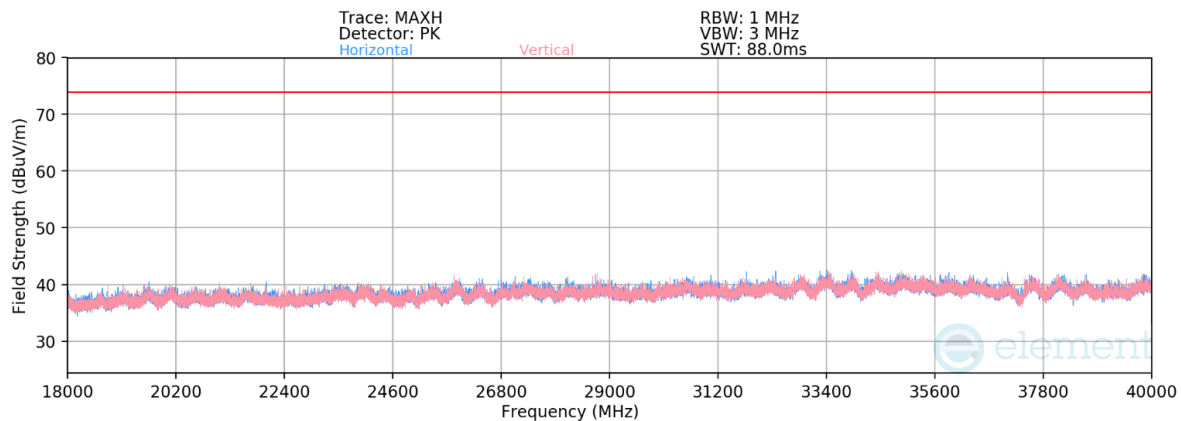

Plot 7-310. Radiated Spurious Emissions 18 GHz - 40GHz CDD Diversity (11be Ch.116 — RU26)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters


Operating Frequency: 5580MHz

Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	H	-	-	-81.03	12.72	0.00	38.69	53.98	-15.29
* 11160.00	Peak	H	-	-	-69.98	12.72	0.00	49.74	73.98	-24.24
16740.00	Peak	V	-	-	-69.19	22.72	0.00	60.54	68.23	-7.69
* 22320.00	Average	V	-	-	-61.66	-7.64	-9.54	28.16	53.98	-25.82
* 22320.00	Peak	V	-	-	-50.61	-7.64	-9.54	39.20	73.98	-34.78
27900.00	Peak	V	-	-	-51.85	-4.75	-9.54	40.86	68.23	-27.37
33480.00	Peak	V	-	-	-49.97	-4.38	-9.54	43.11	68.23	-25.12

Table 7-226. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 182 of 398

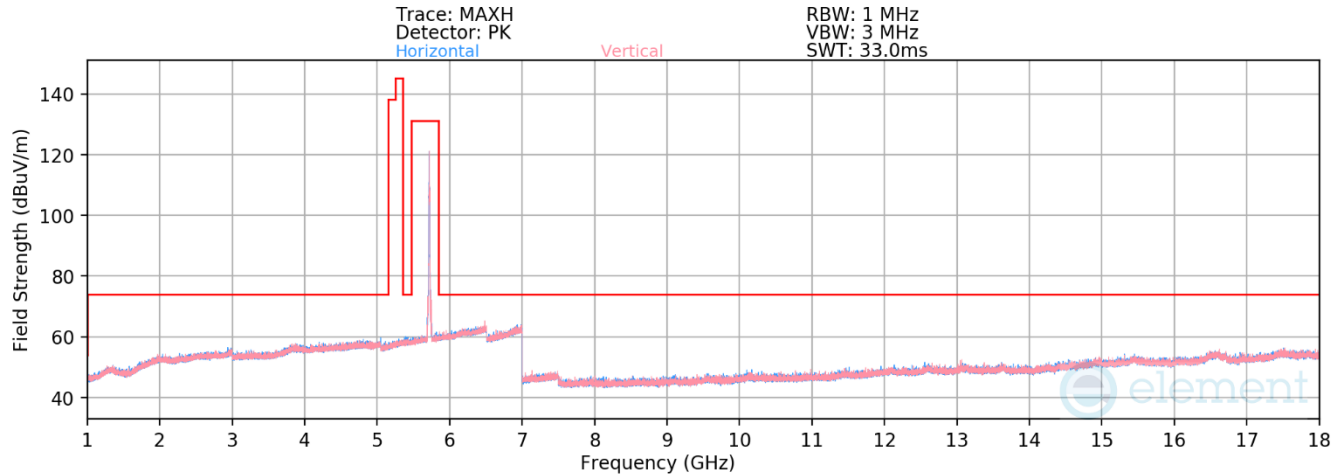

Plot 7-311. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.144 – RU26)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-81.15	13.73	39.59	53.98	-14.39
* 11440.00	Peak	V	-	-	-69.26	13.73	51.47	73.98	-22.51
17160.00	Peak	H	-	-	-71.54	24.21	59.67	68.23	-8.56

Table 7-227. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 183 of 398

V 10.6 10/27/2023

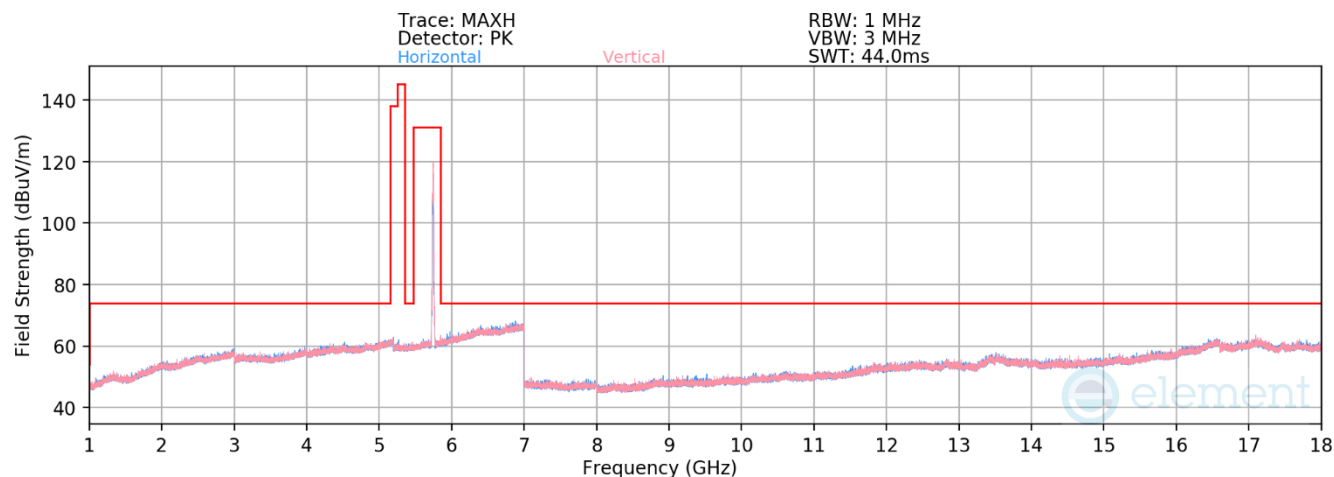

Plot 7-312. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.149 – RU26)


Mode: 802.11be (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11490.00	Average	H	-	-	-84.79	19.09	41.31	53.98	-12.67
* 11490.00	Peak	H	-	-	-73.07	19.09	53.03	73.98	-20.95
17235.00	Peak	H	-	-	-73.13	27.85	61.72	68.23	-6.51


Table 7-228. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 184 of 398

V 10.6 10/27/2023

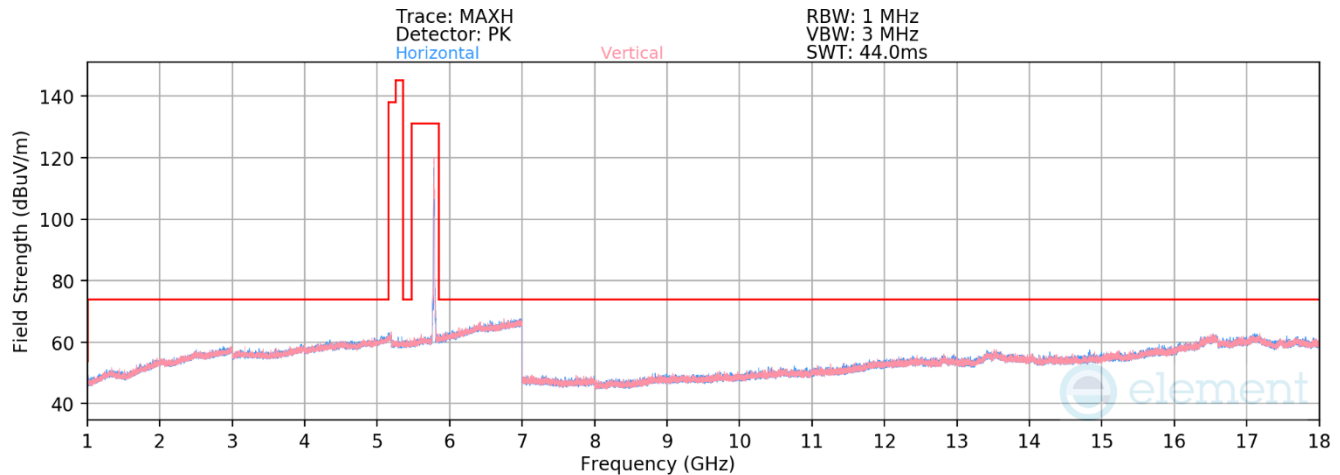

Plot 7-313. Radiated Spurious Emissions above 1GHz CDD Diversity (11be – Ch.157 – RU26)

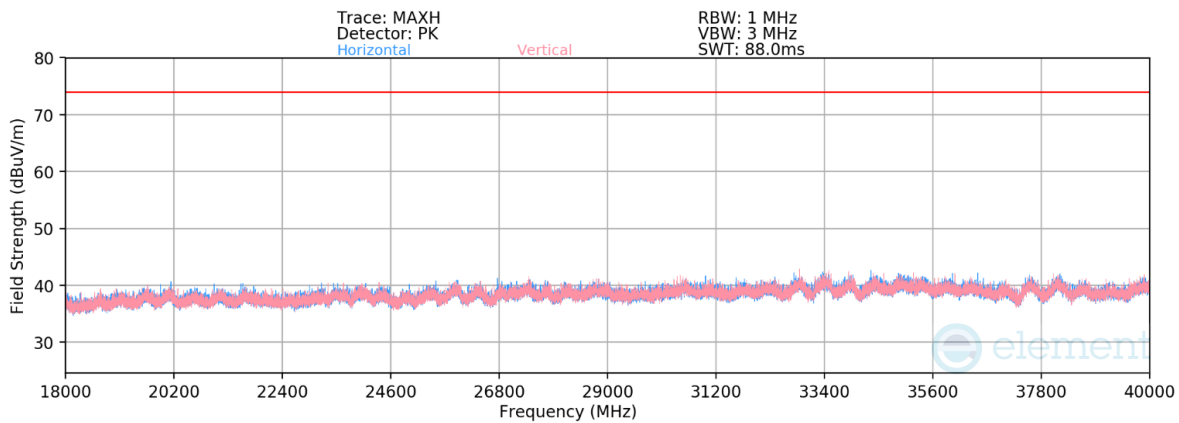

Plot 7-314. Radiated Spurious Emissions 18 GHz - 40GHz CDD Diversity (11be Ch.157 — RU26)

Mode: 802.11be (20MHz BW)

Data Rate: MCS0

RU Index: 4

Distance of Measurements: 3 Meters

Operating Frequency: 5785MHz

Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
11570.00	Average	V	-	-	-84.39	19.04	0.00	41.65	53.98	-12.33
11570.00	Peak	V	-	-	-72.37	19.04	0.00	53.67	73.98	-20.31
17355.00	Peak	H	-	-	-73.39	27.88	0.00	61.49	68.23	-6.74
23140.00	Peak	V	-	-	-50.96	-7.13	-9.54	39.37	68.23	-28.86
28925.00	Peak	V	-	-	-52.42	-3.81	-9.54	41.23	68.23	-27.00
34710.00	Peak	V	-	-	-51.24	-4.70	-9.54	41.52	68.23	-26.71

Table 7-229. Radiated Measurements CDD Diversity (RU26)

FCC ID: BCGA3460 IC: 579C-A3460		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100080-23-R3.BCG	Test Dates: 09/15/2025 - 1/5/2025	EUT Type: Tablet Device	Page 185 of 398