

MEASUREMENT REPORT**FCC PART 15.407 / ISSED RSS-248 UNII 6GHz OFDM 802.11a/ax/be (OFDM)****Applicant Name:**

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

9/15/2025 - 12/10/2025

Test Report Issue Date:

1/26/2026

Test Site/Location:

Element Materials Technology, Morgan Hill, CA, USA

Test Report Serial No.:

1C2509100081-15-R4.BCG

FCC ID:

BCGA3461

IC:

579C-A3461

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A3461

EUT Type:

Tablet Device

Frequency Range:

5955 – 7115MHz

Modulation Type:

OFDM

FCC Classification:

15E 6GHz Low Power Dual Client (6CD)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISSED Specification:

RSS-248 Issue 3

Test Procedure(s):

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to
C63.10a:2024, KDB 789033 D02 v02r01

KDB 662911 D01 v02r01, KDB 987594 D02 v03


KDB 987594 D03 v03r04, KDB 987594 D04 v03

KDB 987594 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2509100081-15-R4.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President



FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 1 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Revision Summary

Revision	Date	Comments	Revised By
-	12/12/2025	Initial release	WKR0000007358
R1	12/22/2025	Addressed client comment in section 7.7.2	WKR0000007358
R2	01/05/2026	Addressed client comments in sections 7.2, 7.3, 7.4, and 7.5	WKR0000007358
R3	01/10/2026	Addressed TCB comments in sections 2.1, 6.0, 7.1, 7.3, 7.5, 7.6, and 7.7	WKR007111
R4	01/13/2026	Addressed TCB comments in sections 1.3, 7.3, and 7.8	WKR007111

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 2 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope	5
1.2	Element Materials Technology Test Location	5
1.3	Test Facility / Accreditations	5
2.0	PRODUCT INFORMATION	6
2.1	Equipment Description	6
2.2	Device Capabilities	6
2.3	Antenna Description	10
2.4	Test Support Equipment	10
2.5	Test Configuration	11
2.6	Software and Firmware	11
2.7	EMI Suppression Device(s)/Modifications	11
3.0	DESCRIPTION OF TESTS	12
3.1	Evaluation Procedure	12
3.2	AC Line Conducted Emissions	12
3.3	Radiated Emissions	13
3.4	Environmental Conditions	13
4.0	ANTENNA REQUIREMENTS	14
5.0	MEASUREMENT UNCERTAINTY	15
6.0	TEST EQUIPMENT CALIBRATION DATA	16
7.0	TEST RESULTS	17
7.1	Summary	17
7.2	26dB & 99% Bandwidth Measurement	18
7.3	Conducted Output Power and Max EIRP Measurement	43
7.4	Maximum Power Spectral Density	60
7.5	In-Band Emissions	109
7.6	Contention Based Protocol	147
7.7	Radiated Spurious Emissions – Above 1GHz	176
7.8	Radiated Spurious Emissions – Below 1GHz	245
7.9	AC Line-Conducted Emissions Measurement	254
8.0	CONCLUSION	260

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 3 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD/SDM Primary		CDD/SDM Diversity	
				Antenna WF7a		Antenna WF2a		Antenna WF7b		Summed		Summed	
				Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)
5	20	802.11a/be	5955 - 6415	8.851	9.47	8.511	9.30	8.472	9.28	8.472	9.28	8.551	9.32
6		802.11a/be	6435 - 6515	8.279	9.18	8.072	9.07	7.228	8.59	7.962	9.01	7.396	8.69
7		802.11a/be	6535 - 6875	7.727	8.88	8.241	9.16	8.551	9.32	7.816	8.93	8.299	9.19
8		802.11a/be	6895 - 7115	8.472	9.28	8.072	9.07	6.839	8.35	7.980	9.02	7.096	8.51
5	40	802.11be	5965 - 6405	16.943	12.29	16.482	12.17	16.106	12.07	16.032	12.05	16.069	12.06
6		802.11be	6445 - 6525	16.943	12.29	16.749	12.24	16.331	12.13	16.482	12.17	16.482	12.17
7		802.11be	6565 - 6845	14.355	11.57	15.776	11.98	16.069	12.06	14.454	11.60	15.346	11.86
8		802.11be	6885 - 7085	16.943	12.29	17.219	12.36	13.552	11.32	16.482	12.17	14.355	11.57
5	80	802.11be	5985 - 6385	32.659	15.14	31.842	15.03	33.113	15.20	31.842	15.03	31.477	14.98
6		802.11be	6465	33.037	15.19	33.037	15.19	27.669	14.42	32.434	15.11	29.785	14.74
7		802.11be	6545 - 6865	30.130	14.79	33.806	15.29	33.574	15.26	30.761	14.88	32.961	15.18
8		802.11be	6945 - 7025	31.696	15.01	32.434	15.11	25.293	14.03	31.261	14.95	28.119	14.49
5	160	802.11be	6025 - 6345	64.565	18.10	64.121	18.07	62.230	17.94	60.674	17.83	58.749	17.69
6		802.11be	6505	39.174	15.93	46.774	16.70	33.113	15.20	41.020	16.13	38.371	15.84
7		802.11be	6665 - 6825	56.234	17.50	64.121	18.07	63.826	18.05	57.016	17.56	61.376	17.88
8		802.11be	6985	56.754	17.54	56.885	17.55	47.534	16.77	57.412	17.59	52.240	17.18

EUT Overview Low Power Indoor

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD/SDM Primary		CDD/SDM Diversity	
				Antenna WF7a		Antenna WF2a		Antenna WF7b		Summed		Summed	
				Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)	Max e.i.r.p (mW)	Max e.i.r.p (dBm)
5	20	802.11a/be	5955 - 6415	102.094	20.09	112.720	20.52	103.514	20.15	206.538	23.15	201.837	23.05
6		802.11a/be	6435 - 6515	70.469	18.48	72.444	18.60	59.841	17.77	139.959	21.46	119.124	20.76
7		802.11a/be	6535 - 6855	94.624	19.76	97.499	19.89	107.152	20.30	186.638	22.71	212.814	23.28
5		802.11be	5965 - 6405	103.514	20.15	112.980	20.53	97.724	19.90	199.067	22.99	201.837	23.05
6	40	802.11be	6445 - 6525	91.622	19.62	92.897	19.68	102.565	20.11	180.717	22.57	205.589	23.13
7		802.11be	6565 - 6845	95.280	19.79	97.051	19.87	105.682	20.24	191.426	22.82	207.970	23.18
5		802.11be	5985 - 6385	100.462	20.02	114.288	20.58	99.083	19.96	192.752	22.85	195.884	22.92
6		802.11be	6465	67.453	18.29	68.234	18.34	60.117	17.79	185.780	22.69	119.399	20.77
7	80	802.11be	6545 - 6755	95.499	19.80	95.060	19.78	106.170	20.26	179.473	22.54	204.174	23.10
5		802.11be	6025 - 6345	102.802	20.12	114.551	20.59	103.992	20.17	198.153	22.97	195.884	22.92
6		802.11be	6505	68.707	18.37	69.663	18.43	60.117	17.79	185.353	22.68	117.220	20.69
7		802.11be	6665	94.842	19.77	94.189	19.74	101.859	20.08	182.390	22.61	209.411	23.21

EUT Overview Standard Power

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 4 of 260

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 5 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA3461** and **IC: 579C-A3461**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter while operating in the 6GHz band.

Test Device Serial No.: H4D0365M2C, DR2VJ9M4FX, KVGJJYV1Q9, D76621F7WC, DLXHKM0001L00013YY, DLXHKM0001N00013YY

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), 802.15.4, Bluetooth (1x, EDR, LE, HDR, HDT), Narrowband (NB) UNII (5GHz and 6GHz), WPT.

This device supports BT Beamforming.

This device supports channel puncturing and channel bandwidth reduction.

Standard Power (SP) mode is supported in U-NII Bands 5 and 7 for FCC and U-NII Bands 5, 6 and 7 for ISSED. Low Power Indoor (LPI) mode is supported in U-NII Bands 5, 6, 7, 8. Throughout report, data of Standard Power mode is denoted as SP while data of Low Power Indoor mode is denoted as LPI.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 6 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Band 5

Ch.	Frequency (MHz)
1	5955
:	:
45	6175
:	:
93	6415

Band 6

Ch.	Frequency (MHz)
97	6435
:	:
105	6475
:	:
113	6515

Band 7

Ch.	Frequency (MHz)
117	6535
:	:
149	6695
:	:
185	6875

Band 8

Ch.	Frequency (MHz)
189	6895
:	:
209	6995
:	:
233	7115

Table 2-1. 802.11a/ax/be (20MHz) Frequency / Channel Operations

Band 5

Ch.	Frequency (MHz)
3	5965
:	:
43	6165
:	:
91	6405

Band 6

Ch.	Frequency (MHz)
99	6445
:	:
107	6485
:	:
115	6525

Band 7

Ch.	Frequency (MHz)
123	6565
:	:
155	6725
:	:
179	6845

Band 8

Ch.	Frequency (MHz)
187	6885
:	:
211	7005
:	:
227	7085

Table 2-2. 802.11ax/be (40MHz BW) Frequency / Channel Operations

Band 5

Ch.	Frequency (MHz)
7	5985
:	:
39	6145
:	:
87	6385

Band 6

Ch.	Frequency (MHz)
103	6465

Band 7

Ch.	Frequency (MHz)
119	6545
:	:
151	6705
:	:
183	6865

Band 8

Ch.	Frequency (MHz)
199	6945
:	:
215	7025

Table 2-3. 802.11ax/be (80MHz BW) Frequency / Channel Operations

Band 5

Ch.	Frequency (MHz)
15	6025
:	:
47	6185
:	:
79	6345

Band 6

Ch.	Frequency (MHz)
111	6505

Band 7

Ch.	Frequency (MHz)
143	6665
:	:
175	6825

Band 8

Ch.	Frequency (MHz)
207	6985

Table 2-4. 802.11ax/be (160MHz BW) Frequency / Channel Operations

6GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) KDB 789033 D02 v02r01 and ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band	Duty Cycle [%]									
	Antenna WF7a		Antenna WF2a		Antenna WF7b		CDD/SDM Primary		CDD/SDM Diversity	
	Duty Cycle [%]	DCCF [dB]	Duty Cycle [%]	DCCF [dB]	Duty Cycle [%]	DCCF [dB]	Duty Cycle [%]	DCCF [dB]	Duty Cycle [%]	DCCF [dB]
a (Low Data Rate)	98.197	0.079	100.000	0.000	98.378	0.071	98.787	0.053	98.378	0.071
a (Mid Data Rate)	100.000	0.000	98.924	0.047	98.787	0.053	100.000	0.000	98.787	0.053
a (High Data Rate)	100.000	0.000	100.000	0.000	98.855	0.050	98.719	0.056	98.855	0.050
be(SU) (EHT20) (Low Data Rate)	100.000	0.000	98.651	0.059	100.000	0.000	100.000	0.000	98.992	0.044
be(SU) (EHT20) (Mid Data Rate)	98.992	0.044	98.492	0.066	98.492	0.066	100.000	0.000	98.696	0.057
be(SU) (EHT20) (High Data Rate)	100.000	0.000	100.000	0.000	98.924	0.047	100.000	0.000	98.924	0.047
be(SU) (EHT40) (Low Data Rate)	100.000	0.000	98.992	0.044	98.719	0.056	98.924	0.047	98.492	0.066
be(SU) (EHT40) (Mid Data Rate)	98.855	0.050	98.492	0.066	100.000	0.000	100.000	0.000	98.924	0.047
be(SU) (EHT40) (High Data Rate)	98.514	0.065	98.311	0.074	98.514	0.065	98.742	0.055	100.000	0.000
be(SU) (EHT80) (Low Data Rate)	98.946	0.046	98.424	0.069	100.000	0.000	98.946	0.046	98.651	0.059
be(SU) (EHT80) (Mid Data Rate)	98.855	0.050	98.514	0.065	100.000	0.000	98.288	0.075	98.924	0.047
be(SU) (EHT80) (High Data Rate)	98.424	0.069	98.696	0.057	97.904	0.092	98.175	0.080	98.424	0.069
be(SU) (EHT160) (Low Data Rate)	98.492	0.066	98.969	0.045	98.469	0.067	98.696	0.057	100.000	0.000
be(SU) (EHT160) (Mid Data Rate)	98.424	0.069	98.696	0.057	100.000	0.000	98.424	0.069	100.000	0.000
be(SU) (EHT160) (High Data Rate)	97.679	0.102	98.175	0.080	97.972	0.089	97.724	0.100	97.949	0.090

Table 2-5. Measured Duty Cycles

CDD/SDM Primary = Antenna WF7a + Antenna WF2a

CDD/SDM Diversity = Antenna WF2a + Antenna WF7b

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 8 of 260

1. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO			CDD			SDM			STBC		
		Antenna WF7a	Antenna WF2a	Antenna WF7b	Antenna WF7a	Antenna WF2a	Antenna WF7b	Antenna WF7a	Antenna WF2a	Antenna WF7b	Antenna WF7a	Antenna WF2a	Antenna WF7b
6GHz	11a	✓	✓	✓	✓	✓	✓	✗	✗	✗	✗	✗	✗
	11ax/be(SU) (20MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax/be(SU) (40MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax/be(SU) (80MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax/be(SU) (160MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Table 2-6. WIFI Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

STBC = Space-Time Block Coding – 2Tx Function

2. The device supports the following data rates (shown in Mbps):

802.11a 20MHz	MCS Index		Spatial Stream	OFDM (802.11ax/be)												
				20MHz			40MHz			80MHz			160MHz			
	HE	EHT		0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	
6	0	0	1	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3	Low Rate
9	1	1	1	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5	
12	2	2	1	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.5	216.2	204.2	183.8	
18	3	3	1	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245	Mid Rate
24	4	4	1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5	
36	5	5	1	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490	
48	6	6	1	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3	High Rate
54	7	7	1	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5	
-	8	8	1	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735	
-	9	9	1	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	960.8	907.4	816.7	
-	10	10	1	129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.8	918.8	
-	11	11	1	143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8	
6	0	0	2	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5	Low Rate
9	1	1	2	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245	
12	2	2	2	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5	
18	3	3	2	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490	Mid Rate
24	4	4	2	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735	
36	5	5	2	137.6	130	117	275.3	260	234	576.5	544.4	490	1152.9	1089	980	
48	6	6	2	154.9	146.3	131.6	309.8	292.6	263.3	648.5	612.5	551.3	1296.9	1225	1102.5	High Rate
54	7	7	2	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225	
-	8	8	2	206.5	195	175.5	412.9	390	351	864.7	816.7	735	1729.4	1633.3	1470	
-	9	9	2	229.4	216.7	195	458.8	433	390	960.8	907.4	816.7	1921.6	1814.8	1633.3	
-	10	10	2	258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	2161.8	2041.7	1837.5	
-	11	11	2	286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	2402	2268.5	2041.7	

Table 2-7. Supported Data Rates

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 9 of 260

3. This device supports simultaneous transmission operations, which allows multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Bluetooth 2.4GHz	Thread	WLAN	NB UNII	WIFI 5GHz	WIFI 6GHz
		BDR, EDR, LE HDR, HDT	802.15.4	802.11 b/g/n/ax/be	BDR, EDR, LE HDR, HDT	802.11 a/n/ac/ax/be	802.11 a/ax/be
Ant WF7b	Config 1	✓	✗	✗	✗	✓	✗
Ant WF7b	Config 2	✓	✗	✗	✗	✗	✓
Ant WF7b	Config 3	✗	✓	✗	✗	✓	✗
Ant WF7b	Config 4	✗	✓	✗	✗	✗	✓
Ant WF7b	Config 5	✗	✗	✓	✓	✗	✗
Ant WF7b	Config 6	✗	✗	✓	✗	✓	✗
Ant WF7b	Config 7	✗	✗	✓	✗	✗	✓

Table 2-8. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 1 and reported in RF Bluetooth and RF UNII 5GHz OFDM test reports.

2.3 Antenna Description

Following antenna gains provided by the manufacturer were used for the testing.

UNII Band	Frequency [GHz]	Highest Antenna Gain (dBi)			Lowest Antenna Gain (dBi)		
		Antenna WF7a	Antenna WF2a	Antenna WF7b	Antenna WF7a	Antenna WF2a	Antenna WF7b
5	5.925 – 6.095	1	1.1	0.5	0.9	0.6	-0.2
	6.115 – 6.255	1.2	0.8	1.2	0.4	0	-0.1
	6.275 – 6.415	0.3	-0.3	0.2	0.3	-0.3	0.2
6	6.435 – 6.515	0.5	-0.4	-0.2	0.5	-0.4	-0.2
7	6.535 – 6.855	1.8	0.9	2.3	1.1	-0.2	-2.3
8	6.895 – 7.115	2.2	1.2	1.3	0.4	-0.9	-4.5

Table 2-9. Antenna Gains

2.4 Test Support Equipment

1	Apple MacBook Pro w/AC/DC Adapter	Model: Model:	A2141 A2166	S/N: S/N:	C02H604EQ05D C4H042705ZNP0M0WA6
2	Apple USB-C Cable	Model:	Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable w/ AC Adapter	Model: Model:	A2795 A2305	S/N: S/N:	DWH80115BK826GV19 C4H95160004PF4F4V
4	Apple Pencil	Model:	A2538	S/N:	KJ26TCFXJW
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A
6	ASUS ROG Rapture	Model:	GT-BE98 Pro	S/N:	S4IG6M200654J6F

Table 2-10. Test Support Equipment List

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 10 of 260

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024, KDB 789033 D02 v02r01 and KDB 987594 D02 v03. ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel were reported.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

802.11be-mode test data provided in this report covers 802.11ax as target powers are identical.

802.11ax/be HE20/40/80/160 2TX SDM mode test data provided in this report covers 802.11ax/be HE20/40/80/160 2TX STBC mode.

The data rates have been categorized into three groups: low, middle, and high data rates (see Table 2-7). All three groups have been investigated, and only the worst-case data rate has been reported.

For 802.11be-RU test results, see separate UNII 6GHz OFDMA report 1C2509100081-16.BCG.

2.6 Software and Firmware

The test was conducted with firmware version 23D40 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 11 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 12 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 13 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 14 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	2.00
Line Conducted Disturbance	1.88
Radiated Disturbance (<30MHz)	4.24
Radiated Disturbance (30MHz - 1GHz)	4.96
Radiated Disturbance (1 - 18GHz)	5.18
Radiated Disturbance (>18GHz)	5.18

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 15 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance with the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Anritsu	ML2496A	Power Meter	2/10/2025	Annual	2/10/2026	1306009
Anritsu	MA2411B	Pulse Power Sensor	2/10/2025	Annual	2/10/2026	1315051
Anritsu	MA2411B	Pulse Power Sensor	2/10/2025	Annual	2/10/2026	1339027
ATM	180-442-KF	20dB Nominal Gain Horn Antenna	3/24/2025	Annual	3/24/2026	T058601-02
ETS-Lindgren	3117	Double Ridged Guide Horn (1-18 GHz)	4/16/2025	Annual	4/16/2026	218555
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz RF Cable/Attenuator *	6/10/2025	Annual	6/10/2026	-
Fairview Microwave	FM2CP1122-10	Directional Coupler *	6/10/2025	Annual	6/10/2026	1946
Keysight Technology	N9040B	UXA Signal Analyzer	9/8/2025	Annual	9/8/2026	MY61320121
Keysight Technology	N9030A	PXA Signal Analyzer	9/15/2025	Annual	9/15/2026	MY49430494
Mini-Circuits	ZN2PD-9G	Power Splitter*	9/16/2025	Annual	9/16/2026	SF456200530
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/6/2025	Annual	8/6/2026	101639
Rohde & Schwarz	FSW43	Spectrum Analyzer 2Hz to 43GHz	11/21/2024	Annual	11/21/2025	104093
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	5/13/2025	Annual	5/13/2026	101867
Rohde & Schwarz	SMW200A	Vector Signal Generator	3/10/2025	Annual	3/10/2026	110589
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	11/15/2024	Annual	11/15/2025	102326
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	10/14/2025	Annual	10/14/2026	102328
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/3/2025	Annual	6/3/2026	100052
Rohde & Schwarz	HFH2-Z2	Loop Antenna	5/12/2025	Annual	5/12/2026	100546
Rohde & Schwarz	ENV216	Two-Line V-Network	4/24/2025	Annual	4/24/2026	101364
Rohde & Schwarz	CMX500	Wideband Radio Communication Tester	11/11/2024	Annual	11/11/2025	100298
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	10/8/2025	Annual	10/8/2026	00358

Table 6-1. Test Equipment List

Note:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- * denotes passive equipment that have been internally verified/calibrated.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 16 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA3461
 IC: 579C-A3461
 FCC Classification: 15E 6GHz Low Power Dual Client (6CD)

FCC Part Section(s) / KDB Reference	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049, 15.407(a)(11)	RSS Gen [6.7], RSS-248 [4.4]	Occupied Bandwidth/ 26dB Bandwidth	99% of the occupied bandwidth of any channel must be contained within each of its respective U-NII sub bands < 320MHz (5.925 - 7.125GHz)	CONDUCTED	PASS	Section 7.2
15.407(a)(8)	RSS-248 [4.5.3]	Maximum Power Spectral Density	< -1dBm/MHz e.i.r.p. for Low Power Indoor		PASS	Section 7.4
15.407(a)(7)	RSS-248 [4.5.5]		< 17dBm/MHz e.i.r.p. for Standard Power		PASS	
15.407(a)(8)	RSS-248 [4.5.3]	Maximum EIRP	< 24dBm over the frequency band of operation		PASS	Section 7.3
15.407(a)(7)	RSS-248 [4.5.5]		< 30dBm over the frequency band of operation		PASS	
15.407(b)(7)	RSS-248 [4.6.2]	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(7) and RSS-248 [4.6.2] b)		PASS	Section 7.5
15.407(d)(6)	RSS-248 [4.7]	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty		PASS	Section 7.6
15.407(a)(7)	RSS-248 [4.5.5]	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	EUT maintains its power level at least 6 dB lower than that of the standard-power access point		PASS	See UNII 6GHz OFDMA Report 1C25091000 81-16.BCG
987594 D02 v03	987594 D02 v03	Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	EUT maximum power level shall not exceed 30dBm EIRP when connected to Standard Power AP, and 24dBm EIRP when connected to Low Power Indoor AP		PASS	
15.407(b)(6)	RSS-248 [4.6.2]	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band	RADIATED	PASS	Section 7.7
15.205, 15.209	RSS-248 [4.6.2] RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.7, 7.8
15.407(b)(9)	RSS-Gen [8.8]	AC Conducted Emissions (150kHz – 30MHz)	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Conducted Automation,” Version 1.5.0.
- 5) For radiated testing, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 3.6.1.
- 6) All radiated measurements were tested at the highest supported power setting per band.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 17 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2 26dB & 99% Bandwidth Measurement

\$2.1049; \$15.407; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 12.5.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = in the range of 1% to 5% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All data rates and antenna configurations were investigated, and tabular data has been reported. Only the worst-case plot per bandwidth was reported.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 18 of 260


V 11.0 5/2025

7.2.1 Antenna WF7a 26dB & 99% Bandwidth Measurements – SP


	Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	36Mbps	18.39	30.98	320	Pass
	6175	45	a	36Mbps	18.31	30.08	320	Pass
	6415	93	a	36Mbps	18.34	28.75	320	Pass
	5955	1	be (20MHz)	MCS5	19.40	31.39	320	Pass
	6175	45	be (20MHz)	MCS5	19.35	31.75	320	Pass
	6415	93	be (20MHz)	MCS5	19.39	31.40	320	Pass
	5965	3	be (40MHz)	MCS5	38.87	64.64	320	Pass
	6165	43	be (40MHz)	MCS5	38.69	64.04	320	Pass
	6405	91	be (40MHz)	MCS5	38.77	65.09	320	Pass
	5985	7	be (80MHz)	MCS5	77.81	113.38	320	Pass
	6145	39	be (80MHz)	MCS5	77.87	113.67	320	Pass
	6385	87	be (80MHz)	MCS5	77.85	107.79	320	Pass
	6025	15	be (160MHz)	MCS5	156.45	173.51	320	Pass
	6185	47	be (160MHz)	MCS5	156.56	173.19	320	Pass
Band 6	6345	79	be (160MHz)	MCS5	156.53	175.45	320	Pass
	6435	97	a	36Mbps	18.30	28.27	320	Pass
	6475	105	a	36Mbps	18.25	29.74	320	Pass
	6515	113	a	36Mbps	18.29	29.55	320	Pass
	6435	97	be (20MHz)	MCS5	19.34	29.27	320	Pass
	6475	105	be (20MHz)	MCS5	19.33	30.77	320	Pass
	6515	113	be (20MHz)	MCS5	19.33	31.09	320	Pass
	6445	99	be (40MHz)	MCS5	38.62	63.54	320	Pass
	6485	107	be (40MHz)	MCS5	38.55	61.40	320	Pass
	6525	115	be (40MHz)	MCS5	38.77	63.65	320	Pass
	6465	103	be (80MHz)	MCS5	77.81	117.45	320	Pass
	6505	111	be (160MHz)	MCS5	156.49	174.08	320	Pass
Band 7	6535	117	a	36Mbps	18.31	30.82	320	Pass
	6695	149	a	36Mbps	18.18	30.85	320	Pass
	6855	181	a	36Mbps	18.37	29.95	320	Pass
	6535	117	be (20MHz)	MCS5	19.37	30.69	320	Pass
	6695	149	be (20MHz)	MCS5	19.34	31.48	320	Pass
	6855	181	be (20MHz)	MCS5	19.33	31.40	320	Pass
	6725	155	be (40MHz)	MCS5	38.73	64.00	320	Pass
	6845	179	be (40MHz)	MCS5	38.76	62.51	320	Pass
	6545	119	be (80MHz)	MCS5	77.94	109.87	320	Pass
	6705	151	be (80MHz)	MCS5	77.74	101.32	320	Pass
	6785	167	be (80MHz)	MCS5	77.91	105.16	320	Pass
	6665	143	be (160MHz)	MCS5	156.57	176.26	320	Pass

Table 7-2. Conducted Bandwidth Measurements Antenna WF7a


FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 19 of 260

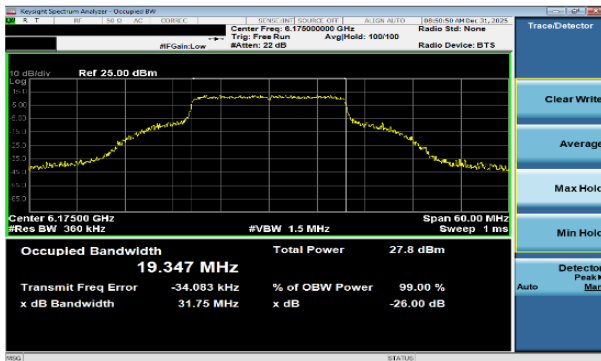


Plot 7-1 26dB BW & 99% OBW Antenna WF7a (20MHz BW 802.11be(SU) - Ch.45)

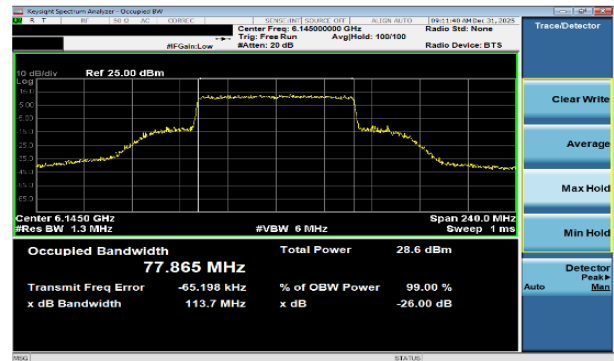

Plot 7-3 26dB BW & 99% OBW Antenna WF7a (80MHz BW 802.11be(SU) - Ch.39)




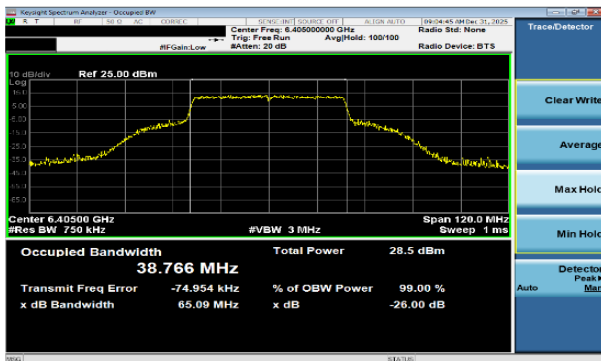


Plot 7-2 26dB BW & 99% OBW Antenna WF7a (40MHz BW 802.11be(SU) - Ch.91)

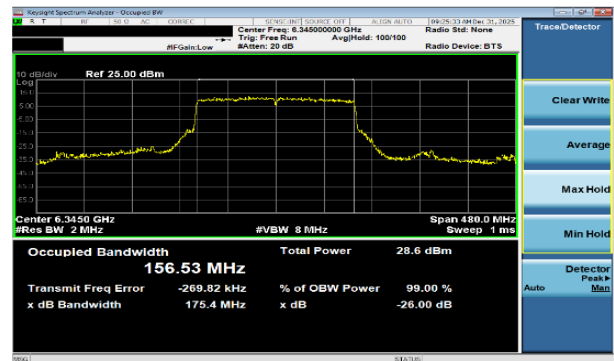


Plot 7-4 26dB BW & 99% OBW Antenna WF7a (160MHz BW 802.11be(SU) - Ch.79)


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 20 of 260

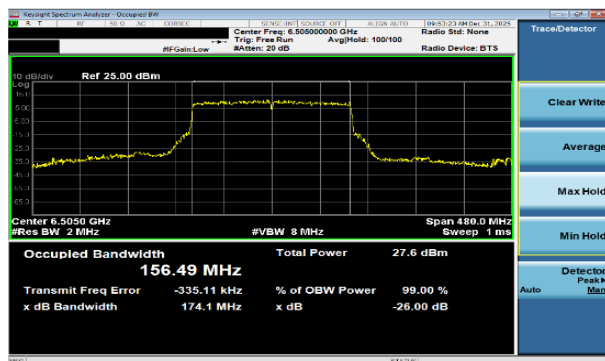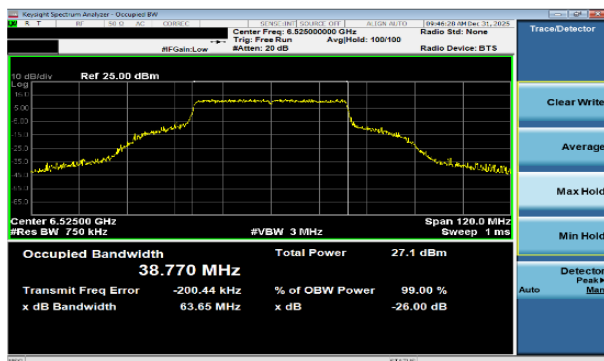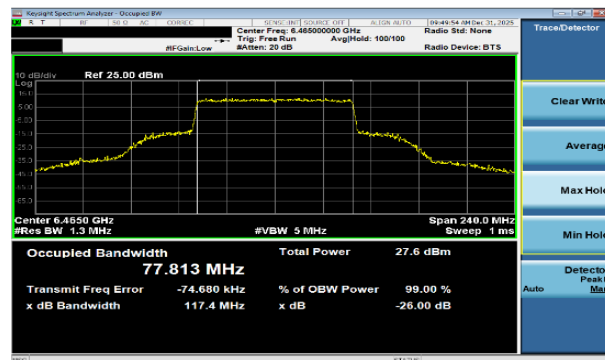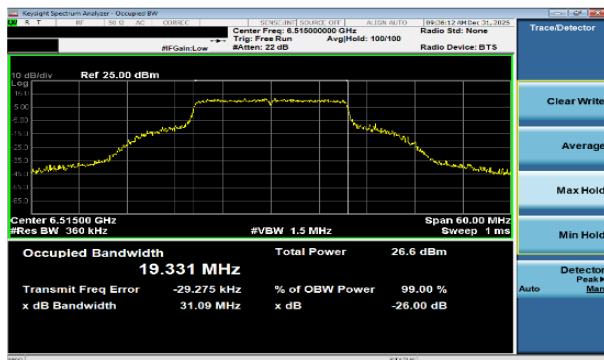


FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 21 of 260

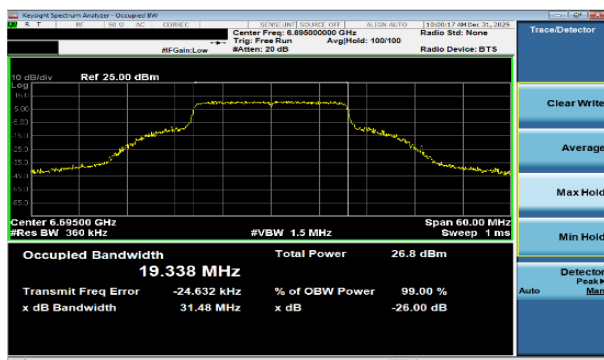


Plot 7-9 26dB BW & 99% OBW Antenna WF7a (20MHz BW 802.11be(SU) - Ch.149)

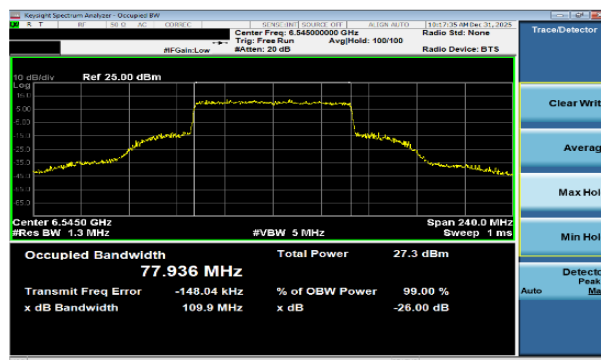

Plot 7-11 26dB BW & 99% OBW Antenna WF7a (80MHz BW 802.11be(SU) - Ch.119)

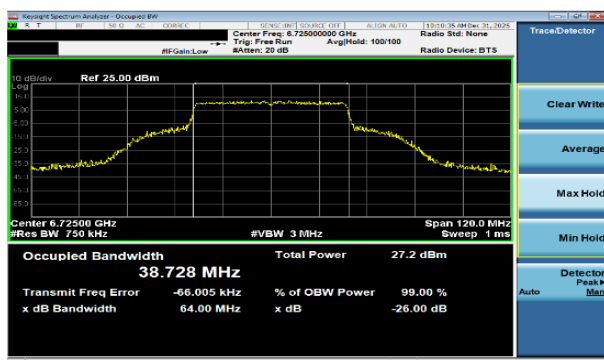

Plot 7-10 26dB BW & 99% OBW Antenna WF7a (40MHz BW 802.11be(SU) - Ch.155)

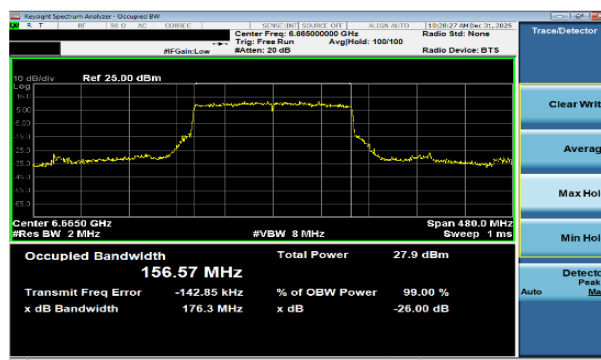

Plot 7-12 26dB BW & 99% OBW Antenna WF7a (160MHz BW 802.11be(SU) - Ch.143)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 22 of 260

7.2.2 Antenna WF7a 26dB & 99% Bandwidth Measurements – LPI


	Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	36Mbps	18.32	30.19	320	Pass
	6175	45	a	36Mbps	18.35	30.30	320	Pass
	6415	93	a	36Mbps	18.29	30.30	320	Pass
	5955	1	be (20MHz)	MCS5	19.33	31.76	320	Pass
	6175	45	be (20MHz)	MCS5	19.32	31.16	320	Pass
	6415	93	be (20MHz)	MCS5	19.36	30.84	320	Pass
	5965	3	be (40MHz)	MCS5	38.60	63.87	320	Pass
	6165	43	be (40MHz)	MCS5	38.63	63.68	320	Pass
	6405	91	be (40MHz)	MCS5	38.63	62.93	320	Pass
	5985	7	be (80MHz)	MCS5	77.80	105.65	320	Pass
	6145	39	be (80MHz)	MCS5	77.79	102.12	320	Pass
	6385	87	be (80MHz)	MCS5	77.94	100.21	320	Pass
	6025	15	be (160MHz)	MCS5	156.60	171.64	320	Pass
	6185	47	be (160MHz)	MCS5	156.52	173.35	320	Pass
Band 6	6345	79	be (160MHz)	MCS5	156.68	173.51	320	Pass
	6435	97	a	36Mbps	18.35	30.15	320	Pass
	6475	105	a	36Mbps	18.35	30.02	320	Pass
	6515	113	a	36Mbps	18.29	30.48	320	Pass
	6435	97	be (20MHz)	MCS5	19.36	31.69	320	Pass
	6475	105	be (20MHz)	MCS5	19.34	30.72	320	Pass
	6515	113	be (20MHz)	MCS5	19.32	31.55	320	Pass
	6445	99	be (40MHz)	MCS5	38.71	61.83	320	Pass
	6485	107	be (40MHz)	MCS0	38.31	44.91	320	Pass
	6525	115	be (40MHz)	MCS0	38.19	45.51	320	Pass
	6465	103	be (80MHz)	MCS5	77.86	106.91	320	Pass
	6505	111	be (160MHz)	MCS5	156.64	173.35	320	Pass
	6535	117	a	36Mbps	18.36	30.04	320	Pass
	6695	149	a	36Mbps	18.29	28.85	320	Pass
Band 7	6875	185	a	36Mbps	18.31	32.13	320	Pass
	6535	117	be (20MHz)	MCS5	19.35	31.56	320	Pass
	6695	149	be (20MHz)	MCS5	19.40	31.82	320	Pass
	6875	185	be (20MHz)	MCS5	19.38	32.08	320	Pass
	6565	123	be (40MHz)	MCS5	38.64	61.09	320	Pass
	6725	155	be (40MHz)	MCS5	38.69	61.14	320	Pass
	6845	179	be (40MHz)	MCS5	38.61	63.44	320	Pass
	6545	119	be (80MHz)	MCS5	77.83	107.75	320	Pass
	6705	151	be (80MHz)	MCS5	77.78	106.63	320	Pass
	6865	183	be (80MHz)	MCS5	77.83	84.44	320	Pass
	6665	143	be (160MHz)	MCS5	156.51	173.58	320	Pass
	6825	175	be (160MHz)	MCS5	156.72	173.57	320	Pass
	6895	189	a	36Mbps	18.35	29.76	320	Pass
	6995	209	a	36Mbps	18.35	30.28	320	Pass
Band 8	7115	233	a	36Mbps	18.33	31.10	320	Pass
	6895	189	be (20MHz)	MCS5	19.39	30.96	320	Pass
	6995	209	be (20MHz)	MCS5	19.34	31.24	320	Pass
	7115	233	be (20MHz)	MCS5	19.40	31.91	320	Pass
	6885	187	be (40MHz)	MCS5	38.74	62.21	320	Pass
	7005	211	be (40MHz)	MCS5	38.69	62.79	320	Pass
	7085	227	be (40MHz)	MCS5	38.66	63.41	320	Pass
	6945	199	be (80MHz)	MCS5	77.75	103.78	320	Pass
	7025	215	be (80MHz)	MCS5	77.88	109.42	320	Pass
	6985	207	be (160MHz)	MCS5	156.37	170.52	320	Pass

Table 7-3. Conducted Bandwidth Measurements Antenna WF7a


FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 23 of 260

V 11.0 5/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

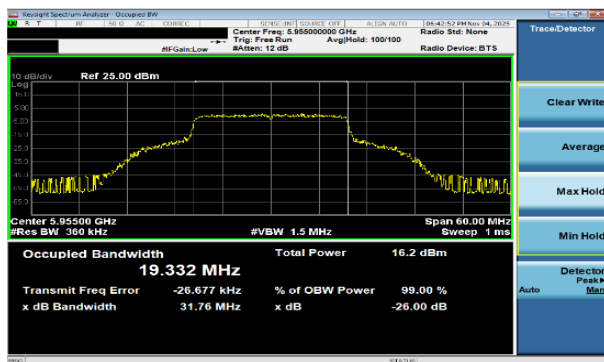


Plot 7-13 26dB BW & 99% OBW Antenna WF7a (20MHz BW 802.11be(SU) - Ch.1)

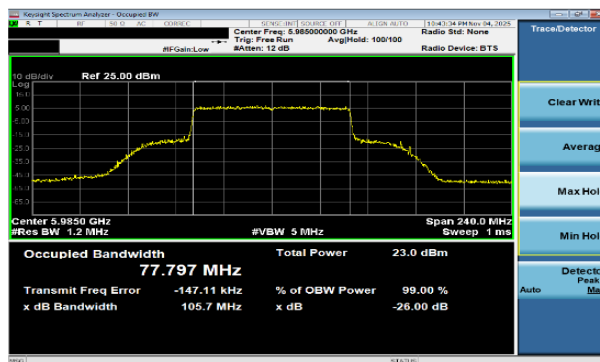

Plot 7-15 26dB BW & 99% OBW Antenna WF7a (80MHz BW 802.11be(SU) - Ch.7)




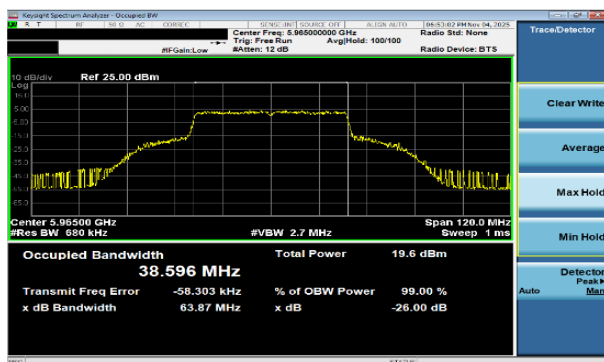


Plot 7-14 26dB BW & 99% OBW Antenna WF7a (40MHz BW 802.11be(SU) - Ch.3)

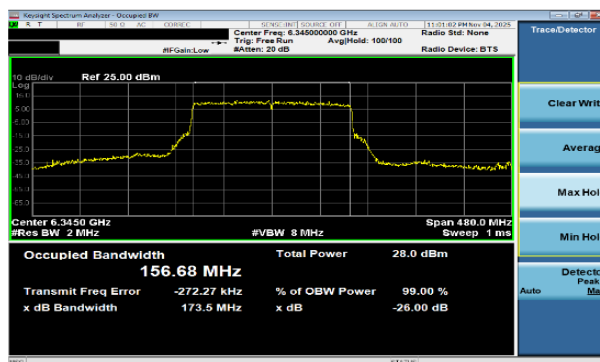


Plot 7-16 26dB BW & 99% OBW Antenna WF7a (160MHz BW 802.11be(SU) - Ch.79)


FCC ID: BCGA3461 IC: 579C-A3461	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 24 of 260

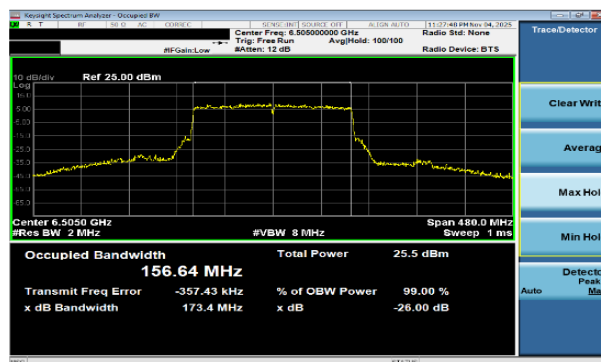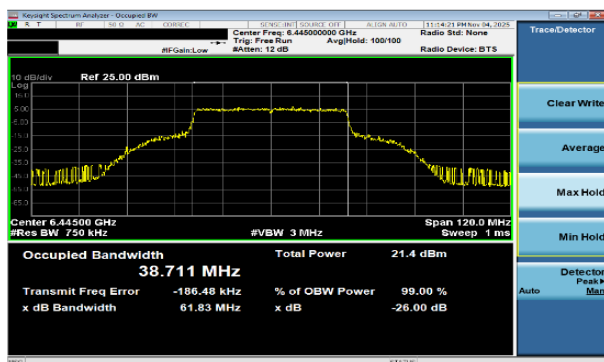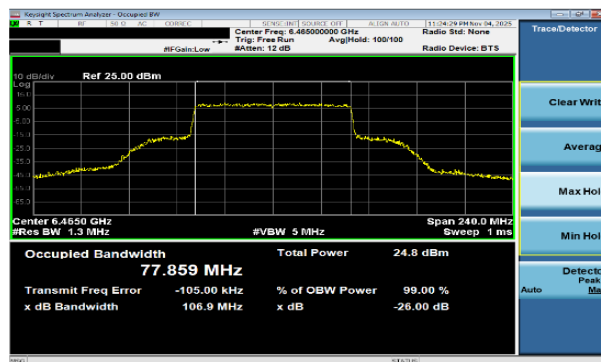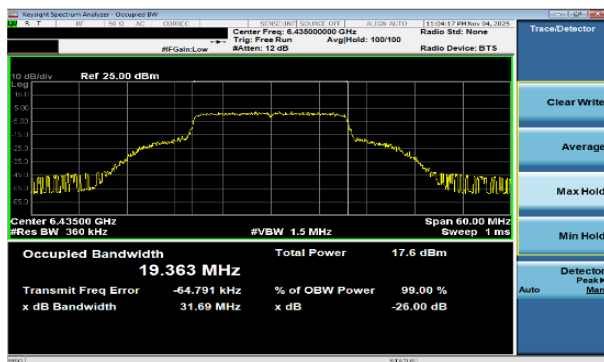


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 25 of 260

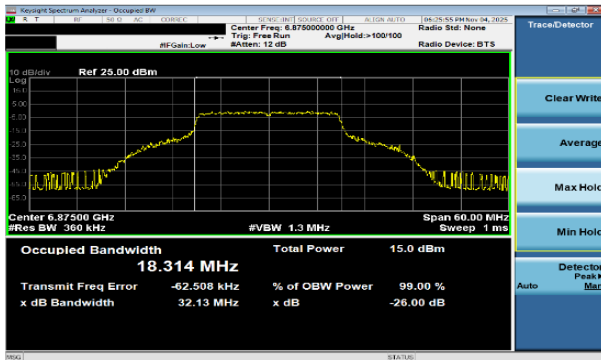


Plot 7-21 26dB BW & 99% OBW Antenna WF7a (20MHz BW 802.11a - Ch.185)

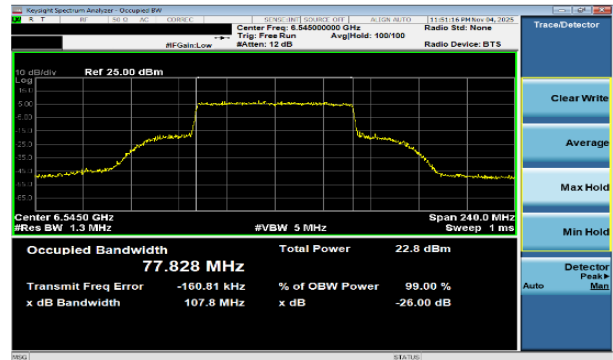


Plot 7-23 26dB BW & 99% OBW Antenna WF7a (80MHz BW 802.11be(SU) - Ch.119)

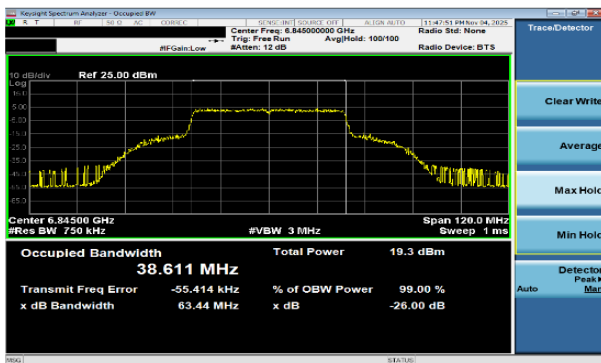


Plot 7-22 26dB BW & 99% OBW Antenna WF7a (40MHz BW 802.11be(SU) - Ch.179)

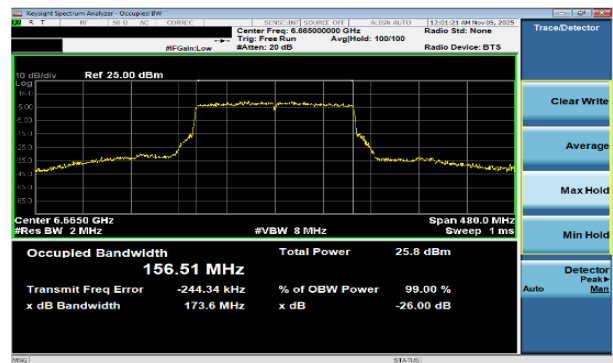


Plot 7-24 26dB BW & 99% OBW Antenna WF7a (160MHz BW 802.11be(SU) - Ch.143)

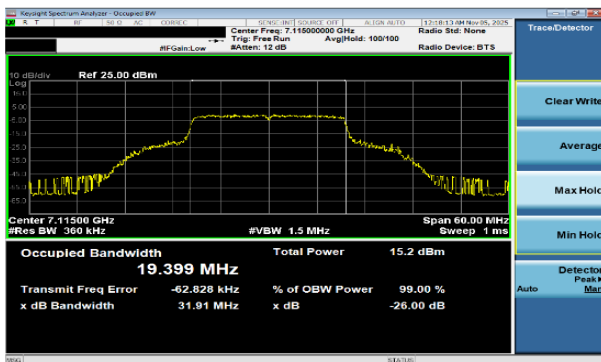


Plot 7-25 26dB BW & 99% OBW Antenna WF7a (20MHz BW 802.11be(SU) - Ch.233)

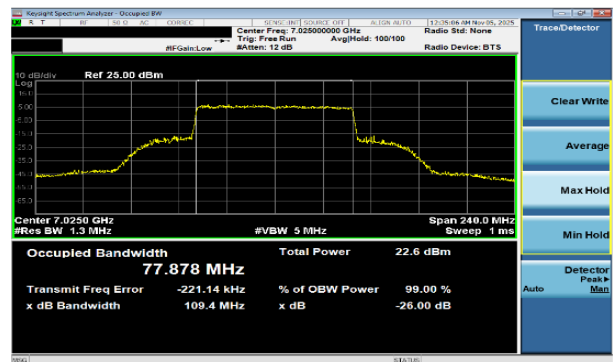

Plot 7-27 26dB BW & 99% OBW Antenna WF7a (80MHz BW 802.11be(SU) - Ch.215)

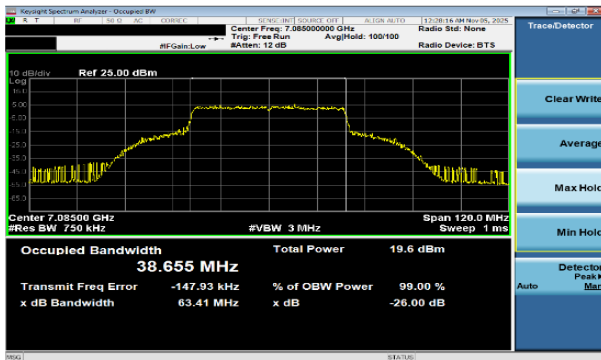

Plot 7-26 26dB BW & 99% OBW Antenna WF7a (40MHz BW 802.11be(SU) - Ch.227)

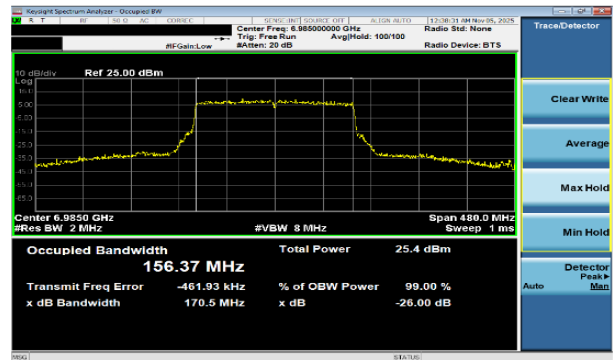

Plot 7-28 26dB BW & 99% OBW Antenna WF7a (160MHz BW 802.11be(SU) - Ch.207)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 26 of 260

7.2.3 Antenna WF2a 26dB & 99% Bandwidth Measurements – SP

	Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	6Mbps	17.98	23.12	320	Pass
	6175	45	a	6Mbps	18.00	23.07	320	Pass
	6415	93	a	6Mbps	18.08	22.92	320	Pass
	5955	1	be (20MHz)	MCS0	19.07	22.99	320	Pass
	6175	45	be (20MHz)	MCS0	19.04	22.80	320	Pass
	6415	93	be (20MHz)	MCS0	19.09	23.27	320	Pass
	5965	3	be (40MHz)	MCS3	38.06	44.04	320	Pass
	6165	43	be (40MHz)	MCS0	37.99	44.18	320	Pass
	6405	91	be (40MHz)	MCS0	38.09	44.61	320	Pass
	5985	7	be (80MHz)	MCS5	77.54	82.51	320	Pass
	6145	39	be (80MHz)	MCS3	77.55	82.62	320	Pass
	6385	87	be (80MHz)	MCS0	77.53	82.43	320	Pass
	6025	15	be (160MHz)	MCS5	156.34	168.53	320	Pass
Band 6	6185	47	be (160MHz)	MCS5	156.39	172.51	320	Pass
	6345	79	be (160MHz)	MCS5	156.49	174.11	320	Pass
	6435	97	a	6Mbps	18.03	22.84	320	Pass
	6475	105	a	6Mbps	17.98	22.51	320	Pass
	6515	113	a	6Mbps	18.01	22.74	320	Pass
	6435	97	be (20MHz)	MCS5	19.04	22.71	320	Pass
	6475	105	be (20MHz)	MCS0	19.10	22.76	320	Pass
	6515	113	be (20MHz)	MCS5	19.06	22.82	320	Pass
	6445	99	be (40MHz)	MCS5	38.05	44.58	320	Pass
	6485	107	be (40MHz)	MCS3	38.07	44.18	320	Pass
Band 7	6525	115	be (40MHz)	MCS5	38.06	44.29	320	Pass
	6465	103	be (80MHz)	MCS5	77.85	103.05	320	Pass
	6505	111	be (160MHz)	MCS5	157.09	174.98	320	Pass
	6535	117	a	6Mbps	17.98	22.73	320	Pass
	6695	149	a	6Mbps	18.06	22.94	320	Pass
	6855	181	a	6Mbps	18.07	24.97	320	Pass
	6535	117	be (20MHz)	MCS5	19.37	31.64	320	Pass
	6695	149	be (20MHz)	MCS5	19.34	31.81	320	Pass
	6855	181	be (20MHz)	MCS5	19.37	31.09	320	Pass
	6725	155	be (40MHz)	MCS5	38.62	63.93	320	Pass
	6845	179	be (40MHz)	MCS5	38.85	62.61	320	Pass
	6545	119	be (80MHz)	MCS5	77.90	113.42	320	Pass
	6705	151	be (80MHz)	MCS5	77.80	114.27	320	Pass
	6785	167	be (80MHz)	MCS5	77.88	105.78	320	Pass
	6665	143	be (160MHz)	MCS5	156.57	173.89	320	Pass

Table 7-4. Conducted Bandwidth Measurements Antenna WF2a


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 27 of 260




Plot 7-33 26dB BW & 99% OBW Antenna WF2a (20MHz BW 802.11a - Ch.97)



Plot 7-35 26dB BW & 99% OBW Antenna WF2a (80MHz BW 802.11be(SU) - Ch.103)

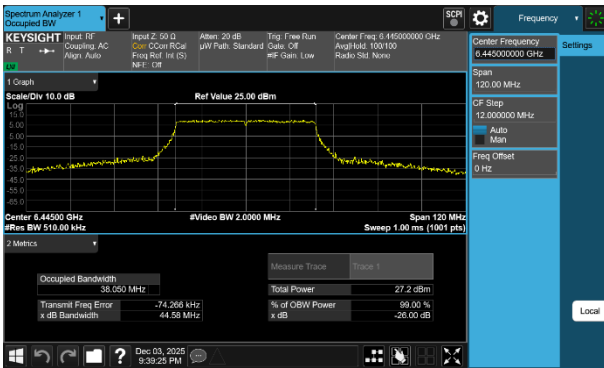


Plot 7-34 26dB BW & 99% OBW Antenna WF2a (40MHz BW 802.11be(SU) - Ch.99)

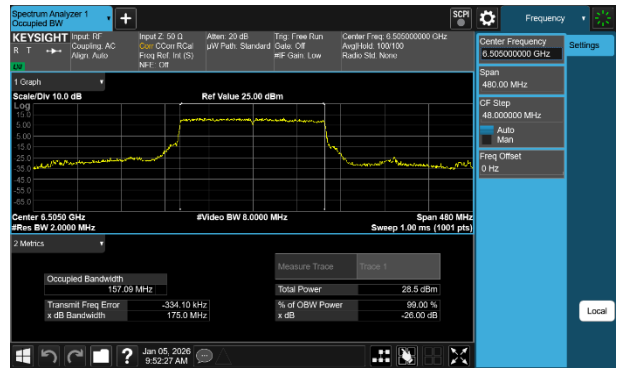


Plot 7-36 26dB BW & 99% OBW Antenna WF2a (160MHz BW 802.11be(SU) - Ch.111)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 29 of 260

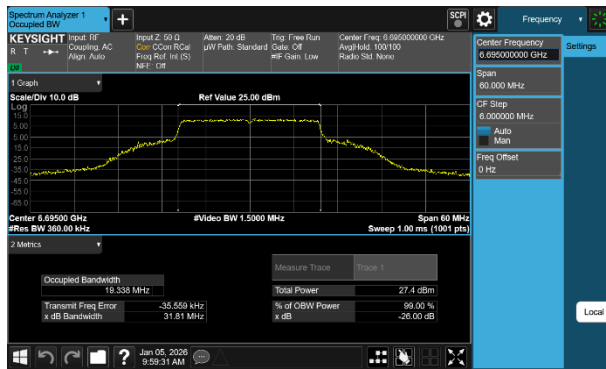


Plot 7-37 26dB BW & 99% OBW Antenna WF2a (20MHz BW
802.11be(SU) - Ch.149)

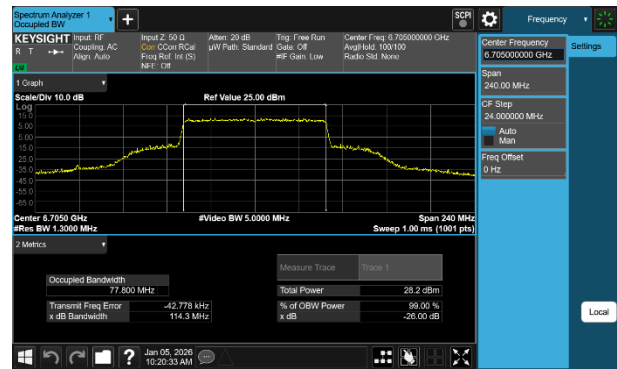

Plot 7-39 26dB BW & 99% OBW Antenna WF2a (80MHz BW
802.11be(SU) - Ch.151)



Plot 7-38 26dB BW & 99% OBW Antenna WF2a (40MHz BW
802.11be(SU) - Ch.155)

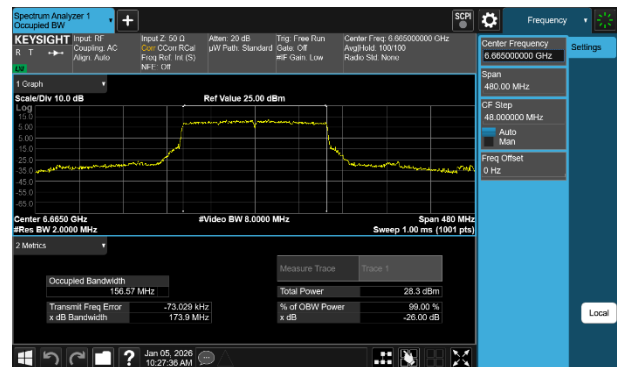

Plot 7-40 26dB BW & 99% OBW Antenna WF2a (160MHz BW
802.11be(SU) - Ch.143)

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 30 of 260

7.2.4 Antenna WF2a 26dB & 99% Bandwidth Measurements – LPI



	Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	36Mbps	18.23	28.10	320	Pass
	6175	45	a	36Mbps	18.33	30.04	320	Pass
	6415	93	a	36Mbps	18.22	30.11	320	Pass
	5955	1	be (20MHz)	MCS5	19.32	31.82	320	Pass
	6175	45	be (20MHz)	MCS5	19.38	32.41	320	Pass
	6415	93	be (20MHz)	MCS5	19.37	30.63	320	Pass
	5965	3	be (40MHz)	MCS5	38.53	63.90	320	Pass
	6165	43	be (40MHz)	MCS5	38.74	63.86	320	Pass
	6405	91	be (40MHz)	MCS5	38.67	63.09	320	Pass
	5985	7	be (80MHz)	MCS5	77.90	116.08	320	Pass
	6145	39	be (80MHz)	MCS5	77.85	105.27	320	Pass
	6385	87	be (80MHz)	MCS5	77.93	104.00	320	Pass
	6025	15	be (160MHz)	MCS5	156.36	171.37	320	Pass
	6185	47	be (160MHz)	MCS5	156.51	171.66	320	Pass
Band 6	6345	79	be (160MHz)	MCS5	156.51	173.03	320	Pass
	6435	97	a	36Mbps	18.38	29.96	320	Pass
	6475	105	a	36Mbps	18.35	30.11	320	Pass
	6515	113	a	36Mbps	18.29	30.43	320	Pass
	6435	97	be (20MHz)	MCS5	19.38	31.84	320	Pass
	6475	105	be (20MHz)	MCS5	19.39	30.07	320	Pass
	6515	113	be (20MHz)	MCS5	19.42	31.60	320	Pass
	6445	99	be (40MHz)	MCS5	38.86	62.50	320	Pass
	6485	107	be (40MHz)	MCS0	38.30	46.03	320	Pass
	6525	115	be (40MHz)	MCS0	38.34	45.91	320	Pass
Band 7	6465	103	be (80MHz)	MCS5	77.92	113.14	320	Pass
	6505	111	be (160MHz)	MCS5	156.81	174.46	320	Pass
	6535	117	a	36Mbps	18.36	30.85	320	Pass
	6695	149	a	36Mbps	18.31	30.54	320	Pass
	6875	185	a	36Mbps	18.42	29.98	320	Pass
	6535	117	be (20MHz)	MCS5	19.32	30.89	320	Pass
	6695	149	be (20MHz)	MCS5	19.40	31.22	320	Pass
	6875	185	be (20MHz)	MCS5	19.42	30.29	320	Pass
	6565	123	be (40MHz)	MCS5	38.80	63.78	320	Pass
	6725	155	be (40MHz)	MCS5	38.54	61.47	320	Pass
	6845	179	be (40MHz)	MCS5	38.79	62.09	320	Pass
	6545	119	be (80MHz)	MCS5	78.01	116.98	320	Pass
	6705	151	be (80MHz)	MCS5	77.85	105.75	320	Pass
	6865	183	be (80MHz)	MCS5	77.84	112.97	320	Pass
Band 8	6665	143	be (160MHz)	MCS5	156.56	174.64	320	Pass
	6825	175	be (160MHz)	MCS5	156.52	171.89	320	Pass
	6895	189	a	36Mbps	18.35	30.87	320	Pass
	6995	209	a	36Mbps	18.33	30.19	320	Pass
	7115	233	a	36Mbps	18.33	29.71	320	Pass
	6895	189	be (20MHz)	MCS5	19.38	31.32	320	Pass
	6995	209	be (20MHz)	MCS5	19.38	30.98	320	Pass
	7115	233	be (20MHz)	MCS5	19.42	31.69	320	Pass
	6885	187	be (40MHz)	MCS5	38.68	64.08	320	Pass
	7005	211	be (40MHz)	MCS5	38.64	63.01	320	Pass
	7085	227	be (40MHz)	MCS5	38.80	62.97	320	Pass
	6945	199	be (80MHz)	MCS5	77.74	105.44	320	Pass
	7025	215	be (80MHz)	MCS5	77.82	108.98	320	Pass
	6985	207	be (160MHz)	MCS5	156.42	173.13	320	Pass

Table 7-5. Conducted Bandwidth Measurements Antenna WF2a


FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 31 of 260

V 11.0 5/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

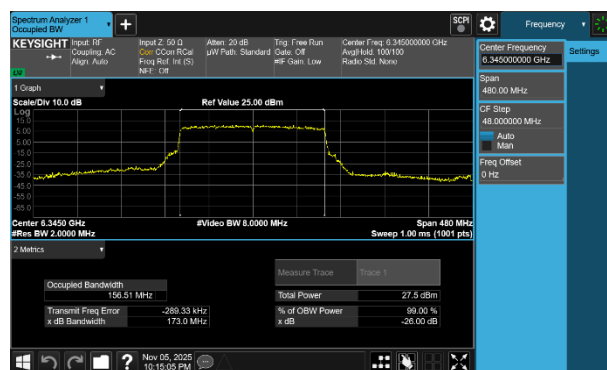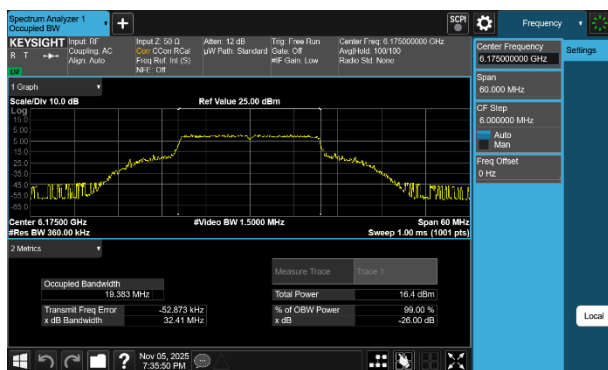

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG			Page 32 of 260
Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device		

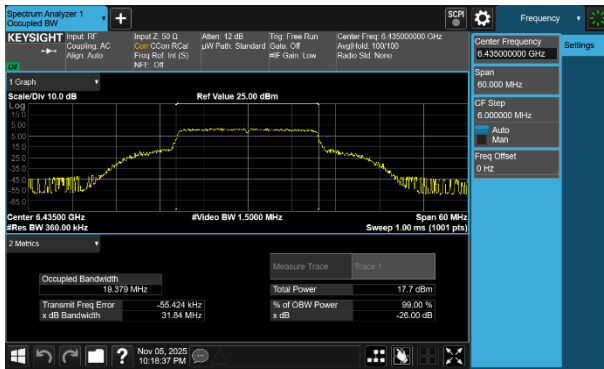


Plot 7-45 26dB BW & 99% OBW Antenna WF2a (20MHz BW 802.11be(SU) - Ch.97)

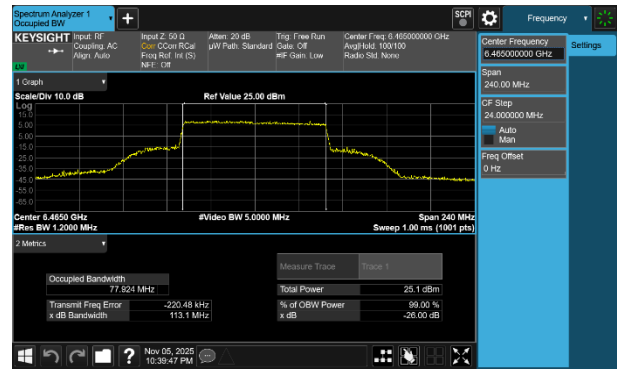


Plot 7-47 26dB BW & 99% OBW Antenna WF2a (80MHz BW 802.11be(SU) - Ch.103)




Plot 7-46 26dB BW & 99% OBW Antenna WF2a (40MHz BW 802.11be(SU) - Ch.99)

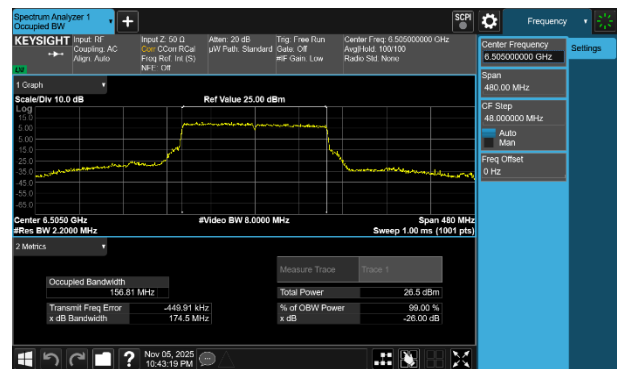

Plot 7-48 26dB BW & 99% OBW Antenna WF2a (160MHz BW 802.11be(SU) - Ch.111)

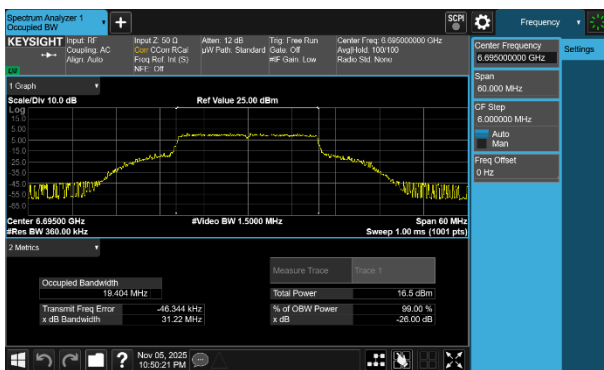


Plot 7-49 26dB BW & 99% OBW Antenna WF2a (20MHz BW 802.11be(SU) - Ch.149)

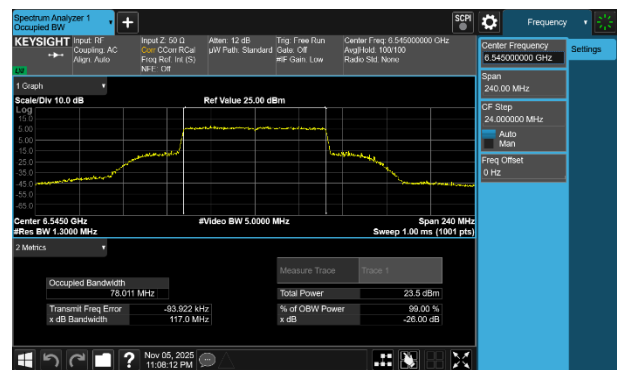

Plot 7-51 26dB BW & 99% OBW Antenna WF2a (80MHz BW 802.11be(SU) - Ch.119)






Plot 7-50 26dB BW & 99% OBW Antenna WF2a (40MHz BW 802.11be(SU) - Ch.123)

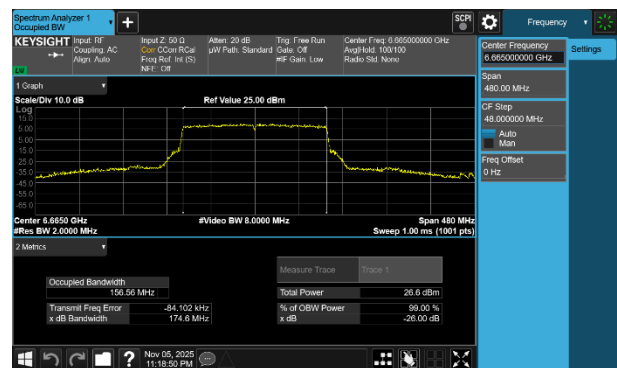

Plot 7-52 26dB BW & 99% OBW Antenna WF2a (160MHz BW 802.11be(SU) - Ch.143)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG			Page 33 of 260

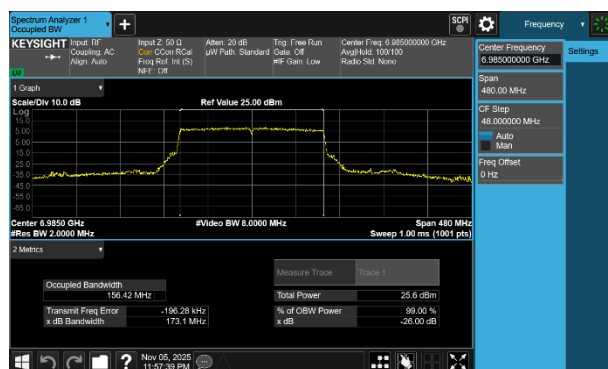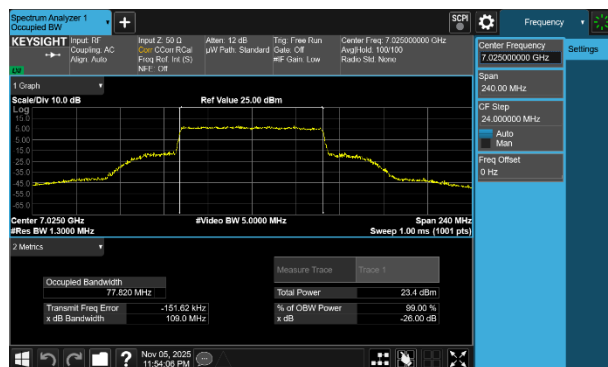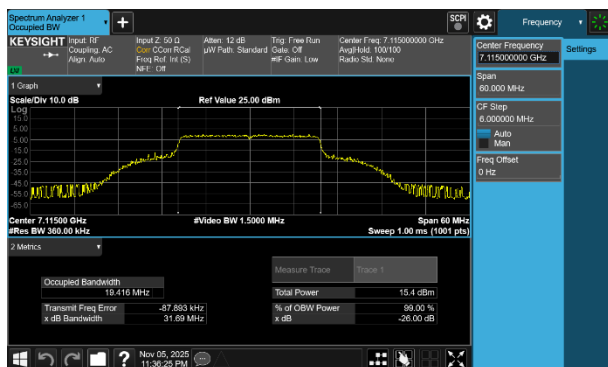


FCC ID: BCGA3461 IC: 579C-A3461	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 34 of 260

7.2.5 Antenna WF7b 26dB & 99% Bandwidth Measurements – SP


	Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	36Mbps	18.35	29.76	320	Pass
	6175	45	a	36Mbps	18.38	30.88	320	Pass
	6415	93	a	36Mbps	18.25	29.62	320	Pass
	5955	1	be (20MHz)	MCS5	19.38	30.59	320	Pass
	6175	45	be (20MHz)	MCS5	19.34	31.40	320	Pass
	6415	93	be (20MHz)	MCS5	19.45	31.03	320	Pass
	5965	3	be (40MHz)	MCS5	38.73	63.37	320	Pass
	6165	43	be (40MHz)	MCS5	38.60	60.73	320	Pass
	6405	91	be (40MHz)	MCS5	38.75	64.86	320	Pass
	5985	7	be (80MHz)	MCS5	77.81	107.16	320	Pass
	6145	39	be (80MHz)	MCS5	77.78	109.80	320	Pass
	6385	87	be (80MHz)	MCS5	77.84	112.70	320	Pass
	6025	15	be (160MHz)	MCS5	156.50	177.09	320	Pass
	6185	47	be (160MHz)	MCS5	156.42	174.95	320	Pass
Band 6	6345	79	be (160MHz)	MCS5	156.45	175.24	320	Pass
	6435	97	a	36Mbps	18.26	30.20	320	Pass
	6475	105	a	36Mbps	18.25	31.88	320	Pass
	6515	113	a	36Mbps	18.33	29.86	320	Pass
	6435	97	be (20MHz)	MCS5	19.35	31.56	320	Pass
	6475	105	be (20MHz)	MCS5	19.45	30.67	320	Pass
	6515	113	be (20MHz)	MCS5	19.38	30.46	320	Pass
	6445	99	be (40MHz)	MCS5	38.70	58.96	320	Pass
	6485	107	be (40MHz)	MCS5	38.47	60.77	320	Pass
	6525	115	be (40MHz)	MCS5	38.72	62.17	320	Pass
	6465	103	be (80MHz)	MCS5	77.87	100.58	320	Pass
	6505	111	be (160MHz)	MCS5	156.72	176.92	320	Pass
	6535	117	a	36Mbps	18.39	30.75	320	Pass
	6695	149	a	36Mbps	18.32	30.30	320	Pass
Band 7	6855	181	a	36Mbps	18.51	32.47	320	Pass
	6535	117	be (20MHz)	MCS5	19.40	30.26	320	Pass
	6695	149	be (20MHz)	MCS5	19.35	30.64	320	Pass
	6855	181	be (20MHz)	MCS5	19.49	32.34	320	Pass
	6725	155	be (40MHz)	MCS5	38.80	63.67	320	Pass
	6845	179	be (40MHz)	MCS5	38.81	63.10	320	Pass
	6545	119	be (80MHz)	MCS5	77.87	106.38	320	Pass
	6705	151	be (80MHz)	MCS5	77.89	109.21	320	Pass
	6785	167	be (80MHz)	MCS5	78.00	116.93	320	Pass
	6665	143	be (160MHz)	MCS5	156.58	174.39	320	Pass

Table 7-6. Conducted Bandwidth Measurements Antenna WF7b


FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 35 of 260

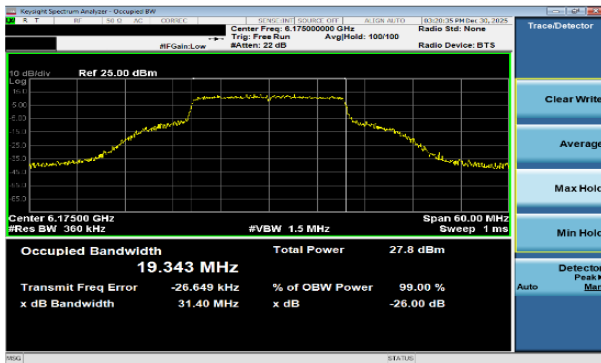


Plot 7-57 26dB BW & 99% OBW Antenna WF7b (20MHz BW 802.11be(SU) - Ch.45)

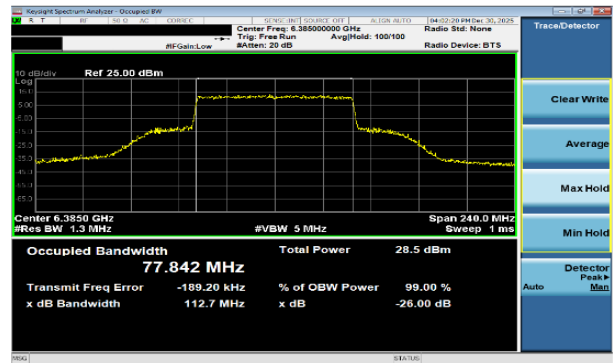

Plot 7-59 26dB BW & 99% OBW Antenna WF7b (80MHz BW 802.11be(SU) - Ch.87)

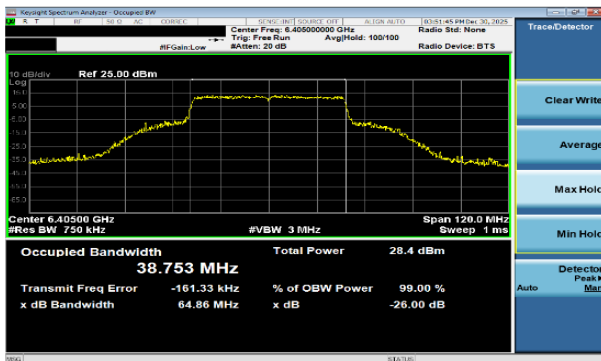


Plot 7-58 26dB BW & 99% OBW Antenna WF7b (40MHz BW 802.11be(SU) - Ch.91)

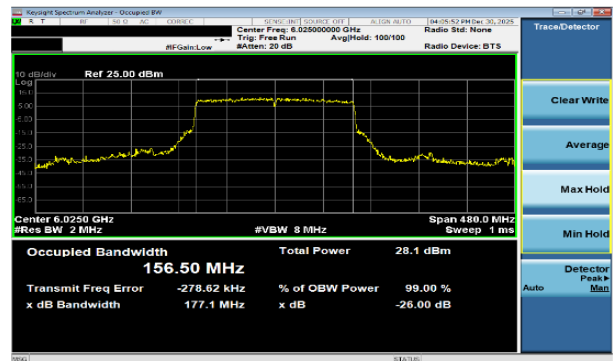


Plot 7-60 26dB BW & 99% OBW Antenna WF7b (160MHz BW 802.11be(SU) - Ch.15)


FCC ID: BCGA3461 IC: 579C-A3461	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 36 of 260

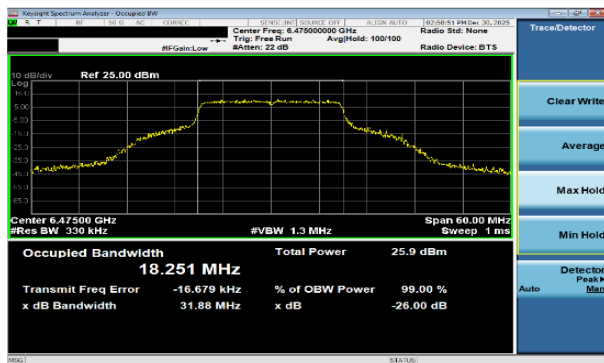


Plot 7-61 26dB BW & 99% OBW Antenna WF7b (20MHz BW 802.11a - Ch.105)

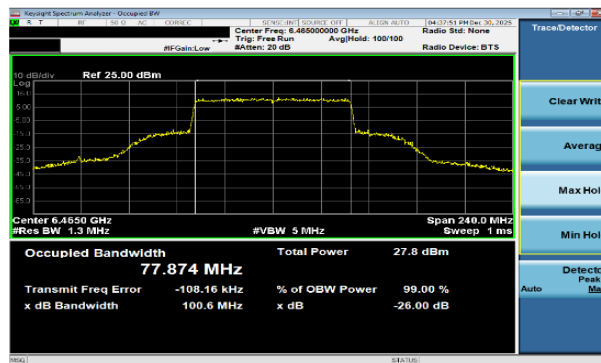

Plot 7-63 26dB BW & 99% OBW Antenna WF7b (80MHz BW 802.11be(SU) - Ch.103)

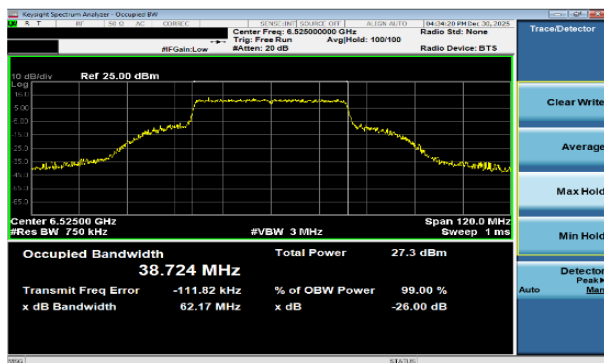


Plot 7-62 26dB BW & 99% OBW Antenna WF7b (40MHz BW 802.11be(SU) - Ch.115)

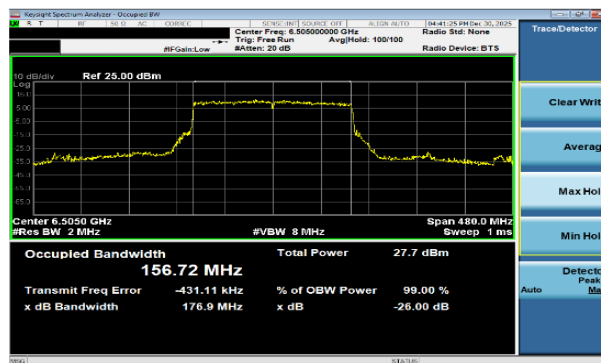


Plot 7-64 26dB BW & 99% OBW Antenna WF7b (160MHz BW 802.11be(SU) - Ch.111)


FCC ID: BCGA3461 IC: 579C-A3461	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 37 of 260

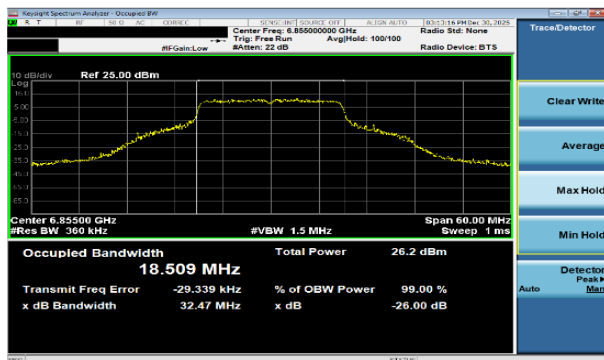


Plot 7-65 26dB BW & 99% OBW Antenna WF7b (20MHz BW 802.11a - Ch.181)

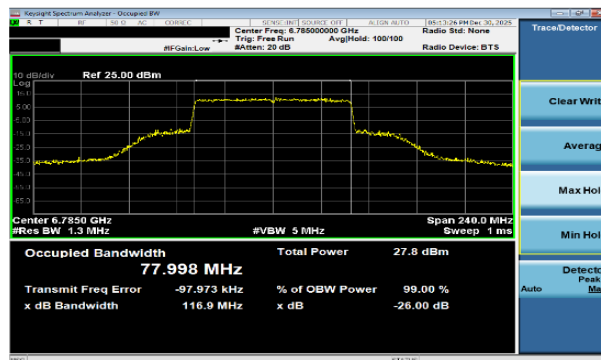

Plot 7-67 26dB BW & 99% OBW Antenna WF7b (80MHz BW 802.11be(SU) - Ch.167)

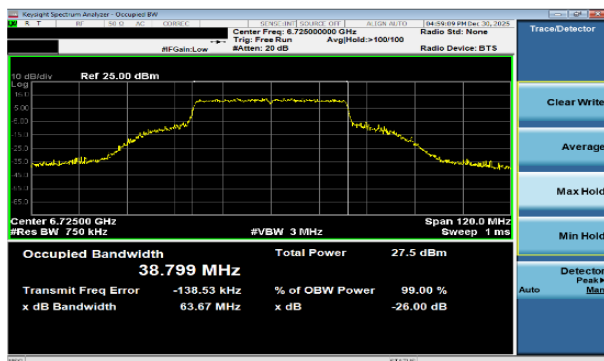

Plot 7-66 26dB BW & 99% OBW Antenna WF7b (40MHz BW 802.11be(SU) - Ch.155)

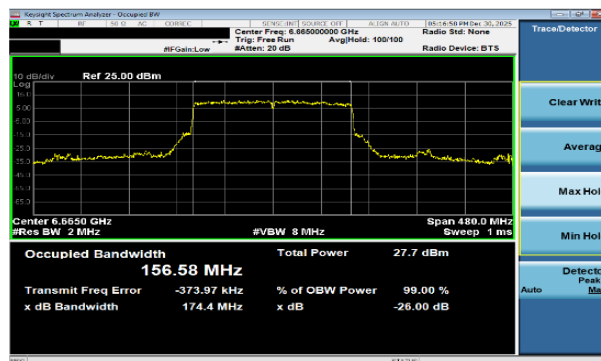

Plot 7-68 26dB BW & 99% OBW Antenna WF7b (160MHz BW 802.11be(SU) - Ch.143)




FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 38 of 260

7.2.6 Antenna WF7b 26dB & 99% Bandwidth Measurements – LPI


	Frequency [MHz]	Channel	802.11 MODE	Data Rate	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	36Mbps	18.24	30.10	320	Pass
	6175	45	a	36Mbps	18.32	29.47	320	Pass
	6415	93	a	36Mbps	18.33	29.93	320	Pass
	5955	1	be (20MHz)	MCS5	19.36	32.50	320	Pass
	6175	45	be (20MHz)	MCS5	19.35	30.71	320	Pass
	6415	93	be (20MHz)	MCS5	19.35	31.21	320	Pass
	5965	3	be (40MHz)	MCS5	38.72	64.00	320	Pass
	6165	43	be (40MHz)	MCS5	38.59	64.02	320	Pass
	6405	91	be (40MHz)	MCS5	38.66	59.15	320	Pass
	5985	7	be (80MHz)	MCS5	77.94	109.86	320	Pass
	6145	39	be (80MHz)	MCS5	77.88	112.54	320	Pass
	6385	87	be (80MHz)	MCS5	77.70	101.38	320	Pass
	6025	15	be (160MHz)	MCS5	156.45	175.87	320	Pass
	6185	47	be (160MHz)	MCS5	156.50	171.60	320	Pass
Band 6	6345	79	be (160MHz)	MCS5	156.69	169.98	320	Pass
	6435	97	a	36Mbps	18.41	31.11	320	Pass
	6475	105	a	36Mbps	18.33	30.21	320	Pass
	6515	113	a	36Mbps	18.26	29.66	320	Pass
	6435	97	be (20MHz)	MCS5	19.41	31.48	320	Pass
	6475	105	be (20MHz)	MCS5	19.36	31.61	320	Pass
	6515	113	be (20MHz)	MCS5	19.29	30.80	320	Pass
	6445	99	be (40MHz)	MCS5	38.43	63.15	320	Pass
	6485	107	be (40MHz)	MCS0	38.28	46.03	320	Pass
	6525	115	be (40MHz)	MCS0	38.30	45.69	320	Pass
	6465	103	be (80MHz)	MCS5	77.77	105.09	320	Pass
	6505	111	be (160MHz)	MCS5	156.77	174.09	320	Pass
	6535	117	a	36Mbps	18.17	30.46	320	Pass
	6695	149	a	36Mbps	18.33	30.08	320	Pass
Band 7	6875	185	a	36Mbps	18.24	28.49	320	Pass
	6535	117	be (20MHz)	MCS5	19.33	30.83	320	Pass
	6695	149	be (20MHz)	MCS5	19.35	30.73	320	Pass
	6875	185	be (20MHz)	MCS5	19.37	31.19	320	Pass
	6565	123	be (40MHz)	MCS5	38.53	63.39	320	Pass
	6725	155	be (40MHz)	MCS5	38.74	64.35	320	Pass
	6845	179	be (40MHz)	MCS5	38.82	62.73	320	Pass
	6545	119	be (80MHz)	MCS5	77.94	111.49	320	Pass
	6705	151	be (80MHz)	MCS5	77.84	100.62	320	Pass
	6865	183	be (80MHz)	MCS5	77.86	111.25	320	Pass
	6665	143	be (160MHz)	MCS5	156.54	176.10	320	Pass
	6825	175	be (160MHz)	MCS5	156.42	169.97	320	Pass
	6895	189	a	36Mbps	18.31	31.04	320	Pass
	6995	209	a	36Mbps	18.31	30.13	320	Pass
Band 8	7115	233	a	36Mbps	18.27	28.92	320	Pass
	6895	189	be (20MHz)	MCS5	19.35	30.81	320	Pass
	6995	209	be (20MHz)	MCS5	19.32	30.46	320	Pass
	7115	233	be (20MHz)	MCS5	19.31	30.75	320	Pass
	6885	187	be (40MHz)	MCS5	38.63	62.60	320	Pass
	7005	211	be (40MHz)	MCS5	38.70	61.86	320	Pass
	7085	227	be (40MHz)	MCS5	38.81	61.62	320	Pass
	6945	199	be (80MHz)	MCS5	77.78	105.51	320	Pass
	7025	215	be (80MHz)	MCS5	77.90	110.80	320	Pass
	6985	207	be (160MHz)	MCS5	156.47	170.74	320	Pass

Table 7-7. Conducted Bandwidth Measurements Antenna WF7b

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 39 of 260

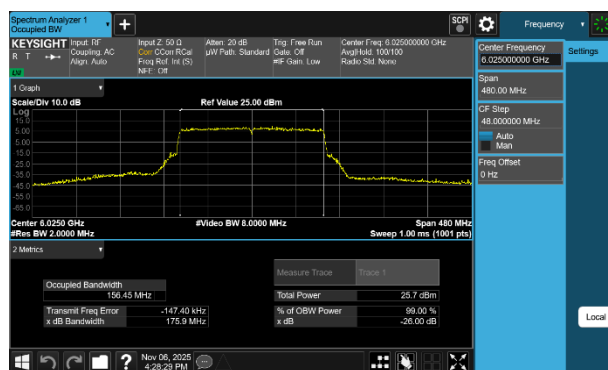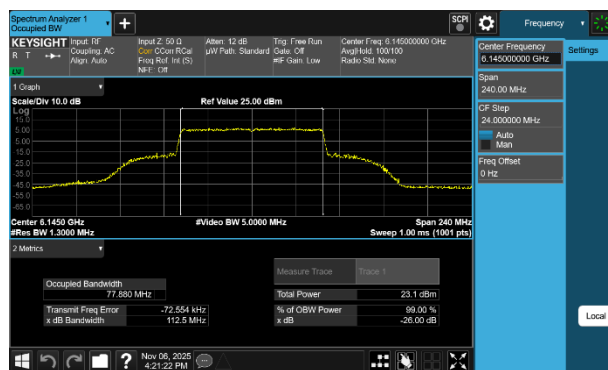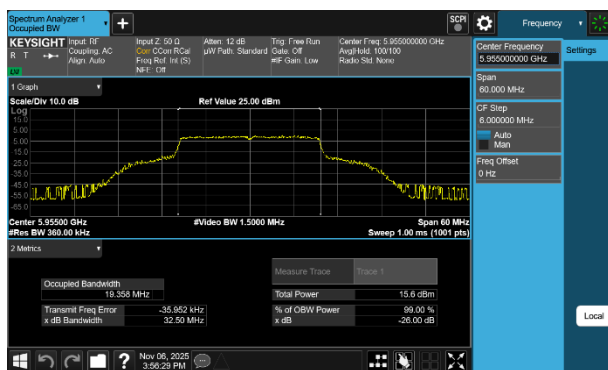

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 40 of 260

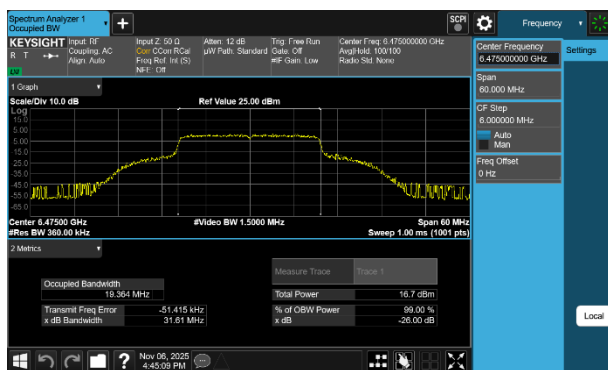


Plot 7-73 26dB BW & 99% OBW Antenna WF7b (20MHz BW 802.11be(SU) - Ch.105)



Plot 7-75 26dB BW & 99% OBW Antenna WF7b (80MHz BW 802.11be(SU) - Ch.103)




Plot 7-74 26dB BW & 99% OBW Antenna WF7b (40MHz BW 802.11be(SU) - Ch.99)

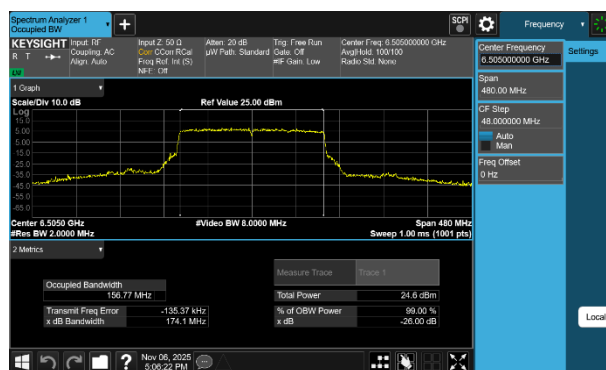


Plot 7-76 26dB BW & 99% OBW Antenna WF7b (160MHz BW 802.11be(SU) - Ch.111)


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 41 of 260

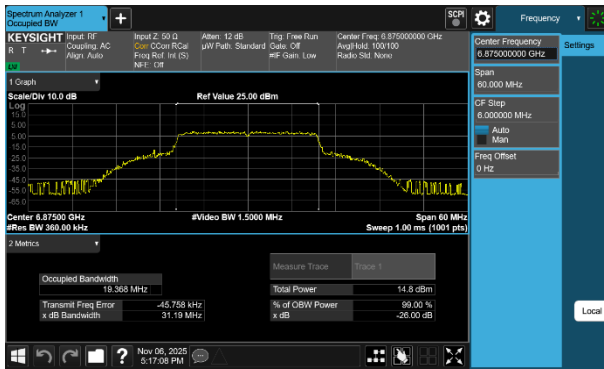


Plot 7-77 26dB BW & 99% OBW Antenna WF7b (20MHz BW 802.11be(SU) - Ch.185)

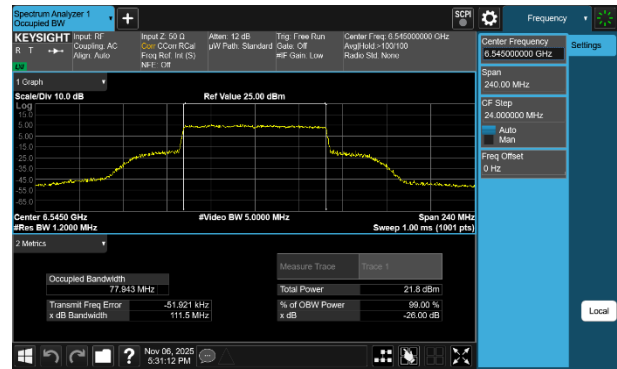


Plot 7-79 26dB BW & 99% OBW Antenna WF7b (80MHz BW 802.11be(SU) - Ch.119)

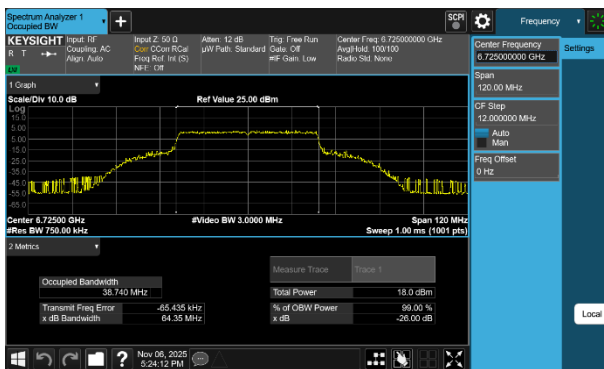

Plot 7-78 26dB BW & 99% OBW Antenna WF7b (40MHz BW 802.11be(SU) - Ch.155)

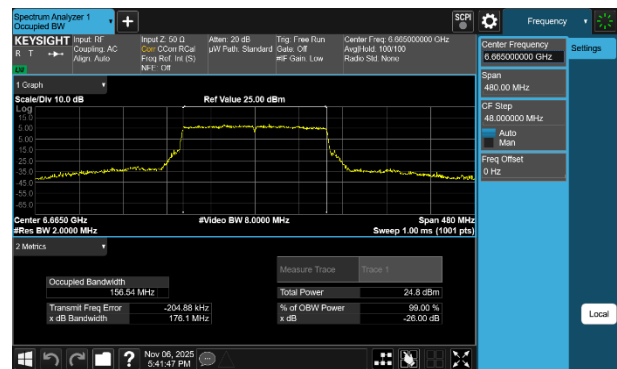


Plot 7-80 26dB BW & 99% OBW Antenna WF7b (160MHz BW 802.11be(SU) - Ch.143)

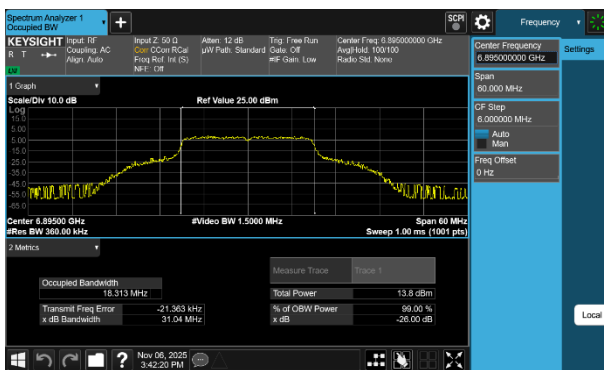


Plot 7-81 26dB BW & 99% OBW Antenna WF7b (20MHz BW 802.11a - Ch.189)



Plot 7-83 26dB BW & 99% OBW Antenna WF7b (80MHz BW 802.11be(SU) - Ch.215)

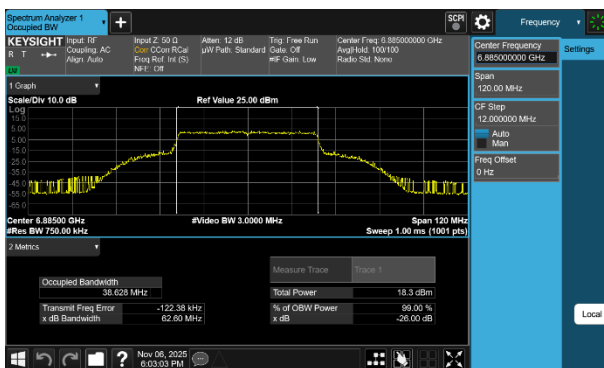

Plot 7-82 26dB BW & 99% OBW Antenna WF7b (40MHz BW 802.11be(SU) - Ch.187)

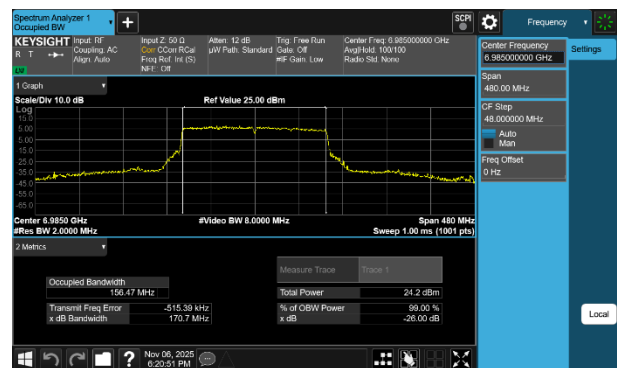

Plot 7-84 26dB BW & 99% OBW Antenna WF7b (160MHz BW 802.11be(SU) - Ch.207)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG			Page 42 of 260

7.3 Conducted Output Power and Max EIRP Measurement

§15.407(a)(7)(8), RSS-248 [4.5.3], [4.5.5]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.925 – 7.125GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm for Standard Power mode (SP), and 24dBm for Low Power Indoor mode (LPI).

Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 12.4.3.2 Method PM-G

KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 14.4 Measure-and-Sum Technique

KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 43 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.1 Antenna WF7a Conducted Output Power and Max E.I.R.P. Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	36Mbps	18.90	1.00	19.90	30.00	-10.10
	6175	45	36Mbps	18.89	1.20	20.09	30.00	-9.91
	6415	93	12Mbps	18.87	0.30	19.17	30.00	-10.83
	6435	97	12Mbps	17.88	0.50	18.38	30.00	-11.62
	6475	105	36Mbps	17.93	0.50	18.43	30.00	-11.57
	6515	113	36Mbps	17.96	0.50	18.46	30.00	-11.54
	6535	117	12Mbps	17.89	1.80	19.69	30.00	-10.31
	6695	149	12Mbps	17.94	1.80	19.74	30.00	-10.26
	6855	181	12Mbps	17.96	1.80	19.76	30.00	-10.24

Table 7-8. Antenna WF7a 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	MCS3	18.76	1.00	19.76	30.00	-10.24
	6175	45	MCS3	18.79	1.20	19.99	30.00	-10.01
	6415	93	MCS3	18.77	0.30	19.07	30.00	-10.93
	6435	97	MCS0	17.98	0.50	18.48	30.00	-11.52
	6475	105	MCS0	17.97	0.50	18.47	30.00	-11.53
	6515	113	MCS3	17.81	0.50	18.31	30.00	-11.69
	6535	117	MCS3	17.84	1.80	19.64	30.00	-10.36
	6695	149	MCS3	17.58	1.80	19.38	30.00	-10.62
	6855	181	MCS3	17.64	1.80	19.44	30.00	-10.56

Table 7-9. Antenna WF7a 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	MCS5	18.83	1.00	19.83	30.00	-10.17
	6165	43	MCS5	18.95	1.20	20.15	30.00	-9.85
	6405	91	MCS5	18.94	0.30	19.24	30.00	-10.76
	6445	99	MCS5	17.92	0.50	18.42	30.00	-11.58
	6485	107	MCS3	17.89	0.50	18.39	30.00	-11.61
	6525	115	MCS0	17.82	1.80	19.62	30.00	-10.38
	6565	123	MCS3	17.91	1.80	19.71	30.00	-10.29
	6725	155	MCS5	17.75	1.80	19.55	30.00	-10.45
	6845	179	MCS0	17.99	1.80	19.79	30.00	-10.21

Table 7-10. Antenna WF7a 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	MCS0	18.87	1.00	19.87	30.00	-10.13
	6145	39	MCS5	18.82	1.20	20.02	30.00	-9.98
	6385	87	MCS5	18.82	0.30	19.12	30.00	-10.88
	6465	103	MCS5	17.79	0.50	18.29	30.00	-11.71
	6545	119	MCS3	17.99	1.80	19.79	30.00	-10.21
	6705	151	MCS3	18.00	1.80	19.80	30.00	-10.20
	6785	167	MCS5	17.94	1.80	19.74	30.00	-10.26

Table 7-11. Antenna WF7a 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 44 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	MCS0	18.62	1.00	19.62	30.00	-10.38
	6185	47	MCS3	18.92	1.20	20.12	30.00	-9.88
	6345	79	MCS3	18.93	0.30	19.23	30.00	-10.77
	6505	111	MCS5	17.87	0.50	18.37	30.00	-11.63
	6665	143	MCS0	17.97	1.80	19.77	30.00	-10.23

Table 7-12. Antenna WF7a 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 45 of 260

V 11.0 5/2025

7.3.2 Antenna WF7a Conducted Output Power and Max E.I.R.P. Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	36Mbps	7.15	1.00	8.15	24.00	-15.85
	6175	45	6Mbps	7.72	1.20	8.92	24.00	-15.08
	6415	93	12Mbps	8.80	0.30	9.10	24.00	-14.90
	6435	97	12Mbps	8.45	0.50	8.95	24.00	-15.05
	6475	105	12Mbps	8.41	0.50	8.91	24.00	-15.09
	6515	113	12Mbps	8.50	0.50	9.00	24.00	-15.00
	6535	117	12Mbps	6.58	1.80	8.38	24.00	-15.62
	6695	149	12Mbps	6.65	1.80	8.45	24.00	-15.55
	6875	185	6Mbps	6.90	1.80	8.70	24.00	-15.31
	6895	189	12Mbps	6.69	2.20	8.89	24.00	-15.11
	6995	209	12Mbps	6.74	2.20	8.94	24.00	-15.06
	7115	233	12Mbps	6.04	2.20	8.24	24.00	-15.76

Table 7-13. Antenna WF7a 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	MCS3	7.52	1.00	8.52	24.00	-15.48
	6175	45	MCS0	7.90	1.20	9.10	24.00	-14.90
	6415	93	MCS0	9.17	0.30	9.47	24.00	-14.53
	6435	97	MCS3	8.60	0.50	9.10	24.00	-14.90
	6475	105	MCS3	8.58	0.50	9.08	24.00	-14.92
	6515	113	MCS3	8.68	0.50	9.18	24.00	-14.82
	6535	117	MCS3	6.70	1.80	8.50	24.00	-15.50
	6695	149	MCS3	6.83	1.80	8.63	24.00	-15.37
	6875	185	MCS3	7.08	1.80	8.88	24.00	-15.12
	6895	189	MCS3	7.08	2.20	9.28	24.00	-14.72
	6995	209	MCS3	6.88	2.20	9.08	24.00	-14.92
	7115	233	MCS0	6.39	2.20	8.59	24.00	-15.41

Table 7-14. Antenna WF7a 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	MCS5	10.32	1.00	11.32	24.00	-12.68
	6165	43	MCS5	10.89	1.20	12.09	24.00	-11.91
	6405	91	MCS5	11.99	0.30	12.29	24.00	-11.72
	6445	99	MCS5	11.79	0.50	12.29	24.00	-11.71
	6485	107	MCS5	11.76	0.50	12.26	24.00	-11.74
	6525	115	MCS0	9.98	1.80	11.78	24.00	-12.22
	6565	123	MCS5	9.77	1.80	11.57	24.00	-12.43
	6725	155	MCS0	9.75	1.80	11.55	24.00	-12.45
	6845	179	MCS3	9.64	1.80	11.44	24.00	-12.56
	6885	187	MCS5	10.09	2.20	12.29	24.00	-11.71
	7005	211	MCS5	10.03	2.20	12.23	24.00	-11.77
	7085	227	MCS5	10.01	2.20	12.21	24.00	-11.79

Table 7-15. Antenna WF7a 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 46 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	MCS0	13.24	1.00	14.24	24.00	-9.76
	6145	39	MCS5	13.84	1.20	15.04	24.00	-8.96
	6385	87	MCS3	14.84	0.30	15.14	24.00	-8.86
	6465	103	MCS0	14.69	0.50	15.19	24.00	-8.81
	6545	119	MCS0	12.99	1.80	14.79	24.00	-9.21
	6705	151	MCS5	12.74	1.80	14.54	24.00	-9.47
	6865	183	MCS5	12.90	1.80	14.70	24.00	-9.30
	6945	199	MCS5	12.81	2.20	15.01	24.00	-8.99
	7025	215	MCS5	12.56	2.20	14.76	24.00	-9.24

Table 7-16. Antenna WF7a 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	MCS0	16.30	1.00	17.30	24.00	-6.70
	6185	47	MCS0	16.64	1.20	17.84	24.00	-6.16
	6345	79	MCS0	17.80	0.30	18.10	24.00	-5.90
	6505	111	MCS5	15.43	0.50	15.93	24.00	-8.07
	6665	143	MCS5	15.70	1.80	17.50	24.00	-6.51
	6825	175	MCS0	15.59	1.80	17.39	24.00	-6.61
	6985	207	MCS5	15.34	2.20	17.54	24.00	-6.46

Table 7-17. Antenna WF7a 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 47 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.3 Antenna WF2a Conducted Output Power and Max E.I.R.P. Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	36Mbps	19.27	1.10	20.37	30.00	-9.63
	6175	45	36Mbps	19.30	0.80	20.10	30.00	-9.90
	6415	93	12Mbps	19.49	-0.30	19.19	30.00	-10.81
	6435	97	6Mbps	18.97	-0.40	18.57	30.00	-11.43
	6475	105	36Mbps	18.88	-0.40	18.48	30.00	-11.52
	6515	113	36Mbps	19.00	-0.40	18.60	30.00	-11.40
	6535	117	12Mbps	18.91	0.90	19.81	30.00	-10.19
	6695	149	6Mbps	18.91	0.90	19.81	30.00	-10.19
	6855	181	6Mbps	18.99	0.90	19.89	30.00	-10.11

Table 7-18. Antenna WF2a 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	MCS0	19.42	1.10	20.52	30.00	-9.48
	6175	45	MCS3	19.20	0.80	20.00	30.00	-10.00
	6415	93	MCS3	19.43	-0.30	19.13	30.00	-10.87
	6435	97	MCS3	18.69	-0.40	18.29	30.00	-11.71
	6475	105	MCS0	18.71	-0.40	18.31	30.00	-11.69
	6515	113	MCS3	18.67	-0.40	18.27	30.00	-11.73
	6535	117	MCS0	18.71	0.90	19.61	30.00	-10.39
	6695	149	MCS3	18.97	0.90	19.87	30.00	-10.13
	6855	181	MCS3	18.67	0.90	19.57	30.00	-10.43

Table 7-19. Antenna WF2a 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	MCS5	19.43	1.10	20.53	30.00	-9.47
	6165	43	MCS0	19.45	0.80	20.25	30.00	-9.75
	6405	91	MCS0	19.39	-0.30	19.09	30.00	-10.91
	6445	99	MCS5	18.67	-0.40	18.27	30.00	-11.73
	6485	107	MCS0	18.96	-0.40	18.56	30.00	-11.44
	6525	115	MCS5	18.78	0.90	19.68	30.00	-10.32
	6565	123	MCS3	18.86	0.90	19.76	30.00	-10.24
	6725	155	MCS5	18.75	0.90	19.65	30.00	-10.35
	6845	179	MCS0	18.97	0.90	19.87	30.00	-10.13

Table 7-20. Antenna WF2a 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	MCS0	19.48	1.10	20.58	30.00	-9.42
	6145	39	MCS0	19.37	0.80	20.17	30.00	-9.83
	6385	87	MCS5	19.31	-0.30	19.01	30.00	-10.99
	6465	103	MCS5	18.74	-0.40	18.34	30.00	-11.66
	6545	119	MCS0	18.64	0.90	19.54	30.00	-10.46
	6705	151	MCS0	18.88	0.90	19.78	30.00	-10.22
	6785	167	MCS5	18.60	0.90	19.50	30.00	-10.50

Table 7-21. Antenna WF2a 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 48 of 260

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	MCS0	19.49	1.10	20.59	30.00	-9.41
	6185	47	MCS0	19.41	0.80	20.21	30.00	-9.79
	6345	79	MCS3	19.41	-0.30	19.11	30.00	-10.89
	6505	111	MCS5	18.83	-0.40	18.43	30.00	-11.57
	6665	143	MCS5	18.84	0.90	19.74	30.00	-10.26

Table 7-22. Antenna WF2a 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 49 of 260

V 11.0 5/2025

7.3.4 Antenna WF2a Conducted Output Power and Max E.I.R.P. Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	12Mbps	7.36	1.10	8.46	24.00	-15.54
	6175	45	12Mbps	8.35	0.80	9.15	24.00	-14.85
	6415	93	12Mbps	9.51	-0.30	9.21	24.00	-14.79
	6435	97	6Mbps	9.38	-0.40	8.98	24.00	-15.02
	6475	105	12Mbps	9.47	-0.40	9.07	24.00	-14.94
	6515	113	6Mbps	9.41	-0.40	9.01	24.00	-14.99
	6535	117	12Mbps	8.17	0.90	9.07	24.00	-14.93
	6695	149	6Mbps	8.05	0.90	8.95	24.00	-15.05
	6875	185	6Mbps	7.94	0.90	8.84	24.00	-15.17
	6895	189	6Mbps	7.87	1.20	9.07	24.00	-14.93
	6995	209	12Mbps	7.86	1.20	9.06	24.00	-14.94
	7115	233	6Mbps	7.15	1.20	8.35	24.00	-15.65

Table 7-23. Antenna WF2a 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	MCS3	7.26	1.10	8.36	24.00	-15.64
	6175	45	MCS0	8.45	0.80	9.25	24.00	-14.75
	6415	93	MCS3	9.60	-0.30	9.30	24.00	-14.70
	6435	97	MCS0	9.39	-0.40	8.99	24.00	-15.01
	6475	105	MCS0	9.36	-0.40	8.96	24.00	-15.04
	6515	113	MCS0	9.43	-0.40	9.03	24.00	-14.97
	6535	117	MCS3	8.26	0.90	9.16	24.00	-14.84
	6695	149	MCS0	8.09	0.90	8.99	24.00	-15.01
	6875	185	MCS0	7.97	0.90	8.87	24.00	-15.13
	6895	189	MCS0	7.86	1.20	9.06	24.00	-14.94
	6995	209	MCS0	7.74	1.20	8.94	24.00	-15.06
	7115	233	MCS3	7.24	1.20	8.44	24.00	-15.56

Table 7-24. Antenna WF2a 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	MCS0	10.29	1.10	11.39	24.00	-12.61
	6165	43	MCS3	11.37	0.80	12.17	24.00	-11.83
	6405	91	MCS0	12.44	-0.30	12.14	24.00	-11.87
	6445	99	MCS5	12.57	-0.40	12.17	24.00	-11.83
	6485	107	MCS3	12.64	-0.40	12.24	24.00	-11.76
	6525	115	MCS5	11.19	0.90	12.09	24.00	-11.91
	6565	123	MCS3	11.08	0.90	11.98	24.00	-12.02
	6725	155	MCS5	11.08	0.90	11.98	24.00	-12.02
	6845	179	MCS5	10.92	0.90	11.82	24.00	-12.18
	6885	187	MCS0	11.01	1.20	12.21	24.00	-11.79
	7005	211	MCS5	10.97	1.20	12.17	24.00	-11.83
	7085	227	MCS5	11.16	1.20	12.36	24.00	-11.64

Table 7-25. Antenna WF2a 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 50 of 260

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	MCS5	13.03	1.10	14.13	24.00	-9.87
	6145	39	MCS0	14.21	0.80	15.01	24.00	-8.99
	6385	87	MCS5	15.33	-0.30	15.03	24.00	-8.97
	6465	103	MCS0	15.59	-0.40	15.19	24.00	-8.81
	6545	119	MCS0	14.39	0.90	15.29	24.00	-8.71
	6705	151	MCS0	14.13	0.90	15.03	24.00	-8.97
	6865	183	MCS0	14.14	0.90	15.04	24.00	-8.96
	6945	199	MCS5	13.91	1.20	15.11	24.00	-8.89
	7025	215	MCS0	13.83	1.20	15.03	24.00	-8.97

Table 7-26. Antenna WF2a 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	MCS5	16.00	1.10	17.10	24.00	-6.91
	6185	47	MCS0	17.27	0.80	18.07	24.00	-5.93
	6345	79	MCS0	18.14	-0.30	17.84	24.00	-6.16
	6505	111	MCS0	17.10	-0.40	16.70	24.00	-7.31
	6665	143	MCS0	17.17	0.90	18.07	24.00	-5.94
	6825	175	MCS3	16.79	0.90	17.69	24.00	-6.31
	6985	207	MCS0	16.35	1.20	17.55	24.00	-6.45

Table 7-27. Antenna WF2a 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 51 of 260

V 11.0 5/2025

7.3.5 Antenna WF7b Conducted Output Power and Max E.I.R.P. Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	36Mbps	18.87	0.50	19.37	30.00	-10.63
	6175	45	36Mbps	18.86	1.20	20.06	30.00	-9.94
	6415	93	36Mbps	18.92	0.20	19.12	30.00	-10.88
	6435	97	36Mbps	17.94	-0.20	17.74	30.00	-12.26
	6475	105	36Mbps	17.94	-0.20	17.74	30.00	-12.26
	6515	113	6Mbps	17.95	-0.20	17.75	30.00	-12.25
	6535	117	36Mbps	17.89	2.30	20.19	30.00	-9.81
	6695	149	6Mbps	17.94	2.30	20.24	30.00	-9.76
	6855	181	6Mbps	17.97	2.30	20.27	30.00	-9.73

Table 7-28. Antenna WF7b 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	MCS3	18.96	0.50	19.46	30.00	-10.54
	6175	45	MCS3	18.95	1.20	20.15	30.00	-9.85
	6415	93	MCS0	18.99	0.20	19.19	30.00	-10.81
	6435	97	MCS5	17.96	-0.20	17.76	30.00	-12.24
	6475	105	MCS5	17.95	-0.20	17.75	30.00	-12.25
	6515	113	MCS3	17.97	-0.20	17.77	30.00	-12.23
	6535	117	MCS3	18.00	2.30	20.30	30.00	-9.70
	6695	149	MCS3	17.93	2.30	20.23	30.00	-9.77
	6855	181	MCS3	17.89	2.30	20.19	30.00	-9.81

Table 7-29. Antenna WF7b 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	MCS0	18.96	0.50	19.46	30.00	-10.54
	6165	43	MCS5	18.70	1.20	19.90	30.00	-10.10
	6405	91	MCS5	18.99	0.20	19.19	30.00	-10.81
	6445	99	MCS5	17.91	-0.20	17.71	30.00	-12.29
	6485	107	MCS3	17.82	-0.20	17.62	30.00	-12.38
	6525	115	MCS3	17.81	2.30	20.11	30.00	-9.89
	6565	123	MCS5	17.72	2.30	20.02	30.00	-9.98
	6725	155	MCS5	17.87	2.30	20.17	30.00	-9.83
	6845	179	MCS5	17.94	2.30	20.24	30.00	-9.76

Table 7-30. Antenna WF7b 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	MCS0	18.77	0.50	19.27	30.00	-10.73
	6145	39	MCS5	18.76	1.20	19.96	30.00	-10.04
	6385	87	MCS5	18.98	0.20	19.18	30.00	-10.82
	6465	103	MCS5	17.99	-0.20	17.79	30.00	-12.21
	6545	119	MCS5	17.89	2.30	20.19	30.00	-9.81
	6705	151	MCS5	17.75	2.30	20.05	30.00	-9.95
	6785	167	MCS5	17.96	2.30	20.26	30.00	-9.74

Table 7-31. Antenna WF7b 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 52 of 260

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	MCS3	18.61	0.50	19.11	30.00	-10.89
	6185	47	MCS3	18.97	1.20	20.17	30.00	-9.83
	6345	79	MCS3	18.86	0.20	19.06	30.00	-10.94
	6505	111	MCS5	17.99	-0.20	17.79	30.00	-12.21
	6665	143	MCS5	17.78	2.30	20.08	30.00	-9.92

Table 7-32. Antenna WF7b 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 53 of 260

V 11.0 5/2025

7.3.6 Antenna WF7b Conducted Output Power and Max E.I.R.P. Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	12Mbps	7.13	0.50	7.63	24.00	-16.37
	6175	45	12Mbps	7.86	1.20	9.06	24.00	-14.94
	6415	93	12Mbps	8.72	0.20	8.92	24.00	-15.08
	6435	97	6Mbps	8.58	-0.20	8.38	24.00	-15.62
	6475	105	12Mbps	8.47	-0.20	8.27	24.00	-15.73
	6515	113	12Mbps	8.38	-0.20	8.18	24.00	-15.83
	6535	117	12Mbps	6.67	2.30	8.97	24.00	-15.03
	6695	149	6Mbps	6.70	2.30	9.00	24.00	-15.00
	6875	185	6Mbps	6.86	2.30	9.16	24.00	-14.84
	6895	189	12Mbps	6.72	1.30	8.02	24.00	-15.98
	6995	209	36Mbps	6.67	1.30	7.97	24.00	-16.03
	7115	233	12Mbps	6.07	1.30	7.37	24.00	-16.63

Table 7-33. Antenna WF7b 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5955	1	MCS3	7.52	0.50	8.02	24.00	-15.98
	6175	45	MCS3	7.76	1.20	8.96	24.00	-15.04
	6415	93	MCS3	9.08	0.20	9.28	24.00	-14.72
	6435	97	MCS3	8.72	-0.20	8.52	24.00	-15.48
	6475	105	MCS0	8.79	-0.20	8.59	24.00	-15.41
	6515	113	MCS3	8.55	-0.20	8.35	24.00	-15.65
	6535	117	MCS3	6.78	2.30	9.08	24.00	-14.92
	6695	149	MCS3	6.89	2.30	9.19	24.00	-14.81
	6875	185	MCS3	7.02	2.30	9.32	24.00	-14.68
	6895	189	MCS3	7.05	1.30	8.35	24.00	-15.66
	6995	209	MCS3	7.00	1.30	8.30	24.00	-15.70
	7115	233	MCS3	6.19	1.30	7.49	24.00	-16.51

Table 7-34. Antenna WF7b 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	MCS5	10.29	0.50	10.79	24.00	-13.22
	6165	43	MCS5	10.68	1.20	11.88	24.00	-12.12
	6405	91	MCS5	11.87	0.20	12.07	24.00	-11.93
	6445	99	MCS5	11.78	-0.20	11.58	24.00	-12.42
	6485	107	MCS5	11.77	-0.20	11.57	24.00	-12.43
	6525	115	MCS3	9.83	2.30	12.13	24.00	-11.87
	6565	123	MCS5	9.66	2.30	11.96	24.00	-12.04
	6725	155	MCS3	9.76	2.30	12.06	24.00	-11.94
	6845	179	MCS5	9.67	2.30	11.97	24.00	-12.03
	6885	187	MCS5	9.99	1.30	11.29	24.00	-12.71
	7005	211	MCS5	10.02	1.30	11.32	24.00	-12.68
	7085	227	MCS5	9.86	1.30	11.16	24.00	-12.84

Table 7-35. Antenna WF7b 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 54 of 260

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	MCS0	13.49	0.50	13.99	24.00	-10.01
	6145	39	MCS0	14.00	1.20	15.20	24.00	-8.80
	6385	87	MCS5	14.81	0.20	15.01	24.00	-8.99
	6465	103	MCS5	14.62	-0.20	14.42	24.00	-9.58
	6545	119	MCS5	12.96	2.30	15.26	24.00	-8.75
	6705	151	MCS5	12.65	2.30	14.95	24.00	-9.05
	6865	183	MCS5	12.78	2.30	15.08	24.00	-8.92
	6945	199	MCS5	12.62	1.30	13.92	24.00	-10.08
	7025	215	MCS0	12.73	1.30	14.03	24.00	-9.98

Table 7-36. Antenna WF7b 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Data Rate	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	MCS0	16.46	0.50	16.96	24.00	-7.04
	6185	47	MCS0	16.57	1.20	17.77	24.00	-6.23
	6345	79	MCS3	17.74	0.20	17.94	24.00	-6.06
	6505	111	MCS5	15.40	-0.20	15.20	24.00	-8.80
	6665	143	MCS0	15.75	2.30	18.05	24.00	-5.95
	6825	175	MCS0	15.47	2.30	17.77	24.00	-6.23
	6985	207	MCS5	15.47	1.30	16.77	24.00	-7.23

Table 7-37. Antenna WF7b 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 55 of 260

V 11.0 5/2025

7.3.7 CDD Primary Conducted Output Power and Max E.I.R.P. Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF7a	Antenna WF2a	Summed				
	5955	1	CDD	36Mbps	18.96	18.97	21.98	1.10	23.08	30.00	-6.92
	6175	45	CDD	36Mbps	18.98	18.67	21.84	1.20	23.04	30.00	-6.96
	6415	93	CDD	36Mbps	18.97	18.59	21.80	0.30	22.10	30.00	-7.90
	6435	97	CDD	36Mbps	17.77	17.76	20.78	0.50	21.28	30.00	-8.72
	6475	105	CDD	6Mbps	17.81	17.77	20.80	0.50	21.30	30.00	-8.70
	6515	113	CDD	12Mbps	17.67	17.98	20.84	0.50	21.34	30.00	-8.66
	6535	117	CDD	36Mbps	17.83	17.89	20.87	1.80	22.67	30.00	-7.33
	6695	149	CDD	36Mbps	17.83	17.73	20.79	1.80	22.59	30.00	-7.41
	6855	181	CDD	6Mbps	17.66	17.98	20.84	1.80	22.64	30.00	-7.36

Table 7-38. CDD Primary 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF7a	Antenna WF2a	Summed				
	5955	1	CDD	MCS0	18.97	18.96	21.98	1.10	23.08	30.00	-6.92
	6175	45	CDD	MCS3	18.99	18.88	21.95	1.20	23.15	30.00	-6.85
	6415	93	CDD	MCS0	19.00	18.81	21.92	0.30	22.22	30.00	-7.78
	6435	97	CDD	MCS5	17.97	17.86	20.92	0.50	21.42	30.00	-8.58
	6475	105	CDD	MCS5	17.95	17.95	20.96	0.50	21.46	30.00	-8.54
	6515	113	CDD	MCS0	17.74	17.88	20.82	0.50	21.32	30.00	-8.68
	6535	117	CDD	MCS5	17.80	17.98	20.91	1.80	22.71	30.00	-7.29
	6695	149	CDD	MCS0	17.55	17.89	20.73	1.80	22.53	30.00	-7.47
	6855	181	CDD	MCS3	17.62	17.87	20.76	1.80	22.56	30.00	-7.44

Table 7-39. CDD Primary 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF7a	Antenna WF2a	Summed				
	5965	3	CDD	AVG	18.75	18.90	21.84	1.10	22.94	30.00	-7.06
	6165	43	CDD	AVG	18.57	18.91	21.75	1.20	22.95	30.00	-7.05
	6405	91	CDD	AVG	18.57	18.55	21.57	0.30	21.87	30.00	-8.13
	6445	99	CDD	AVG	17.57	17.99	20.79	0.50	21.29	30.00	-8.71
	6485	107	CDD	AVG	17.55	17.70	20.63	0.50	21.13	30.00	-8.87
	6525	115	CDD	AVG	17.63	17.84	20.75	1.80	22.55	30.00	-7.45
	6565	123	CDD	AVG	17.80	17.66	20.75	1.80	22.55	30.00	-7.45
	6725	155	CDD	AVG	17.63	17.94	20.80	1.80	22.60	30.00	-7.40
	6845	179	CDD	AVG	17.51	17.62	20.58	1.80	22.38	30.00	-7.62

Table 7-40. CDD Primary 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF7a	Antenna WF2a	Summed				
	5985	7	CDD	MCS0	18.63	18.63	21.64	1.10	22.74	30.00	-7.26
	6145	39	CDD	MCS5	18.61	18.67	21.65	1.20	22.85	30.00	-7.15
	6385	87	CDD	MCS5	18.55	18.67	21.62	0.50	22.12	30.00	-7.88
	6465	103	CDD	MCS5	17.82	17.94	20.89	1.80	22.69	30.00	-7.31
	6545	119	CDD	MCS0	17.51	17.74	20.64	1.80	22.44	30.00	-7.56
	6705	151	CDD	MCS0	17.74	17.72	20.74	1.80	22.54	30.00	-7.46
	6785	167	CDD	MCS5	17.71	17.61	20.67	1.80	22.47	30.00	-7.53

Table 7-41. CDD Primary 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF7a	Antenna WF2a	Summed				
	6025	15	CDD	MCS0	18.87	18.65	21.77	1.20	22.97	30.00	-7.03
	6185	47	CDD	MCS5	18.80	18.69	21.76	0.30	22.06	30.00	-7.94
	6345	79	CDD	MCS5	18.63	18.69	21.67	0.50	22.17	30.00	-7.83
	6505	111	CDD	MCS0	17.88	17.85	20.88	1.80	22.68	30.00	-7.32
	6665	143	CDD	MCS3	17.65	17.95	20.81	1.80	22.61	30.00	-7.39

Table 7-42. CDD Primary 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 56 of 260

7.3.8 CDD/SDM Primary Conducted Output Power and Max E.I.R.P. Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF7a	Antenna WF2a	Summed				
	5955	1	CDD	12Mbps	1.17	0.98	4.09	1.10	5.19	24.00	-18.81
	6175	45	CDD	6Mbps	1.91	1.96	4.95	1.20	6.15	24.00	-17.85
	6415	93	CDD	12Mbps	3.07	2.97	6.03	0.30	6.33	24.00	-17.67
	6435	97	CDD	12Mbps	2.91	2.88	5.91	0.50	6.41	24.00	-17.59
	6475	105	CDD	12Mbps	2.90	2.85	5.89	0.50	6.39	24.00	-17.61
	6515	113	CDD	12Mbps	2.97	2.95	5.97	0.50	6.47	24.00	-17.53
	6535	117	CDD	6Mbps	0.93	1.29	4.12	1.80	5.92	24.00	-18.08
	6695	149	CDD	12Mbps	1.24	0.85	4.06	1.80	5.86	24.00	-18.14
	6875	185	CDD	12Mbps	1.20	1.28	4.25	1.80	6.05	24.00	-17.95
	6895	189	CDD	6Mbps	1.11	0.74	3.94	2.20	6.14	24.00	-17.86
	6995	209	CDD	12Mbps	1.14	0.99	4.08	2.20	6.28	24.00	-17.72
	7115	233	CDD	6Mbps	0.41	0.46	3.44	2.20	5.64	24.00	-18.36

Table 7-43. SDM Primary 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF7a	Antenna WF2a	Summed				
	5955	1	SDM	MCS0	4.21	4.21	7.22	1.05	8.27	24.00	-15.73
	6175	45	SDM	MCS0	5.12	5.01	8.08	1.00	9.08	24.00	-14.92
	6415	93	SDM	MCS0	6.14	6.37	9.27	0.01	9.28	24.00	-14.72
	6435	97	SDM	MCS0	5.82	5.90	8.87	0.07	8.94	24.00	-15.06
	6475	105	SDM	MCS0	5.79	5.85	8.83	0.07	8.90	24.00	-15.10
	6515	113	SDM	MCS0	5.88	5.99	8.94	0.07	9.01	24.00	-14.99
	6535	117	SDM	MCS0	4.44	4.29	7.38	1.37	8.75	24.00	-15.25
	6695	149	SDM	MCS3	4.33	4.34	7.35	1.37	8.72	24.00	-15.28
	6875	185	SDM	MCS0	4.59	4.52	7.56	1.37	8.93	24.00	-15.07
	6895	189	SDM	MCS0	4.35	4.20	7.29	1.73	9.02	24.00	-14.98
	6995	209	SDM	MCS3	4.08	4.27	7.19	1.73	8.92	24.00	-15.08
	7115	233	SDM	MCS0	3.46	3.47	6.48	1.73	8.21	24.00	-15.79

Table 7-44. SDM Primary 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF7a	Antenna WF2a	Summed				
	5965	3	SDM	MCS5	7.14	7.22	10.19	1.05	11.24	24.00	-12.76
	6165	43	SDM	MCS5	7.92	8.01	10.98	1.00	11.98	24.00	-12.02
	6405	91	SDM	MCS5	8.98	9.08	12.04	0.01	12.05	24.00	-11.95
	6445	99	SDM	MCS3	9.00	9.17	12.10	0.07	12.17	24.00	-11.83
	6485	107	SDM	MCS5	8.99	8.90	11.96	0.07	12.03	24.00	-11.97
	6525	115	SDM	MCS0	7.41	7.53	10.48	1.37	11.85	24.00	-12.15
	6565	123	SDM	MCS0	7.27	7.17	10.23	1.37	11.60	24.00	-12.40
	6725	155	SDM	MCS5	7.24	7.14	10.20	1.37	11.57	24.00	-12.43
	6845	179	SDM	MCS5	7.19	7.07	10.14	1.37	11.51	24.00	-12.49
	6885	187	SDM	MCS5	7.35	7.50	10.44	1.73	12.17	24.00	-11.83
	7005	211	SDM	MCS5	7.34	7.28	10.32	1.73	12.05	24.00	-11.95
	7085	227	SDM	MCS5	7.31	7.21	10.27	1.73	12.00	24.00	-12.00

Table 7-45. SDM Primary 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF7a	Antenna WF2a	Summed				
	5985	7	SDM	MCS0	10.10	9.93	13.03	1.05	14.08	24.00	-9.92
	6145	39	SDM	MCS5	10.94	10.81	13.89	1.00	14.89	24.00	-9.11
	6385	87	SDM	MCS5	11.99	12.03	15.02	0.01	15.03	24.00	-8.97
	6465	103	SDM	MCS0	12.03	12.03	15.04	0.07	15.11	24.00	-8.89
	6545	119	SDM	MCS5	10.58	10.42	13.51	1.37	14.88	24.00	-9.12
	6705	151	SDM	MCS5	10.31	10.25	13.29	1.37	14.66	24.00	-9.34
	6865	183	SDM	MCS3	10.26	10.47	13.38	1.37	14.75	24.00	-9.25
	6945	199	SDM	MCS5	10.22	10.20	13.22	1.73	14.95	24.00	-9.05
	7025	215	SDM	MCS5	10.16	10.08	13.13	1.73	14.86	24.00	-9.14

Table 7-46. SDM Primary 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 57 of 260

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF7a	Antenna WF2a	Summed				
	6025	15	SDM	MCS5	12.96	12.98	15.98	1.05	17.03	24.00	-6.97
	6185	47	SDM	MCS5	13.58	13.78	16.69	1.00	17.69	24.00	-6.31
	6345	79	SDM	MCS0	14.76	14.86	17.82	0.01	17.83	24.00	-6.17
	6505	111	SDM	MCS5	12.92	13.17	16.06	0.07	16.13	24.00	-7.87
	6665	143	SDM	MCS5	13.17	13.18	16.19	1.37	17.56	24.00	-6.44
	6825	175	SDM	MCS5	12.90	12.92	15.92	1.37	17.29	24.00	-6.71
	6985	207	SDM	MCS5	12.85	12.86	15.86	1.73	17.59	24.00	-6.41

Table 7-47. SDM Primary 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 58 of 260

V 11.0 5/2025

7.3.9 CDD Diversity Conducted Output Power and Max E.I.R.P. Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF2a	Antenna WF7b	Summed				
	5955	1	CDD	36Mbps	18.97	18.90	21.95	1.10	23.05	30.00	-6.95
	6175	45	CDD	6Mbps	18.93	18.74	21.85	1.20	23.05	30.00	-6.95
	6415	93	CDD	12Mbps	18.93	18.87	21.91	0.20	22.11	30.00	-7.89
	6435	97	CDD	36Mbps	17.76	17.94	20.86	-0.20	20.66	30.00	-9.34
	6475	105	CDD	12Mbps	17.92	17.60	20.78	-0.20	20.58	30.00	-9.42
	6515	113	CDD	6Mbps	17.77	17.94	20.87	-0.20	20.67	30.00	-9.33
	6535	117	CDD	12Mbps	17.68	17.83	20.77	2.30	23.07	30.00	-6.93
	6695	149	CDD	6Mbps	17.89	17.71	20.81	2.30	23.11	30.00	-6.89
	6855	181	CDD	6Mbps	17.98	17.97	20.98	2.30	23.28	30.00	-6.72

Table 7-48. CDD Diversity 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF2a	Antenna WF7b	Summed				
	5955	1	CDD	MCS0	18.96	18.71	21.85	1.10	22.95	30.00	-7.05
	6175	45	CDD	MCS0	18.86	18.71	21.80	1.20	23.00	30.00	-7.00
	6415	93	CDD	MCS5	18.79	18.95	21.88	0.20	22.08	30.00	-7.92
	6435	97	CDD	MCS5	17.86	17.96	20.92	-0.20	20.72	30.00	-9.28
	6475	105	CDD	MCS5	17.95	17.95	20.96	-0.20	20.76	30.00	-9.24
	6515	113	CDD	MCS0	17.88	17.95	20.92	-0.20	20.72	30.00	-9.28
	6535	117	CDD	MCS5	17.98	17.93	20.97	2.30	23.27	30.00	-6.73
	6695	149	CDD	MCS0	17.89	17.91	20.91	2.30	23.21	30.00	-6.79
	6855	181	CDD	MCS3	17.87	17.89	20.89	2.30	23.19	30.00	-6.81

Table 7-49. CDD Diversity 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF2a	Antenna WF7b	Summed				
	5965	3	CDD	MCS0	18.90	18.98	21.95	1.10	23.05	30.00	-6.95
	6165	43	CDD	MCS3	18.95	18.68	21.83	1.20	23.03	30.00	-6.97
	6405	91	CDD	MCS3	18.69	18.99	21.85	0.20	22.05	30.00	-7.95
	6445	99	CDD	MCS0	17.99	17.79	20.90	-0.20	20.70	30.00	-9.30
	6485	107	CDD	MCS5	17.91	17.90	20.91	-0.20	20.71	30.00	-9.29
	6525	115	CDD	MCS0	17.84	17.79	20.83	2.30	23.13	30.00	-6.87
	6565	123	CDD	MCS0	17.66	17.62	20.65	2.30	22.95	30.00	-7.05
	6725	155	CDD	MCS0	17.94	17.81	20.88	2.30	23.18	30.00	-6.82
	6845	179	CDD	MCS0	17.62	17.90	20.77	2.30	23.07	30.00	-6.93

Table 7-50. CDD Diversity 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF2a	Antenna WF7b	Summed				
	5985	7	CDD	MCS0	18.63	18.87	21.76	1.10	22.86	30.00	-7.14
	6145	39	CDD	MCS5	18.67	18.74	21.72	1.20	22.92	30.00	-7.08
	6385	87	CDD	MCS5	18.67	19.00	21.85	0.20	22.05	30.00	-7.95
	6465	103	CDD	MCS5	17.94	17.97	20.97	-0.20	20.77	30.00	-9.23
	6545	119	CDD	MCS0	17.74	17.84	20.80	2.30	23.10	30.00	-6.90
	6705	151	CDD	MCS0	17.72	17.70	20.72	2.30	23.02	30.00	-6.98
	6785	167	CDD	MCS5	17.61	17.90	20.77	2.30	23.07	30.00	-6.93

Table 7-51. CDD Diversity 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF2a	Antenna WF7b	Summed				
	6025	15	CDD	MCS0	18.65	18.95	21.82	1.10	22.92	30.00	-7.08
	6185	47	CDD	MCS5	18.69	18.68	21.69	1.20	22.89	30.00	-7.11
	6345	79	CDD	MCS3	18.66	18.87	21.78	0.20	21.98	30.00	-8.02
	6505	111	CDD	MCS0	17.85	17.91	20.89	-0.20	20.69	30.00	-9.31
	6665	143	CDD	MCS3	17.95	17.85	20.91	2.30	23.21	30.00	-6.79

Table 7-52. CDD Diversity 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 59 of 260

7.3.10 CDD/SDM Diversity Conducted Output Power and Max E.I.R.P. Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF2a	Antenna WF7b	Summed				
	5955	1	CDD	6Mbps	1.01	0.98	4.00	1.10	5.10	24.00	-18.90
	6175	45	CDD	6Mbps	1.96	1.85	4.92	1.20	6.12	24.00	-17.88
	6415	93	CDD	12Mbps	2.97	2.99	5.99	0.20	6.19	24.00	-17.81
	6435	97	CDD	12Mbps	2.88	2.88	5.89	-0.20	5.69	24.00	-18.31
	6475	105	CDD	12Mbps	2.85	2.97	5.92	-0.20	5.72	24.00	-18.28
	6515	113	CDD	12Mbps	2.95	2.92	5.95	-0.20	5.75	24.00	-18.25
	6535	117	CDD	12Mbps	1.24	1.30	4.28	2.30	6.58	24.00	-17.42
	6695	149	CDD	6Mbps	1.06	0.83	3.96	2.30	6.26	24.00	-17.74
	6875	185	CDD	12Mbps	1.28	0.95	4.13	2.30	6.43	24.00	-17.57
	6895	189	CDD	36Mbps	1.12	1.20	4.17	1.30	5.47	24.00	-18.53
	6995	209	CDD	12Mbps	0.99	1.08	4.05	1.30	5.35	24.00	-18.65
	7115	233	CDD	6Mbps	0.46	0.28	3.38	1.30	4.68	24.00	-19.32

Table 7-53. CDD Diversity 20MHz BW 802.11a (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF2a	Antenna WF7b	Summed				
	5955	1	SDM	MCS0	4.21	4.39	7.31	0.81	8.12	24.00	-15.88
	6175	45	SDM	MCS5	4.97	4.95	7.97	1.00	8.97	24.00	-15.03
	6415	93	SDM	MCS0	6.37	6.34	9.36	-0.04	9.32	24.00	-14.68
	6435	97	SDM	MCS0	5.90	6.06	8.99	-0.30	8.69	24.00	-15.31
	6475	105	SDM	MCS0	5.85	5.95	8.91	-0.30	8.61	24.00	-15.39
	6515	113	SDM	MCS0	5.99	5.86	8.94	-0.30	8.64	24.00	-15.36
	6535	117	SDM	MCS0	4.29	4.31	7.31	1.66	8.97	24.00	-15.03
	6695	149	SDM	MCS3	4.34	4.37	7.37	1.66	9.03	24.00	-14.97
	6875	185	SDM	MCS3	4.54	4.50	7.53	1.66	9.19	24.00	-14.81
	6895	189	SDM	MCS0	4.20	4.26	7.24	1.25	8.49	24.00	-15.51
	6995	209	SDM	MCS3	4.27	4.23	7.26	1.25	8.51	24.00	-15.49
	7115	233	SDM	MCS0	3.47	3.66	6.58	1.25	7.83	24.00	-16.17

Table 7-54. SDM Diversity 20MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF2a	Antenna WF7b	Summed				
	5965	3	SDM	MCS5	7.22	7.05	10.15	0.81	10.96	24.00	-13.04
	6165	43	SDM	MCS5	8.01	7.87	10.95	1.00	11.95	24.00	-12.05
	6405	91	SDM	MCS0	8.99	9.19	12.10	-0.04	12.06	24.00	-11.94
	6445	99	SDM	MCS3	9.17	8.85	12.02	-0.30	11.72	24.00	-12.28
	6485	107	SDM	MCS3	8.88	8.93	11.92	-0.30	11.62	24.00	-12.38
	6525	115	SDM	MCS5	7.56	7.43	10.51	1.66	12.17	24.00	-11.83
	6565	123	SDM	MCS5	7.24	7.08	10.17	1.66	11.83	24.00	-12.17
	6725	155	SDM	MCS3	7.09	7.28	10.20	1.66	11.86	24.00	-12.14
	6845	179	SDM	MCS0	6.99	7.23	10.12	1.66	11.78	24.00	-12.22
	6885	187	SDM	MCS5	7.50	7.11	10.32	1.25	11.57	24.00	-12.43
	7005	211	SDM	MCS3	7.24	7.28	10.27	1.25	11.52	24.00	-12.48
	7085	227	SDM	MCS3	7.15	7.39	10.28	1.25	11.53	24.00	-12.47

Table 7-55. SDM Diversity 40MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF2a	Antenna WF7b	Summed				
	5985	7	SDM	MCS0	9.93	10.09	13.02	0.81	13.83	24.00	-10.17
	6145	39	SDM	MCS5	10.81	11.07	13.95	1.00	14.95	24.00	-9.05
	6385	87	SDM	MCS0	12.00	12.03	15.02	-0.04	14.98	24.00	-9.02
	6465	103	SDM	MCS0	12.03	12.03	15.04	-0.30	14.74	24.00	-9.26
	6545	119	SDM	MCS0	10.43	10.59	13.52	1.66	15.18	24.00	-8.82
	6705	151	SDM	MCS5	10.25	10.47	13.37	1.66	15.03	24.00	-8.97
	6865	183	SDM	MCS0	10.49	10.35	13.43	1.66	15.09	24.00	-8.91
	6945	199	SDM	MCS5	10.20	10.25	13.24	1.25	14.49	24.00	-9.51
	7025	215	SDM	MCS5	10.08	10.17	13.13	1.25	14.38	24.00	-9.62

Table 7-56. SDM Diversity 80MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Data Rate	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna WF2a	Antenna WF7b	Summed				
	6025	15	SDM	MCS5	12.98	13.17	16.08	0.81	16.89	24.00	-7.11
	6185	47	SDM	MCS5	13.78	13.53	16.67	1.00	17.67	24.00	-6.33
	6345	79	SDM	MCS0	14.86	14.58	17.73	-0.04	17.69	24.00	-6.31
	6505	111	SDM	MCS5	13.17	13.09	16.14	-0.30	15.84	24.00	-8.16
	6665	143	SDM	MCS5	13.18	13.24	16.22	1.66	17.88	24.00	-6.12
	6825	175	SDM	MCS5	12.92	12.98	15.96	1.66	17.62	24.00	-6.38
	6985	207	SDM	MCS5	12.86	12.98	15.93	1.25	17.18	24.00	-6.82

Table 7-57. SDM Diversity 160MHz BW 802.11be(SU) (UNII) Maximum Conducted Output Power and Max E.I.R.P.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 60 of 260

Note:

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 662911 v02r01 Section E)1), the conducted powers at Antenna WF7a and Antenna WF2a were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Subclause 14.6.3, the correlated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = G_{ANT} + \text{Array Gain dBi}$$

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Subclause 14.6.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log [(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample SDM Calculation:

At 5955MHz in 802.11be (20MHz BW) mode, the average conducted output power was measured to be 4.21 dBm for Antenna WF7a and 4.21 dBm for Antenna WF2a.

$$\text{Antenna WF7a} + \text{Antenna WF2a} = \text{SDM}$$

$$(4.21\text{dBm} + 4.21 \text{ dBm}) = (2.636\text{mW} + 2.636\text{mW}) = 5.272 \text{ mW} = 7.22 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 5955MHz in 802.11be (20MHz BW), SDM mode, the average SDM conducted power was calculated to be 7.22 dBm with directional gain of 1.05 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$7.22 \text{ dBm} + 1.05 \text{ dBi} = 8.27 \text{ dBm}$$

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 61 of 260

V 11.0 5/2025

7.4 Maximum Power Spectral Density

§15.407(a)(7)(8), RSS-248 [4.5.3], [4.5.5]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.925 – 7.125GHz band, the maximum permissible power spectral density must not exceed -1dBm e.i.r.p. in any 1-megahertz band for Low Power Indoor operating modes.

In the 5.925 – 6.875GHz bands, the maximum permissible power spectral density must not exceed 17dBm e.i.r.p. in any 1-megahertz band for Standard Power operating modes.

Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 12.4.2.2

KDB 789033 D02 v02r01 – Section F

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 14.5.2.2 Measure-and-Sum Technique

KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Set span to encompass the entire 99% OBW of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. All data rates and channels were investigated, and tabular data has been reported. Only the worst-case plot was reported.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 62 of 260

V 11.0 5/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.1 Antenna WF7a Power Spectral Density Measurements – SP


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5955	1	a	36Mbps	7.01	1.00	8.01	17	-8.99
	6175	45	a	36Mbps	7.30	1.20	8.50	17	-8.50
	6415	93	a	12Mbps	7.34	0.30	7.64	17	-9.36
	5955	1	be (20MHz)	MCS0	6.53	1.00	7.53	17	-9.47
	6175	45	be (20MHz)	MCS0	6.92	1.20	8.12	17	-8.88
	6415	93	be (20MHz)	MCS0	6.96	0.30	7.26	17	-9.75
	5965	3	be (40MHz)	MCS5	3.67	1.00	4.67	17	-12.33
	6165	43	be (40MHz)	MCS5	4.12	1.20	5.32	17	-11.68
	6405	91	be (40MHz)	MCS5	4.18	0.30	4.48	17	-12.52
	5985	7	be (80MHz)	MCS5	0.99	1.00	1.99	17	-15.01
	6145	39	be (80MHz)	MCS0	0.85	1.20	2.05	17	-14.95
	6385	87	be (80MHz)	MCS5	1.15	0.30	1.45	17	-15.55
	6025	15	be (160MHz)	MCS5	-2.06	1.00	-1.06	17	-18.06
	6185	47	be (160MHz)	MCS3	-1.61	1.20	-0.41	17	-17.41
Band 6	6345	79	be (160MHz)	MCS3	-1.45	0.30	-1.15	17	-18.15
	6435	97	a	12Mbps	6.28	0.50	6.78	17	-10.22
	6475	105	a	36Mbps	6.27	0.50	6.77	17	-10.23
	6515	113	a	36Mbps	6.31	0.50	6.81	17	-10.19
	6435	97	be (20MHz)	MCS0	6.17	0.50	6.67	17	-10.33
	6475	105	be (20MHz)	MCS0	6.13	0.50	6.63	17	-10.37
	6515	113	be (20MHz)	MCS3	5.92	0.50	6.42	17	-10.58
	6445	99	be (40MHz)	MCS5	3.05	0.50	3.55	17	-13.45
	6485	107	be (40MHz)	MCS3	3.08	0.50	3.58	17	-13.42
	6525	115	be (40MHz)	MCS0	2.89	0.50	3.39	17	-13.61
	6465	103	be (80MHz)	MCS5	-0.16	0.50	0.34	17	-16.66
	6505	111	be (160MHz)	MCS5	-2.70	0.50	-2.20	17	-19.20
	6535	117	a	12Mbps	6.13	1.80	7.93	17	-9.07
	6695	149	a	6Mbps	6.53	1.80	8.33	17	-8.67
Band 7	6855	181	a	12Mbps	6.05	1.80	7.85	17	-9.15
	6535	117	be (20MHz)	MCS3	5.84	1.80	7.64	17	-9.36
	6695	149	be (20MHz)	MCS3	5.91	1.80	7.71	17	-9.29
	6855	181	be (20MHz)	MCS3	5.50	1.80	7.30	17	-9.70
	6725	155	be (40MHz)	MCS5	3.04	1.80	4.84	17	-12.16
	6845	179	be (40MHz)	MCS0	2.85	1.80	4.65	17	-12.35
	6545	119	be (80MHz)	MCS0	-0.02	1.80	1.78	17	-15.22
	6705	151	be (80MHz)	MCS0	0.39	1.80	2.19	17	-14.81
	6785	167	be (80MHz)	MCS0	-0.05	1.80	1.75	17	-15.25
	6665	143	be (160MHz)	MCS5	-2.57	1.80	-0.77	17	-17.77

Table 7-58. Power Spectral Density Measurements Antenna WF7a

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 63 of 260

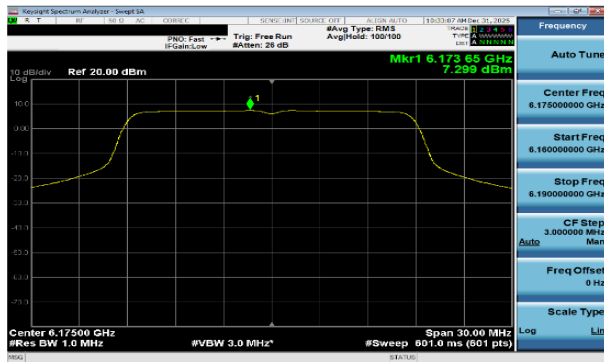


Plot 7-85 PSD Antenna WF7a (20MHz BW 802.11a - Ch.45)

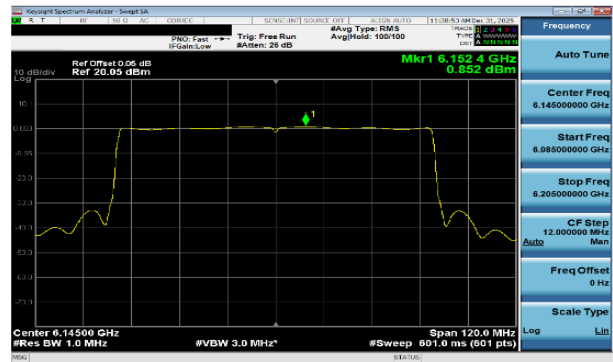

Plot 7-87 PSD Antenna WF7a (80MHz BW 802.11be(SU) - Ch.39)



Plot 7-86 PSD Antenna WF7a (40MHz BW 802.11be(SU) - Ch.43)

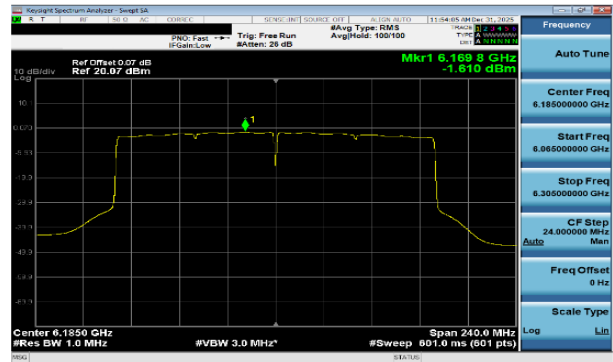

Plot 7-88 PSD Antenna WF7a (160MHz BW 802.11be(SU) - Ch.47)

FCC ID: BCGA3461 IC: 579C-A3461	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-15-R4.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 64 of 260