




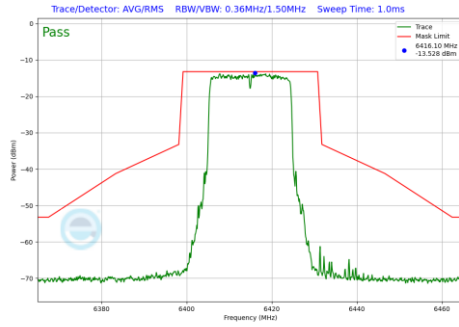


Plot 7-1290 In-Band Emission Plot SDM Diversity Antenna WF2a (20MHz BW 802.11be(RU) RU242 Index61 (UNII Band 5) - Ch.93)

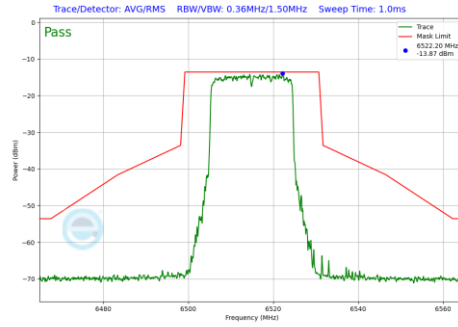


Plot 7-1294 In-Band Emission Plot SDM Diversity Antenna WF2a (20MHz BW 802.11be(RU) RU242 Index61 (UNII Band 6) - Ch.113)

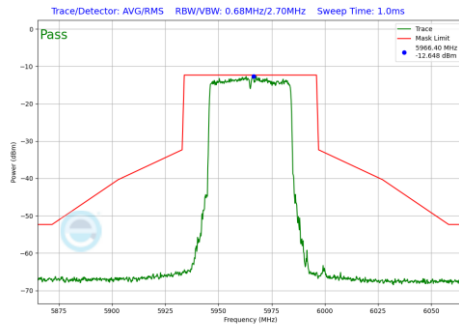


Plot 7-1291 In-Band Emission Plot SDM Diversity Antenna WF2a (40MHz BW 802.11be(RU) RU484 Index65 (UNII Band 5) - Ch.3)

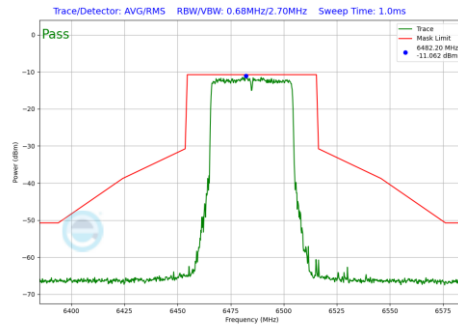


Plot 7-1295 In-Band Emission Plot SDM Diversity Antenna WF2a (40MHz BW 802.11be(RU) RU484 Index65 (UNII Band 6) - Ch.107)

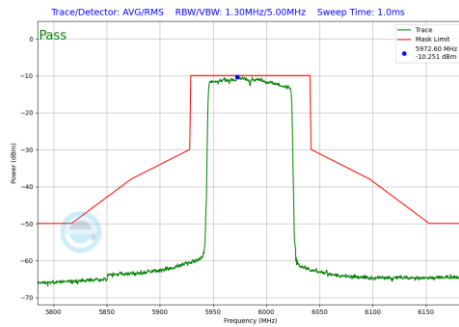


Plot 7-1292 In-Band Emission Plot SDM Diversity Antenna WF2a (80MHz BW 802.11be(RU) RU996 Index67 (UNII Band 5) - Ch.7)

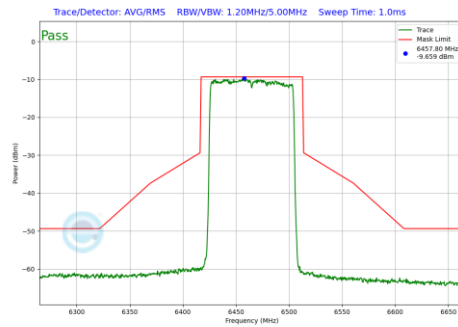

Plot 7-1296 In-Band Emission Plot SDM Diversity Antenna WF2a (80MHz BW 802.11be(RU) RU996 Index67 (UNII Band 6) - Ch.103)

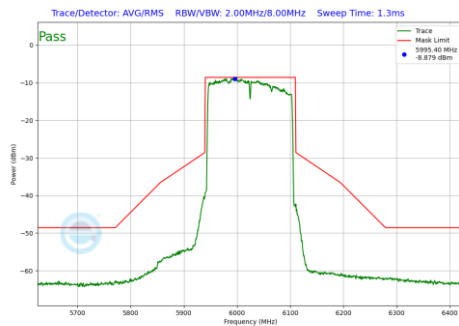


Plot 7-1293 In-Band Emission Plot SDM Diversity Antenna WF2a (160MHz BW 802.11be(RU) RU996X2 Index68 (UNII Band 5) - Ch.15)

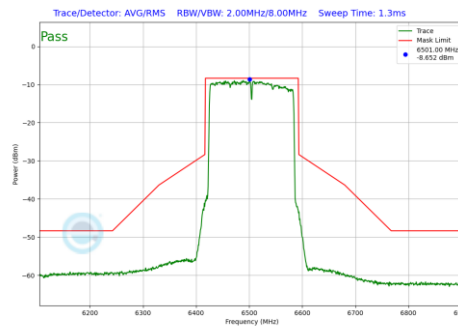


Plot 7-1297 In-Band Emission Plot SDM Diversity Antenna WF2a (160MHz BW 802.11be(RU) RU996X2 Index68 (UNII Band 6) - Ch.111)


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 382 of 655

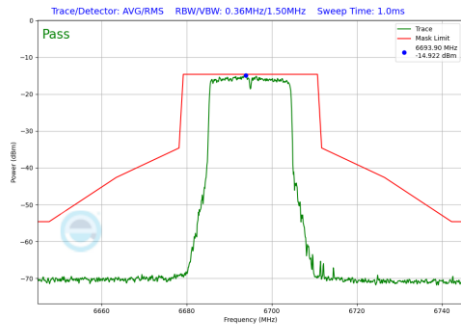


Plot 7-1298 In-Band Emission Plot SDM Diversity Antenna WF2a (20MHz BW 802.11be(RU) RU242 Index61 (UNII Band 7) - Ch.149)

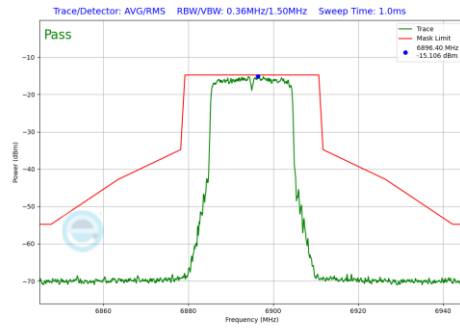


Plot 7-1302 In-Band Emission Plot SDM Diversity Antenna WF2a (20MHz BW 802.11be(RU) RU242 Index61 (UNII Band 8) - Ch.189)

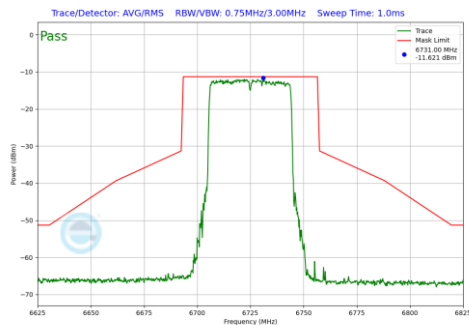


Plot 7-1299 In-Band Emission Plot SDM Diversity Antenna WF2a (40MHz BW 802.11be(RU) RU484 Index65 (UNII Band 7) - Ch.155)

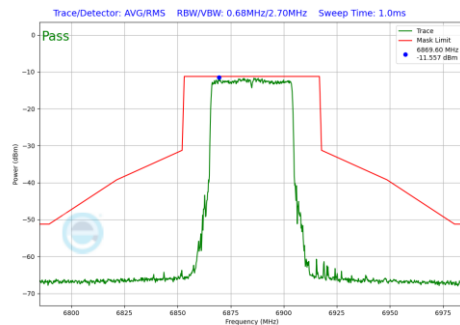


Plot 7-1303 In-Band Emission Plot SDM Diversity Antenna WF2a (40MHz BW 802.11be(RU) RU484 Index65 (UNII Band 8) - Ch.187)

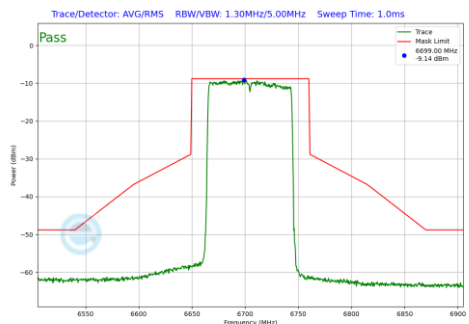


Plot 7-1300 In-Band Emission Plot SDM Diversity Antenna WF2a (80MHz BW 802.11be(RU) RU996 Index67 (UNII Band 7) - Ch.151)

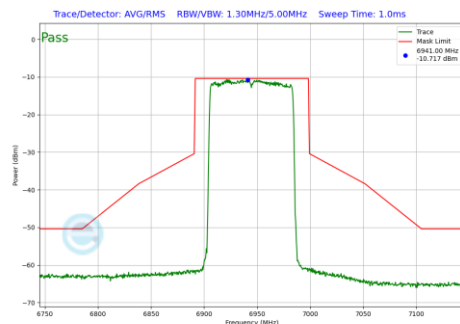

Plot 7-1304 In-Band Emission Plot SDM Diversity Antenna WF2a (80MHz BW 802.11be(RU) RU996 Index67 (UNII Band 8) - Ch.199)

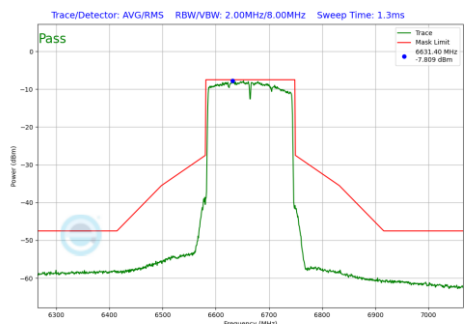

Plot 7-1301 In-Band Emission Plot SDM Diversity Antenna WF2a (160MHz BW 802.11be(RU) RU996X2 Index68 (UNII Band 7) - Ch.143)

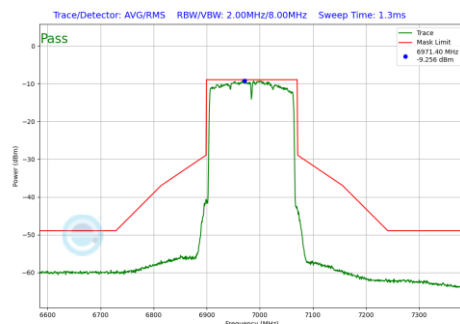

Plot 7-1305 In-Band Emission Plot SDM Diversity Antenna WF2a (160MHz BW 802.11be(RU) RU996X2 Index68 (UNII Band 8) - Ch.207)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG			Page 383 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6 Contention Based Protocol

§15.407(d)(6), RSS-248 [4.7]

Test Overview and Limit

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel.

Test Procedure Used

KDB 987594 D02 v03 – Section I

Test Settings

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
4. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
5. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
6. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
7. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
8. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
9. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
10. Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
11. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 384 of 655

V 11.0 05/2025

Test Setup

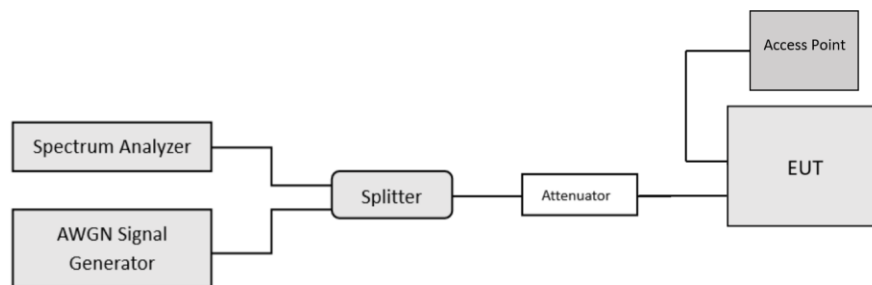


Figure 2. Contention-based protocol test setup, conducted method

Test Notes

1. Per guidance from KDB 987594 D02 v03, contention-based protocol was tested using an AWGN signal with a bandwidth of 10MHz. The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission, marker indicates the point at which the AWGN signal is introduced.
2. Per Guidance from KDB 987594 D04 v03, contention-based protocol was tested with receiver with the lowest antenna gain.
3. 15 trials were ran in order to assure that at least 90% of certainty was met.
4. The Channel Power (AWGN) plots do not account for the cable loss at the antenna connector. This loss is added separately in the Incumbent Detection Results table. Across UNII-5 to UNII-8, the antenna connectors loss ranges from 1.1 dB to 1.3 dB.

Detection Level = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Equation 7-1. Incumbent Detection Level Calculation

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 385 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Band	Channel	Channel Frequency [MHz]	Channel BW [MHz]	Incumbent Frequency [MHz]	Injected (AWGN) [dBm]	Antenna Gain [dBi]	Adjusted Power Level [dBm]	Detection Limit [dBm]	Margin [dB]
UNII Band 5	53	6215	20	6215	-67.88	-4.50	-63.38	-62.0	-1.38
	47	6185	160	6110	-67.79	-4.50	-63.29	-62.0	-1.29
				6185	-67.86	-4.50	-63.36	-62.0	-1.36
				6260	-67.64	-4.50	-63.14	-62.0	-1.14
UNII Band 6	101	6455	20	6455	-67.63	-4.50	-63.13	-62.0	-1.13
	111	6505	160	6430	-67.57	-4.50	-63.07	-62.0	-1.07
				6505	-67.72	-4.50	-63.22	-62.0	-1.22
				6580	-67.76	-4.50	-63.26	-62.0	-1.26
UNII Band 7	149	6695	20	6695	-68.05	-4.50	-63.55	-62.0	-1.55
	143	6665	160	6590	-67.77	-4.50	-63.27	-62.0	-1.27
				6665	-67.97	-4.50	-63.47	-62.0	-1.47
				6740	-67.94	-4.50	-63.44	-62.0	-1.44
UNII Band 8	197	6935	20	6935	-67.82	-4.50	-63.32	-62.0	-1.32
	207	6985	160	6910	-67.70	-4.50	-63.20	-62.0	-1.20
				6985	-67.88	-4.50	-63.38	-62.0	-1.38
				7060	-67.86	-4.50	-63.36	-62.0	-1.36

Table 7-200. Contention Based Protocol – Incumbent Detection Results

Band	Channel	Channel Frequency [MHz]	Channel BW [MHz]	Incumbent Frequency [MHz]	EUT Transmission Status		
					Adjusted AWGN Power (dBm)		
					Normal	Minimal	Ceased
UNII Band 5	53	6215	20	6215	-74.56	-64.63	-63.38
	47	6185	160	6110	-74.47	-64.54	-63.29
				6185	-74.54	-64.61	-63.36
				6260	-74.32	-64.39	-63.14
UNII Band 6	101	6455	20	6455	-74.31	-64.38	-63.13
	111	6505	160	6430	-74.25	-64.32	-63.07
				6505	-74.40	-64.47	-63.22
				6580	-74.44	-64.51	-63.26
UNII Band 7	149	6695	20	6695	-74.53	-64.77	-63.55
	143	6665	160	6590	-74.25	-64.49	-63.27
				6665	-74.45	-64.69	-63.47
				6740	-74.42	-64.66	-63.44
UNII Band 8	197	6935	20	6935	-74.30	-64.54	-63.32
	207	6985	160	6910	-74.18	-64.42	-63.20
				6985	-74.36	-64.60	-63.38
				7060	-74.34	-64.58	-63.36


Table 7-201. Contention Based Protocol – Detection Results – All Tx Cases

CBP Detection (1 = Detection, Blank = No Detection)																						
Band	Channel	Channel Frequency [MHz]	Channel BW [MHz]	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Detection Rate [%]	Limit [%]	Pass/Fail	
UNII Band 5	53	6215	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
	47	6185	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
UNII Band 6	101	6455	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
	111	6505	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
UNII Band 7	149	6695	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
	143	6665	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
UNII Band 8	197	6935	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass
	207	6985	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	


Table 7-202. Contention Based Protocol – Incumbent Detection Trial Results

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 386 of 655

AWGN Plots

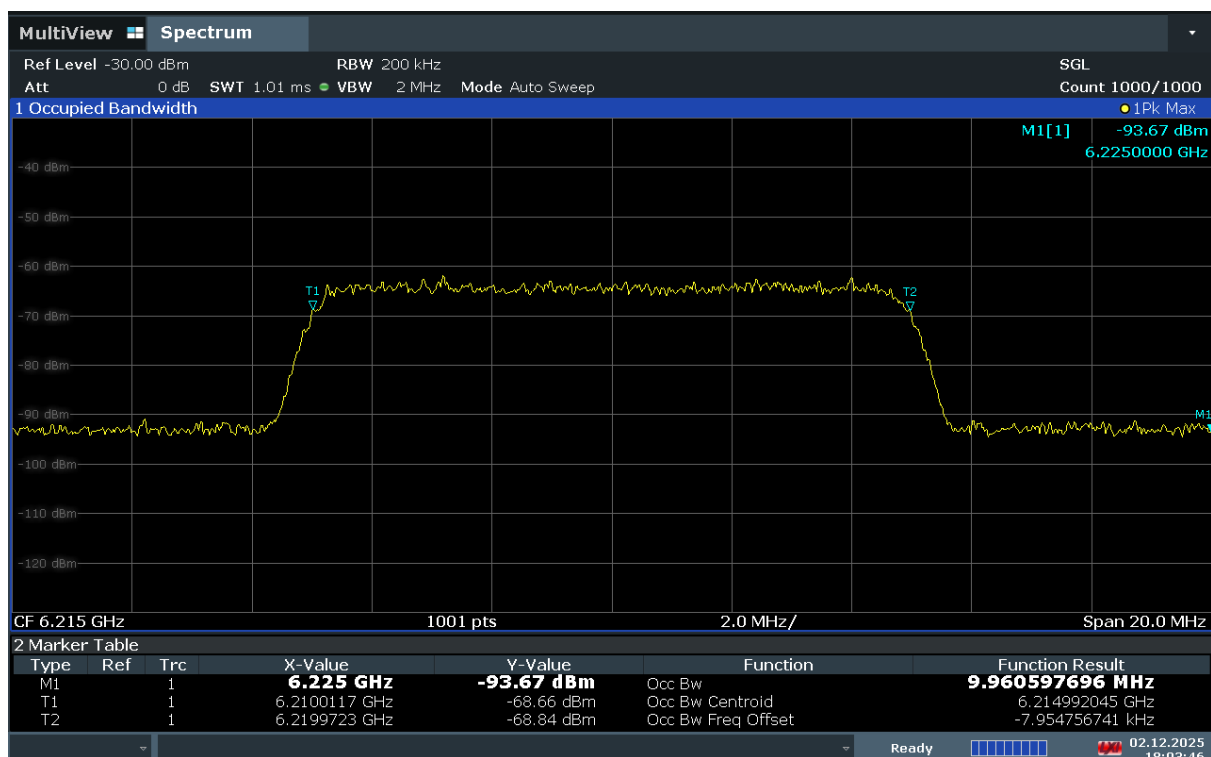

Plot 7-1306. AWGN Signal – UNII 5 – 20MHz

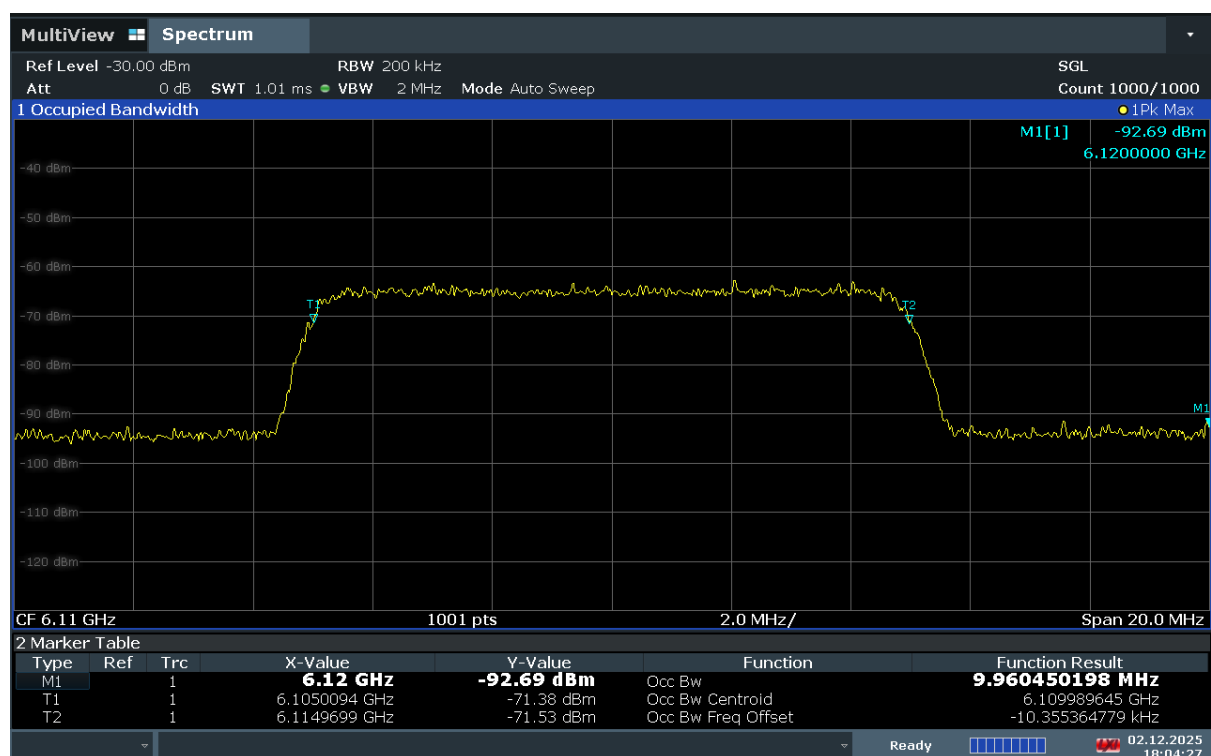


Plot 7-1307. AWGN Signal – UNII 5 – 160MHz - Low


FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 387 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

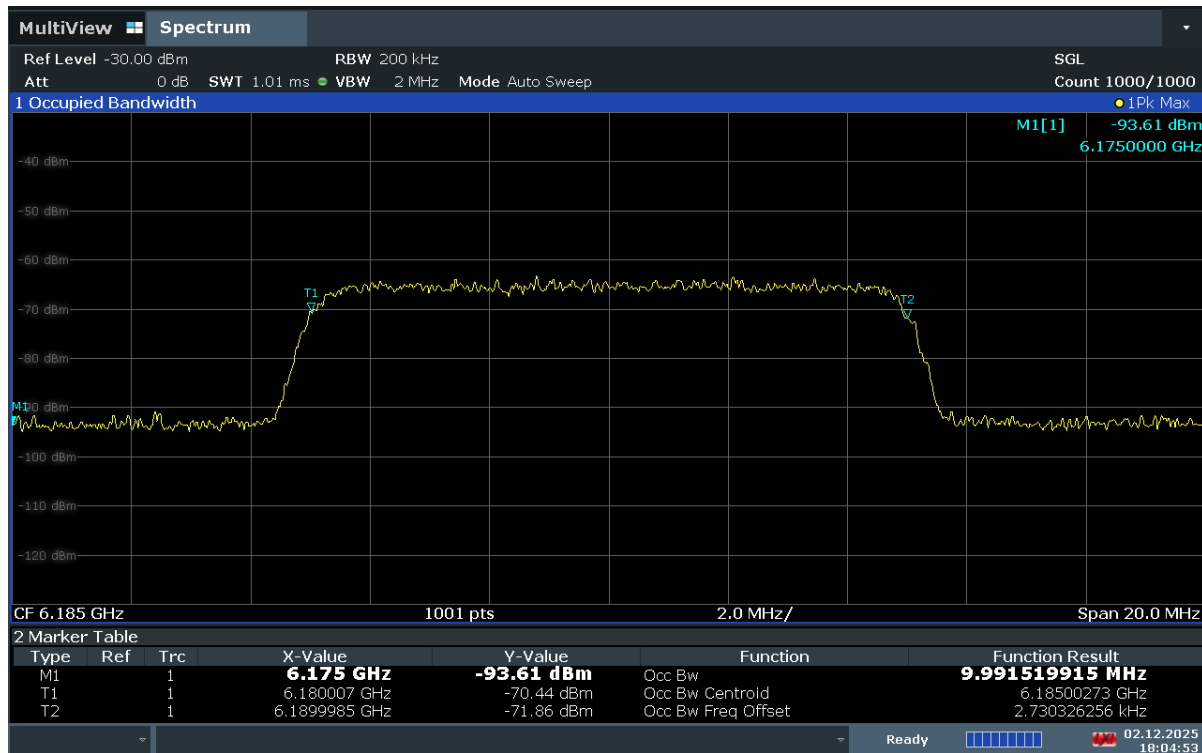

Plot 7-1308. AWGN Signal – UNII 5 – 160MHz – Mid

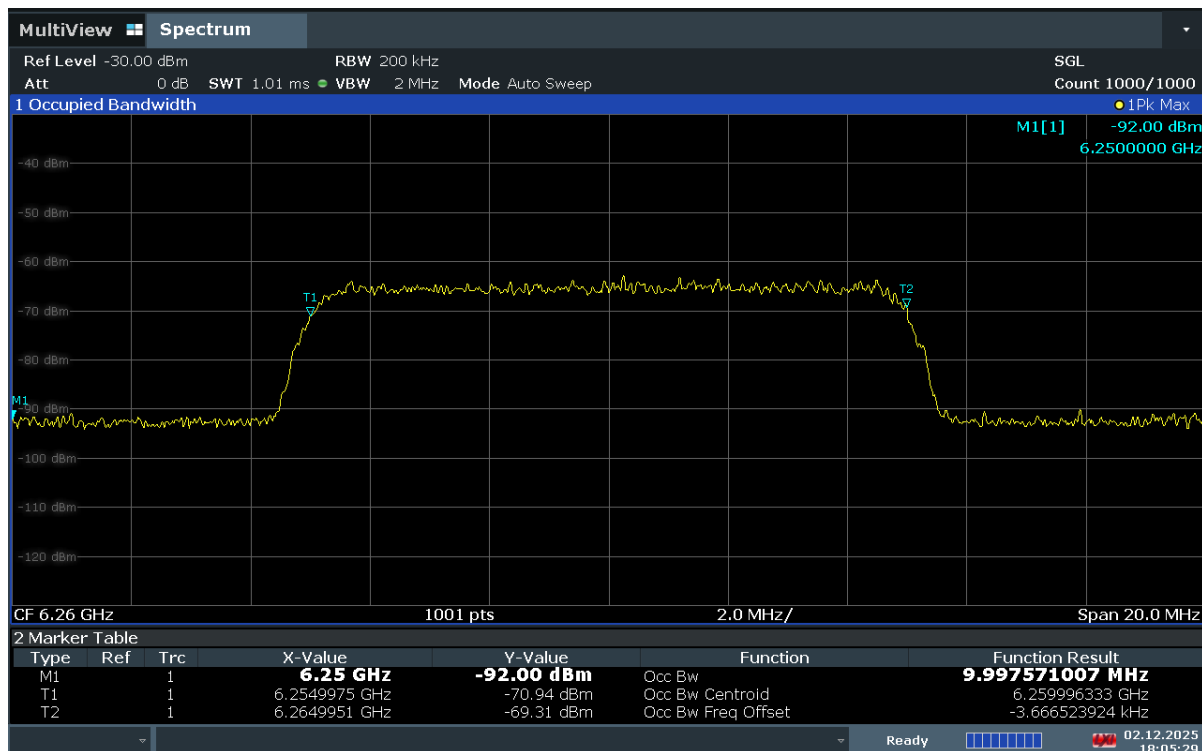


Plot 7-1309. AWGN Signal – UNII 5 – 160MHz - High


FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 388 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

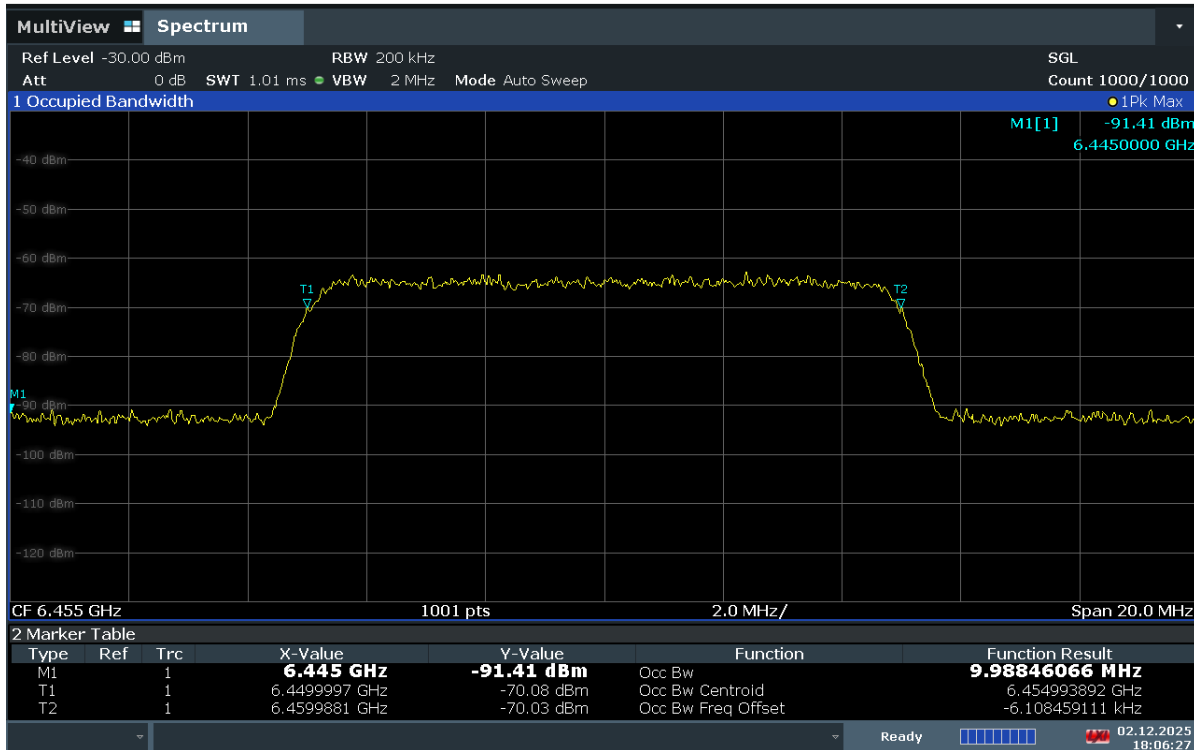

Plot 7-1310. AWGN Signal – UNII 6 – 20MHz

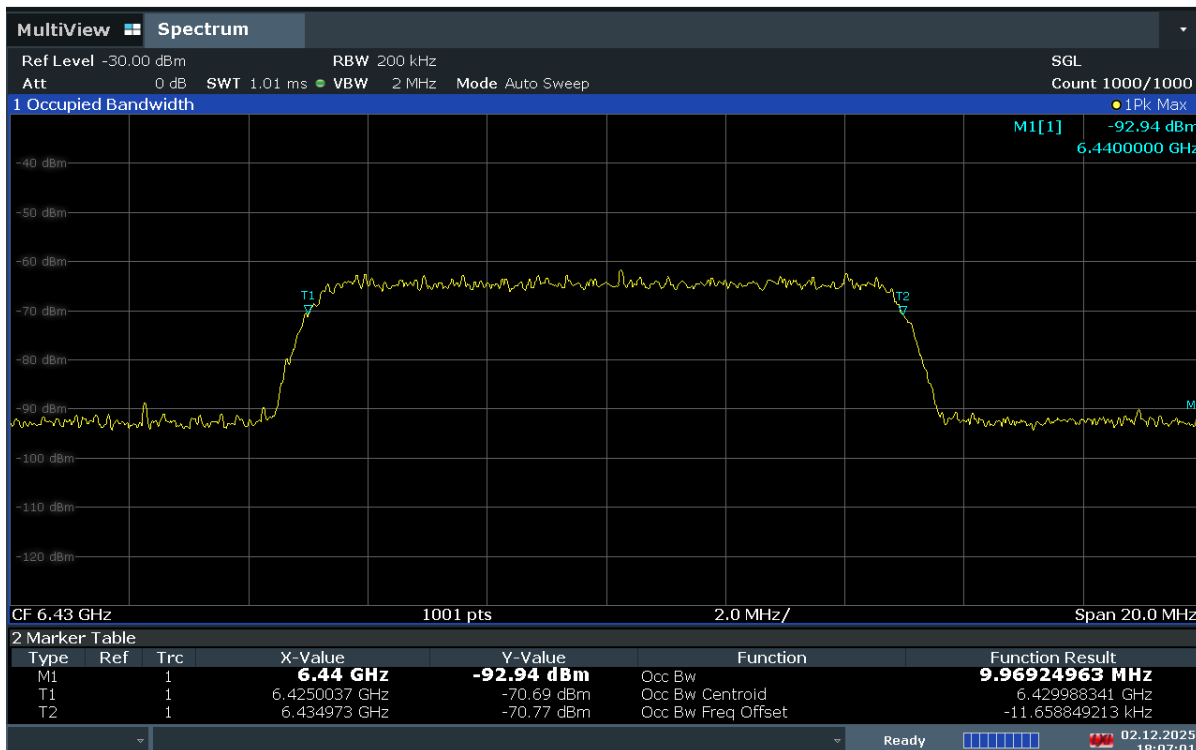


Plot 7-1311. AWGN Signal – UNII 6 – 160MHz - Low


FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 389 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

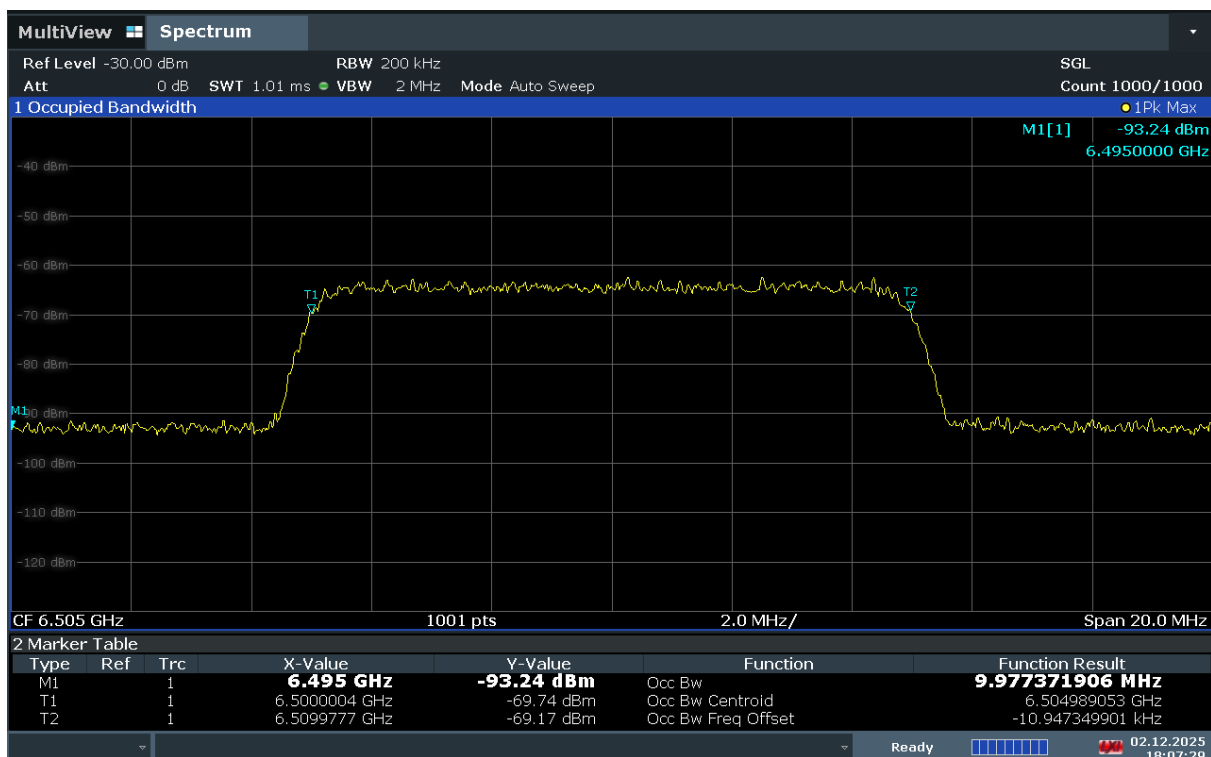

Plot 7-1312. AWGN Signal – UNII 6 – 160MHz – Mid

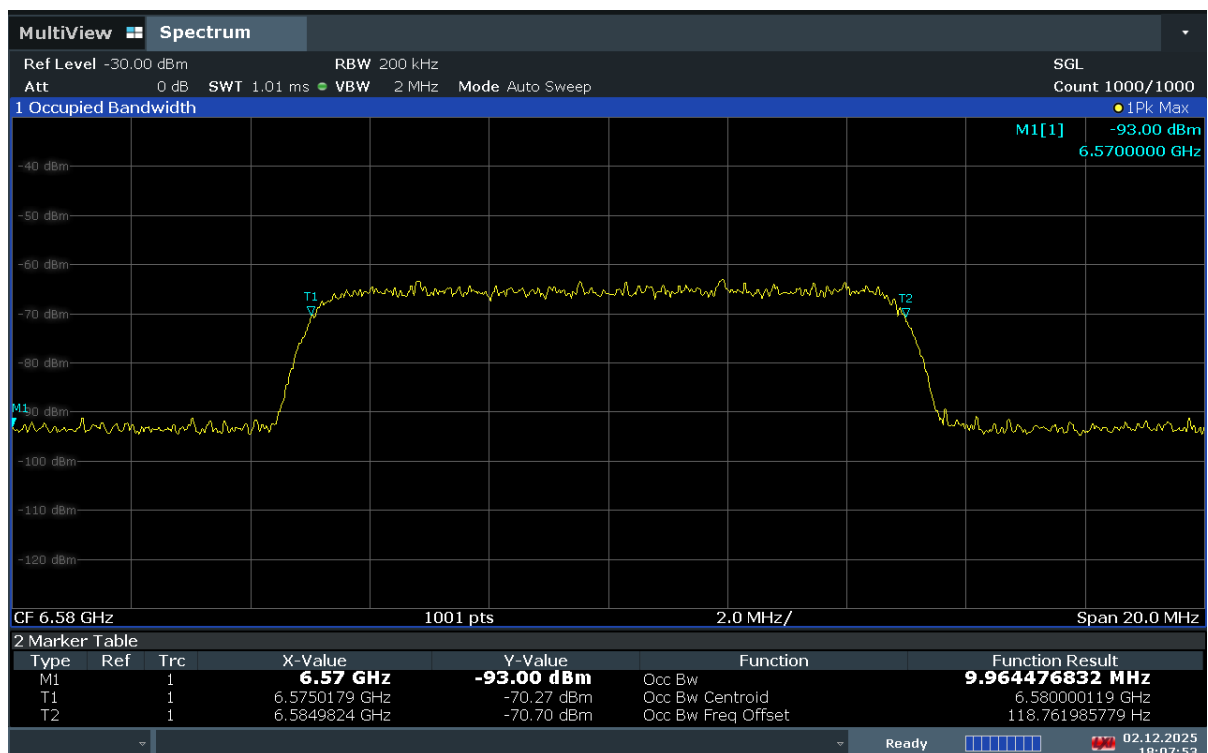


Plot 7-1313. AWGN Signal – UNII 6 – 160MHz - High

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 390 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

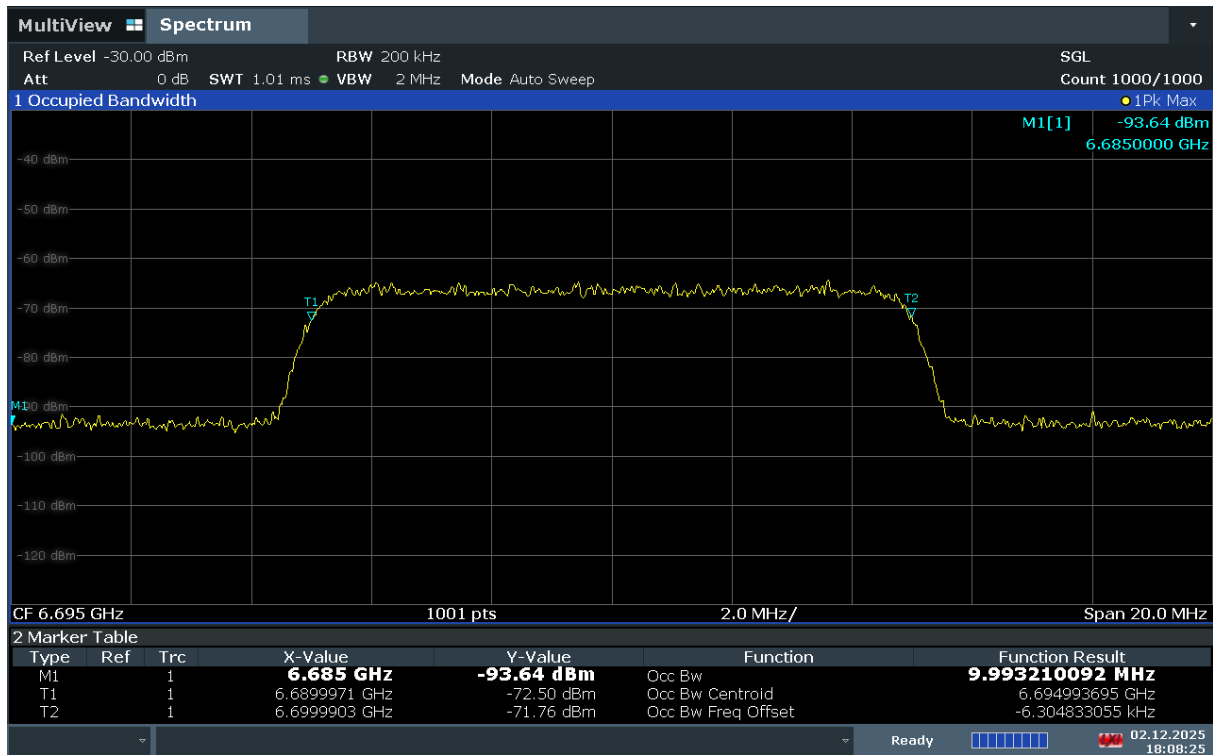

Plot 7-1314. AWGN Signal – UNII 7 – 20MHz




Plot 7-1315. AWGN Signal – UNII 7 – 160MHz - Low


FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 391 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

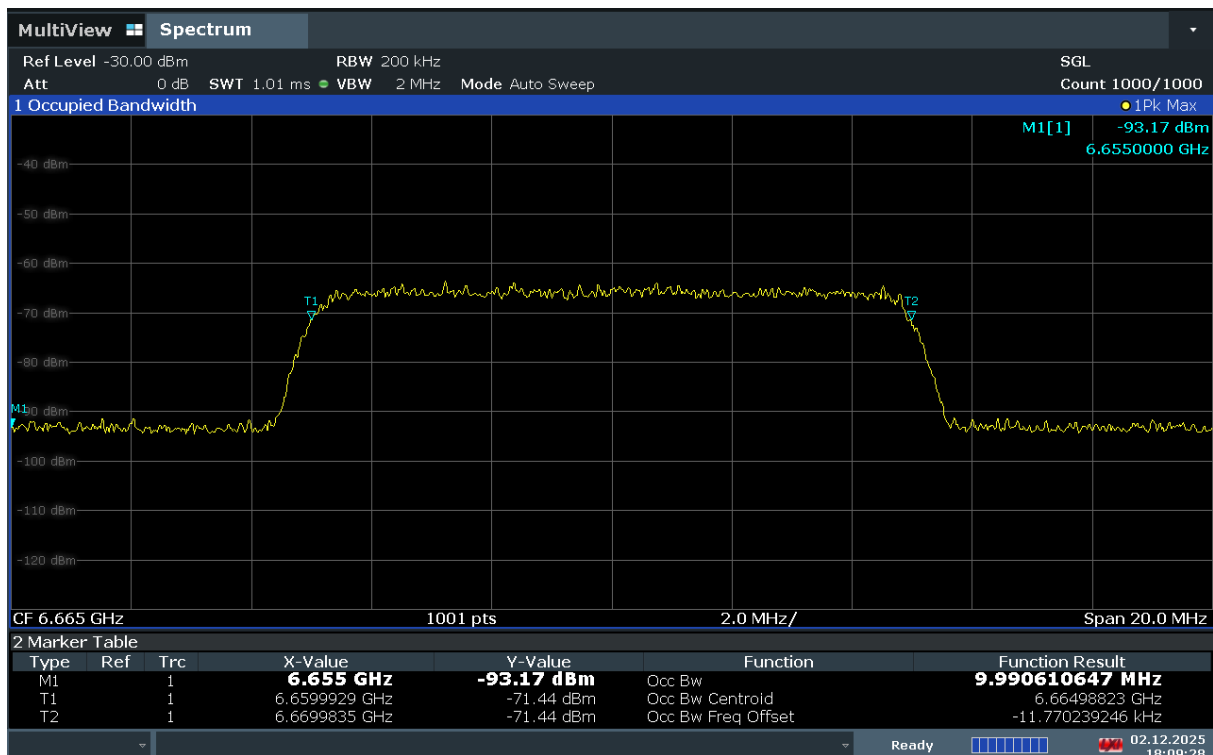

Plot 7-1316. AWGN Signal – UNII 7 – 160MHz – Mid

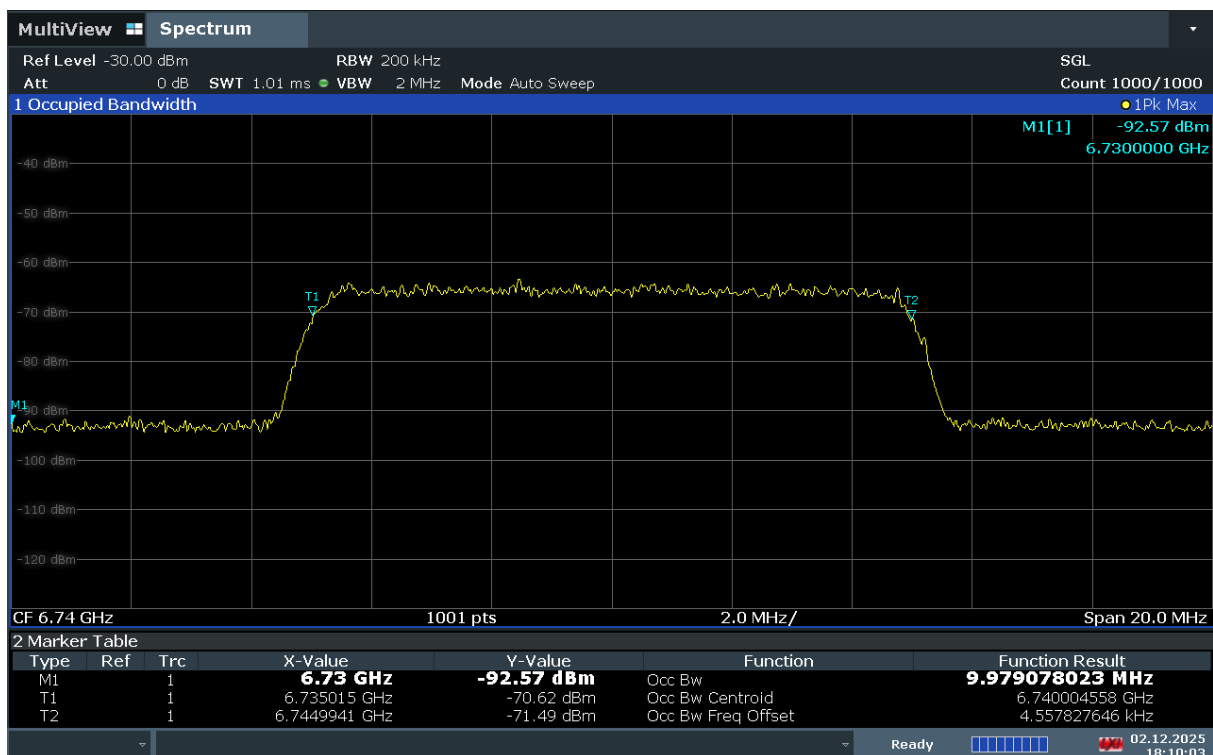


Plot 7-1317. AWGN Signal – UNII 7 – 160MHz - High


FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 392 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

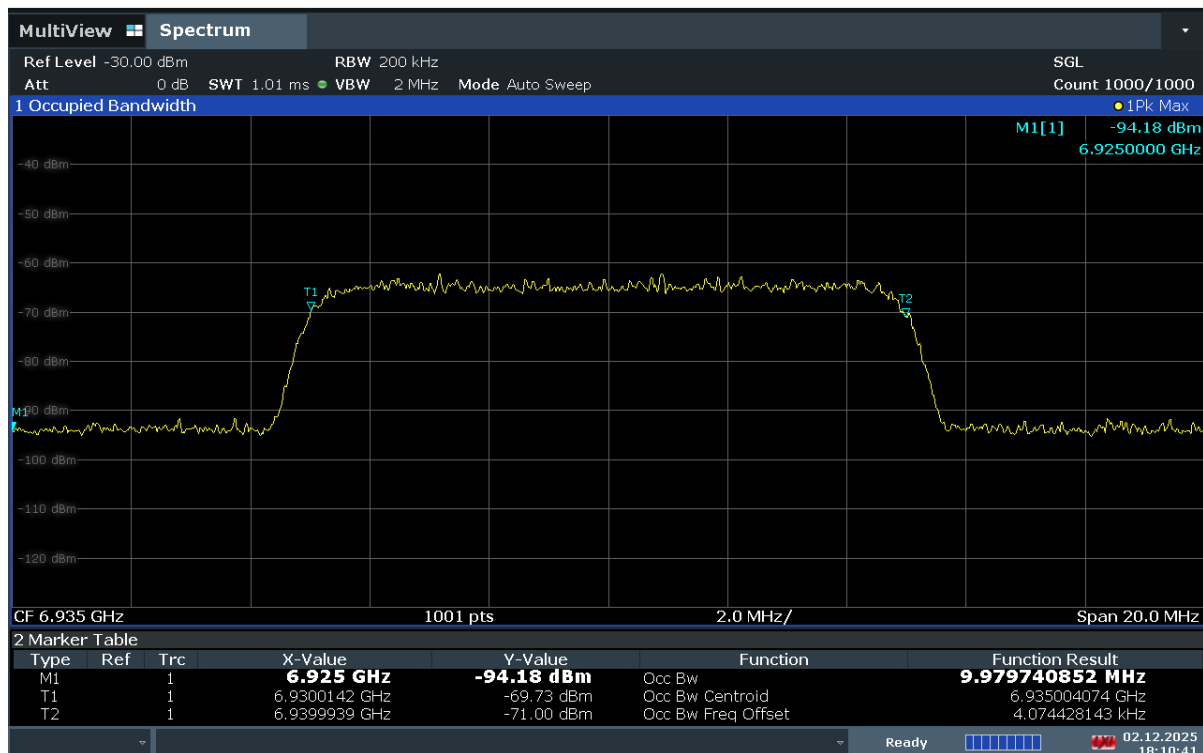

Plot 7-1318. AWGN Signal – UNII 8 – 20MHz

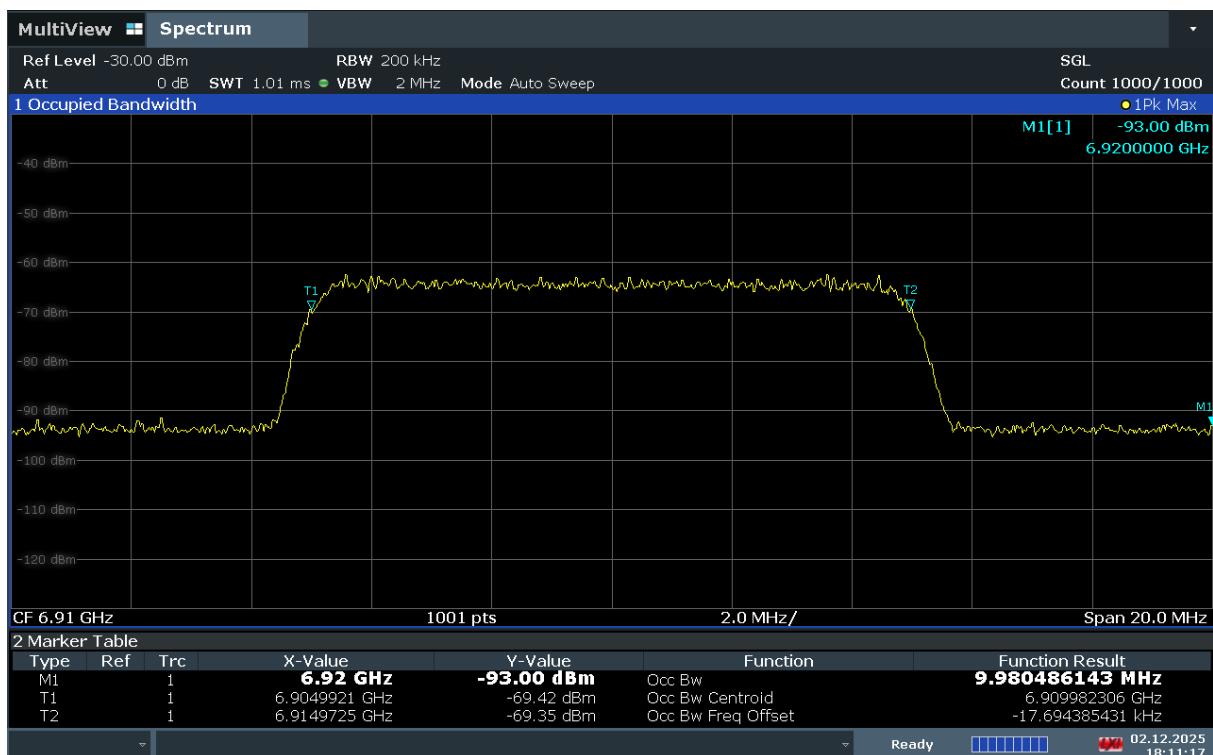


Plot 7-1319. AWGN Signal – UNII 8 – 160MHz - Low


FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 393 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

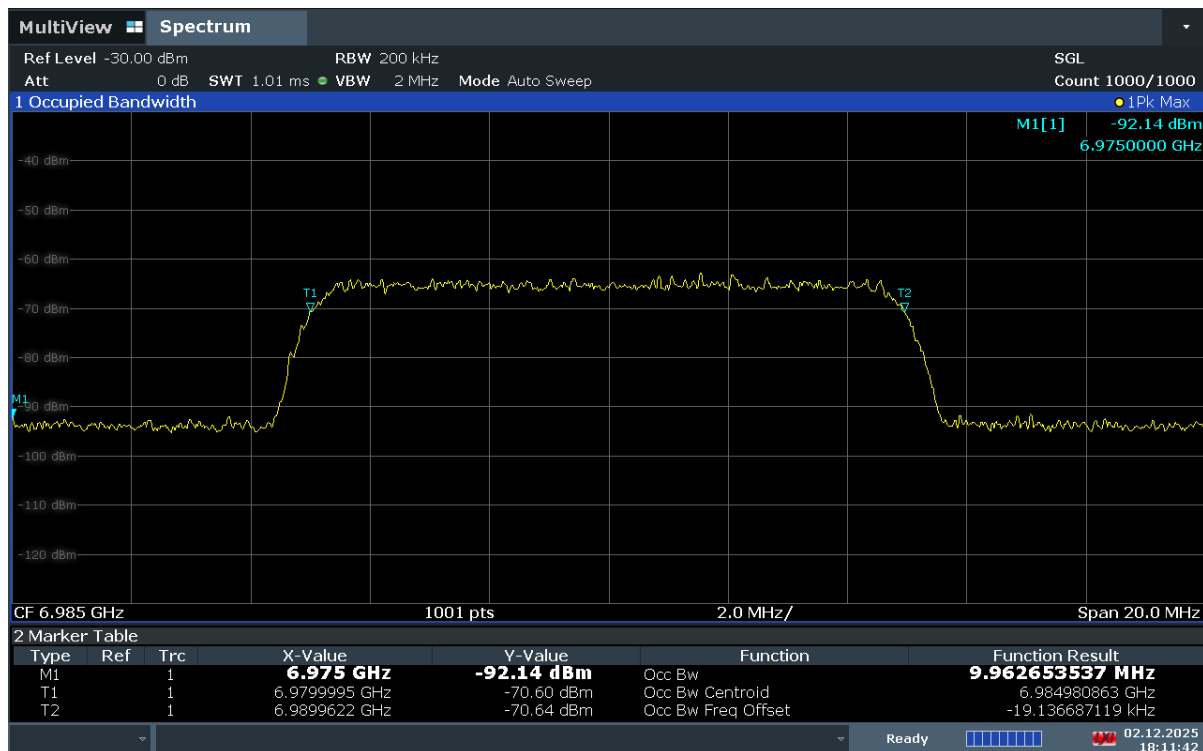

Plot 7-1320. AWGN Signal – UNII 8 – 160MHz – Mid

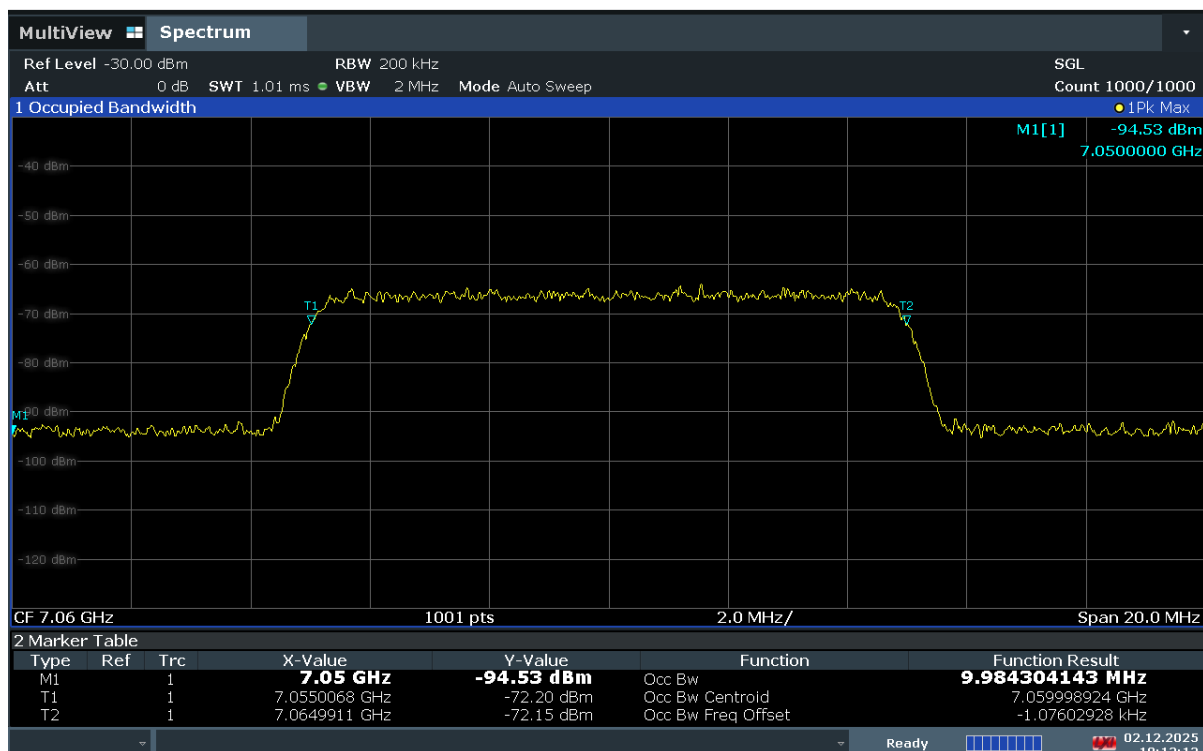


Plot 7-1321. AWGN Signal – UNII 8 – 160MHz - High

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 394 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Channel Power Plots

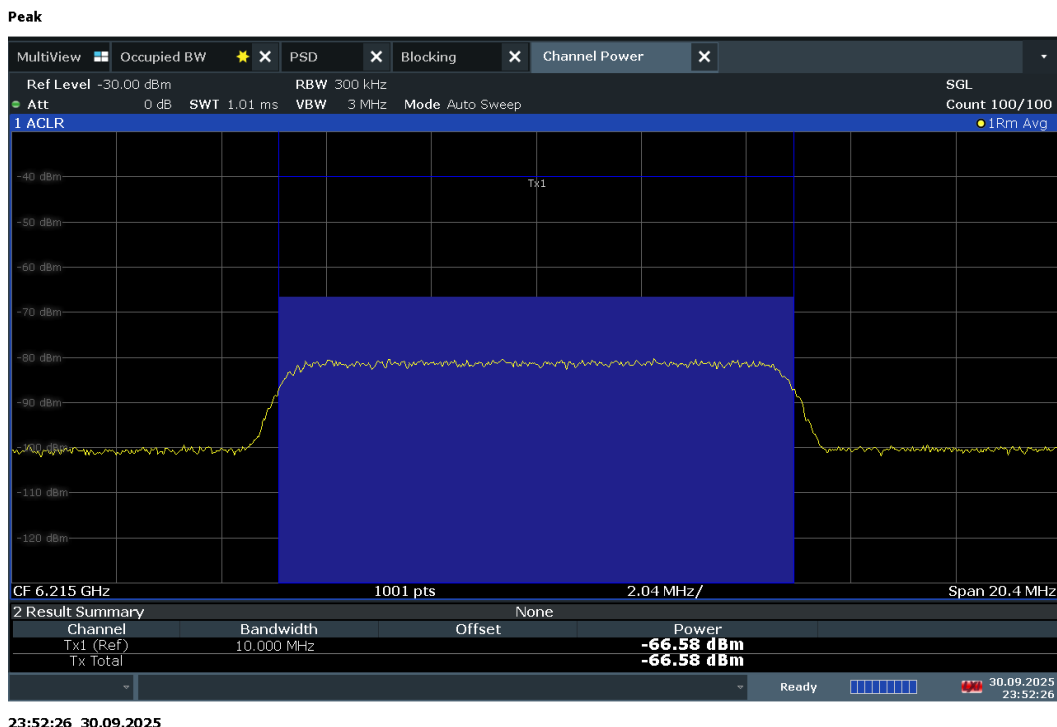

Plot 7-1322. Channel Power – UNII 5 – 20MHz

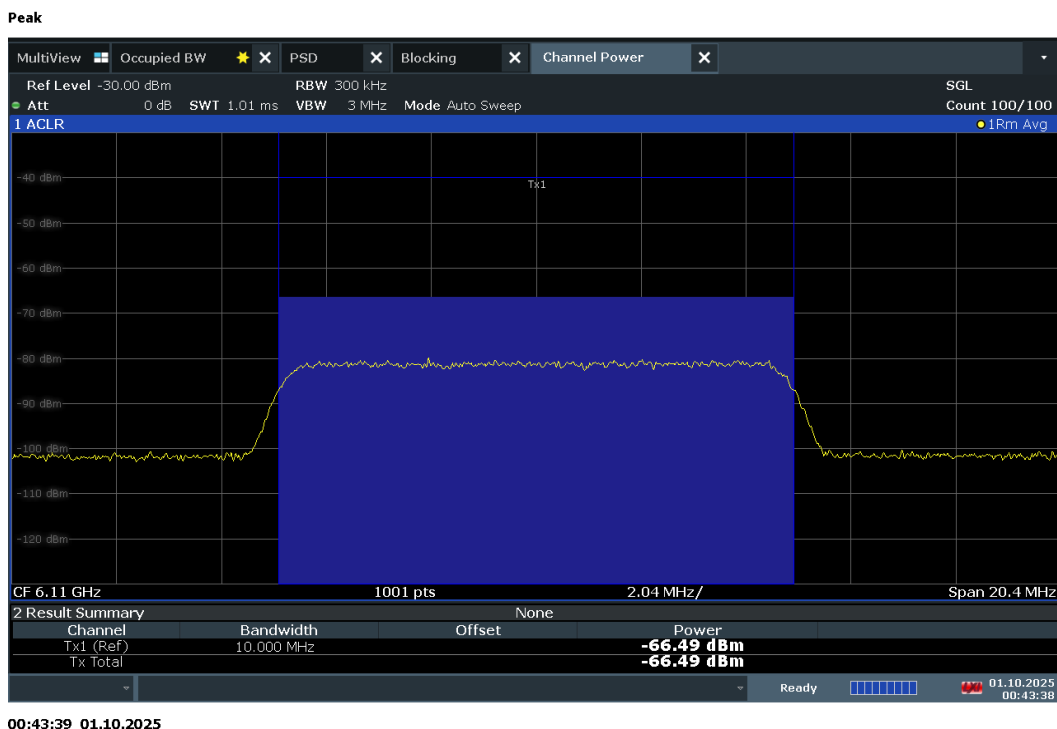


Plot 7-1323. Channel Power – UNII 5 – 160MHz - Low

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 395 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

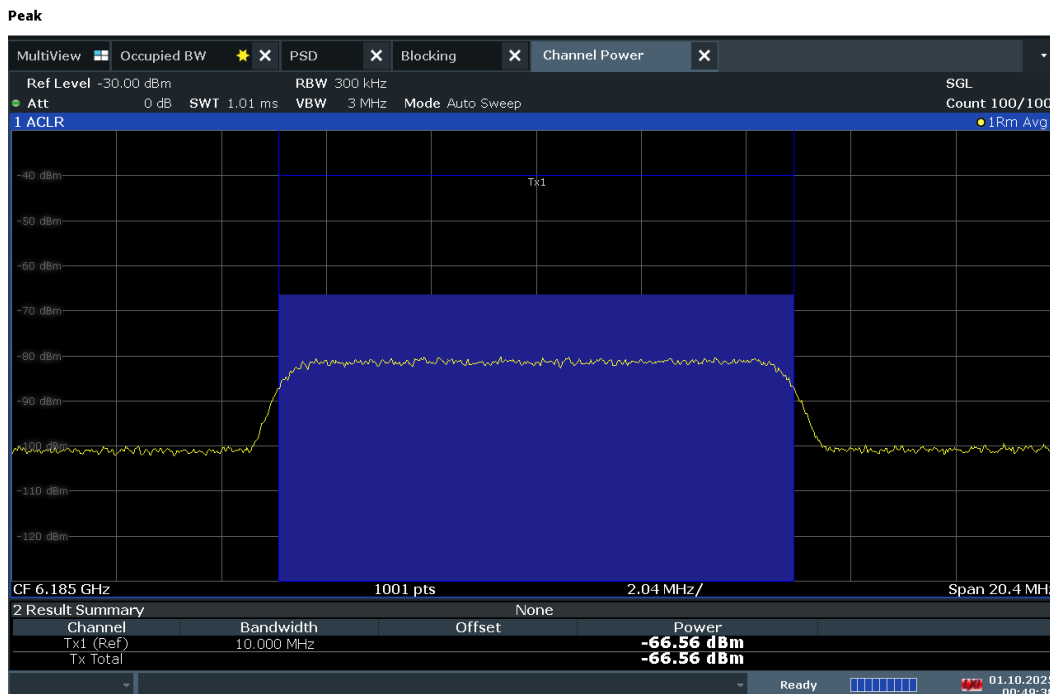

00:49:39 01.10.2025

Plot 7-1324. Channel Power – UNII 5 – 160MHz – Mid

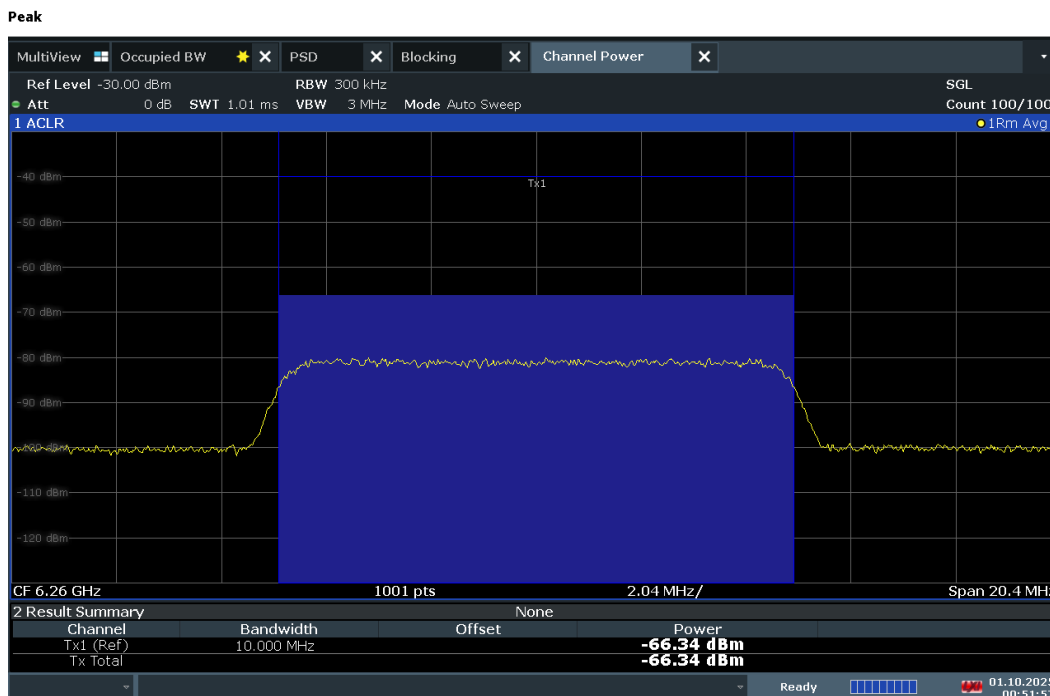


00:51:57 01.10.2025

Plot 7-1325. Channel Power – UNII 5 – 160MHz - High

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 396 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

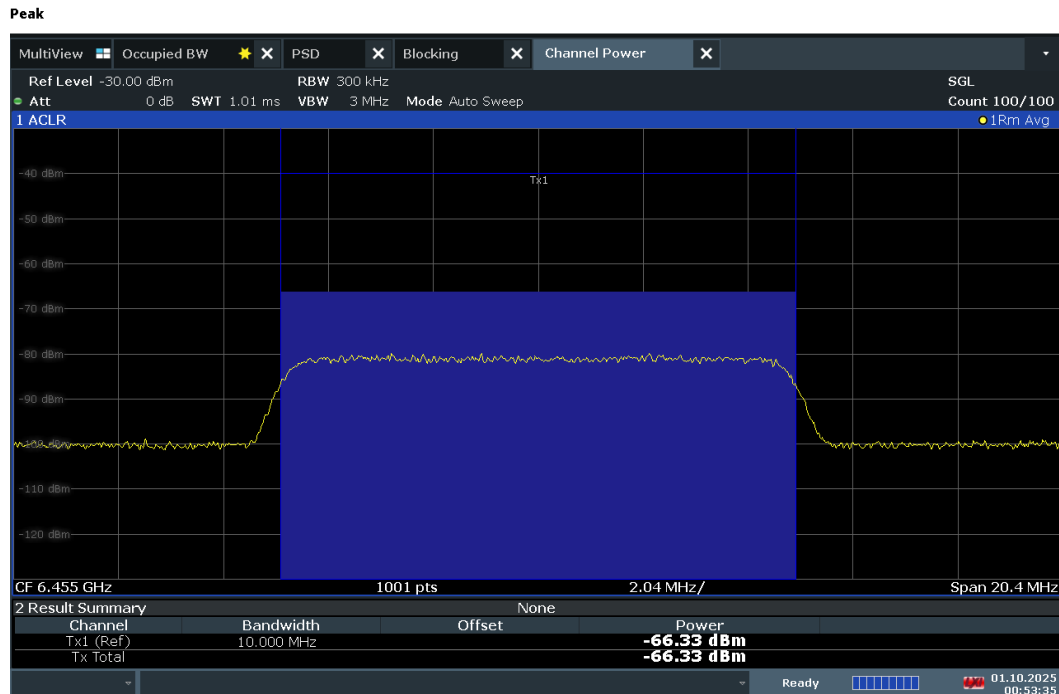

00:53:36 01.10.2025

Plot 7-1326. Channel Power – UNII 6 – 20MHz

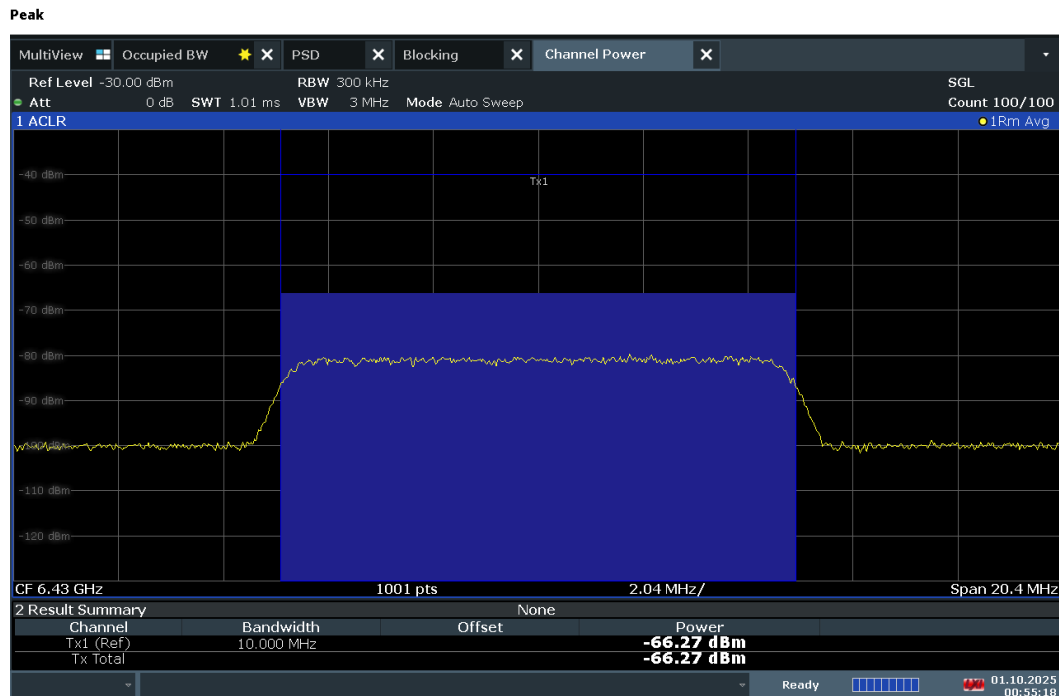


00:55:18 01.10.2025

Plot 7-1327. Channel Power – UNII 6 – 160MHz - Low

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 397 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

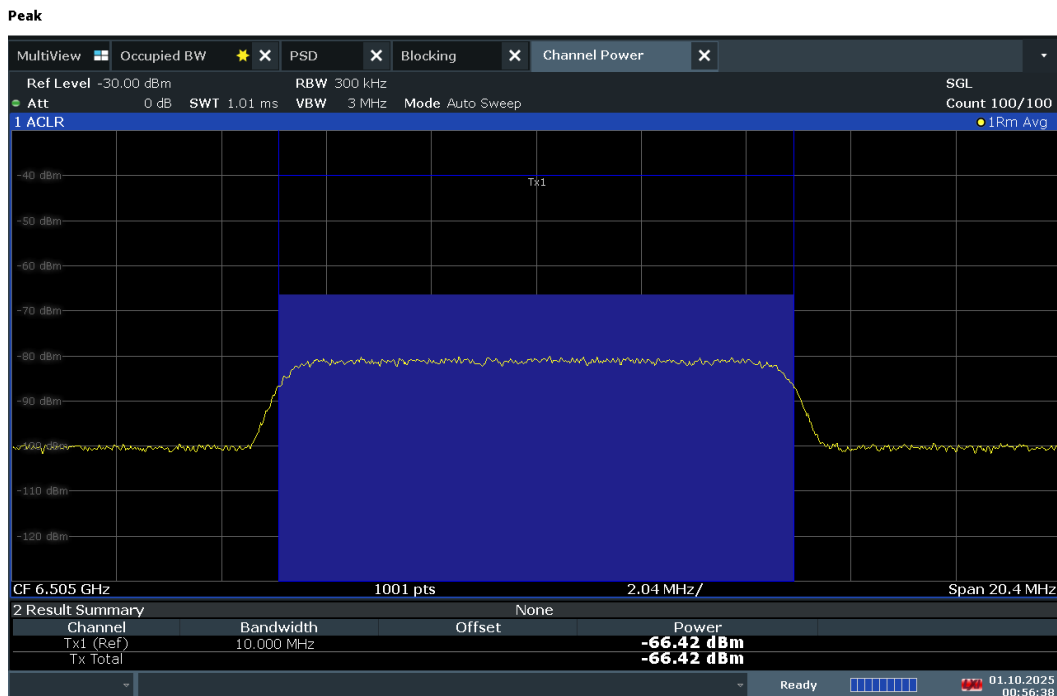

00:56:38 01.10.2025

Plot 7-1328. Channel Power – UNII 6 – 160MHz – Mid

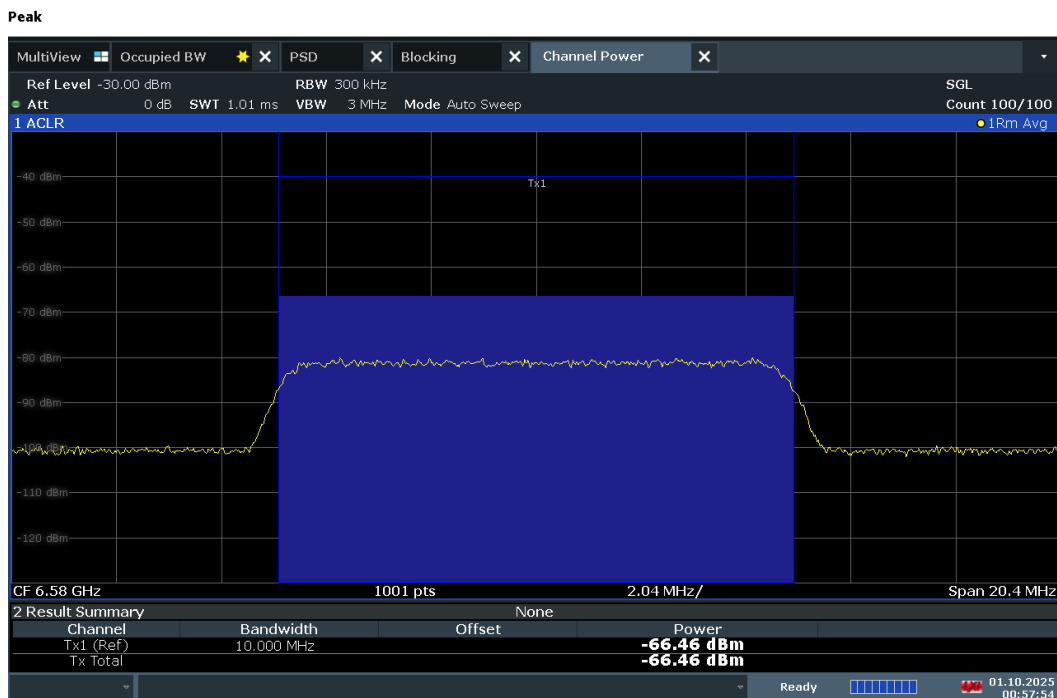


00:57:55 01.10.2025

Plot 7-1329. Channel Power – UNII 6 – 160MHz - High

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 398 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

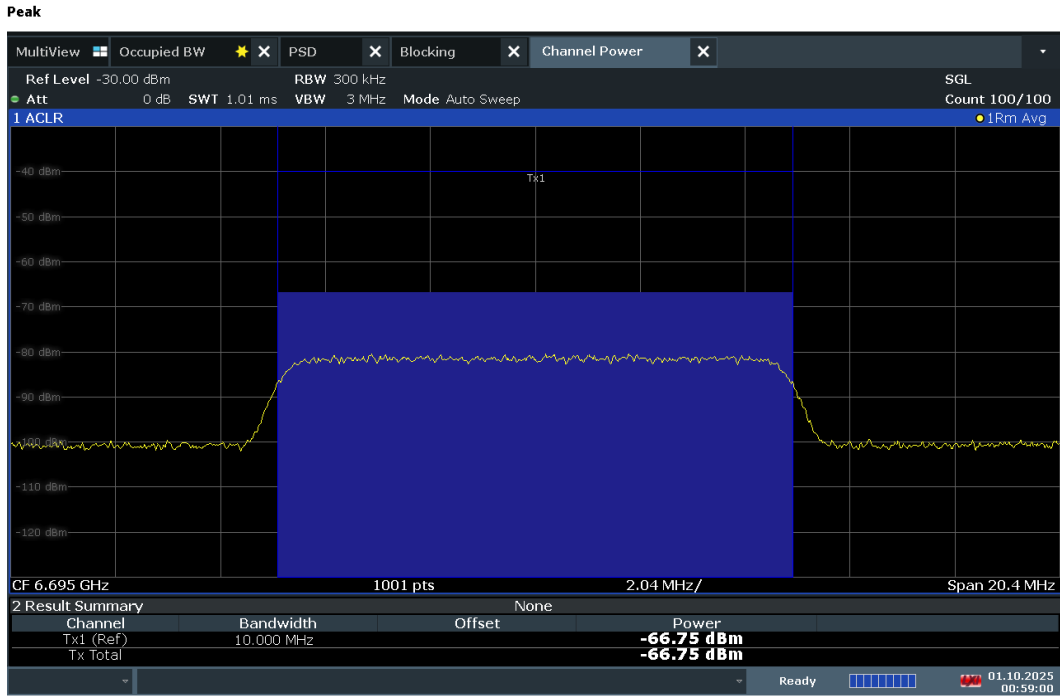

00:59:00 01.10.2025

Plot 7-1330. Channel Power – UNII 7 – 20MHz

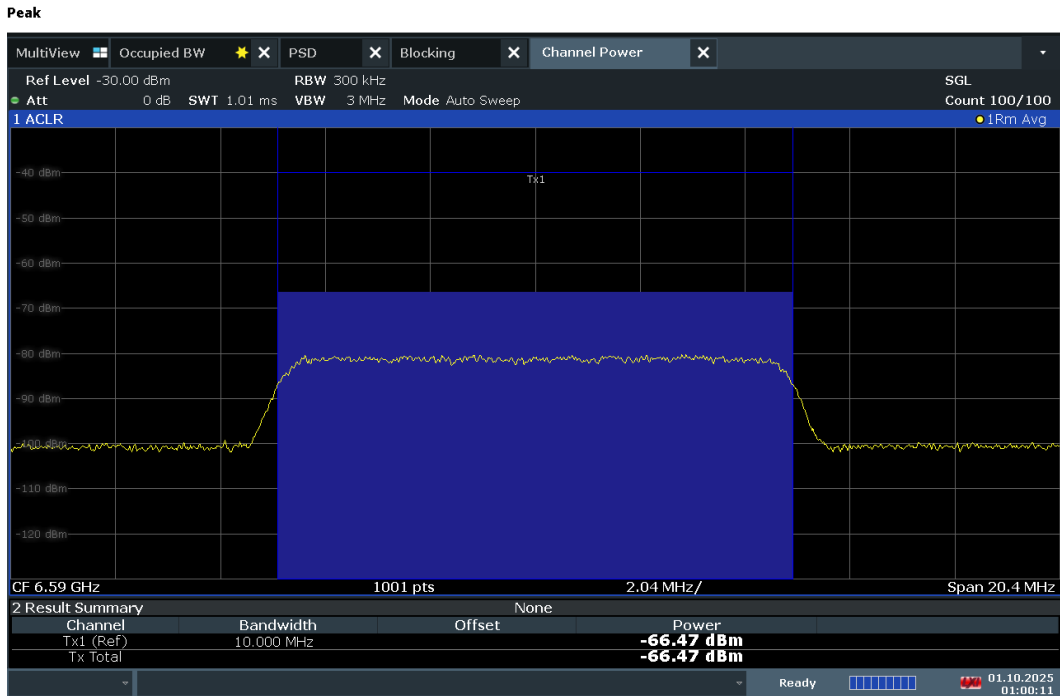


01:00:11 01.10.2025

Plot 7-1331. Channel Power – UNII 7 – 160MHz - Low

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 399 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

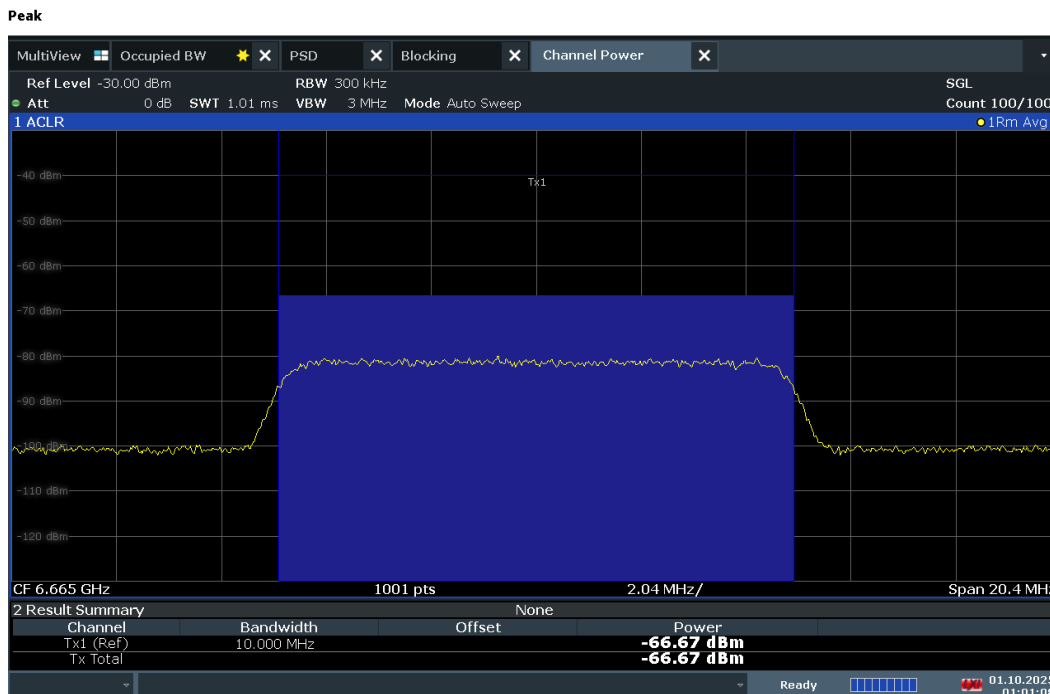

01:01:09 01.10.2025

Plot 7-1332. Channel Power – UNII 7 – 160MHz – Mid

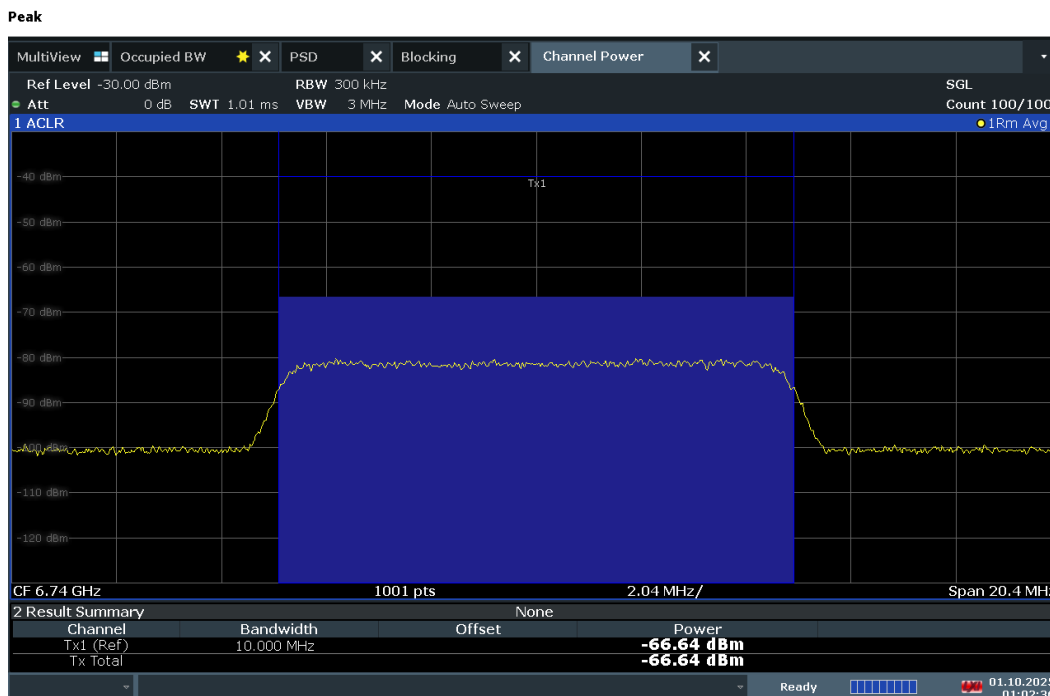


01:02:36 01.10.2025

Plot 7-1333. Channel Power – UNII 7 – 160MHz - High


FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 400 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

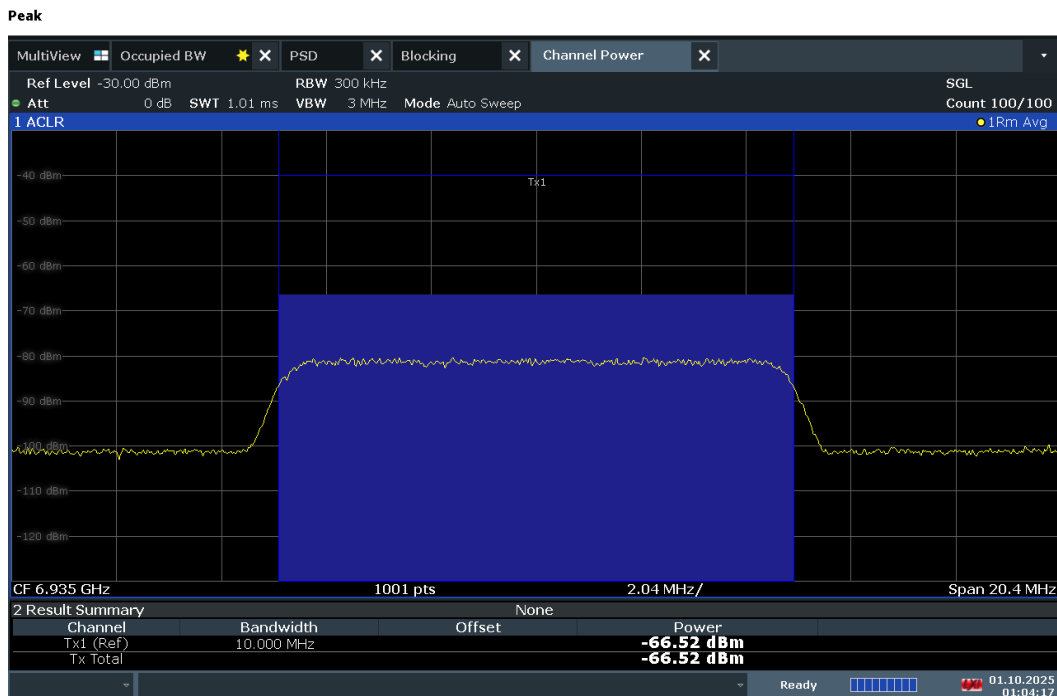

Plot 7-1334. Channel Power – UNII 8 – 20MHz

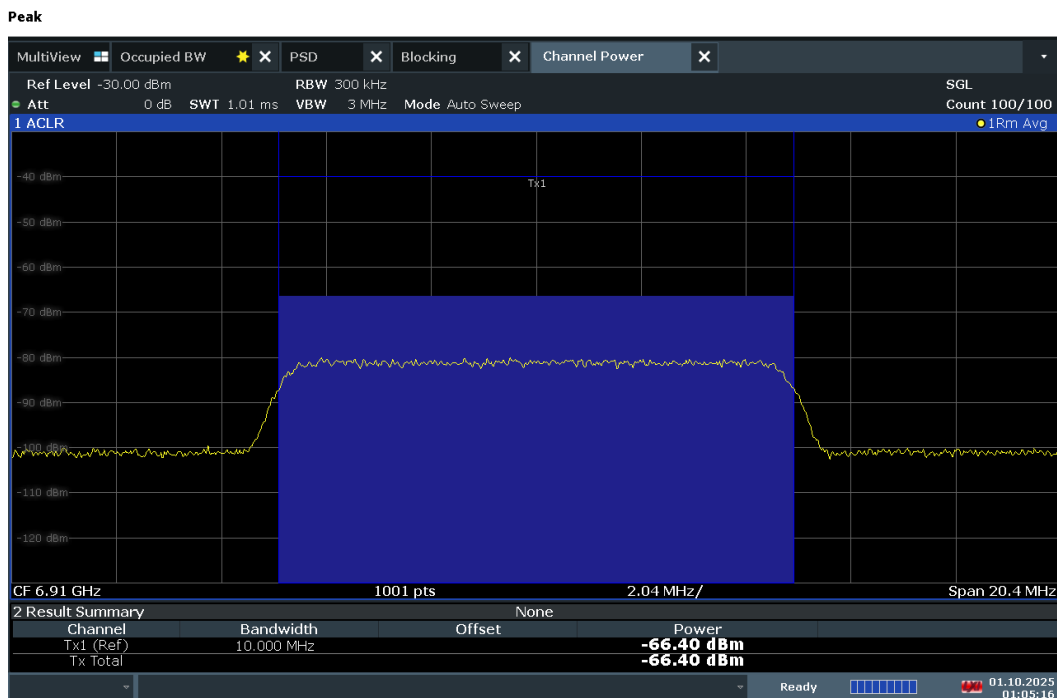


Plot 7-1335. Channel Power – UNII 8 – 160MHz - Low

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 401 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

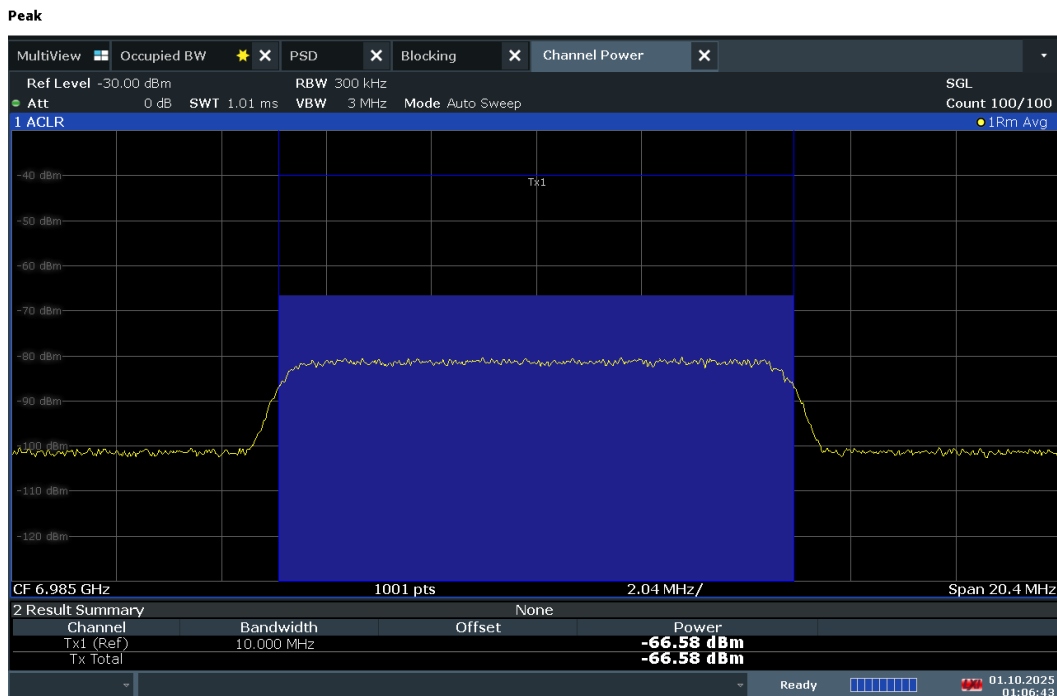

01:06:44 01.10.2025

Plot 7-1336. Channel Power – UNII 8 – 160MHz – Mid

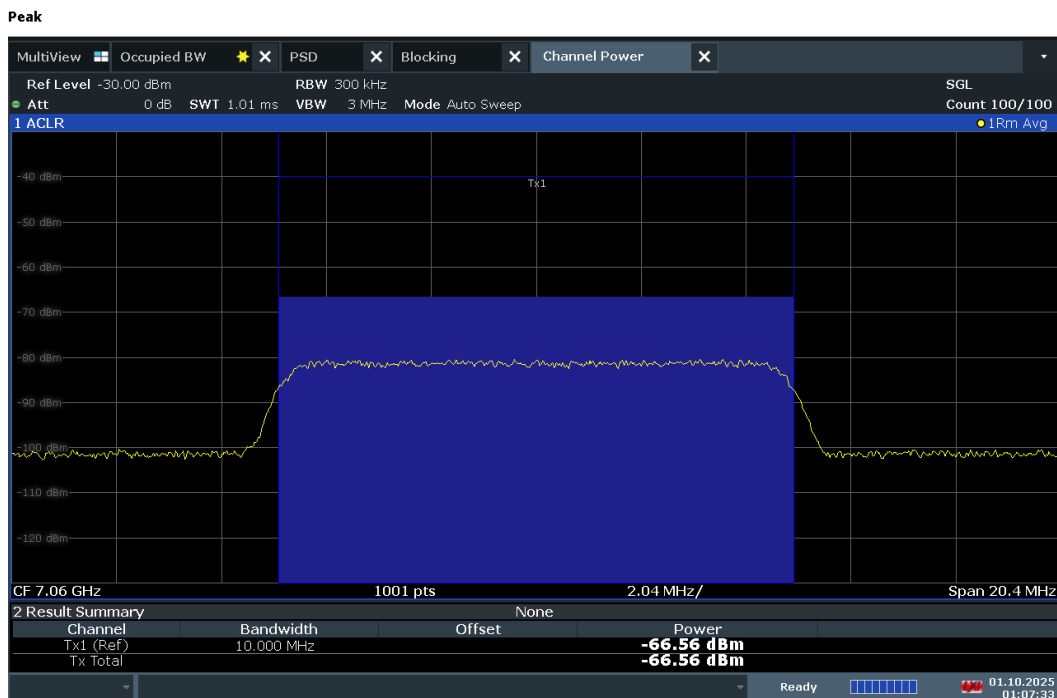

01:07:33 01.10.2025


Plot 7-1337. Channel Power – UNII 8 – 160MHz - High

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 402 of 655

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Contention-Based Protocol Timing Plots

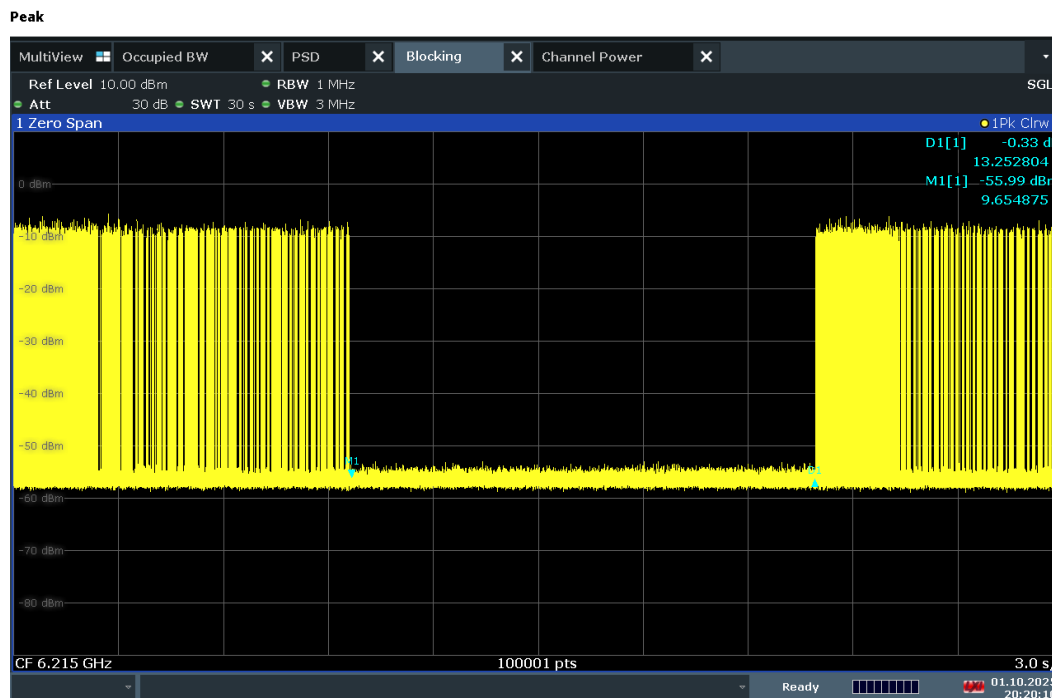

20:20:11 01.10.2025

Plot 7-1338. Contention Based Protocol Timing Plot – UNII 5 – 20MHz Channel 53

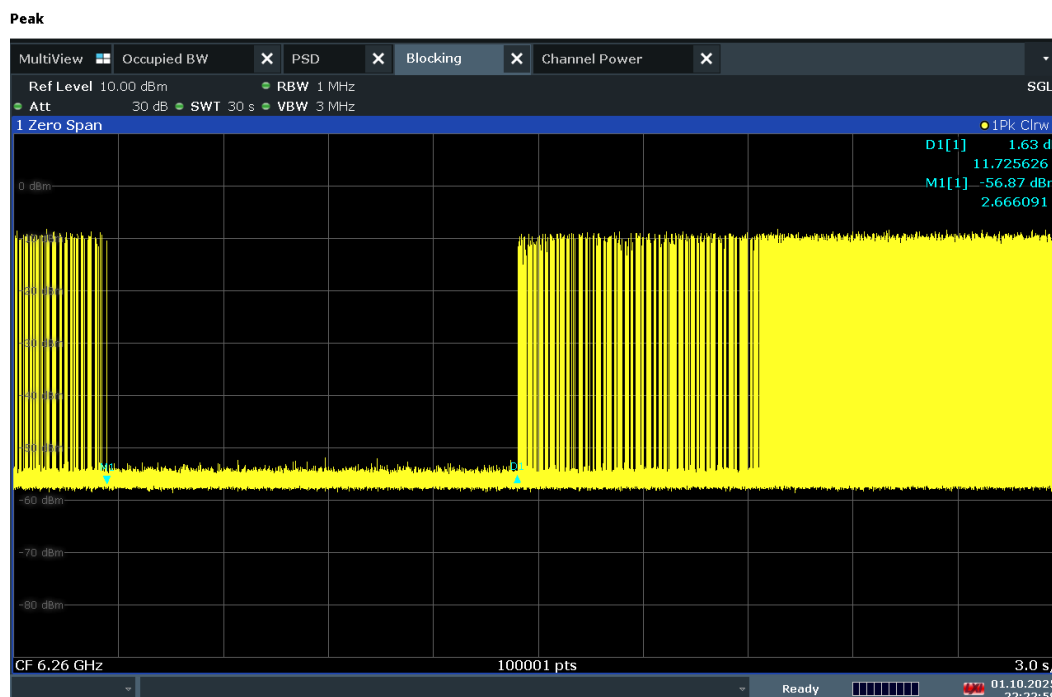


22:22:58 01.10.2025

Plot 7-1339. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – Low

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 403 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

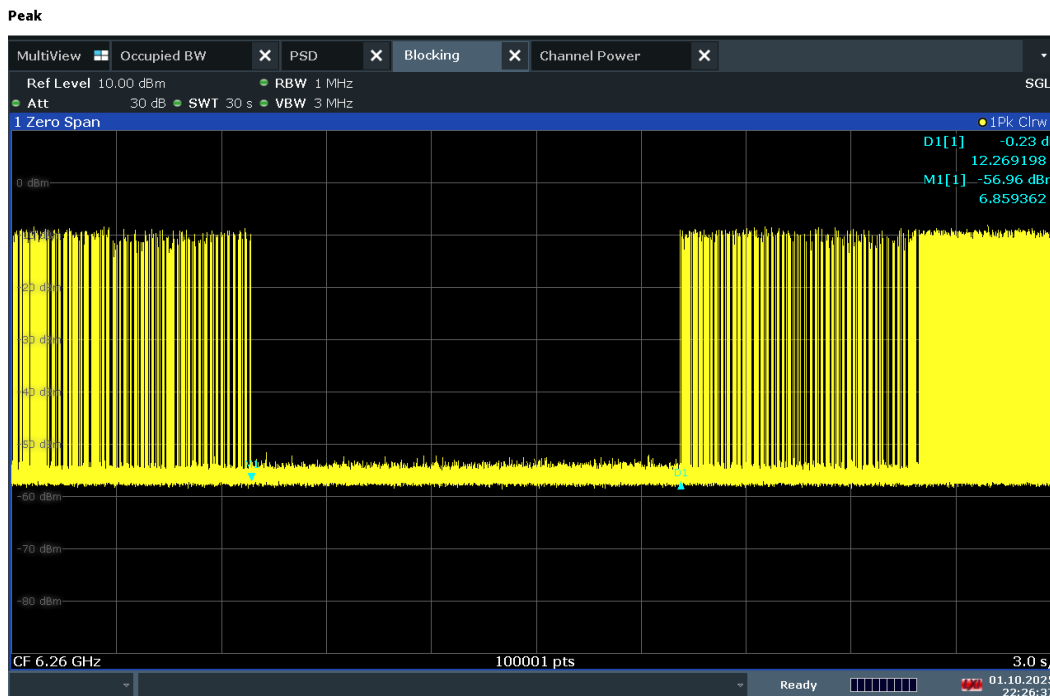

22:26:37 01.10.2025

Plot 7-1340. Contention Based Protocol Timing Plot –UNII 5 – 160MHz Channel 47 – Mid

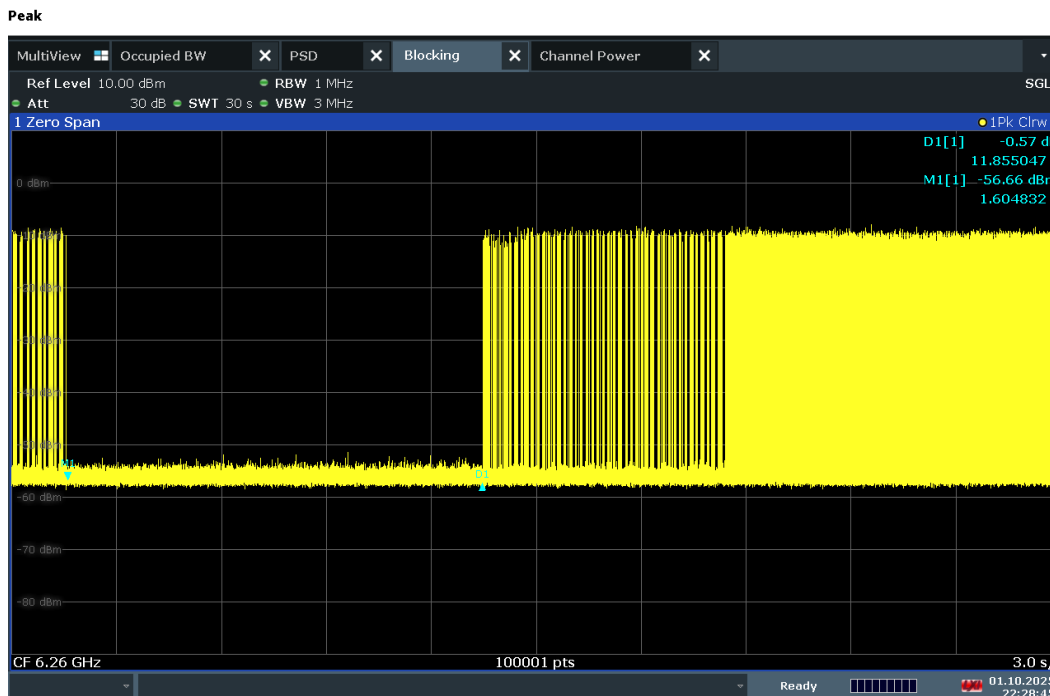


22:28:46 01.10.2025

Plot 7-1341. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – High

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 404 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

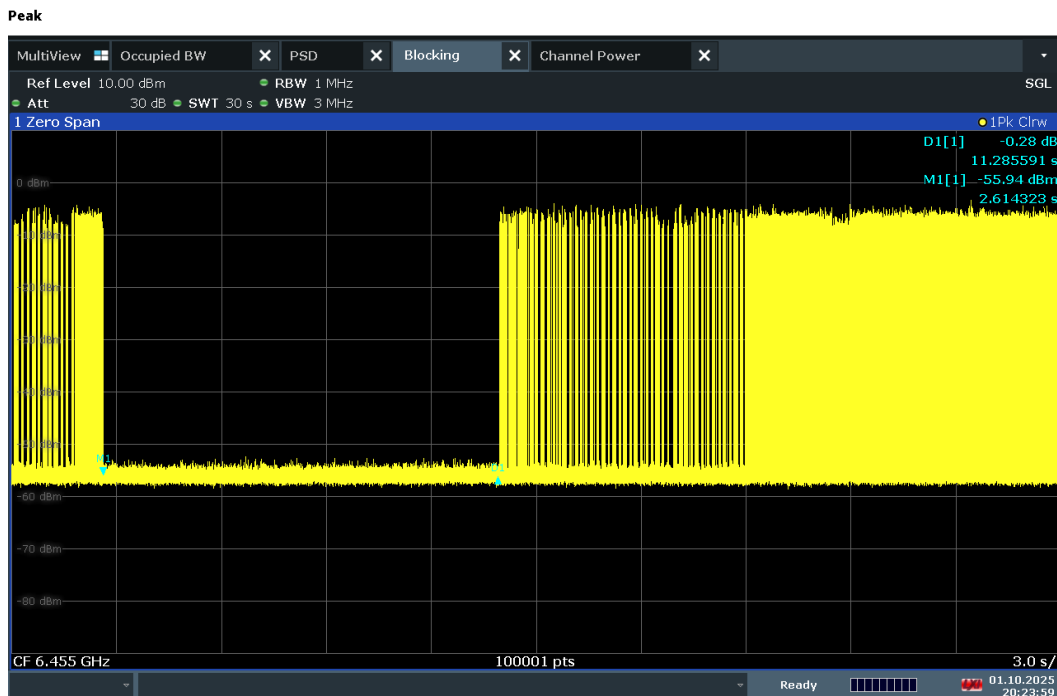

20:24:00 01.10.2025

Plot 7-1342. Contention Based Protocol Timing Plot – UNII 6 – 20MHz Channel 101

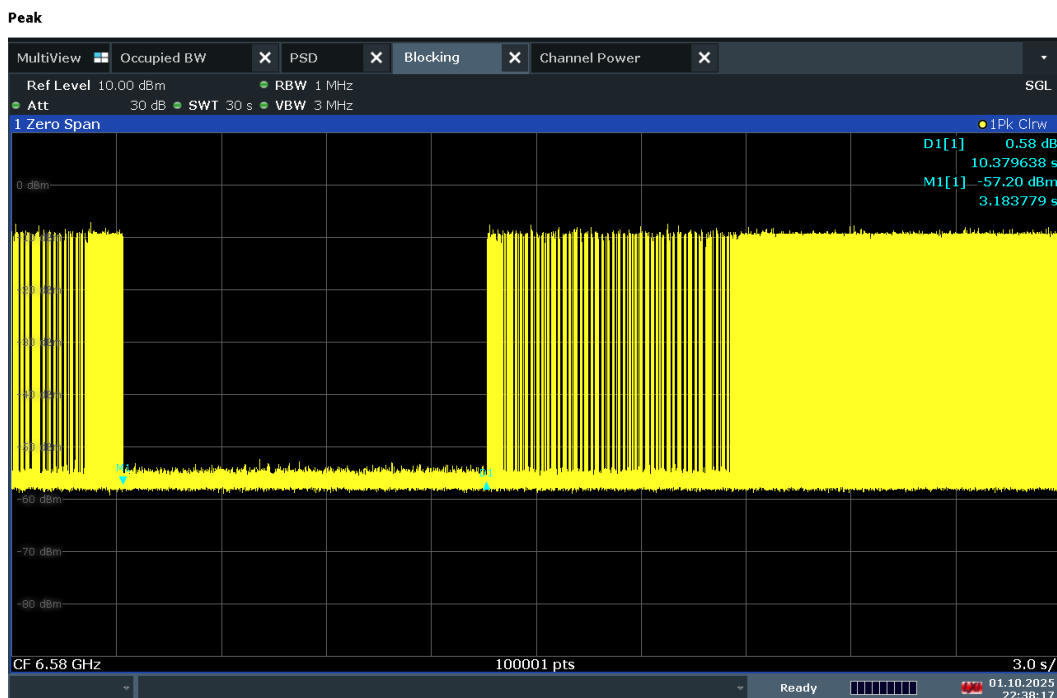


22:38:17 01.10.2025

Plot 7-1343. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Channel 111 – Low

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 405 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

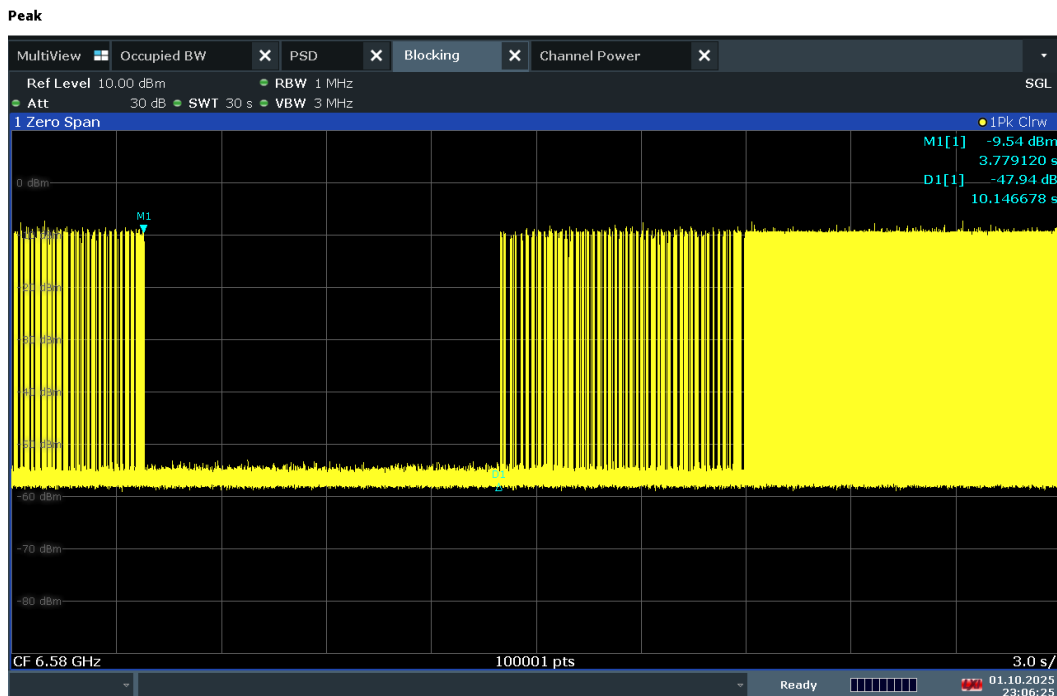

23:06:25 01.10.2025

Plot 7-1344. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Channel 111 – Mid

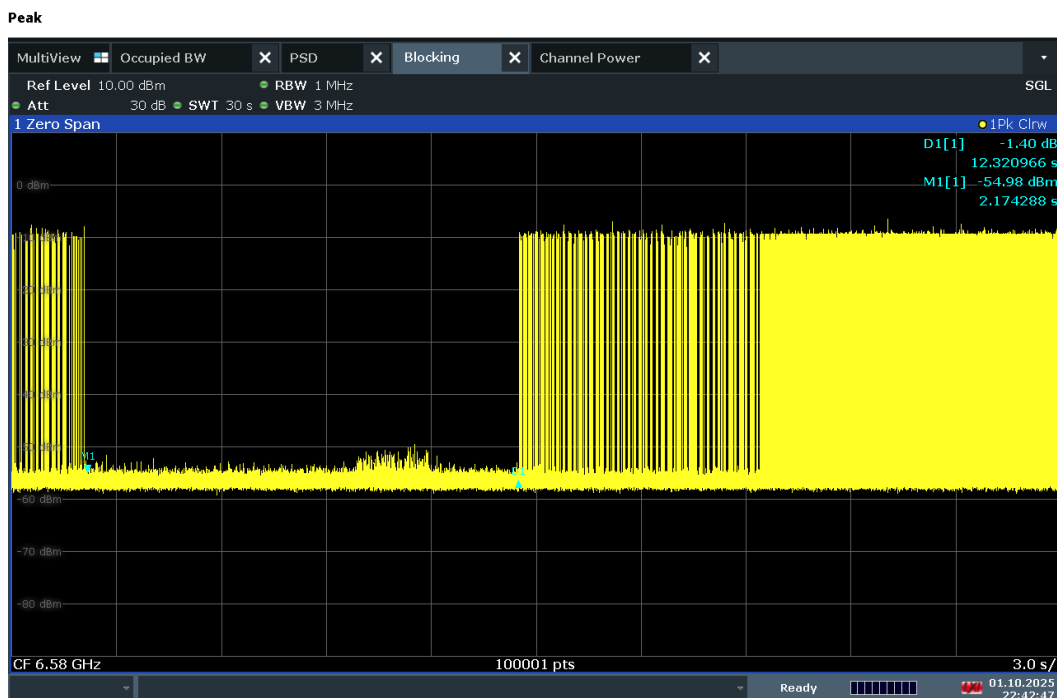


22:42:48 01.10.2025

Plot 7-1345. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Channel 111 – High

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 406 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

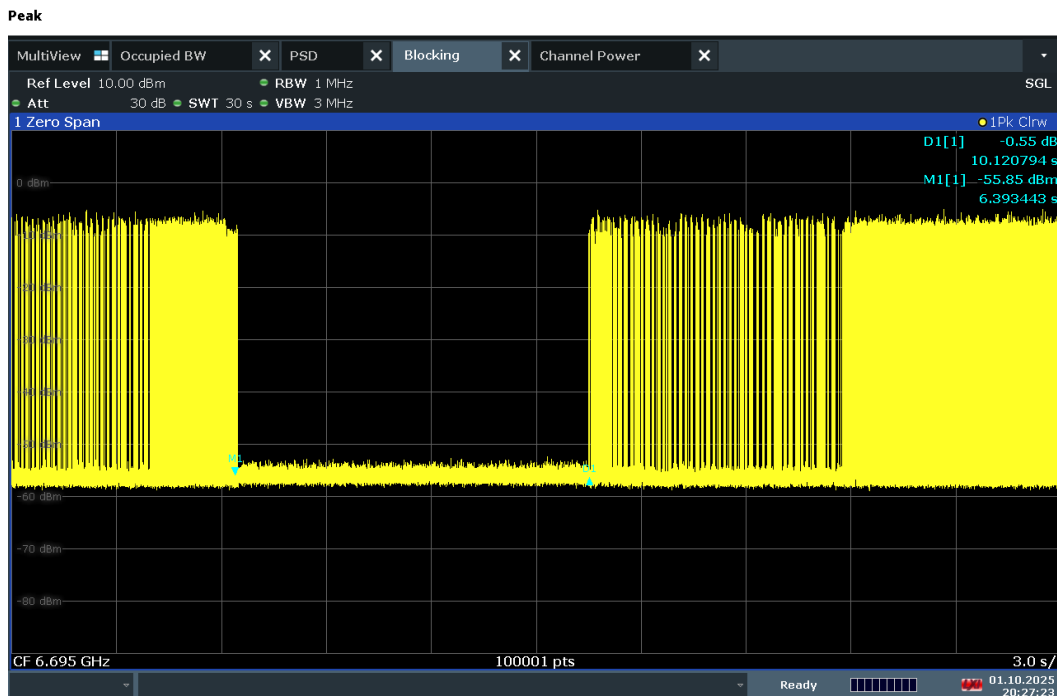

20:27:23 01.10.2025

Plot 7-1346. Contention Based Protocol Timing Plot – UNII 7 – 20MHz Channel 149

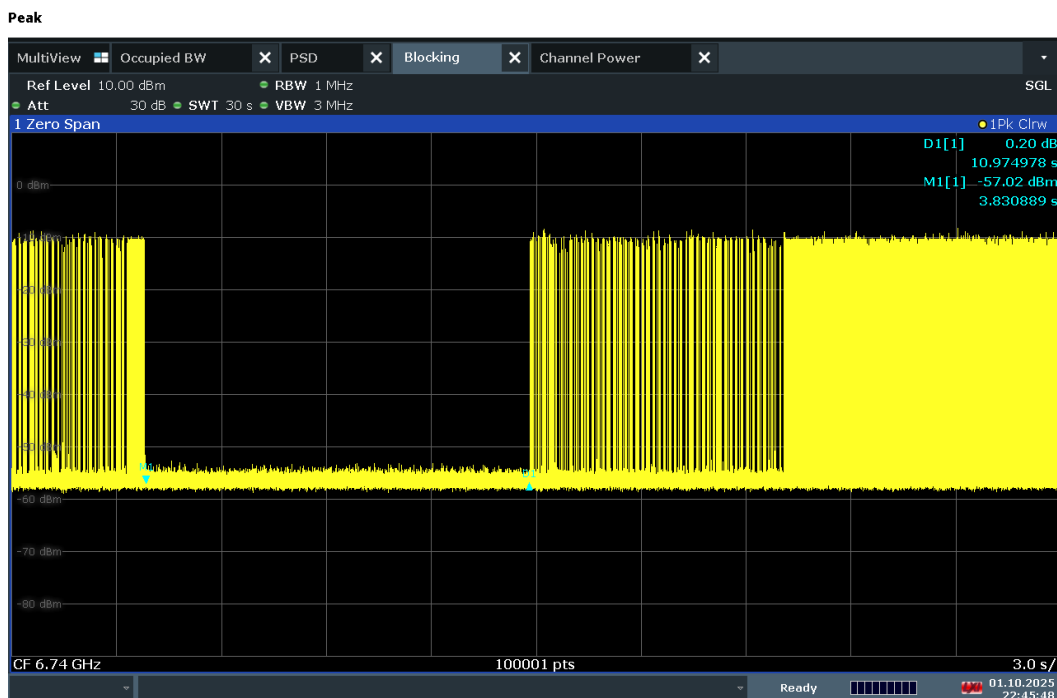


22:45:49 01.10.2025

Plot 7-1347. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – Low

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 407 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

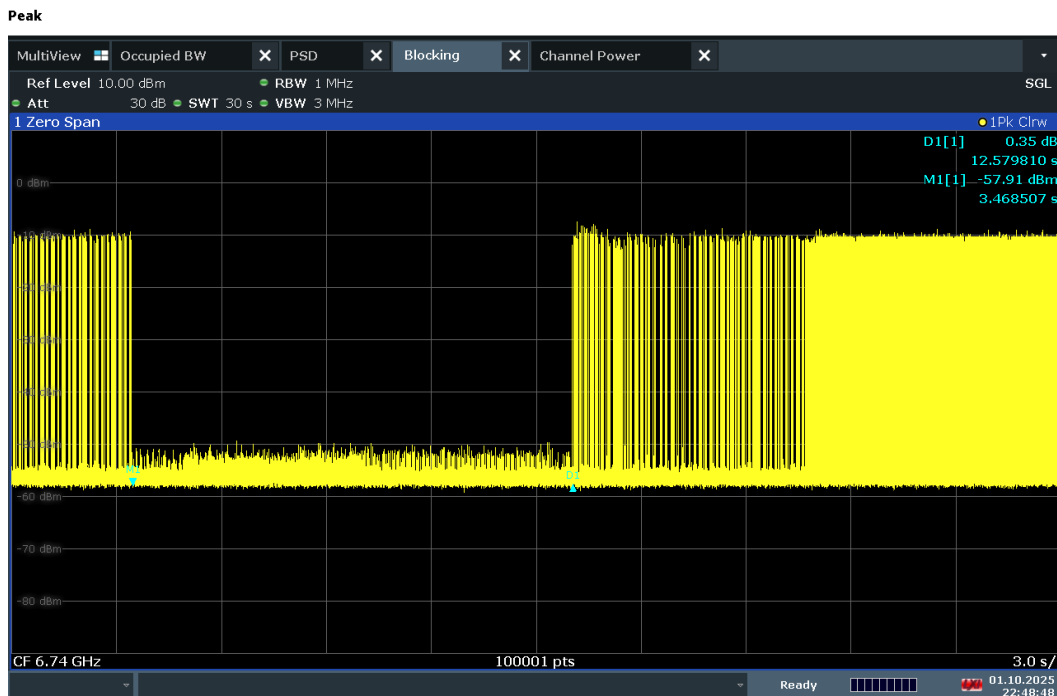

22:48:49 01.10.2025

Plot 7-1348. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – Mid

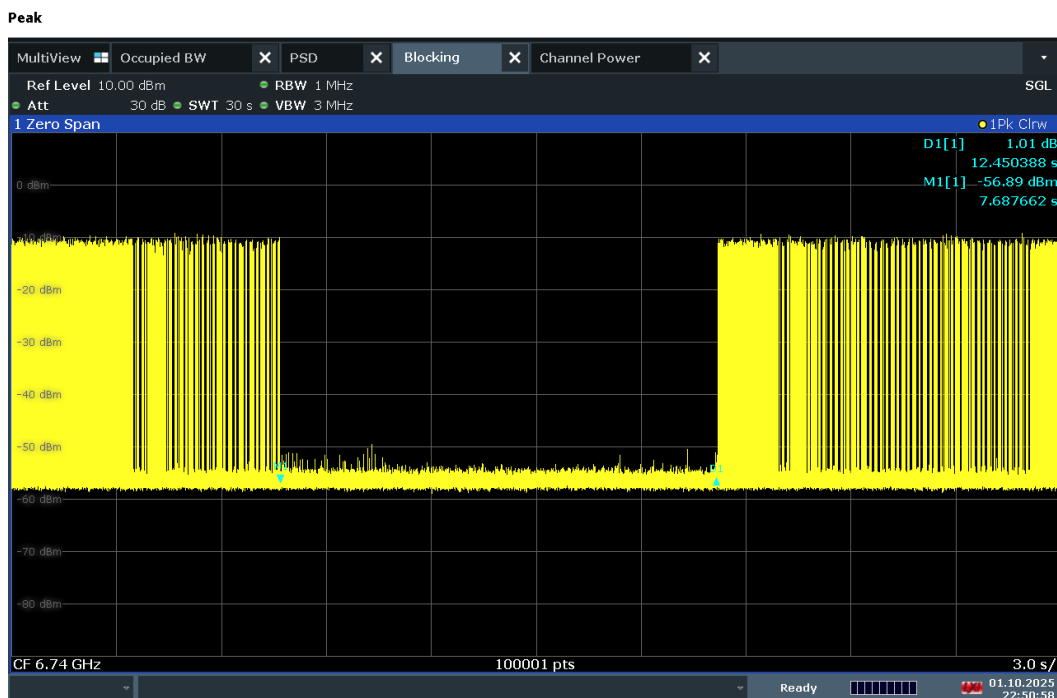


22:50:59 01.10.2025

Plot 7-1349. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – High

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 408 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

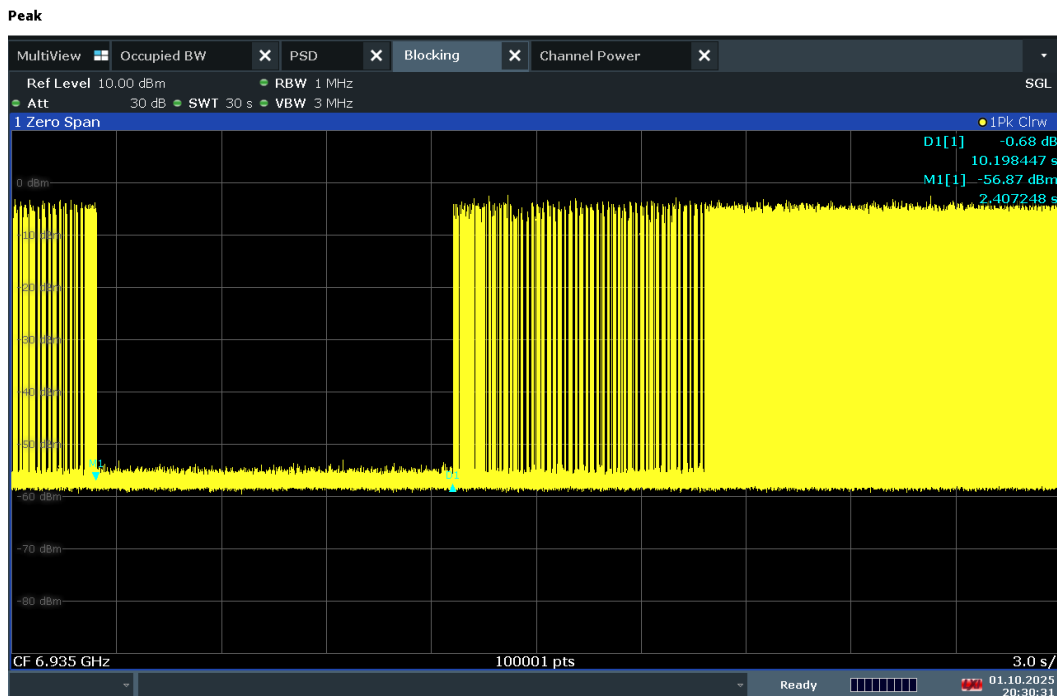

20:30:32 01.10.2025

Plot 7-1350. Contention Based Protocol Timing Plot – UNII 8 – 20MHz Channel 197

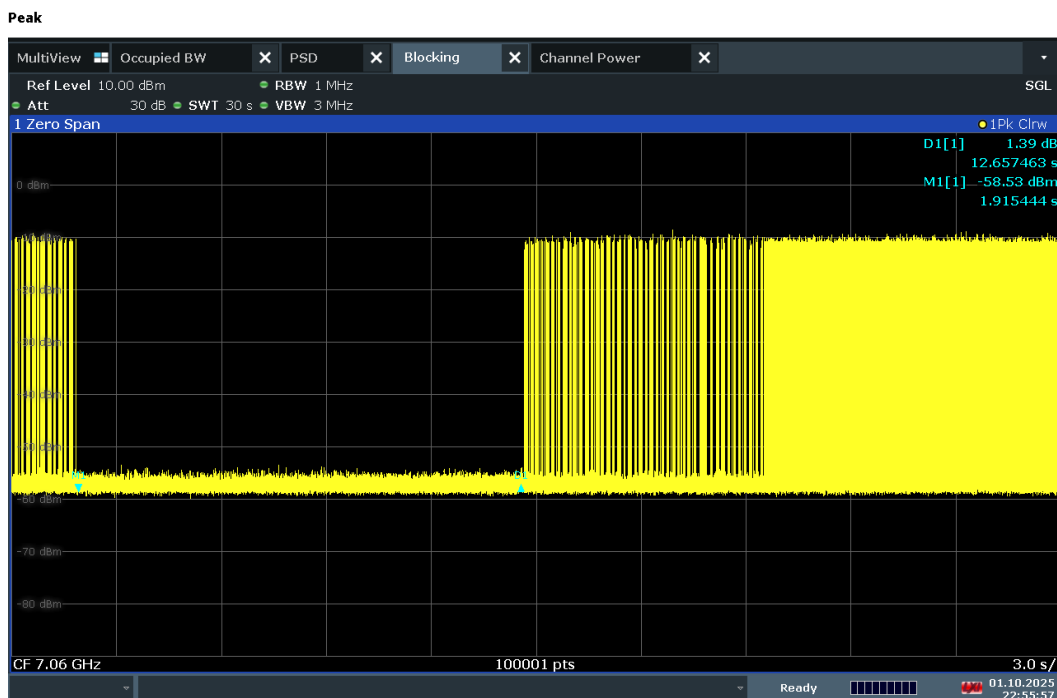


22:55:58 01.10.2025

Plot 7-1351. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Channel 207 – Low

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 409 of 655


V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

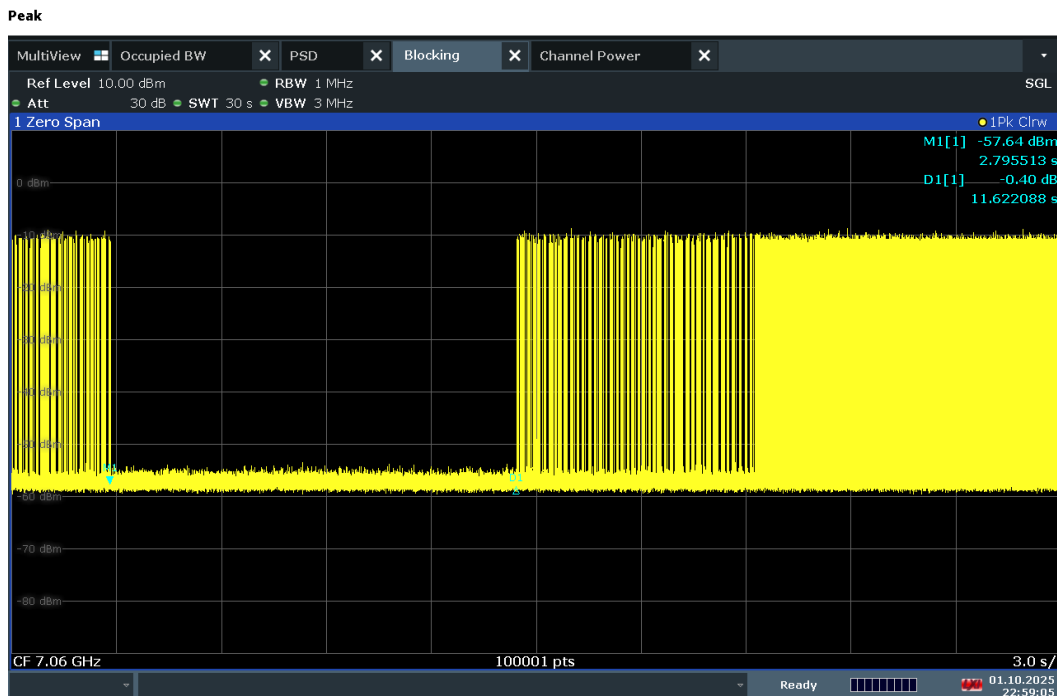

22:59:05 01.10.2025

Plot 7-1352. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Channel 207 – Mid

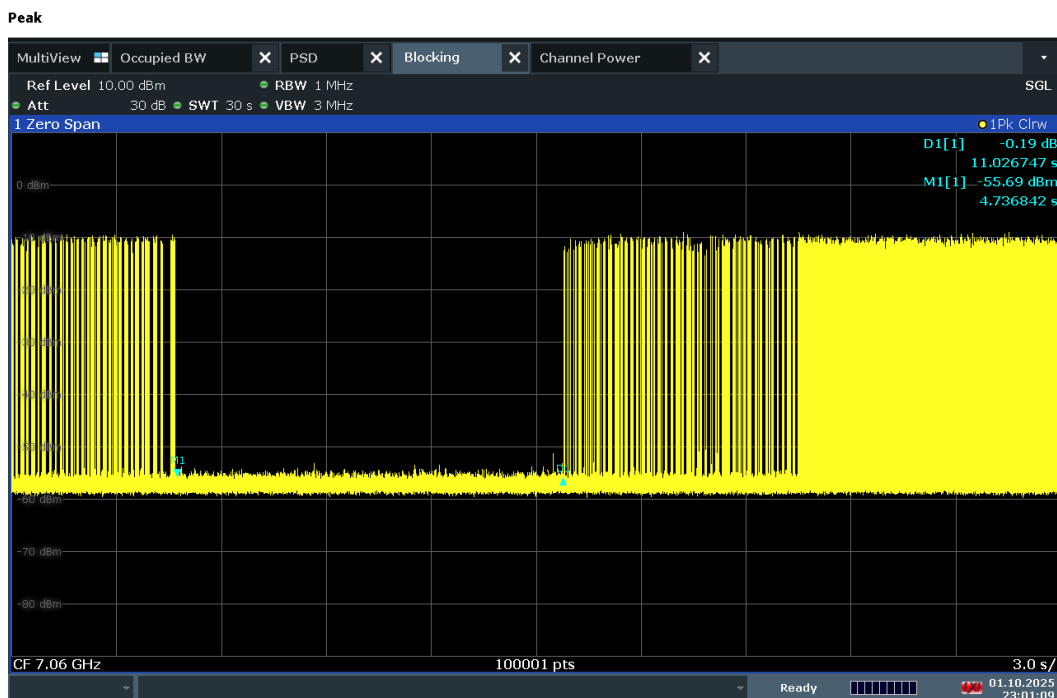

23:01:10 01.10.2025


Plot 7-1353. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Channel 207 – High

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 410 of 655

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bandwidth Reduction Plots

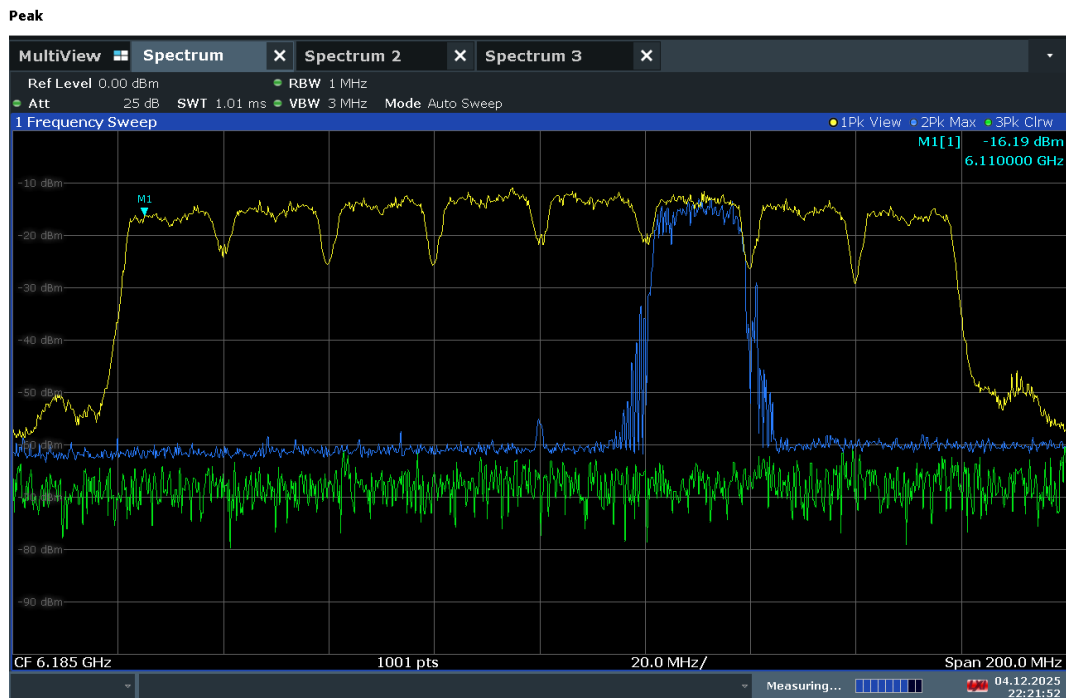

22:21:52 04.12.2025

Plot 7-1354. 160MHz Bandwidth, AWGN Signal Injected – 6110MHz

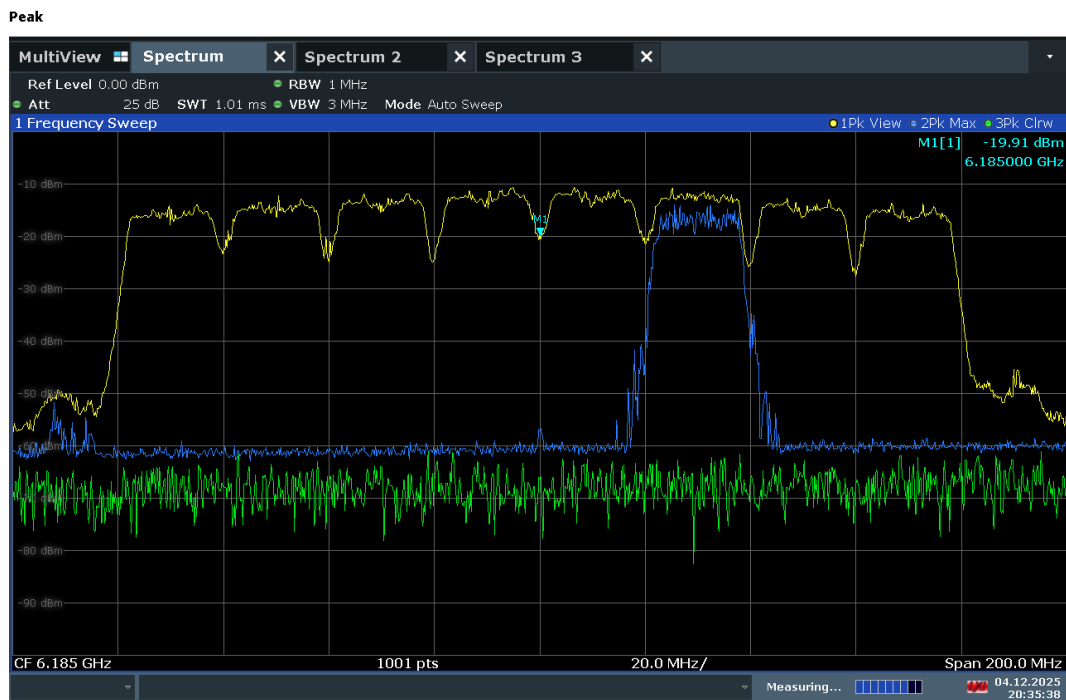


20:35:38 04.12.2025

Plot 7-1355. 160MHz Bandwidth, AWGN Signal Injected – 6185MHz

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 411 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

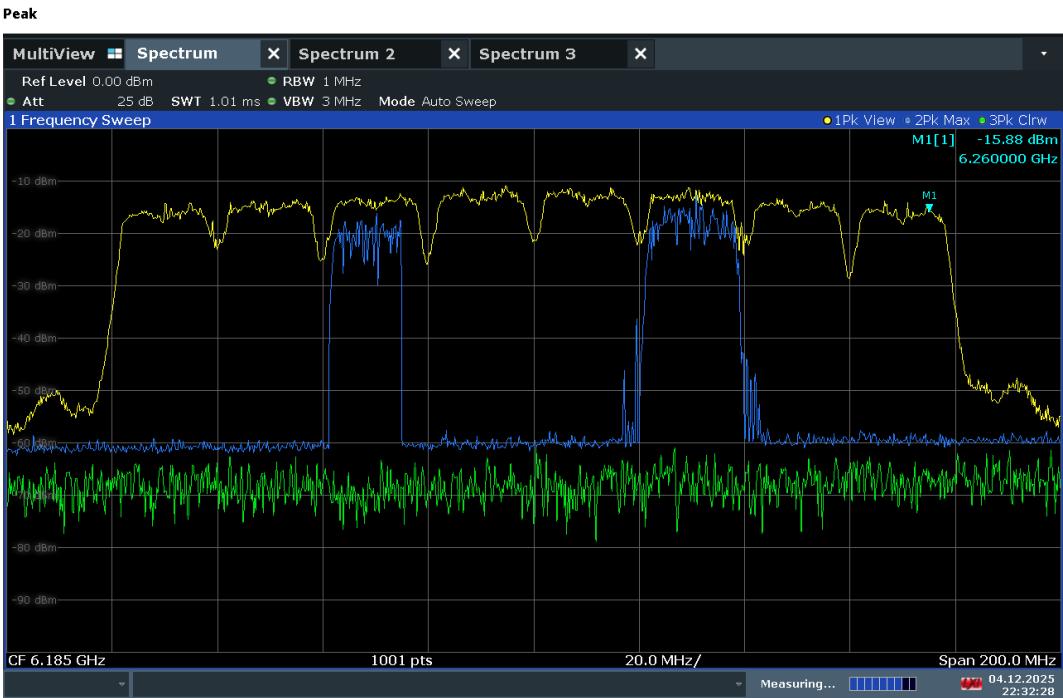

22:32:29 04.12.2025

Plot 7-1356. 160MHz Bandwidth, AWGN Signal Injected – 6260MHz

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 412 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7 Radiated Spurious Emissions – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. RU26, RU52, RU106, RU242, RU484, RU996 and RU996x2) and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.925-7.125 GHz band: All emissions outside of the 5.925-7.125 GHz band shall not exceed an EIRP of -27 dBm/MHz. Emissions found in a restricted band are subject to the limits of 15.209 and RSS-Gen (8.9) as shown in the table below.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-203. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Sections 12.7.7, 12.7.6
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 413 of 655

V 11.0 05/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

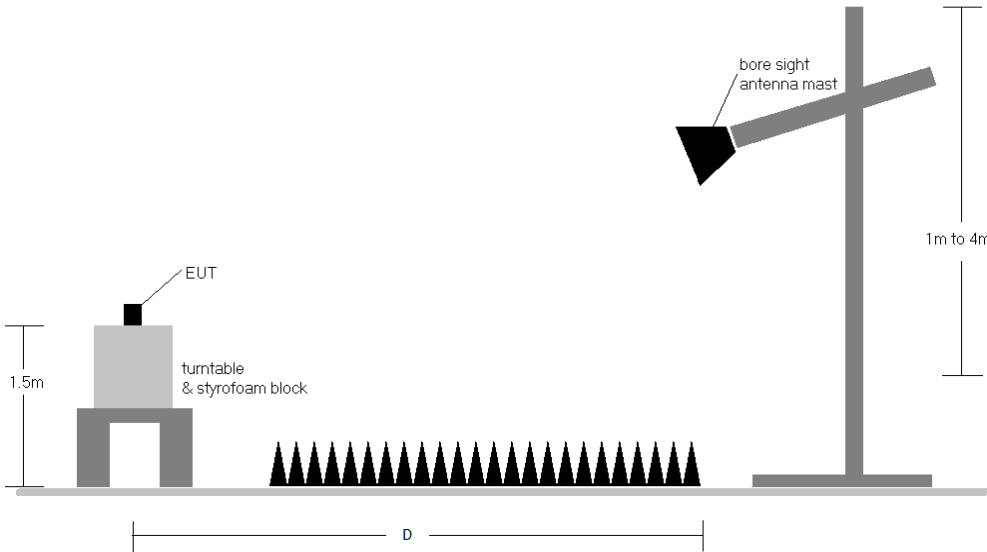


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 414 of 655

V 11.0 05/2025

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and section 8.10 of RSS-Gen are below the limit shown in Table 7-203.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-203. All spurious emissions that do not lie in a restricted band are subject to a limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
5. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
6. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
7. All data rates were investigated and only the worse case is reported
8. The unit was tested with all possible modes and only the highest emission is reported.
9. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
10. All radiated measurements were tested at the highest supported power setting per band.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7.3 to 7.7.22 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 415 of 655

V 11.0 05/2025

7.7.1 CDD/SDM Primary Radiated Spurious Emission

RU26

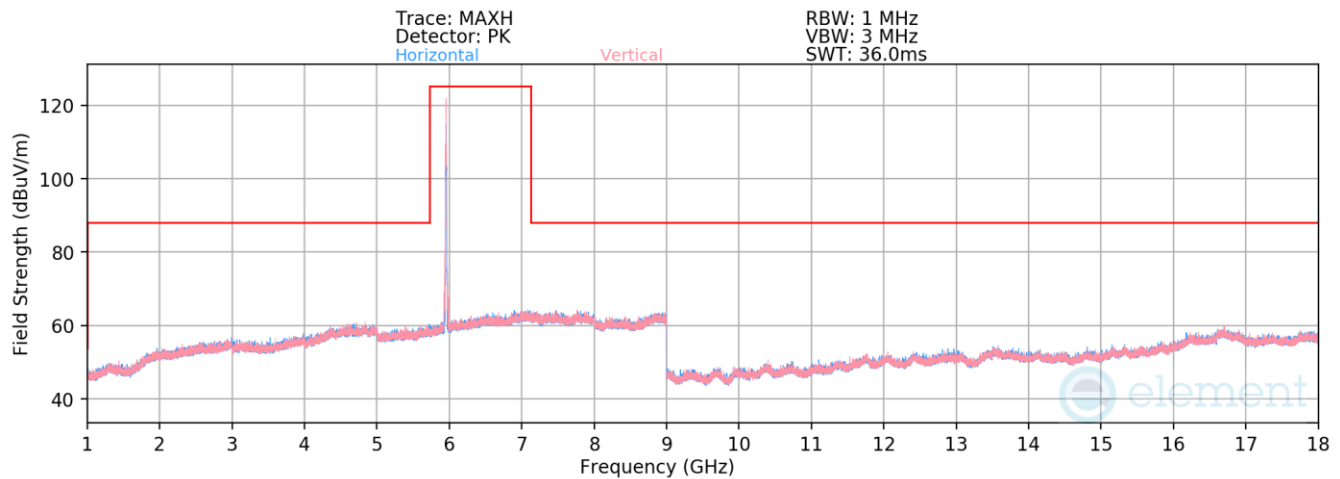

Plot 7-1357. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 1 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11910.00	Average	H	-	-	-84.60	16.75	39.15	53.98	-14.83
* 11910.00	Peak	H	-	-	-73.01	16.75	50.74	73.98	-23.24
* 17865.00	Average	V	-	-	-84.37	24.80	47.43	53.98	-6.55
* 17865.00	Peak	V	-	-	-73.35	24.80	58.46	73.98	-15.52


Table 7-204. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 416 of 655

V 11.0 05/2025

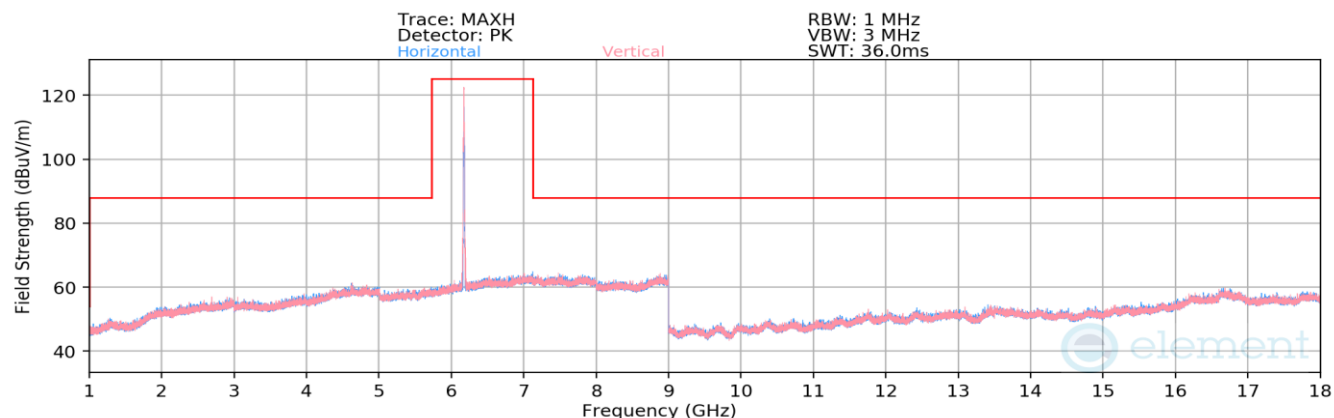

Plot 7-1358. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 45 – RU26)

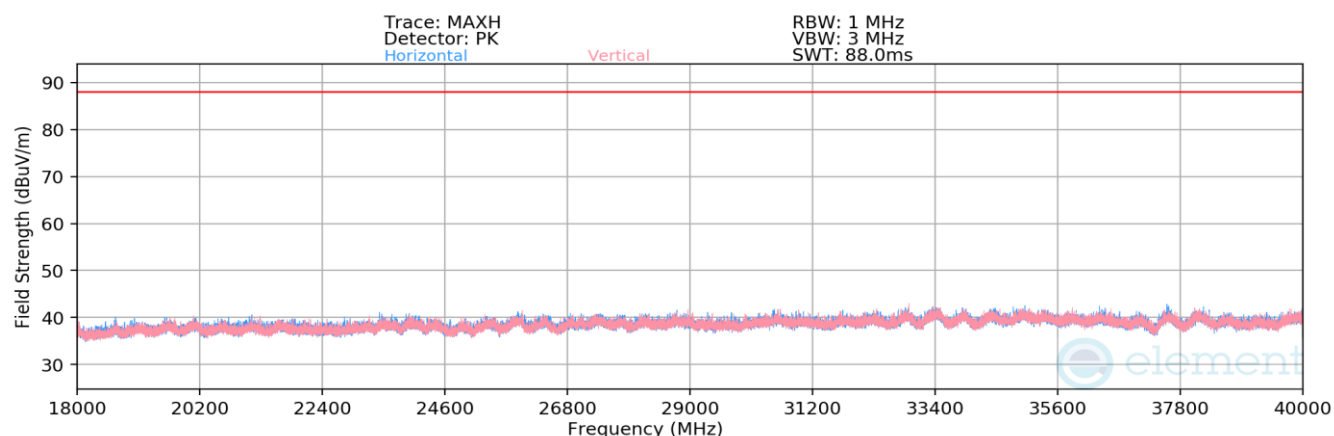

Plot 7-1359. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 45 – RU26)

Mode:	<u>802.11be</u>
Data Rate:	<u>MCS0</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>6175MHz</u>
Channel:	<u>45</u>

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 417 of 655

V 11.0 05/2025


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	12350.00	Average	V	-	-	-84.38	17.48	0.00	40.10	53.98	-13.88
*	12350.00	Peak	V	-	-	-72.99	17.48	0.00	51.49	73.98	-22.49
*	18525.00	Average	V	-	-	-61.91	-7.31	-9.54	28.23	53.98	-25.75
*	18525.00	Peak	V	-	-	-50.81	-7.31	-9.54	39.33	73.98	-34.65
	24700.00	Average	H	-	-	-62.53	-6.56	-9.54	28.37	68.23	-39.86
	24700.00	Peak	H	-	-	-51.74	-6.56	-9.54	39.16	88.23	-49.07
	30875.00	Average	V	-	-	-63.72	-3.64	-9.54	30.10	68.23	-38.13
	30875.00	Peak	V	-	-	-52.13	-3.64	-9.54	41.68	88.23	-46.55

Table 7-205. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 418 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

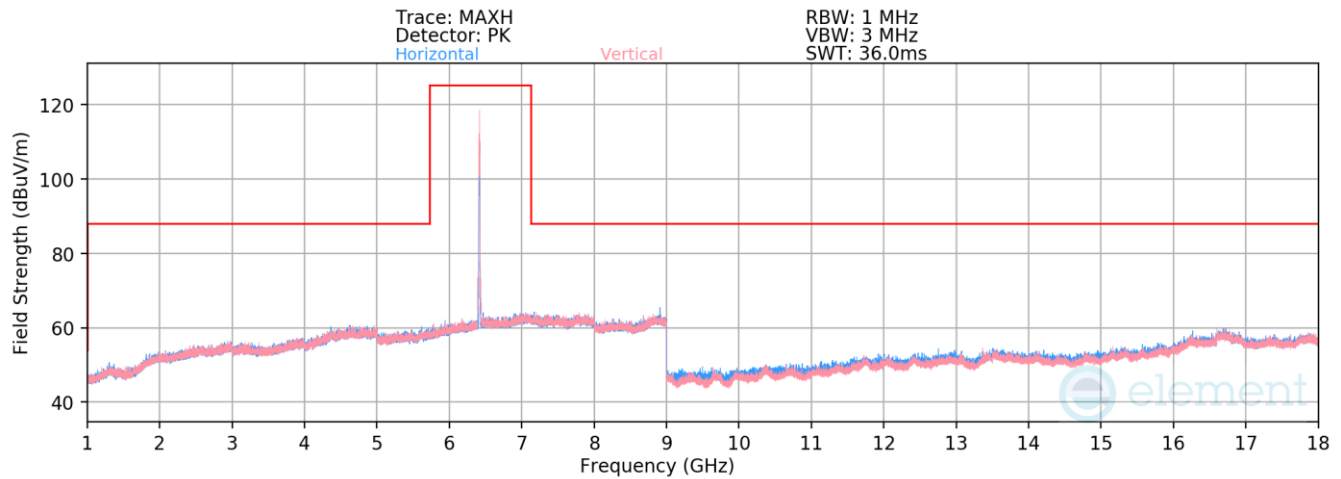

Plot 7-1360. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 93 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	H	-	-	-83.08	18.34	42.25	68.23	-25.98
12830.00	Peak	H	-	-	-71.76	18.34	53.58	88.23	-34.65

Table 7-206. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 419 of 655

V 11.0 05/2025

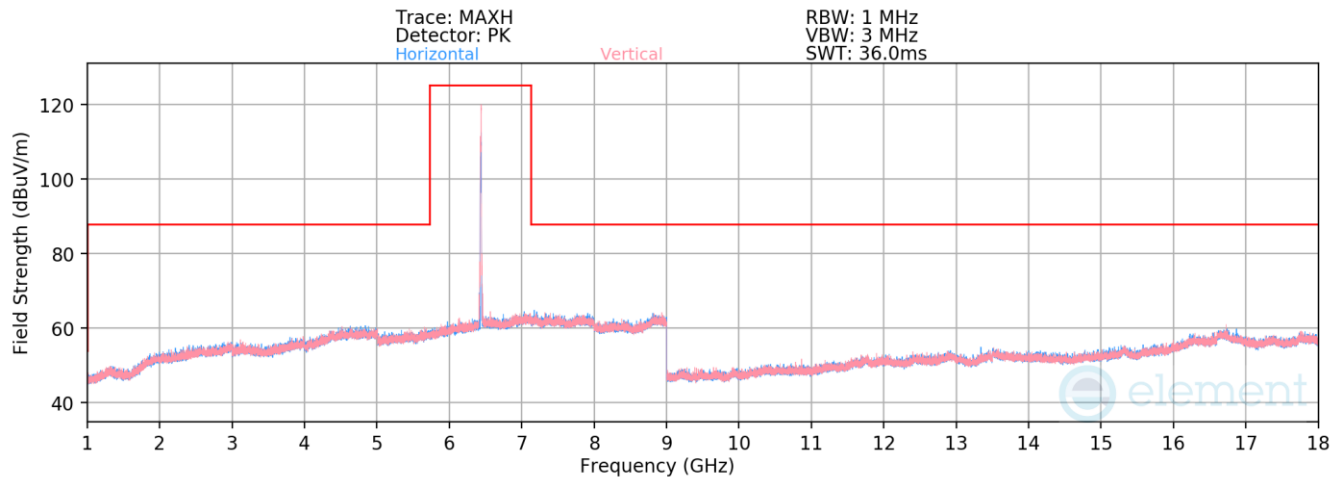

Plot 7-1361. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 97 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	V	-	-	-83.08	18.22	42.14	68.23	-26.09
12870.00	Peak	V	-	-	-71.24	18.22	53.98	88.23	-34.25


Table 7-207. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device		Page 420 of 655

V 11.0 05/2025

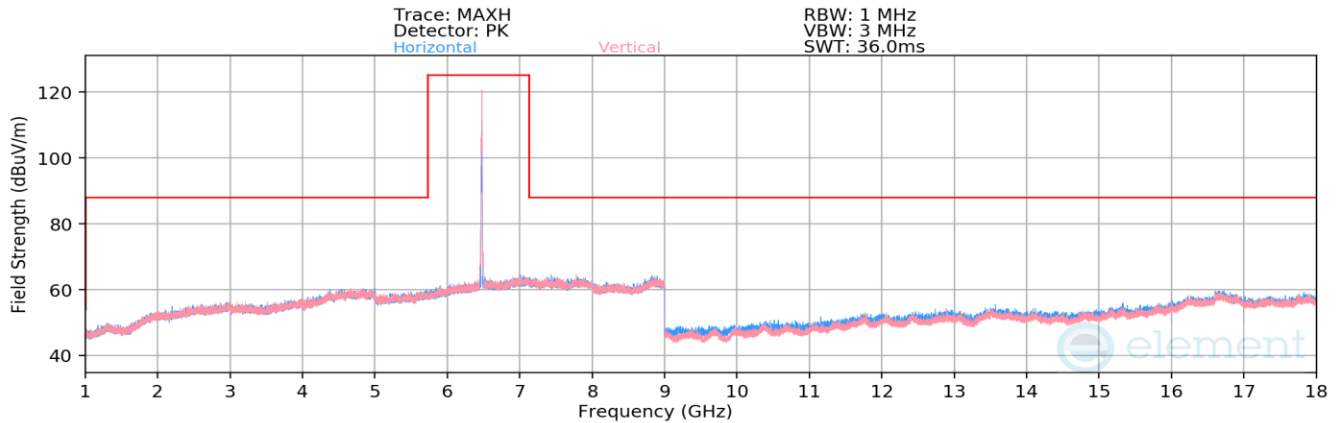

Plot 7-1362. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 105 – RU26)

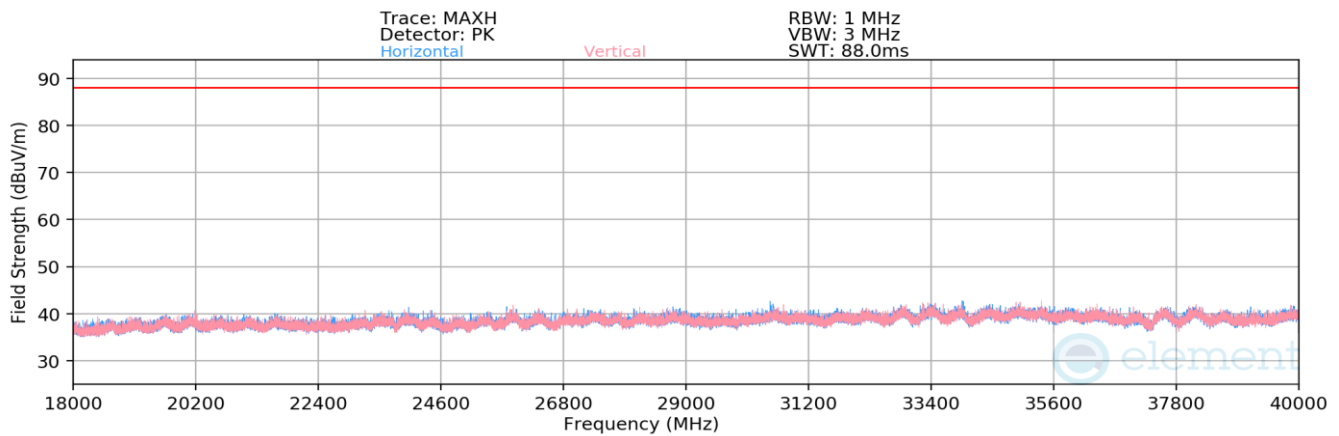

Plot 7-1363. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 105 – RU26)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6475MHz
Channel:	105

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 421 of 655

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	H	-	-	-83.49	18.82	0.00	42.33	68.23	-25.90
12950.00	Peak	H	-	-	-70.82	18.82	0.00	55.00	88.23	-33.23
* 19425.00	Average	V	-	-	-61.53	-7.74	-9.54	28.18	53.98	-25.80
* 19425.00	Peak	V	-	-	-49.48	-7.74	-9.54	40.24	73.98	-33.74
25900.00	Average	V	-	-	-61.37	-5.82	-9.54	30.26	68.23	-37.97
25900.00	Peak	V	-	-	-49.85	-5.82	-9.54	41.78	88.23	-46.45
32375.00	Average	V	-	-	-63.43	-3.56	-9.54	30.46	68.23	-37.77
32375.00	Peak	V	-	-	-52.25	-3.56	-9.54	41.64	88.23	-46.59

Table 7-208. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 422 of 655

V 11.0 05/2025

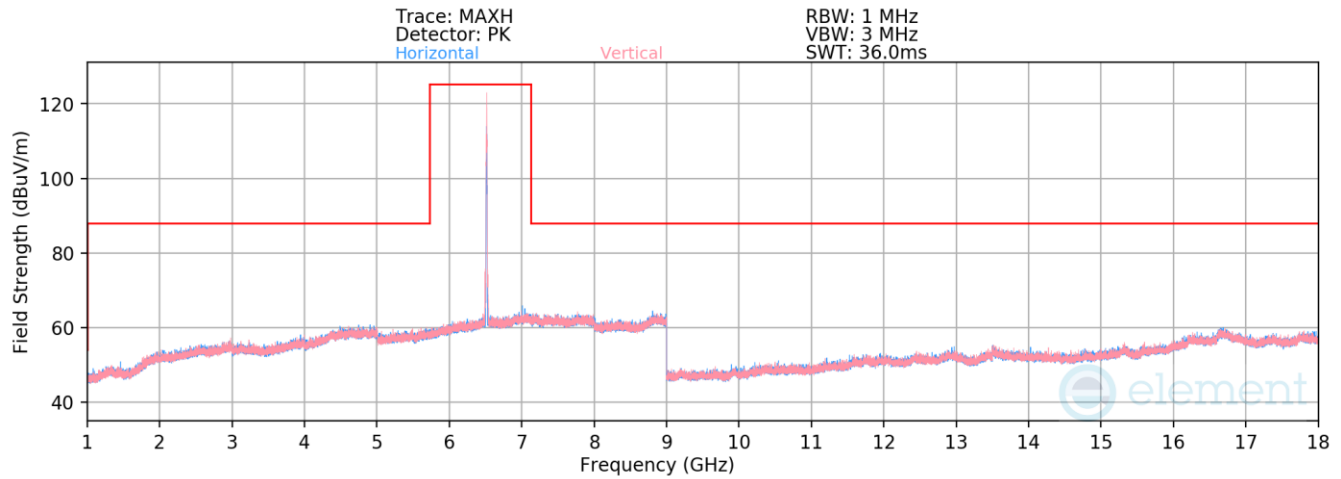

Plot 7-1364. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 113 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	H	-	-	-83.39	18.50	42.11	68.23	-26.12
13030.00	Peak	H	-	-	-71.42	18.50	54.08	88.23	-34.15

Table 7-209. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 423 of 655

V 11.0 05/2025

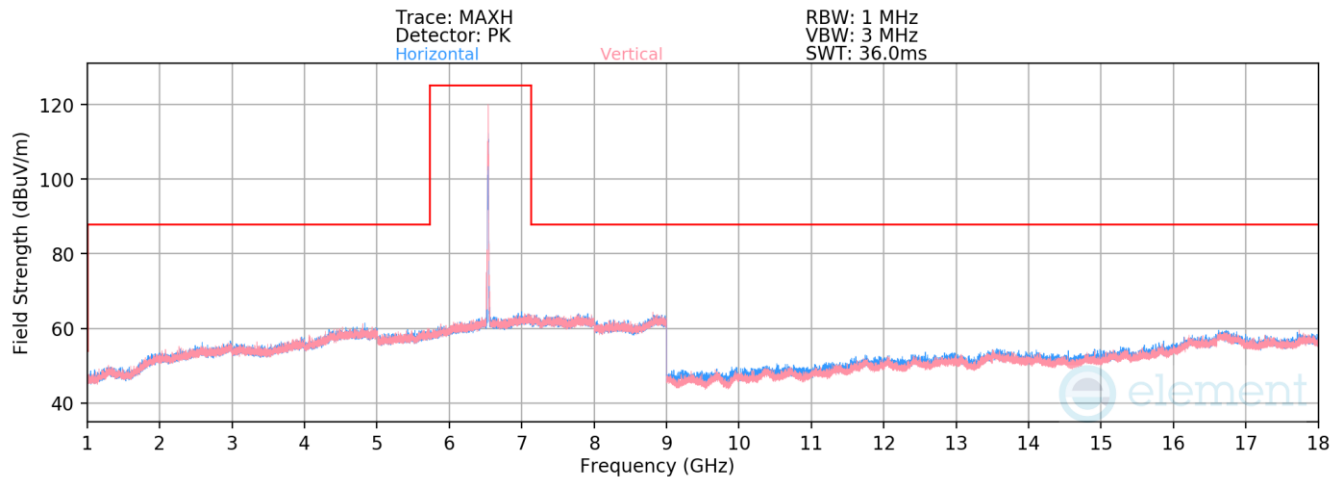

Plot 7-1365. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 117 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Average	H	-	-	-83.62	18.76	42.14	68.23	-26.09
13070.00	Peak	H	-	-	-72.22	18.76	53.53	88.23	-34.70


Table 7-210. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 424 of 655

V 11.0 05/2025

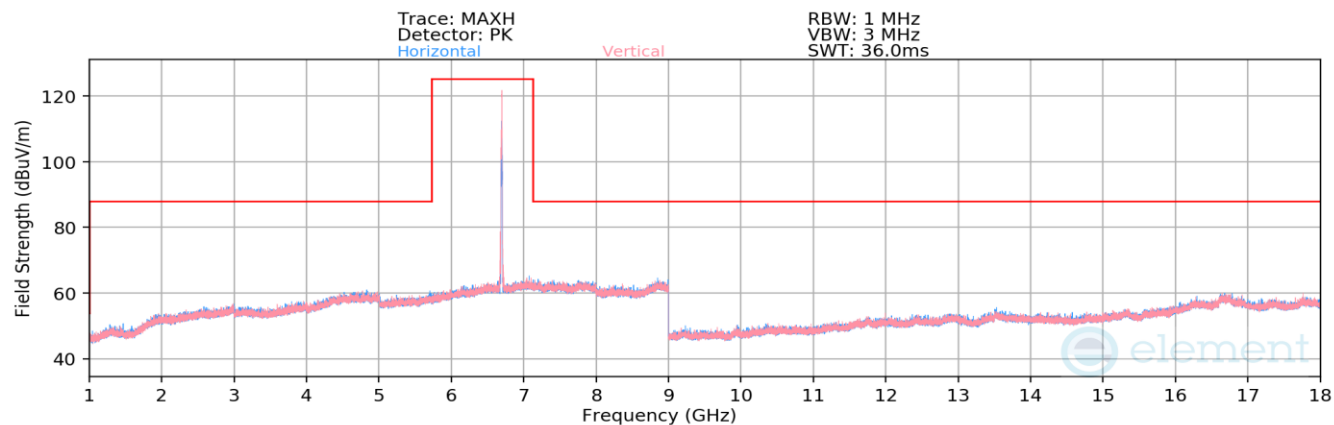

Plot 7-1366. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 149 – RU26)

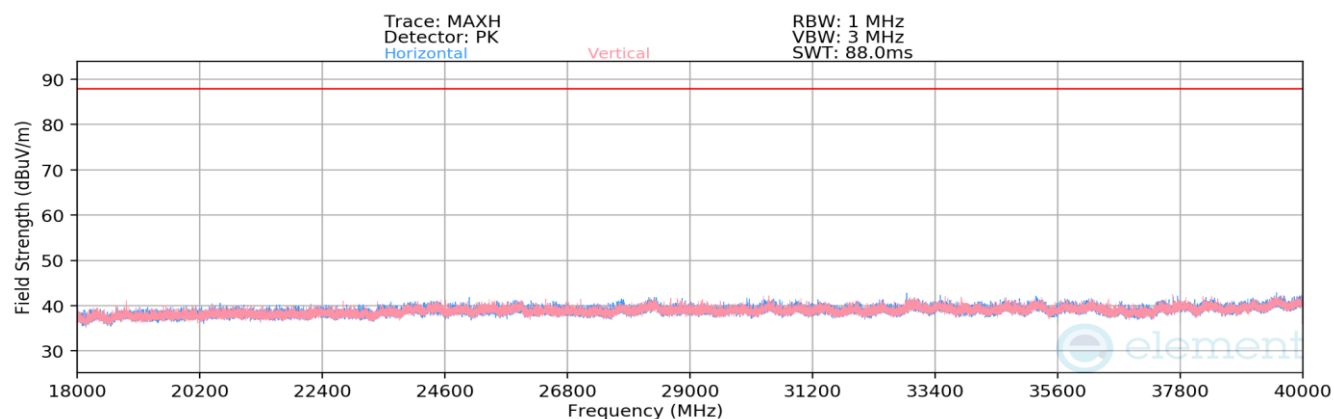

Plot 7-1367. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 149 – RU26)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695MHz
Channel:	149

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 425 of 655

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-84.34	18.39	0.00	41.05	53.98	-12.93
* 13390.00	Peak	V	-	-	-72.82	18.39	0.00	52.57	73.98	-21.41
* 20085.00	Average	V	-	-	-65.23	-6.33	-9.54	25.90	53.98	-28.08
* 20085.00	Peak	V	-	-	-51.33	-6.33	-9.54	39.80	73.98	-34.18
26780.00	Average	H	-	-	-65.93	-5.50	-9.54	26.02	68.23	-42.21
26780.00	Peak	H	-	-	-52.48	-5.50	-9.54	39.48	88.23	-48.75
33475.00	Average	V	-	-	-66.68	-4.24	-9.54	26.54	68.23	-41.69
33475.00	Peak	V	-	-	-52.90	-4.24	-9.54	40.31	88.23	-47.92

Table 7-211. Radiated Spurious Emission Measurements CDD Primary – RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 426 of 655

V 11.0 05/2025

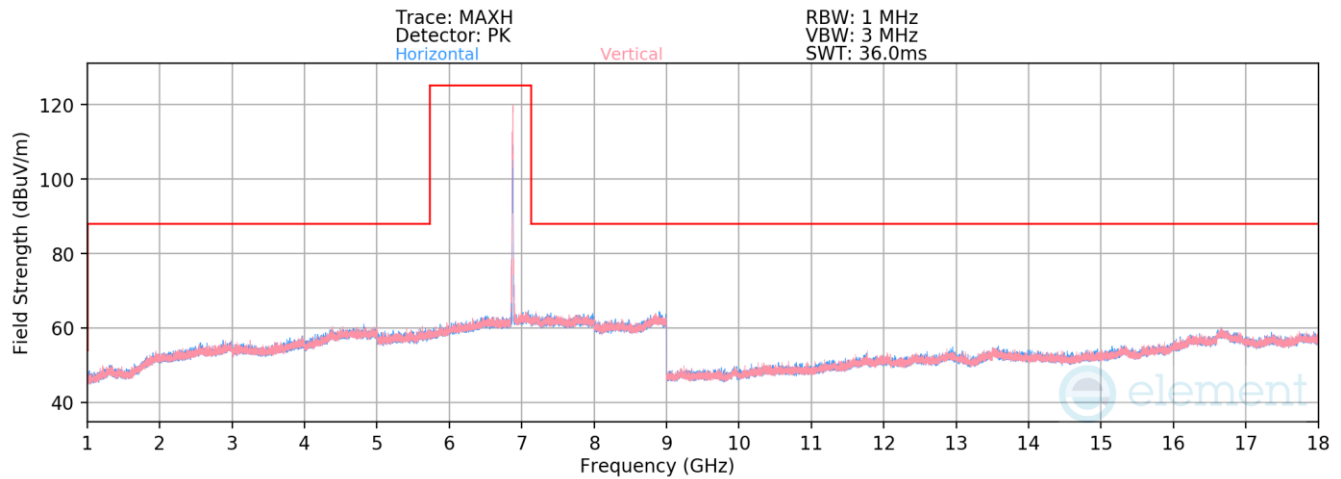

Plot 7-1368. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 185 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6875MHz
Channel: 185


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13750.00	Average	H	-	-	-83.27	18.51	42.24	68.23	-25.99
13750.00	Peak	H	-	-	-72.14	18.51	53.37	88.23	-34.86

Table 7-212. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device		Page 427 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

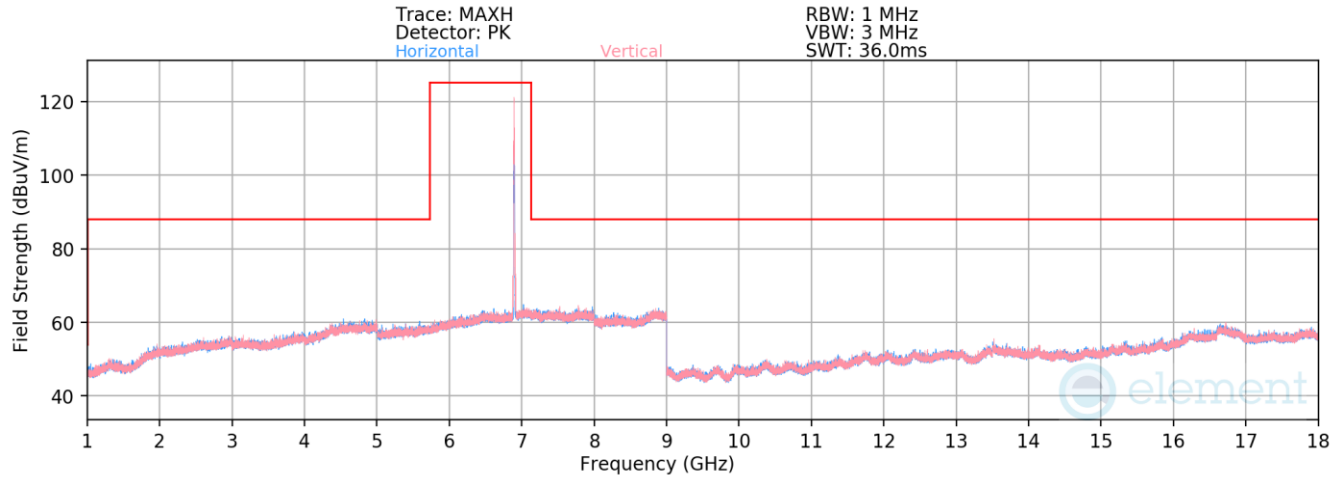

Plot 7-1369. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 189 – RU26)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6895MHz
Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13790.00	Average	H	-	-	-83.85	18.53	41.67	68.23	-26.56
13790.00	Peak	H	-	-	-72.37	18.53	53.16	88.23	-35.07


Table 7-213. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 428 of 655

V 11.0 05/2025

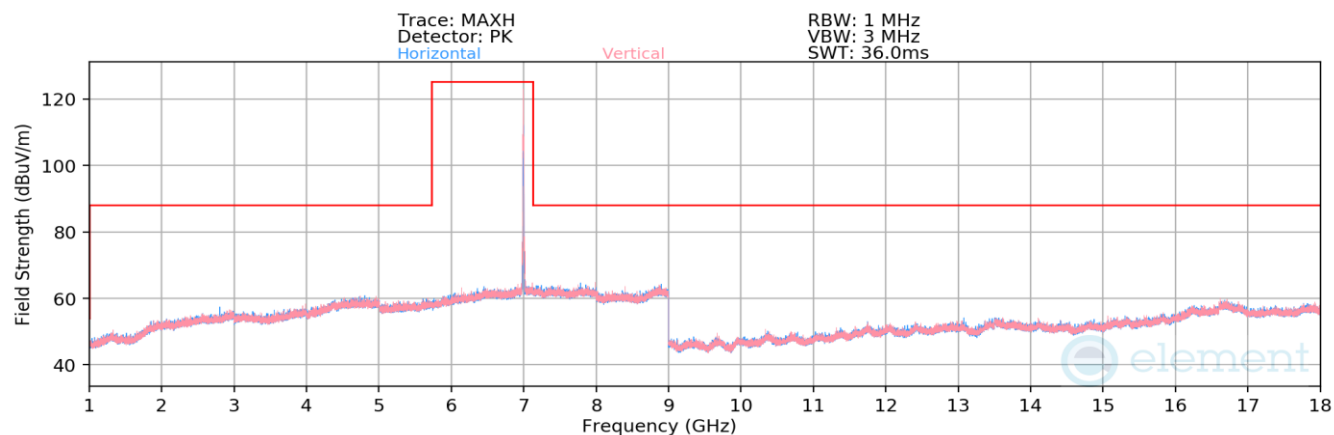

Plot 7-1370. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 209 – RU26)

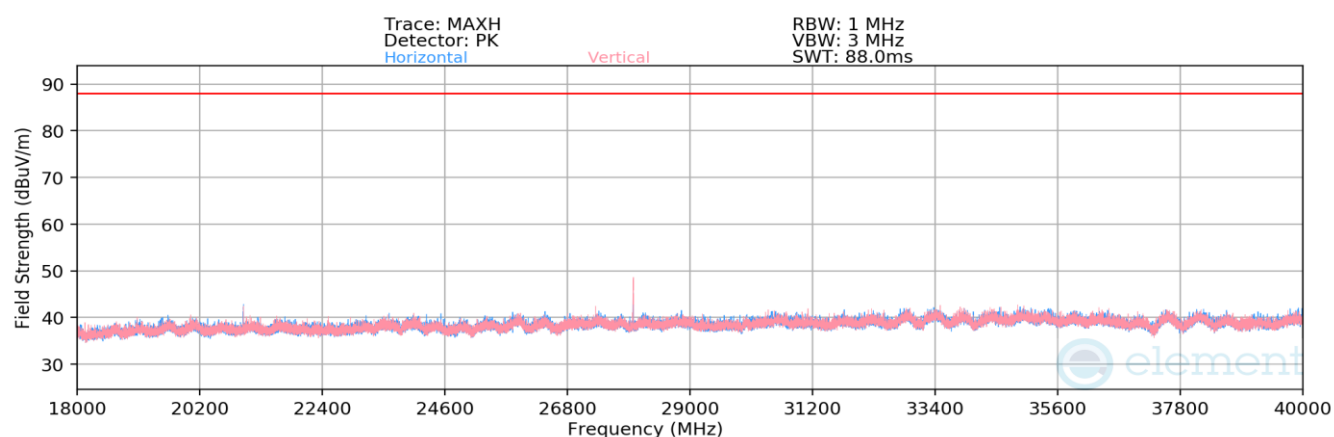

Plot 7-1371. Radiated Spurious Emissions 18-40GHz SDM Primary (802.11be – Ch. 209 – RU26)

Mode:	<u>802.11be</u>
Data Rate:	<u>MCS0</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>6995MHz</u>
Channel:	<u>209</u>

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 429 of 655

V 11.0 05/2025


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Average	H	-	-	-84.35	18.45	0.00	41.10	68.23	-27.13
13990.00	Peak	H	-	-	-72.97	18.45	0.00	52.48	88.23	-35.75
* 20985.00	Average	V	100	215	-57.76	-7.45	-9.54	32.24	53.98	-21.74
* 20985.00	Peak	V	100	215	-42.66	-7.45	-9.54	47.35	73.98	-26.63
27980.00	Average	V	220	106	-53.15	-4.19	-9.54	40.11	68.23	-28.12
27980.00	Peak	V	220	106	-40.58	-4.19	-9.54	52.68	88.23	-35.55
34975.00	Average	V	-	-	-61.37	-4.53	-9.54	31.55	68.23	-36.68
34975.00	Peak	V	-	-	-50.19	-4.53	-9.54	42.74	88.23	-45.49

Table 7-214. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 430 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

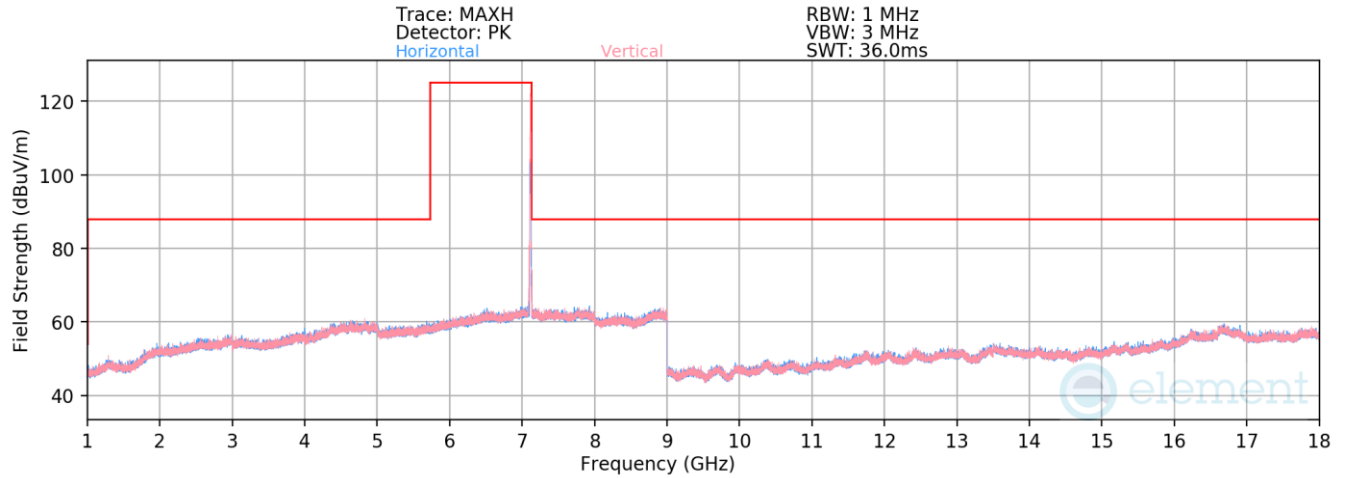

Plot 7-1372. Radiated Spurious Emissions above 1GHz SDM Primary (802.11be – Ch. 229 – RU26)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
14190.00	Average	V	-	-	-84.19	18.36	41.17	68.23	-27.06
14190.00	Peak	V	-	-	-72.65	18.36	52.71	88.23	-35.52

Table 7-215. Radiated Spurious Emission Measurements SDM Primary – RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device		Page 431 of 655

V 11.0 05/2025

RU242

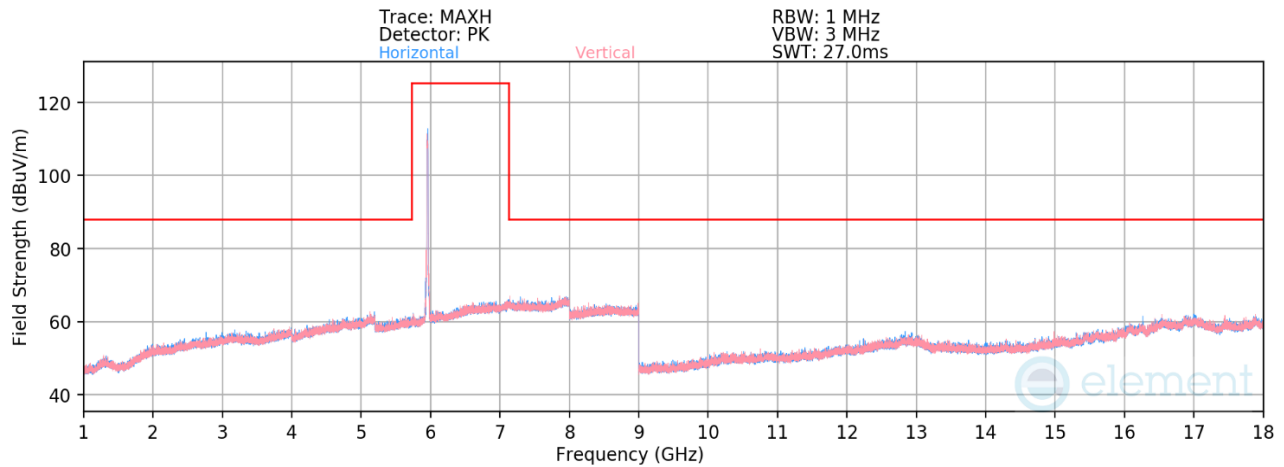

Plot 7-1373. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 1 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11910.00	Average	V	-	-	-84.45	16.78	39.33	53.98	-14.65
* 11910.00	Peak	V	-	-	-72.09	16.78	51.69	73.98	-22.29
* 17865.00	Average	V	-	-	-83.77	24.55	47.79	53.98	-6.19
* 17865.00	Peak	V	-	-	-71.51	24.55	60.04	73.98	-13.94

Table 7-216. Radiated Spurious Emission Measurements CDD Primary – RU242


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 432 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

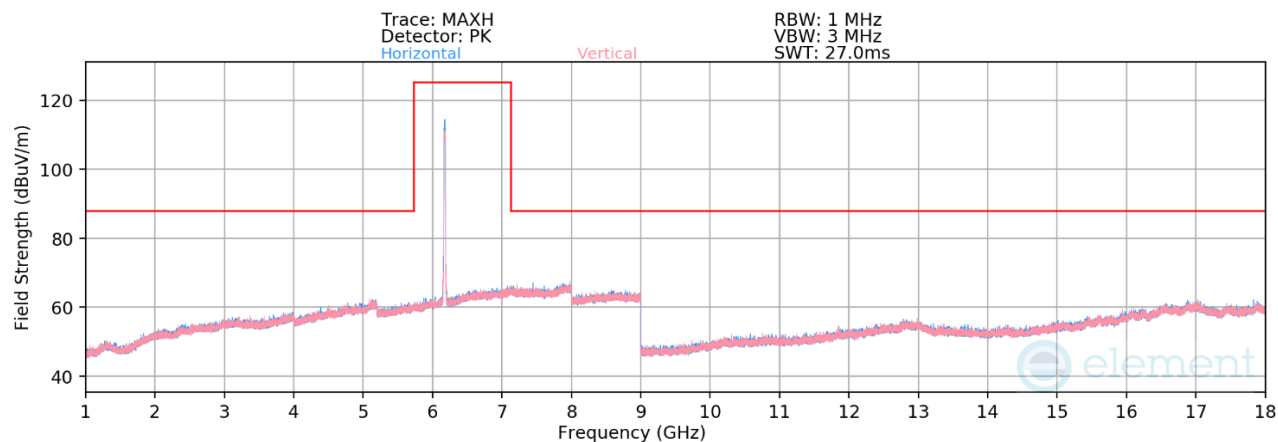

Plot 7-1374. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 45 – RU242)

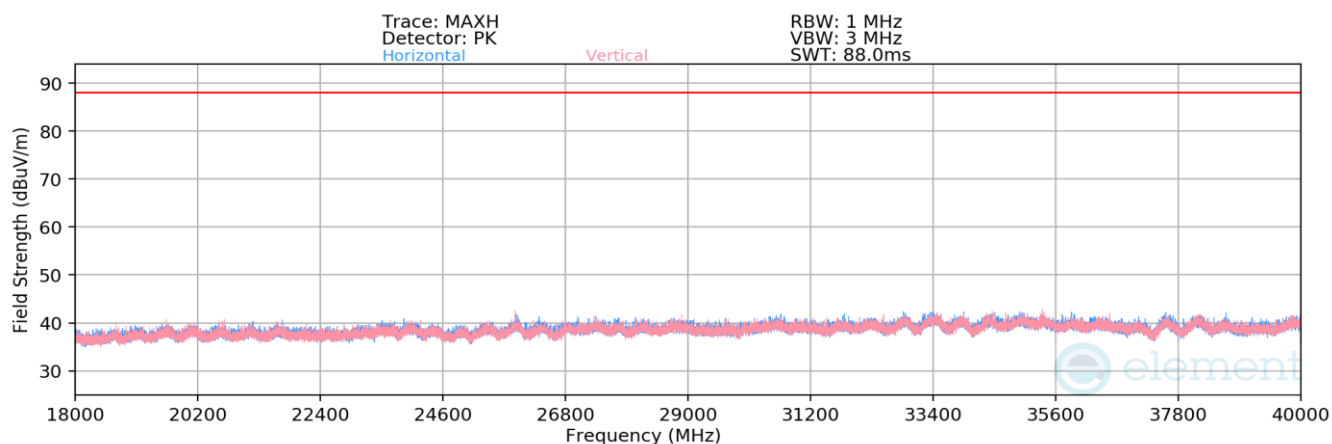

Plot 7-1375. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 45 – RU242)

Mode:	802.11be
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6175MHz
Channel:	45

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 433 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	12350.00	Average	H	-	-	-83.55	17.48	0.00	40.93	53.98	-13.05
*	12350.00	Peak	H	-	-	-72.49	17.48	0.00	51.99	73.98	-21.99
*	18525.00	Average	H	-	-	-61.53	-7.31	-9.54	28.61	53.98	-25.37
*	18525.00	Peak	H	-	-	-49.88	-7.31	-9.54	40.27	73.98	-33.71
	24700.00	Average	H	-	-	-62.08	-6.64	-9.54	28.73	68.23	-39.50
	24700.00	Peak	H	-	-	-50.88	-6.64	-9.54	39.93	88.23	-48.30
	30875.00	Average	H	-	-	-63.69	-3.73	-9.54	30.04	68.23	-38.19
	30875.00	Peak	H	-	-	-51.17	-3.73	-9.54	42.56	88.23	-45.67

Table 7-217. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 434 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

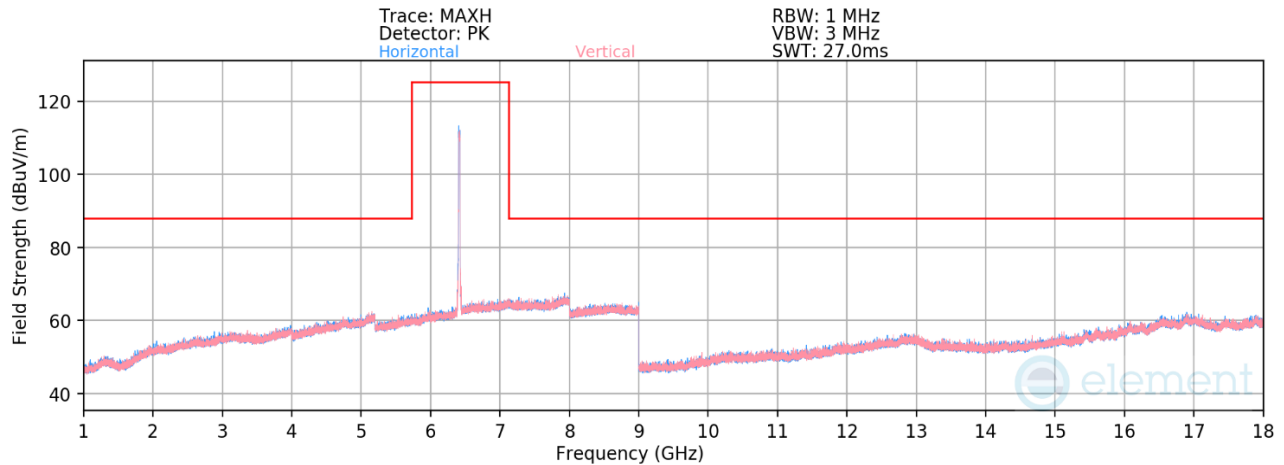

Plot 7-1376. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 93 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6415MHz
Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Average	V	-	-	-83.80	18.32	41.52	68.23	-26.71
12830.00	Peak	V	-	-	-72.44	18.32	52.89	88.23	-35.34

Table 7-218. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device		Page 435 of 655

V 11.0 05/2025

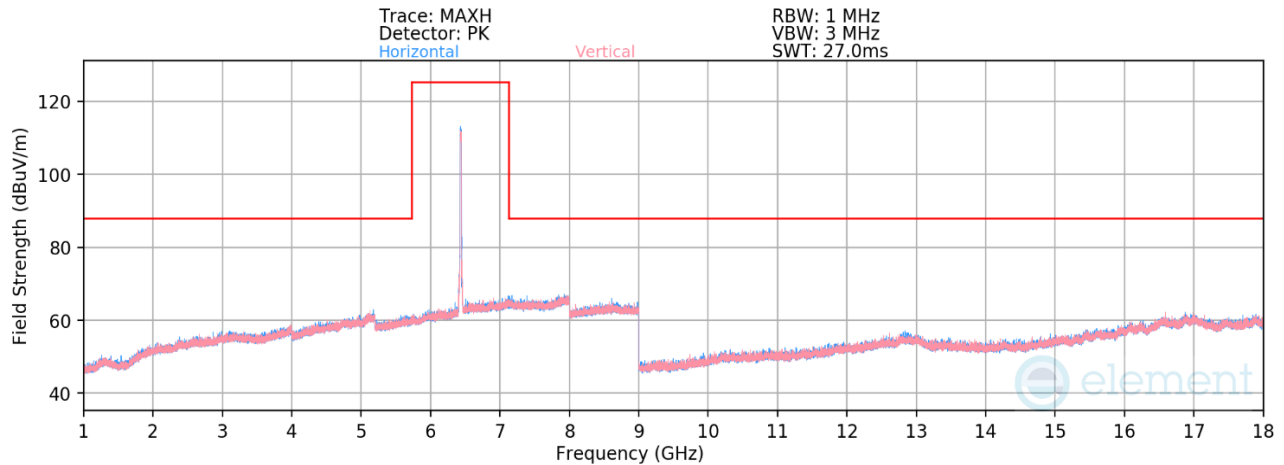

Plot 7-1377. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 97 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6435MHz
Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
12870.00	Average	V	-	-	-83.96	18.29	41.33	68.23	-26.90
12870.00	Peak	V	-	-	-72.01	18.29	53.28	88.23	-34.95


Table 7-219. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 436 of 655

V 11.0 05/2025

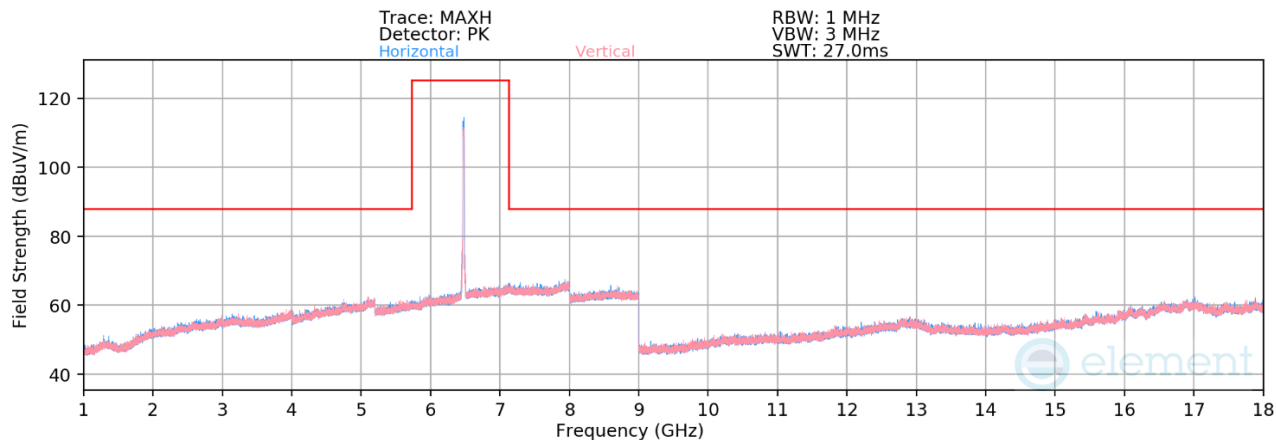

Plot 7-1378. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 105 – RU242)

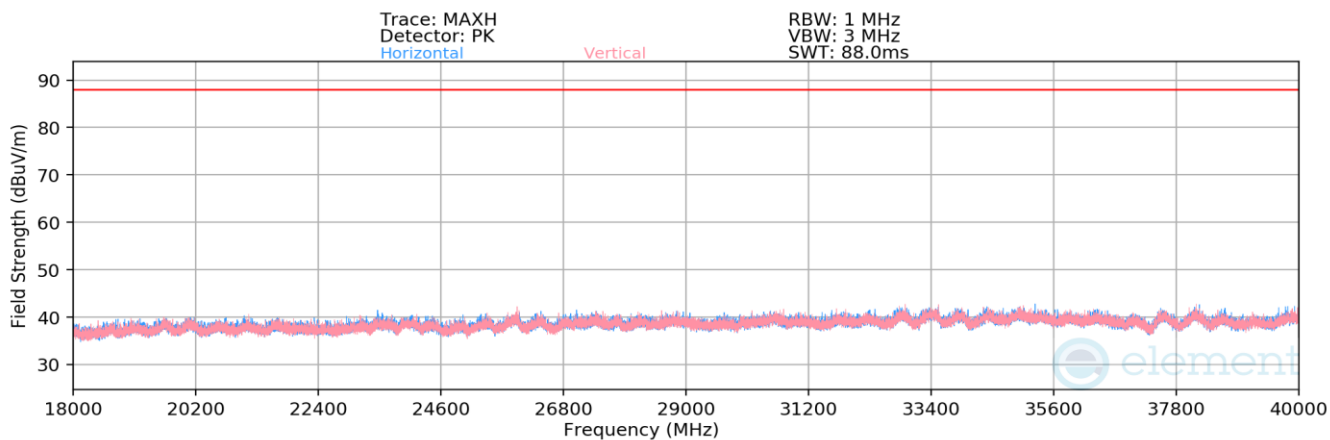

Plot 7-1379. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 105 – RU242)

Mode:	<u>802.11be</u>
Data Rate:	<u>MCS0</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>6475MHz</u>
Channel:	<u>105</u>

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 437 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12950.00	Average	V	-	-	-84.11	18.82	0.00	41.70	68.23	-26.53
12950.00	Peak	V	-	-	-73.07	18.82	0.00	52.75	88.23	-35.48
* 19425.00	Average	V	-	-	-61.22	-7.74	-9.54	28.49	53.98	-25.49
* 19425.00	Peak	V	-	-	-49.73	-7.74	-9.54	39.98	73.98	-34.00
25900.00	Average	V	-	-	-60.73	-5.72	-9.54	31.01	68.23	-37.22
25900.00	Peak	V	-	-	-49.70	-5.72	-9.54	42.03	88.23	-46.20
32375.00	Average	V	-	-	-62.98	-3.92	-9.54	30.55	68.23	-37.68
32375.00	Peak	V	-	-	-51.21	-3.92	-9.54	42.32	88.23	-45.91

Table 7-220. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 438 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

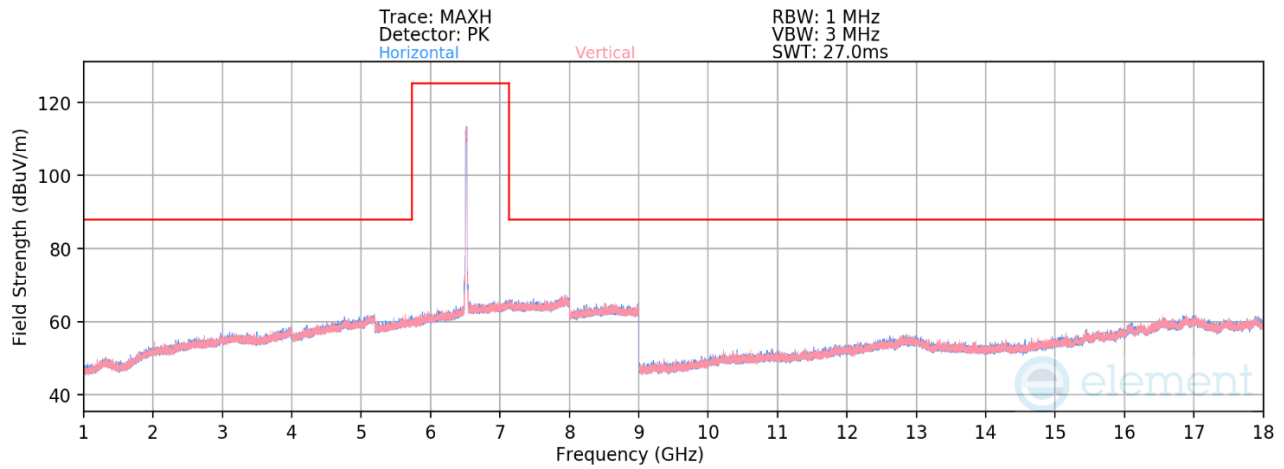

Plot 7-1380. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 113 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6515MHz
Channel: 113


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13030.00	Average	V	-	-	-83.63	18.43	41.81	68.23	-26.42
13030.00	Peak	V	-	-	-72.01	18.43	53.43	88.23	-34.80

Table 7-221. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 439 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

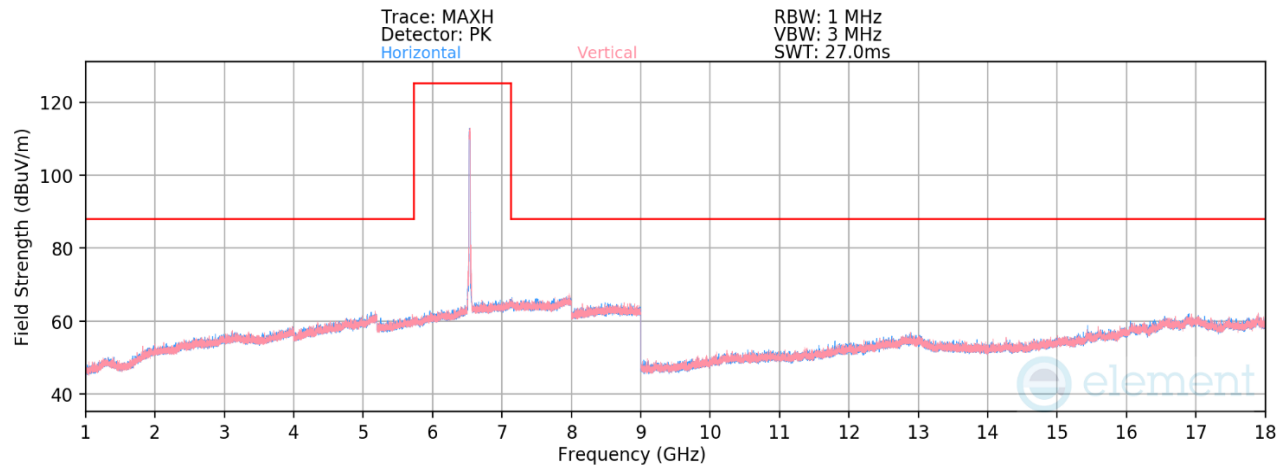

Plot 7-1381. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 117 – RU242)


Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6535MHz
Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13070.00	Average	V	-	-	-83.84	18.65	41.81	68.23	-26.42
13070.00	Peak	V	-	-	-71.88	18.65	53.77	88.23	-34.46


Table 7-222. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 440 of 655

V 11.0 05/2025

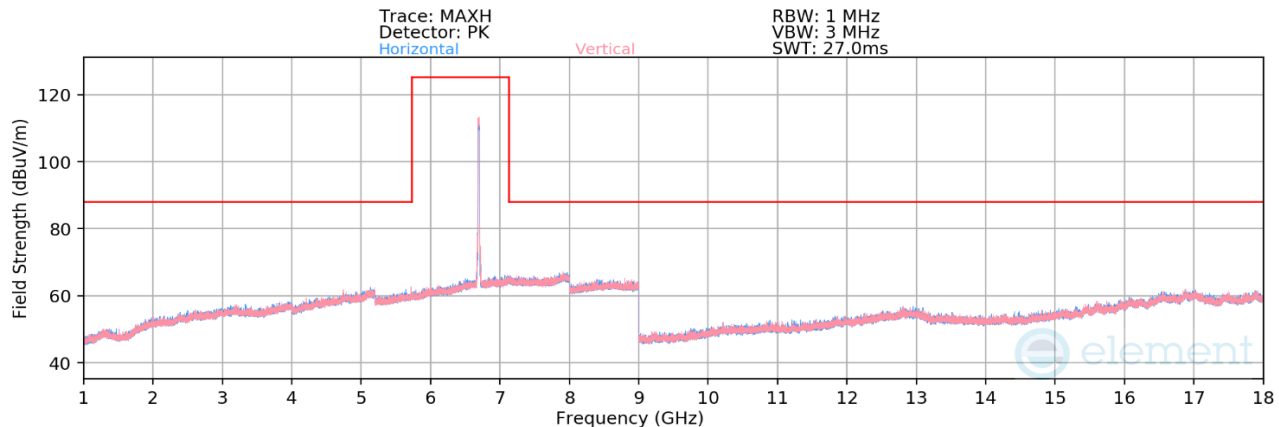

Plot 7-1382. Radiated Spurious Emissions above 1GHz CDD Primary (802.11be – Ch. 149 – RU242)

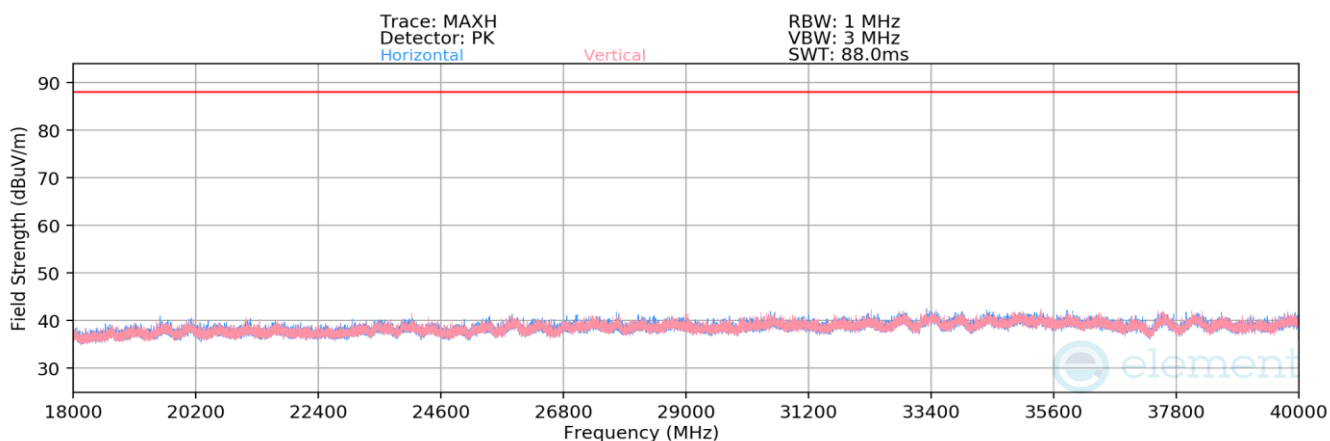

Plot 7-1383. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 149 – RU242)

Mode: 802.11be
Data Rate: MCS0
Distance of Measurements: 3 Meters
Operating Frequency: 6695MHz
Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-83.54	18.39	41.85	53.98	-12.13
* 13390.00	Peak	V	-	-	-72.28	18.39	53.12	73.98	-20.86
* 20085.00	Average	V	-	-	-59.84	-8.03	29.59	53.98	-24.39
* 20085.00	Peak	V	-	-	-47.66	-8.03	41.77	73.98	-32.21
26780.00	Average	V	-	-	-62.12	-5.23	30.10	68.23	-38.13
26780.00	Peak	V	-	-	-50.66	-5.23	41.56	88.23	-46.67
33475.00	Average	V	-	-	-60.98	-4.28	32.19	68.23	-36.04
33475.00	Peak	V	-	-	-49.26	-4.28	43.92	88.23	-44.31

Table 7-223. Radiated Spurious Emission Measurements CDD Primary – RU242

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 441 of 655