



Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

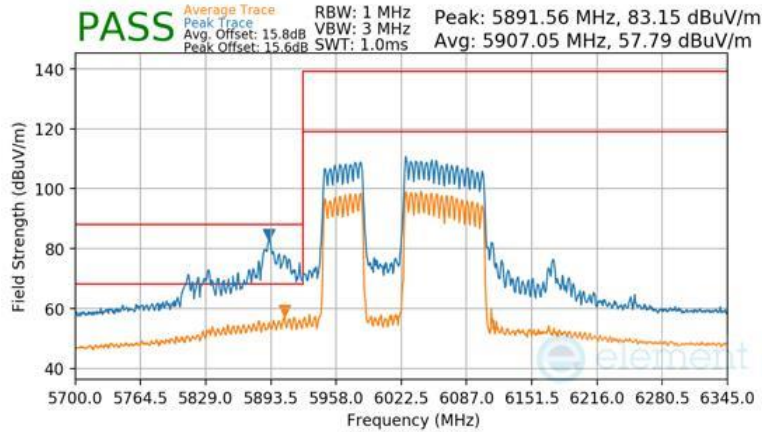

Plot 7-1645 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

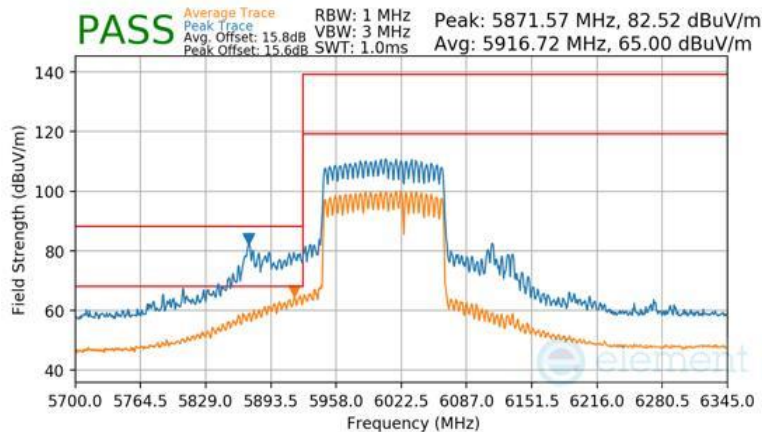

Plot 7-1646 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (H)


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 589 of 655

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

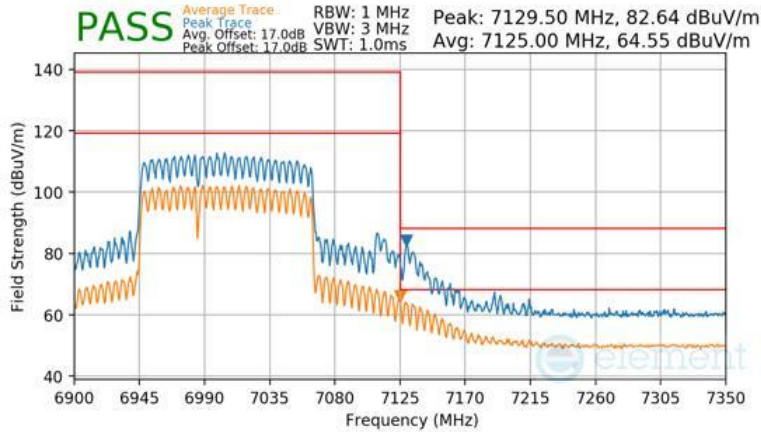

Plot 7-1647 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

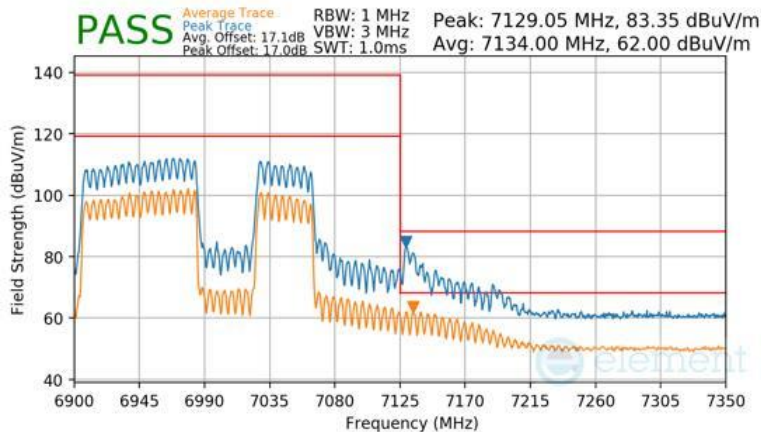

Plot 7-1648 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 590 of 655

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

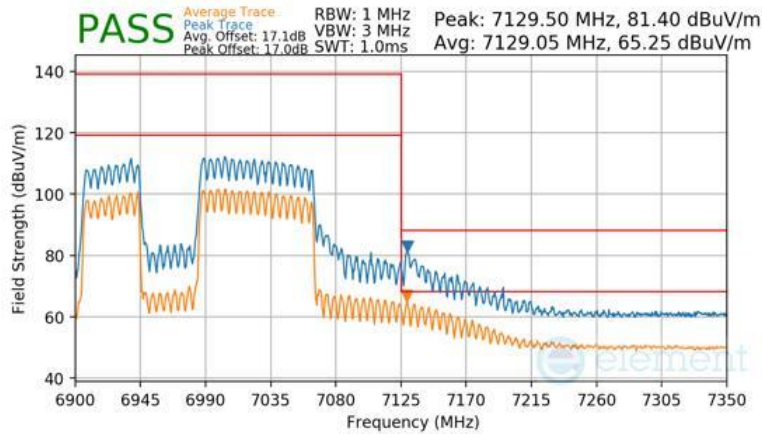

Plot 7-1649 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

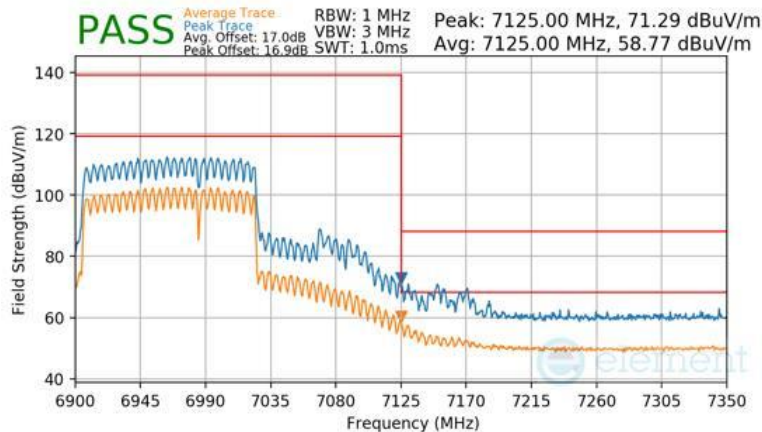

Plot 7-1650 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 591 of 655

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

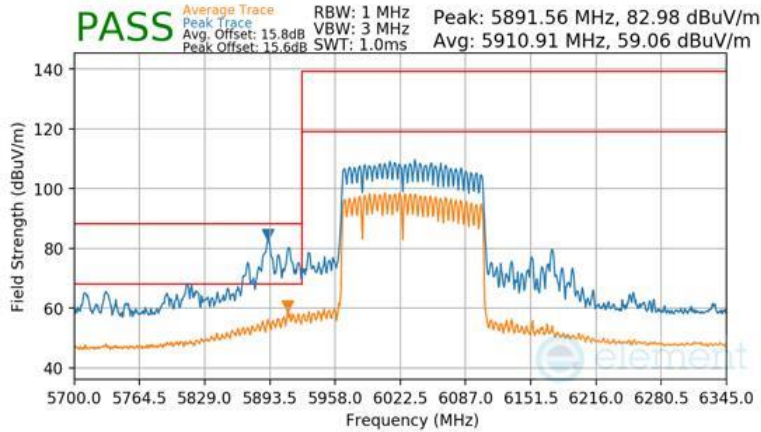

Plot 7-1651 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

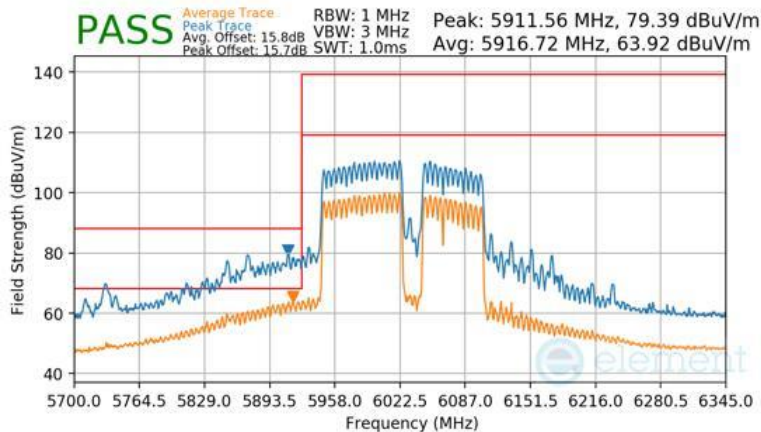


Plot 7-1652 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 592 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

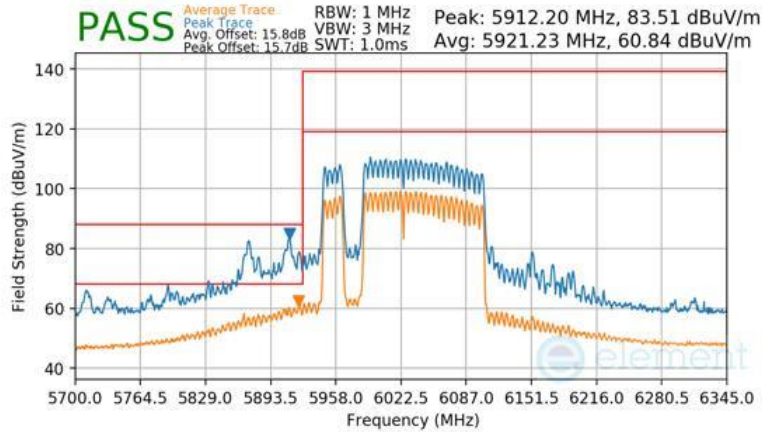

Plot 7-1653 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

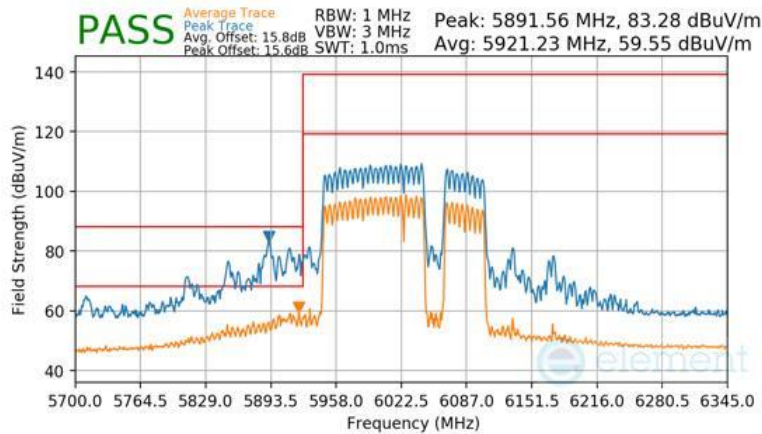


Plot 7-1654 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 593 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

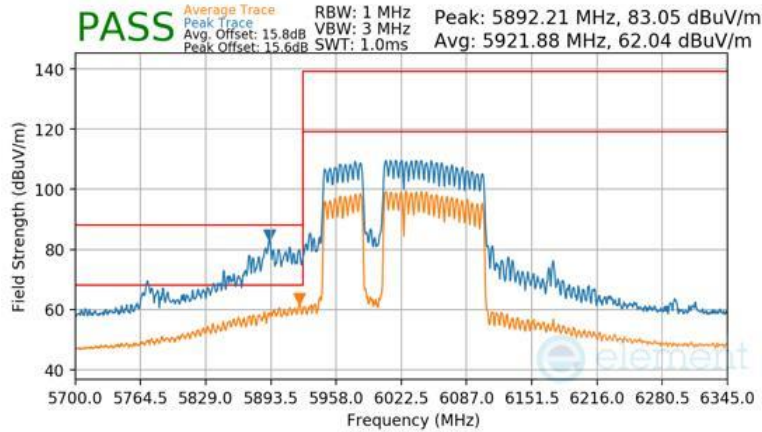

Plot 7-1655 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

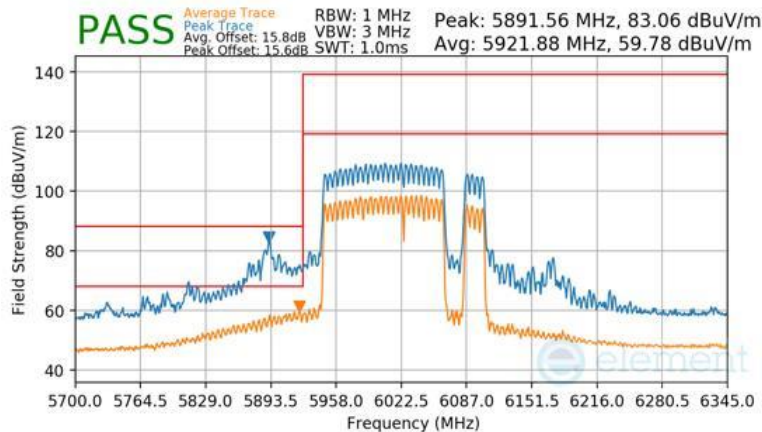


Plot 7-1656 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 594 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

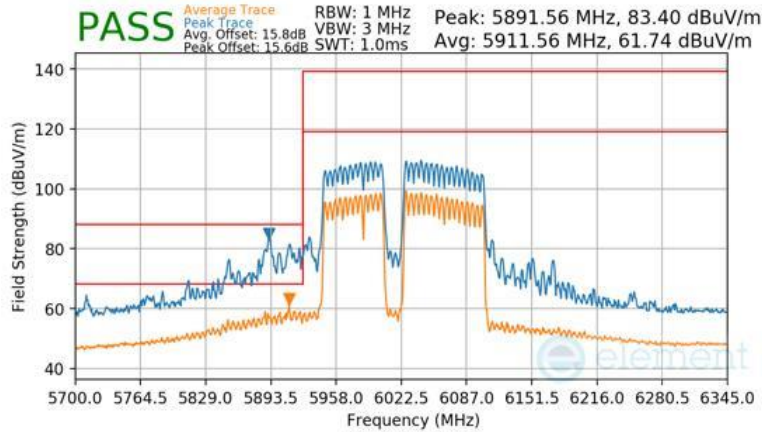

Plot 7-1657 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

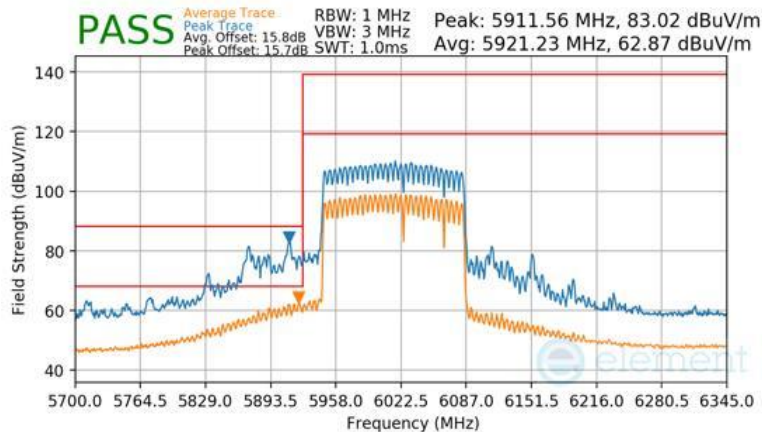


Plot 7-1658 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 595 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

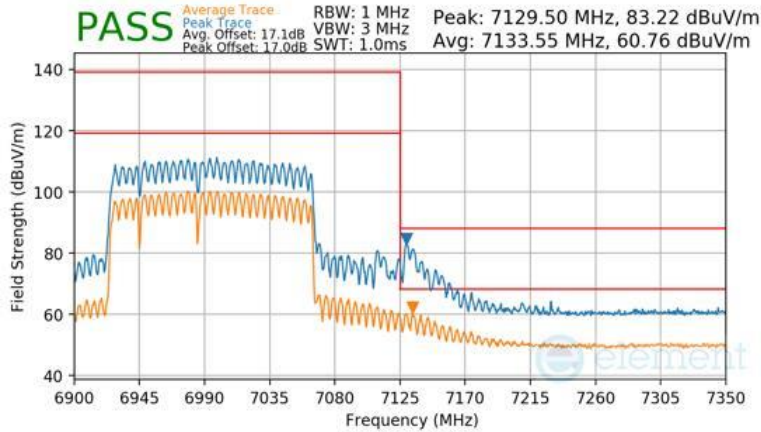

Plot 7-1659 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

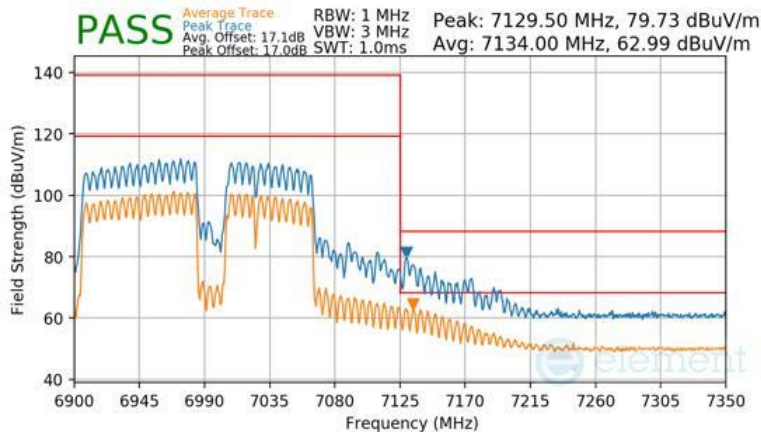


Plot 7-1660 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 596 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

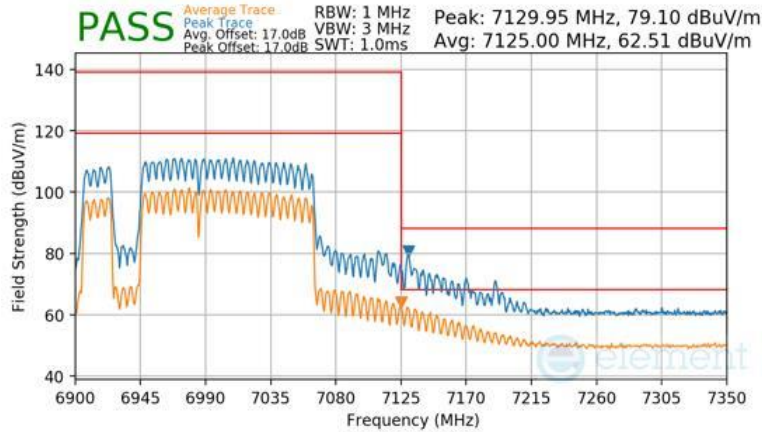

Plot 7-1661 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

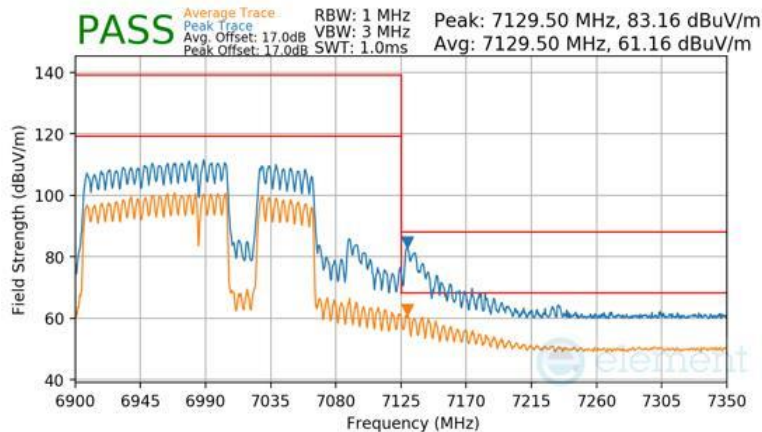


Plot 7-1662 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 597 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

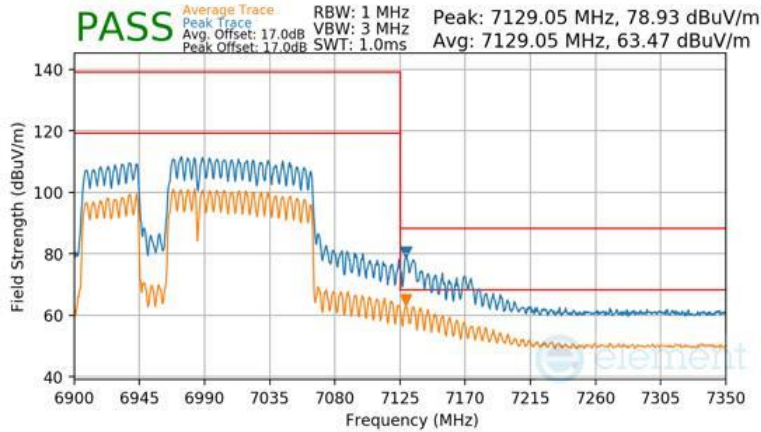

Plot 7-1663 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

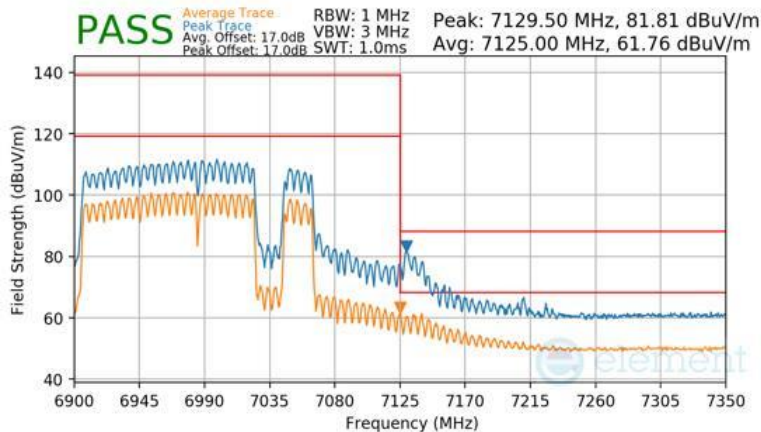


Plot 7-1664 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 598 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

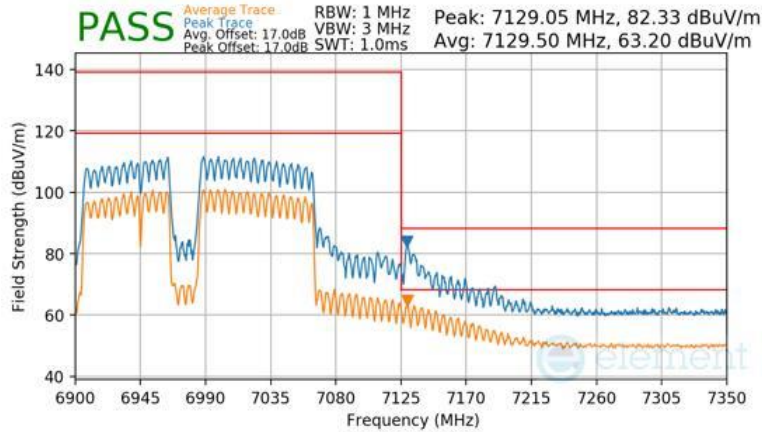

Plot 7-1665 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

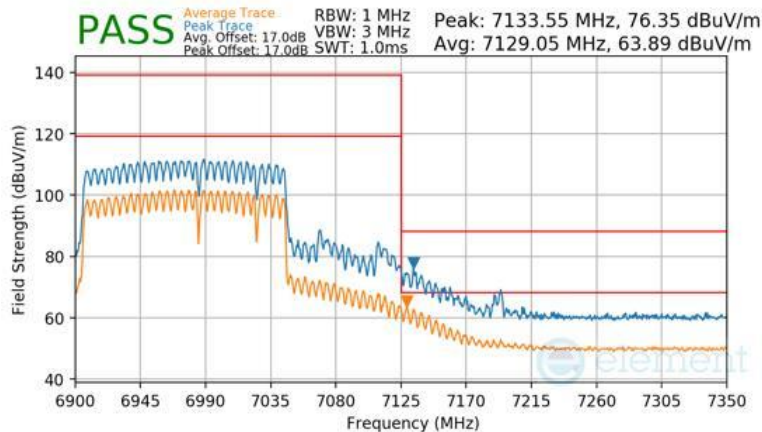


Plot 7-1666 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 599 of 655

V 11.0 05/2025


RU996x2

Mode:	802.11be OFDMA
Transfer Rate:	MCS11
RU Index:	68
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

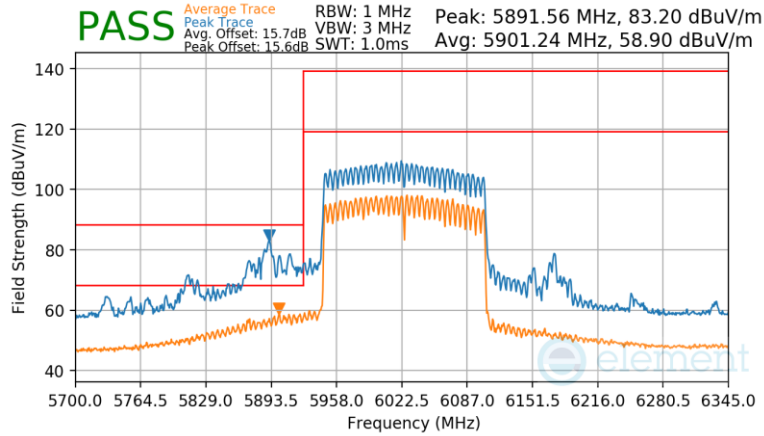

Plot 7-1667 CDD Primary Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996X2

Mode:	802.11be OFDMA
Transfer Rate:	MCS11
RU Index:	68
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

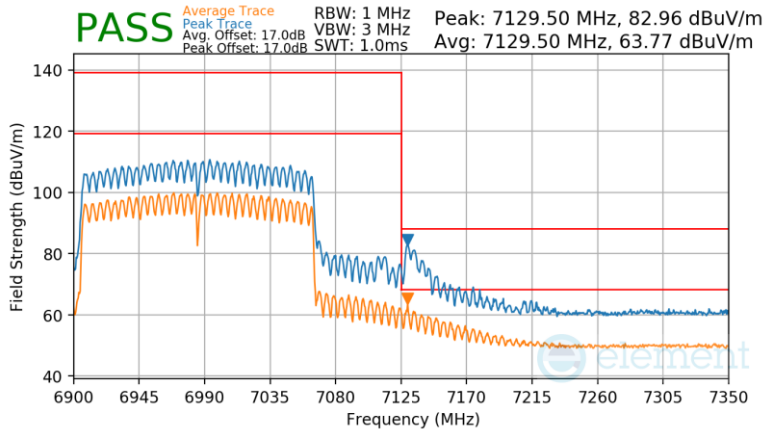

Plot 7-1668 CDD Primary Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996X2


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 600 of 655

V 11.0 05/2025

7.7.19 CDD Diversity Radiated Band Edge Measurements (20MHz BW)


RU26

Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

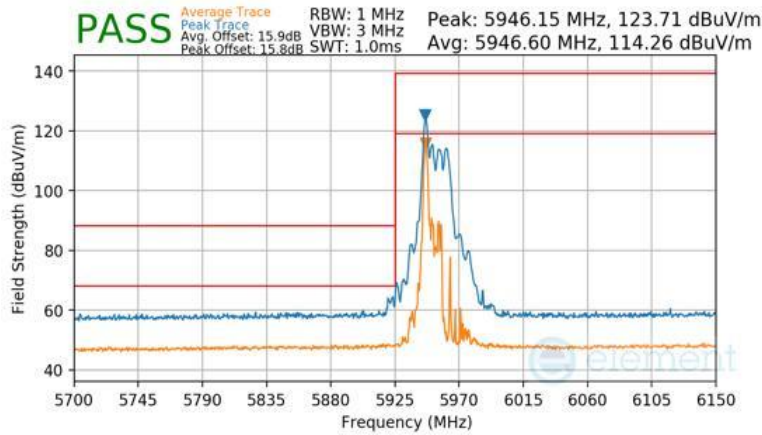

Plot 7-1669 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1

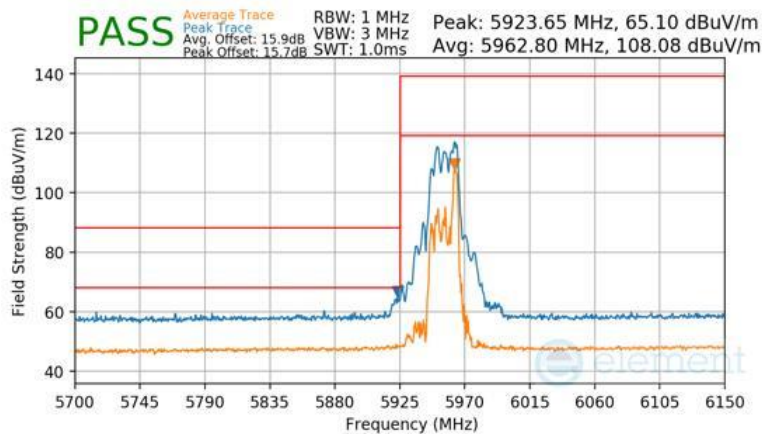


Plot 7-1670 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 601 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

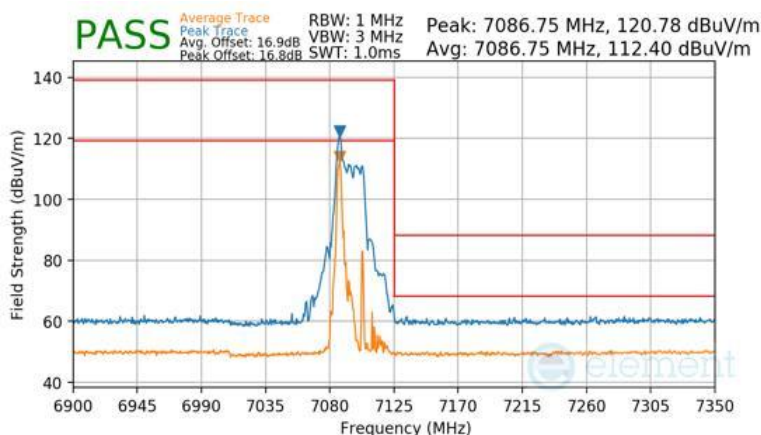

Plot 7-1671 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 8
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

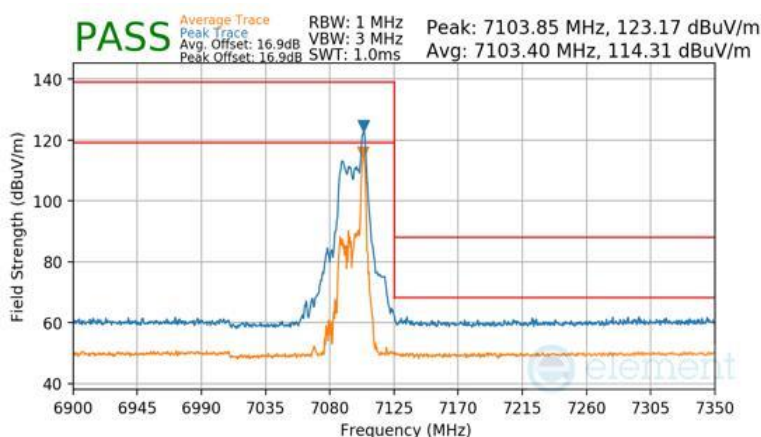


Plot 7-1672 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 602 of 655

V 11.0 05/2025


MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

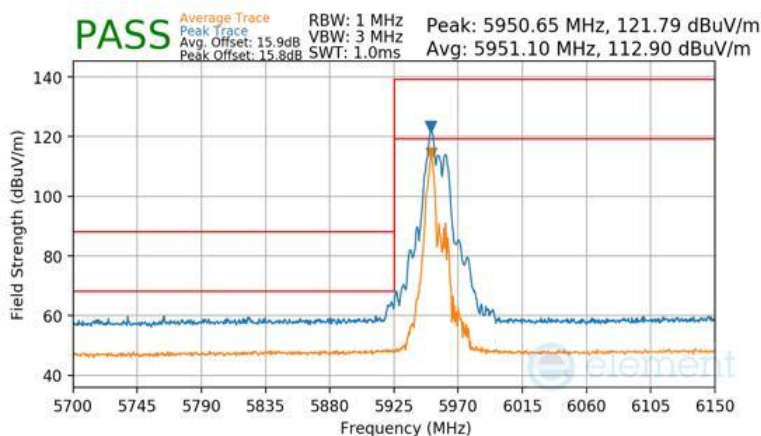

Plot 7-1673 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU52+26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

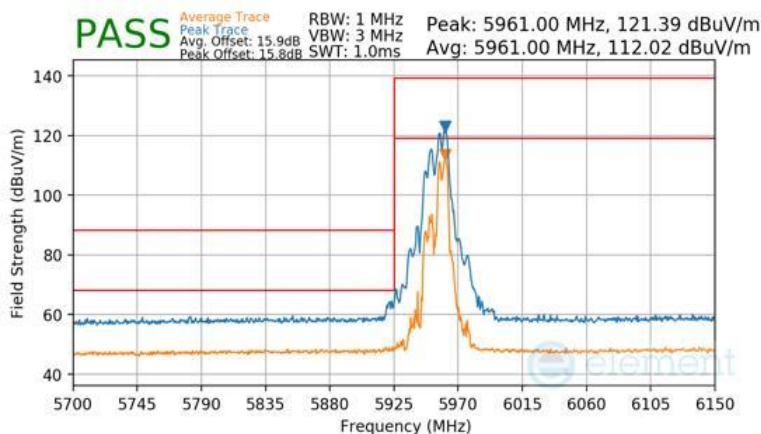


Plot 7-1674 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU52+26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 603 of 655

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 70
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

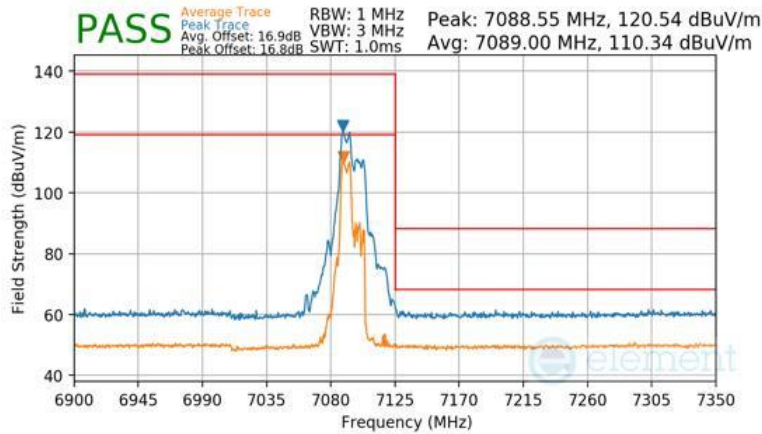

Plot 7-1675 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU52+26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 72
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

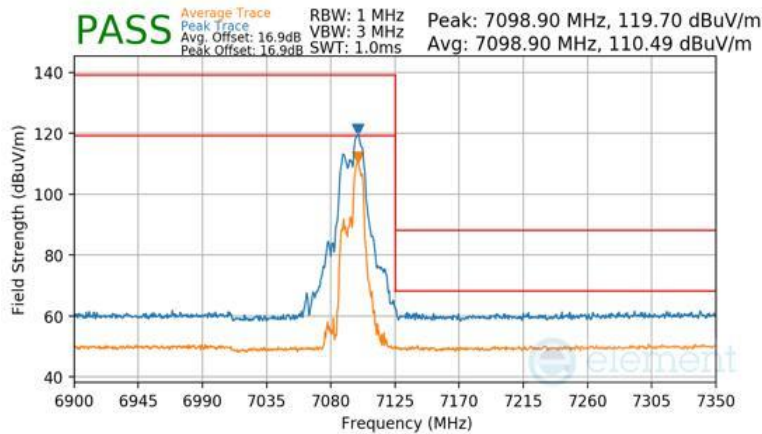


Plot 7-1676 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU52+26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 604 of 655

V 11.0 05/2025


RU242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5955MHz
Channel: 1

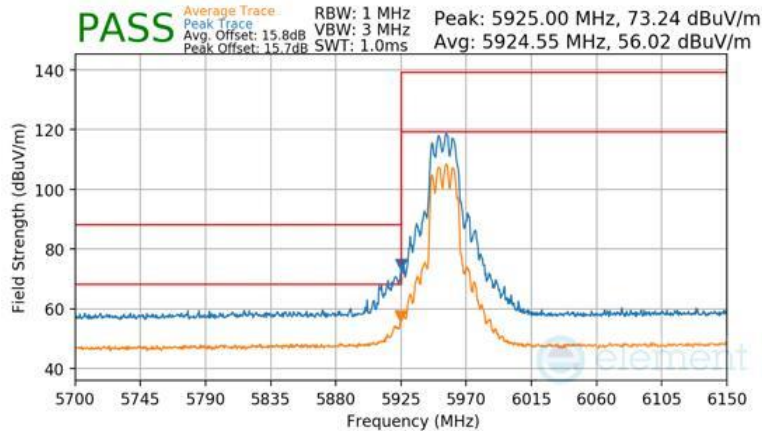

Plot 7-1677 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 7095MHz
Channel: 229

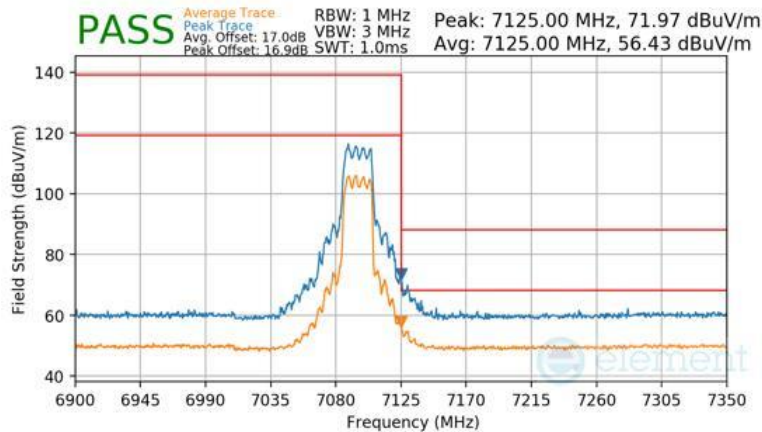


Plot 7-1678 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU242


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 605 of 655

V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 7115MHz
Channel: 233

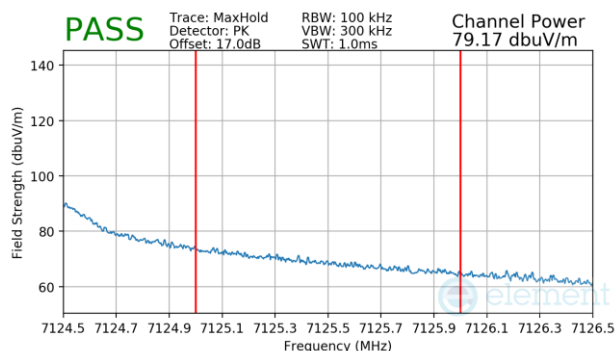

Plot 7-1679 CDD Diversity Radiated Upper Band Edge (Peak – UNII Band 8) – RU242

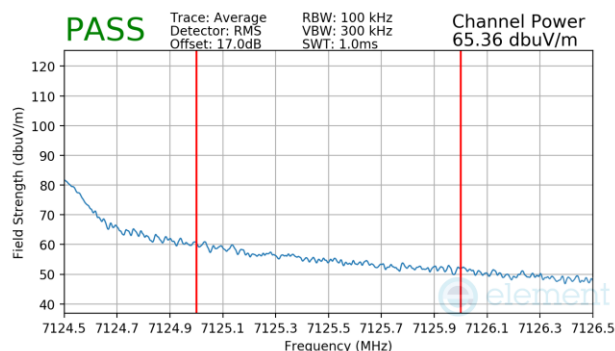

Plot 7-1680 CDD Diversity Radiated Upper Band Edge (Average – UNII Band 8) – RU242


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 606 of 655

V 11.0 05/2025

7.7.20 CDD Diversity Radiated Band Edge Measurements (40MHz BW)


RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 5965MHz
Channel: 3

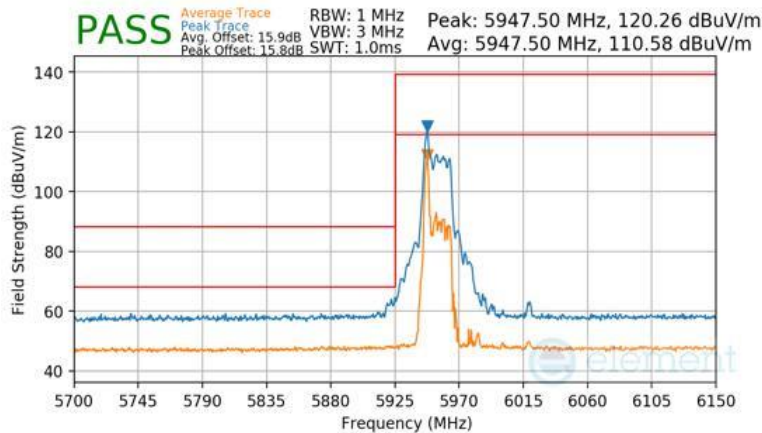

Plot 7-1681 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 17
Distance of Measurements: 3 Meters
Operating Frequency: 5965MHz
Channel: 3

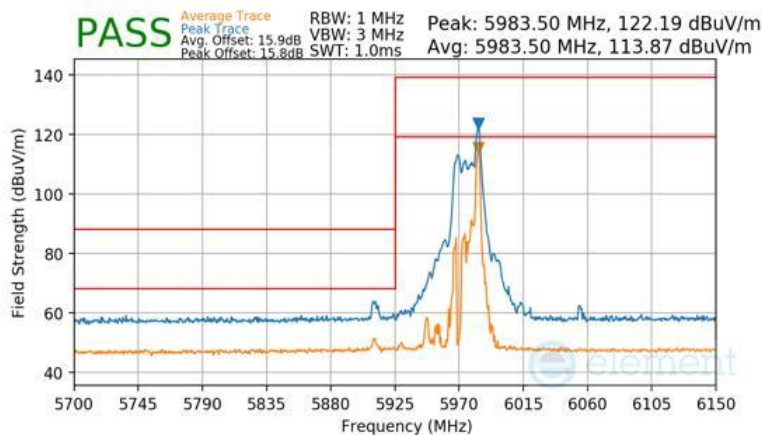


Plot 7-1682 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 607 of 655

V 11.0 05/2025


RU484

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 65
Distance of Measurements: 3 Meters
Operating Frequency: 5965MHz
Channel: 3

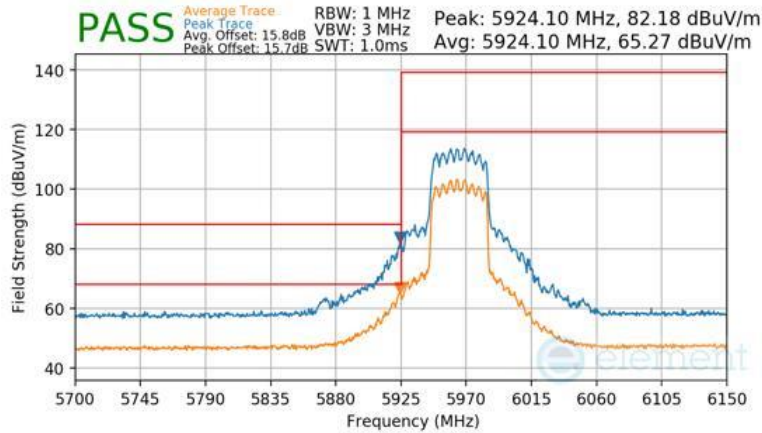

Plot 7-1685 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 65
Distance of Measurements: 3 Meters
Operating Frequency: 7085MHz
Channel: 227

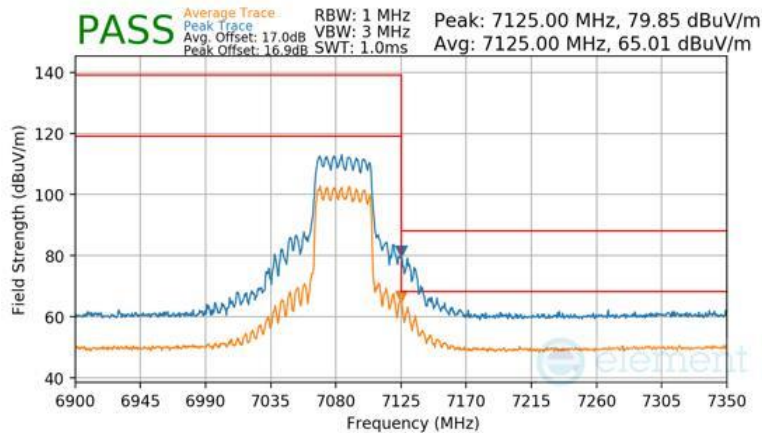

Plot 7-1686 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 609 of 655

V 11.0 05/2025

7.7.21 CDD Diversity Radiated Band Edge Measurements (80MHz BW)


RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

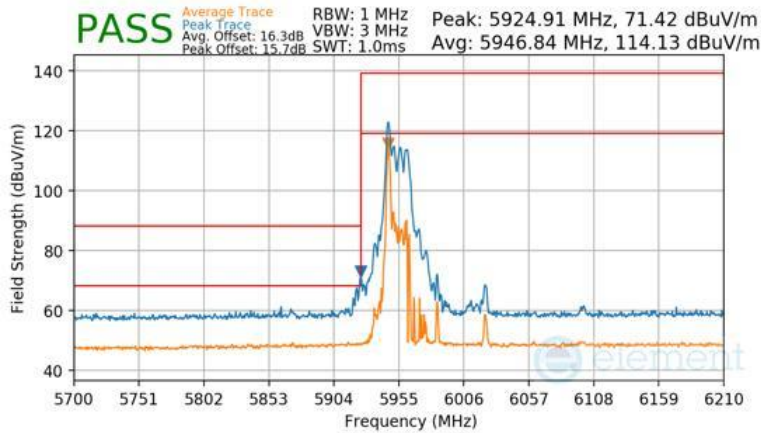

Plot 7-1687 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 36
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

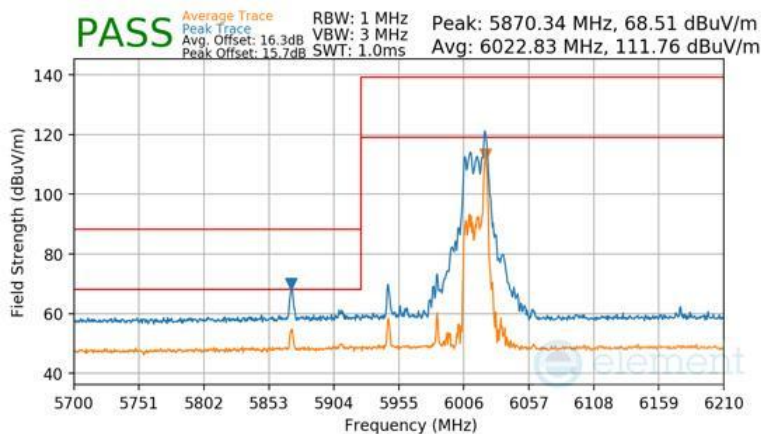


Plot 7-1688 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 610 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

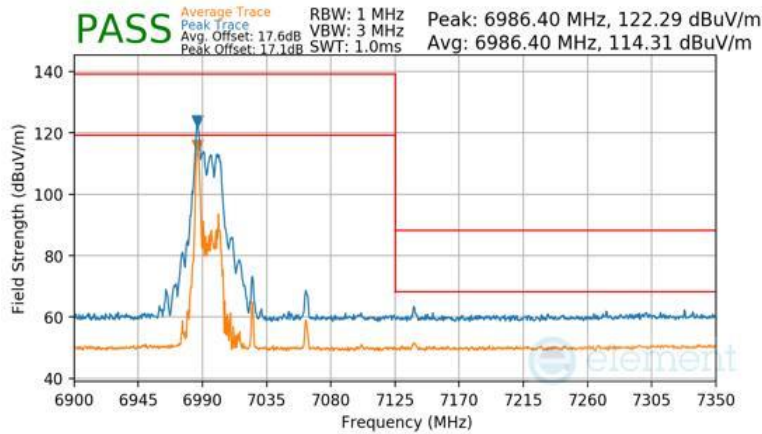

Plot 7-1689 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 36
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

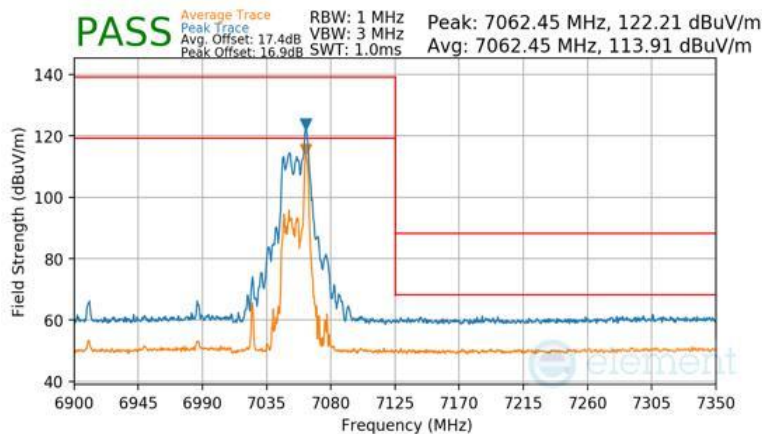

Plot 7-1690 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 611 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


MRU

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 90
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

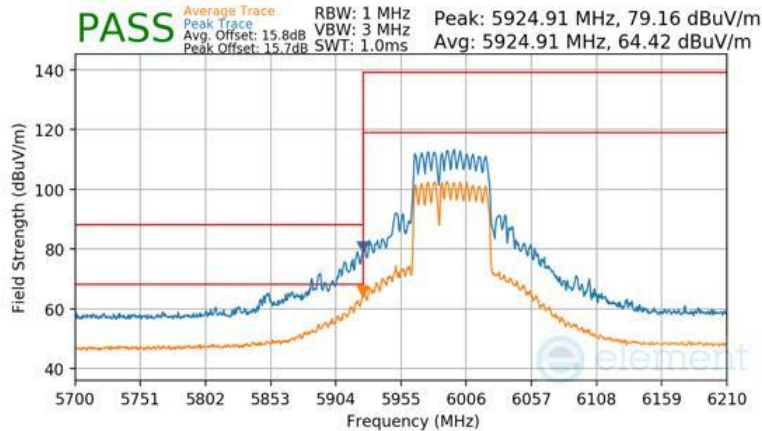

Plot 7-1691 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 91
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

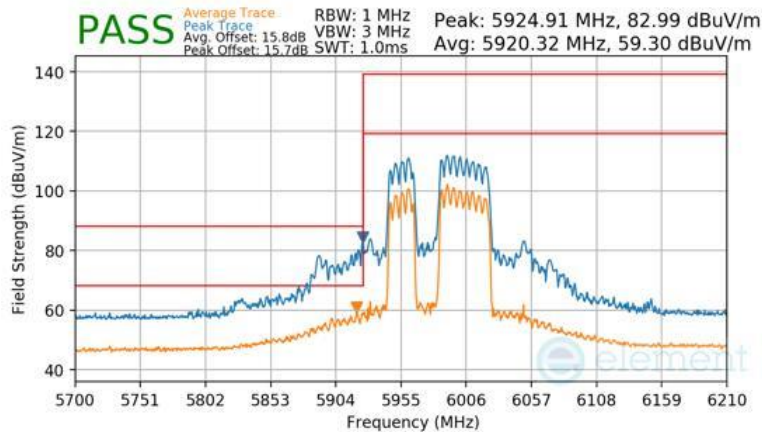


Plot 7-1692 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 612 of 655

V 11.0 05/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 92
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

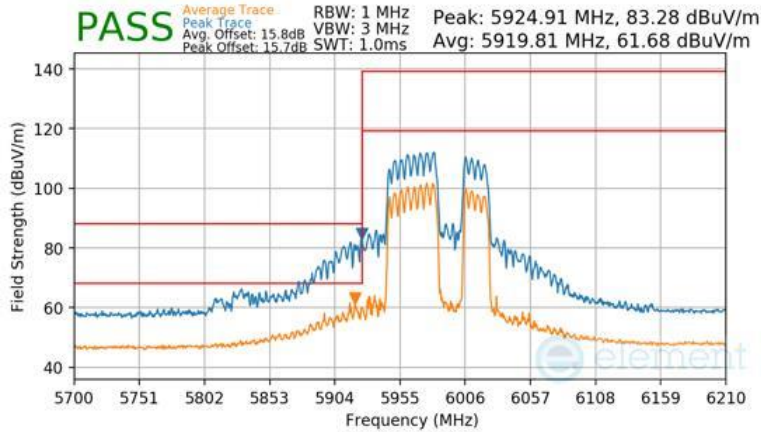

Plot 7-1693 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 93
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

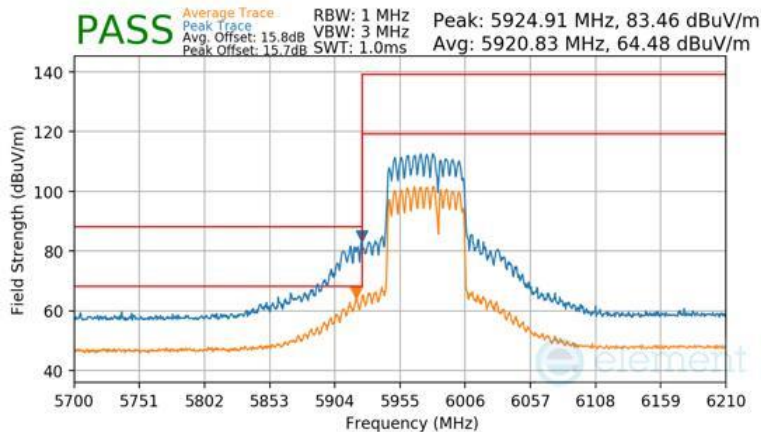

Plot 7-1694 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU484+242


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 613 of 655

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 90
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

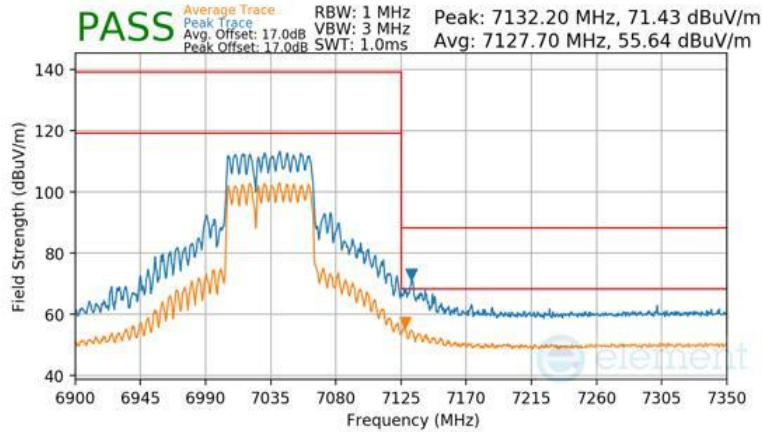

Plot 7-1695 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 91
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

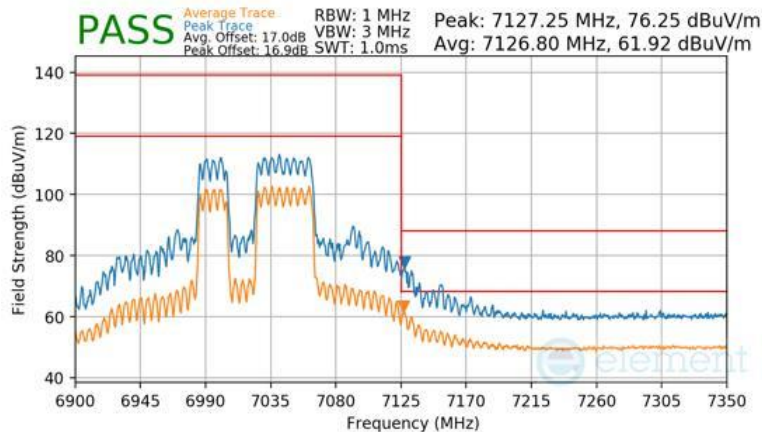

Plot 7-1696 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 614 of 655

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 92
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

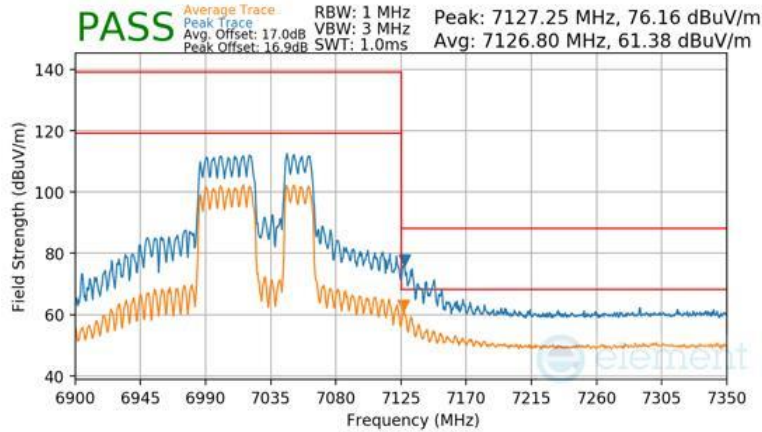

Plot 7-1697 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 93
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

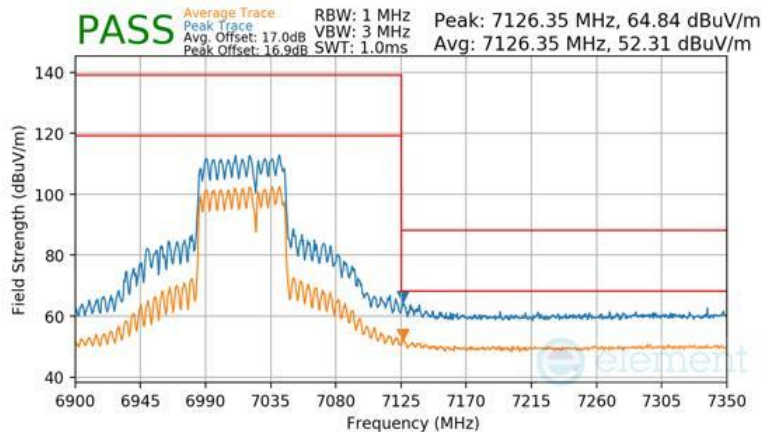


Plot 7-1698 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU484+242

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 615 of 655

V 11.0 05/2025


RU996

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 5985MHz
Channel: 7

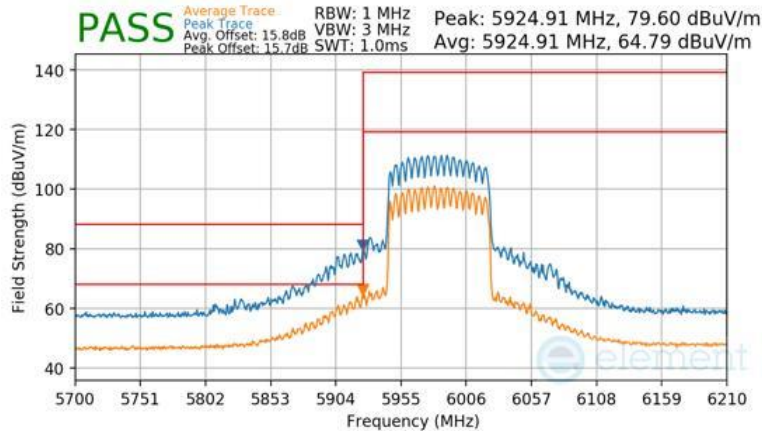

Plot 7-1699 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 67
Distance of Measurements: 3 Meters
Operating Frequency: 7025MHz
Channel: 215

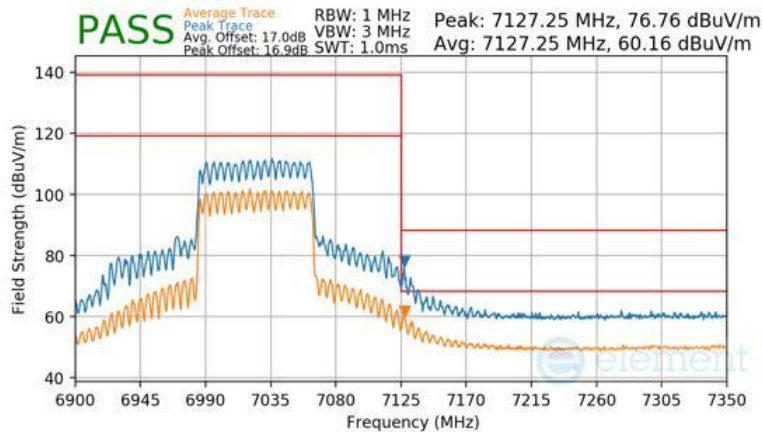

Plot 7-1700 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 616 of 655

V 11.0 05/2025

7.7.22 CDD Diversity Radiated Band Edge Measurements (160MHz BW)


RU26

Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6025MHz
 Channel: 15

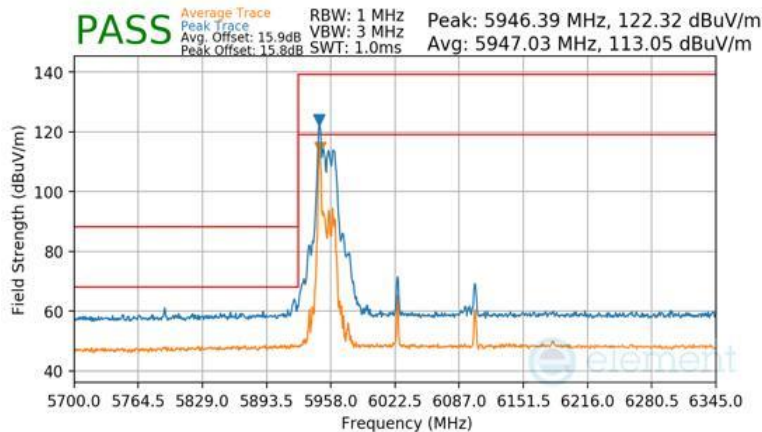

Plot 7-1701 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26 (L)

Mode: 802.11be OFDMA
 Transfer Rate: MCS11
 RU Index: 36
 Distance of Measurements: 3 Meters
 Operating Frequency: 6025MHz
 Channel: 15

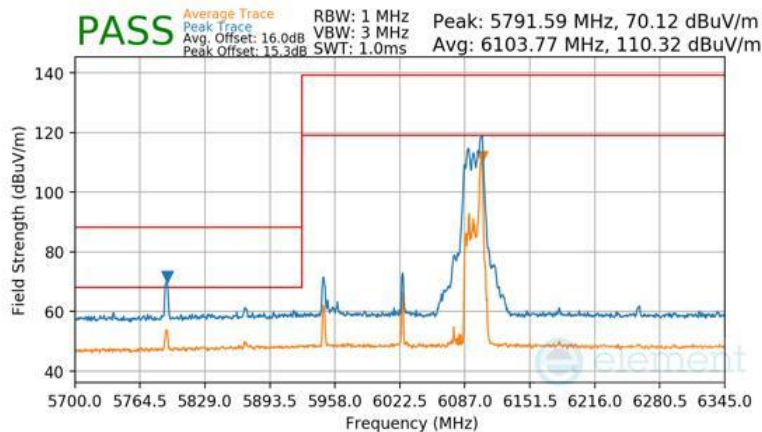


Plot 7-1702 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU26 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 617 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 0
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

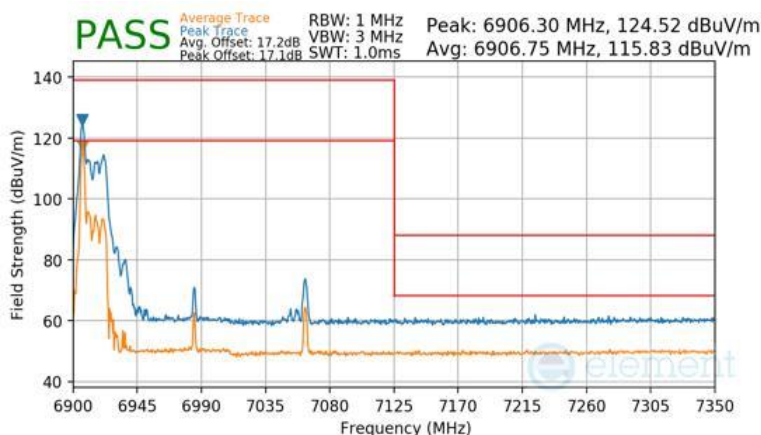

Plot 7-1703 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 36
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

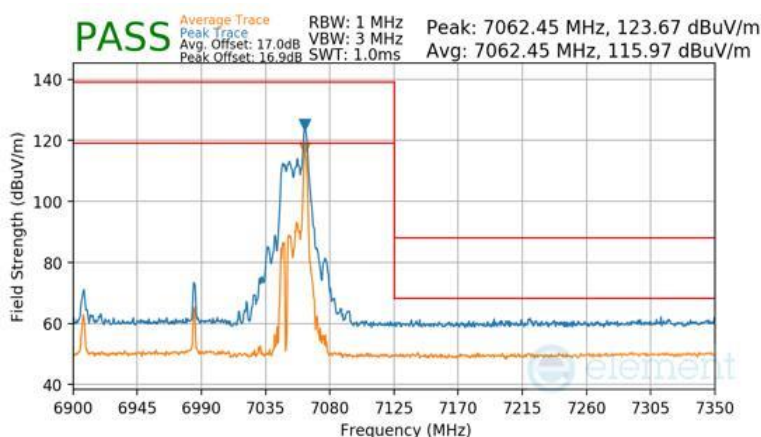

Plot 7-1704 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU26 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 618 of 655

V 11.0 05/2025

PASS

Orange Trace
Peak Trace
Avg. Offset: 15.8dB
Peak Offset: 15.7dB

RBW: 1 MHz
VBW: 3 MHz
SWT: 1.0ms

Peak: 5910.91 MHz, 83.47 dBuV/m
Avg: 5920.59 MHz, 64.62 dBuV/m

Field Strength (dBuV/m)


Frequency (MHz)

5700.0 5764.5 5829.0 5893.5 5958.0 6022.5 6087.0 6151.5 6216.0 6280.5 6345.0

40 60 80 100 120 140


element

Mode:	802.11be OFDMA
Transfer Rate:	MCS11
RU Index:	94
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

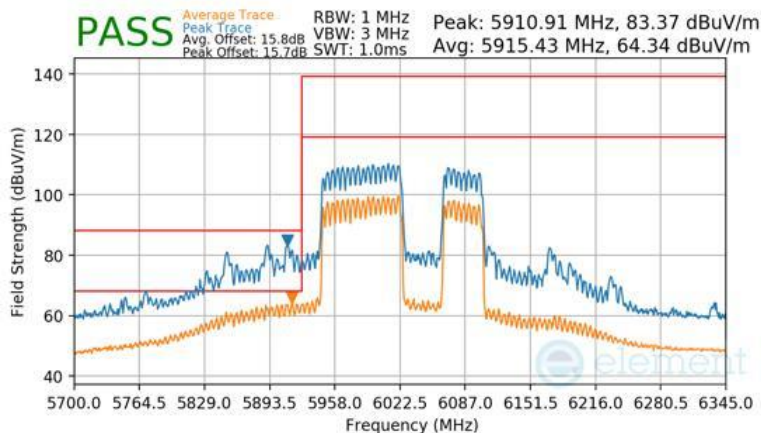


FCC ID: BCGA3461 IC: 579C-A3461	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 619 of 655

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

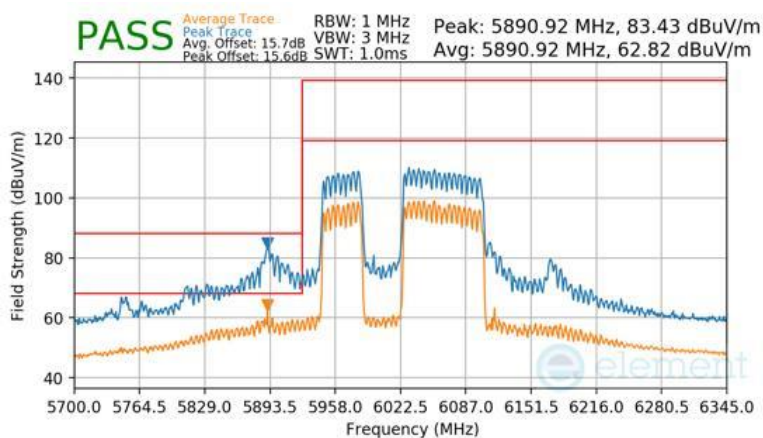

Plot 7-1707 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

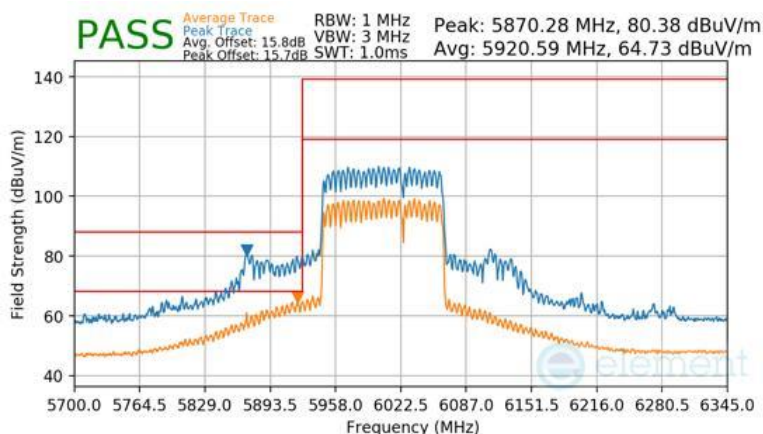


Plot 7-1708 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 620 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

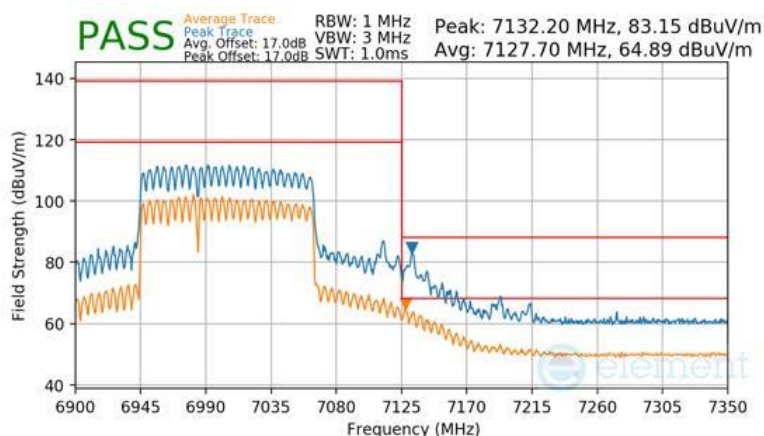

Plot 7-1709 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)


Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 94
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

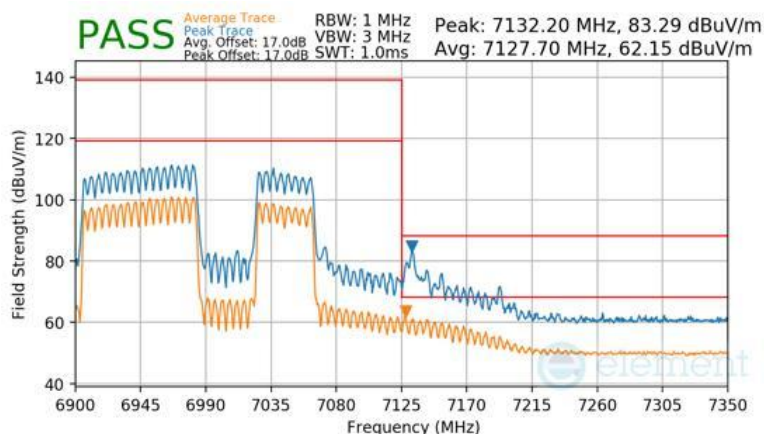

Plot 7-1710 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)


FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 621 of 655

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

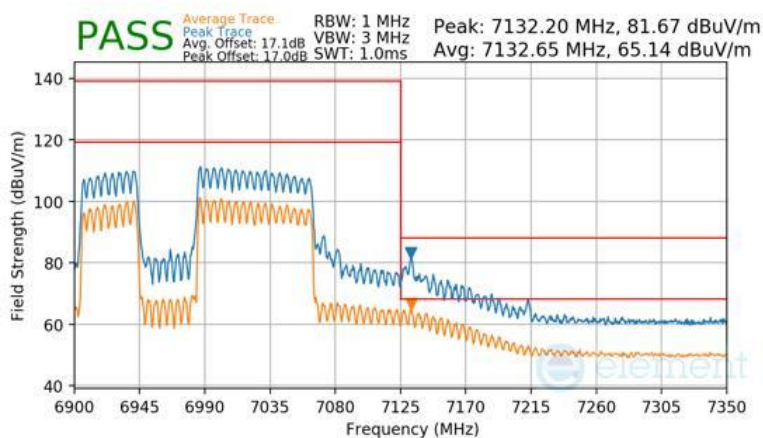

Plot 7-1711 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 95
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

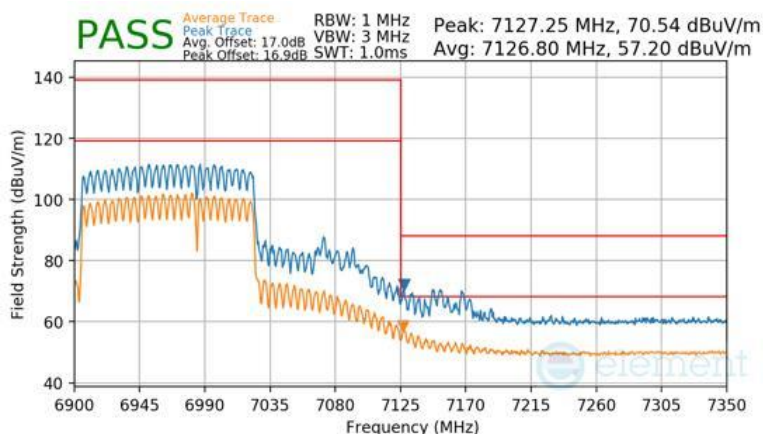


Plot 7-1712 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 622 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

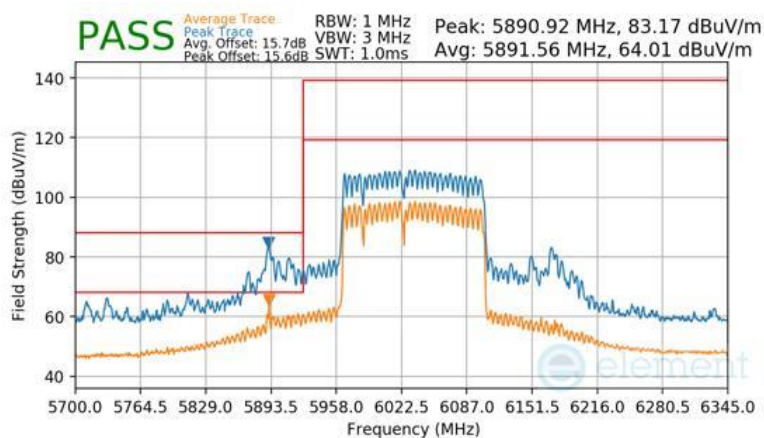

Plot 7-1713 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

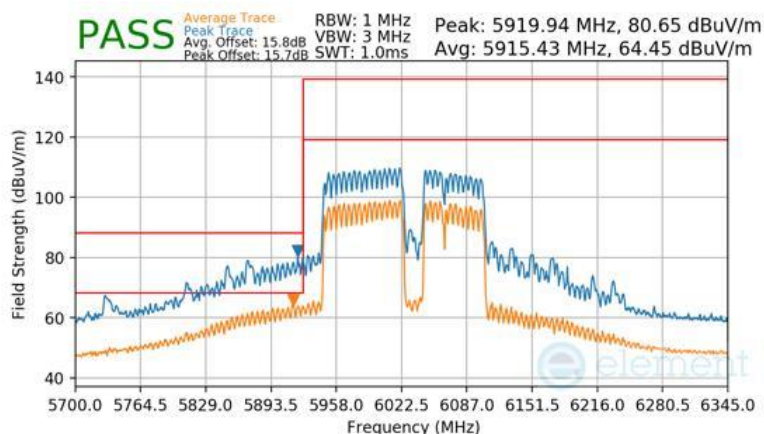


Plot 7-1714 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 623 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

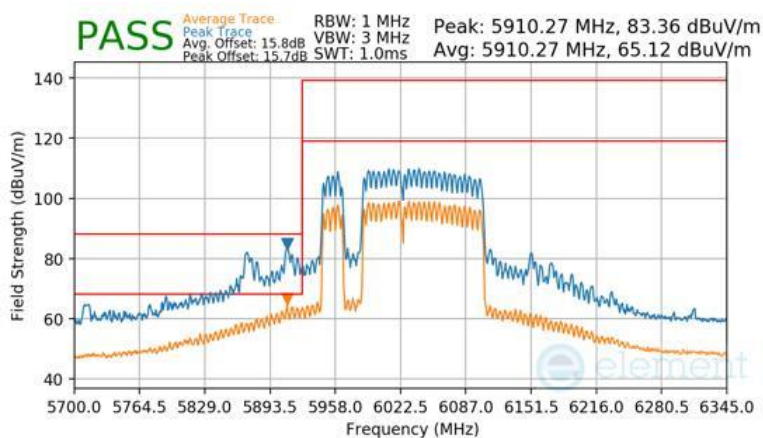

Plot 7-1715 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

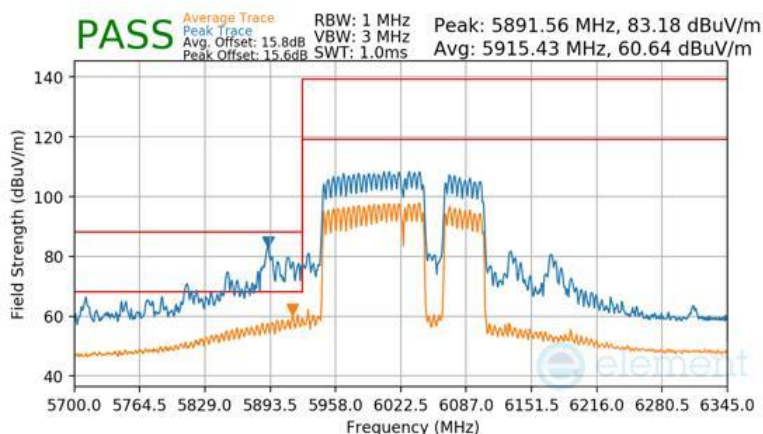


Plot 7-1716 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 624 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

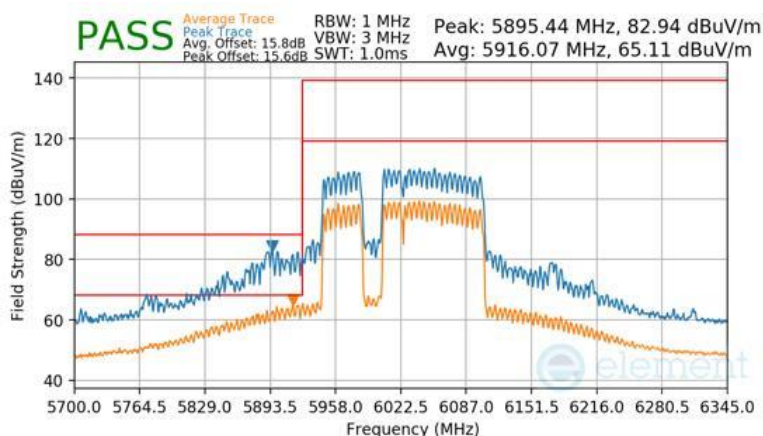

Plot 7-1717 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

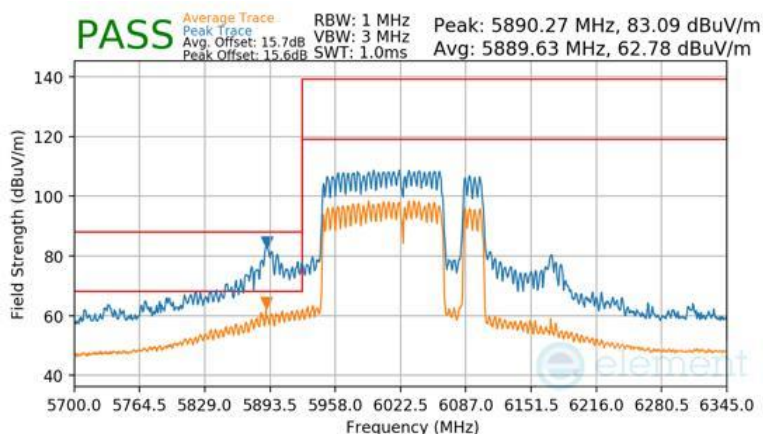


Plot 7-1718 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 625 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

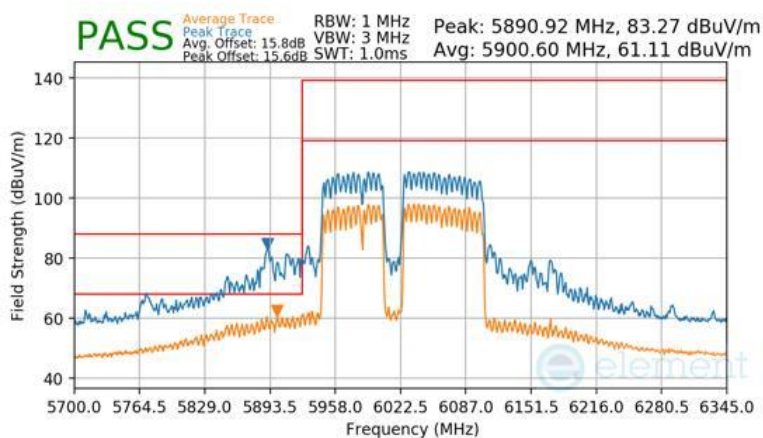

Plot 7-1719 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

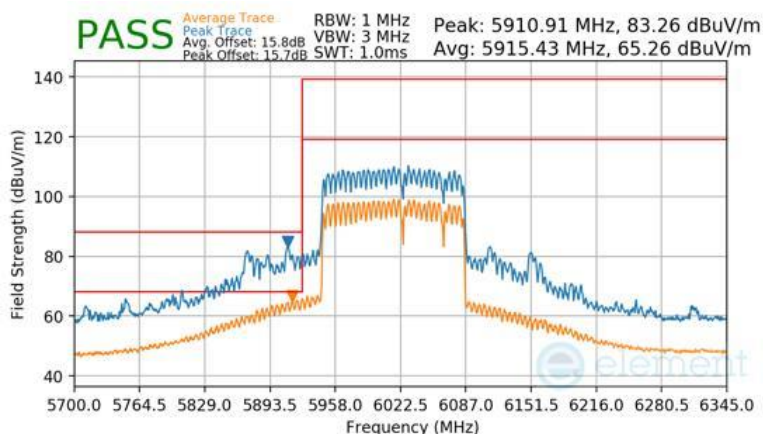


Plot 7-1720 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 626 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

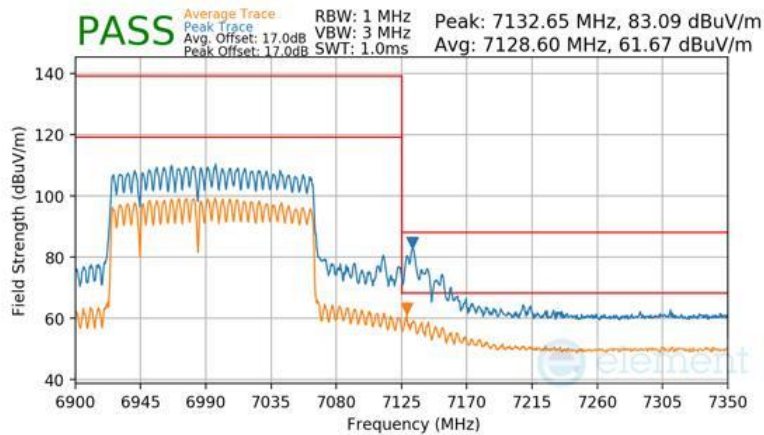

Plot 7-1721 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 96
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

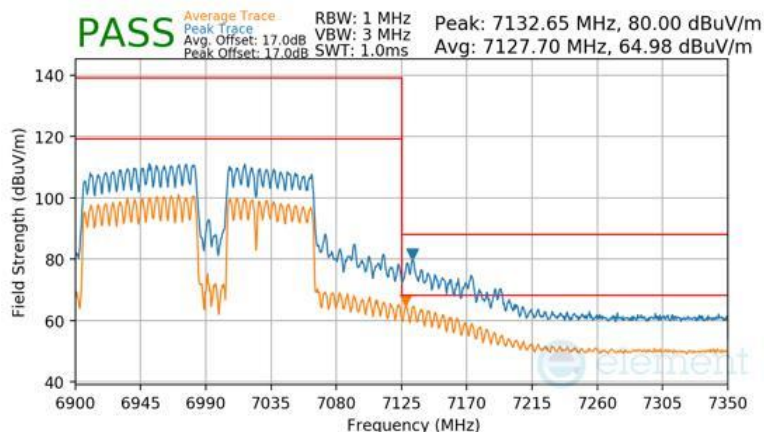


Plot 7-1722 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 627 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

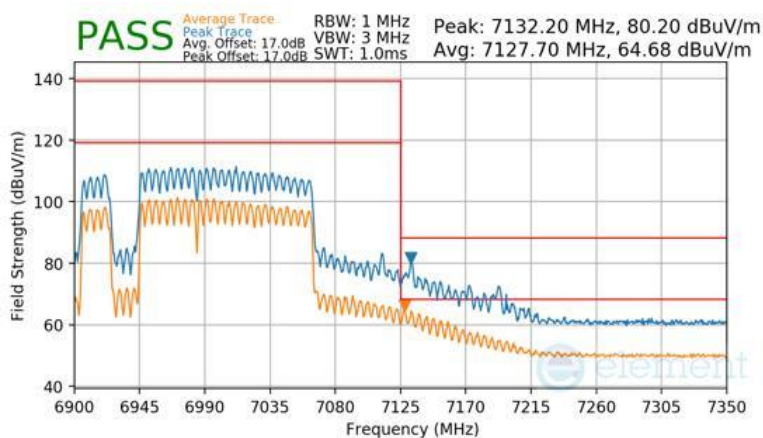

Plot 7-1723 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 97
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

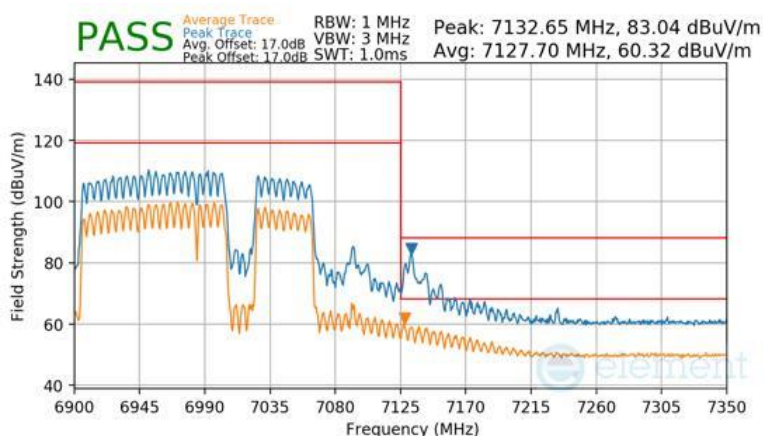


Plot 7-1724 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 628 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

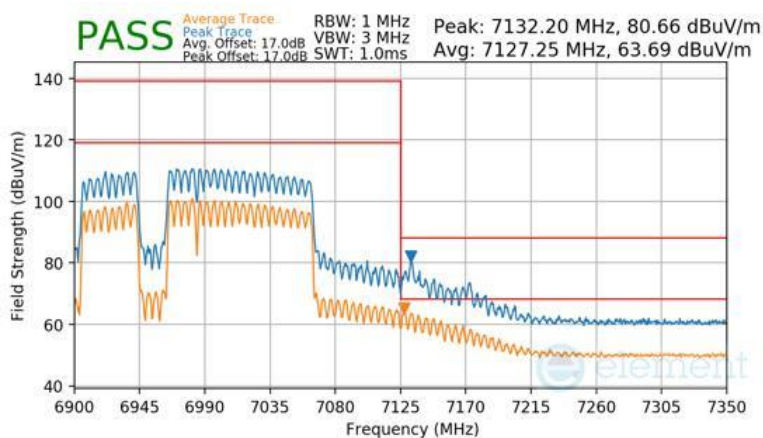

Plot 7-1725 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 98
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

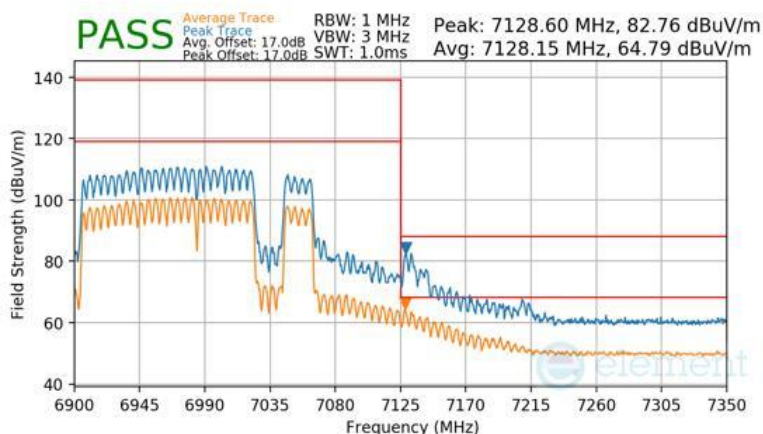


Plot 7-1726 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 629 of 655


V 11.0 05/2025

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

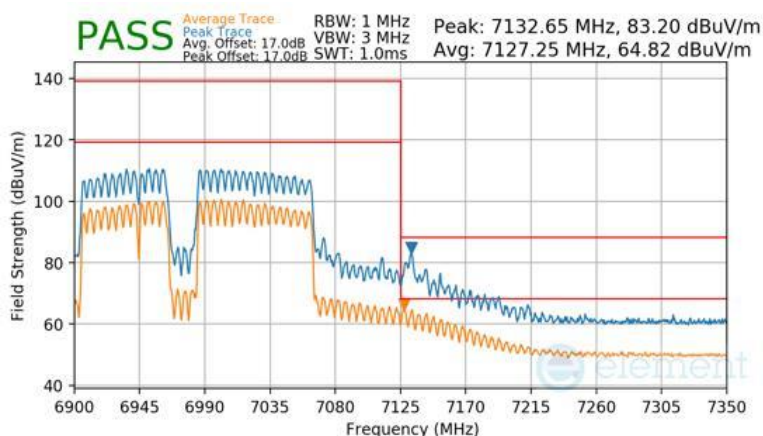

Plot 7-1727 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (L)

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 99
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

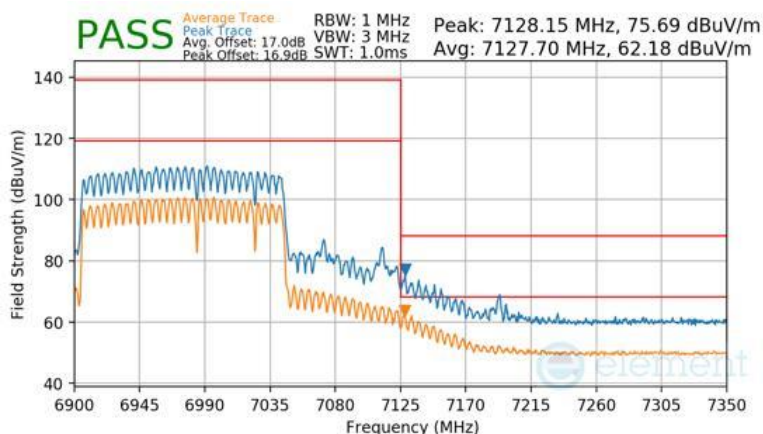


Plot 7-1728 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996+484+242 (H)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 630 of 655

V 11.0 05/2025


RU996x2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 6025MHz
Channel: 15

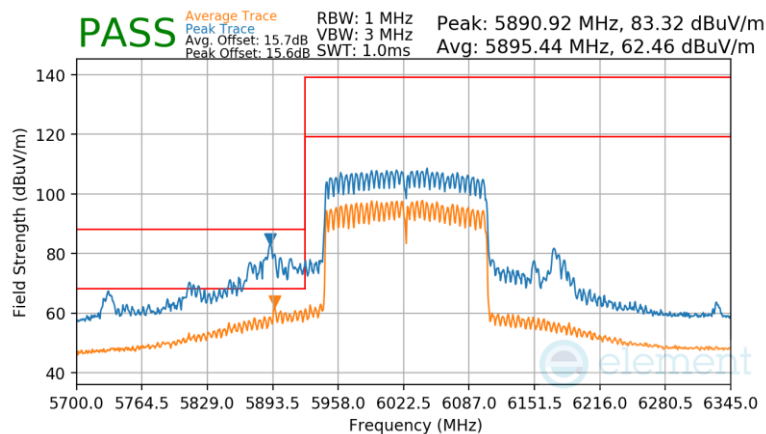

Plot 7-1729 CDD Diversity Radiated Lower Band Edge (Peak & Average – UNII Band 5) - RU996X2

Mode: 802.11be OFDMA
Transfer Rate: MCS11
RU Index: 68
Distance of Measurements: 3 Meters
Operating Frequency: 6985MHz
Channel: 207

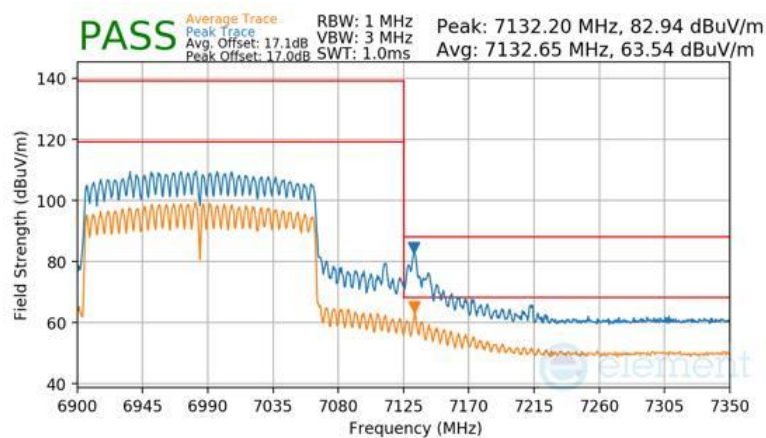

Plot 7-1730 CDD Diversity Radiated Upper Band Edge (Peak & Average – UNII Band 8) - RU996X2

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 631 of 655

V 11.0 05/2025

7.8 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-252 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-252. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = quasi-peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 632 of 655

V 11.0 05/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

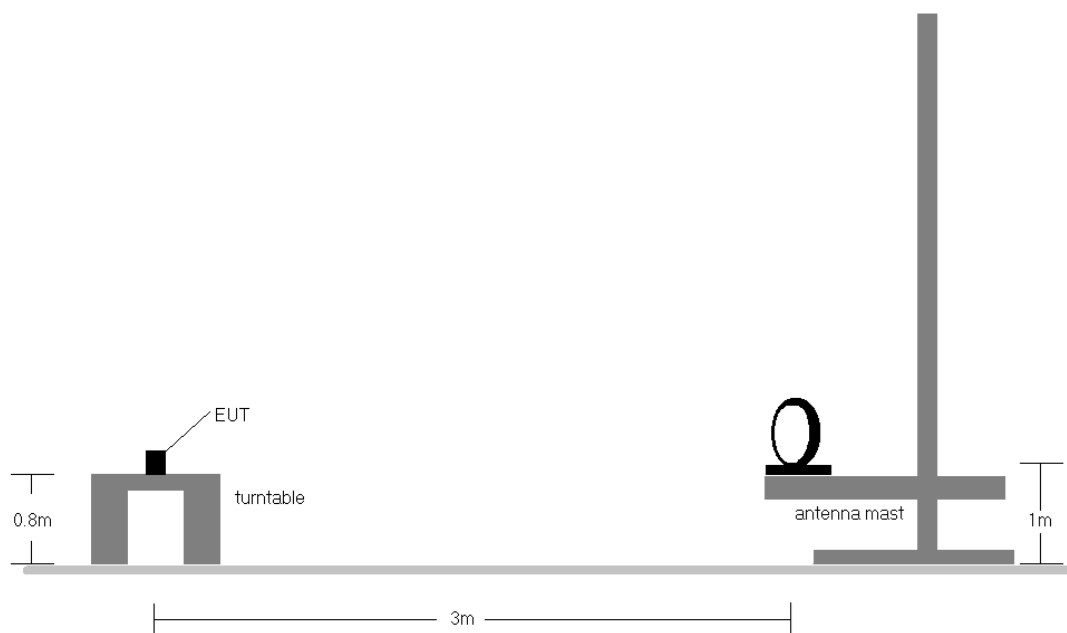


Figure 7-6. Radiated Test Setup < 30MHz

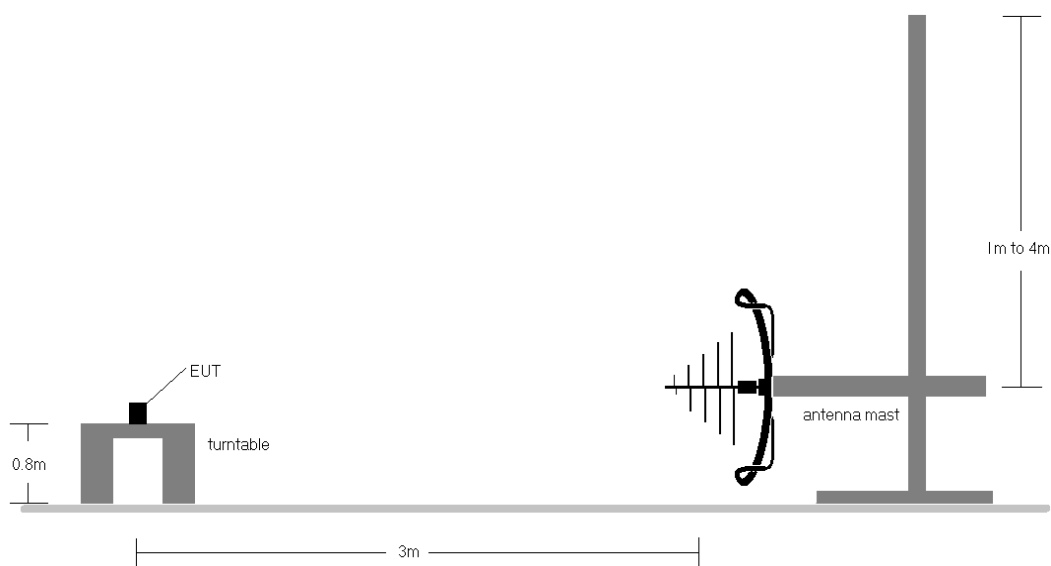


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 633 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-252.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions that were within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
10. All antenna configurations were investigated and only the worst case is reported.
11. The unit was tested with all possible modes and only the highest emission is reported.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamp Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 634 of 655

V 11.0 05/2025

7.8.1 CDD Primary Radiated Spurious Emissions Measurements (Below 1GHz)

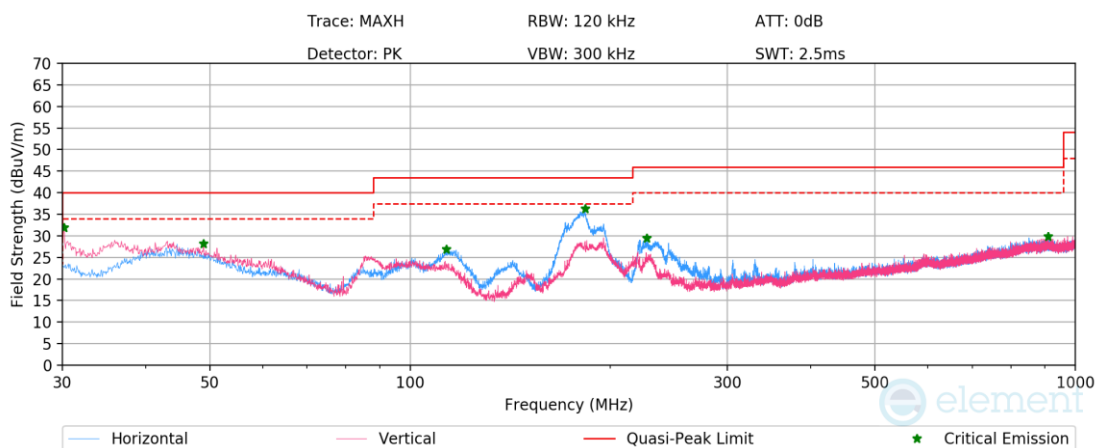


Plot 7-1731. Radiated Spurious Emissions below 1GHz CDD Primary (802.11be – Ch.45 – RU26) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
30.15	Max-Peak	V	300	-	-55.92	-19.22	31.86	40.00	-8.14
48.93	Max-Peak	V	100	-	-63.86	-15.01	28.13	40.00	-11.87
113.31	Max-Peak	H	300	-	-61.46	-18.67	26.87	43.50	-16.63
183.27	Max-Peak	H	200	-	-51.44	-19.26	36.30	43.50	-7.20
226.95	Max-Peak	H	100	-	-60.60	-16.95	29.45	46.00	-16.55
910.69	Max-Peak	H	200	-	-73.13	-4.02	29.84	46.00	-16.16

Table 7-253. Radiated Spurious Emissions below 1GHz CDD Primary (802.11be – Ch.45 – RU26) with AC/DC Adapter

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 635 of 655

V 11.0 05/2025

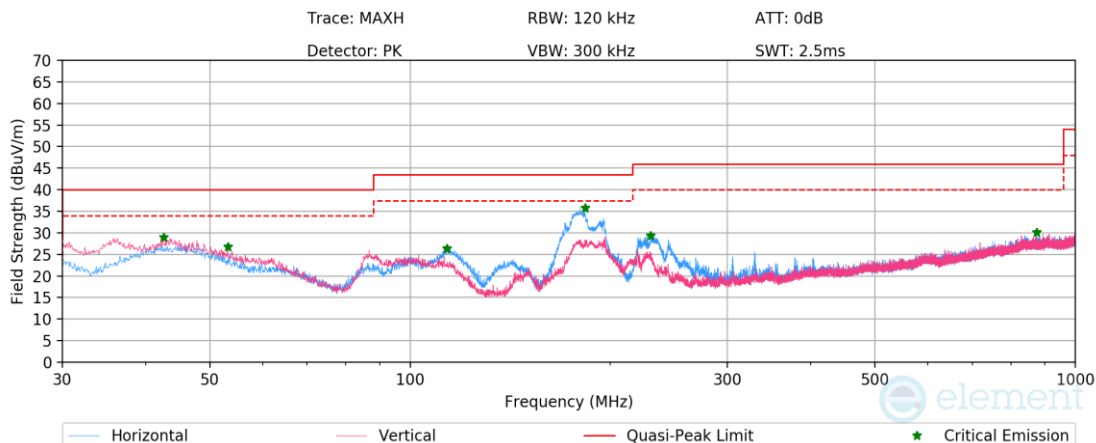

Plot 7-1732. Radiated Spurious Emissions below 1GHz CDD Primary (802.11be – Ch.45 – RU242) with AC/DC Adapter


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
42.57	Max-Peak	V	100	-	-62.47	-15.63	28.90	40.00	-11.10
53.19	Max-Peak	V	100	-	-64.84	-15.41	26.75	40.00	-13.25
113.55	Max-Peak	H	300	-	-61.90	-18.69	26.41	43.50	-17.09
183.21	Max-Peak	H	200	-	-51.93	-19.27	35.80	43.50	-7.70
229.77	Max-Peak	H	100	-	-60.90	-16.81	29.29	46.00	-16.71
875.35	Max-Peak	H	100	-	-72.20	-4.72	30.07	46.00	-15.93

Table 7-254. Radiated Spurious Emissions below 1GHz CDD Primary (802.11be – Ch.45 – RU242) with AC/DC Adapter

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 636 of 655

V 11.0 05/2025

7.8.2 CDD Diversity Radiated Spurious Emissions Measurements (Below 1GHz)

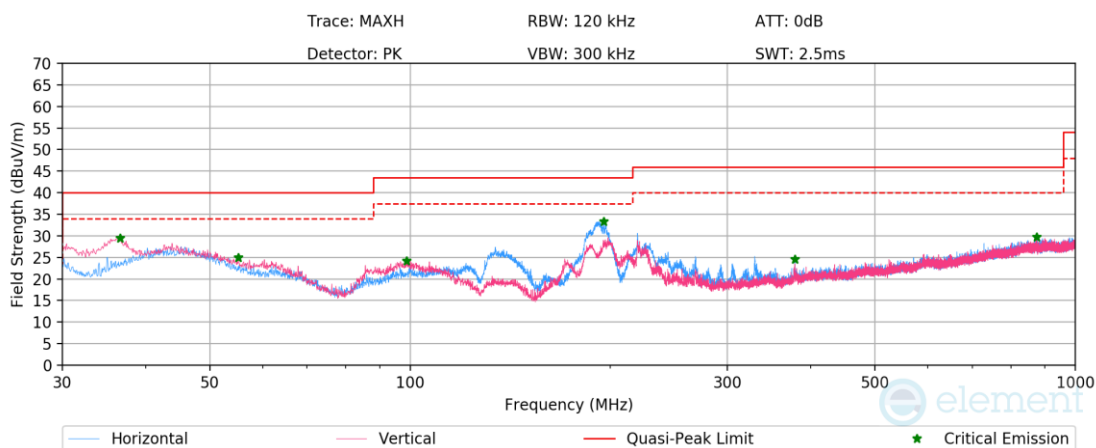


Plot 7-1733. Radiated Spurious Emissions below 1GHz CDD Diversity (802.11be – Ch.45 – RU26) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
36.57	Max-Peak	V	100	-	-59.23	-17.51	30.27	40.00	-9.73
57.15	Max-Peak	V	100	-	-66.30	-16.13	24.58	40.00	-15.42
101.55	Max-Peak	V	100	-	-64.59	-17.77	24.64	43.50	-18.86
195.33	Max-Peak	H	100	-	-55.19	-17.67	34.14	43.50	-9.36
378.86	Max-Peak	H	100	-	-68.70	-13.34	24.96	46.00	-21.04
905.05	Max-Peak	V	300	-	-72.82	-4.29	29.89	46.00	-16.11

Table 7-255. Radiated Spurious Emissions below 1GHz CDD Diversity (802.11be – Ch.45 – RU26) with AC/DC Adapter

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 637 of 655

V 11.0 05/2025

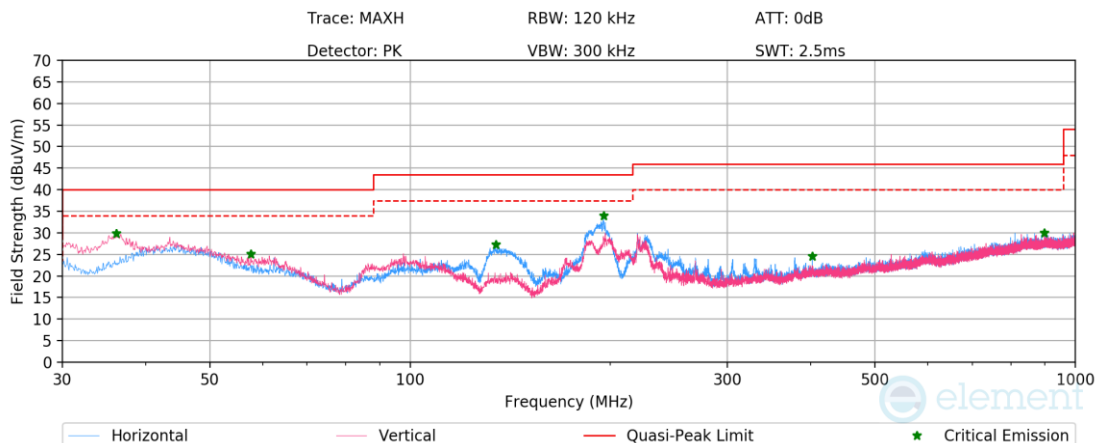

Plot 7-1734. Radiated Spurious Emissions below 1GHz CDD Diversity (802.11be – Ch.45 – RU242) with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
35.61	Max-Peak	V	100	-	-59.44	-17.97	29.59	40.00	-10.41
61.47	Max-Peak	V	100	-	-64.61	-17.36	25.03	40.00	-14.97
134.85	Max-Peak	H	200	-	-58.77	-21.20	27.03	43.50	-16.47
195.21	Max-Peak	H	100	-	-54.83	-17.68	34.49	43.50	-9.01
331.70	Max-Peak	H	100	-	-68.52	-14.32	24.16	46.00	-21.84
911.17	Max-Peak	V	100	-	-72.84	-4.07	30.09	46.00	-15.91

Table 7-256. Radiated Spurious Emissions below 1GHz CDD Diversity (802.11be – Ch.45 – RU242) with AC/DC Adapter

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 638 of 655

V 11.0 05/2025

7.9 AC Line-Conducted Emissions Measurement

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-257. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 639 of 655

V 11.0 05/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

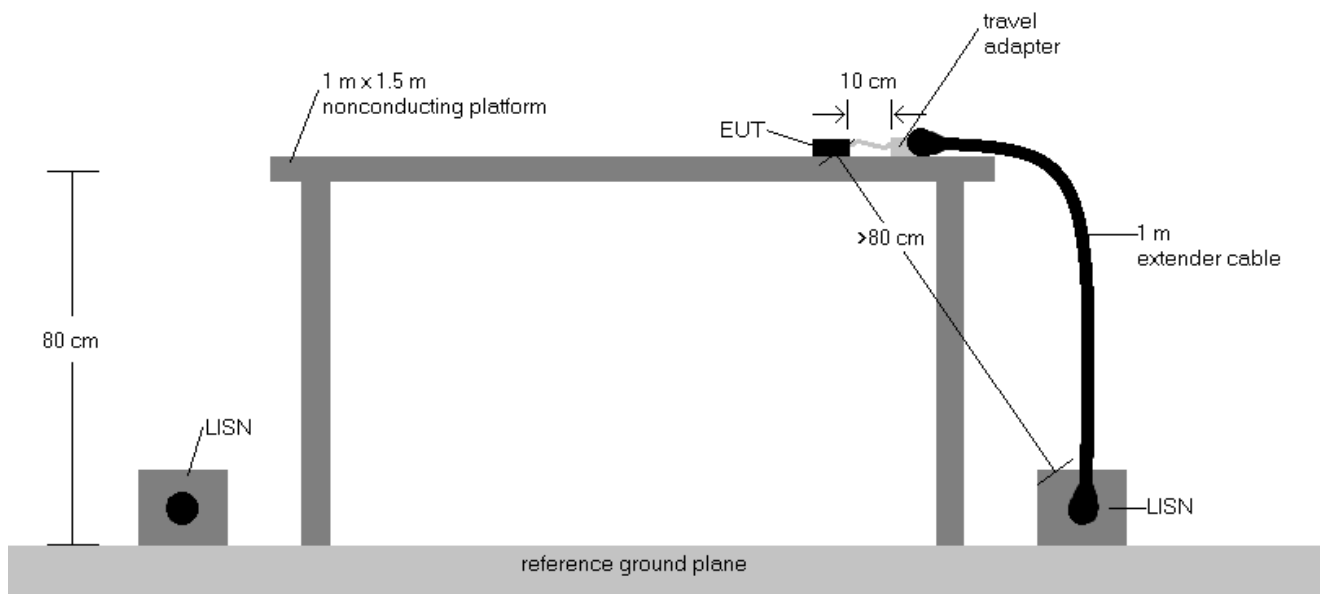


Figure 7-8. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 640 of 655

V 11.0 05/2025

7.9.1 CDD Primary

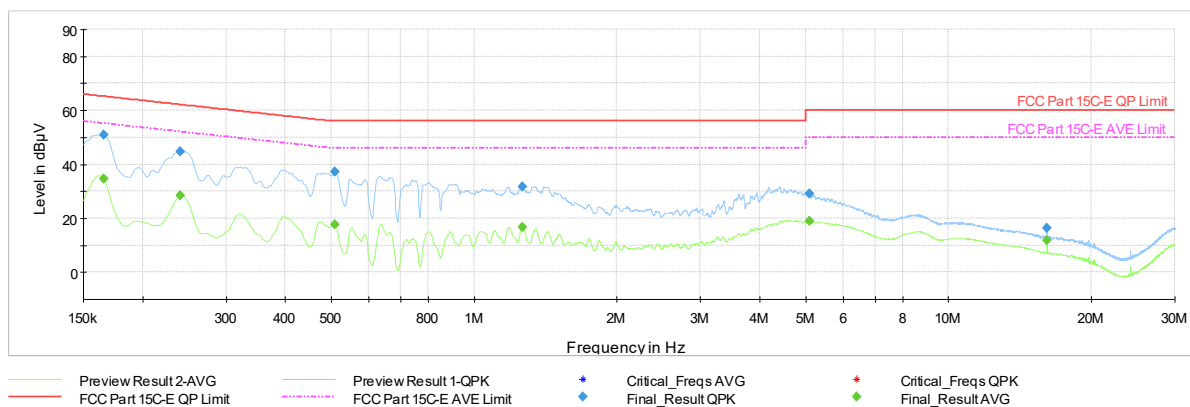

Plot 7-1735. AC Line Conducted Plot with 11be CDD Primary UNII Band 5 – RU26 – Ch.45 (L1) with AC/DC Adapter


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	34.49	55.17	-20.68	L1	GND
0.17	FINAL	50.90	---	65.17	-14.27	L1	GND
0.24	FINAL	---	28.40	52.10	-23.70	L1	GND
0.24	FINAL	44.68	---	62.10	-17.42	L1	GND
0.51	FINAL	---	17.79	46.00	-28.21	L1	GND
0.51	FINAL	37.11	---	56.00	-18.89	L1	GND
1.27	FINAL	31.61	---	56.00	-24.39	L1	GND
1.27	FINAL	---	16.59	46.00	-29.41	L1	GND
5.09	FINAL	29.15	---	60.00	-30.85	L1	GND
5.09	FINAL	---	18.93	50.00	-31.07	L1	GND
16.15	FINAL	---	11.79	50.00	-38.21	L1	GND
16.15	FINAL	16.38	---	60.00	-43.62	L1	GND

Table 7-258. AC Line Conducted Data with 11be CDD Primary UNII Band 5 – RU26 – Ch.45 (L1) with AC/DC Adapter

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 641 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

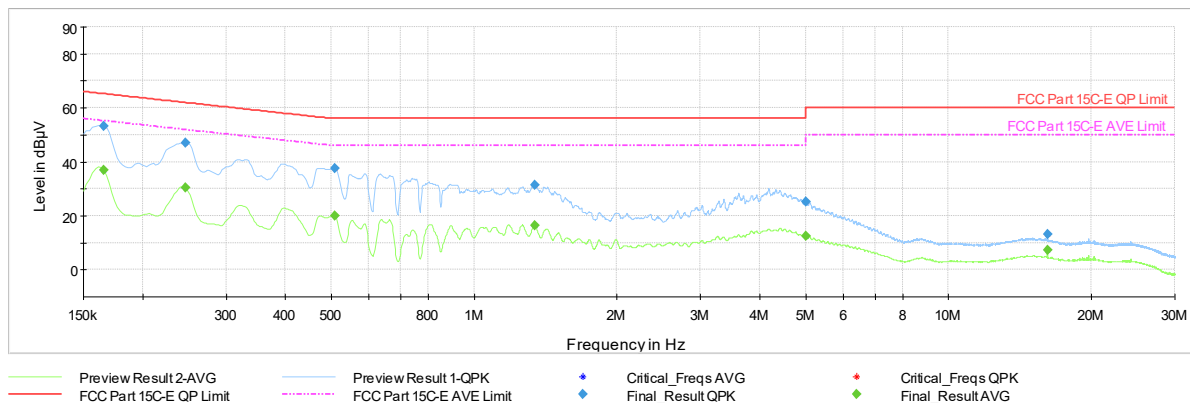


Plot 7-1736. AC Line Conducted Plot with 11be CDD Primary UNII Band 5 – RU26 – Ch.45 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	37.03	55.17	-18.14	N	GND
0.17	FINAL	53.27	---	65.17	-11.90	N	GND
0.25	FINAL	---	30.28	51.87	-21.59	N	GND
0.25	FINAL	46.96	---	61.87	-14.91	N	GND
0.51	FINAL	---	20.07	46.00	-25.93	N	GND
0.51	FINAL	37.61	---	56.00	-18.39	N	GND
1.35	FINAL	31.22	---	56.00	-24.78	N	GND
1.35	FINAL	---	16.22	46.00	-29.78	N	GND
5.00	FINAL	25.23	---	60.00	-34.77	N	GND
5.00	FINAL	---	12.42	50.00	-37.58	N	GND
16.15	FINAL	---	7.42	50.00	-42.58	N	GND
16.15	FINAL	12.98	---	60.00	-47.02	N	GND

Table 7-259. AC Line Conducted Data with 11be CDD Primary UNII Band 5 – RU26 – Ch.45 (N) with AC/DC Adapter

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 642 of 655

V 11.0 05/2025

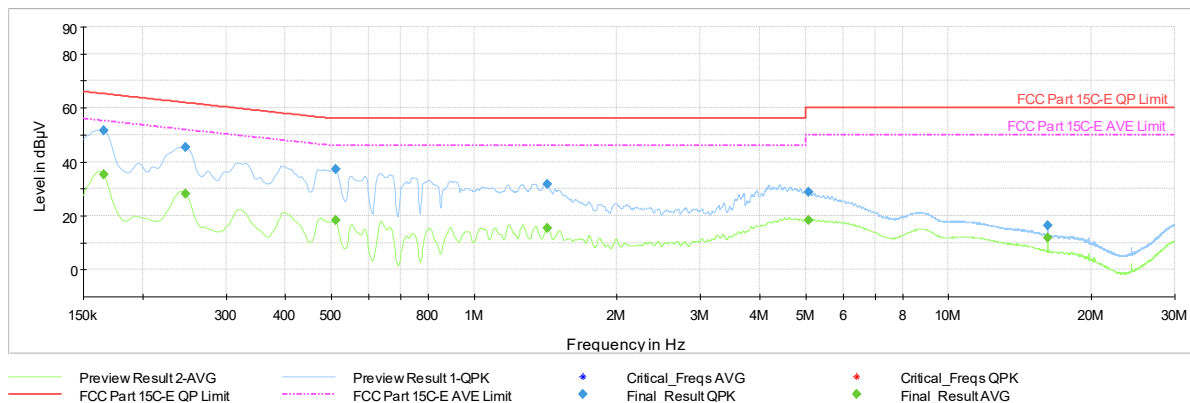


Plot 7-1737. AC Line Conducted Plot with 11be CDD Primary UNII Band 5 – RU242 – Ch.45 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	35.18	55.17	-19.99	L1	GND
0.17	FINAL	51.59	---	65.17	-13.58	L1	GND
0.25	FINAL	---	28.19	51.87	-23.68	L1	GND
0.25	FINAL	45.29	---	61.87	-16.58	L1	GND
0.51	FINAL	---	18.47	46.00	-27.53	L1	GND
0.51	FINAL	37.27	---	56.00	-18.73	L1	GND
1.43	FINAL	31.74	---	56.00	-24.26	L1	GND
1.43	FINAL	---	15.31	46.00	-30.69	L1	GND
5.07	FINAL	28.75	---	60.00	-31.25	L1	GND
5.07	FINAL	---	18.47	50.00	-31.53	L1	GND
16.16	FINAL	---	11.79	50.00	-38.21	L1	GND
16.16	FINAL	16.37	---	60.00	-43.63	L1	GND

Table 7-260. AC Line Conducted Data with 11be CDD Primary UNII Band 5 – RU242 – Ch.45 (L1) with AC/DC Adapter

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 643 of 655

V 11.0 05/2025

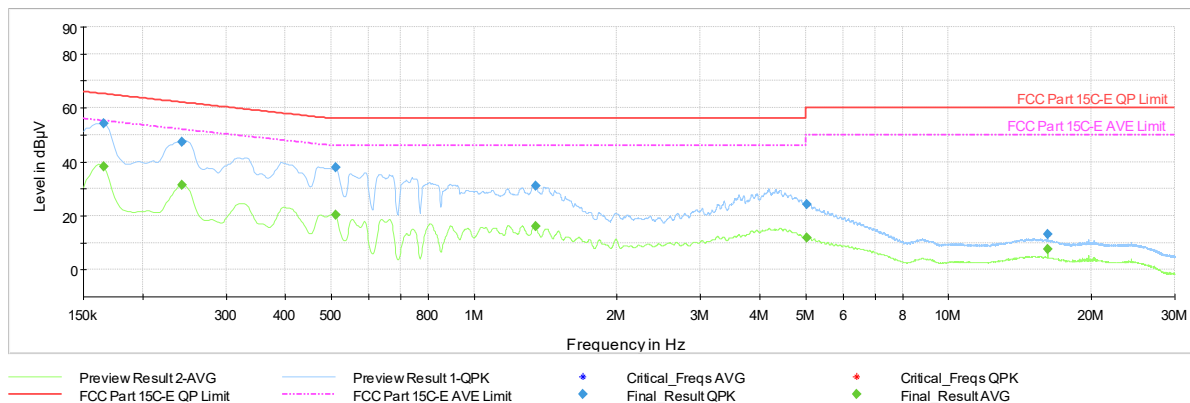

Plot 7-1738. AC Line Conducted Plot with 11be CDD Primary UNII Band 5 – RU242 – Ch.45 (N) with AC/DC Adapter


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	38.05	55.17	-17.12	N	GND
0.17	FINAL	54.20	---	65.17	-10.97	N	GND
0.24	FINAL	---	31.51	52.02	-20.51	N	GND
0.24	FINAL	47.48	---	62.02	-14.54	N	GND
0.51	FINAL	---	20.27	46.00	-25.73	N	GND
0.51	FINAL	37.91	---	56.00	-18.09	N	GND
1.35	FINAL	30.98	---	56.00	-25.02	N	GND
1.35	FINAL	---	16.03	46.00	-29.97	N	GND
5.02	FINAL	24.15	---	60.00	-35.85	N	GND
5.02	FINAL	---	11.78	50.00	-38.22	N	GND
16.16	FINAL	---	7.47	50.00	-42.53	N	GND
16.16	FINAL	12.99	---	60.00	-47.01	N	GND

Table 7-261. AC Line Conducted Data with 11be CDD Primary UNII Band 5 – RU242 – Ch.45 (N) with AC/DC Adapter

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 644 of 655

V 11.0 05/2025

7.9.2 CDD Diversity

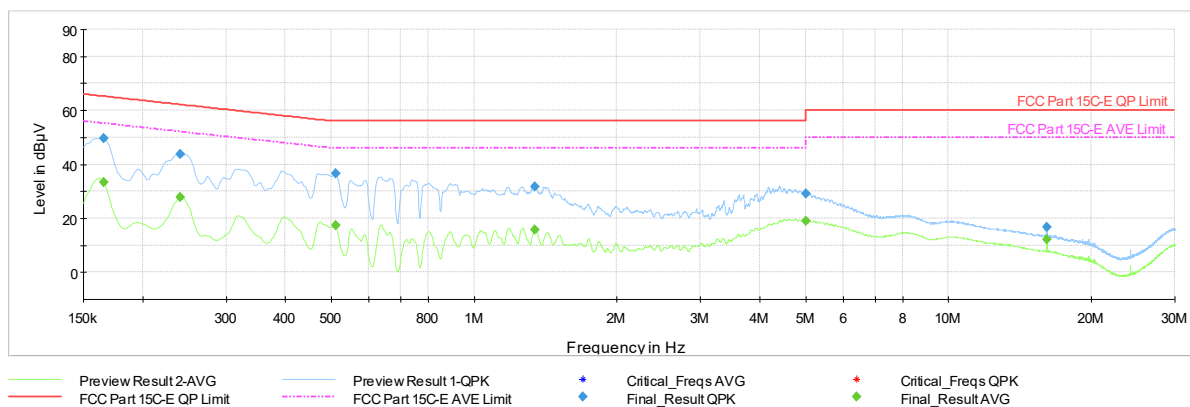


Plot 7-1739. AC Line Conducted Plot with 11be CDD Diversity UNII Band 5 – RU26 – Ch.45 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	33.24	55.17	-21.93	L1	GND
0.17	FINAL	49.55	---	65.17	-15.62	L1	GND
0.24	FINAL	---	27.83	52.10	-24.27	L1	GND
0.24	FINAL	43.70	---	62.10	-18.40	L1	GND
0.51	FINAL	---	17.29	46.00	-28.71	L1	GND
0.51	FINAL	36.66	---	56.00	-19.34	L1	GND
1.35	FINAL	31.62	---	56.00	-24.38	L1	GND
1.35	FINAL	---	15.80	46.00	-30.20	L1	GND
5.00	FINAL	29.15	---	60.00	-30.85	L1	GND
5.00	FINAL	---	18.91	50.00	-31.09	L1	GND
16.15	FINAL	---	12.07	50.00	-37.93	L1	GND
16.15	FINAL	16.79	---	60.00	-43.21	L1	GND

Table 7-262. AC Line Conducted Data with 11be CDD Diversity UNII Band 5 – RU26 – Ch.45 (L1) with AC/DC Adapter

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 645 of 655

V 11.0 05/2025

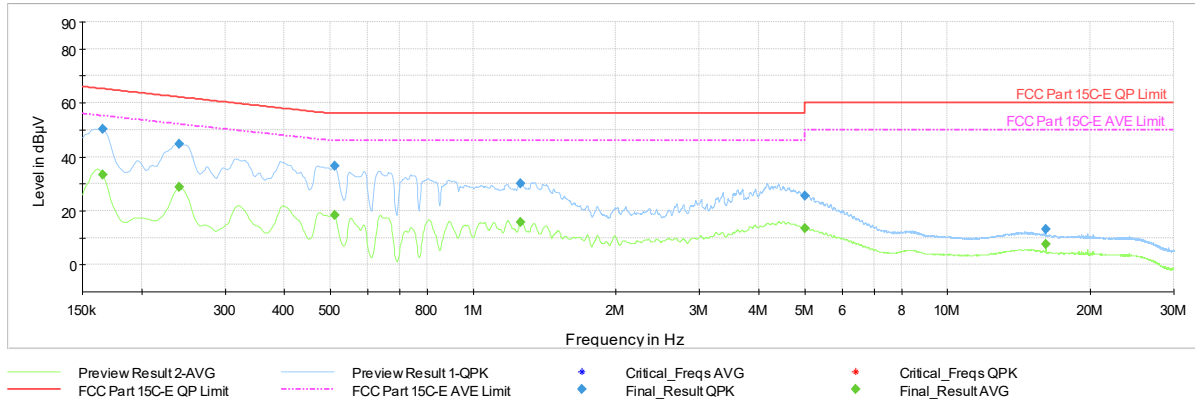


Plot 7-1740. AC Line Conducted Plot with 11be CDD Diversity UNII Band 5 – RU26 – Ch.45 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	33.38	55.17	-21.79	N	GND
0.17	FINAL	50.13	---	65.17	-15.04	N	GND
0.24	FINAL	---	28.66	52.10	-23.44	N	GND
0.24	FINAL	44.59	---	62.10	-17.51	N	GND
0.51	FINAL	---	18.25	46.00	-27.75	N	GND
0.51	FINAL	36.44	---	56.00	-19.56	N	GND
1.26	FINAL	30.17	---	56.00	-25.83	N	GND
1.26	FINAL	---	15.76	46.00	-30.24	N	GND
5.01	FINAL	25.51	---	60.00	-34.49	N	GND
5.01	FINAL	---	13.55	50.00	-36.45	N	GND
16.14	FINAL	---	7.48	50.00	-42.52	N	GND
16.14	FINAL	13.03	---	60.00	-46.97	N	GND

Table 7-263. AC Line Conducted Data with 11be CDD Diversity UNII Band 5 – RU26 – Ch.45 (N) with AC/DC Adapter

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 646 of 655

V 11.0 05/2025

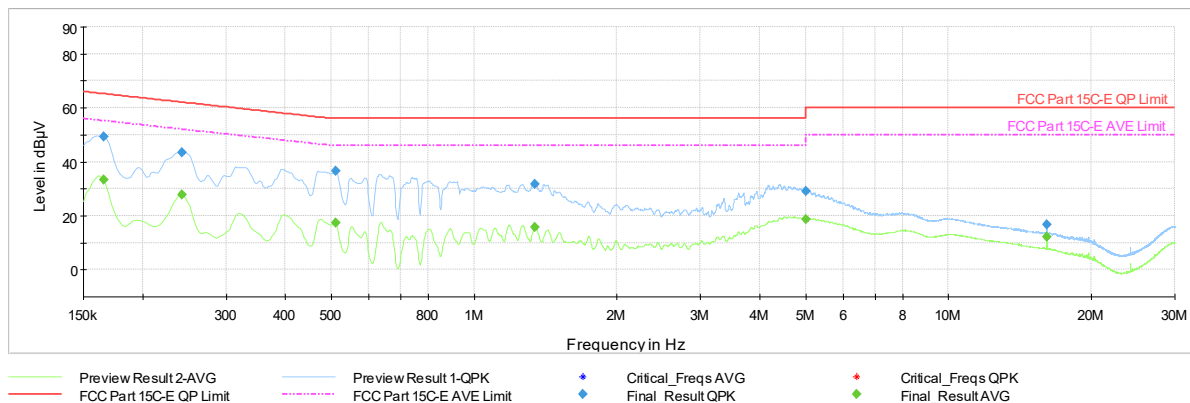


Plot 7-1741. AC Line Conducted Plot with 11be CDD Diversity UNII Band 5 – RU242 – Ch.45 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	33.16	55.17	-22.01	L1	GND
0.17	FINAL	49.40	---	65.17	-15.77	L1	GND
0.24	FINAL	---	27.70	52.02	-24.32	L1	GND
0.24	FINAL	43.38	---	62.02	-18.64	L1	GND
0.51	FINAL	---	17.43	46.00	-28.57	L1	GND
0.51	FINAL	36.54	---	56.00	-19.46	L1	GND
1.35	FINAL	31.59	---	56.00	-24.41	L1	GND
1.35	FINAL	---	15.81	46.00	-30.19	L1	GND
5.01	FINAL	29.00	---	60.00	-31.00	L1	GND
5.01	FINAL	---	18.78	50.00	-31.22	L1	GND
16.14	FINAL	---	12.02	50.00	-37.98	L1	GND
16.14	FINAL	16.79	---	60.00	-43.21	L1	GND

Table 7-264. AC Line Conducted Data with 11be CDD Diversity UNII Band 5 – RU242 – Ch.45 (L1) with AC/DC Adapter

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 647 of 655

V 11.0 05/2025

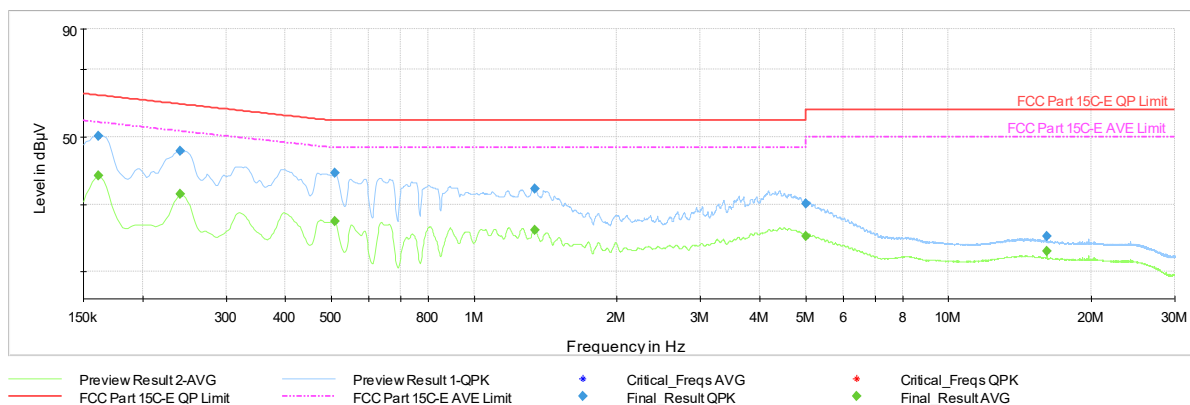

Plot 7-1742. AC Line Conducted Plot with 11be CDD Diversity UNII Band 5 – RU242 – Ch.45 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.16	FINAL	---	35.61	55.40	-19.79	N	GND
0.16	FINAL	50.42	---	65.40	-14.98	N	GND
0.24	FINAL	---	28.65	52.10	-23.45	N	GND
0.24	FINAL	44.62	---	62.10	-17.48	N	GND
0.51	FINAL	---	18.73	46.00	-27.27	N	GND
0.51	FINAL	36.45	---	56.00	-19.55	N	GND
1.35	FINAL	30.61	---	56.00	-25.39	N	GND
1.35	FINAL	---	15.44	46.00	-30.56	N	GND
5.02	FINAL	25.33	---	60.00	-34.67	N	GND
5.02	FINAL	---	13.20	50.00	-36.80	N	GND
16.13	FINAL	---	7.52	50.00	-42.48	N	GND
16.13	FINAL	13.03	---	60.00	-46.97	N	GND

Table 7-265. AC Line Conducted Data with 11be CDD Diversity UNII Band 5 – RU242 – Ch.45 (N) with AC/DC Adapter

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 648 of 655

V 11.0 05/2025

7.10 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point

§15.407; RSS-248

Test Overview and Limits

A client device that connects to a Standard Power AP must limit its power to a minimum of 6 dB lower than its associated Standard Power access point's authorized transmit power. The term "authorized" means the AFC-approved power level for the AP to use on a particular channel.

Test Procedure Used

KDB 987594 D03 v03r04 – Section L

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 12.4.3.2 Method PM-G

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 14.4 Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

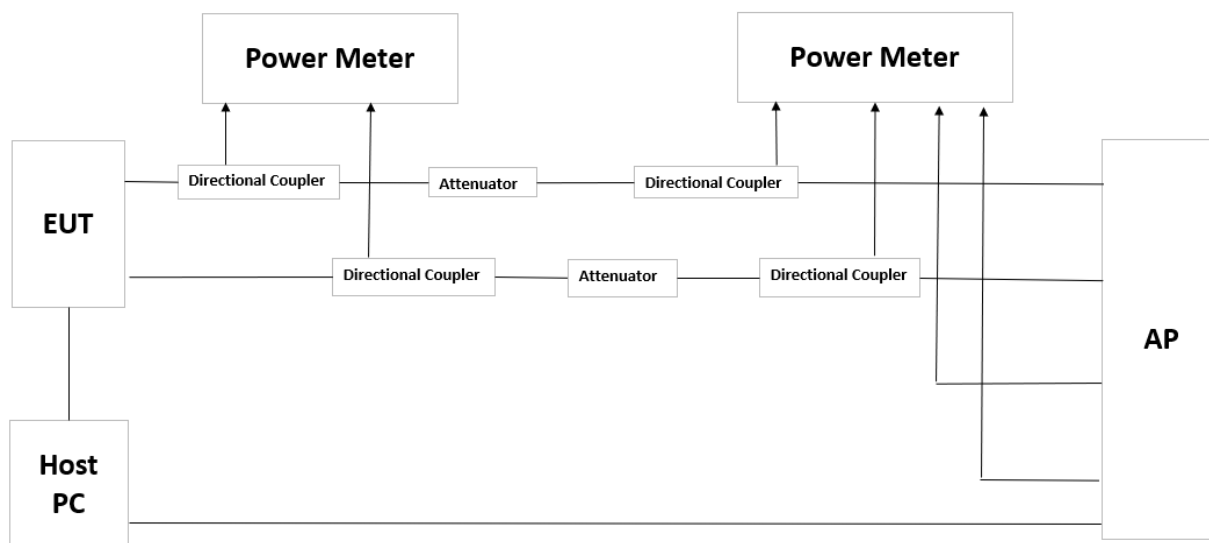


Figure 7-9. Test Instrument & Measurement Setup

Test Notes


1. CMX500 was used as the AP.
2. If the AP is allowed with a maximal value of 36dbm by the AFC, the AP should advertise the TPE (Transmit Power Envelope) with EIRP (30dBm with a 6dB back-off). The DUT only needs to follow the TPE that the AP is advertising.
3. AFC Limit was set to 36, 28 and 21 dBm EIRP (TPE 30, 22,15 dBm EIRP).

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 649 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

AFC Authorized Power 36dBm EIRP (TPE – 30dBm)

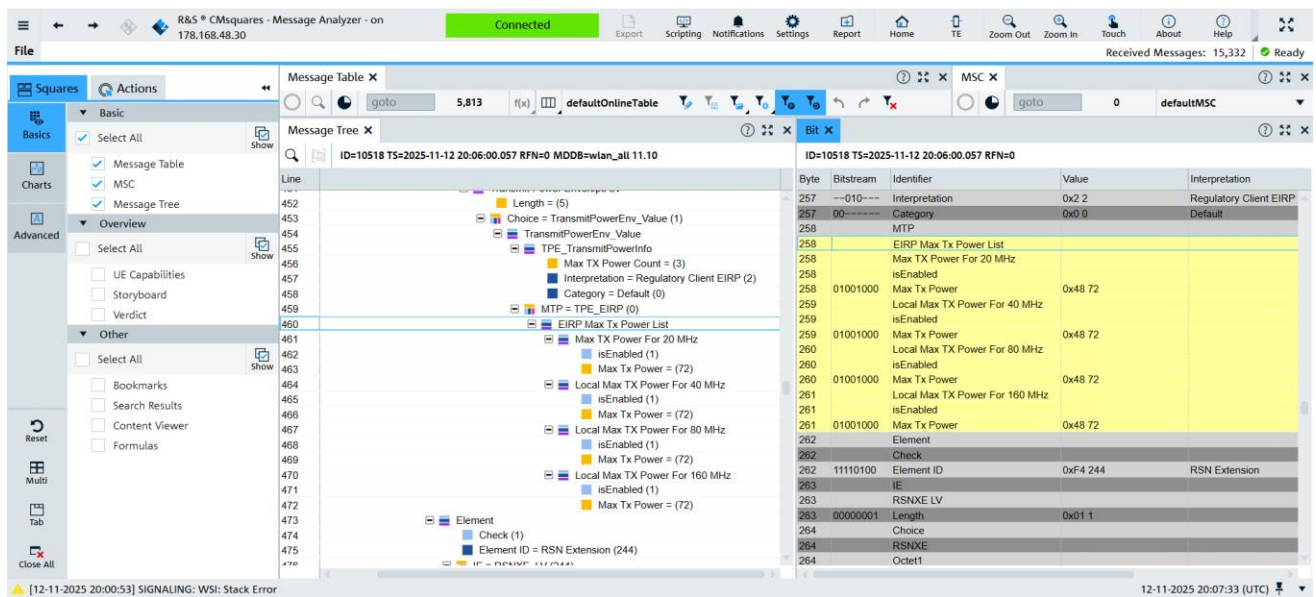

Plot 7-1743. AFC EIRP/PSD Authorization by channel – 36dBm

Channel	Frequency (MHz)	Power Measured (dBm)			Uncorrelated Gain (dBi)	Measured e.i.r.p (dBm)	Limit (dBm)	Margin (dB)
		Antenna WF7a	Antenna WF2a	Summed				
53	6215	17.64	17.45	20.56	1.00	21.56	30.00	-8.44


Table 7-266: EUT measured e.i.r.p (MIMO)

FCC ID: BCGA3461 IC: 579C-A3461			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device		Page 650 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

AFC Authorized Power 28dBm EIRP (TPE – 22dBm)

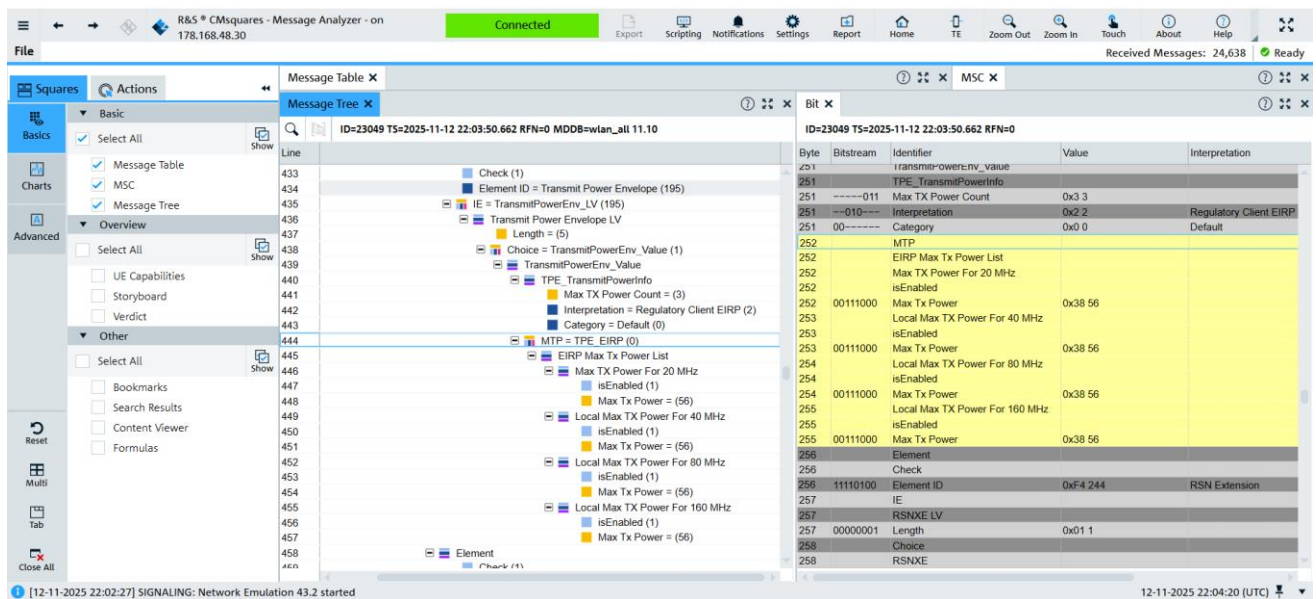

The screenshot displays the R&S CM Squares Message Analyzer interface. The top bar shows the application is connected to a device at 178.168.48.30. The main window is divided into three panes: Squares, Actions, and Message Table. The Message Table pane shows a list of received messages, with the selected message being ID=23049 TS=2025-11-12 22:03:50.662 RFN=0 MDDB=wlan_all 11.10. The Message Tree pane on the left shows the hierarchical structure of the message, including the TPE (Transmit Power Envelope) and EIRP (Equivalent Isotropically Radiated Power) fields. The Bitstream pane on the right shows the raw data of the message, including the TPE and EIRP fields.

Plot 7-1744. AFC EIRP/PSD Auhorization by channel – 28dBm

Channel	Frequency (MHz)	Power Measured (dBm)			Uncorrelated Gain (dBi)	Measured e.i.r.p (dBm)	Limit (dBm)	Margin (dB)
		Antenna WF7a	Antenna WF2a	Summed				
53	6215	17.11	16.62	19.88	1.00	20.88	22.00	-1.12


Table 7-267: EUT measured e.i.r.p (MIMO)

FCC ID: BCGA3461 IC: 579C-A3461			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device		Page 651 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

AFC Authorized Power 21dBm EIRP (TPE – 15dBm)

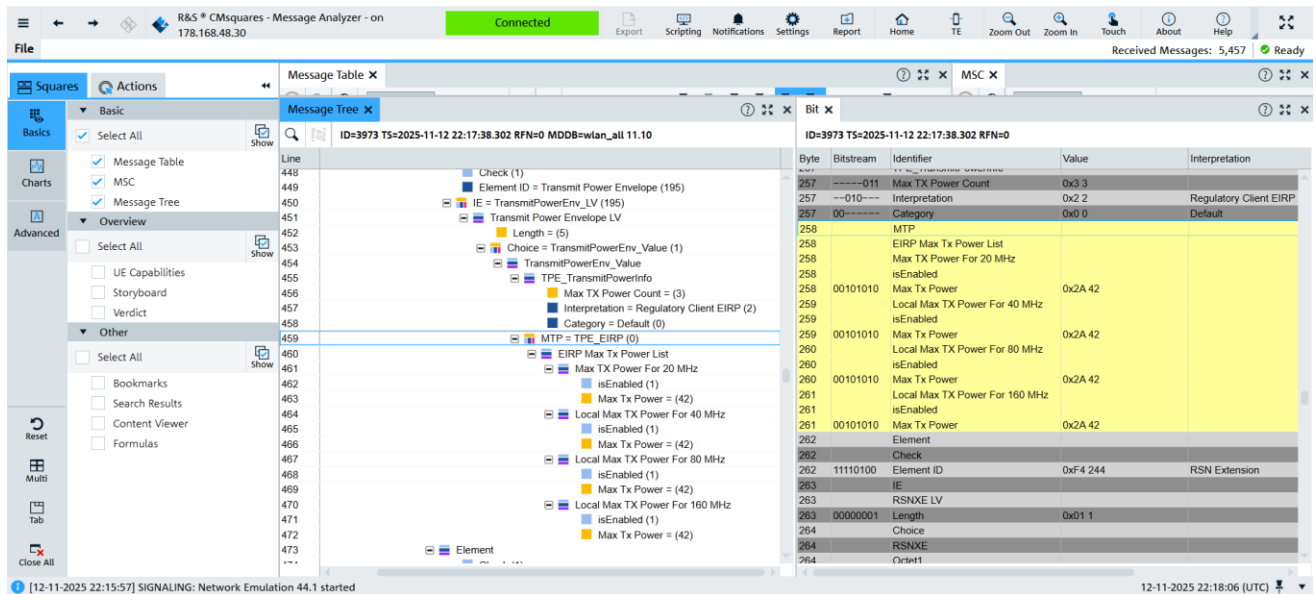

Plot 7-1745. AFC EIRP/PSD Auhorization by channel – 21dBm

Channel	Frequency (MHz)	Power Measured (dBm)			Uncorrelated Gain (dBi)	Measured e.i.r.p (dBm)	Limit (dBm)	Margin (dB)
		Antenna WF7a	Antenna WF2a	Summed				
53	6215	10.63	10.15	13.41	1.00	14.41	15.00	-0.59

Table 7-268: EUT measured e.i.r.p (SISO)

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device		Page 652 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.11 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

§15.407; RSS-248

Test Overview and Limits

A client device may connect to a Standard Power AP with a maximum power level of 30 dBm EIRP. A client may also connect to a Low Power indoor AP, but the power level is limited to a maximum of 24 dBm EIRP. If a client has the flexibility to connect to both APs, verification is needed to show that it can distinguish between the two configurations, and then control the power levels accordingly.

Test Procedure Used

KDB 987594 D02 v03 – Section K

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 12.4.3.2 Method PM-G

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 14.4 Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

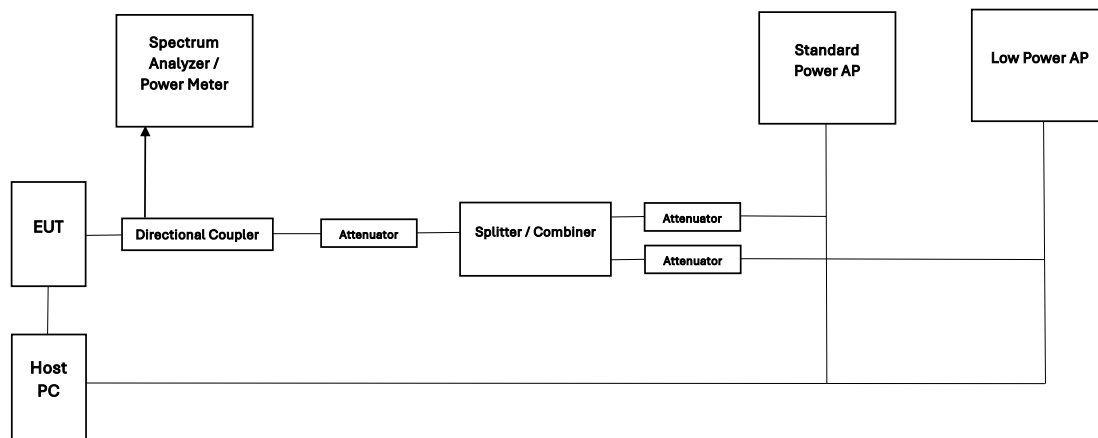



Figure 7-10. Test Instrument & Measurement Setup

Test Notes

1. Standard Power AP was set on highest power setting (36dBm EIRP)
2. Standard Power AP and Low Power Indoor AP were configured to transmit on same channel.
3. CMX500 was used as the Standard Power AP and RAXE500 was used as the Low Power Indoor AP

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 653 of 655

V 11.0 05/2025

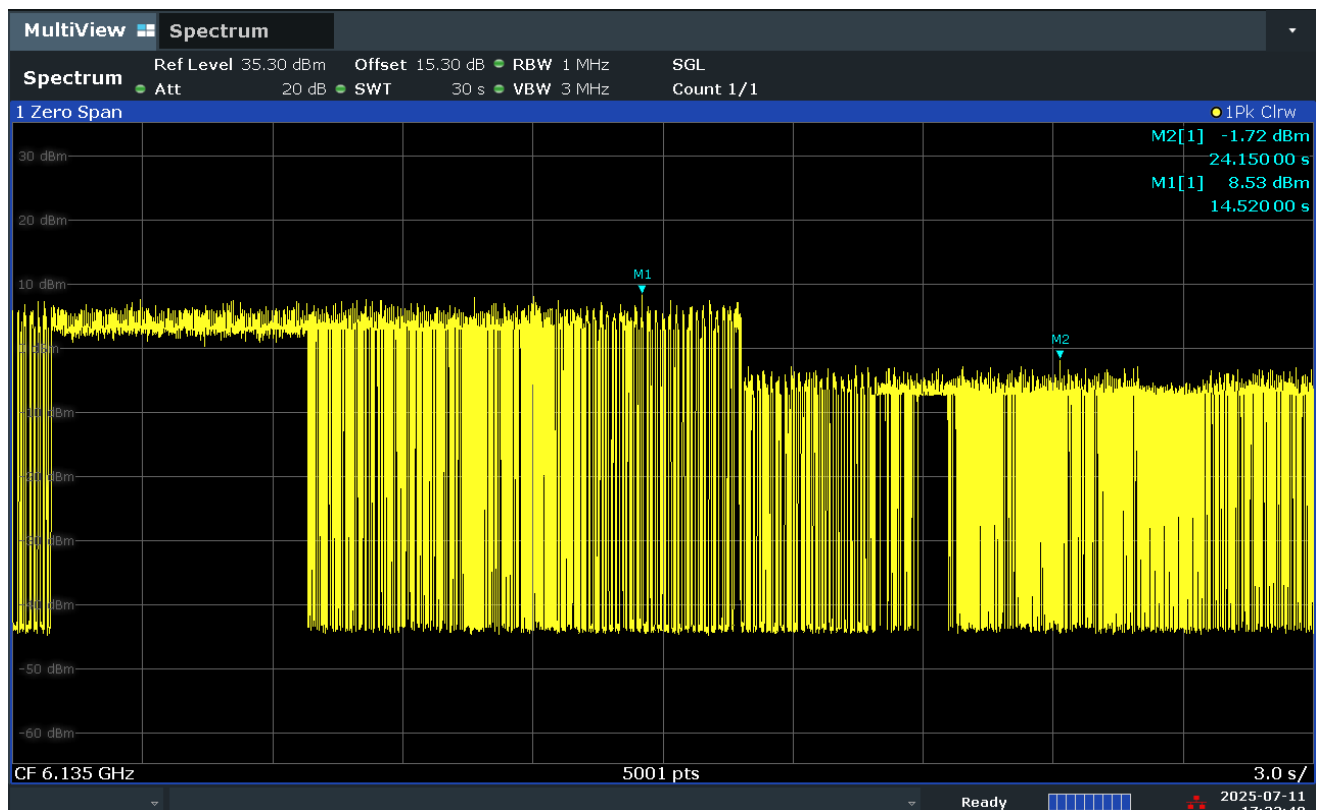

Channel	Frequency (MHz)	Power Measured (dBm)			Uncorrelated Gain (dBi)	Measured e.i.r.p (dBm)	Limit (dBm)	Margin (dB)
		Antenna WF7a	Antenna WF2a	Summed				
53	6215	17.64	17.45	20.56	1.00	21.56	30.00	-8.44

Table 7-269: EUT measured e.i.r.p when established with Standard Power AP

Channel	Frequency (MHz)	Power Measured (dBm)			Uncorrelated Gain (dBi)	Measured e.i.r.p (dBm)	Limit (dBm)	Margin (dB)
		Antenna WF7a	Antenna WF2a	Summed				
53	6215	4.07	4.06	7.08	1.00	8.08	24.00	-15.92

Table 7-270: EUT measured e.i.r.p when established with Low Power Indoor AP

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device		Page 654 of 655

V 11.0 05/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3461** and **IC: 579C-A3461** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-248 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3461 IC: 579C-A3461		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100081-16-R1.BCG	Test Dates: 9/15/2025 - 12/10/2025	EUT Type: Tablet Device	Page 655 of 655