

APPENDIX A: SAR TEST DATA

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 96RHX

Communication System: UID:10011 - CAB, WCDMA; MAIA: Y; Frequency: 836.6 MHz

Medium: 835 Head; Medium parameters used:

$f = 836.6$ MHz; $\text{cond} = 0.867$ S/m; $\text{perm} = 42.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 09/27/2025; Ambient Temp: 23.6°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN7551; ConvF:(9.82,9.71,9.99); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2025-04-15

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.55

Mode: UMTS 850, Antenna 4, Exp: Body| Back Side, Ch. Mid

Area Scan (270.0 x 330.0): Measurement grid: $\text{dx}=15.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (42.0 x 48.0 x 31.2): Measurement grid: $\text{dx}=6.0$ mm, $\text{dy}=6.0$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.83 W/kg; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.918 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

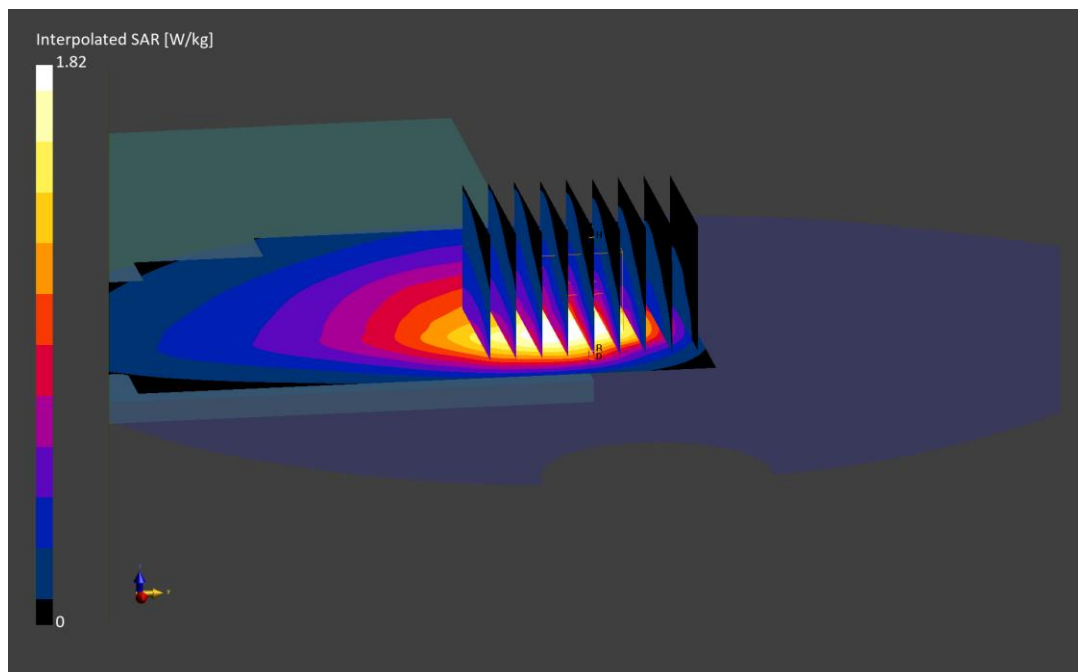

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 9PFD4

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 1752.6 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1752.6$ MHz; $\text{cond} = 1.39$ S/m; $\text{perm} = 38.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/17/2025; Ambient Temp: 21.8°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7421; ConvF:(7.44,8.39,7.85); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn604; Calibrated: 2025-03-06

Phantom: Twin-SAM V8.0; Serial: 1917

Measurement SW: DASY Module SAR V16.4.0.55

Mode: UMTS 1750, Antenna 1b, Exp: Body| Bottom Edge, Ch. High

Area Scan (40.0 x 270.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (35.4 x 35.4 x 31.2): Measurement grid: $\text{dx}=5.9$ mm, $\text{dy}=5.9$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.84 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.985 W/kg

Smallest distance from peaks to all points 3 dB below is 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.1 %

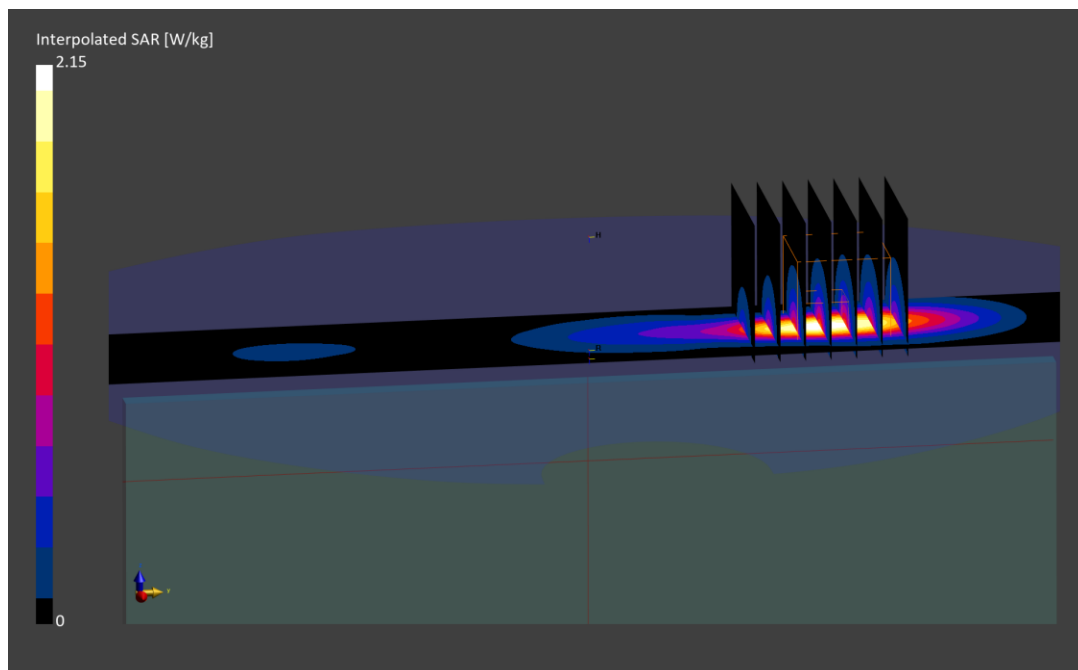

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: GYK30

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 1852.4 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1852.4$ MHz; $\text{cond} = 1.39$ S/m; $\text{perm} = 41.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/13/2025; Ambient Temp: 22.9°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7638; ConvF:(7.94,8.13,8.2); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn467; Calibrated: 2025-02-06

Phantom: Twin-SAM V8.0; Serial: 1692

Measurement SW: DASY Module SAR V16.4.0.55

Mode: UMTS 1900, Antenna 2, Exp: Body| Bottom Edge, Ch. Low

Area Scan (40.0 x 270.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $\text{dx}=6.0$ mm, $\text{dy}=6.0$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.23 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.915 W/kg

Smallest distance from peaks to all points 3 dB below is 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.0 %

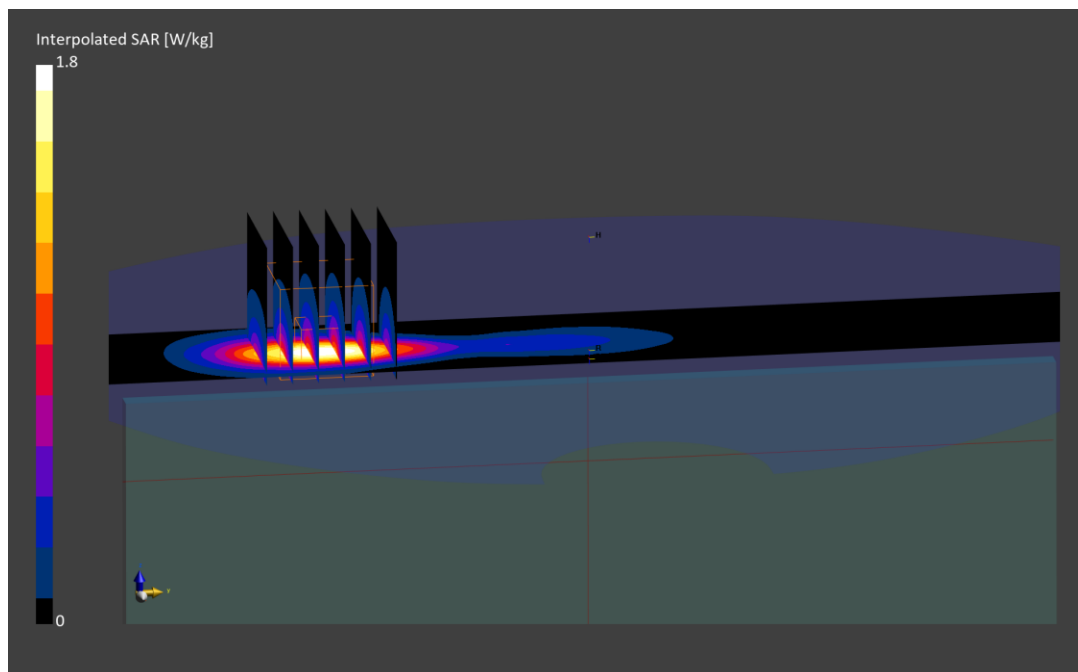

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 96RHX

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 680.5 MHz

Medium: 750 Head; Medium parameters used:

$f = 680.5 \text{ MHz}$; $\text{cond} = 0.854 \text{ S/m}$; $\text{perm} = 42.1$; $\text{density} = 1000 \text{ kg/m}^3$

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/04/2025; Ambient Temp: 23.1°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: LTE Band 71, Antenna 4, Exp: Body| Back Side, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (270.0 x 330.0): Measurement grid: $dx=15.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio: 1.5


Reference Value = 0.67 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.980 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

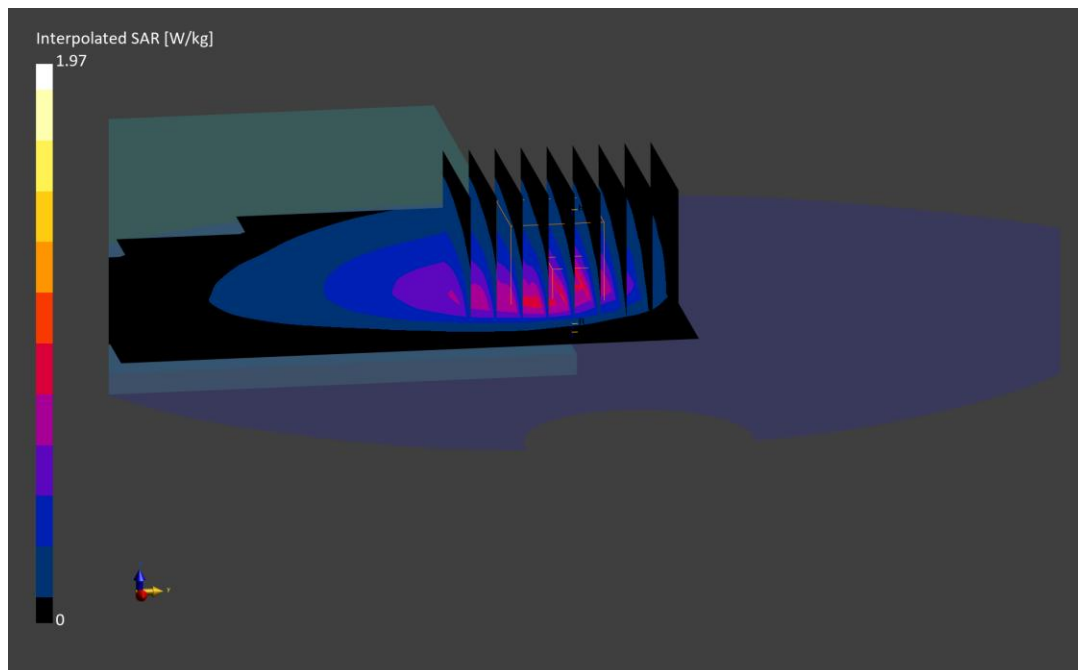

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 96RHX

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 707.5 MHz

Medium: 750 Head; Medium parameters used:

$f = 707.5$ MHz; $\text{cond} = 0.858$ S/m; $\text{perm} = 42.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/22/2025; Ambient Temp: 22.8°C; Tissue Temp: 24.0°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: LTE Band 12, Antenna 4, Exp: Body| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (270.0 x 330.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (36.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.72 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.962 W/kg

Smallest distance from peaks to all points 3 dB below is 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

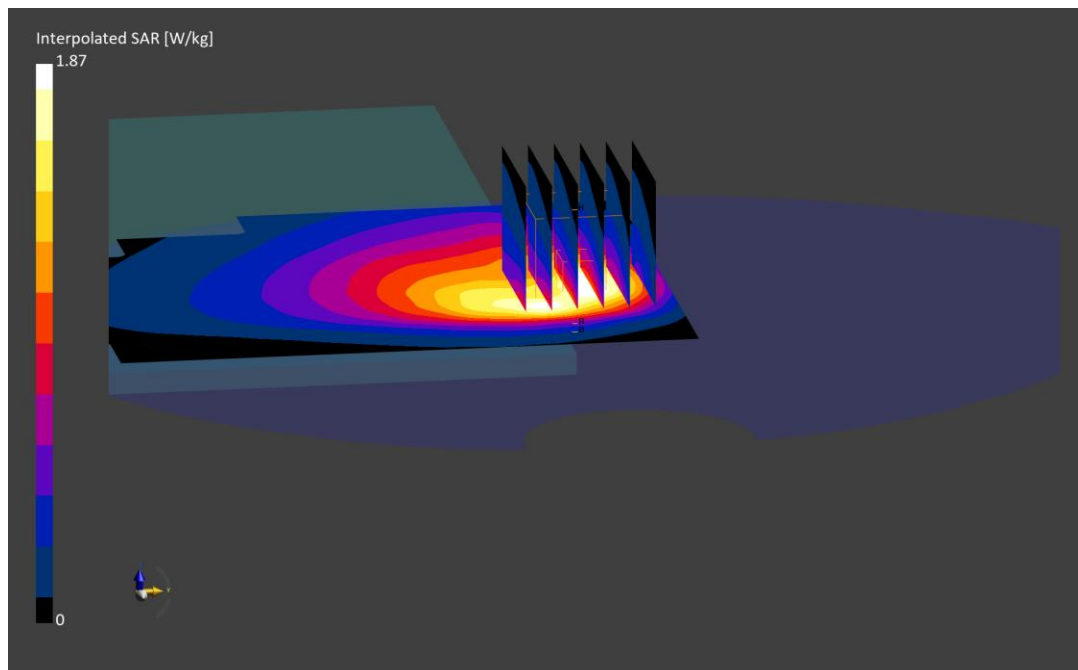

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: N179F

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 782.0 MHz

Medium: 750 Head; Medium parameters used:

$f = 782.0$ MHz; $\text{cond} = 0.888$ S/m; $\text{perm} = 41.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/04/2025; Ambient Temp: 23.1°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: LTE Band 13, Antenna 2, Exp: Body| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (270.0 x 330.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.67 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.867 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.1 %

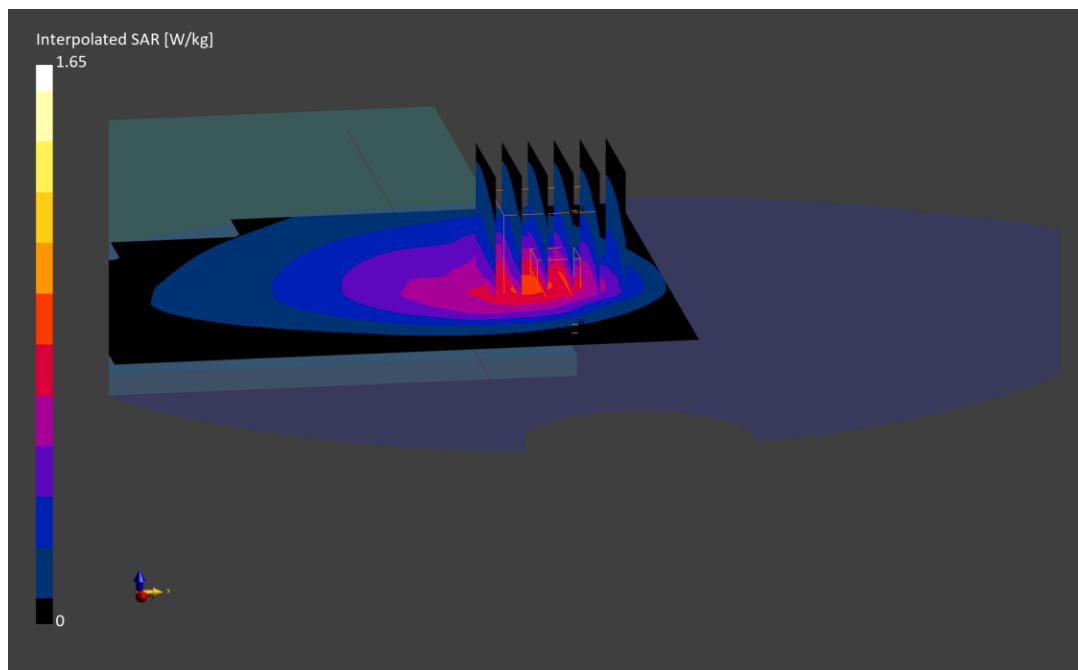

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: HGCDH

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 793.0 MHz

Medium: 750 Head; Medium parameters used:

$f = 793.0$ MHz; $\text{cond} = 0.904$ S/m; $\text{perm} = 42.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/12/2025; Ambient Temp: 22.1°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: LTE Band 14, Antenna 4, Exp: Body| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**

Area Scan (270.0 x 330.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.73 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.971 W/kg

Smallest distance from peaks to all points 3 dB below is 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.2 %

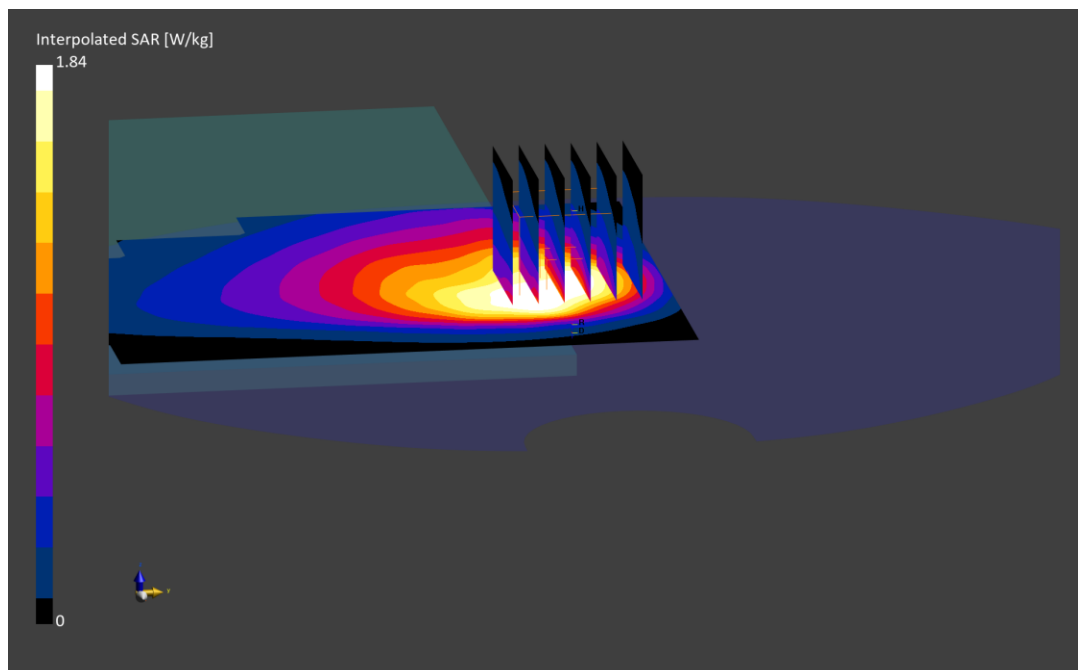

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 34C7C

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 831.5 MHz

Medium: 835 Head; Medium parameters used:

$f = 831.5$ MHz; $\text{cond} = 0.927$ S/m; $\text{perm} = 42.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/01/2025; Ambient Temp: 23.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF:(9.82,9.71,9.99); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2025-04-15

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: LTE Band 26, Antenna 2, Exp: Body| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (270.0 x 330.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (54.0 x 54.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.85 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.836 W/kg

Smallest distance from peaks to all points 3 dB below is 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.6 %

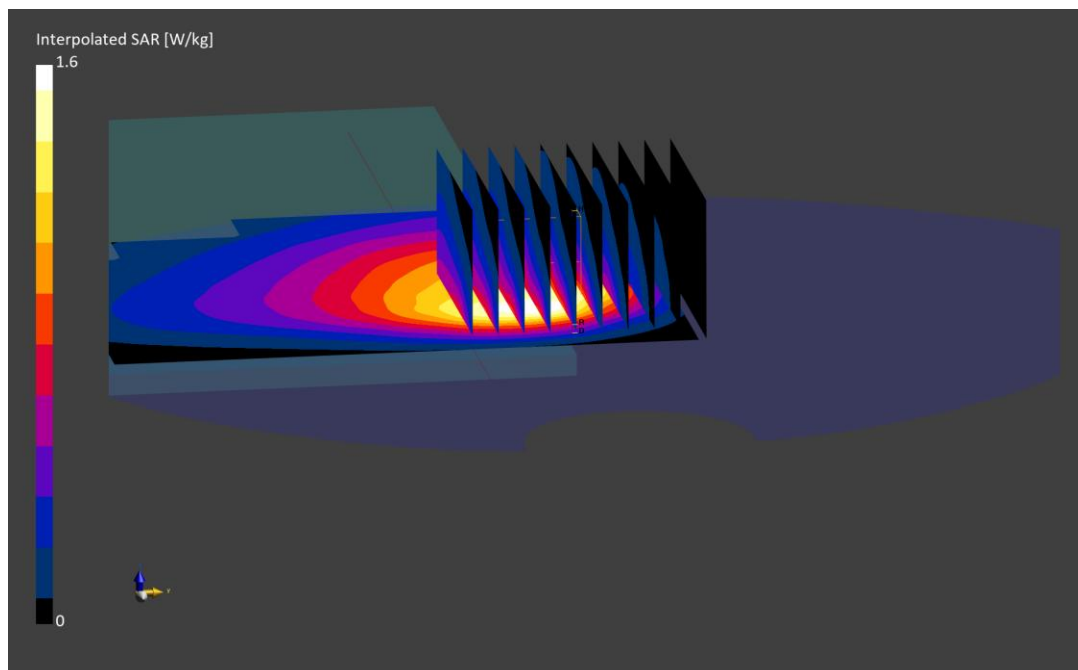

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 7RWVX

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 836.5 MHz

Medium: 835 Head; Medium parameters used:

$f = 836.5$ MHz; $\text{cond} = 0.896$ S/m; $\text{perm} = 42.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/16/2025; Ambient Temp: 22.1°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7551; ConvF:(9.82,9.71,9.99); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2025-04-15

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: LTE Band 5, Antenna 2, Exp: Body| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**

Area Scan (270.0 x 330.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (42.0 x 36.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.91 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.926 W/kg

Smallest distance from peaks to all points 3 dB below is 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

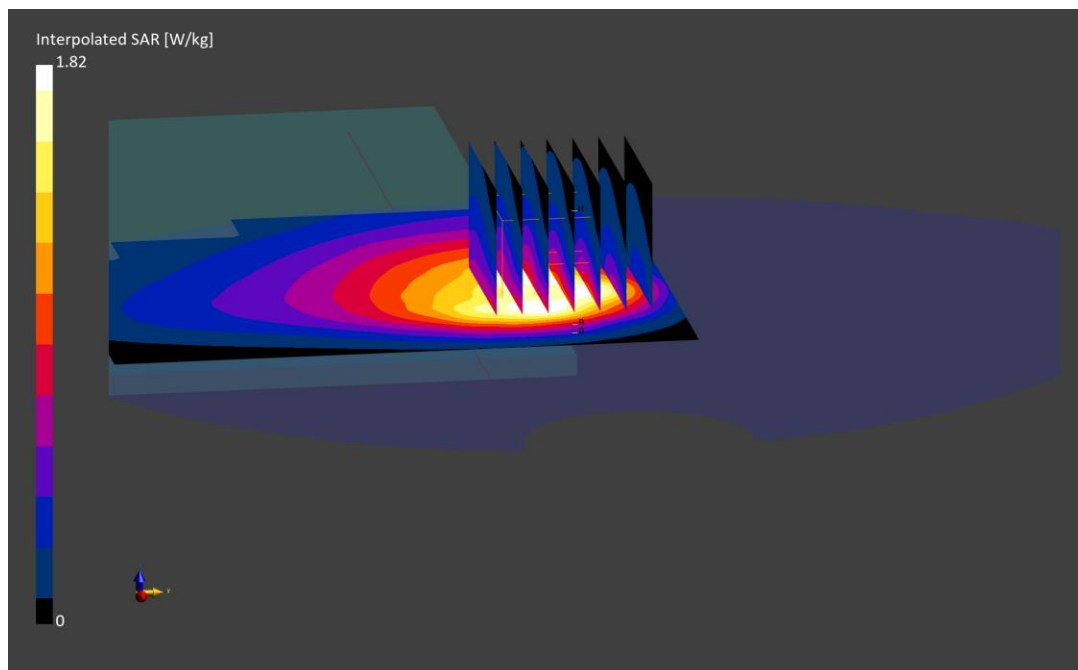

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: GYK30

Communication System: UID:10297 - AAE, LTE-FDD; MAIA: Y; Frequency: 1770.0 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1770.0$ MHz; $\text{cond} = 1.43$ S/m; $\text{perm} = 38.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 09/25/2025; Ambient Temp: 23.2°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7421; ConvF:(7.44,8.39,7.85); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn604; Calibrated: 2025-03-06

Phantom: Twin-SAM V8.0; Serial: 1917

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: LTE Band 66, Antenna 2, Exp: Body| Bottom Edge, Ch. High,
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (45.0 x 270.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $\text{dx}=6.0$ mm, $\text{dy}=6.0$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.92 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 1.03 W/kg

Smallest distance from peaks to all points 3 dB below is 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

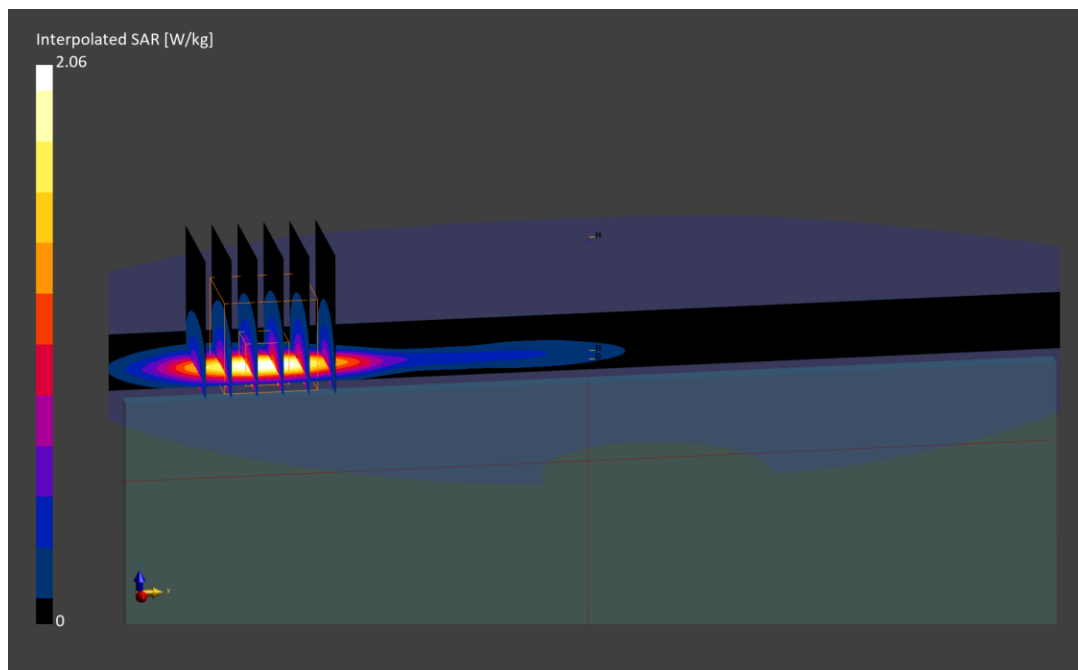

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: GYK30

Communication System: UID:10100 - CAF, LTE-FDD; MAIA: Y; Frequency: 1882.5 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1882.5$ MHz; $\text{cond} = 1.41$ S/m; $\text{perm} = 41.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/13/2025; Ambient Temp: 22.9°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7638; ConvF:(7.94,8.13,8.2); Calibrated: 2025-03-06

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn467; Calibrated: 2025-02-06

Phantom: Twin-SAM V8.0; Serial: 1692

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: LTE Band 25, Antenna 2, Exp: Body| Bottom Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 100 RB, 0 RB Offset**

Area Scan (40.0 x 270.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.62 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 0.987 W/kg

Smallest distance from peaks to all points 3 dB below is 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

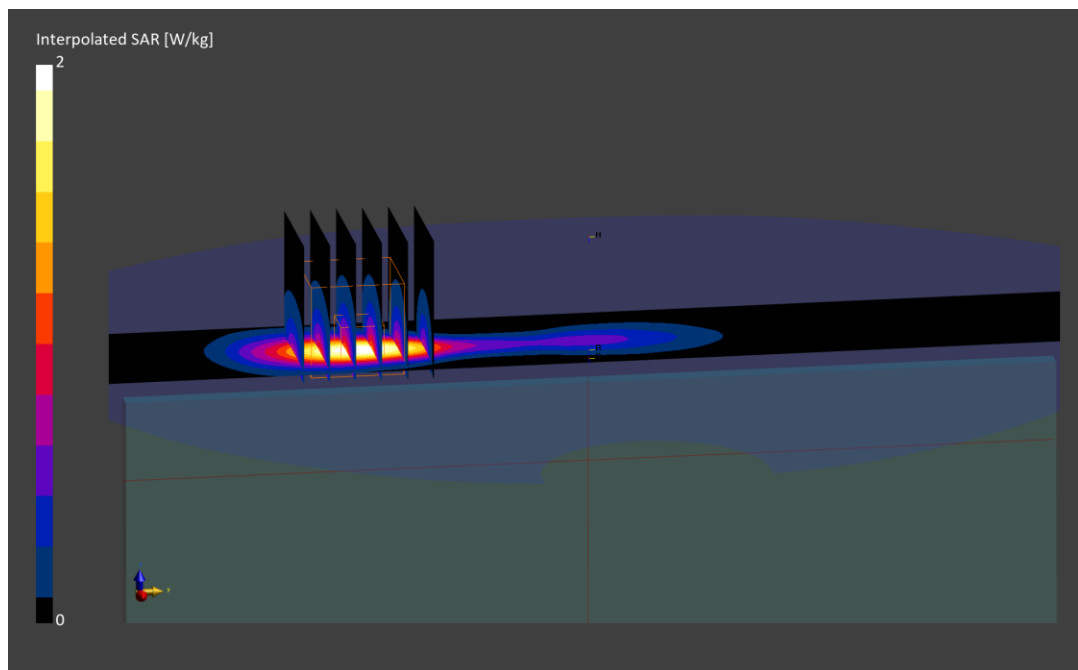

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 13Y46

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 2310.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2310.0$ MHz; $\text{cond} = 1.66$ S/m; $\text{perm} = 40.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/14/2025; Ambient Temp: 19.1°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7416; ConvF:(6.98,7.27,7.02); Calibrated: 2025-05-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn701; Calibrated: 2025-05-09

Phantom: Twin-SAM V8.0; Serial: 2029

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: LTE Band 30, Antenna 1b, Exp: Body| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (260.0 x 320.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.95 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.03 W/kg

Smallest distance from peaks to all points 3 dB below is 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.5 %

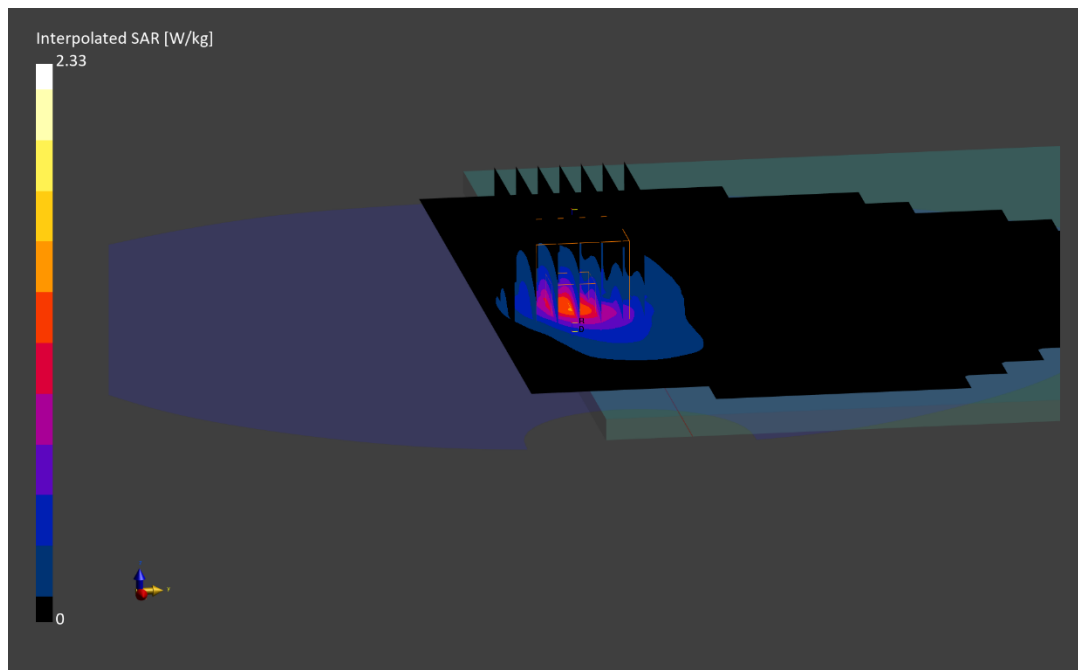

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 13Y46

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 2510.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2510.0$ MHz; $\text{cond} = 1.93$ S/m; $\text{perm} = 38.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/09/2025; Ambient Temp: 23.0°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7532; ConvF:(6.89,6.81,7.65); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; Calibrated: 2025-04-09

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: LTE Band 7, Antenna 3b, Exp: Body| Top Edge, Ch. Low,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (40.0 x 260.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.86 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 1.05 W/kg

Smallest distance from peaks to all points 3 dB below is 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.5 %

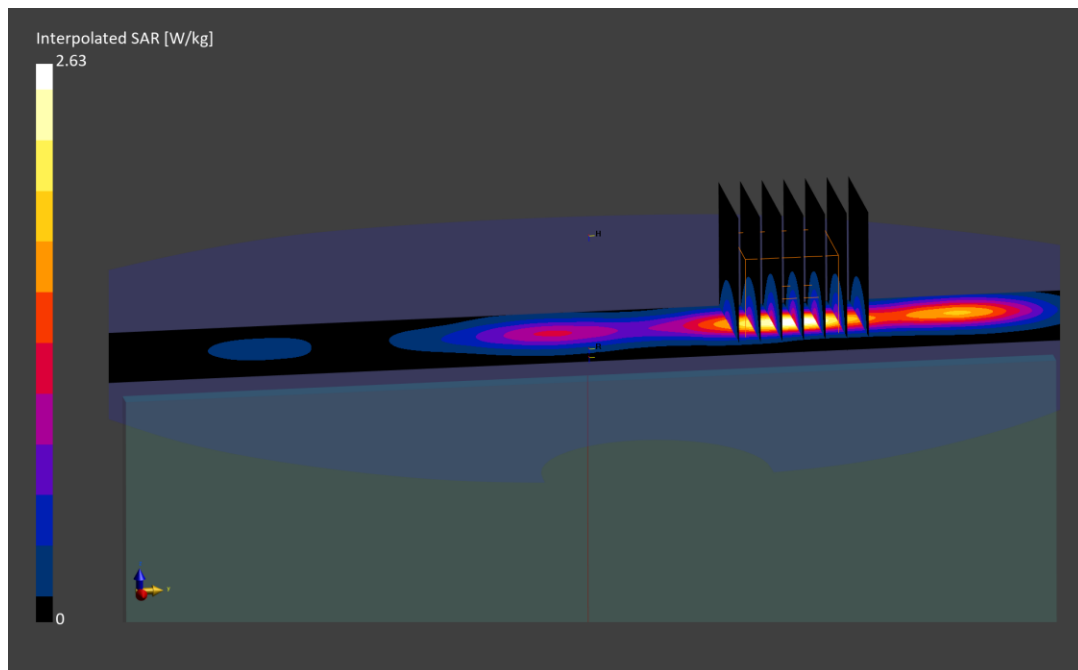

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: H473H

Communication System: UID:10435 - AAG, LTE-TDD; MAIA: Y; Frequency: 2593.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2593.0$ MHz; $\text{cond} = 2.02$ S/m; $\text{perm} = 39.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/25/2025; Ambient Temp: 21.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7532; ConvF:(6.78,6.7,7.52); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; Calibrated: 2025-04-09

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: LTE Band 41, Antenna 2, Exp: Body| Bottom Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (40.0 x 260.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.87 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.68 W/kg

SAR(1 g) = 1.07 W/kg

Smallest distance from peaks to all points 3 dB below is 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.0 %

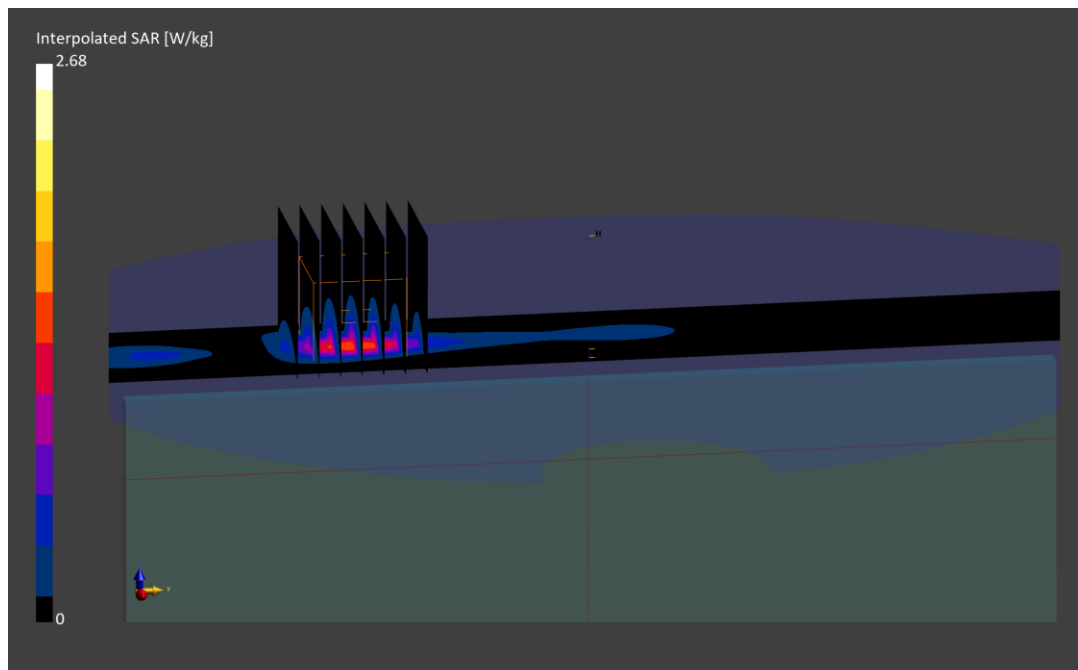

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 96RHX

Communication System: UID:10435 - AAG, LTE-TDD; MAIA: Y; Frequency: 3560.0 MHz

Medium: 3600 Head; Medium parameters used:

$f = 3560.0$ MHz; $\text{cond} = 2.85$ S/m; $\text{perm} = 38.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 12/04/2025; Ambient Temp: 21.5°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7552; ConvF:(5.94,6.58,6.41); Calibrated: 2025-05-14

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1676; Calibrated: 2025-05-13

Phantom: Twin-SAM V8.0; Serial: 1944

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: LTE Band 48, Antenna 3a, Exp: Body| Right Edge, Ch. Low,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 35.0 x 29.1): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5


Reference Value = 0.74 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.69 W/kg

SAR(1 g) = 1.00 W/kg

Smallest distance from peaks to all points 3 dB below is 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 73.5 %

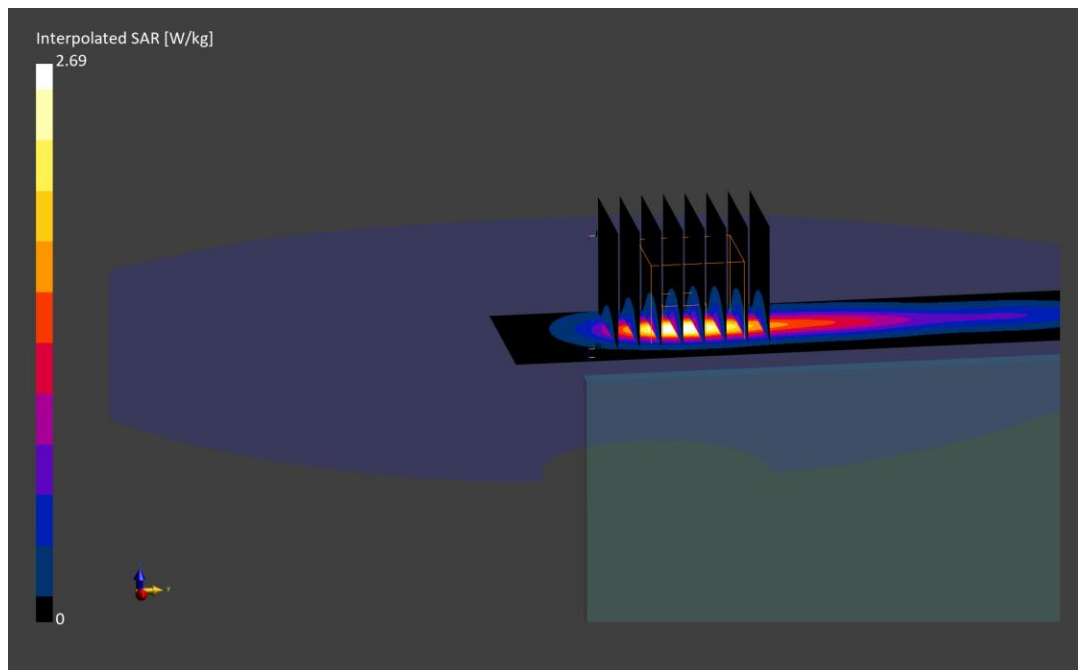

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: FF7QY

Communication System: UID:10931 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 680.5 MHz

Medium: 750 Head; Medium parameters used:

$f = 680.5$ MHz; $\text{cond} = 0.855$ S/m; $\text{perm} = 42.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/10/2025; Ambient Temp: 23.4°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: NR Band n71, Antenna 2, Exp: Body| Back Side, Ch. 136100,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (270.0 x 330.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.76 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.998 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 77.5 %

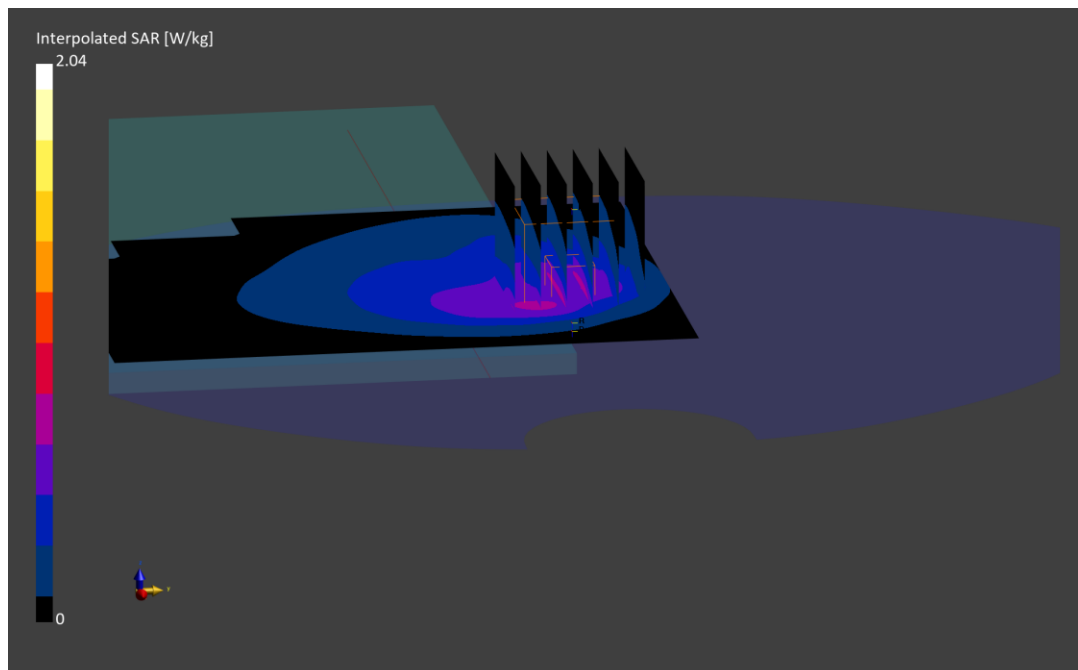

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: H473H

Communication System: UID:10938 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 707.5 MHz

Medium: 750 Head; Medium parameters used:

$f = 707.5$ MHz; $\text{cond} = 0.864$ S/m; $\text{perm} = 42.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/10/2025; Ambient Temp: 23.4°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: NR Band n12, Antenna 4, Exp: Body| Back Side, Ch. 141500,
15 MHz Bandwidth, DFT-s-OFDM QPSK, 36 RB, 22 RB Offset**

Area Scan (270.0 x 330.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.78 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 1.04 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.8 %

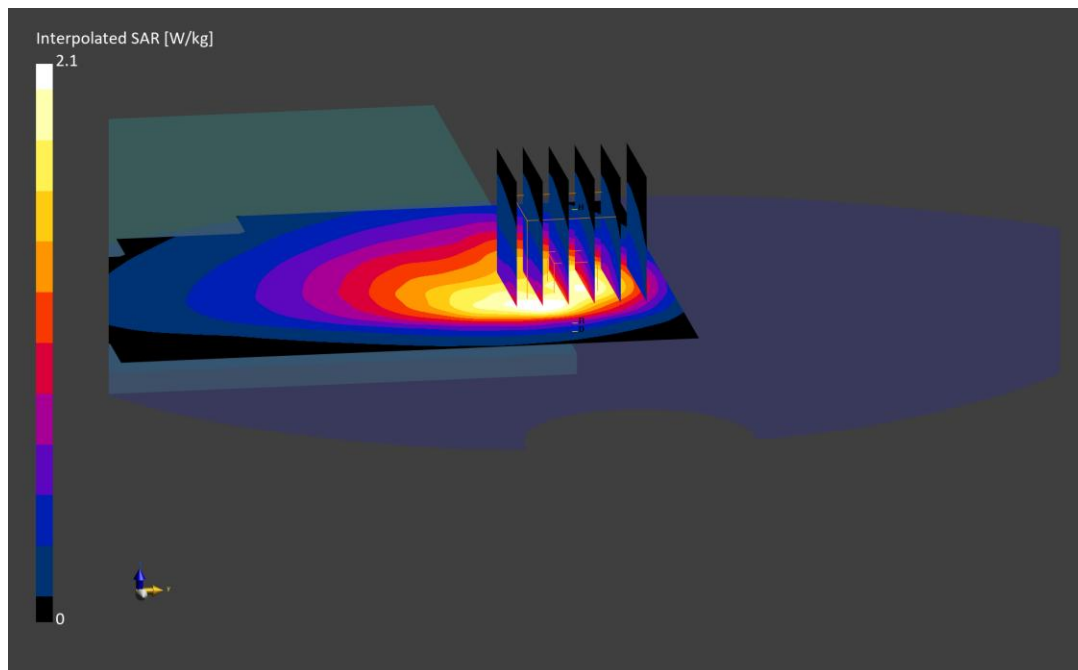

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 7RWVX

Communication System: UID:10937 - AAD, 5G NR FR1 FDD; MAIA: Y; Frequency: 793.0 MHz

Medium: 750 Head; Medium parameters used:

$f = 793.0$ MHz; $\text{cond} = 0.888$ S/m; $\text{perm} = 42.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/02/2025; Ambient Temp: 23.5°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7357; ConvF:(9.41,8.38,9.96); Calibrated: 2025-04-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1582; Calibrated: 2025-04-10

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: NR Band n14, Antenna 2, Exp: Body| Back Side, Ch. 158600,
10 MHz Bandwidth, DFT-s-OFDM QPSK, 25 RB, 14 RB Offset**

Area Scan (270.0 x 330.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (36.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.74 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.951 W/kg

Smallest distance from peaks to all points 3 dB below is 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 76.9 %

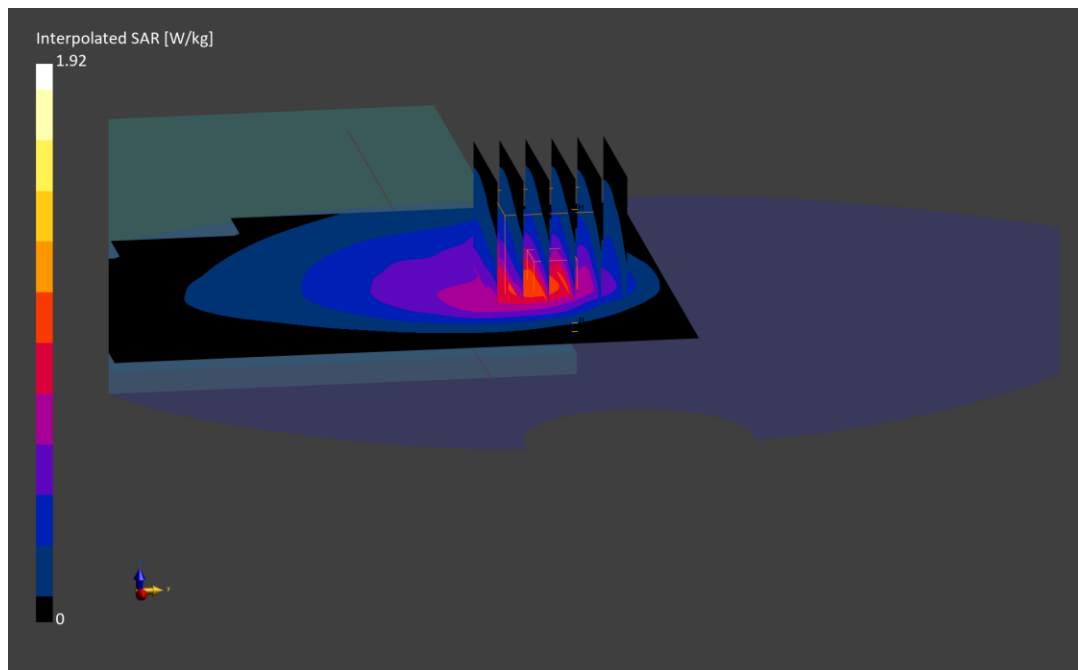

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 34C7C

Communication System: UID:10939 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 831.5 MHz

Medium: 835 Head; Medium parameters used:

$f = 831.5 \text{ MHz}$; $\text{cond} = 0.881 \text{ S/m}$; $\text{perm} = 42.5$; $\text{density} = 1000 \text{ kg/m}^3$

Phantom Section: Flat; Space: 5.00 mm

Test Date: 09/29/2025; Ambient Temp: 23.6°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7551; ConvF:(9.82,9.71,9.99); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2025-04-15

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n26, Antenna 2, Exp: Body| Back Side, Ch. 166300,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset**

Area Scan (270.0 x 330.0): Measurement grid: $dx=15.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (54.0 x 54.0 x 31.2): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio: 1.5


Reference Value = 0.75 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.843 W/kg

Smallest distance from peaks to all points 3 dB below is 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.6 %

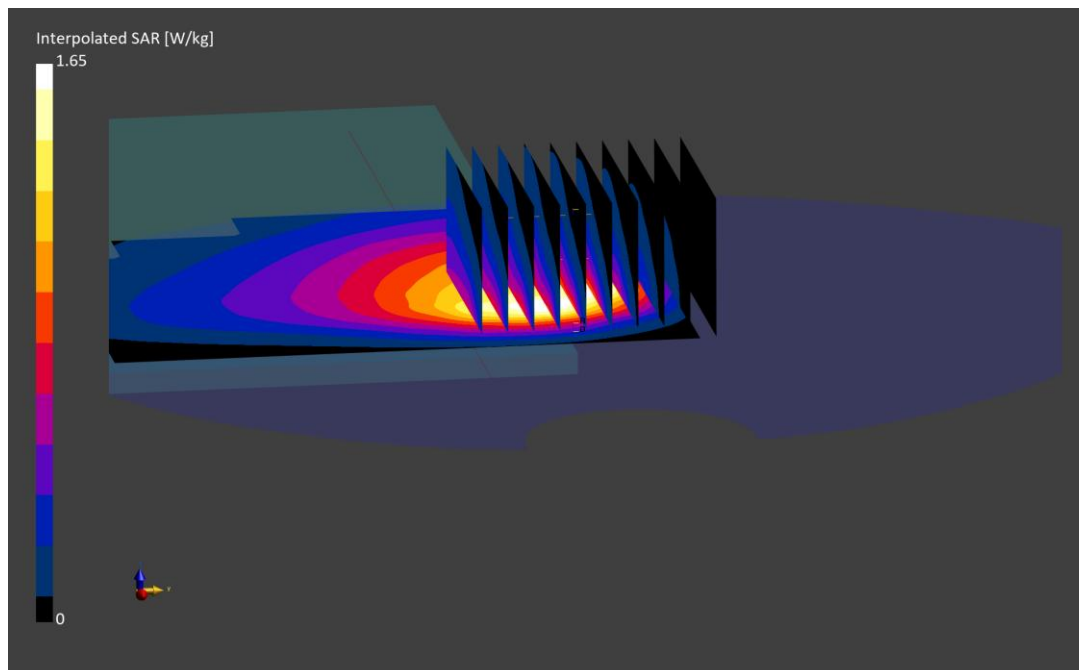

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 34C7C

Communication System: UID:10931 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 836.5 MHz

Medium: 835 Head; Medium parameters used:

$f = 836.5$ MHz; $\text{cond} = 0.882$ S/m; $\text{perm} = 42.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 09/29/2025; Ambient Temp: 23.6°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7551; ConvF:(9.82,9.71,9.99); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2025-04-15

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: NR Band n5, Antenna 2, Exp: Body| Back Side, Ch. 167300,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 104 RB Offset**

Area Scan (270.0 x 330.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (42.0 x 42.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.98 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.929 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

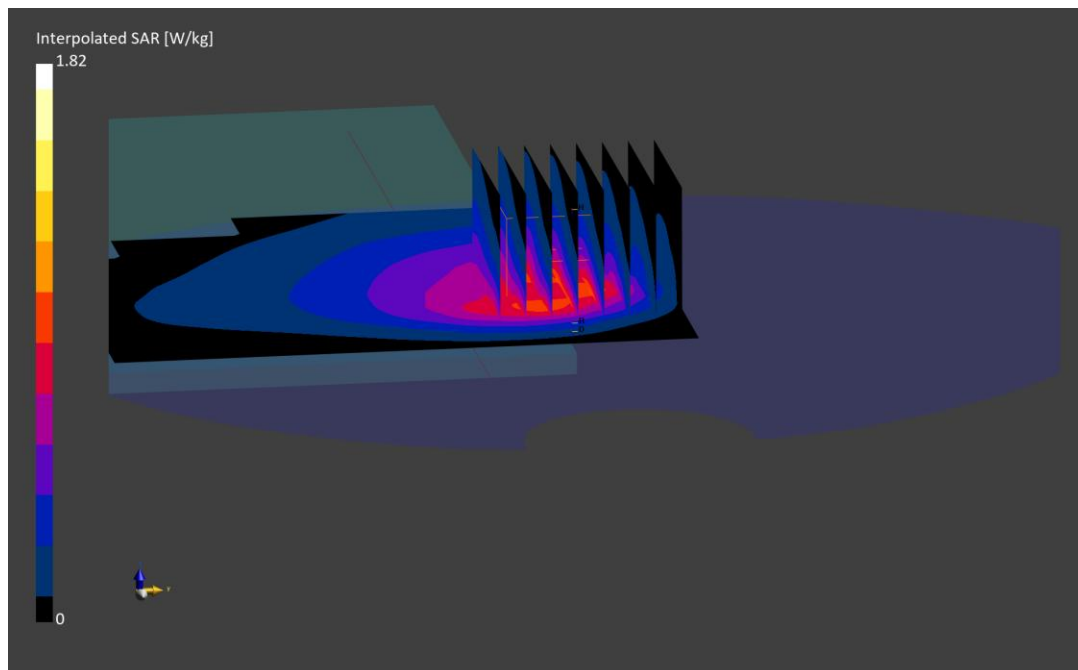

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 2MD22

Communication System: UID:10938 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 1702.5 MHz
Medium: 1750 Head; Medium parameters used:
f = 1702.5 MHz; cond = 1.37 S/m; perm = 38.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/10/2025; Ambient Temp: 22.8°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7421; ConvF:(7.44,8.39,7.85); Calibrated: 2025-03-06
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn604; Calibrated: 2025-03-06
Phantom: Twin-SAM V8.0; Serial: 1917
Measurement SW: DASY Module SAR V16.4.0.55

**Mode: NR Band n70, Antenna 4, Exp: Body| Top Edge, Ch. 340500,
15 MHz Bandwidth, DFT-s-OFDM QPSK, 36 RB, 0 RB Offset**

Area Scan (40.0 x 270.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (35.4 x 35.4 x 31.2): Measurement grid: dx=5.9 mm, dy=5.9 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 1.07 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.07 W/kg

Smallest distance from peaks to all points 3 dB below is 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 78.3 %

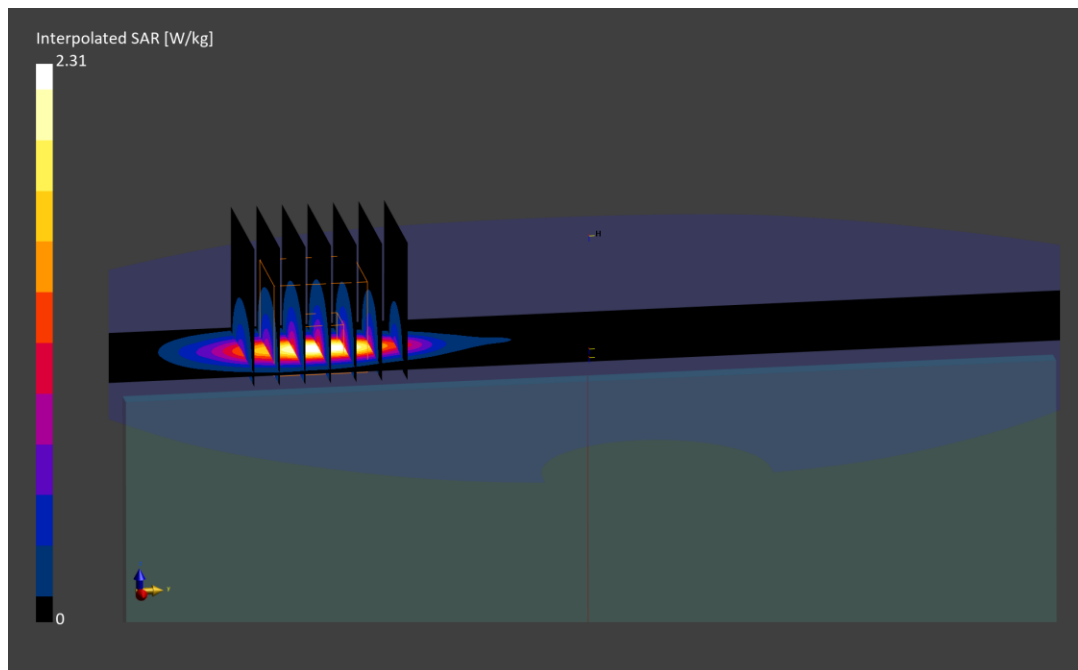

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: YJYM4

Communication System: UID:10950 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 1745.0 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1745.0$ MHz; $\text{cond} = 1.38$ S/m; $\text{perm} = 38.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/17/2025; Ambient Temp: 21.8°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7421; ConvF:(7.44,8.39,7.85); Calibrated: 2025-03-06
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn604; Calibrated: 2025-03-06
Phantom: Twin-SAM V8.0; Serial: 1917
Measurement SW: DASY Module SAR V16.4.0.55

**Mode: NR Band n66, Antenna 1b, Exp: Body| Bottom Edge, Ch. 349000,
45 MHz Bandwidth, DFT-s-OFDM QPSK, 216 RB, 0 RB Offset**

Area Scan (40.0 x 270.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=15.0$ mm

Zoom Scan (35.4 x 35.4 x 31.2): Measurement grid: $\text{dx}=5.9$ mm, $\text{dy}=5.9$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.92 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 1.07 W/kg

Smallest distance from peaks to all points 3 dB below is 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.2 %

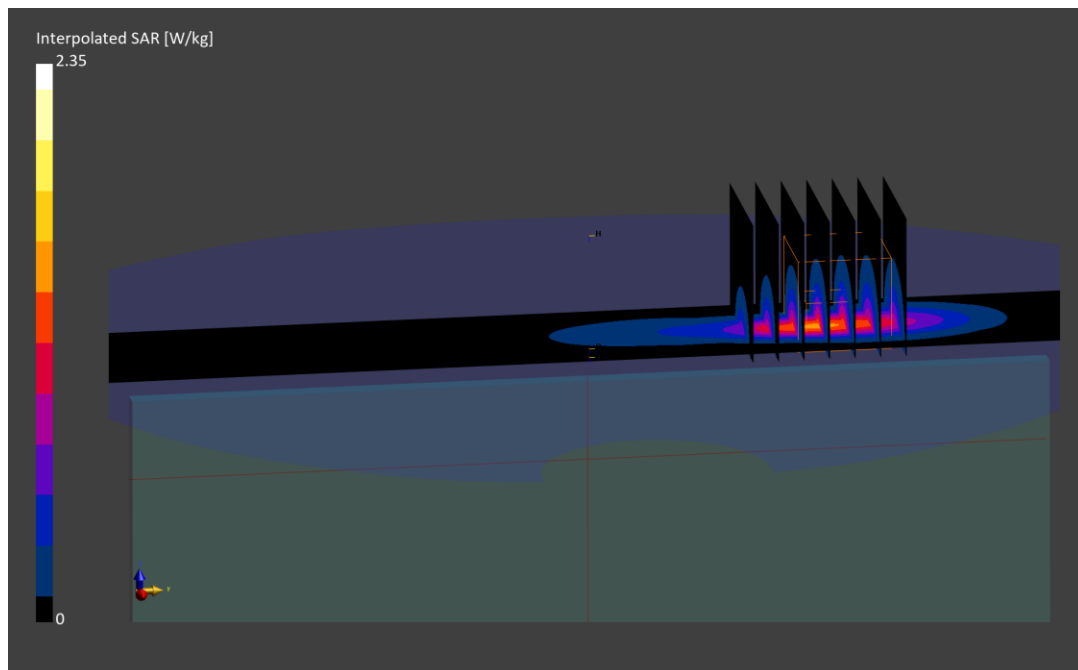

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: GYK30

Communication System: UID:10773 - AAF, CW; MAIA: Y; Frequency: 1882.5 MHz
Medium: 1900 Head; Medium parameters used:
f = 1882.5 MHz; cond = 1.41 S/m; perm = 41.5; density = 1000 kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/13/2025; Ambient Temp: 22.9°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7638; ConvF:(7.94,8.13,8.2); Calibrated: 2025-03-06
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn467; Calibrated: 2025-02-06
Phantom: Twin-SAM V8.0; Serial: 1692
Measurement SW: DASY Module SAR V16.4.0.55

**Mode: NR Band n25, Antenna 2, Exp: Body| Bottom Edge, Ch. 376500,
40 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 270.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.28 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 1.01 W/kg

Smallest distance from peaks to all points 3 dB below is 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

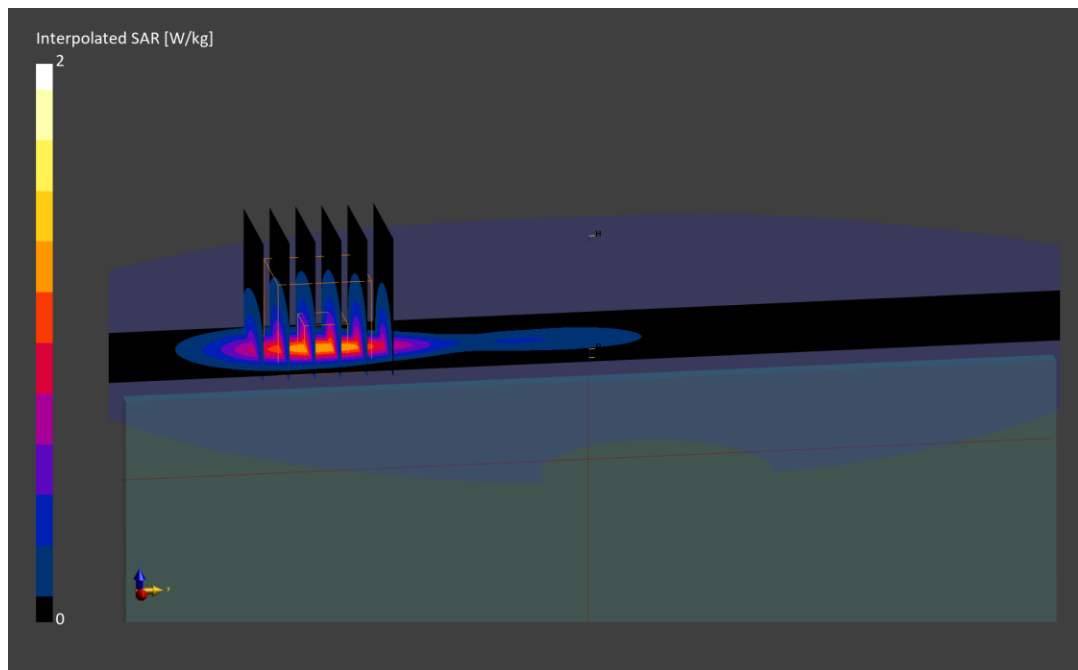

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: YJYM4

Communication System: UID:10929 - AAD, 5G NR FR1 FDD; MAIA: Y; Frequency: 2310.0 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2310.0$ MHz; $\text{cond} = 1.65$ S/m; $\text{perm} = 40.3$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/11/2025; Ambient Temp: 20.7°C; Tissue Temp: 19.1°C

Probe: EX3DV4 - SN7416; ConvF:(6.98,7.27,7.02); Calibrated: 2025-05-09
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn701; Calibrated: 2025-05-09
Phantom: Twin-SAM V8.0; Serial: 2029
Measurement SW: DASY Module SAR V16.4.0.55

**Mode: NR Band n30, Antenna 1b, Exp: Body| Back Side, Ch. 462000,
10 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 50 RB Offset**

Area Scan (260.0 x 320.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.59 W/kg; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.67 W/kg

SAR(1 g) = 1.13 W/kg

Smallest distance from peaks to all points 3 dB below is 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 76.9 %

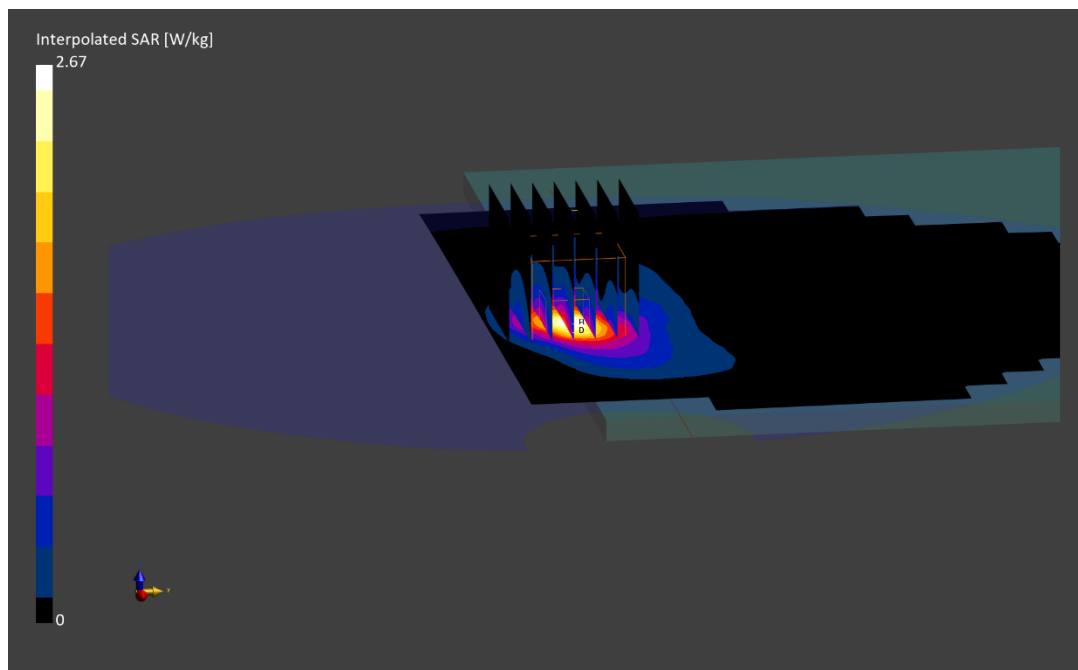

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: H4HDG

Communication System: UID:10934 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 2535.0 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2535.0$ MHz; $\text{cond} = 1.91$ S/m; $\text{perm} = 37.9$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/06/2025; Ambient Temp: 23.0°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7782; ConvF:(7.3,6.32,6.35); Calibrated: 2025-09-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1646; Calibrated: 2025-09-10
Phantom: Twin-SAM V4.0; Serial: 1598
Measurement SW: DASY Module SAR V16.4.0.55

**Mode: NR Band n7, Antenna 3b, Exp: Body| Top Edge, Ch. 507000,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 260.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=5.0$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.77 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.77 W/kg

SAR(1 g) = 1.05 W/kg

Smallest distance from peaks to all points 3 dB below is 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 73.9 %

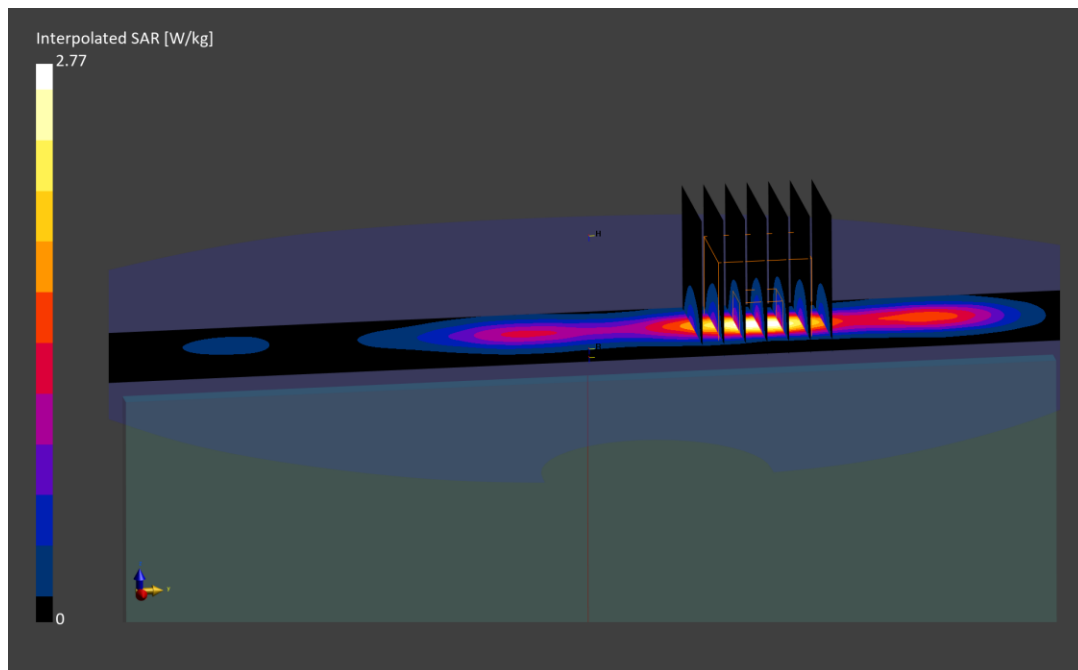

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 96RHX

Communication System: UID:10868 - AAF, 5G NR FR1 TDD; MAIA: Y; Frequency: 2592.99 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2592.99$ MHz; $\text{cond} = 2.04$ S/m; $\text{perm} = 37.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/15/2025; Ambient Temp: 21.0°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN7532; ConvF:(6.78,6.7,7.52); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; Calibrated: 2025-04-09

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: NR Band n41, Antenna 2, Exp: Body| Bottom Edge, Ch. 518598,
100 MHz Bandwidth, DFT-s-OFDM QPSK, 270 RB, 0 RB Offset**

Area Scan (40.0 x 260.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.84 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 1.02 W/kg

Smallest distance from peaks to all points 3 dB below is 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.0 %

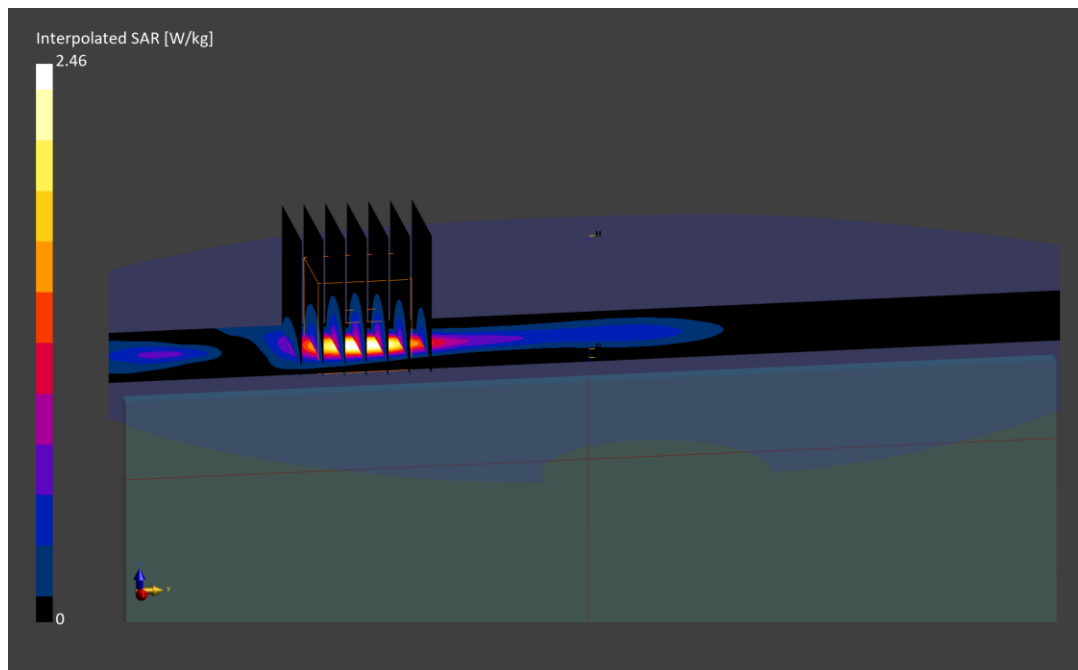

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: XXHL4

Communication System: UID:10913 - AAD, 5G NR FR1 TDD; MAIA: Y; Frequency: 3570.0 MHz

Medium: 3600 Head; Medium parameters used:

$f = 3570.0$ MHz; $\text{cond} = 2.96$ S/m; $\text{perm} = 39.3$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/30/2025; Ambient Temp: 20.9°C; Tissue Temp: 19.4°C

Probe: EX3DV4 - SN7360; ConvF:(6.75,6.65,7.56); Calibrated: 2025-03-07

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn534; Calibrated: 2025-03-11

Phantom: Twin-SAM V8.0; Serial: 2034

Measurement SW: DASY Module SAR V16.4.0.55

**Mode: NR Band n48, Antenna 3a, Exp: Body| Right Edge, Ch. 638000,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset**

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 29.1): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5


Reference Value = 0.80 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.74 W/kg

SAR(1 g) = 1.02 W/kg

Smallest distance from peaks to all points 3 dB below is 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.4 %

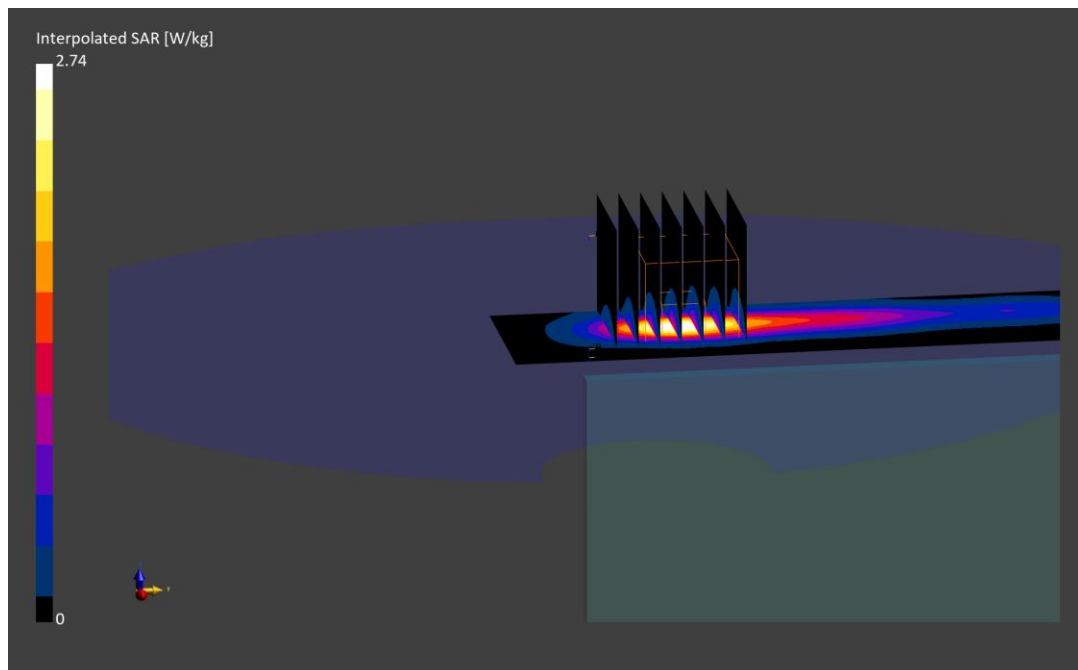

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 2MD22

Communication System: UID:10917 - AAD, 5G NR FR1 TDD; MAIA: Y; Frequency: 3500.01 MHz

Medium: 3600 Head; Medium parameters used:

$f = 3500.01$ MHz; $\text{cond} = 2.79$ S/m; $\text{perm} = 39.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/09/2025; Ambient Temp: 22.6°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7552; ConvF:(5.94,6.58,6.41); Calibrated: 2025-05-14

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1676; Calibrated: 2025-05-13

Phantom: Twin-SAM V8.0; Serial: 1944

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n77 DoD, Antenna 2, Exp: Body| Right Edge, Ch. 633334,
100 MHz Bandwidth, DFT-s-OFDM QPSK, 135 RB, 0 RB Offset**

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 35.0 x 29.1): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5


Reference Value = 0.74 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.62 W/kg

SAR(1 g) = 0.982 W/kg

Smallest distance from peaks to all points 3 dB below is 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 72.5 %

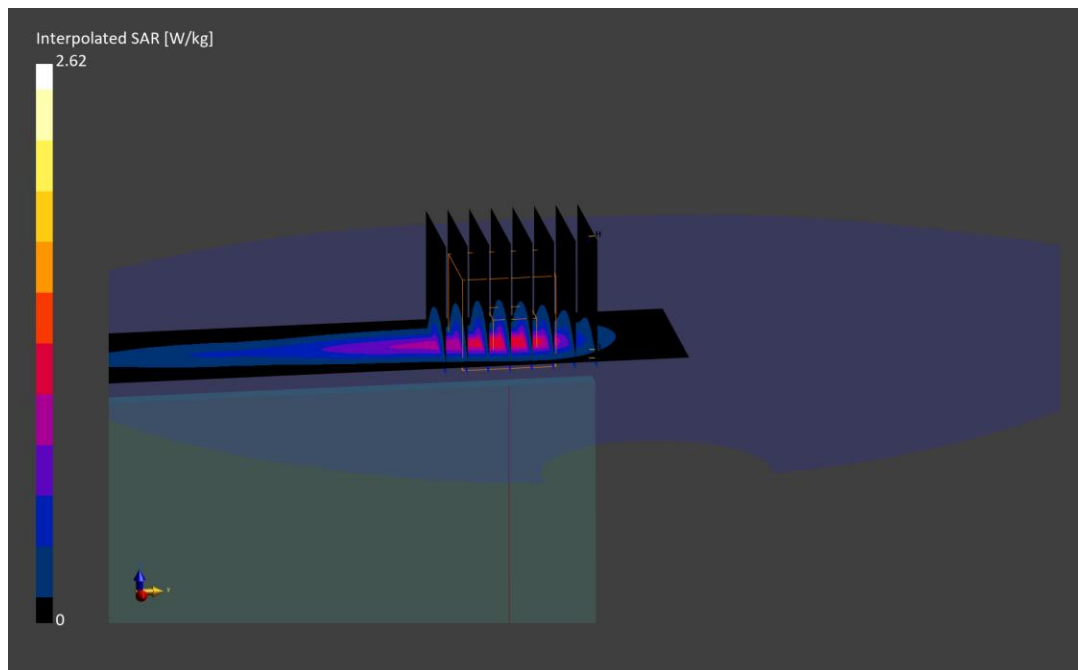

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: FF7QY

Communication System: UID:10868 - AAF, 5G NR FR1 TDD; MAIA: Y; Frequency: 3930.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3930.0 MHz; cond = 3.29 S/m; perm = 38.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/09/2025; Ambient Temp: 21.9°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7360; ConvF:(6.34,6.24,7.1); Calibrated: 2025-03-07
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn534; Calibrated: 2025-03-11
Phantom: Twin-SAM V8.0; Serial: 2034
Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: NR Band n77, Antenna 4, Exp: Body| Left Edge, Ch. 662000,
100 MHz Bandwidth, DFT-s-OFDM QPSK, 270 RB, 0 RB Offset**

Area Scan (40.0 x 320.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 29.1): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5


Reference Value = 0.73 W/kg; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.80 W/kg

SAR(1 g) = 0.961 W/kg

Smallest distance from peaks to all points 3 dB below is 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 69.9 %

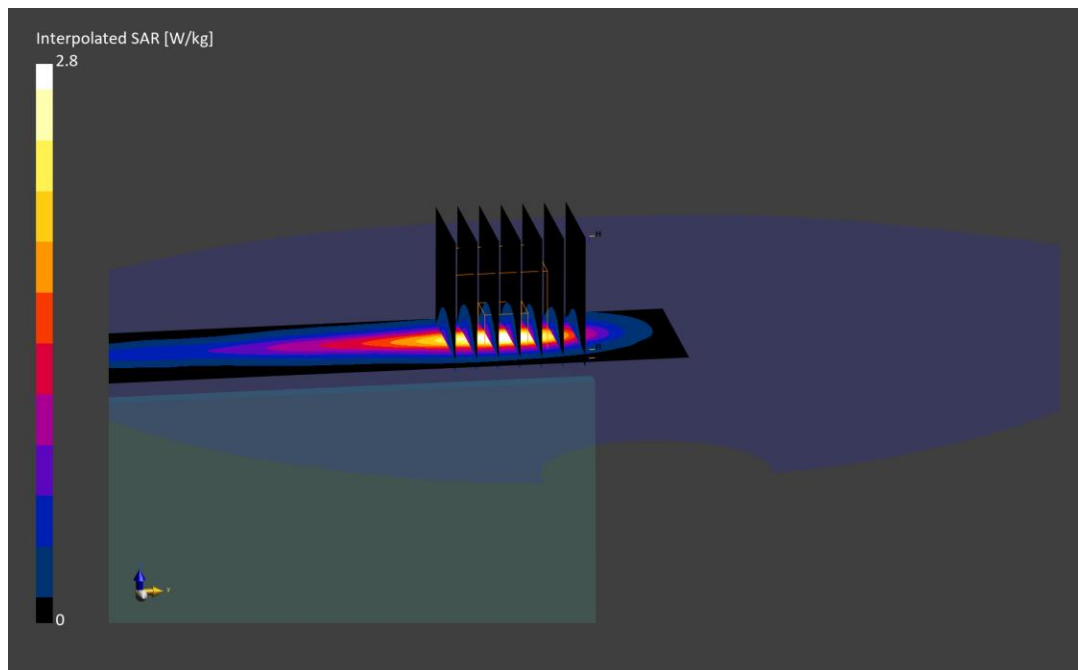

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 34C7C

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2437.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2437.0$ MHz; $\text{cond} = 1.76$ S/m; $\text{perm} = 40.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/23/2025; Ambient Temp: 21.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7532; ConvF:(6.89,6.81,7.65); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; Calibrated: 2025-04-09

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 2.4 GHz WIFI/ IEEE 802.11b, Antenna 1a, 22 MHz Bandwidth,
Exp: Body| Left Edge, Ch. 6, 1Mbps**

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 35.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.69 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 0.918 W/kg

Smallest distance from peaks to all points 3 dB below is 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 75.4 %

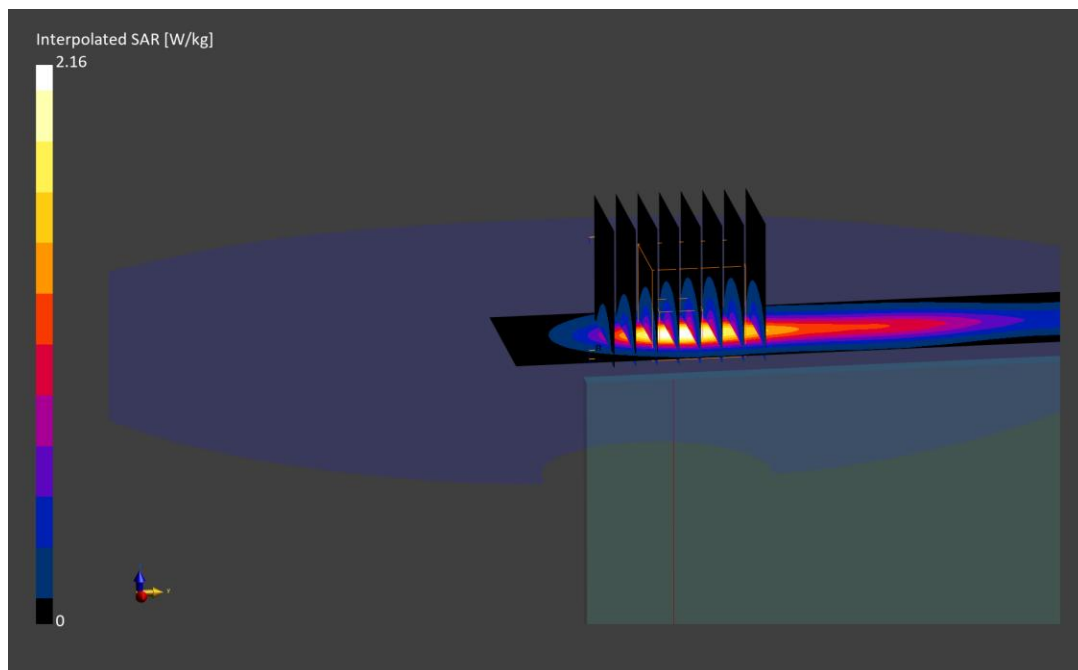

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 96RHX

Communication System: UID:10544 - AAD, WLAN; MAIA: Y; Frequency: 5530.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5530.0 MHz; cond = 4.92 S/m; perm = 34.2; density = 1000 kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/25/2025; Ambient Temp: 19.8°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7499; ConvF:(4.83,4.94,5.11); Calibrated: 2025-01-14
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1465; Calibrated: 2025-01-08
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 5 GHz WIFI/ IEEE 802.11ac, Antenna 3b, 80 MHz Bandwidth, U-NII-2C,
Exp: Body| Top Edge, Ch. 106, 29.3 Mbps**

Area Scan (40.0 x 260.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (32.0 x 32.0 x 22.9): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.63 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 4.28 W/kg

SAR(1 g) = 1.00 W/kg

Smallest distance from peaks to all points 3 dB below is 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.8 %

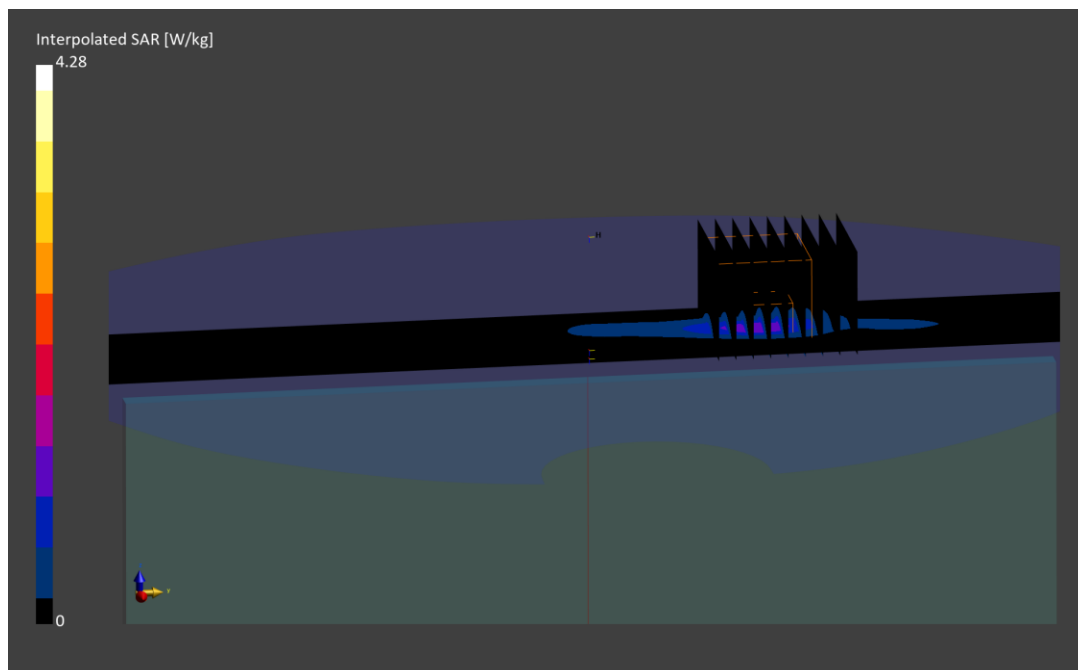

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: YJYM4

Communication System: UID:10755 - AAC, WLAN; MAIA: Y; Frequency: 6665.0 MHz

Medium: 6000 Head; Medium parameters used:

$f = 6665.0$ MHz; $\text{cond} = 6.10$ S/m; $\text{perm} = 35.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/03/2025; Ambient Temp: 22.10°C; Tissue Temp: 20.70°C

Probe: EX3DV4 - SN3837; ConvF:(5.38,5.14,5.25); Calibrated: 2025-08-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2025-08-06

Phantom: Twin-SAM V4.0; Serial: 1275

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 6 GHz WIFI/ IEEE 802.11ax, Antenna 3b, 160 MHz Bandwidth, U-NII-7,
Exp: Tablet| Back Side, Ch. 143, 68.1 Mbps**

Area Scan (255.0 x 323.0): Measurement grid: $dx=8.5$ mm, $dy=8.5$ mm

Zoom Scan (30.6 x 30.6 x 22.9): Measurement grid: $dx=3.4$ mm, $dy=3.4$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.27 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.379 W/kg; APD(4cm²) = 3.15 W/m²

Smallest distance from peaks to all points 3 dB below is 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 47.3 %

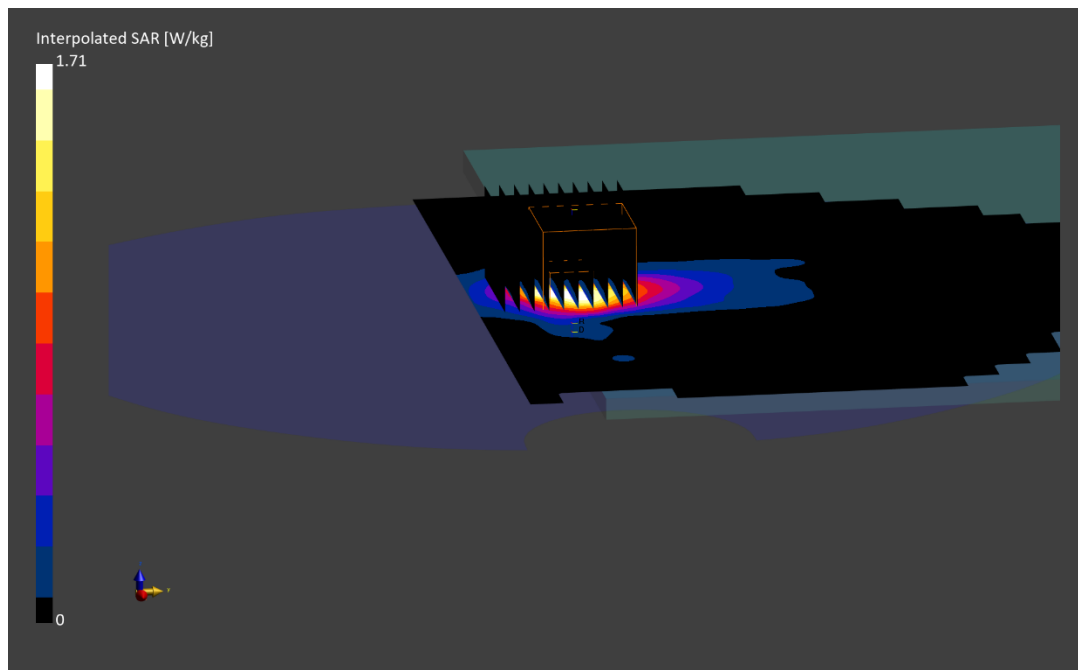

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 7RWVX

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2441.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2441.0$ MHz; $\text{cond} = 1.82$ S/m; $\text{perm} = 39.5$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/03/2025; Ambient Temp: 20.7°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN7532; ConvF:(6.89,6.81,7.65); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; Calibrated: 2025-04-09

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.55

Mode: 2.4 GHz Bluetooth, Antenna 3a, Exp: Body| Right Edge, Ch. 39, 1 Mbps

Area Scan (40.0 x 320.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=10.0$ mm

Zoom Scan (30.0 x 35.0 x 31.2): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=5.0$ mm, $\text{dz}=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.52 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.684 W/kg

Smallest distance from peaks to all points 3 dB below is 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

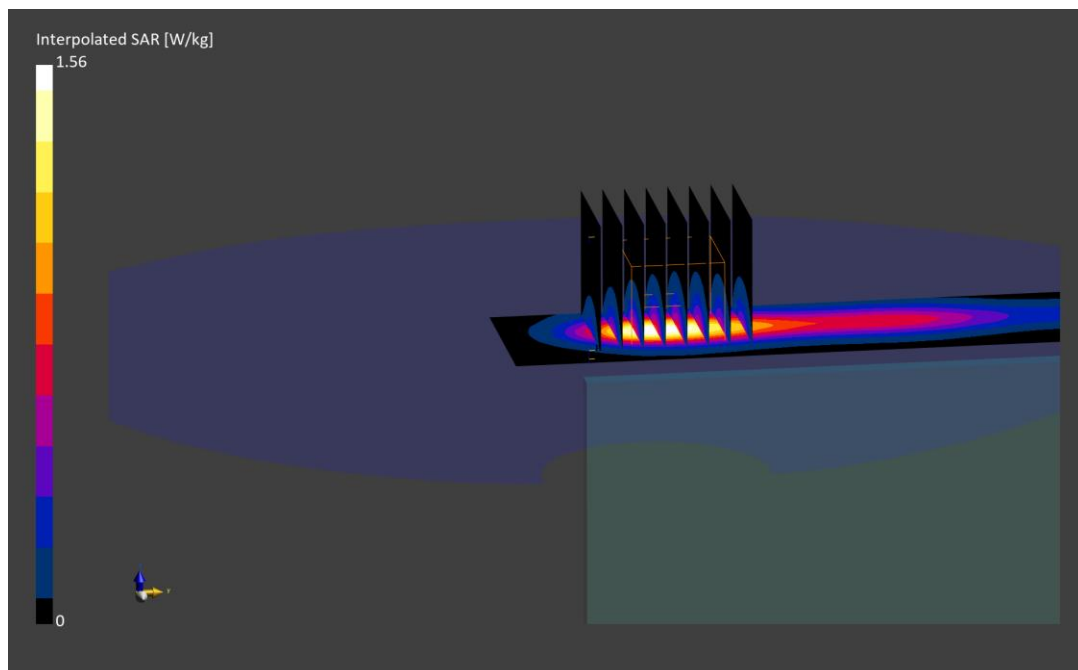

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: YJJCX

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 2440.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2440.0$ MHz; $\text{cond} = 1.84$ S/m; $\text{perm} = 39.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 10/25/2025; Ambient Temp: 21.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7532; ConvF:(6.89,6.81,7.65); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn501; Calibrated: 2025-04-09

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.55

Mode: 802.15.4, Antenna 3a, 20 MHz Bandwidth, Exp: Body| Right Edge, Ch. 18, 1 Mbps

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (40.0 x 40.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.77 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 1.01 W/kg

Smallest distance from peaks to all points 3 dB below is 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.9 %

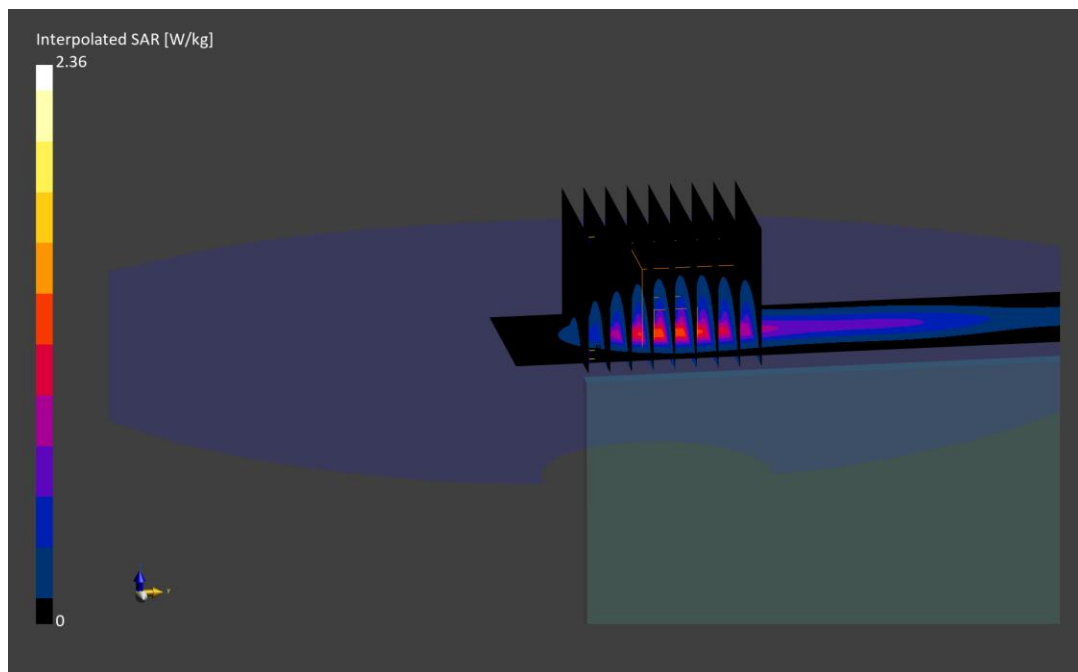

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: 96RHX

Communication System: UID:10032 - CAA, CW; MAIA: Y; Frequency: 5789.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5789.0$ MHz; $\text{cond} = 5.13$ S/m; $\text{perm} = 35.1$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 11/22/2025; Ambient Temp: 19.9°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7668; ConvF:(4.84,4.91,4.69); Calibrated: 2025-08-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2025-08-08
Phantom: Twin-SAM V8.0; Serial: 2027
Measurement SW: DASY Module SAR V16.4.0.5005

Mode: NB U-NII 3, Antenna 1b, Exp: Body| Bottom Edge, Ch. Mid, 1 Mbps

Area Scan (40.0 x 260.0): Measurement grid: $\text{dx}=5.0$ mm, $\text{dy}=10.0$ mm

Zoom Scan (32.0 x 32.0 x 22.9): Measurement grid: $\text{dx}=4.0$ mm, $\text{dy}=4.0$ mm, $\text{dz}=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.54 W/kg; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 0.721 W/kg

Smallest distance from peaks to all points 3 dB below is 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.3 %

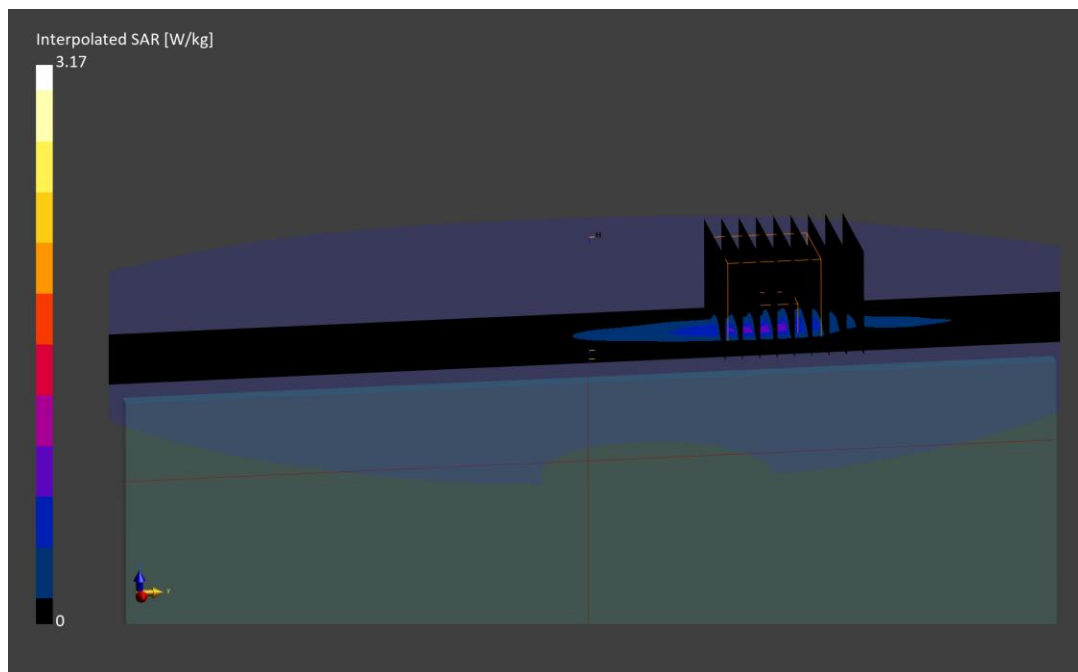

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: FF7QY

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 13.6 MHz
Medium: 30 Head; Medium parameters used:
 $f = 13.6 \text{ MHz}$; $\text{cond} = 0.751 \text{ S/m}$; $\text{perm} = 52.6$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 5.00 mm

Test Date: 12/17/2025; Ambient Temp: 21.2°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7782; ConvF:(18.49,15.42,16.82); Calibrated: 2025-09-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1646; Calibrated: 2025-09-10
Phantom: ELI V6.0; Serial: 2003
Measurement SW: DASY Module SAR V16.4.0.5005

Mode: WPT, Body SAR, Back Side

Area Scan (270.0 x 330.0): Measurement grid: $dx=15.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.006 W/kg

SAR(1 g) = 0 W/kg

Smallest distance from peaks to all points 3 dB below is 2.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.0 %

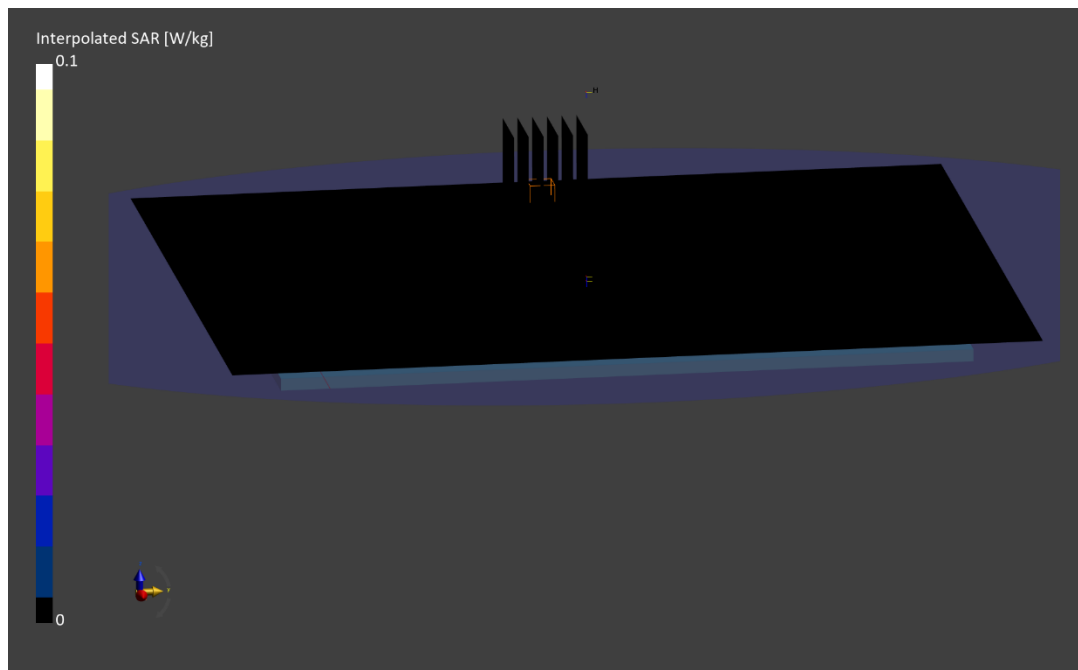

Date: 10/05/2025

Antenna WF5T, 6GHz WIFI/ IEEE 802.11ax, 160 MHz, U-NII-6, Ch. 111

Device Under Test Properties

DUT	Serial Number	DUT Type
BCGA3462	6QNCW	Tablet Device

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Channel	Group, UID	Frequency [MHz]
5G	EDGE RIGHT	2.00	111	10755	6505.0

Hardware Setup

Probe, Calibration Date	DAE, Calibration Date
EUmmWV3 – SN9364, 06/11/2025	DAE4 – SN1402, 04/10/2025

Software Setup


Software	Software Version
cDASY6 Module mmWave	3.2.0.1840

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.041 x 0.041
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Avg. Area [cm²]	4.00
pS _{tot} avg [W/m²]	3.39
pS _n avg [W/m²]	3.06
E _{peak} [V/m]	54.9
Power Drift [dB]	0.02

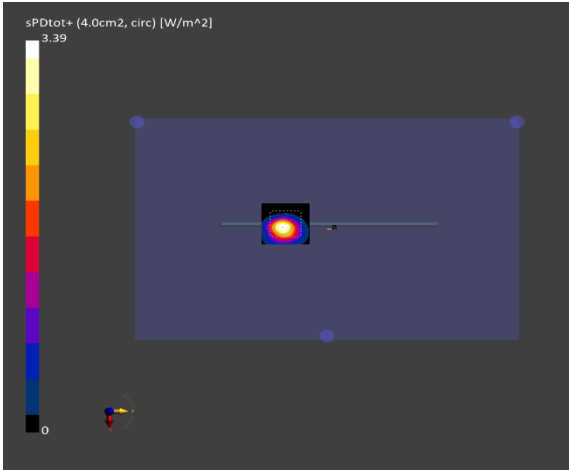

Date: 12/02/2025

Antenna 1b, NB U-NII 5, OQPSK, Ch. Low

Device Under Test Properties

DUT	Serial Number	DUT Type
BCGA3462	FF7QY	Tablet Device

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Channel	Group, UID	Frequency [MHz]
5G	BACK	2.00	Low	10982	6109.0

Hardware Setup

Probe, Calibration Date	DAE, Calibration Date
EUmmWV3 – SN9364, 06/11/2025	DAE4 – SN1402, 04/10/2025

Software Setup


Software	Software Version
cDASY6 Module mmWave	3.2.0.1840

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.041 x 0.041
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Avg. Area [cm²]	4.00
pS _{tot} avg [W/m²]	0.300
pS _n avg [W/m²]	0.284
E _{peak} [V/m]	18.8
Power Drift [dB]	0.29

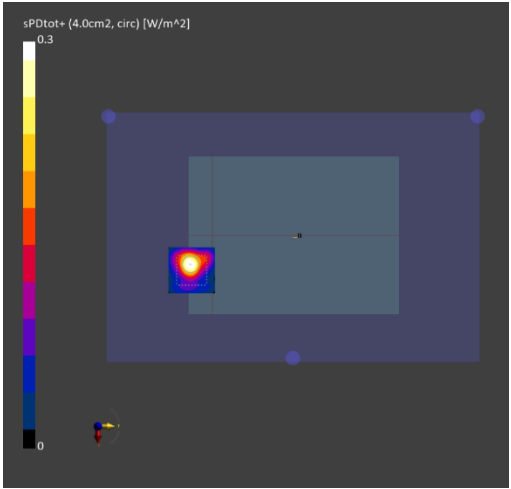

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: RWXLL

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2437.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2437.000$ MHz; $\text{cond} = 1.78$ S/m; $\text{perm} = 41.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 01/26/2026; Ambient Temp: 19.2°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7551; ConvF:(6.98,6.91,7.1); Calibrated: 2025-04-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2025-04-15

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: 2.4 GHz WIFI/ IEEE 802.11b, Antenna 3a, 22 MHz Bandwidth,

Exp: Body| Right Edge, Ch. 6, 1Mbps

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (25.0 x 200.0 x 22.9): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.98 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.845 W/kg

Smallest distance from peaks to all points 3 dB below is 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

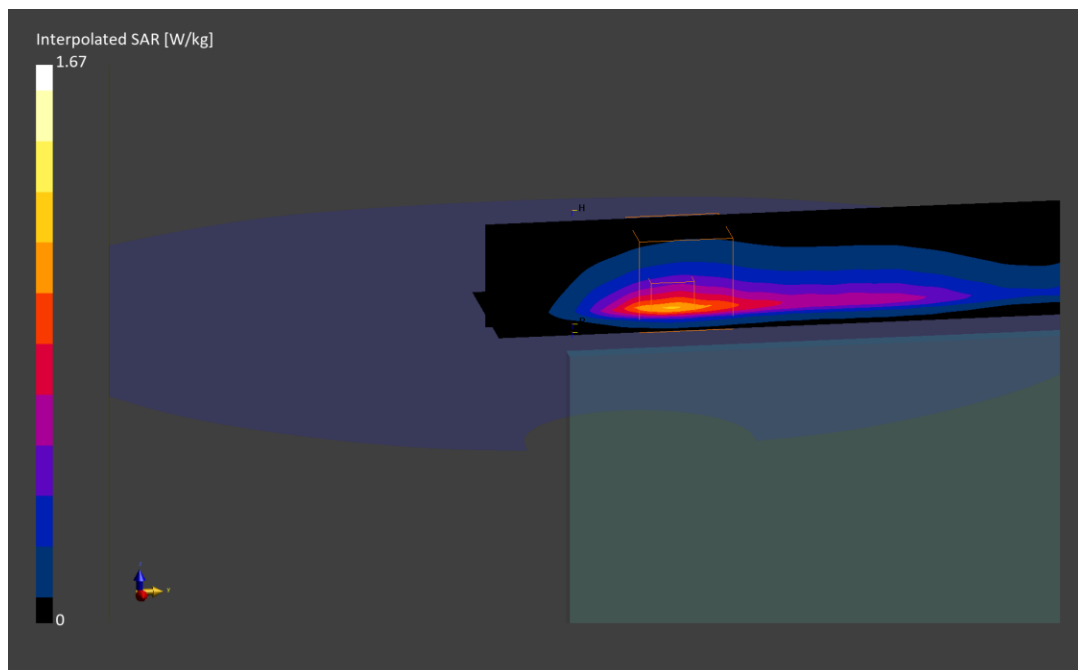

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: RWXLL

Communication System: UID:10117 - CAE, WLAN; MAIA: Y; Frequency: 5755.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5755.00\text{MHz}$; $\text{cond} = 5.07\text{ S/m}$; $\text{perm} = 34.5$; $\text{density} = 1000\text{ kg/m}^3$

Phantom Section: Flat; Space: 5.00 mm

Test Date: 01/26/2026; Ambient Temp: 19.5°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7668; ConvF:(4.84,4.91,4.69); Calibrated: 2025-08-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1681; Calibrated: 2025-08-08

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.4.0.5005

**Mode: 5 GHz WIFI/ IEEE 802.11n, Antenna 5T, 40 MHz Bandwidth, U-NII-3,
Exp: Body| Right Edge, Ch. 151, 13.5 Mbps**

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0\text{ mm}$, $dy=10.0\text{ mm}$

Zoom Scan (32.0 x 300.0 x 22.9): Measurement grid: $dx=4.0\text{ mm}$, $dy=4.0\text{ mm}$, $dz=1.4\text{ mm}$; Graded Ratio: 1.4


Reference Value = 0.47 W/kg; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 3.01 W/kg

SAR(1 g) = 0.733 W/kg

Smallest distance from peaks to all points 3 dB below is 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.3 %

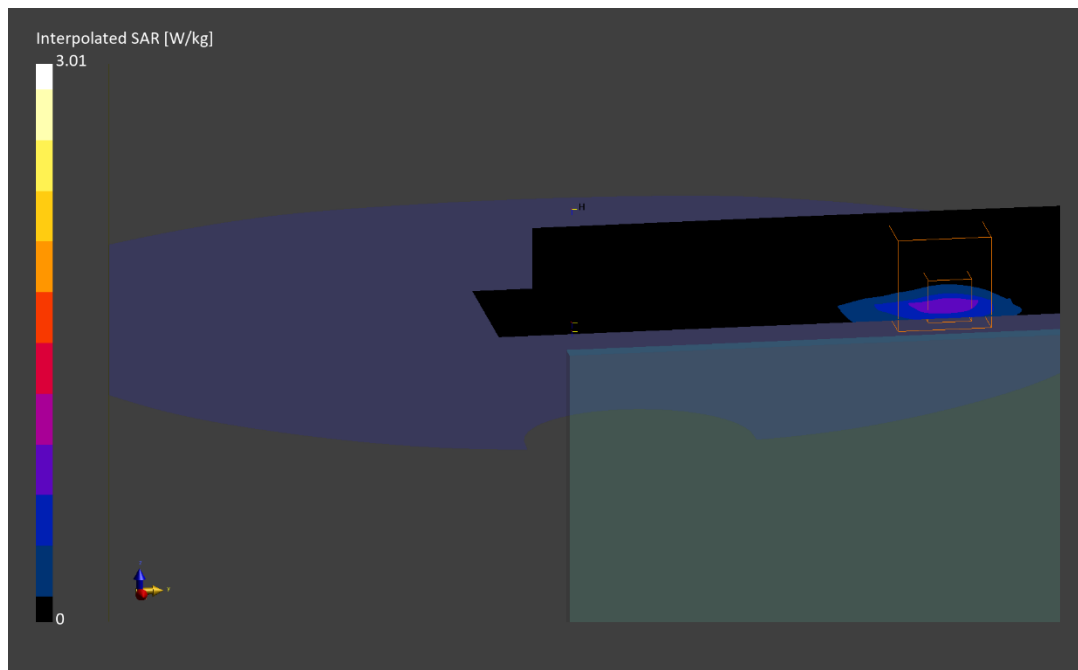

ELEMENT

DUT: BCGA3462; Type: Tablet Device; Serial: RWXLL

Communication System: UID:10032 - CAA, CW; MAIA: Y; Frequency: 5844.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5844.0$ MHz; $\text{cond} = 5.18$ S/m; $\text{perm} = 34.4$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 01/26/2026; Ambient Temp: 19.5°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7668; ConvF:(4.67,4.74,4.52); Calibrated: 2025-08-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2025-08-08
Phantom: Twin-SAM V8.0; Serial: 2027
Measurement SW: DASY Module SAR V16.4.0.5005

Mode: NB U-NII 3, Antenna 5T, Exp: Body| Right Edge, Ch. High, 1 Mbps

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (44.0 x 316.0 x 22.9): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.50 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.84 W/kg

SAR(1 g) = 0.710 W/kg

Smallest distance from peaks to all points 3 dB below is 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.4 %

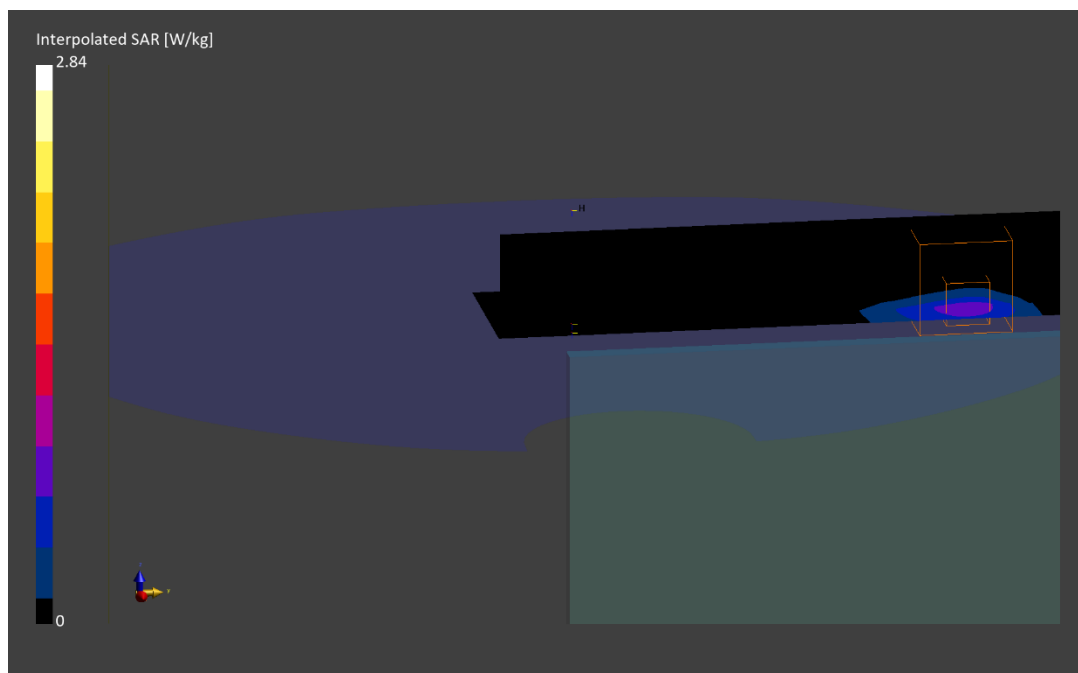

ELEMENT

DUT: BCGA3462; Type: Tablet Device

**Mode: 2.4 GHz WIFI/ IEEE 802.11b, Antenna 3a, 22 MHz Bandwidth,
Exp: Body| Right Edge, Ch. 6, 1Mbps**

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2437.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2437.0 \text{ MHz}$; $\text{cond} = 1.78 \text{ S/m}$; $\text{perm} = 41.0$; $\text{density} = 1000 \text{ kg/m}^3$

Phantom Section: Flat; Space: 5.00 mm

**Mode: 5 GHz WIFI/ IEEE 802.11n, Antenna 5T, 40 MHz Bandwidth, U-NII-3,
Exp: Body| Right Edge, Ch. 151, 13.5 Mbps**

Communication System: UID:10117 - CAE, WLAN; MAIA: Y; Frequency: 5755.0 MHz


Medium: 5200-5800 Head; Medium parameters used:

$f = 5755.0 \text{ MHz}$; $\text{cond} = 5.07 \text{ S/m}$; $\text{perm} = 34.5$; $\text{density} = 1000 \text{ kg/m}^3$

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 1.05 W/kg

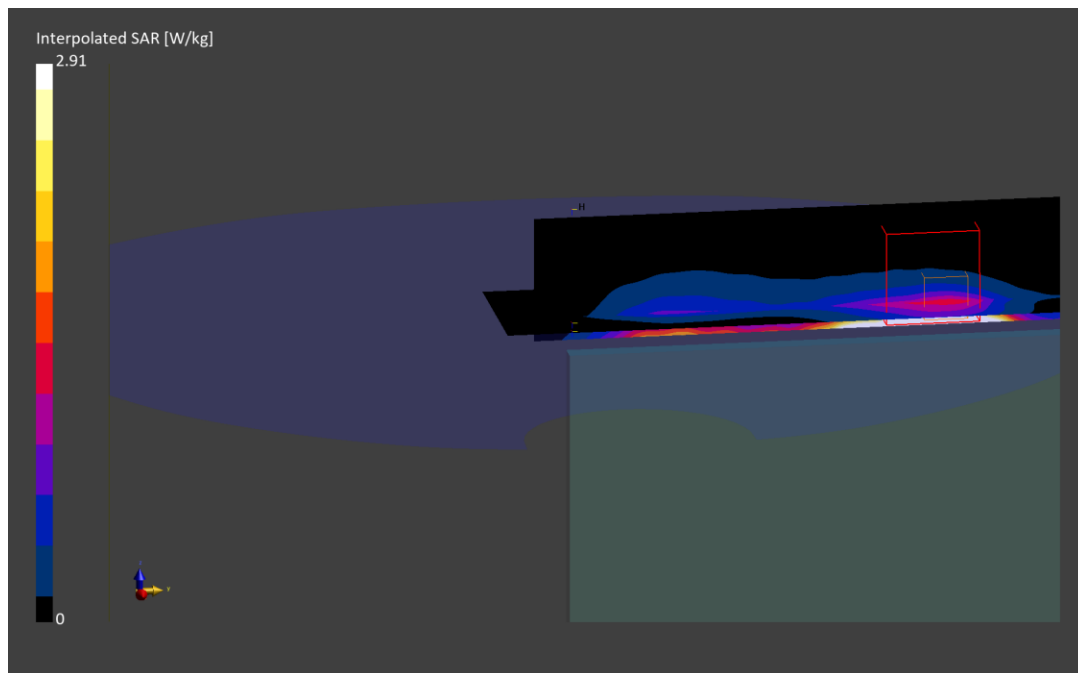

ELEMENT

DUT: BCGA3462; Type: Tablet Device

**Mode: 2.4 GHz WIFI/ IEEE 802.11b, Antenna 3a, 22 MHz Bandwidth,
Exp: Body| Right Edge, Ch. 6, 1Mbps**

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2437.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2437.0$ MHz; $\text{cond} = 1.78$ S/m; $\text{perm} = 41.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Mode: NB U-NII 3, Antenna 5T, Exp: Body| Right Edge, Ch. High, 1 Mbps

Communication System: UID:10032 - CAA, CW; MAIA: Y; Frequency: 5844.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5844.0$ MHz; $\text{cond} = 5.18$ S/m; $\text{perm} = 34.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Multi-Band Result:

SAR(1 g) = 0.960 W/kg

