



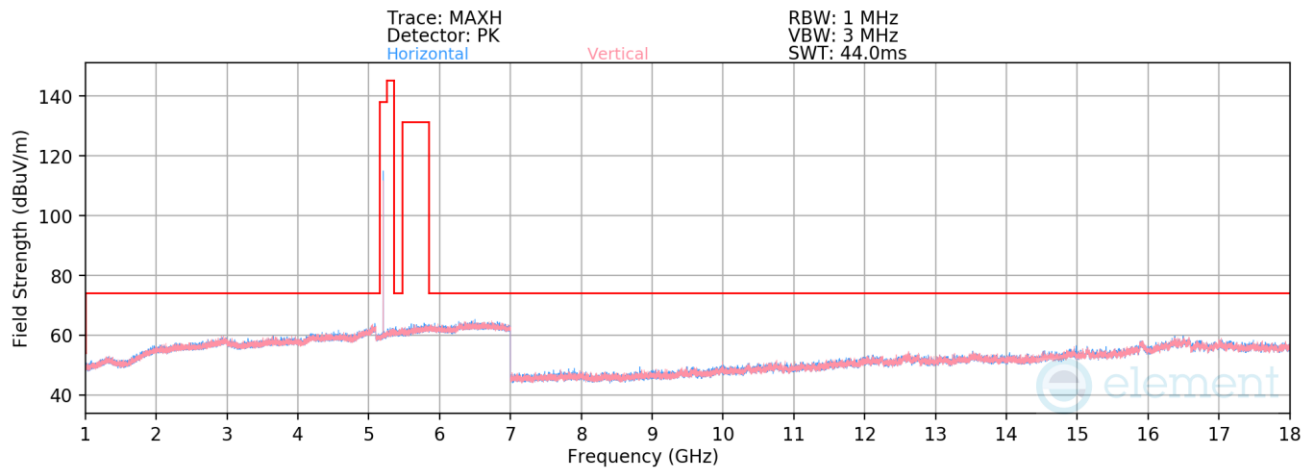

Plot 7-483. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 5203MHz)

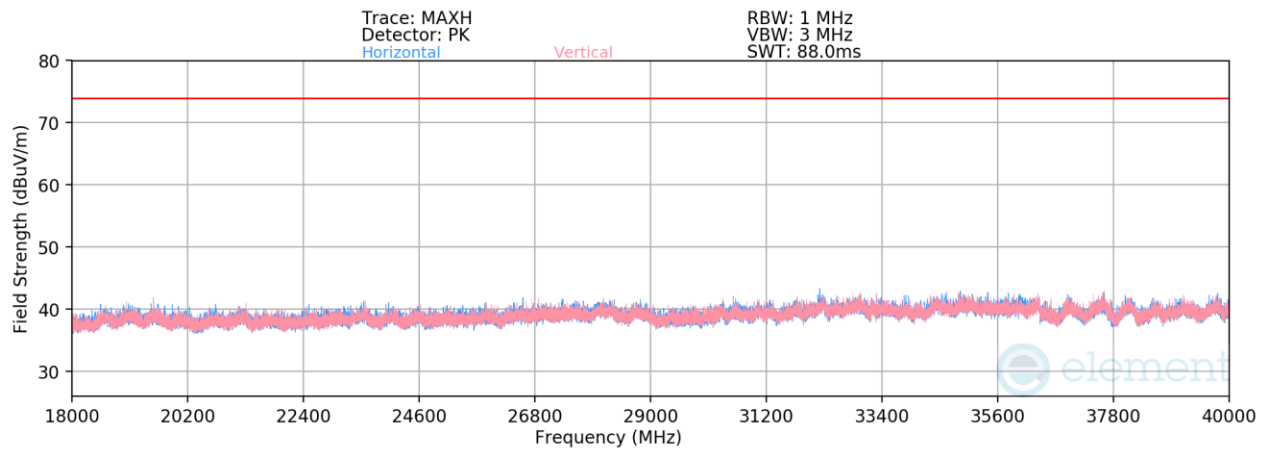

Plot 7-484. Radiated Spurious Emissions Above 18GHz (BDR GFSK ePA – 5203MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA


Distance of Measurements: 3 Meters

Operating Frequency: 5203MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10406.00	Peak	H	297	176	-70.70	14.33	0.00	50.63	68.23	-17.60
* 15609.00	Average	V	-	-	-85.60	22.18	0.00	43.58	53.98	-10.40
* 15609.00	Peak	V	-	-	-74.92	22.18	0.00	54.26	73.98	-19.72
* 20812.00	Average	V	-	-	-60.56	-7.64	-9.54	29.26	53.98	-24.72
* 20812.00	Peak	V	-	-	-49.18	-7.64	-9.54	40.64	73.98	-33.34
26015.00	Peak	V	-	-	-50.11	-5.93	-9.54	41.41	68.23	-26.82

Table 7-33. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 303 of 439

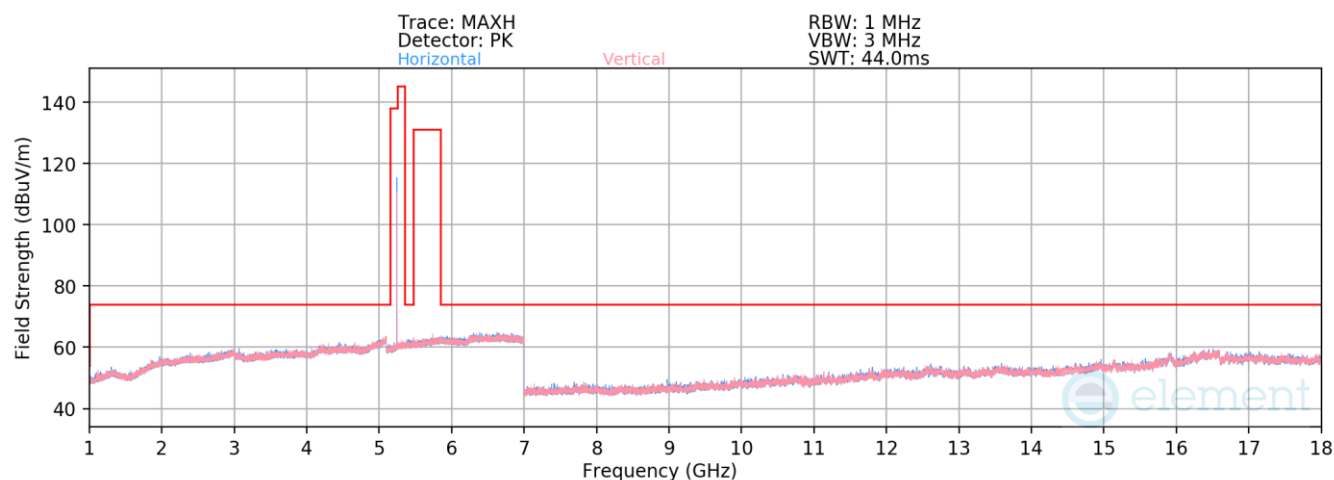

Plot 7-485. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 5245MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10490.00	Peak	H	-	-	-71.30	15.01	50.72	68.23	-17.51
* 15735.00	Average	H	-	-	-86.74	23.28	43.54	53.98	-10.44
* 15735.00	Peak	H	-	-	-75.30	23.28	54.98	73.98	-19.00

Table 7-34. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 304 of 439

V 11.0 06/2025

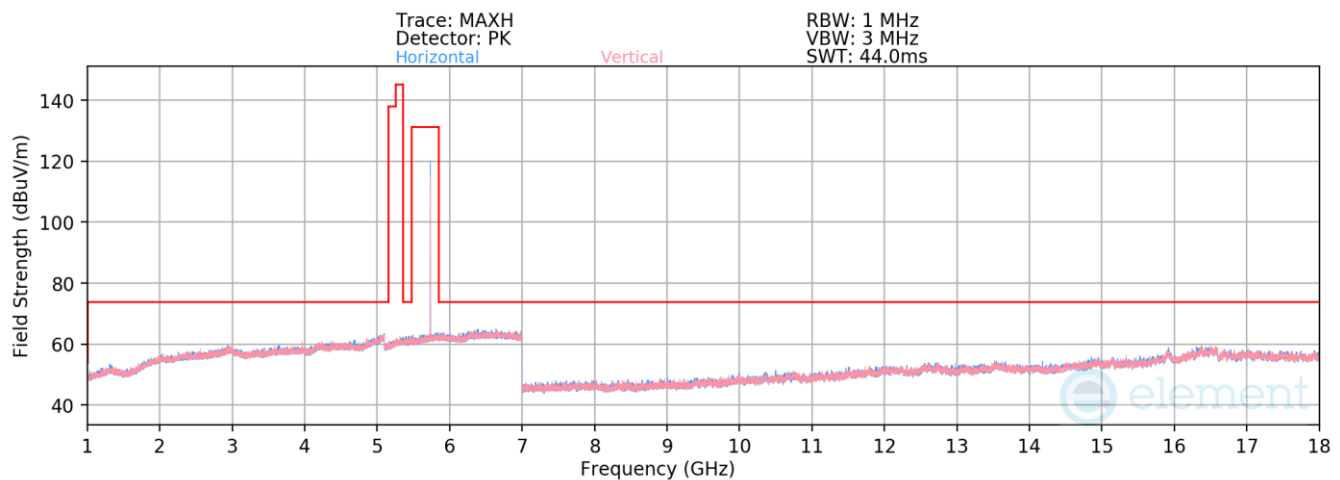

Plot 7-486. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 5733MHz)


Mode:	BDR
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5733MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11466.00	Average	V	147	193	-82.63	16.65	41.02	53.98	-12.96
* 11466.00	Peak	V	147	193	-72.36	16.65	51.29	73.98	-22.69
17199.00	Peak	H	-	-	-74.66	25.43	57.76	68.23	-10.47


Table 7-35. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 305 of 439

V 11.0 06/2025

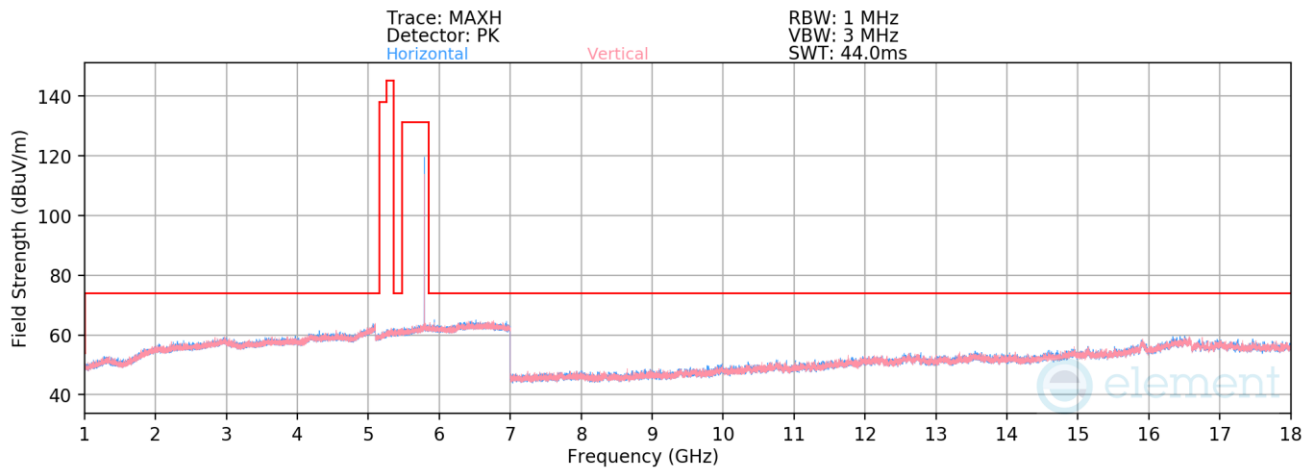

Plot 7-487. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 5788MHz)

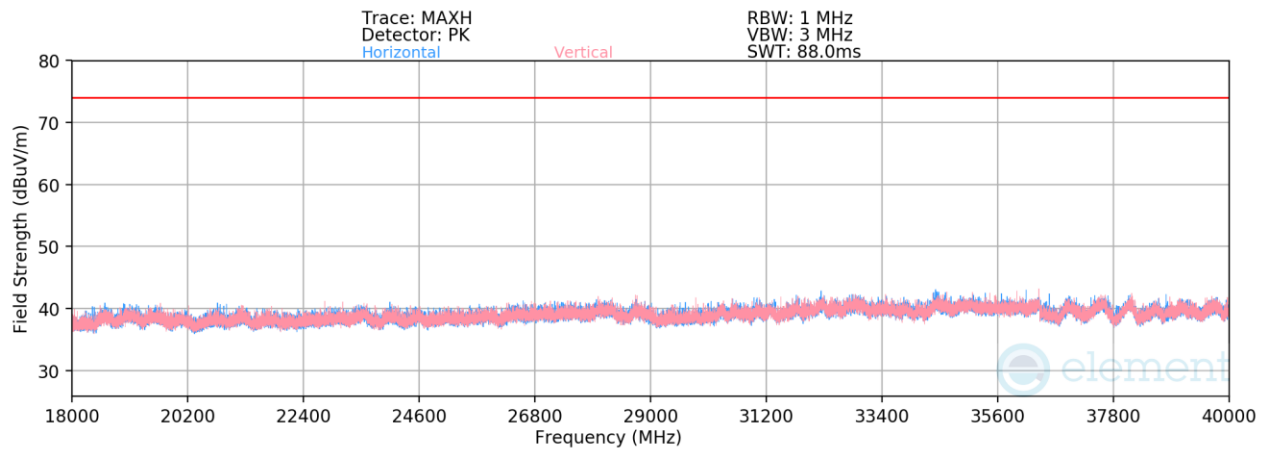

Plot 7-488. Radiated Spurious Emissions Above 18GHz (BDR GFSK ePA – 5788MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5789MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11576.00	Average	V	-	-	-84.01	17.05	0.00	40.04	53.98	-13.94
*	11576.00	Peak	V	-	-	-72.54	17.05	0.00	51.51	73.98	-22.47
	17364.00	Peak	V	-	-	-73.77	24.10	0.00	57.33	68.23	-10.90
	23152.00	Peak	V	-	-	-48.40	-7.13	-9.54	41.93	68.23	-26.30
	28940.00	Peak	H	-	-	-52.14	-3.99	-9.54	41.33	68.23	-26.90
	34728.00	Peak	V	-	-	-50.36	-4.81	-9.54	42.29	68.23	-25.94

Table 7-36. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 306 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

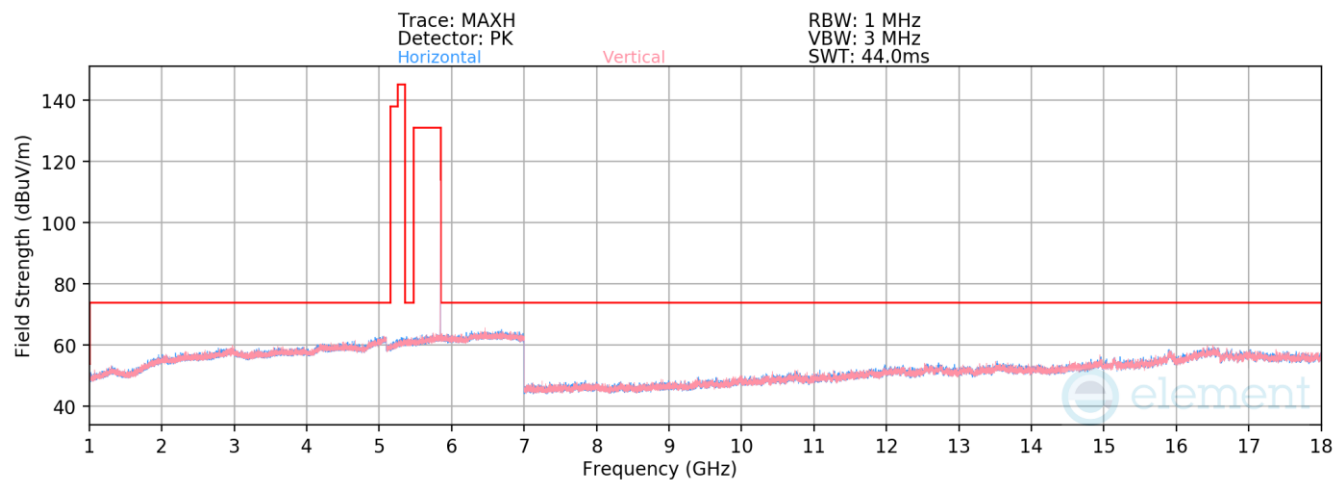

Plot 7-489. Radiated Spurious Emissions 1-18GHz TxBF Primary (BDR GFSK ePA – 5844MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5844MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11688.00	Average	H	-	-	-83.74	16.99	40.24	53.98	-13.74
* 11688.00	Peak	H	-	-	-72.06	16.99	51.93	73.98	-22.05
17532.00	Peak	H	-	-	-72.66	23.85	58.19	68.23	-10.04

Table 7-37. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 307 of 439

V 11.0 06/2025

HDR

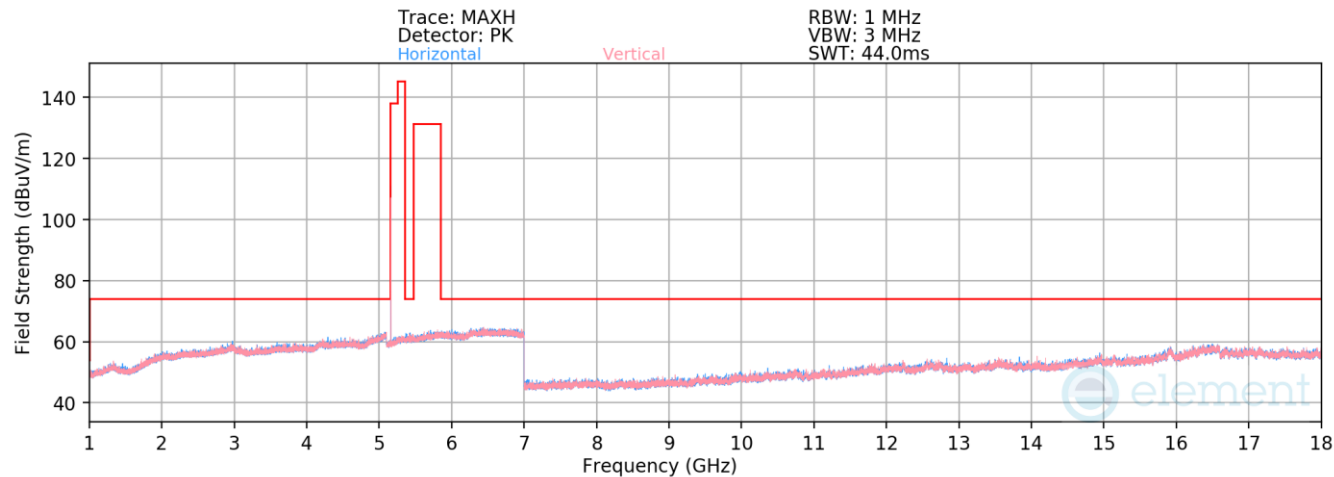

Plot 7-490. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR HDR4 ePA – 5162MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5162MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10324.00	Peak	V	-	-	-70.99	15.08	51.08	68.23	-17.15
* 15486.00	Average	H	-	-	-86.24	22.48	43.24	53.98	-10.74
* 15486.00	Peak	H	-	-	-74.48	22.48	55.00	73.98	-18.98

Table 7-38. Radiated Spurious Emissions Measurements TxBF Primary


FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 308 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

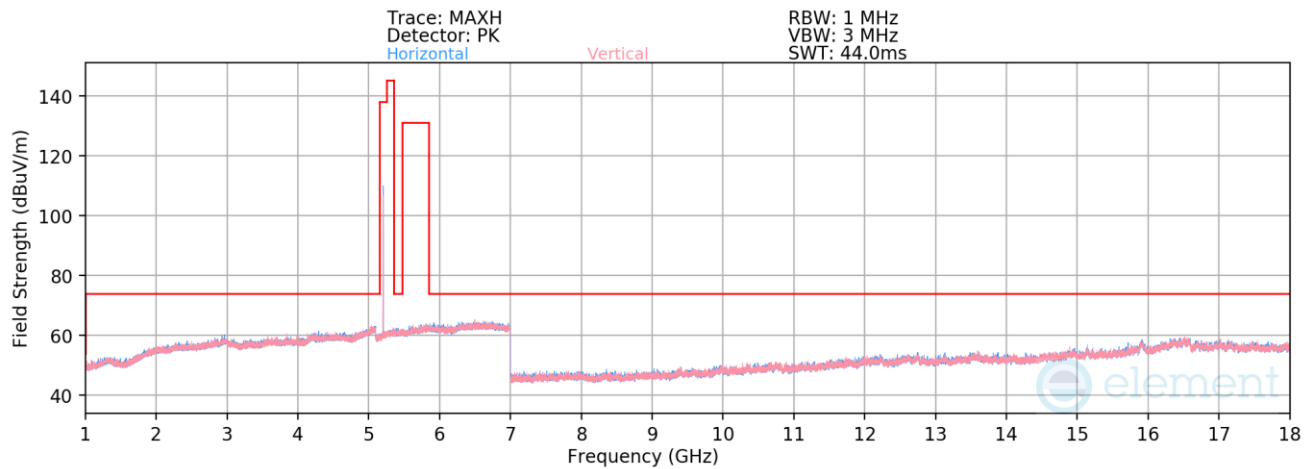

Plot 7-491. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR HDR4 ePA – 5203MHz)

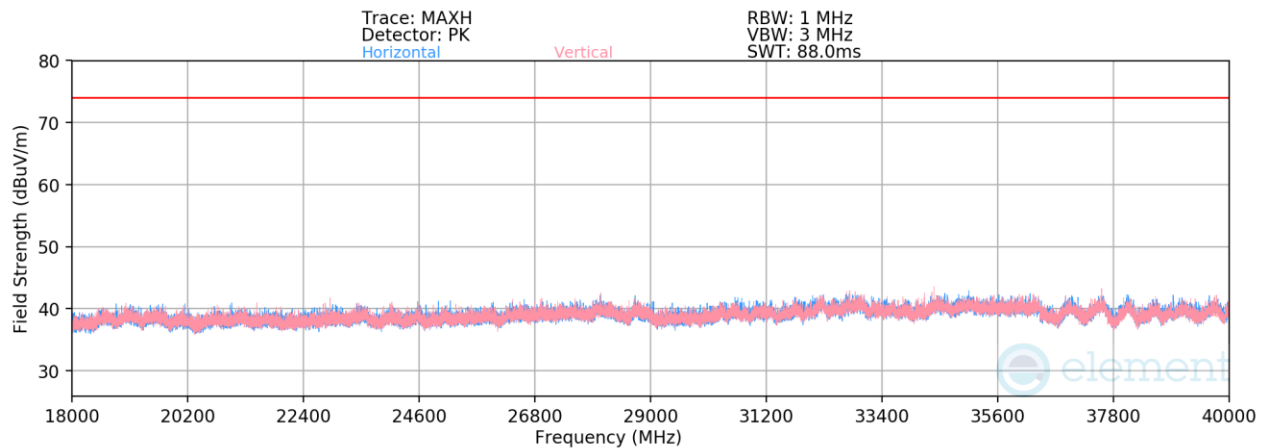

Plot 7-492. Radiated Spurious Emissions Above 18GHz (HDR HDR4 ePA – 5203MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5203MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10406.00	Peak	H	-	-	-71.75	14.74	0.00	49.99	68.23	-18.24
* 15609.00	Average	V	-	-	-85.68	22.64	0.00	43.95	53.98	-10.03
* 15609.00	Peak	V	-	-	-75.24	22.64	0.00	54.39	73.98	-19.59
* 20812.00	Average	V	-	-	-60.61	-7.57	-9.54	29.28	53.98	-24.70
* 20812.00	Peak	V	-	-	-48.88	-7.57	-9.54	41.01	73.98	-32.97
26015.00	Peak	V	-	-	-49.77	-5.83	-9.54	41.86	68.23	-26.37

Table 7-39. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 309 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

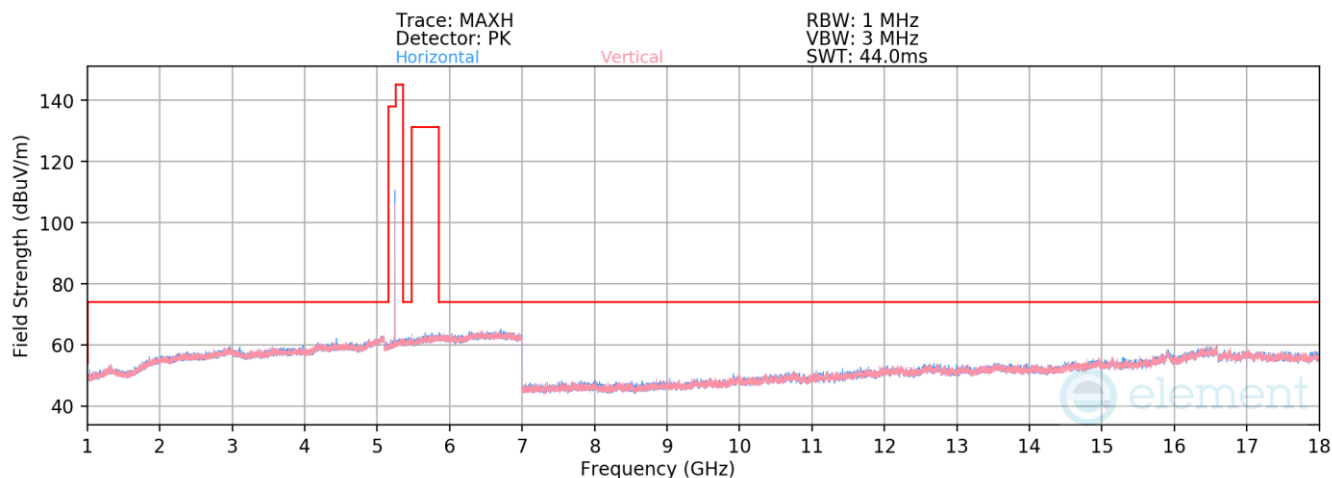

Plot 7-493. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR HDR4 ePA – 5245MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10490.00	Peak	H	-	-	-71.44	15.01	50.58	68.23	-17.65
* 15735.00	Average	H	-	-	-86.74	23.28	43.54	53.98	-10.44
* 15735.00	Peak	H	-	-	-75.35	23.28	54.93	73.98	-19.05

Table 7-40. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 310 of 439

V 11.0 06/2025

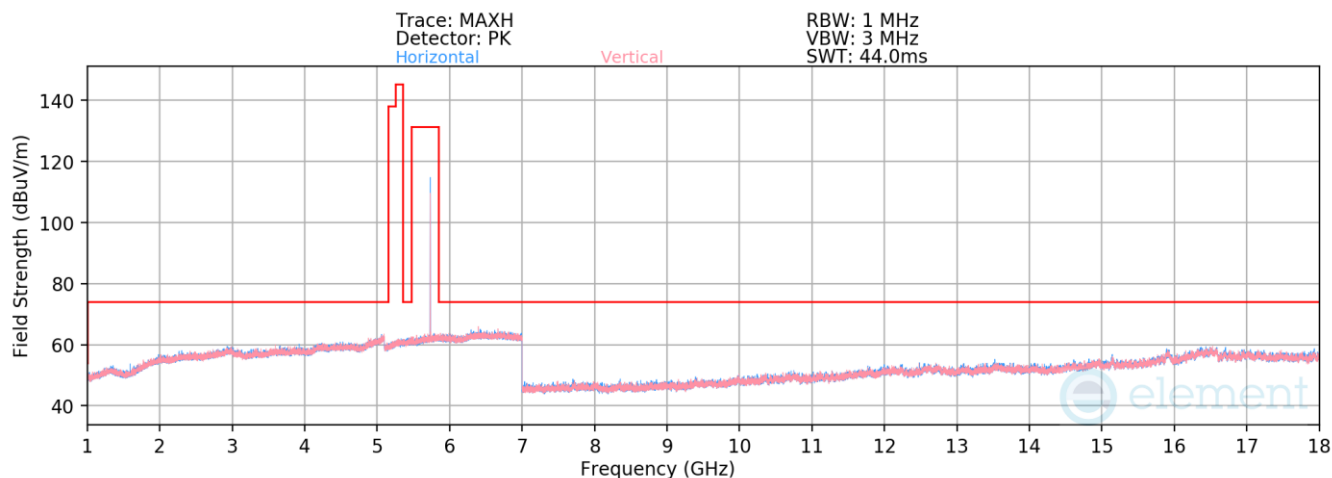

Plot 7-494. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR HDR4 ePA – 5733MHz)


Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5733MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11466.00	Average	H	-	-	-83.79	16.47	39.68	53.98	-14.30
* 11466.00	Peak	H	-	-	-72.28	16.47	51.19	73.98	-22.79
17199.00	Peak	V	-	-	-75.03	25.43	57.40	68.23	-10.83


Table 7-41. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 311 of 439

V 11.0 06/2025

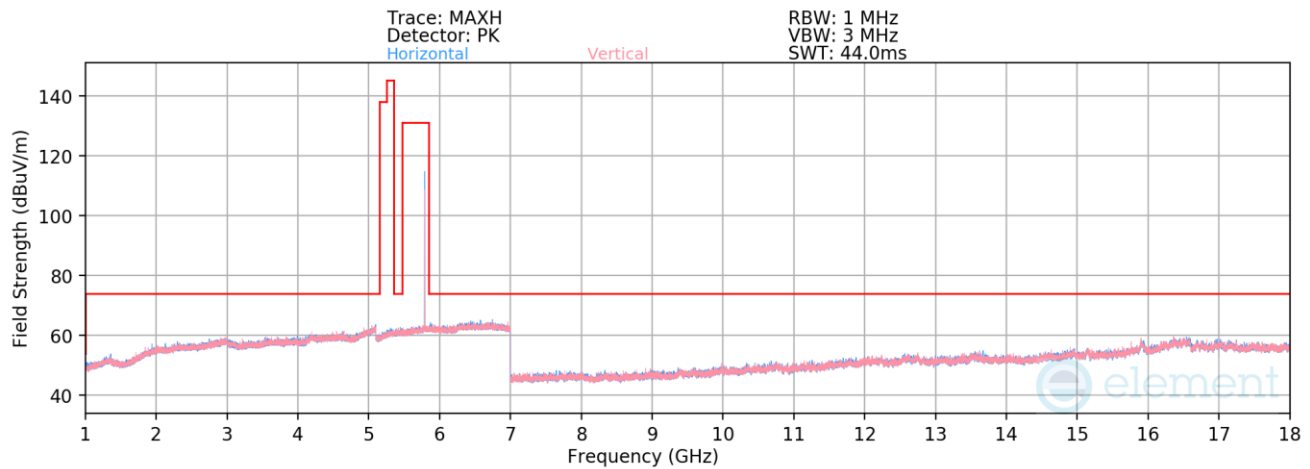

Plot 7-495. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR HDR4 ePA – 5788MHz)

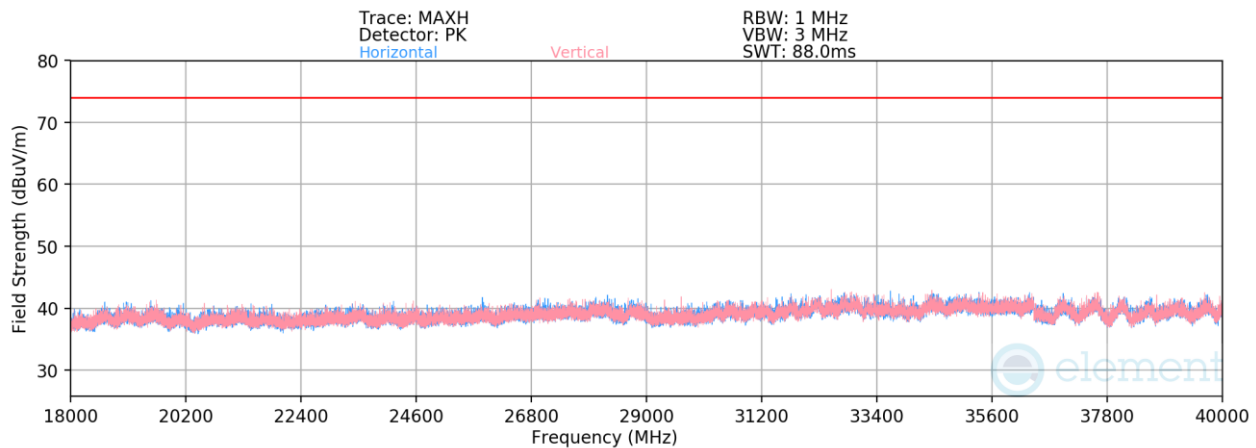

Plot 7-496. Radiated Spurious Emissions Above 18GHz (HDR HDR4 ePA – 5788MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5789MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11576.00	Average	V	-	-	-84.03	17.05	0.00	40.01	53.98	-13.97
*	11576.00	Peak	V	-	-	-71.30	17.05	0.00	52.75	73.98	-21.23
	17364.00	Peak	V	-	-	-74.41	24.18	0.00	56.78	68.23	-11.45
	23152.00	Peak	V	-	-	-49.29	-7.12	-9.54	41.05	68.23	-27.18
	28940.00	Peak	H	-	-	-52.16	-3.95	-9.54	41.34	68.23	-26.89
	34728.00	Peak	V	-	-	-50.93	-4.76	-9.54	41.77	68.23	-26.46

Table 7-42. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 312 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

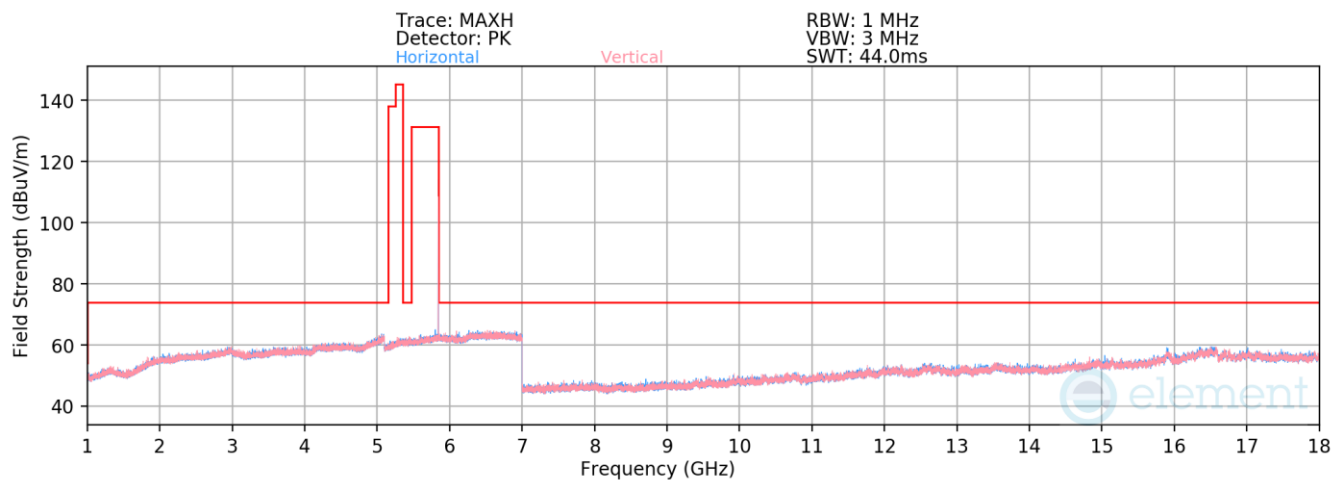

Plot 7-497. Radiated Spurious Emissions 1-18GHz TxBF Primary (HDR HDR4 ePA – 5844MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5844MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11688.00	Average	V	-	-	-83.84	16.99	40.15	53.98	-13.83
* 11688.00	Peak	V	-	-	-72.93	16.99	51.06	73.98	-22.92
17532.00	Peak	V	-	-	-73.51	24.35	57.84	68.23	-10.39


Table 7-43. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 313 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

LE

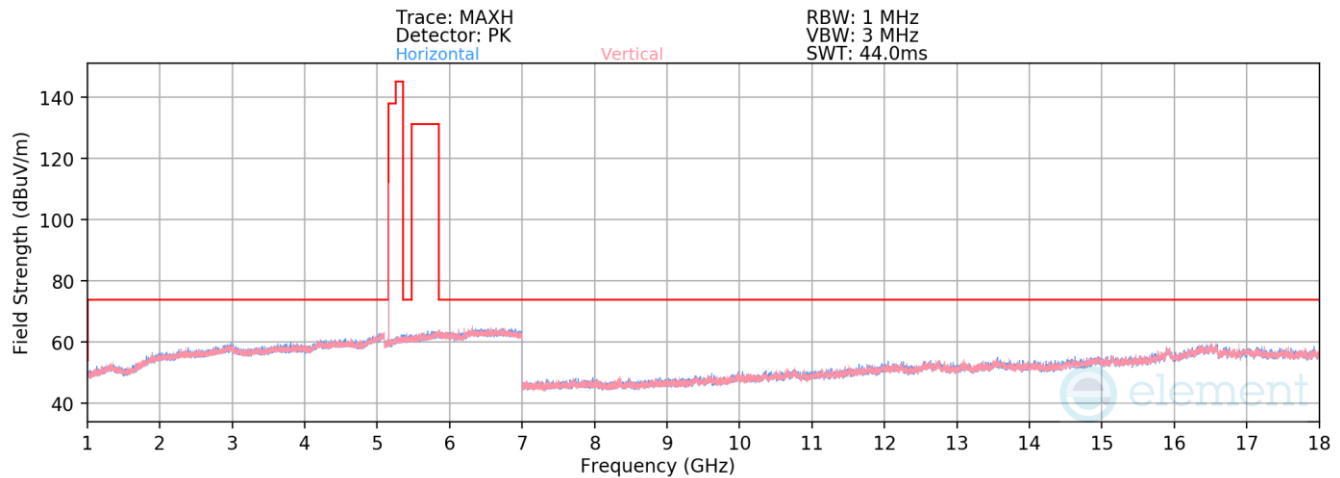

Plot 7-498. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 5162MHz)

Mode:	LE1M
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5162MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10324.00	Peak	H	296	197	-69.90	13.92	51.02	68.23	-17.21
* 15486.00	Average	H	-	-	-86.42	22.48	43.06	53.98	-10.92
* 15486.00	Peak	H	-	-	-75.00	22.48	54.47	73.98	-19.51

Table 7-44. Radiated Spurious Emissions Measurements TxBF Primary


FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 314 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

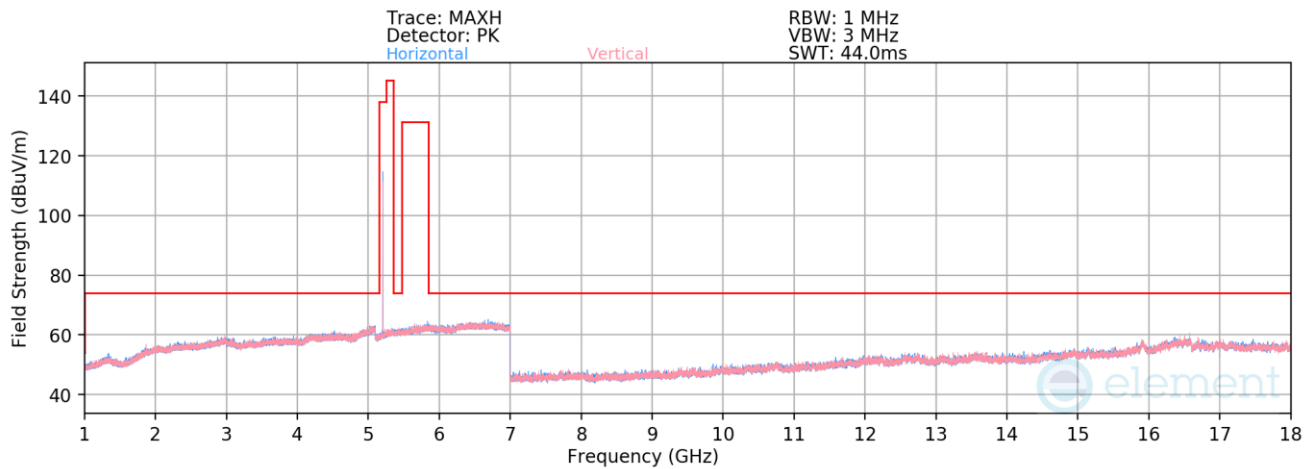

Plot 7-499. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 5203MHz)

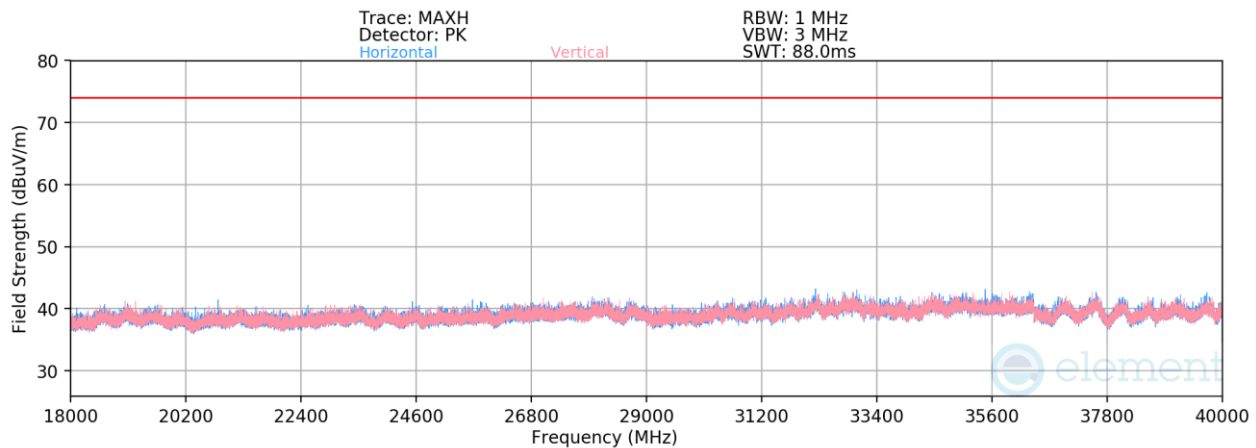

Plot 7-500. Radiated Spurious Emissions Above 18GHz (LE1M ePA – 5203MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5203MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10406.00	Peak	H	289	194	-70.55	14.33	0.00	50.77	68.23	-17.46
* 15609.00	Average	H	-	-	-85.69	22.64	0.00	43.95	53.98	-10.03
* 15609.00	Peak	H	-	-	-74.93	22.64	0.00	54.70	73.98	-19.28
* 20812.00	Average	V	-	-	-60.51	-7.57	-9.54	29.38	53.98	-24.60
* 20812.00	Peak	V	-	-	-48.91	-7.57	-9.54	40.98	73.98	-33.00
26015.00	Peak	V	-	-	-49.70	-5.83	-9.54	41.92	68.23	-26.31

Table 7-45. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 315 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

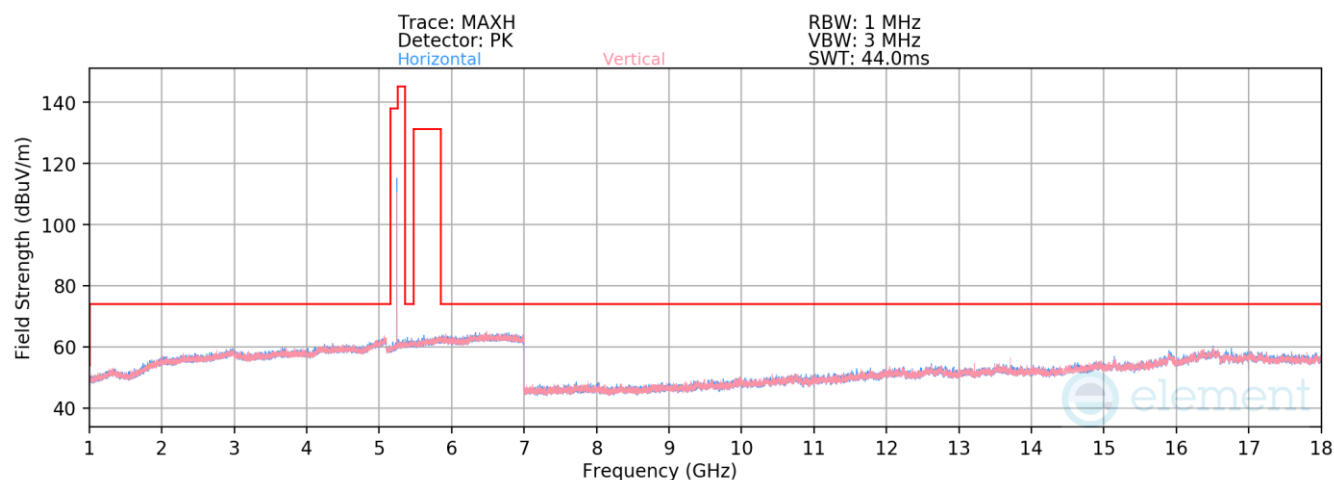

Plot 7-501. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 5245MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5245MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10490.00	Peak	H	-	-	-72.00	15.15	50.15	68.23	-18.08
* 15735.00	Average	H	-	-	-86.72	23.28	43.56	53.98	-10.42
* 15735.00	Peak	H	-	-	-74.18	23.28	56.10	73.98	-17.88

Table 7-46. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 316 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

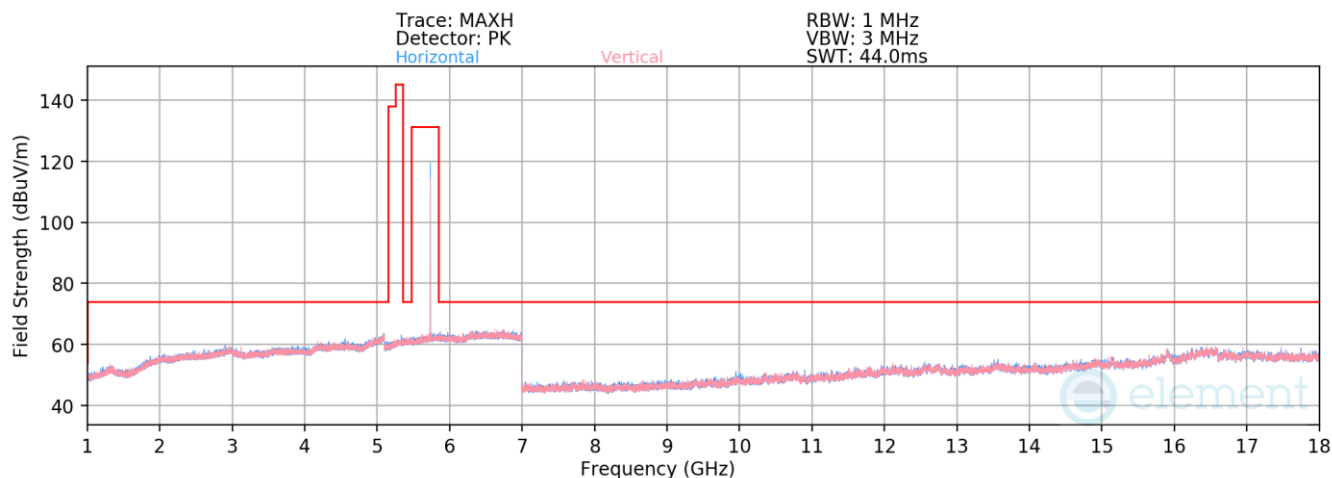

Plot 7-502. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 5733MHz)


Mode:	LE1M
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5733MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11466.00	Average	V	197	192	-82.15	16.65	41.50	53.98	-12.48
* 11466.00	Peak	V	197	192	-71.94	16.65	51.71	73.98	-22.27
17199.00	Peak	H	-	-	-74.11	24.58	57.47	68.23	-10.76


Table 7-47. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 317 of 439

V 11.0 06/2025

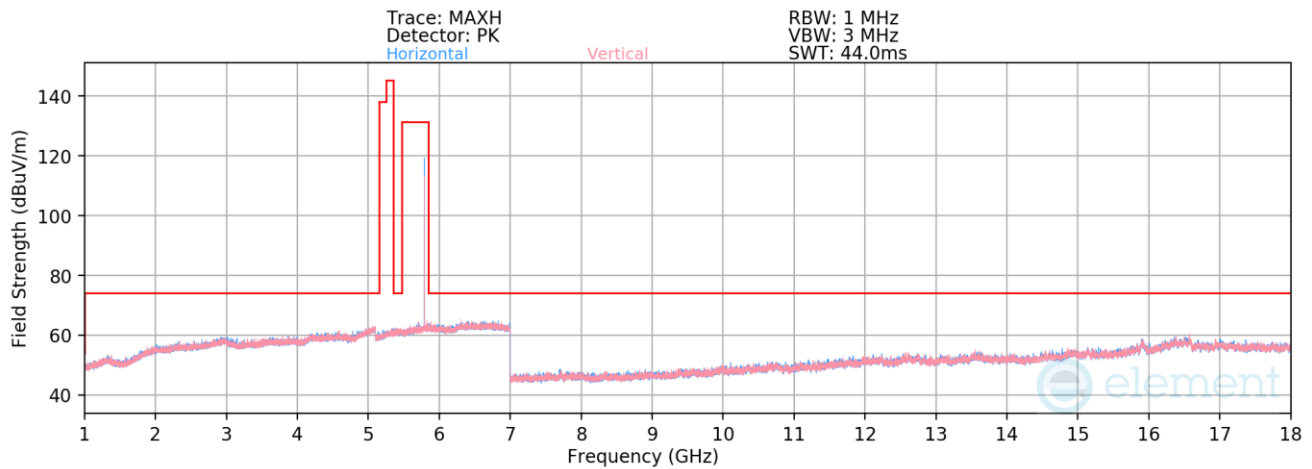

Plot 7-503. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 5788MHz)

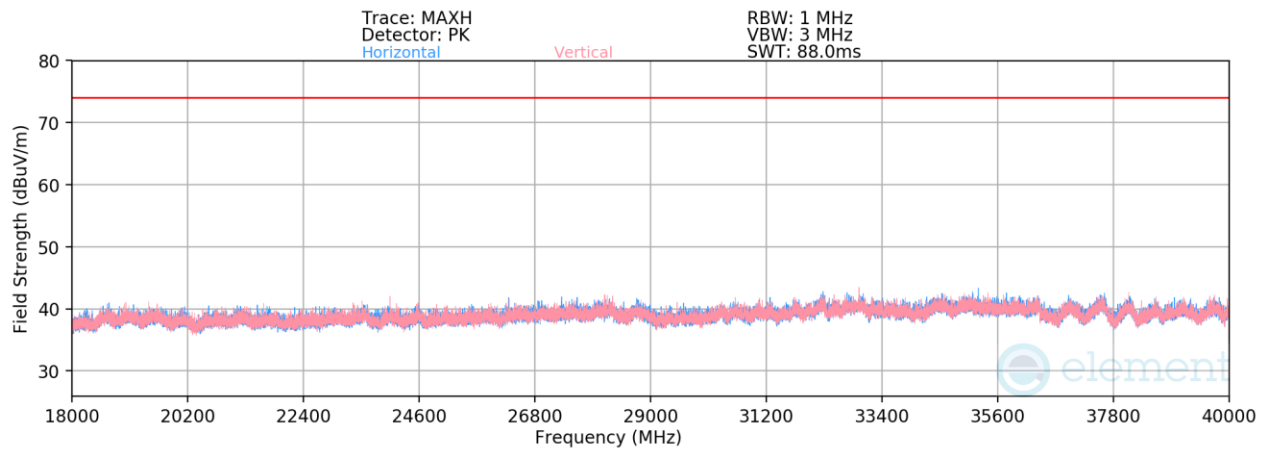

Plot 7-504. Radiated Spurious Emissions Above 18GHz (LE1M ePA – 5788MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5788MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11576.00	Average	V	-	-	-83.46	16.78	0.00	40.32	53.98	-13.66
*	11576.00	Peak	V	-	-	-72.61	16.78	0.00	51.18	73.98	-22.80
	17364.00	Peak	V	-	-	-73.65	24.10	0.00	57.45	68.23	-10.78
	23152.00	Peak	V	-	-	-49.74	-7.13	-9.54	40.59	68.23	-27.64
	28940.00	Peak	V	-	-	-52.64	-3.95	-9.54	40.87	68.23	-27.36
	34728.00	Peak	V	-	-	-50.79	-4.81	-9.54	41.86	68.23	-26.37

Table 7-48. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 318 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

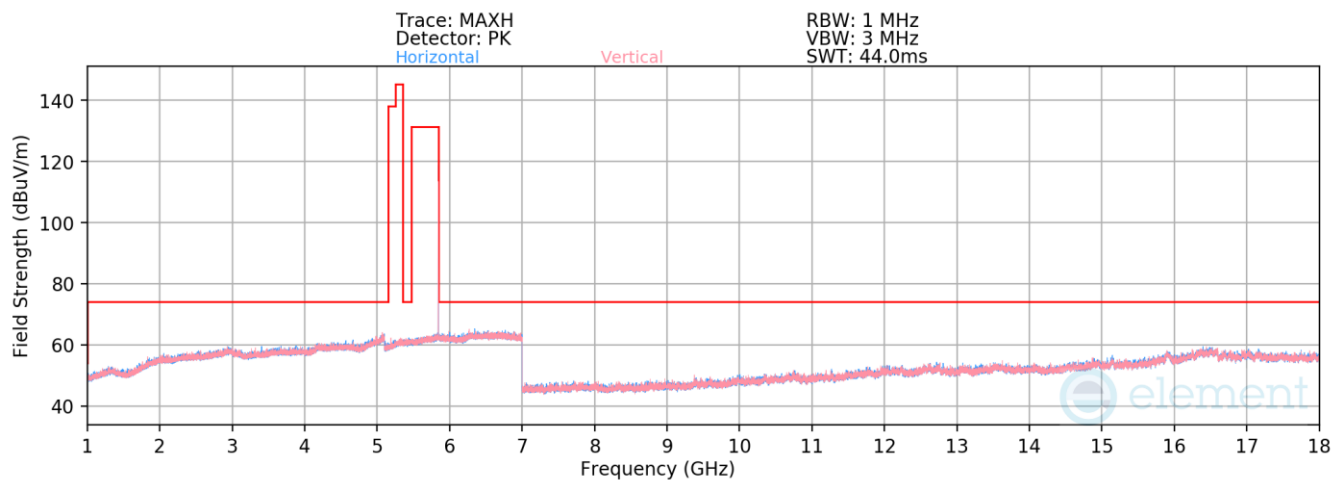

Plot 7-505. Radiated Spurious Emissions 1-18GHz TxBF Primary (LE1M ePA – 5844MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5844MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11688.00	Average	V	-	-	-83.79	17.28	40.50	53.98	-13.48
* 11688.00	Peak	V	-	-	-71.83	17.28	52.46	73.98	-21.52
17532.00	Peak	V	-	-	-73.07	23.85	57.77	68.23	-10.46

Table 7-49. Radiated Spurious Emissions Measurements TxBF Primary

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 319 of 439

V 11.0 06/2025

7.6.2 TxBF Diversity Radiated Spurious Emission (Above 1GHz) BDR

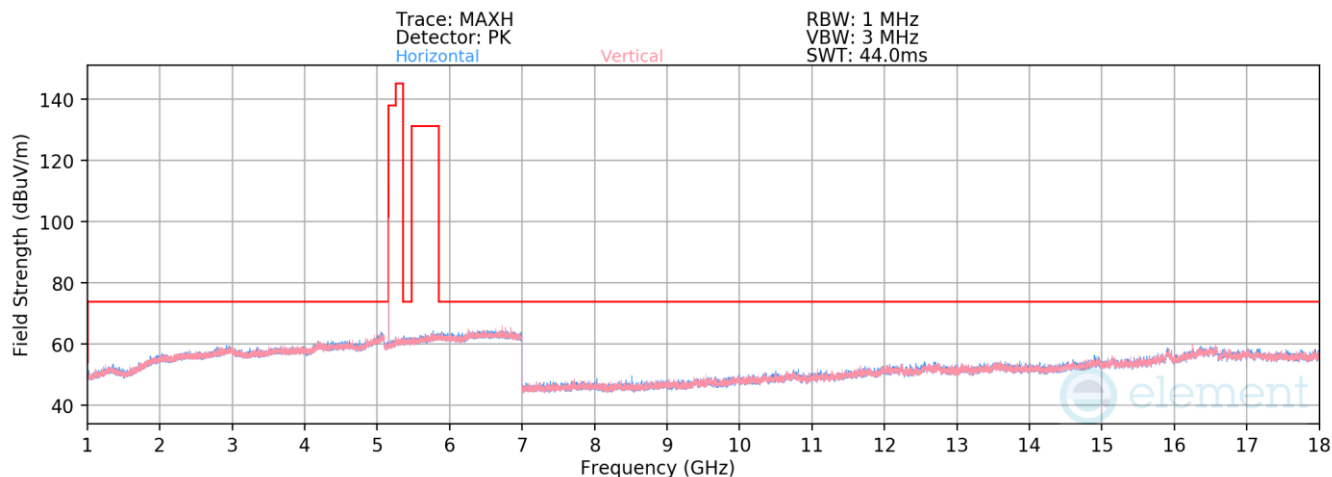

Plot 7-506. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 5162MHz)


Mode:	BDR
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5162MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10324.00	Peak	H	304	197	-69.75	13.92	51.17	68.23	-17.06
* 15486.00	Average	V	-	-	-86.52	22.48	42.96	53.98	-11.02
* 15486.00	Peak	V	-	-	-75.25	22.48	54.22	73.98	-19.76


Table 7-50. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 320 of 439

V 11.0 06/2025

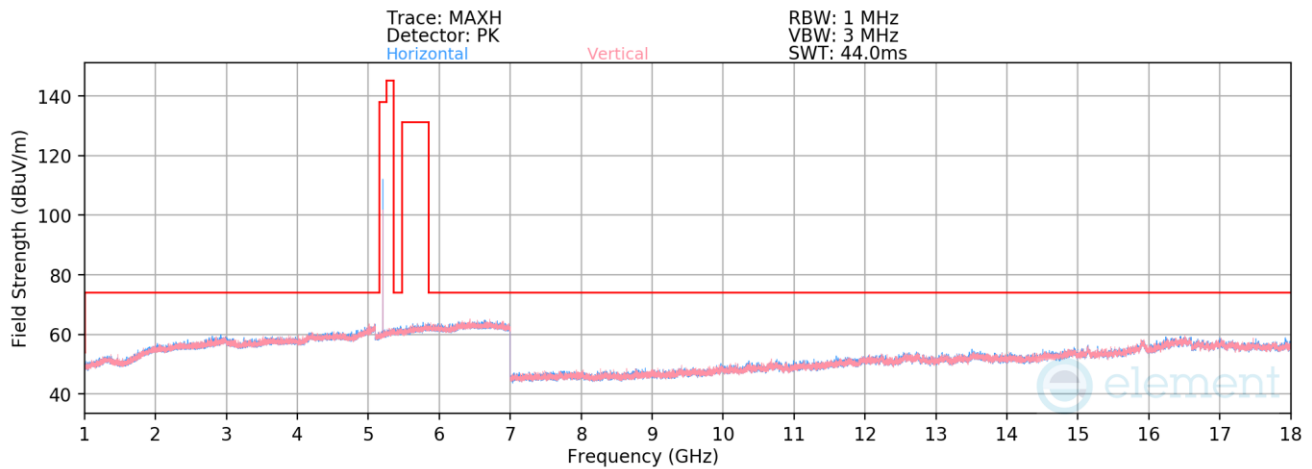

Plot 7-507. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 5203MHz)

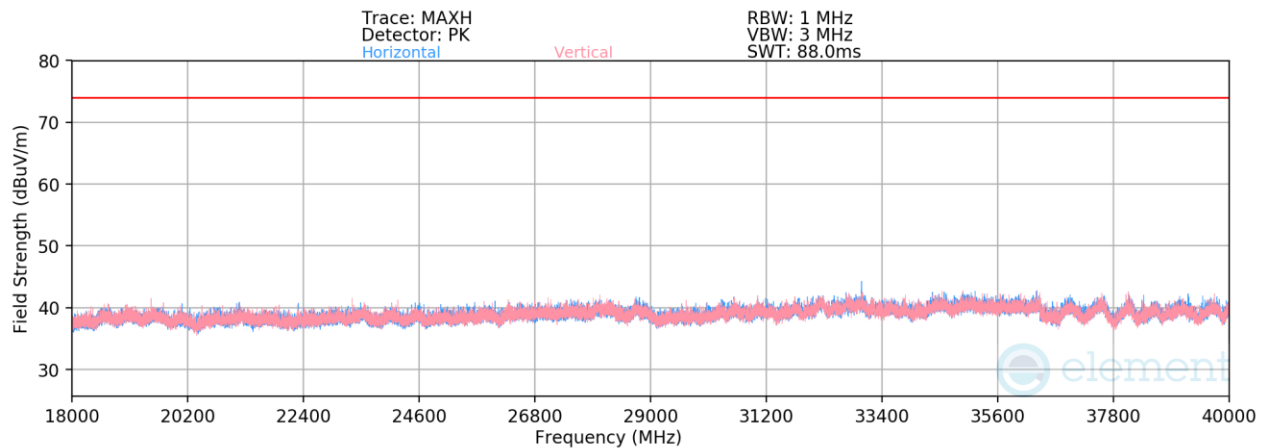

Plot 7-508. Radiated Spurious Emissions Above 18GHz (BDR GFSK ePA – 5203MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5203MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10406.00	Peak	H	294	170	-71.17	14.74	0.00	50.57	68.23	-17.66
* 15609.00	Average	H	-	-	-85.72	22.23	0.00	43.51	53.98	-10.47
* 15609.00	Peak	H	-	-	-73.81	22.23	0.00	55.42	73.98	-18.56
* 20812.00	Average	H	-	-	-60.44	-7.57	-9.54	29.45	53.98	-24.53
* 20812.00	Peak	H	-	-	-48.88	-7.57	-9.54	41.02	73.98	-32.96
26015.00	Peak	V	-	-	-50.29	-5.83	-9.54	41.34	68.23	-26.89

Table 7-51. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 321 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

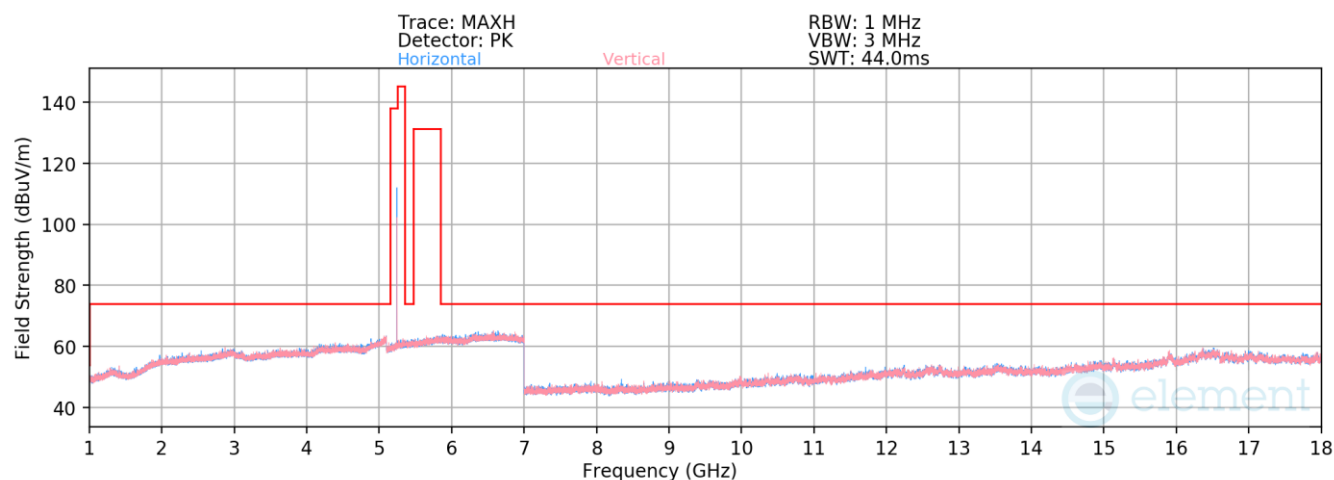

Plot 7-509. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 5245MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10490.00	Peak	H	295	167	-69.81	14.98	52.17	68.23	-16.06
* 15735.00	Average	H	-	-	-86.16	23.53	44.37	53.98	-9.61
* 15735.00	Peak	H	-	-	-75.64	23.53	54.89	73.98	-19.09

Table 7-52. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 322 of 439

V 11.0 06/2025

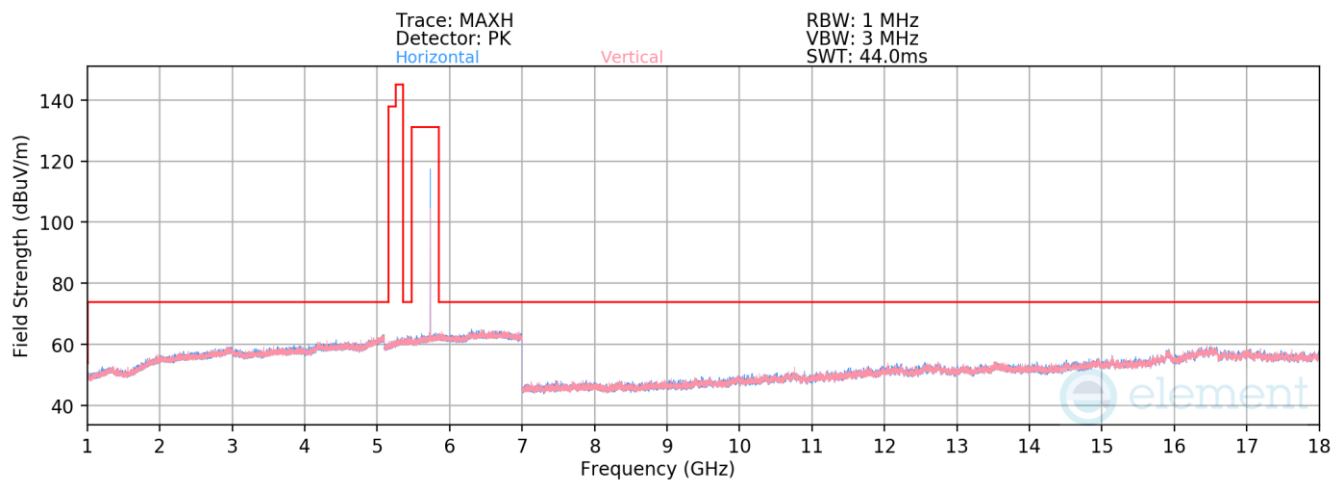

Plot 7-510. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 5733MHz)

Mode:	BDR
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5733MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11466.00	Average	V	-	-	-83.75	16.47	39.72	53.98	-14.26
* 11466.00	Peak	V	-	-	-71.26	16.47	52.21	73.98	-21.77
17199.00	Peak	V	-	-	-74.23	25.29	58.07	68.23	-10.16

Table 7-53. Radiated Spurious Emissions Measurements TxBF Diversity


FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 323 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

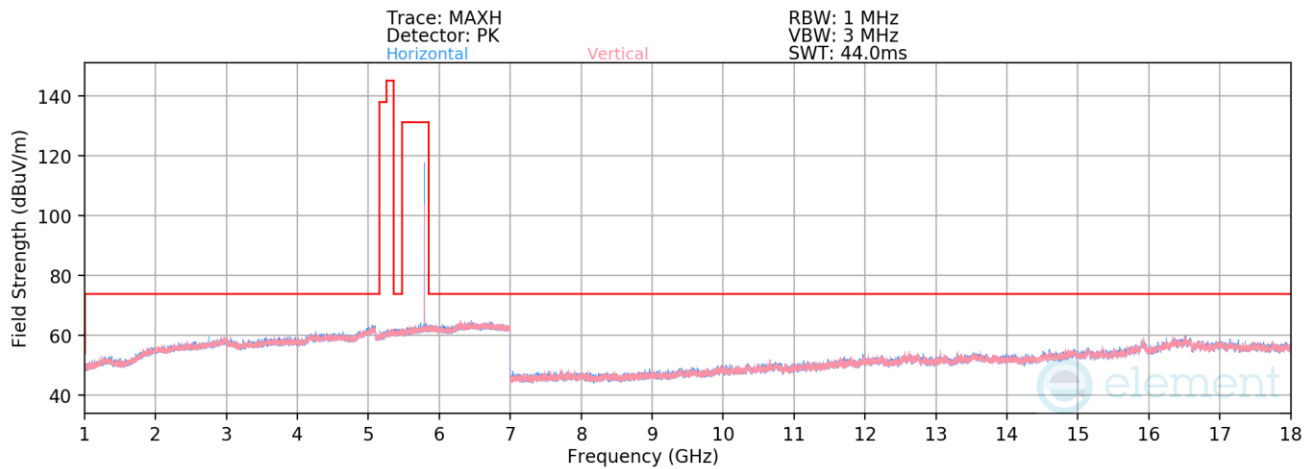

Plot 7-511. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 5788MHz)

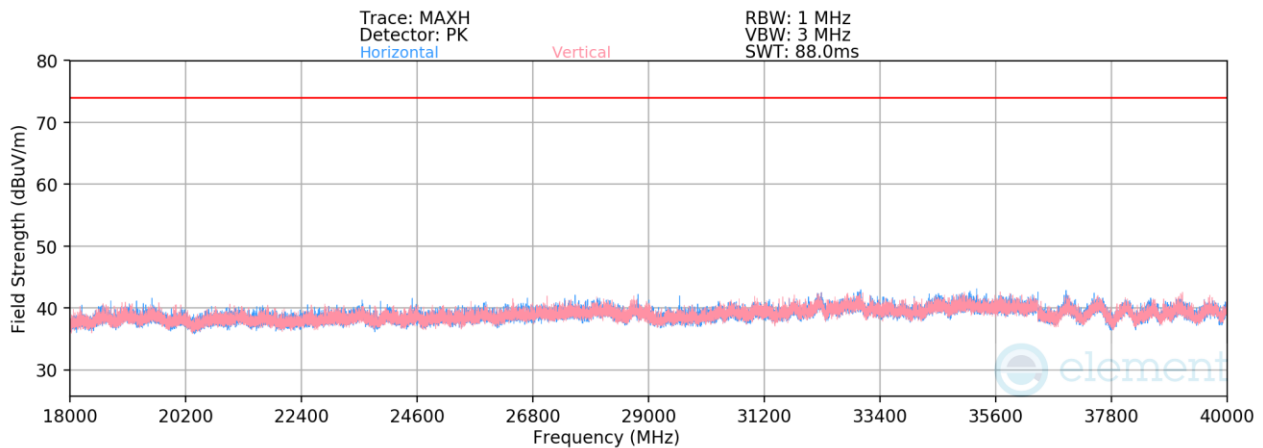

Plot 7-512. Radiated Spurious Emissions Above 18GHz (BDR GFSK ePA – 5788MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5789MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11576.00	Average	H	-	-	-83.33	16.50	0.00	40.17	53.98	-13.81
*	11576.00	Peak	H	-	-	-72.24	16.50	0.00	51.26	73.98	-22.72
	17364.00	Peak	H	-	-	-74.75	24.20	0.00	56.45	68.23	-11.78
	23152.00	Peak	H	-	-	-49.81	-7.13	-9.54	40.52	68.23	-27.71
	28940.00	Peak	H	-	-	-51.65	-3.96	-9.54	41.85	68.23	-26.38
	34728.00	Peak	V	-	-	-50.52	-4.70	-9.54	42.24	68.23	-25.99

Table 7-54. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 324 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

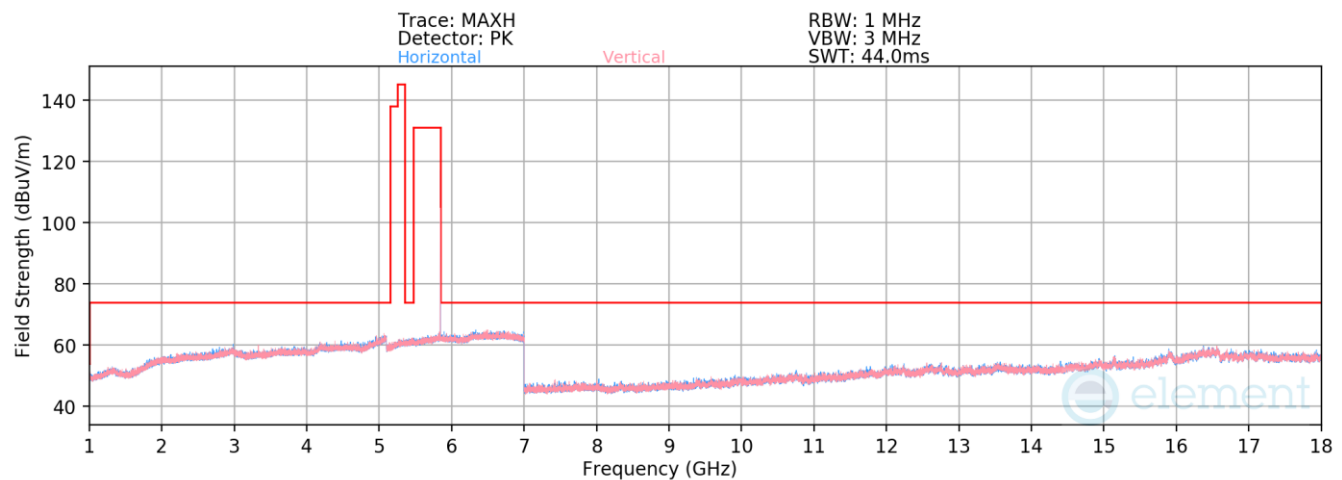

Plot 7-513. Radiated Spurious Emissions 1-18GHz TxBF Diversity (BDR GFSK ePA – 5844MHz)

Mode: BDR

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5844MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11688.00	Average	V	-	-	-84.00	17.08	40.07	53.98	-13.91
* 11688.00	Peak	V	-	-	-72.58	17.08	51.50	73.98	-22.48
17532.00	Peak	H	-	-	-72.72	23.85	58.13	68.23	-10.10

Table 7-55. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 325 of 439

V 11.0 06/2025

HDR

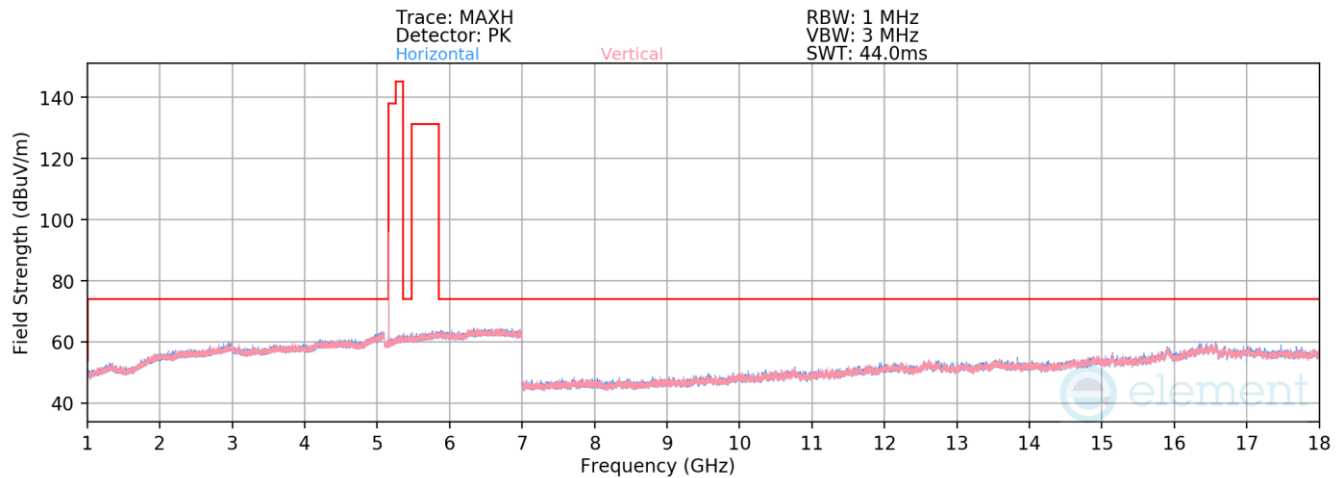

Plot 7-514. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR HDR4 ePA – 5162MHz)


Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5162MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10324.00	Peak	H	-	-	-70.36	13.92	50.56	68.23	-17.67
* 15486.00	Average	V	-	-	-86.63	22.48	42.84	53.98	-11.14
* 15486.00	Peak	V	-	-	-73.68	22.48	55.79	73.98	-18.19


Table 7-56. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 326 of 439

V 11.0 06/2025

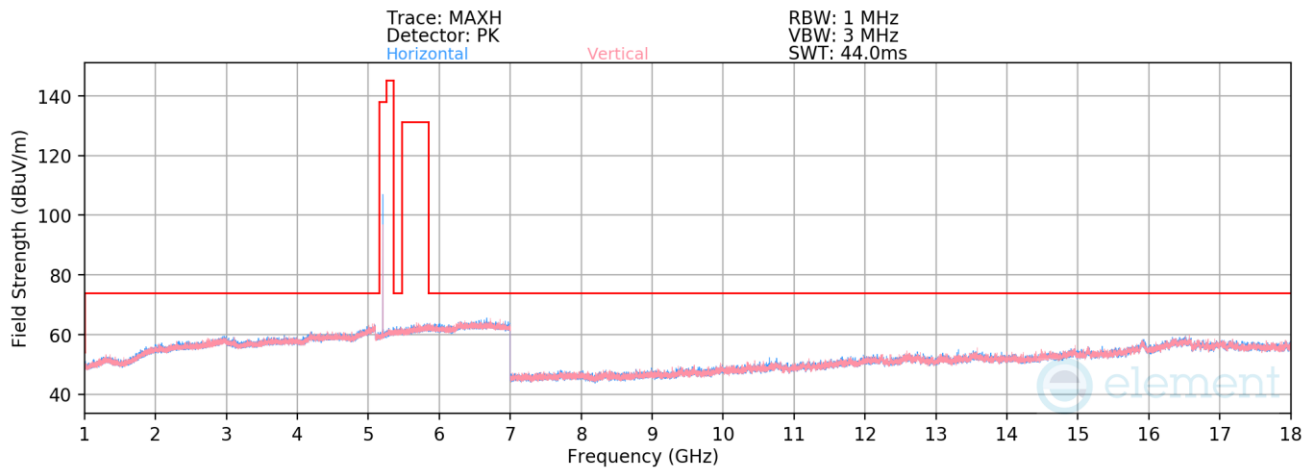

Plot 7-515. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR HDR4 ePA – 5203MHz)

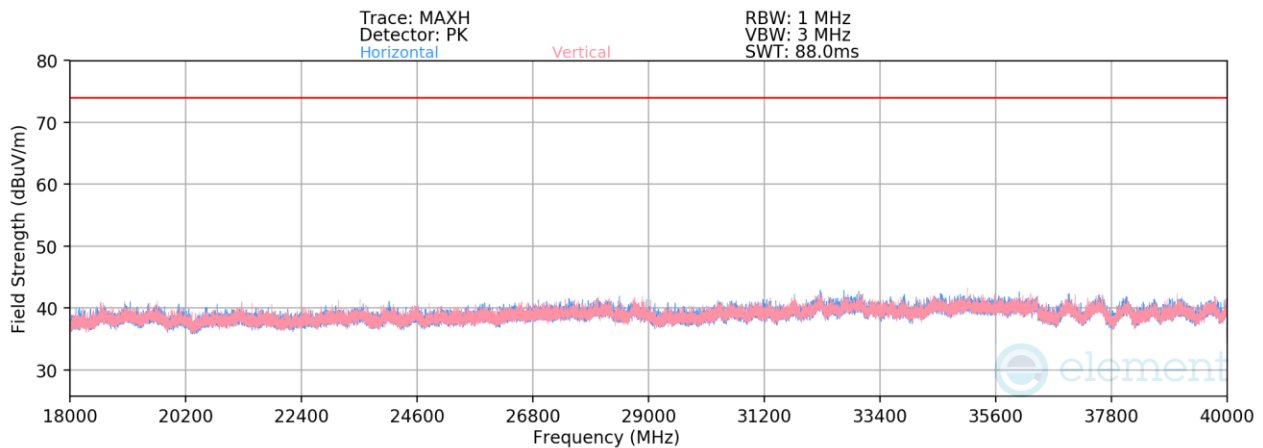

Plot 7-516. Radiated Spurious Emissions Above 18GHz (HDR HDR4 ePA – 5203MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5203MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10406.00	Peak	H	-	-	-71.75	14.74	0.00	49.99	68.23	-18.24
* 15609.00	Average	V	-	-	-85.68	22.64	0.00	43.95	53.98	-10.03
* 15609.00	Peak	V	-	-	-75.24	22.64	0.00	54.39	73.98	-19.59
* 20812.00	Average	V	-	-	-60.61	-7.57	-9.54	29.28	53.98	-24.70
* 20812.00	Peak	V	-	-	-48.88	-7.57	-9.54	41.01	73.98	-32.97
26015.00	Peak	V	-	-	-49.77	-5.83	-9.54	41.86	68.23	-26.37

Table 7-57. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 327 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

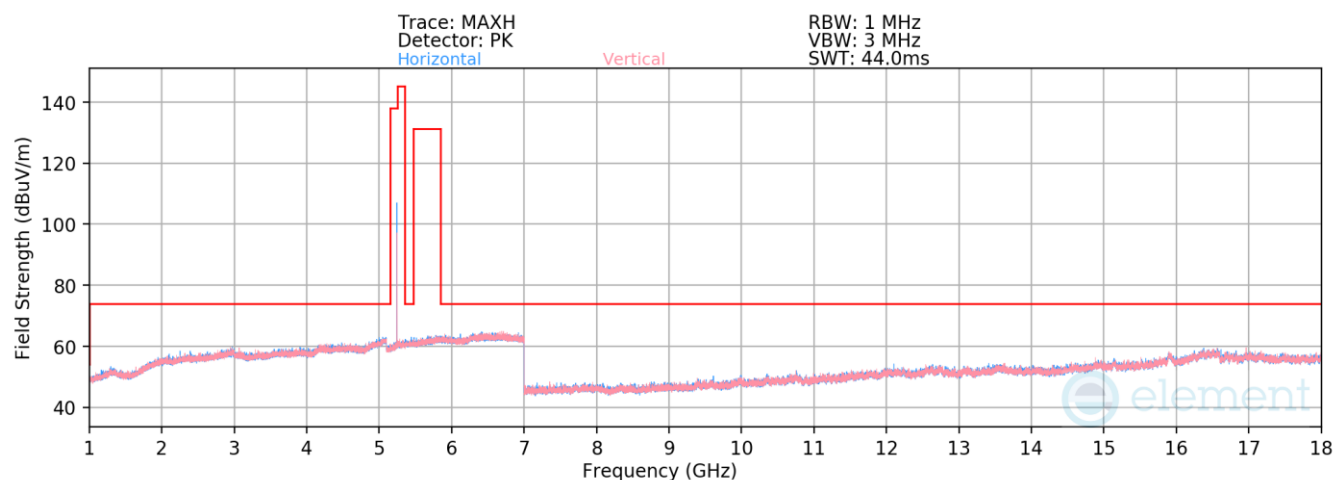

Plot 7-517. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR HDR4 ePA – 5245MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5245MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10490.00	Peak	V	-	-	-71.32	14.98	50.66	68.23	-17.57
* 15735.00	Average	V	-	-	-86.81	23.28	43.47	53.98	-10.51
* 15735.00	Peak	V	-	-	-75.18	23.28	55.10	73.98	-18.88

Table 7-58. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 328 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

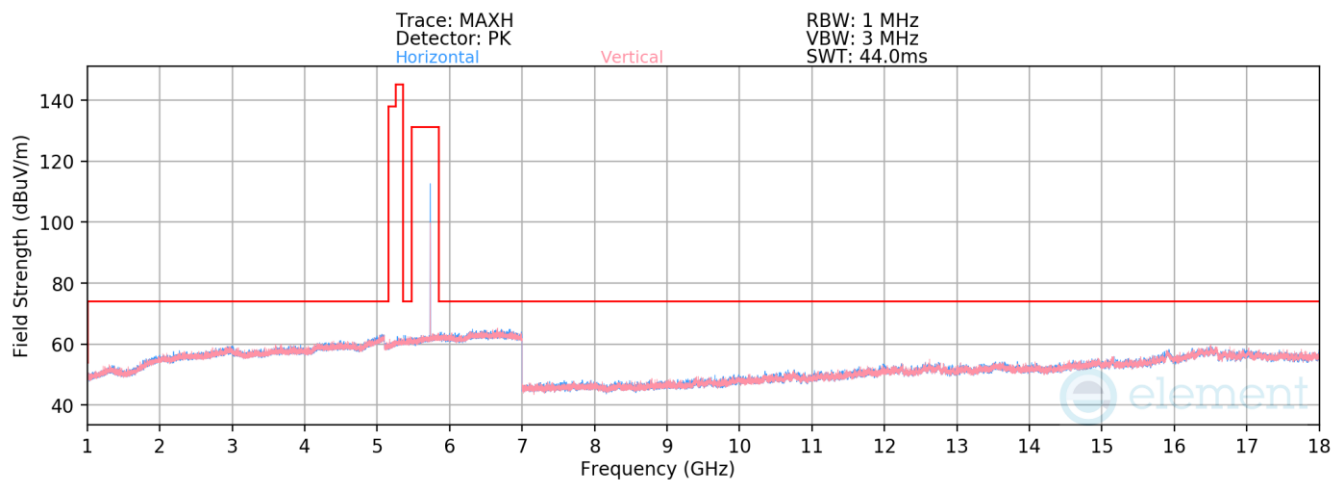

Plot 7-518. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR HDR4 ePA – 5733MHz)


Mode:	HDR4
Data Rate:	4Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5733MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11466.00	Average	V	-	-	-83.76	16.47	39.72	53.98	-14.26
* 11466.00	Peak	V	-	-	-72.29	16.47	51.19	73.98	-22.79
17199.00	Peak	V	-	-	-74.52	25.43	57.91	68.23	-10.32


Table 7-59. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 329 of 439

V 11.0 06/2025

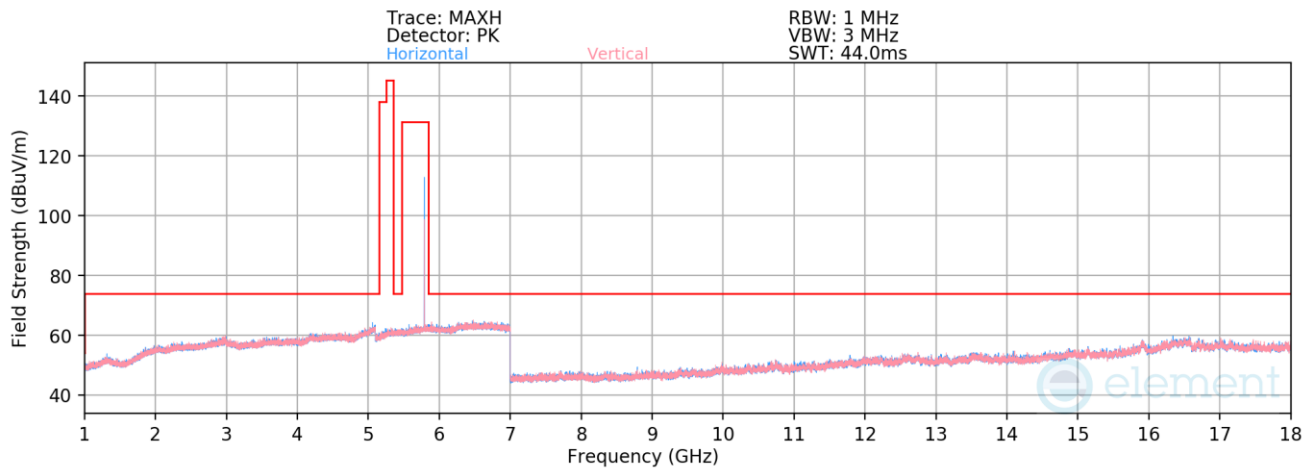

Plot 7-519. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR HDR4 ePA – 5788MHz)

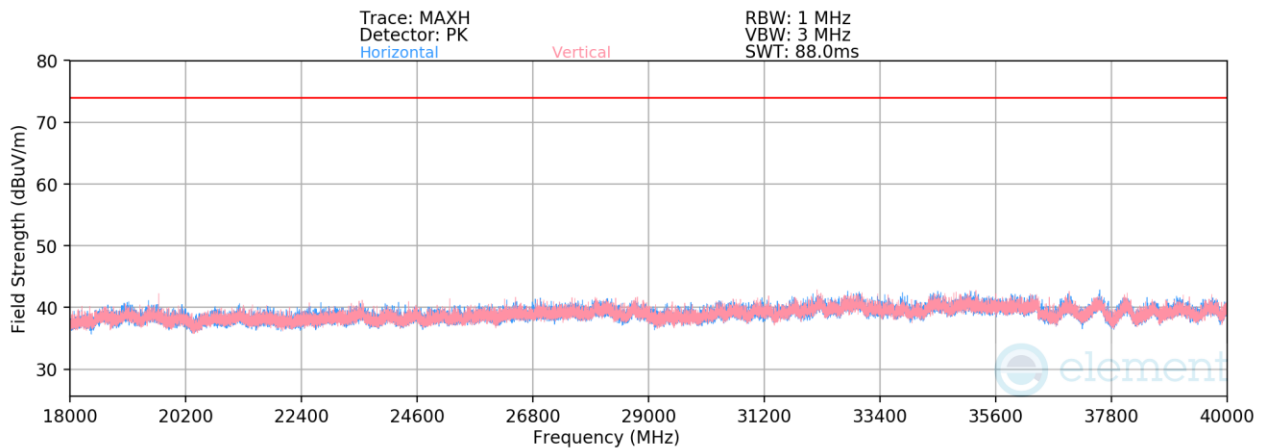

Plot 7-520. Radiated Spurious Emissions Above 18GHz (HDR HDR4 ePA – 5788MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5788MHz


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11576.00	Average	V	-	-	-84.03	17.05	0.00	40.01	53.98	-13.97
*	11576.00	Peak	V	-	-	-71.30	17.05	0.00	52.75	73.98	-21.23
	17364.00	Peak	V	-	-	-74.41	24.18	0.00	56.78	68.23	-11.45
	23152.00	Peak	V	-	-	-49.29	-7.12	-9.54	41.05	68.23	-27.18
	28940.00	Peak	H	-	-	-52.16	-3.95	-9.54	41.34	68.23	-26.89
	34728.00	Peak	V	-	-	-50.93	-4.76	-9.54	41.77	68.23	-26.46

Table 7-60. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 330 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

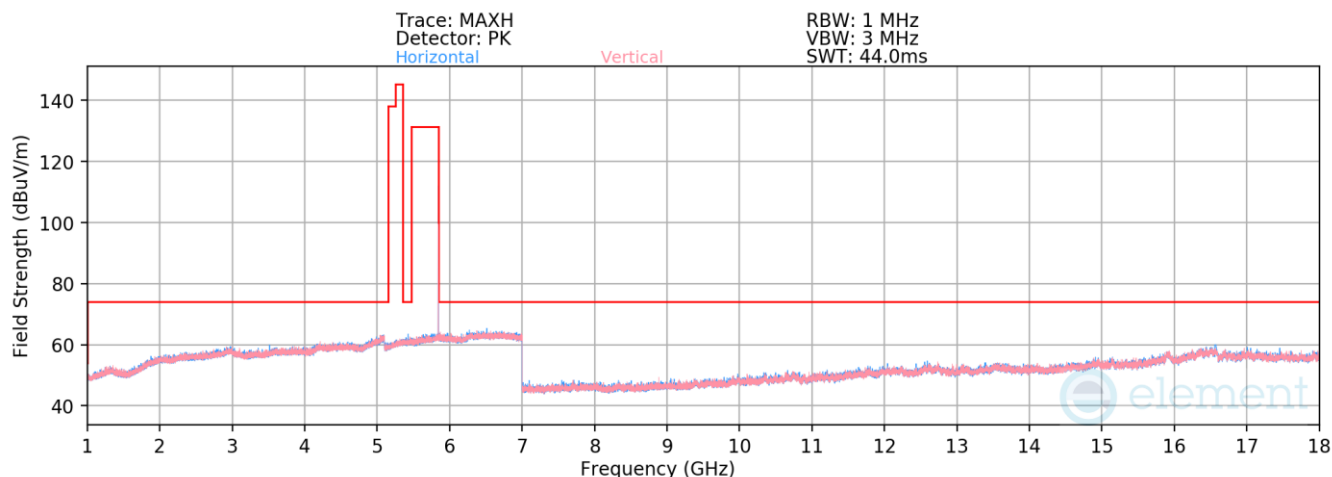

Plot 7-521. Radiated Spurious Emissions 1-18GHz TxBF Diversity (HDR HDR4 ePA – 5844MHz)

Mode: HDR4

Data Rate: 4Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5844MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11688.00	Average	V	-	-	-83.57	16.72	40.14	53.98	-13.84
* 11688.00	Peak	V	-	-	-72.44	16.72	51.28	73.98	-22.70
17532.00	Peak	H	-	-	-73.98	24.92	57.95	68.23	-10.28


Table 7-61. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 331 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

LE

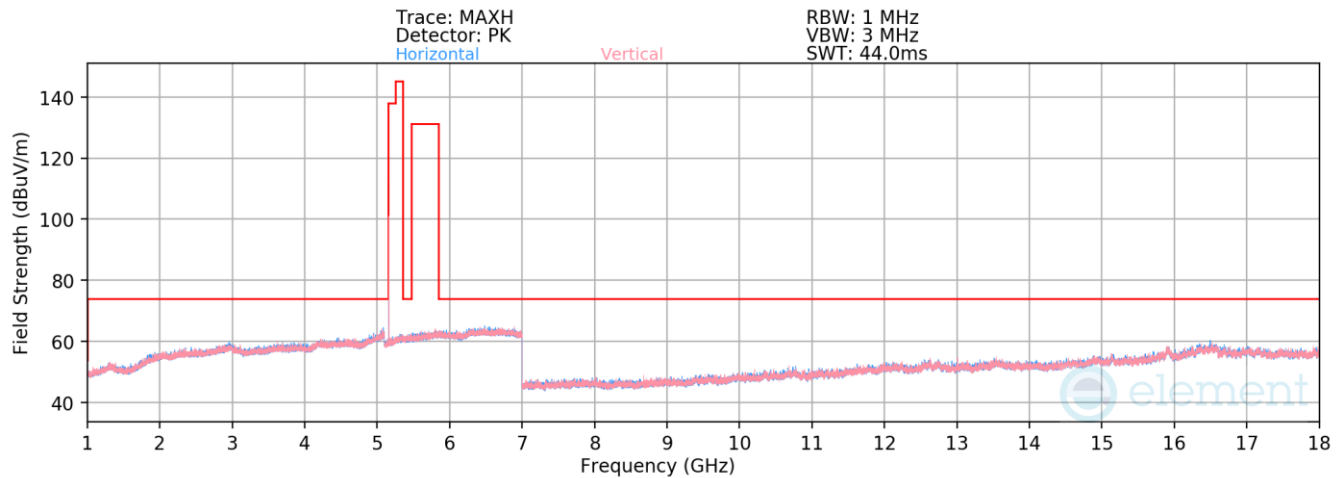

Plot 7-522. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 5162MHz)

Mode:	LE1M
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5162MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10324.00	Peak	H	247	224	-70.43	13.92	50.49	68.23	-17.74
* 15486.00	Average	H	-	-	-86.64	22.48	42.84	53.98	-11.14
* 15486.00	Peak	H	-	-	-75.16	22.48	54.31	73.98	-19.67

Table 7-62. Radiated Spurious Emissions Measurements TxBF Diversity


FCC ID: BCGA3462	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 332 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

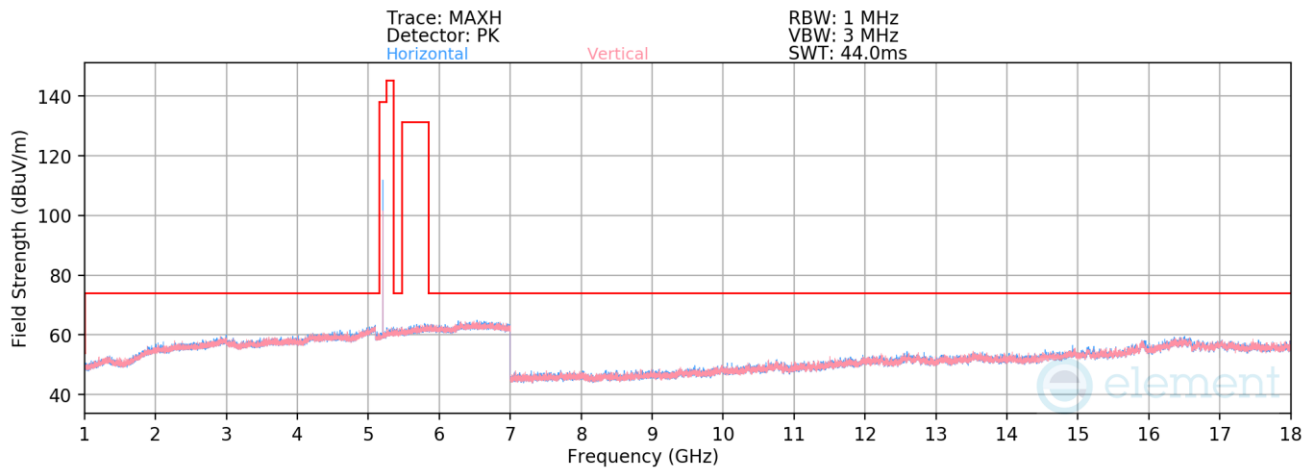

Plot 7-523. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 5203MHz)

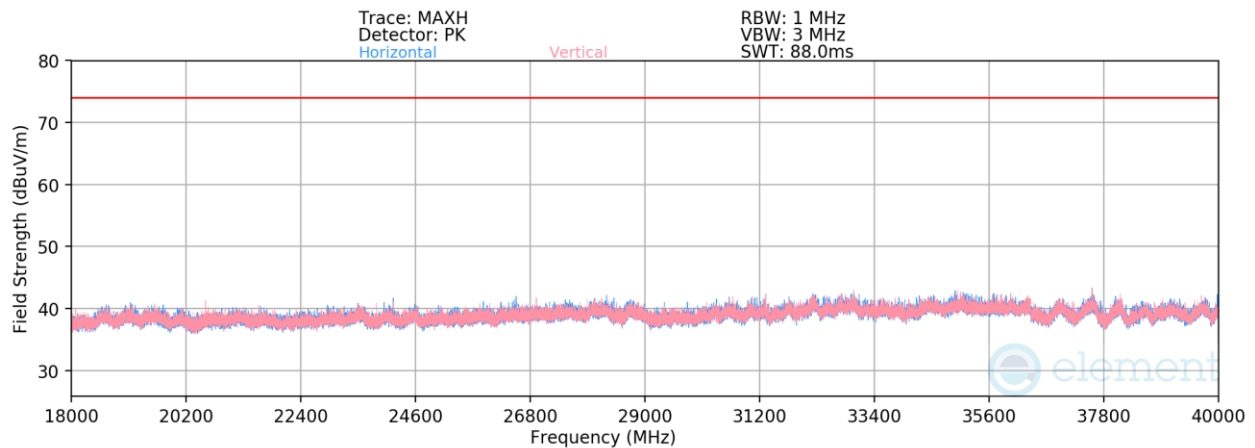

Plot 7-524. Radiated Spurious Emissions Above 18GHz (LE1M ePA – 5203MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5203MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10406.00	Peak	H	290	203	-70.18	14.30	0.00	51.12	68.23	-17.11
* 15609.00	Average	V	-	-	-85.90	22.18	0.00	43.28	53.98	-10.70
* 15609.00	Peak	V	-	-	-74.60	22.18	0.00	54.58	73.98	-19.40
* 20812.00	Average	H	-	-	-60.74	-7.67	-9.54	29.05	53.98	-24.93
* 20812.00	Peak	H	-	-	-49.32	-7.67	-9.54	40.47	73.98	-33.51
26015.00	Peak	H	-	-	-50.20	-5.83	-9.54	41.43	68.23	-26.80

Table 7-63. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 333 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

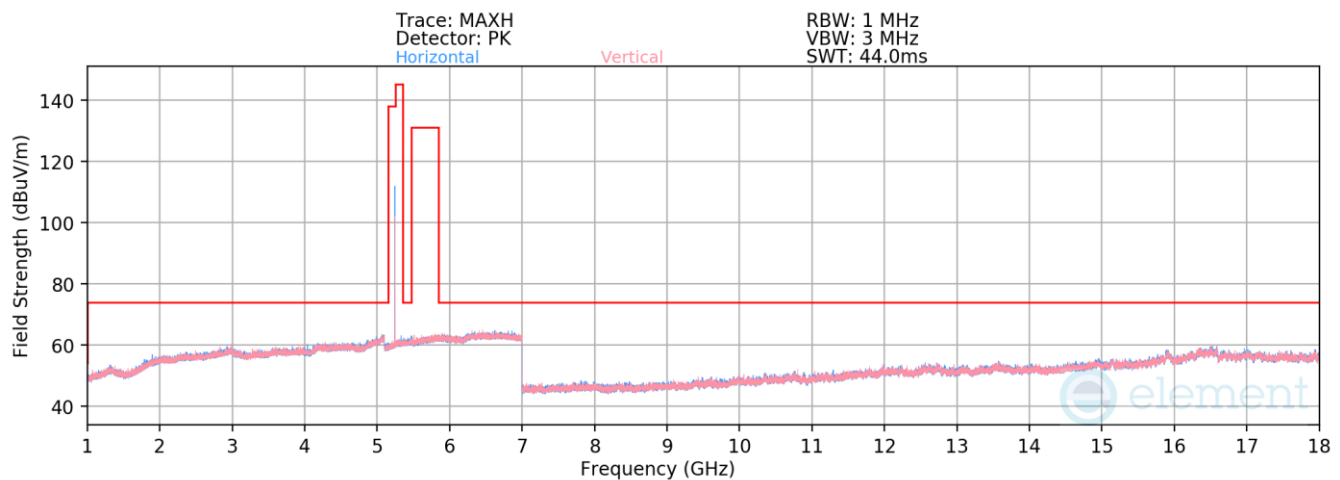

Plot 7-525. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 5245MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10490.00	Peak	H	-	-	-71.55	15.15	50.60	68.23	-17.63
* 15735.00	Average	V	-	-	-85.94	23.53	44.60	53.98	-9.38
* 15735.00	Peak	V	-	-	-75.48	23.53	55.05	73.98	-18.93

Table 7-64. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 334 of 439

V 11.0 06/2025

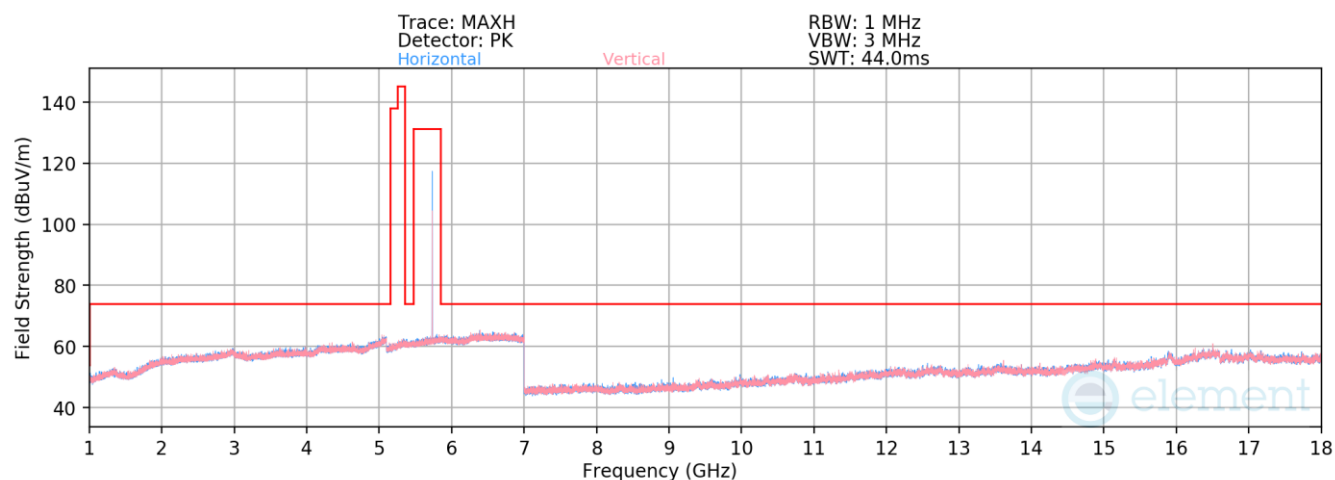

Plot 7-526. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 5733MHz)


Mode:	LE1M
Data Rate:	1Mbps
Power Scheme:	ePA
Distance of Measurements:	3 Meters
Operating Frequency:	5733MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11466.00	Average	V	-	-	-83.71	16.65	39.94	53.98	-14.04
*	11466.00	Peak	V	-	-	-72.68	16.65	50.97	73.98	-23.01
	17199.00	Peak	H	-	-	-74.60	25.43	57.83	68.23	-10.40


Table 7-65. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 335 of 439

V 11.0 06/2025

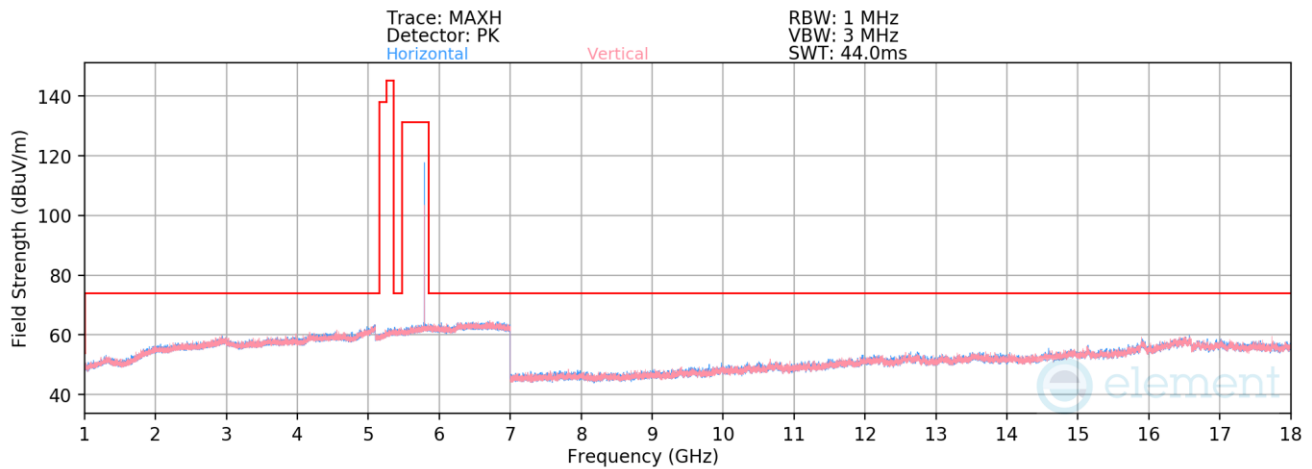

Plot 7-527. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 5788MHz)

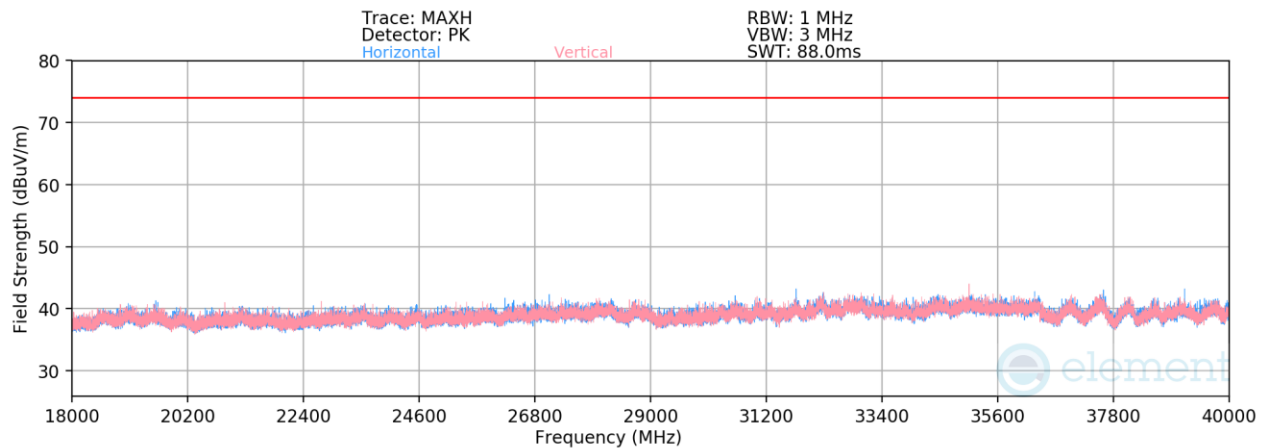

Plot 7-528. Radiated Spurious Emissions Above 18GHz (LE1M ePA – 5788MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters


Operating Frequency: 5788MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11576.00	Average	V	-	-	-83.45	17.10	0.00	40.64	53.98	-13.34
*	11576.00	Peak	V	-	-	-72.94	17.10	0.00	51.16	73.98	-22.82
	17364.00	Peak	H	-	-	-74.48	24.18	0.00	56.70	68.23	-11.53
	23152.00	Peak	V	-	-	-49.53	-7.12	-9.54	40.82	68.23	-27.41
	28940.00	Peak	H	-	-	-51.42	-3.99	-9.54	42.05	68.23	-26.18
	34728.00	Peak	V	-	-	-50.75	-4.70	-9.54	42.01	68.23	-26.22

Table 7-66. Radiated Spurious Emissions Measurements TxBF Diversity

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 336 of 439

V 11.0 06/2025

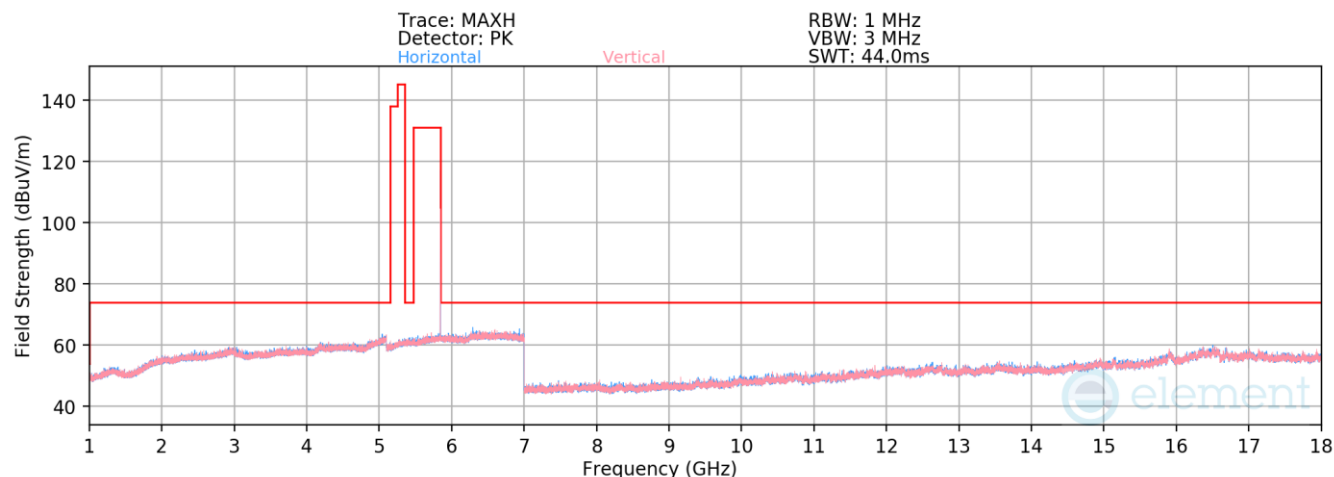

Plot 7-529. Radiated Spurious Emissions 1-18GHz TxBF Diversity (LE1M ePA – 5844MHz)

Mode: LE1M

Data Rate: 1Mbps

Power Scheme: ePA

Distance of Measurements: 3 Meters

Operating Frequency: 5844MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11688.00	Average	H	-	-	-83.91	17.19	40.28	53.98	-13.70
* 11688.00	Peak	H	-	-	-72.52	17.19	51.67	73.98	-22.31
17532.00	Peak	H	-	-	-73.92	24.92	58.01	68.23	-10.22

Table 7-67. Radiated Spurious Emissions Measurements TxBF Diversity


FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 337 of 439

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.6.3 Antenna 5T Radiated Band Edge Measurements (U-NII-1)

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	5162MHz

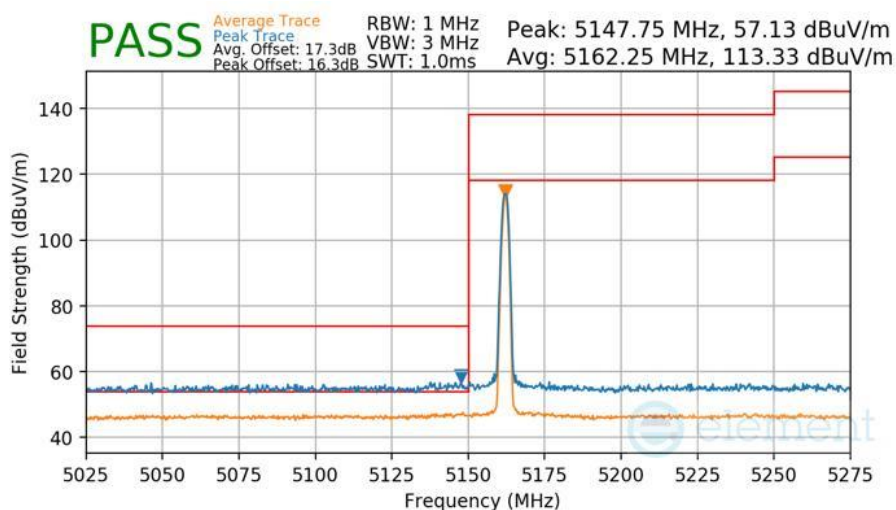

Plot 7-530 Radiated Lower Band Edge Measurement Antenna 5T

Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	5162MHz

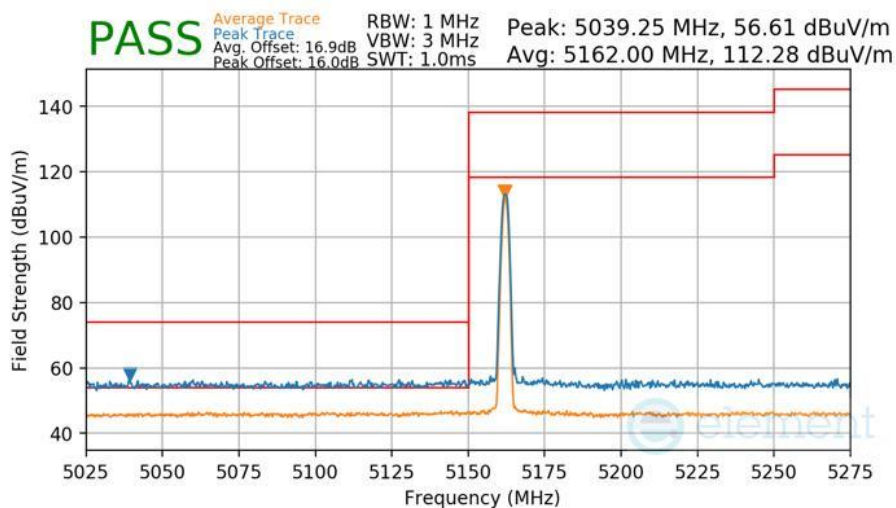


Plot 7-531 Radiated Lower Band Edge Measurement Antenna 5T

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 338 of 439


V 11.0 06/2025

Mode LE2M
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

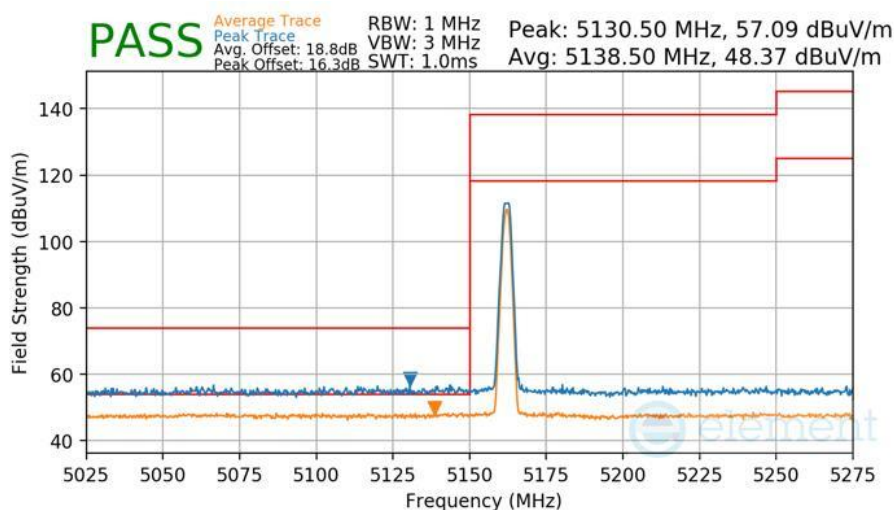

Plot 7-532 Radiated Lower Band Edge Measurement Antenna 5T

Mode HDR4
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

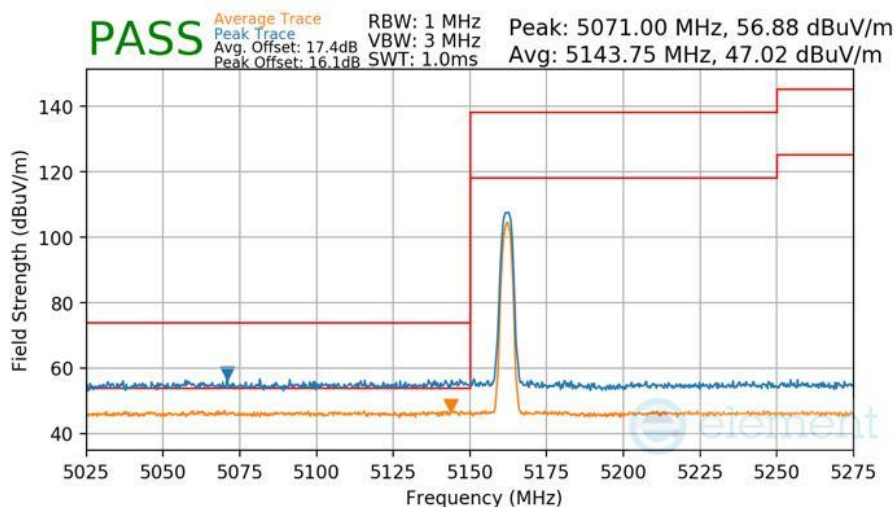


Plot 7-533 Radiated Lower Band Edge Measurement Antenna 5T

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 339 of 439


V 11.0 06/2025

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

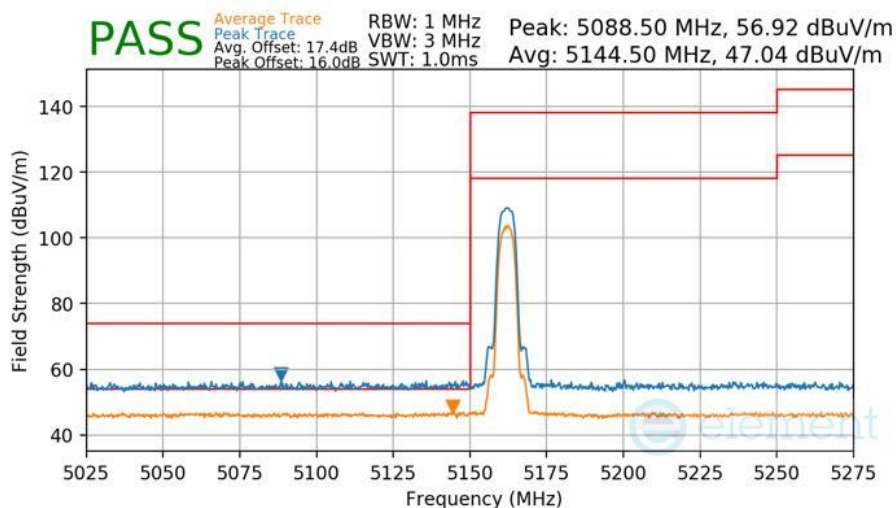

Plot 7-534 Radiated Lower Band Edge Measurement Antenna 5T

Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

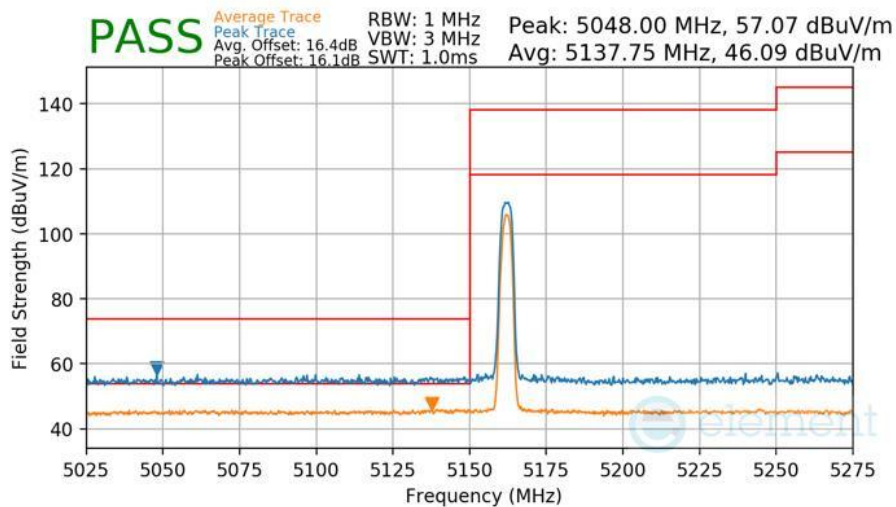


Plot 7-535 Radiated Lower Band Edge Measurement Antenna 5T

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 340 of 439

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode XHDRPM8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

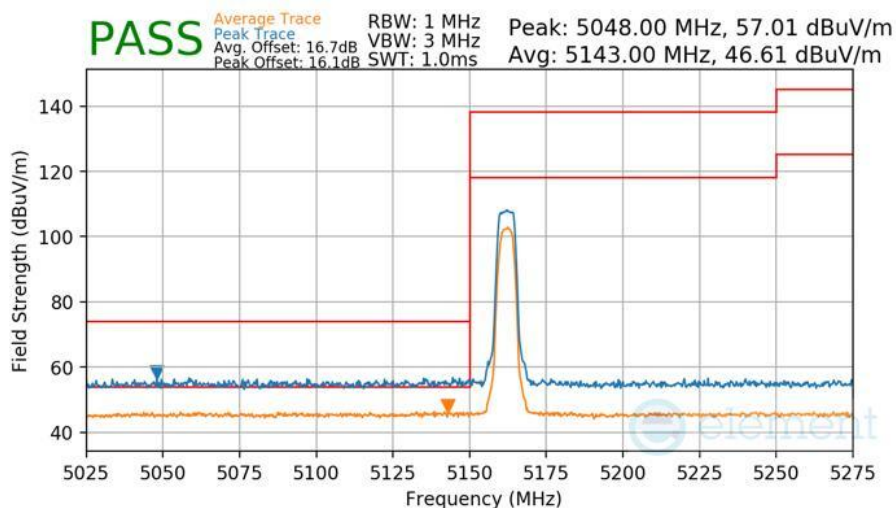

Plot 7-536 Radiated Lower Band Edge Measurement Antenna 5T

Mode XHDRPM16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

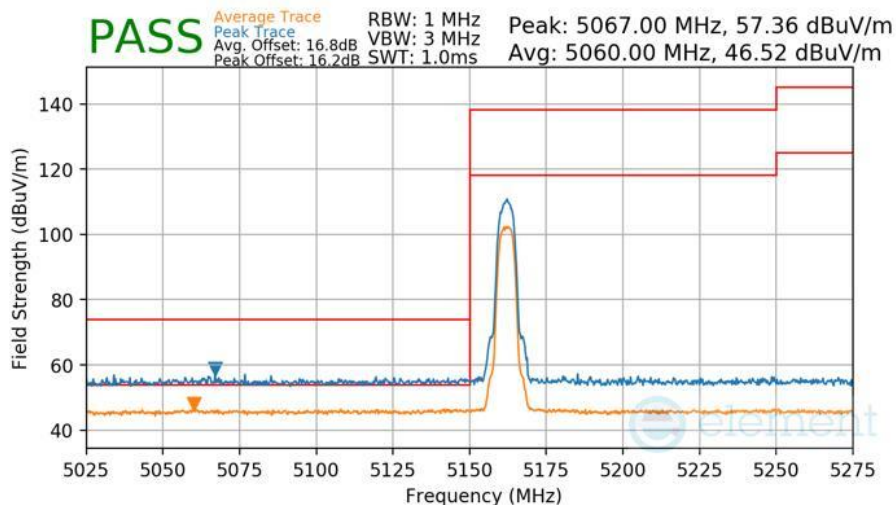


Plot 7-537 Radiated Lower Band Edge Measurement Antenna 5T

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 341 of 439


V 11.0 06/2025

Mode XHDRPL16
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5164MHz

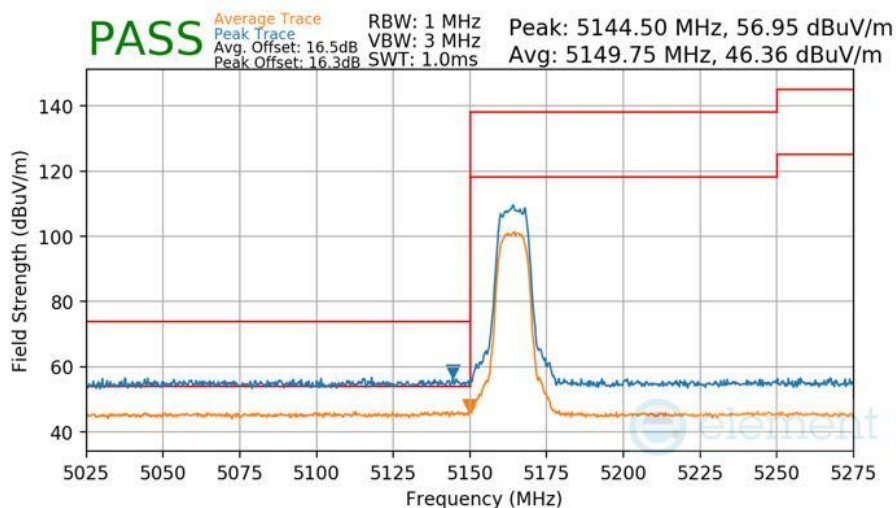

Plot 7-538 Radiated Lower Band Edge Measurement Antenna 5T

Mode XHDRPL32
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5164MHz

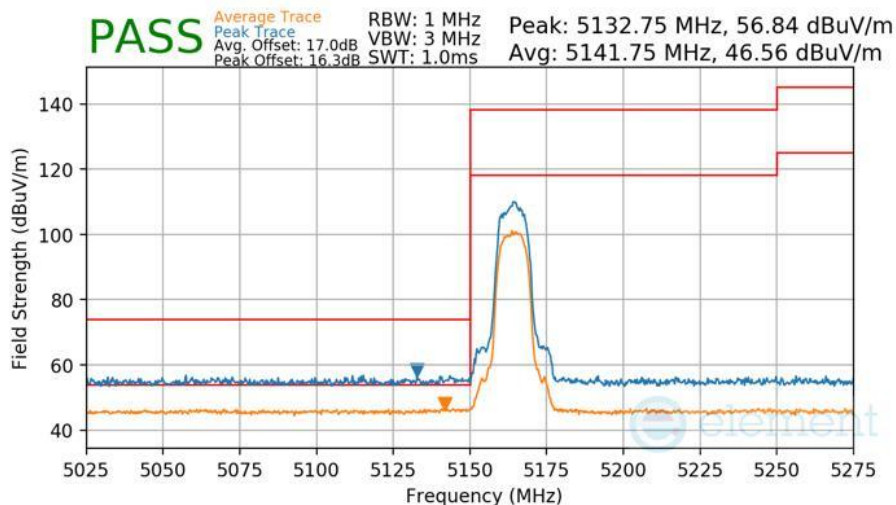


Plot 7-539 Radiated Lower Band Edge Measurement Antenna 5T

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 342 of 439


V 11.0 06/2025

Mode HDT2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

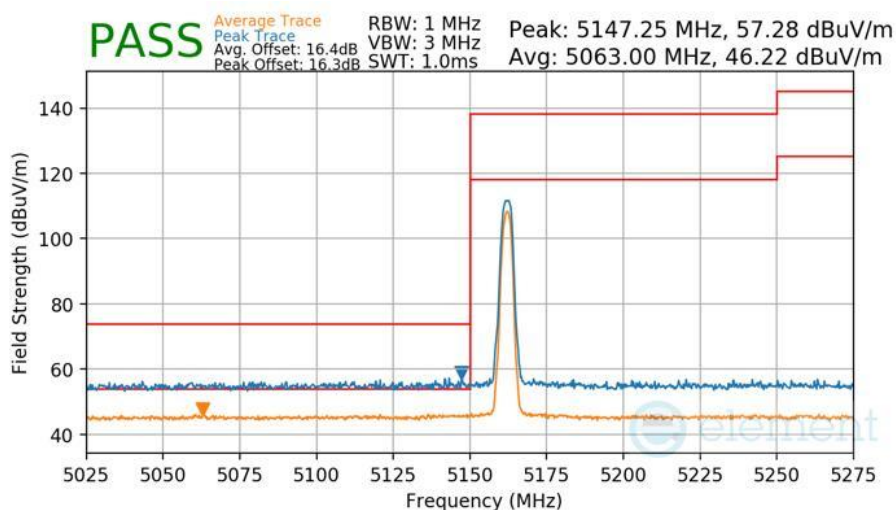

Plot 7-540 Radiated Lower Band Edge Measurement Antenna 5T

Mode HDT8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5162MHz

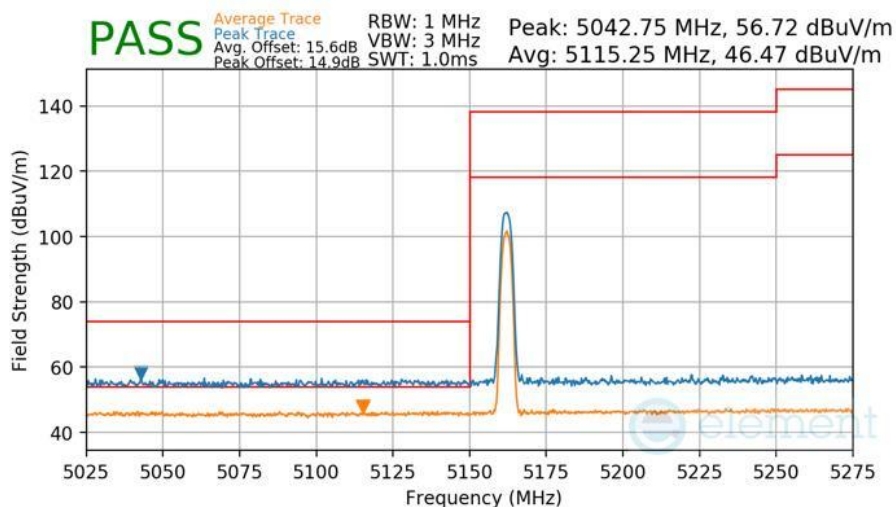


Plot 7-541 Radiated Lower Band Edge Measurement Antenna 5T

FCC ID: BCGA3462	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 343 of 439

V 11.0 06/2025


7.6.4 Antenna 5T Radiated Band Edge Measurements (U-NII-3)

Mode	BDR
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	5733MHz

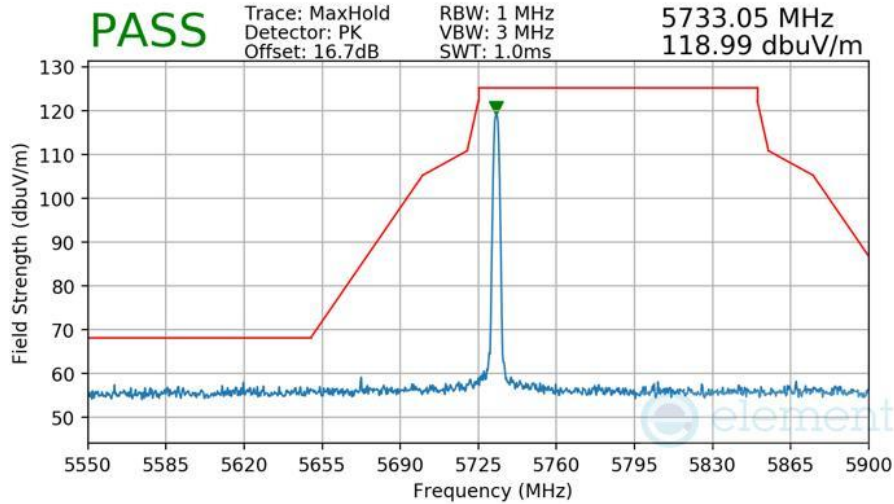

Plot 7-542 Radiated Lower Band Edge Measurement Antenna 5T

Mode	LE1M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	5733MHz

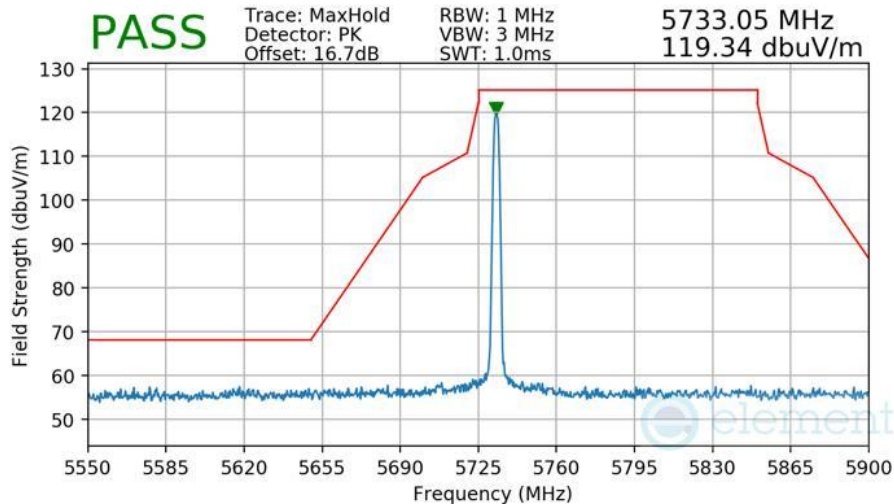


Plot 7-543 Radiated Lower Band Edge Measurement Antenna 5T

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 344 of 439


V 11.0 06/2025

Mode	LE2M
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	5733MHz

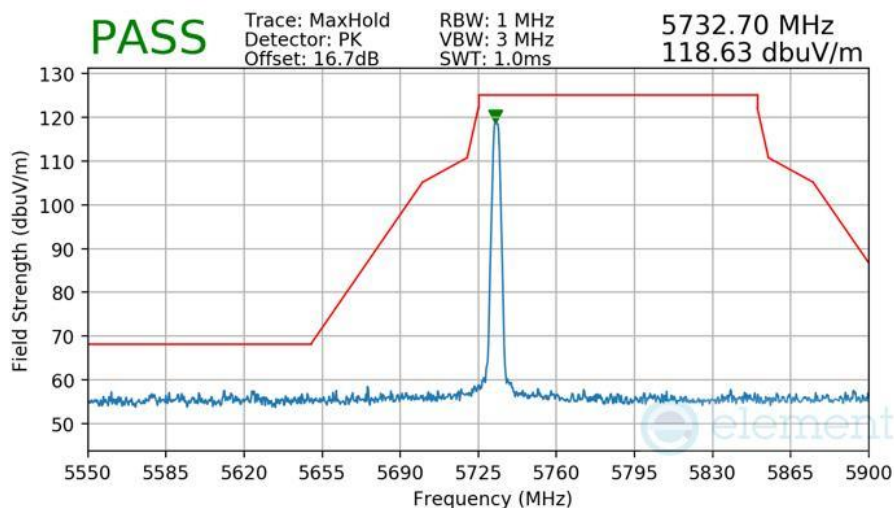

Plot 7-544 Radiated Lower Band Edge Measurement Antenna 5T

Mode	HDR4
Power Scheme	ePA
Distance of Measurement	3 Meters
Operating Frequency	5733MHz

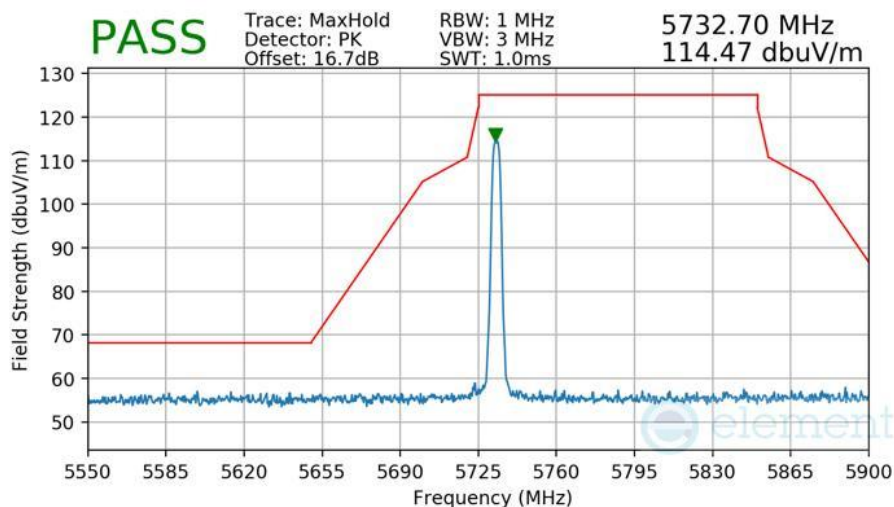


Plot 7-545 Radiated Lower Band Edge Measurement Antenna 5T

FCC ID: BCGA3462	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device	Page 345 of 439

V 11.0 06/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode HDR8
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733MHz

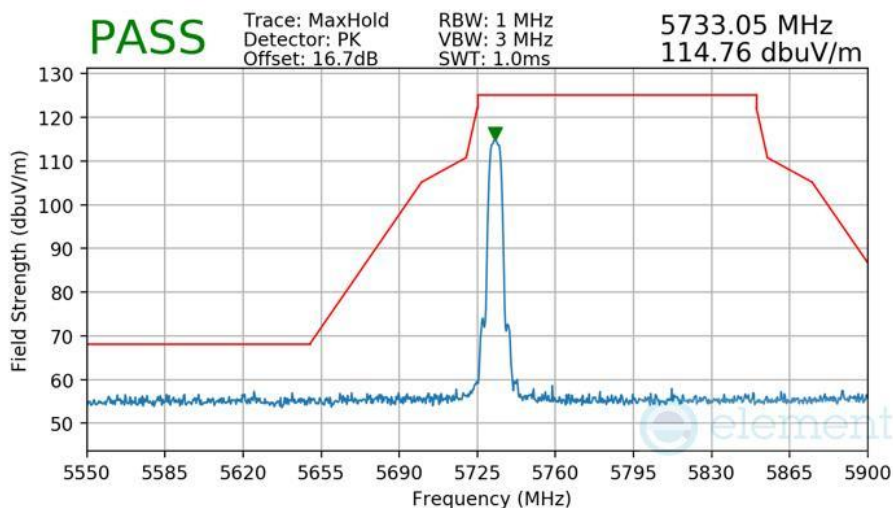

Plot 7-546 Radiated Lower Band Edge Measurement Antenna 5T

Mode XHDRPS2
Power Scheme ePA
Distance of Measurement 3 Meters
Operating Frequency 5733MHz

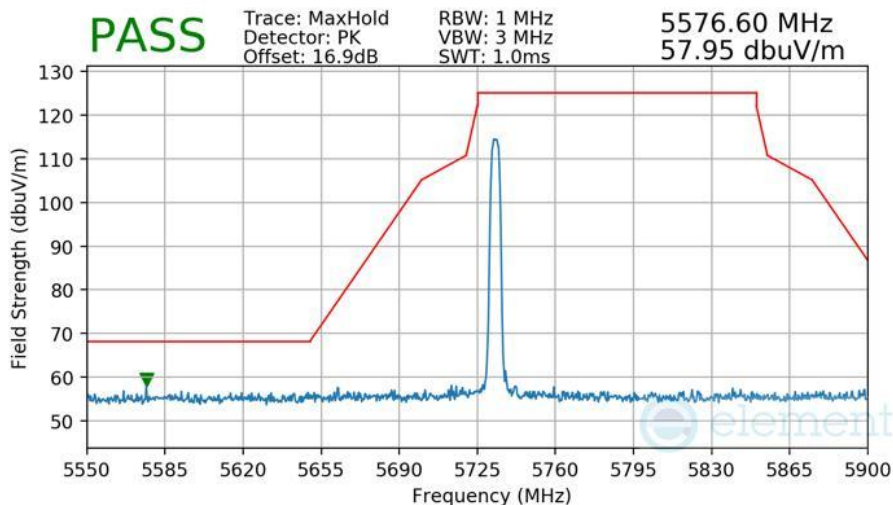

Plot 7-547 Radiated Lower Band Edge Measurement Antenna 5T

FCC ID: BCGA3462		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2509100082-19-R1.BCG	Test Dates: 9/15/2025 - 12/22/2025	EUT Type: Tablet Device		Page 346 of 439

V 11.0 06/2025