



## Contention-Based Protocol Timing Plots

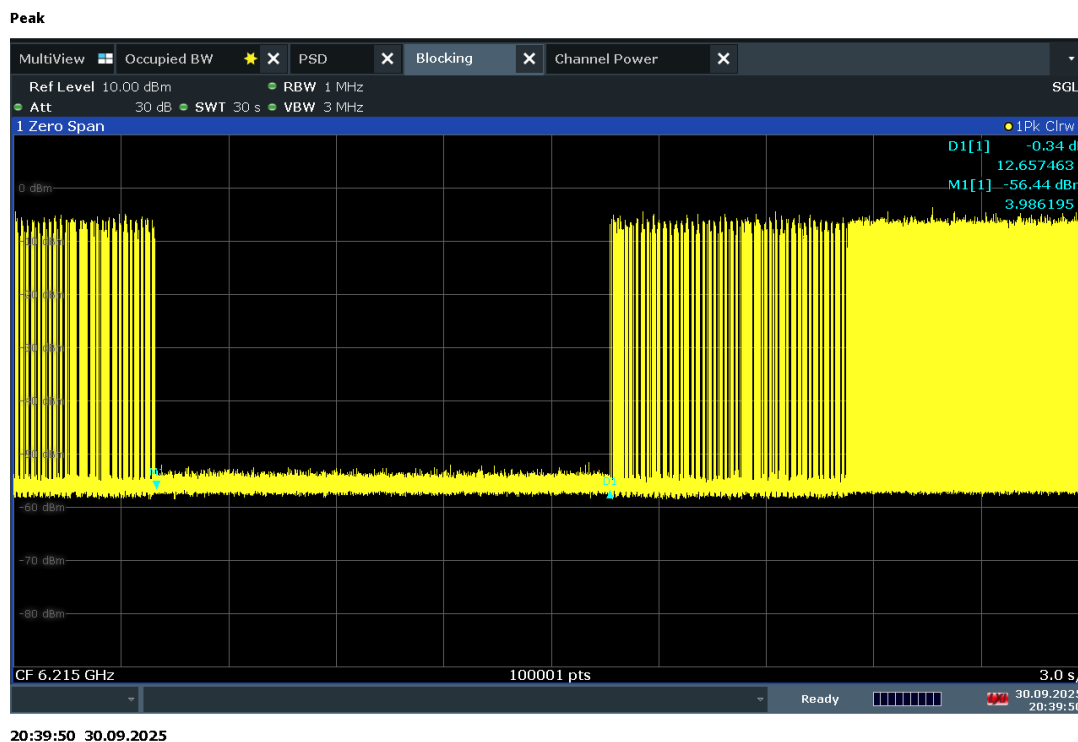

Plot 7-509. Contention Based Protocol Timing Plot – UNII 5 – 20MHz Channel 53

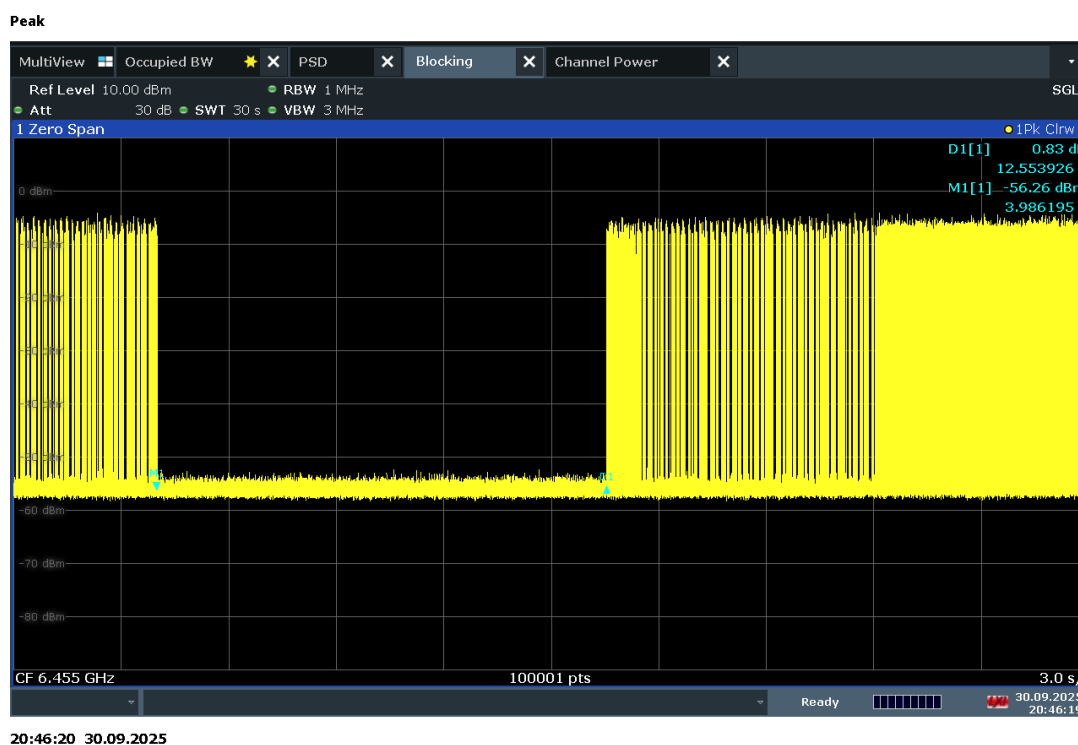


Plot 7-510. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – Low

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 170 of 265                   |

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


Peak

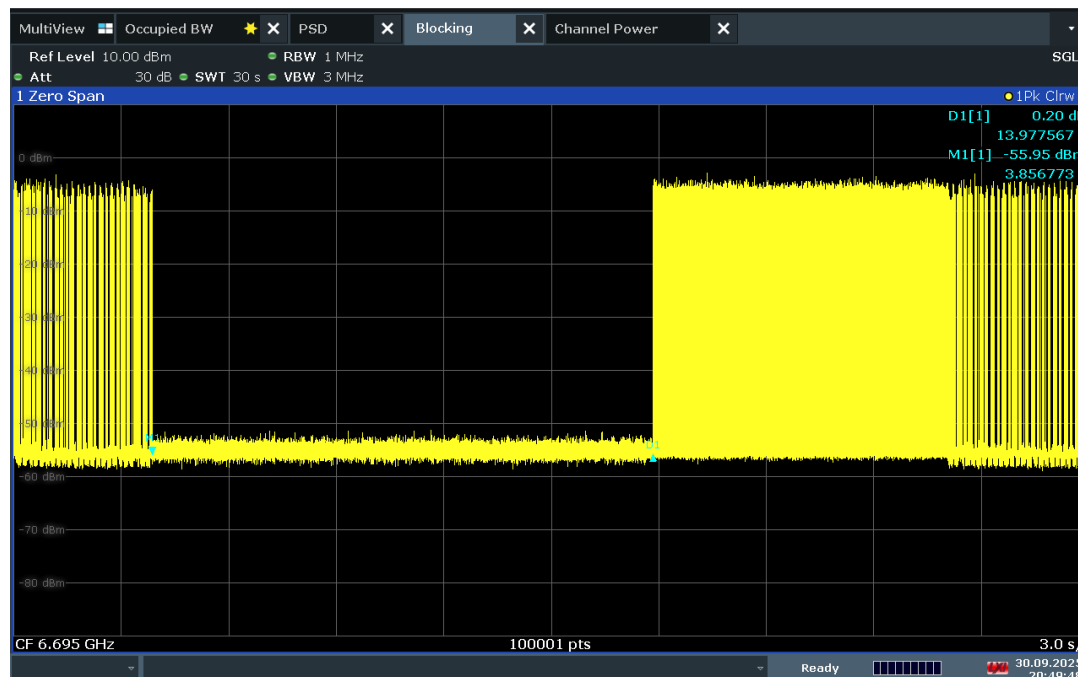

20:49:49 30.09.2025

Plot 7-511. Contention Based Protocol Timing Plot –UNII 5 – 160MHz Channel 47 – Mid

Peak

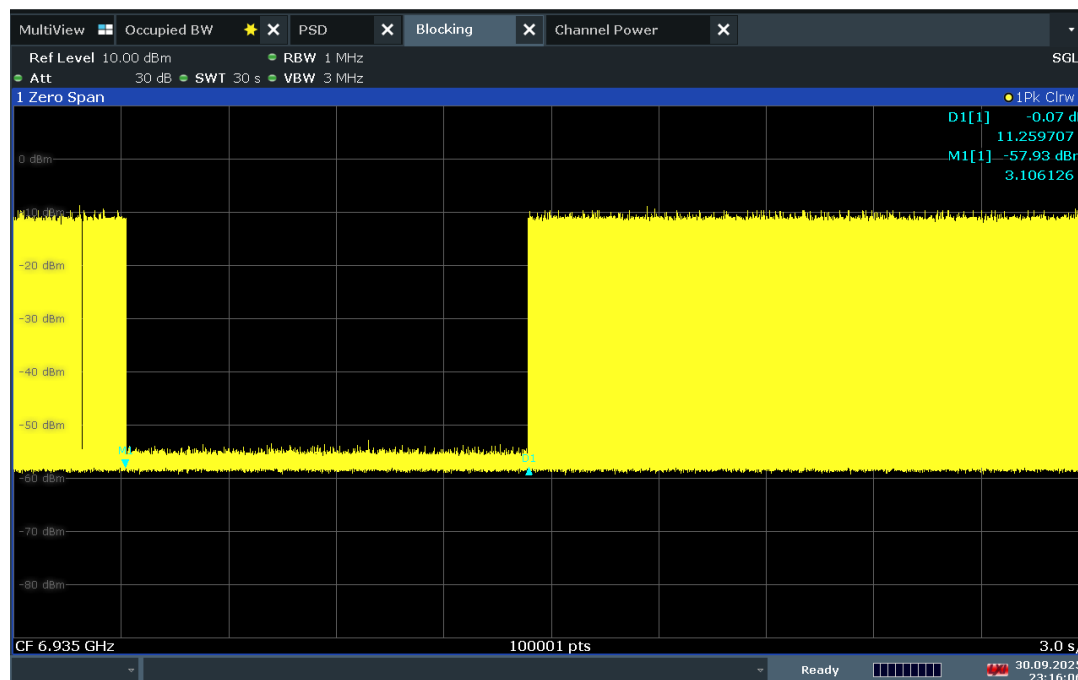


23:16:06 30.09.2025

Plot 7-512. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – High

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 171 of 265                   |


V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

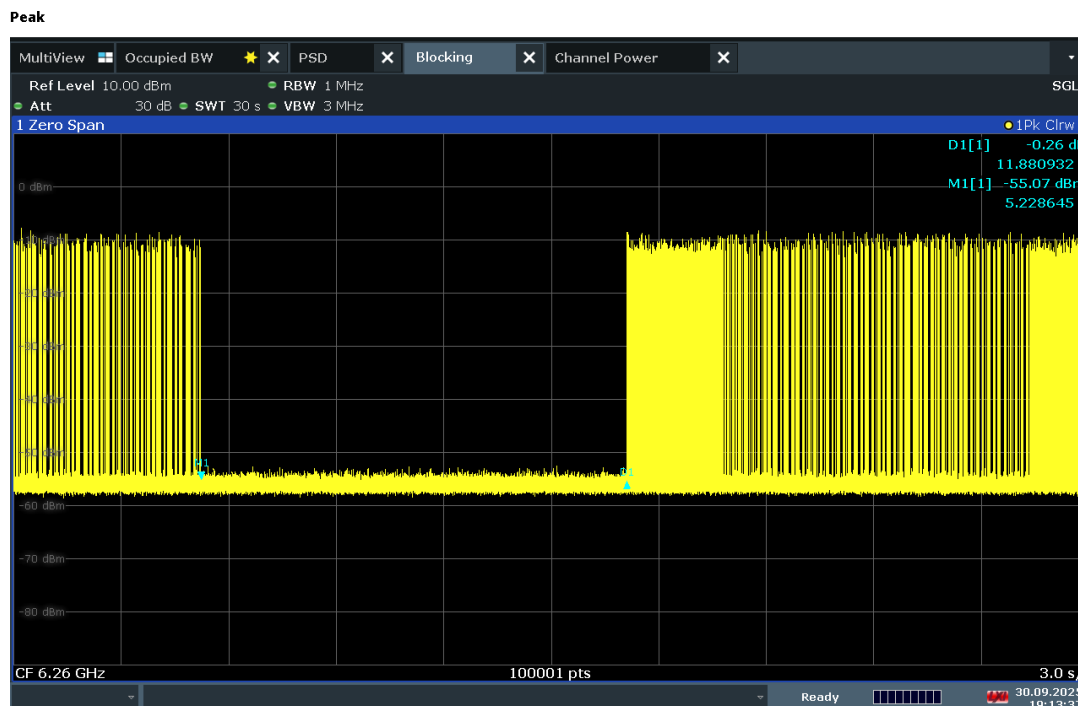

19:13:38 30.09.2025

Plot 7-513. Contention Based Protocol Timing Plot – UNII 6 – 20MHz Channel 101

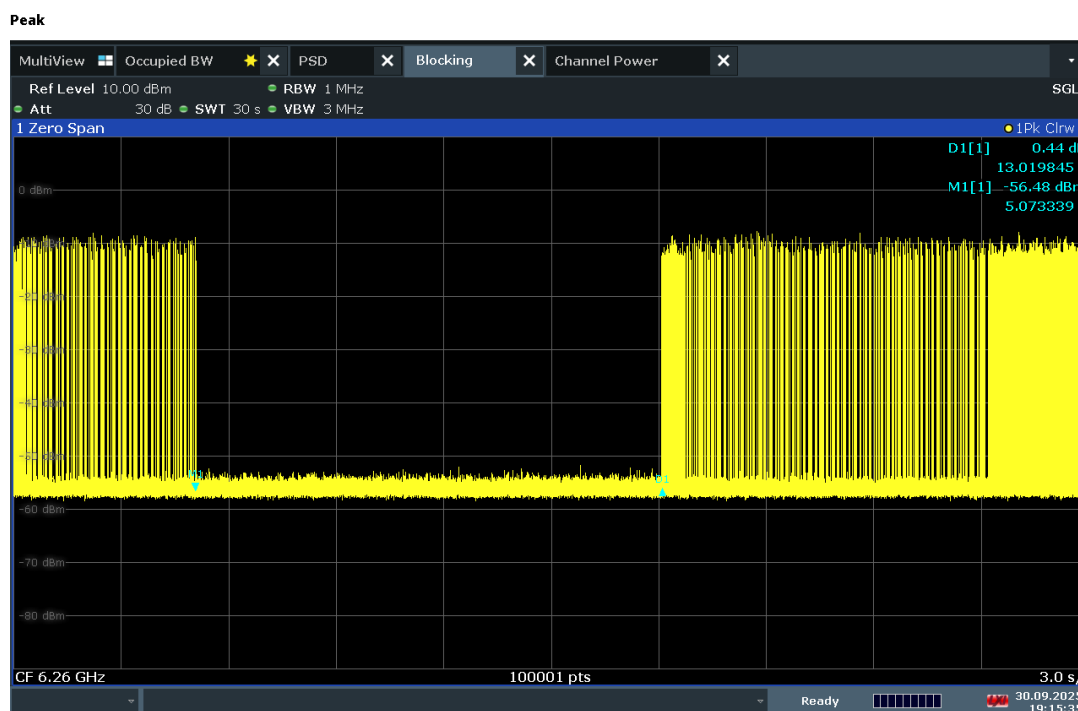

19:15:35 30.09.2025


Plot 7-514. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Channel 111 – Low

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 172 of 265                   |

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


Peak

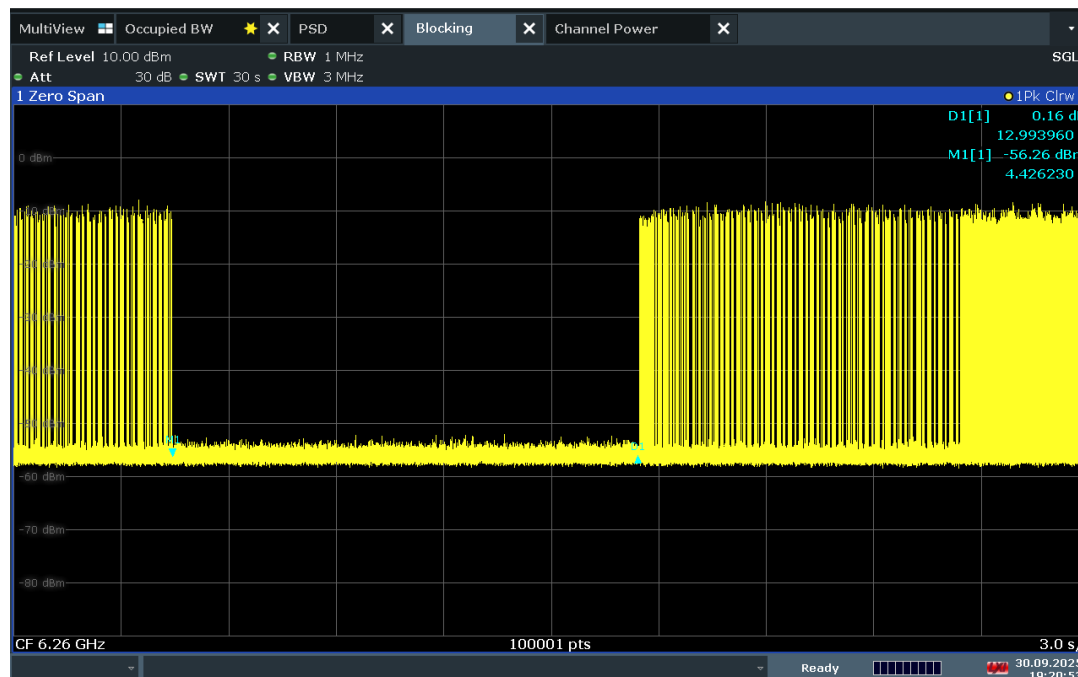

19:20:53 30.09.2025

Plot 7-515. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Channel 111 – Mid

Peak

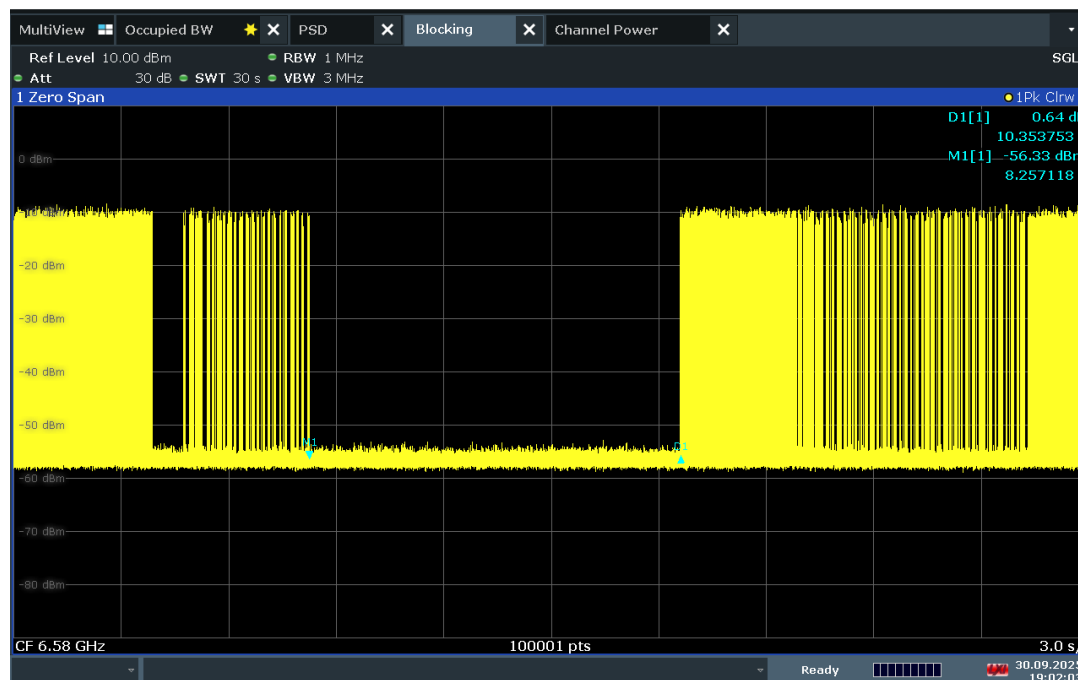

19:02:03 30.09.2025


Plot 7-516. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Channel 111 – High

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 173 of 265                   |

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


Peak

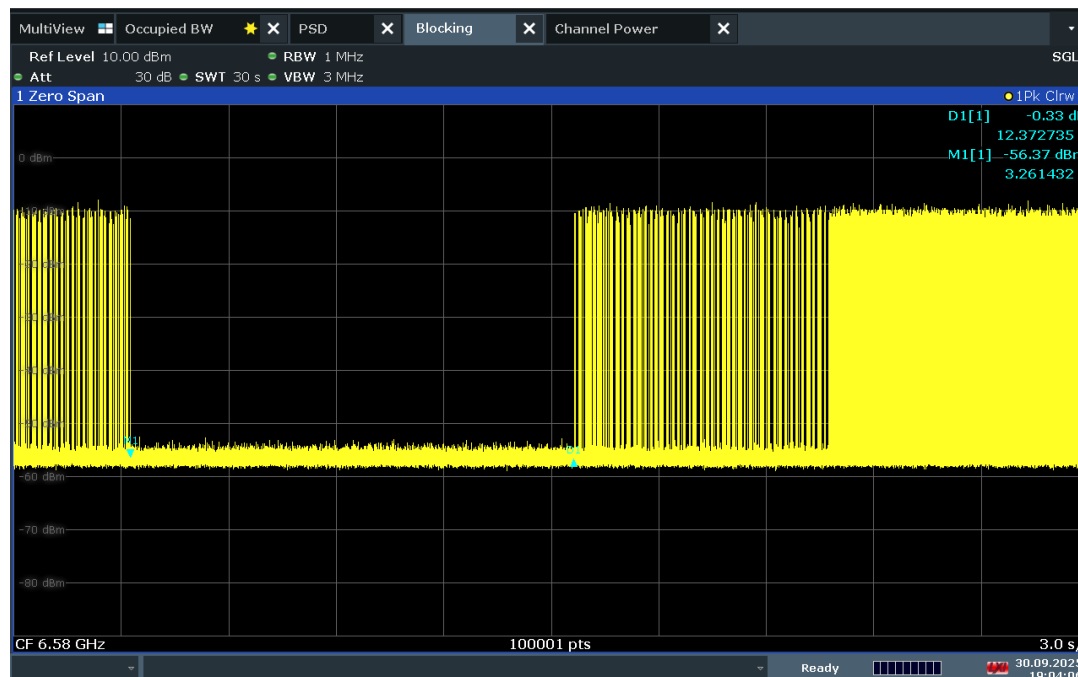

19:04:07 30.09.2025

Plot 7-517. Contention Based Protocol Timing Plot – UNII 7 – 20MHz Channel 149

Peak

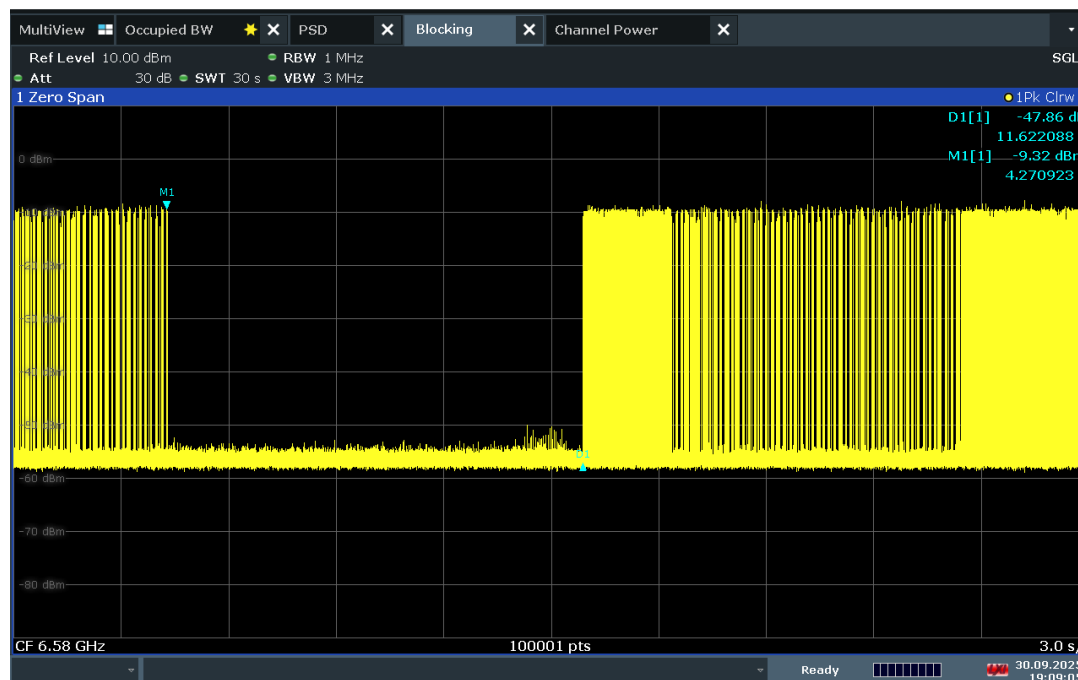

19:09:05 30.09.2025


Plot 7-518. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – Low

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 174 of 265                   |

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


Peak

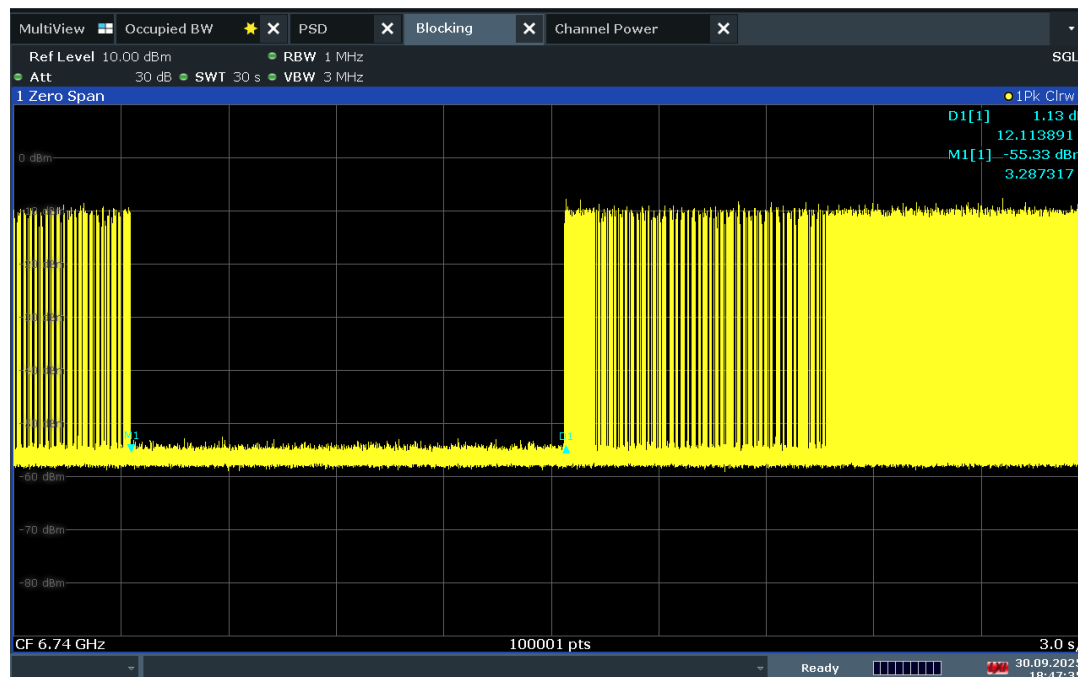

18:47:36 30.09.2025

Plot 7-519. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – Mid

Peak

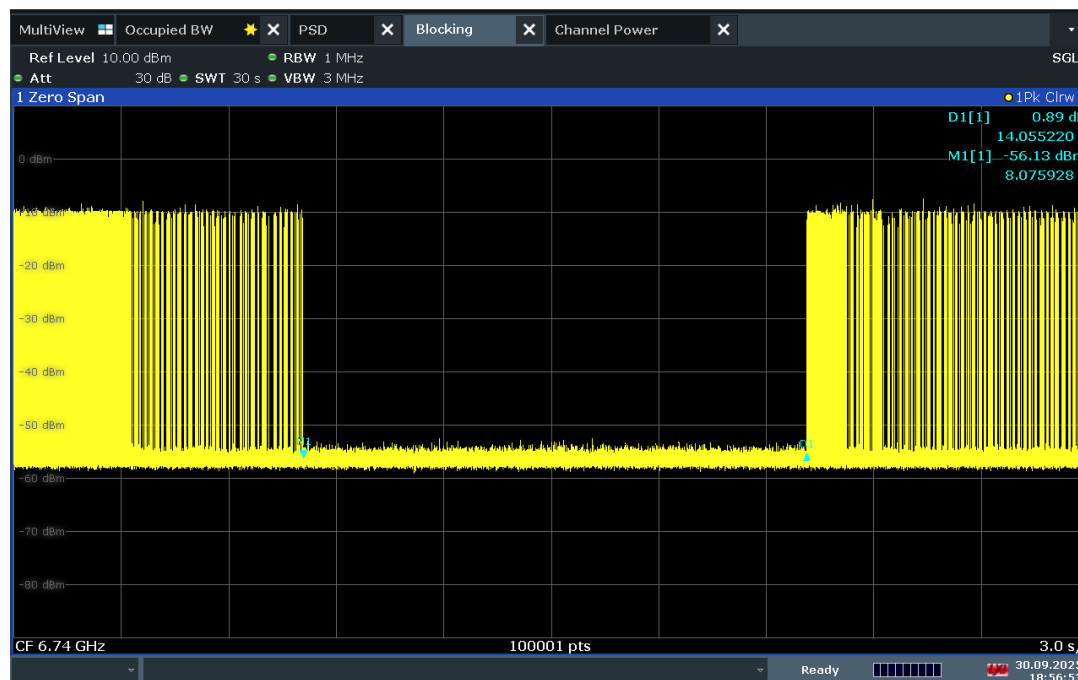

18:56:53 30.09.2025


Plot 7-520. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – High

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 175 of 265                   |

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


Peak

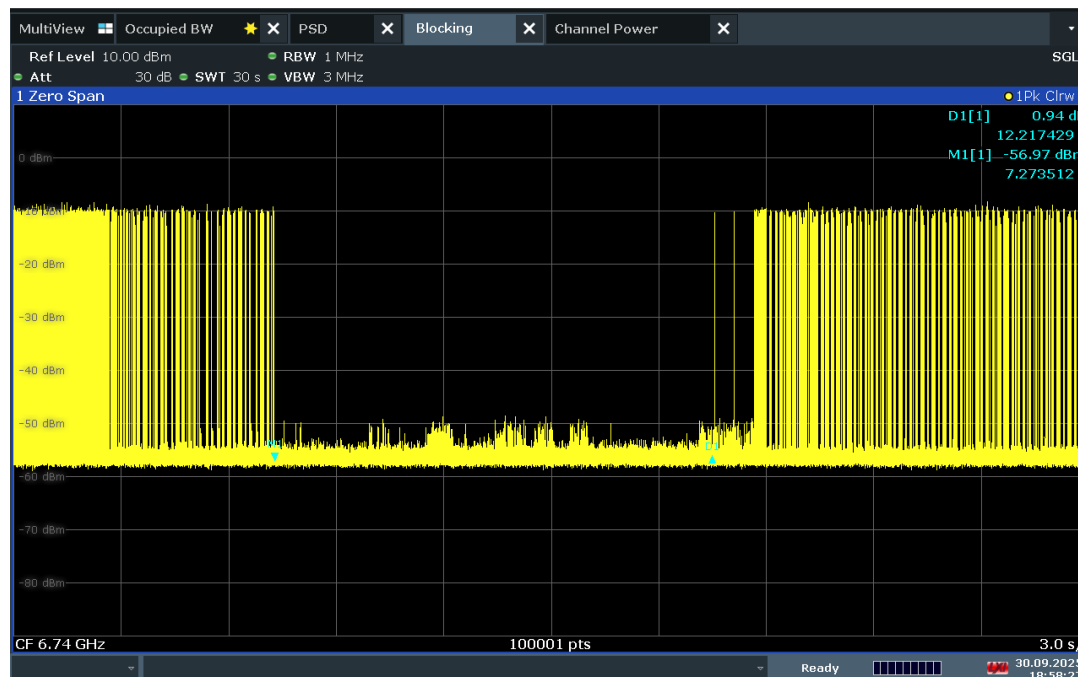

18:58:28 30.09.2025

Plot 7-521. Contention Based Protocol Timing Plot – UNII 8 – 20MHz Channel 197

Peak

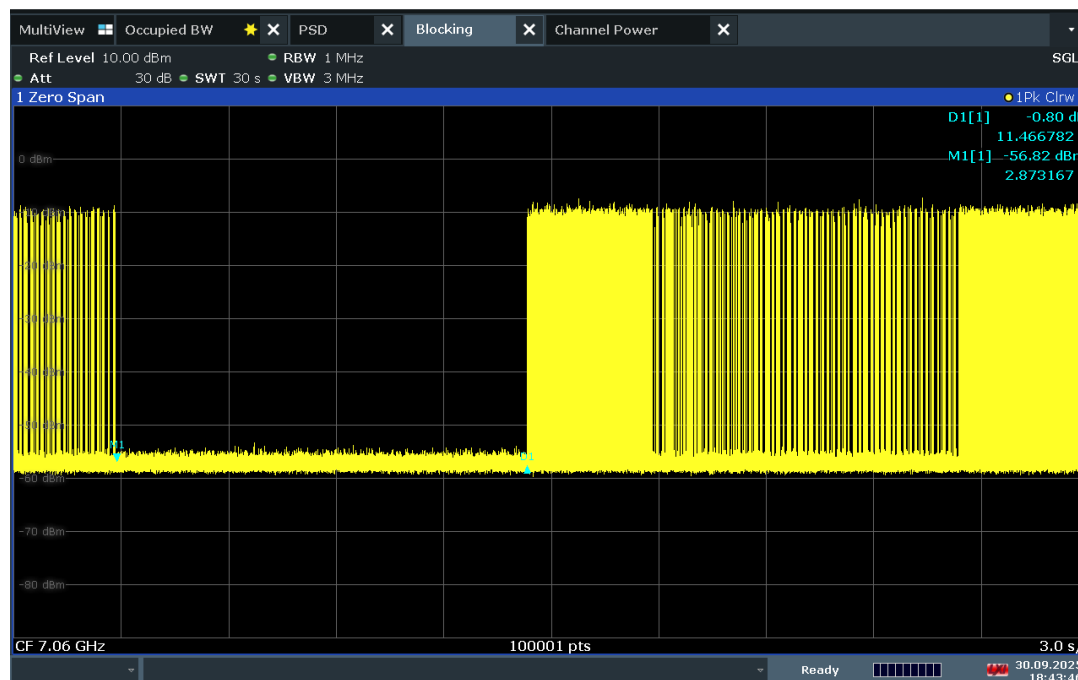


18:43:46 30.09.2025

Plot 7-522. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Channel 207 – Low


|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 176 of 265                   |

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

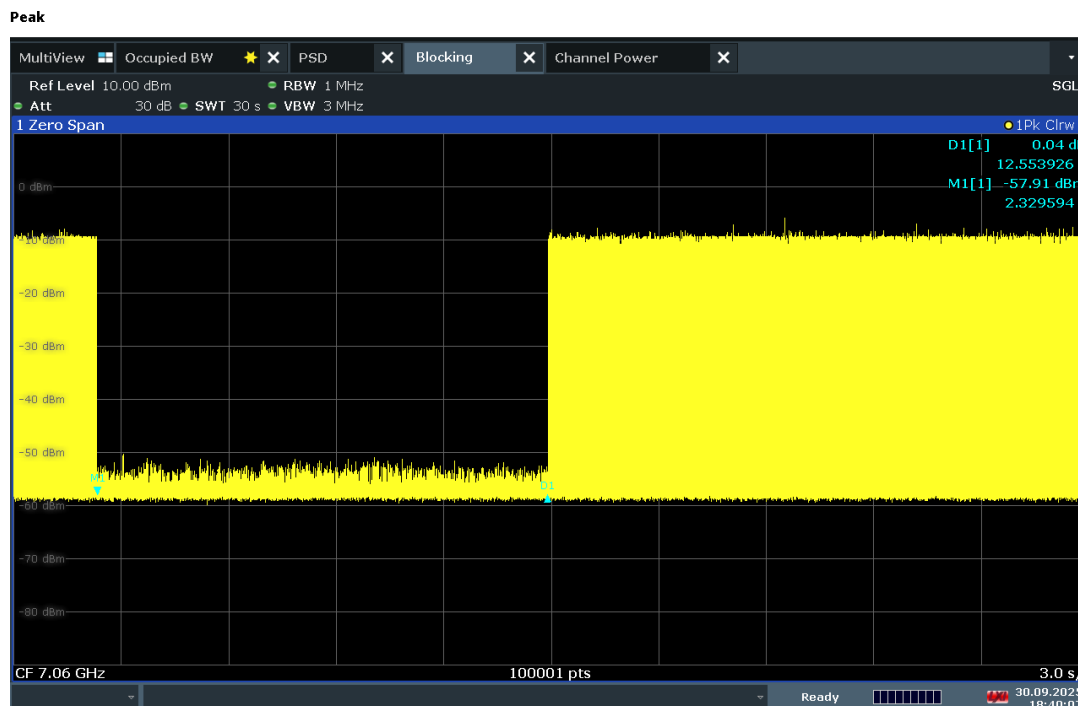

Plot 7-523. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Channel 207 – Mid

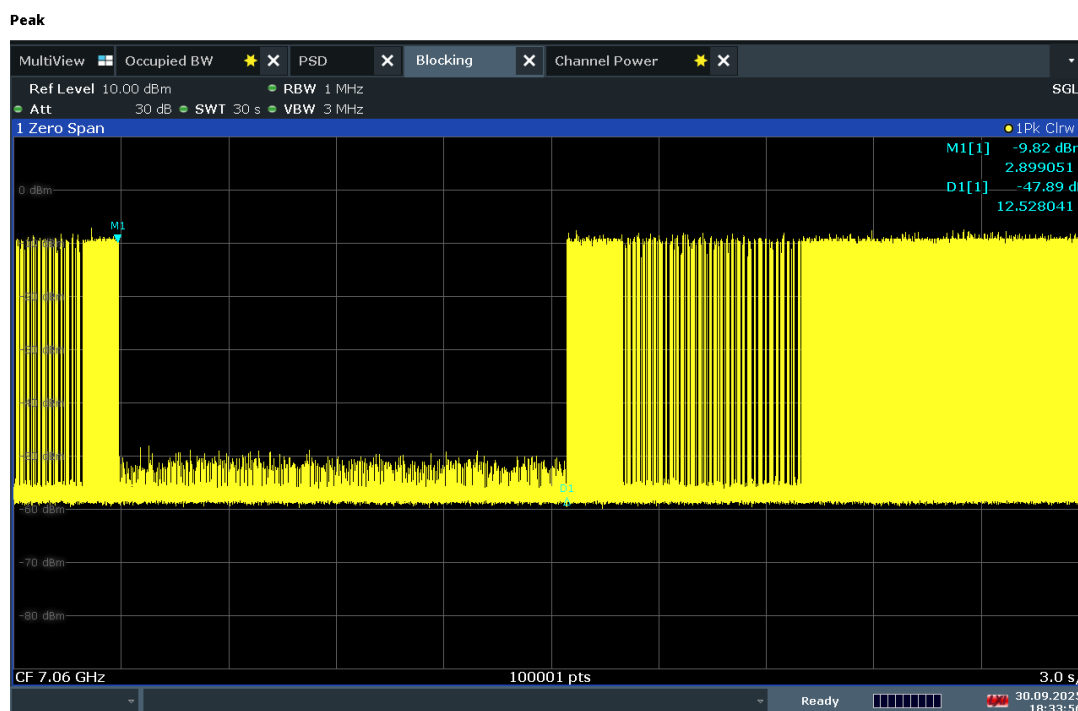


Plot 7-524. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Channel 207 – High

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 177 of 265                   |

V 11.0 5/2025


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## Bandwidth Reduction Plots

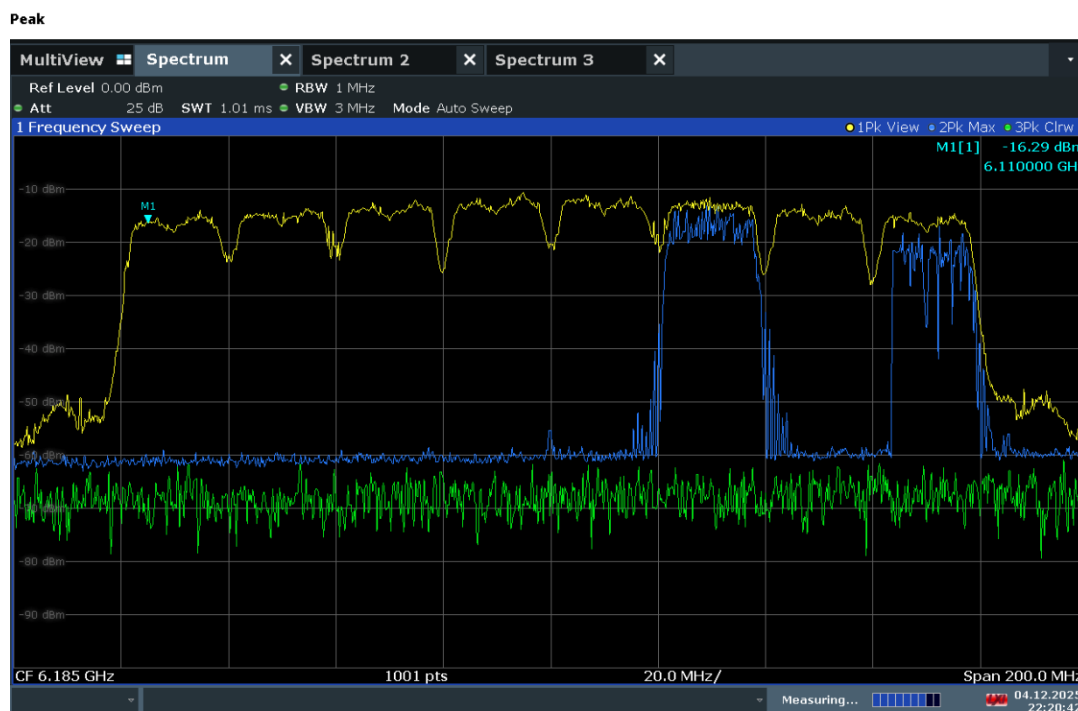

22:20:43 04.12.2025

Plot 7-525. 160MHz Bandwidth, AWGN Signal Injected – 6430Mhz

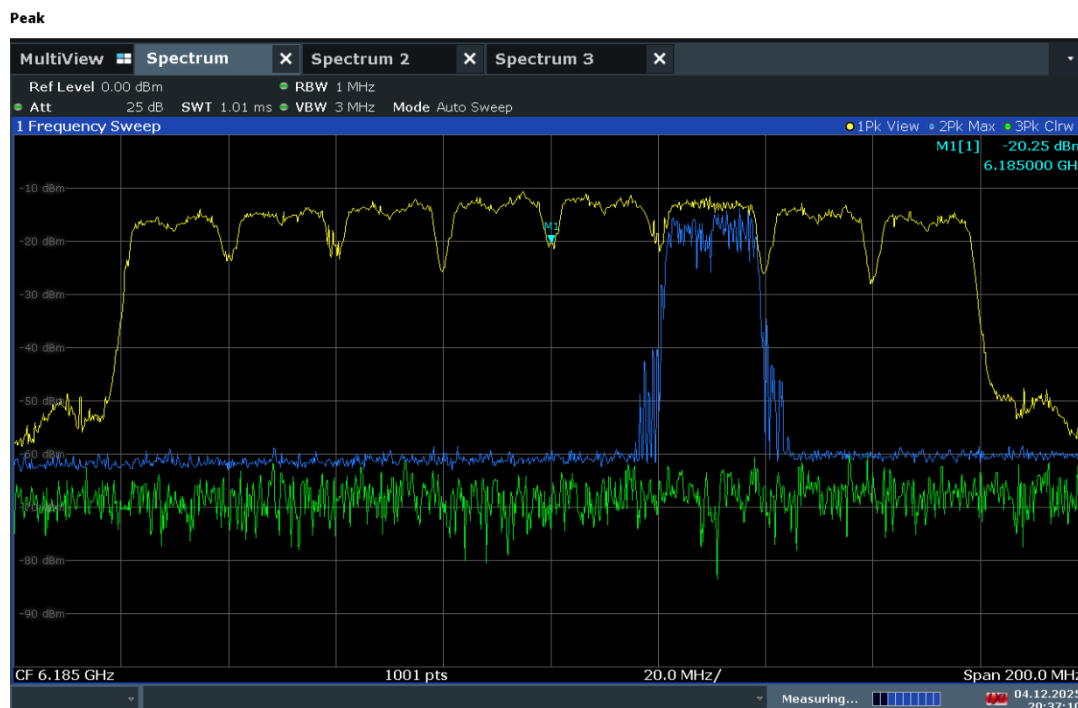

20:37:10 04.12.2025


Plot 7-526. 160MHz Bandwidth, AWGN Signal Injected – 6505MHz

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 178 of 265                   |

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

Peak

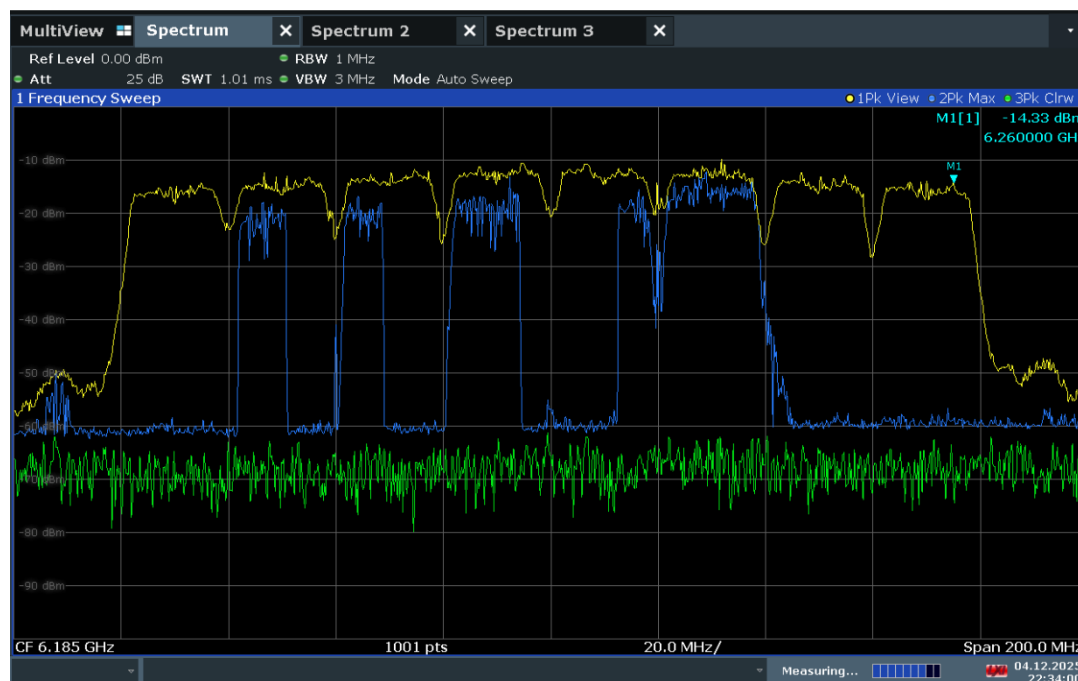

22:34:00 04.12.2025

Plot 7-527. 160MHz Bandwidth, AWGN Signal Injected – 6580MHz

|                                                   |                                                                                     |                                   |                                                     |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3462<br><b>IC:</b> 579C-A3462  |  |                                   | <b>MEASUREMENT REPORT</b><br><b>(CERTIFICATION)</b> | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2509100082-24-R3.BCG | <b>Test Dates:</b><br>9/15/2025 - 12/10/2025                                        | <b>EUT Type:</b><br>Tablet Device | Page 179 of 265                                     |                                          |

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.7 Radiated Spurious Emissions – Above 1GHz

**§15.407(b) §15.205 §15.209; RSS-Gen [8.9]**

### **Test Overview and Limit**

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11be(SU) (20MHz BW), 802.11be(SU) (40MHz BW), 802.11be(SU) (80MHz), 802.11be(SU) (160MHz) and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***For transmitters operating in the 5.925-7.125 GHz band: All emissions outside of the 5.925-7.125 GHz band shall not exceed an EIRP of –27 dBm/MHz. Emissions found in a restricted band are subject to the limits of 15.209 and RSS-Gen (8.9) as shown in the table below.***

| Frequency       | Field Strength<br>[μV/m] | Measured Distance<br>[Meters] |
|-----------------|--------------------------|-------------------------------|
| Above 960.0 MHz | 500                      | 3                             |

**Table 7-81. Radiated Limits**

### **Test Procedures Used**

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Sections 12.7.7, 12.7.6  
KDB 789033 D02 v02r01 – Section G

### **Test Settings**

#### **Average Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

#### **Peak Field Strength Measurements**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

|                                                   |                                                                                     |                                               |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3462<br><b>IC:</b> 579C-A3462  |  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2509100082-24-R3.BCG | <b>Test Dates:</b><br>9/15/2025 - 12/10/2025                                        | <b>EUT Type:</b><br>Tablet Device             | Page 180 of 265                          |

V 11.0 5/2025

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

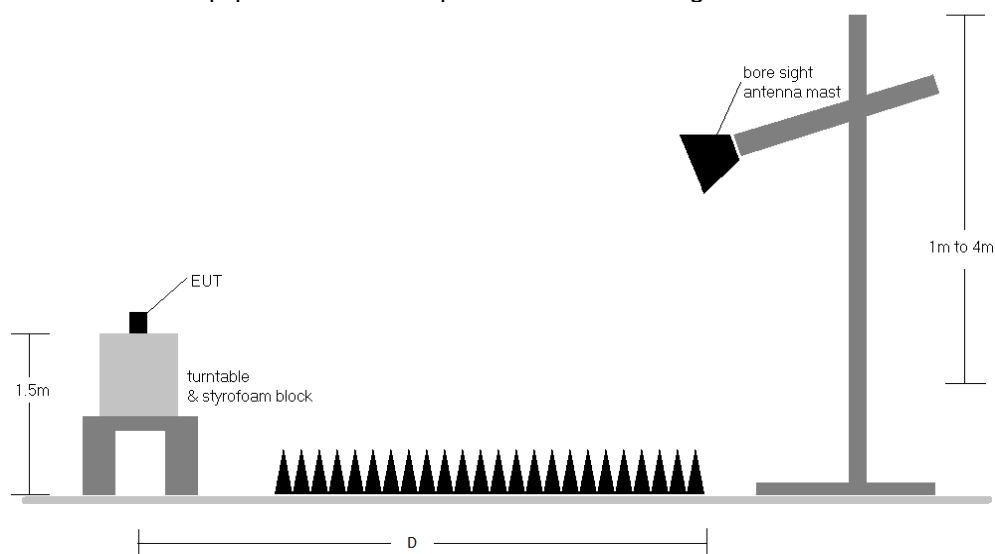

**Figure 7-6. Test Instrument & Measurement Setup**

|                                                   |                                                                                     |                                               |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3462<br><b>IC:</b> 579C-A3462  |  | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2509100082-24-R3.BCG | <b>Test Dates:</b><br>9/15/2025 - 12/10/2025                                        | <b>EUT Type:</b><br>Tablet Device             | Page 181 of 265                          |

V 11.0 5/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## **Test Notes**

1. All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-81.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-81. All spurious emissions that do not lie in a restricted band are subject to a limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. All data rates were investigated and only the worse case is reported
9. The unit was tested with all possible modes and only the highest emission is reported.
10. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
11. All radiated measurements were tested at the highest supported power setting per band.

## **Sample Calculations**

### **Determining Spurious Emissions Levels**

- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$


### **Radiated Band Edge Measurement Offset**

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7.3 to 7.7.22 was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

|                                                   |                                                                                                                                   |                                   |                                          |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3462<br><b>IC:</b> 579C-A3462  |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                                   | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2509100082-24-R3.BCG | <b>Test Dates:</b><br>9/15/2025 - 12/10/2025                                                                                      | <b>EUT Type:</b><br>Tablet Device | Page 182 of 265                          |

V 11.0 5/2025

## 7.7.1 CDD Primary Radiated Spurious Emission

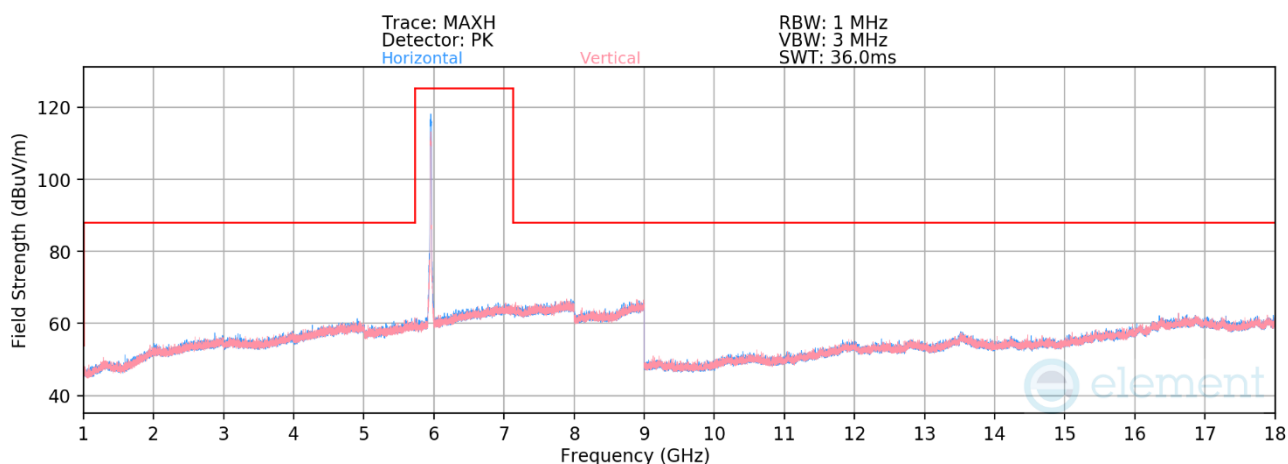

**Plot 7-528. Radiated Spurious Emissions 1-18GHz CDD Primary (802.11be – Ch. 1)**


Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5955MHz  
Channel: 1

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11910.00      | Average  | V               | -                   | -                          | -84.05               | 19.95       | 42.90                   | 53.98          | -11.08      |
| * 11910.00      | Peak     | V               | -                   | -                          | -72.66               | 19.95       | 54.29                   | 73.98          | -19.69      |
| * 17865.00      | Average  | V               | -                   | -                          | -85.20               | 24.55       | 46.36                   | 53.98          | -7.62       |
| * 17865.00      | Peak     | V               | -                   | -                          | -73.06               | 24.55       | 58.50                   | 73.98          | -15.48      |


**Table 7-82. Radiated Spurious Emission Measurements CDD Primary**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 183 of 265                   |

V 11.0 5/2025

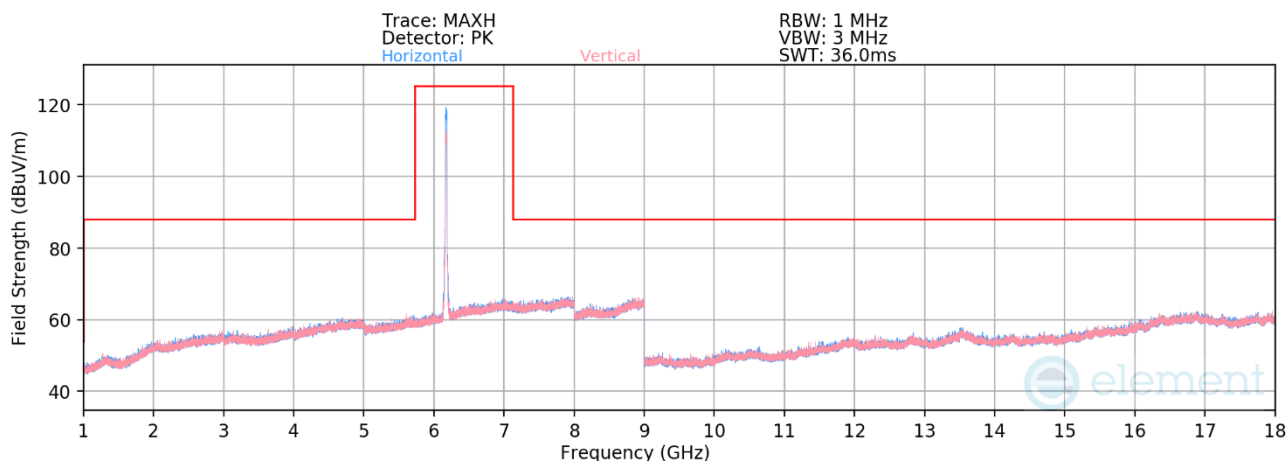

**Plot 7-529. Radiated Spurious Emissions 1-18GHz CDD Primary (802.11be – Ch. 45)**

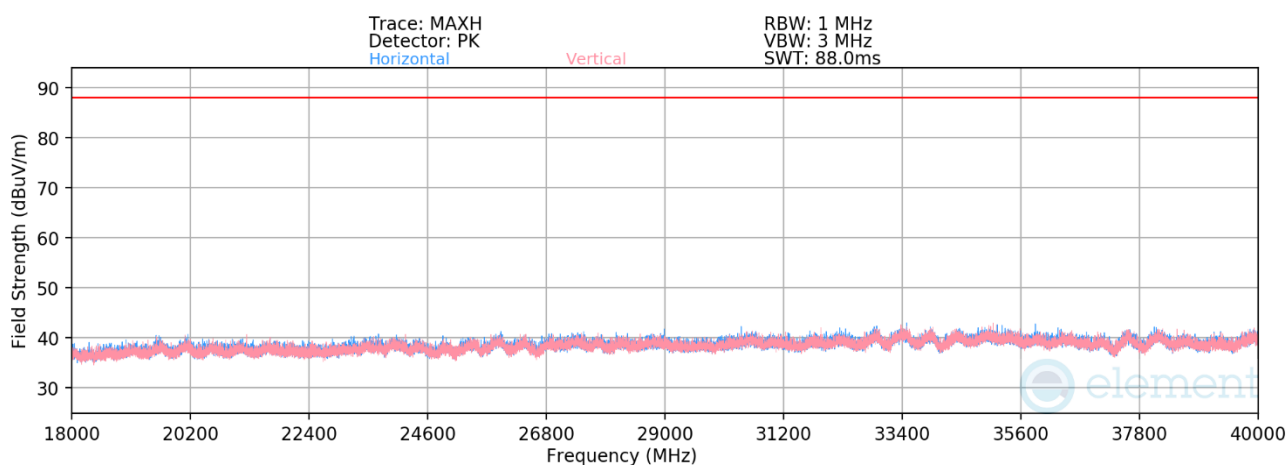

**Plot 7-530. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 45)**

Mode: 802.11be

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6175MHz


Channel: 45

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 12350.00      | Average  | H               | -                   | -                          | -84.87               | 20.84       | 0.00                            | 42.97                   | 53.98          | -11.01      |
| * 12350.00      | Peak     | H               | -                   | -                          | -72.71               | 20.84       | 0.00                            | 55.13                   | 73.98          | -18.85      |
| * 18525.00      | Average  | H               | -                   | -                          | -69.24               | -7.31       | -9.54                           | 20.91                   | 53.98          | -33.07      |
| * 18525.00      | Peak     | H               | -                   | -                          | -58.27               | -7.31       | -9.54                           | 31.88                   | 73.98          | -42.10      |
| 24700.00        | Average  | V               | -                   | -                          | -69.71               | -6.64       | -9.54                           | 21.11                   | 68.23          | -47.12      |
| 24700.00        | Peak     | V               | -                   | -                          | -58.08               | -6.64       | -9.54                           | 32.74                   | 88.23          | -55.49      |
| 30875.00        | Average  | V               | -                   | -                          | -67.75               | -3.64       | -9.54                           | 26.07                   | 68.23          | -42.16      |
| 30875.00        | Peak     | V               | -                   | -                          | -54.97               | -3.64       | -9.54                           | 38.85                   | 88.23          | -49.38      |

**Table 7-83. Radiated Spurious Emission Measurements CDD Primary**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 184 of 265                   |

V 11.0 5/2025

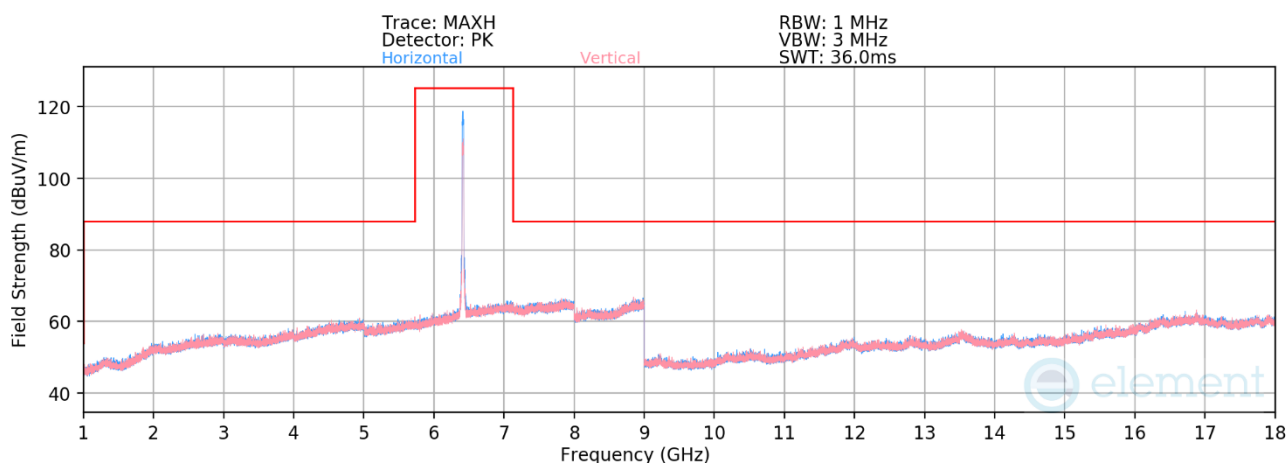

**Plot 7-531. Radiated Spurious Emissions 1-18GHz CDD Primary (802.11be – Ch. 93)**

Mode: 802.11be

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6415MHz


Channel: 93

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 12830.00        | Average  | V               | -                   | -                          | -85.21               | 22.10       | 43.89                   | 68.23          | -24.34      |
| 12830.00        | Peak     | V               | -                   | -                          | -73.23               | 22.10       | 55.87                   | 88.23          | -32.36      |

**Table 7-84. Radiated Spurious Emission Measurements CDD Primary**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 185 of 265                   |

V 11.0 5/2025

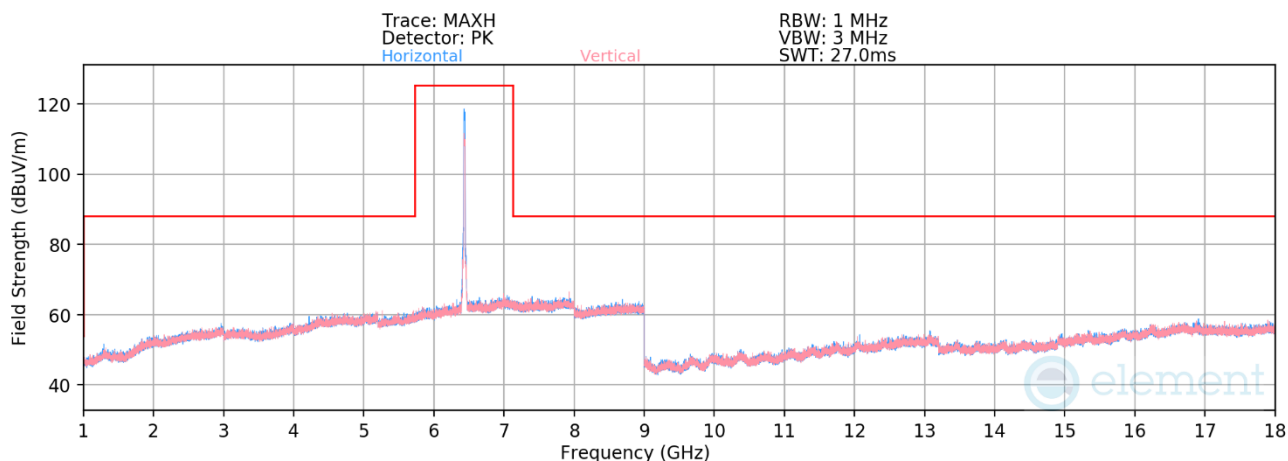

**Plot 7-532. Radiated Spurious Emissions 1-18GHz CDD Primary (802.11be – Ch. 97)**


|                           |          |
|---------------------------|----------|
| Mode:                     | 802.11be |
| Data Rate:                | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 6435MHz  |
| Channel:                  | 97       |

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 12870.00        | Average  | V               | -                   | -                          | -83.08               | 18.29       | 42.22                   | 68.23          | -26.01      |
| 12870.00        | Peak     | V               | -                   | -                          | -71.54               | 18.29       | 53.76                   | 88.23          | -34.47      |


**Table 7-85. Radiated Spurious Emission Measurements CDD Primary**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 186 of 265                   |

V 11.0 5/2025

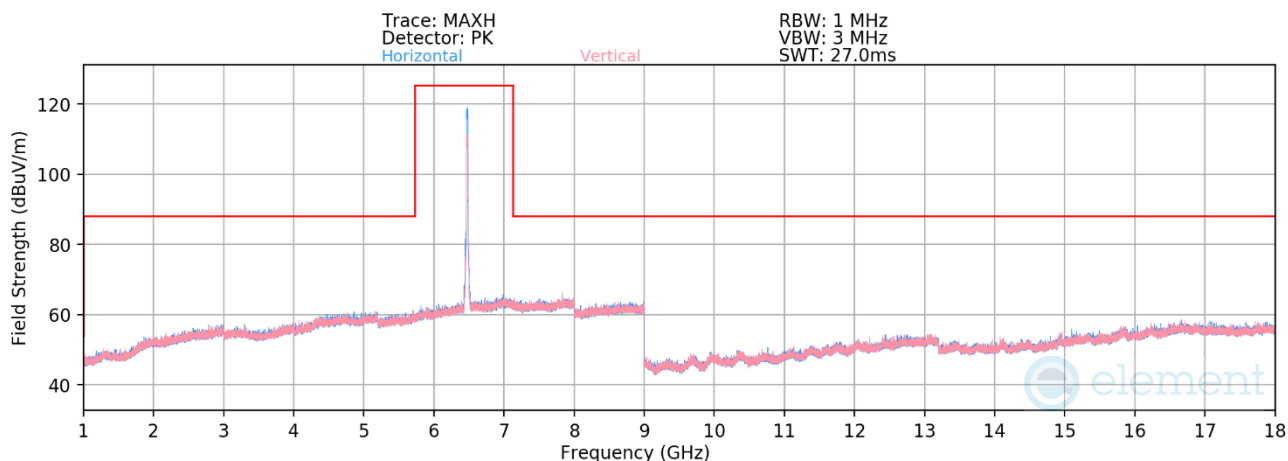

**Plot 7-533. Radiated Spurious Emissions 1-18GHz CDD Primary (802.11be – Ch. 105)**

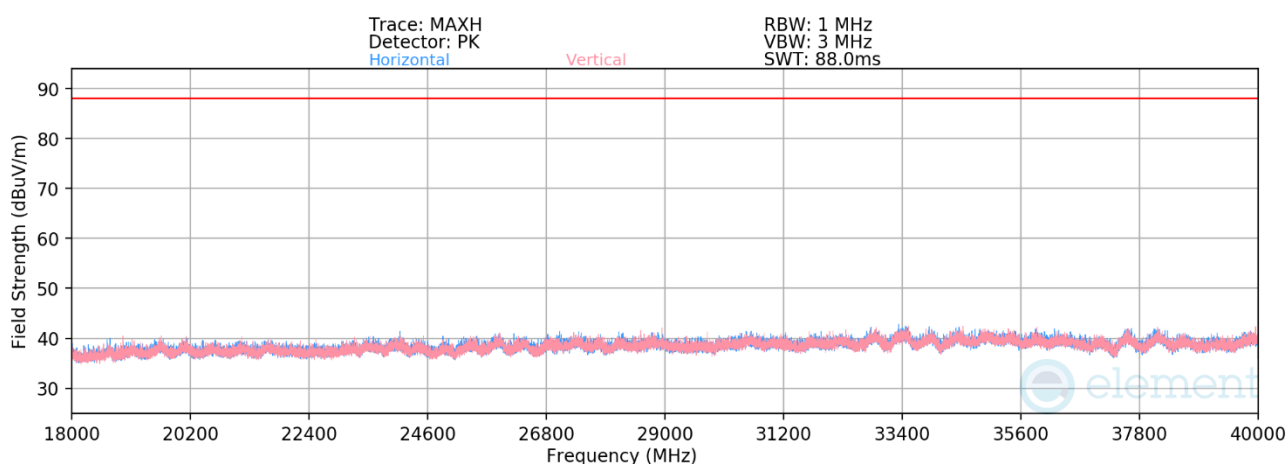


**Plot 7-534. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 105)**

Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 6475MHz  
Channel: 105

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 12950.00        | Average  | V               | -                   | -                          | -84.64               | 18.62       | 0.00                            | 40.97                   | 68.23          | -27.26      |
| 12950.00        | Peak     | V               | -                   | -                          | -73.08               | 18.62       | 0.00                            | 52.53                   | 88.23          | -35.70      |
| * 19425.00      | Average  | V               | -                   | -                          | -69.50               | -7.74       | -9.54                           | 20.22                   | 53.98          | -33.76      |
| * 19425.00      | Peak     | V               | -                   | -                          | -58.05               | -7.74       | -9.54                           | 31.67                   | 73.98          | -42.31      |
| 25900.00        | Average  | V               | -                   | -                          | -67.16               | -5.72       | -9.54                           | 24.58                   | 68.23          | -43.65      |
| 25900.00        | Peak     | V               | -                   | -                          | -53.62               | -5.72       | -9.54                           | 38.12                   | 88.23          | -50.11      |
| 32375.00        | Average  | V               | -                   | -                          | -67.14               | -3.56       | -9.54                           | 26.76                   | 68.23          | -41.47      |
| 32375.00        | Peak     | V               | -                   | -                          | -56.02               | -3.56       | -9.54                           | 37.88                   | 88.23          | -50.35      |

**Table 7-86. Radiated Spurious Emission Measurements CDD Primary**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 187 of 265                   |

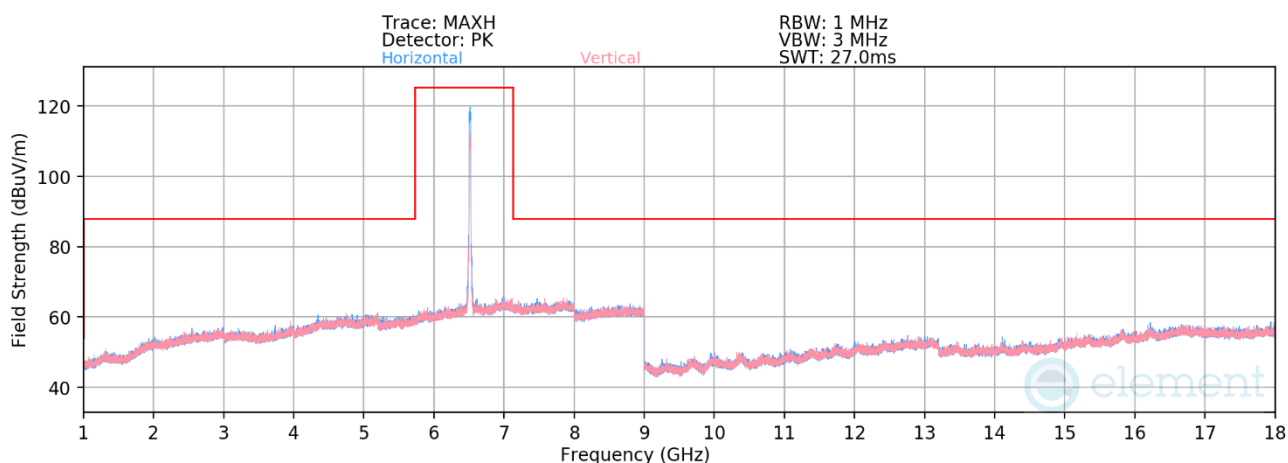

**Plot 7-535. Radiated Spurious Emissions 1-18GHz CDD Primary (802.11be – Ch. 113)**


Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 6515MHz  
Channel: 113

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13030.00        | Average  | H               | -                   | -                          | -84.08               | 18.72       | 41.64                   | 68.23          | -26.59      |
| 13030.00        | Peak     | H               | -                   | -                          | -72.49               | 18.72       | 53.23                   | 88.23          | -35.00      |

**Table 7-87. Radiated Spurious Emission Measurements CDD Primary**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 188 of 265                   |

V 11.0 5/2025

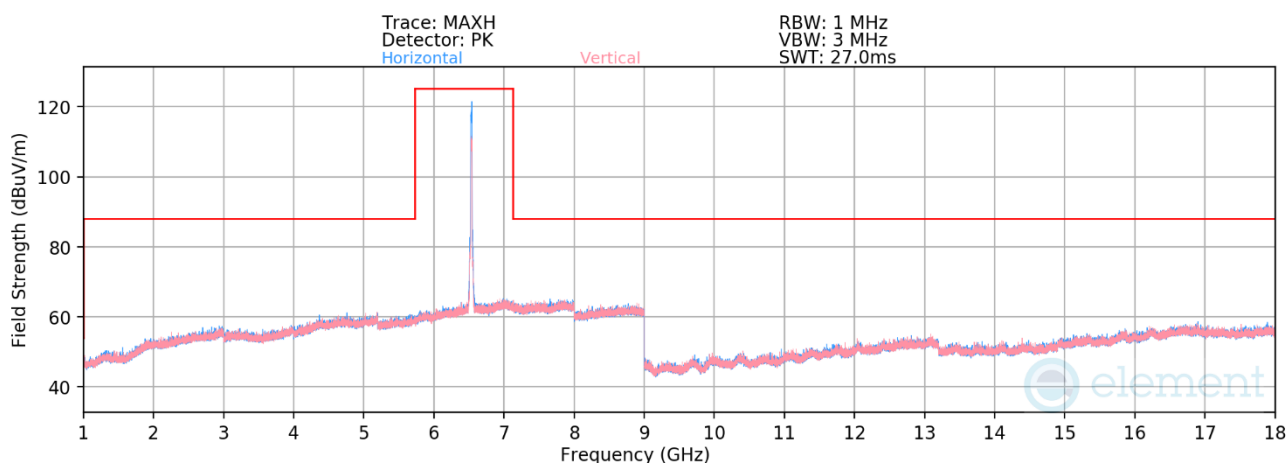

**Plot 7-536. Radiated Spurious Emissions 1-18GHz CDD Primary (802.11be – Ch. 117)**


Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 6535MHz  
Channel: 117

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13070.00        | Average  | H               | -                   | -                          | -83.86               | 18.76       | 41.90                   | 68.23          | -26.33      |
| 13070.00        | Peak     | H               | -                   | -                          | -72.02               | 18.76       | 53.74                   | 88.23          | -34.49      |


**Table 7-88. Radiated Spurious Emission Measurements CDD Primary**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 189 of 265                   |

V 11.0 5/2025

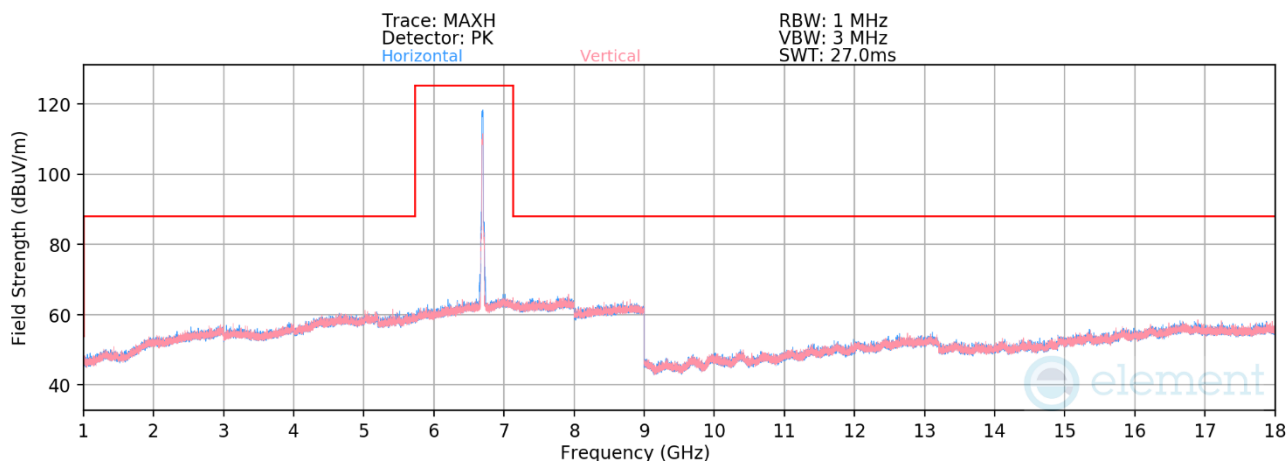

**Plot 7-537. Radiated Spurious Emissions 1-18GHz CDD Primary (802.11be – Ch. 149)**

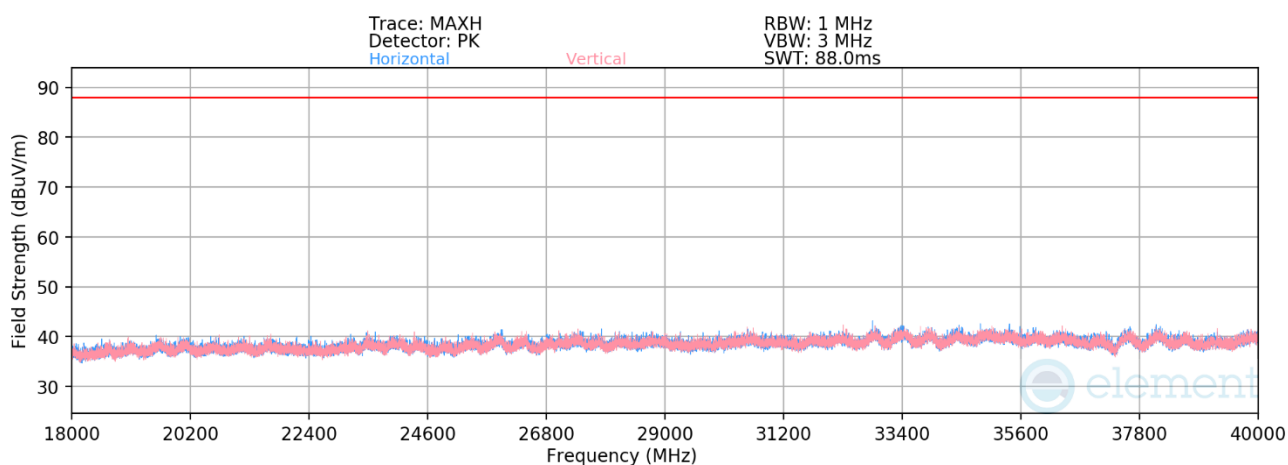

**Plot 7-538. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 149)**

Mode: 802.11be

Data Rate: MCS0

Distance of Measurements: 3 Meters


Operating Frequency: 6695MHz

Channel: 149

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 13390.00      | Average  | V               | -                   | -                          | -83.57               | 18.61       | 0.00                            | 42.04                   | 53.98          | -11.94      |
| * 13390.00      | Peak     | V               | -                   | -                          | -72.79               | 18.61       | 0.00                            | 52.82                   | 73.98          | -21.16      |
| * 20085.00      | Average  | V               | -                   | -                          | -68.04               | -8.03       | -9.54                           | 21.39                   | 53.98          | -32.59      |
| * 20085.00      | Peak     | V               | -                   | -                          | -56.40               | -8.03       | -9.54                           | 33.03                   | 73.98          | -40.95      |
| 26780.00        | Average  | V               | -                   | -                          | -67.62               | -5.23       | -9.54                           | 24.61                   | 68.23          | -43.62      |
| 26780.00        | Peak     | V               | -                   | -                          | -56.54               | -5.23       | -9.54                           | 35.69                   | 88.23          | -52.54      |
| 33475.00        | Average  | V               | -                   | -                          | -65.88               | -4.28       | -9.54                           | 27.30                   | 68.23          | -40.93      |
| 33475.00        | Peak     | V               | -                   | -                          | -54.42               | -4.28       | -9.54                           | 38.76                   | 88.23          | -49.47      |

**Table 7-89. Radiated Spurious Emission Measurements CDD Primary**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 190 of 265                   |

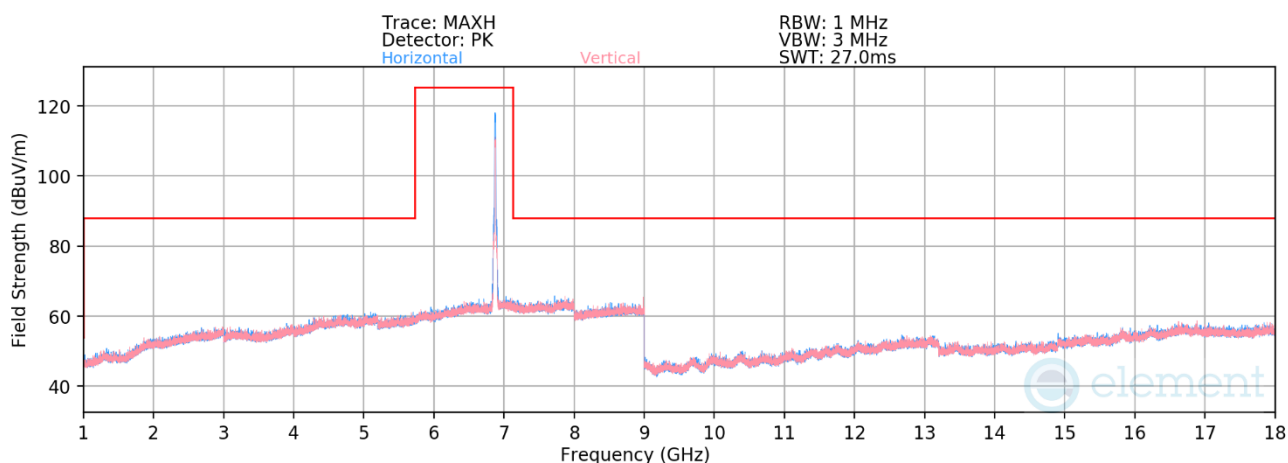

**Plot 7-539. Radiated Spurious Emissions 1-18GHz CDD Primary (802.11be – Ch. 185)**


|                           |          |
|---------------------------|----------|
| Mode:                     | 802.11be |
| Data Rate:                | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 6875MHz  |
| Channel:                  | 185      |

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13750.00        | Average  | H               | -                   | -                          | -83.95               | 18.53       | 41.58                   | 68.23          | -26.65      |
| 13750.00        | Peak     | H               | -                   | -                          | -72.71               | 18.53       | 52.82                   | 88.23          | -35.41      |

**Table 7-90. Radiated Spurious Emission Measurements CDD Primary**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 191 of 265                   |

V 11.0 5/2025

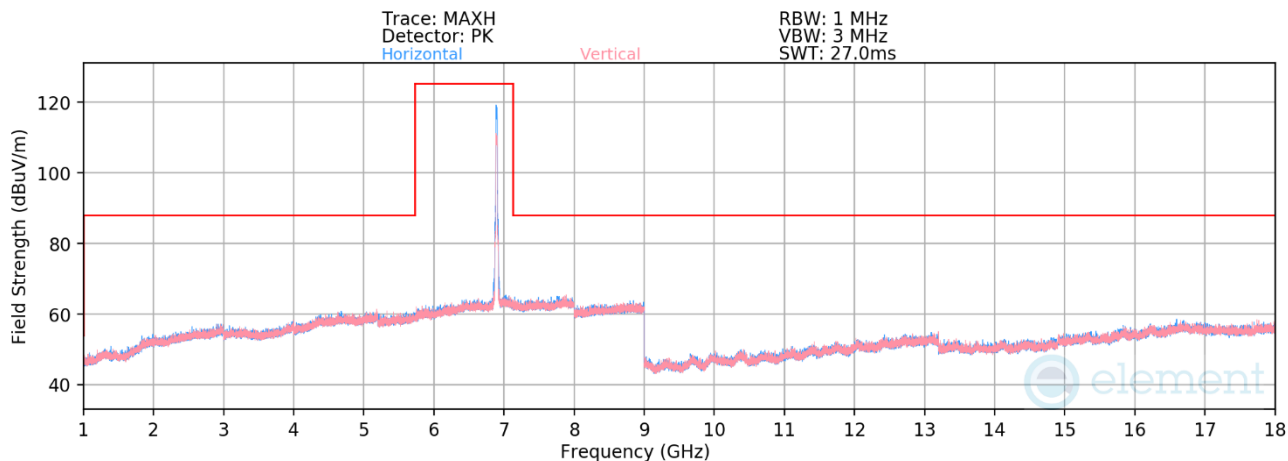

**Plot 7-540. Radiated Spurious Emissions 1-18GHz CDD Primary (802.11be – Ch. 189)**


|                           |          |
|---------------------------|----------|
| Mode:                     | 802.11be |
| Data Rate:                | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 6895MHz  |
| Channel:                  | 189      |

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13790.00        | Average  | H               | -                   | -                          | -83.53               | 17.91       | 41.38                   | 68.23          | -26.85      |
| 13790.00        | Peak     | H               | -                   | -                          | -72.50               | 17.91       | 52.41                   | 88.23          | -35.82      |


**Table 7-91. Radiated Spurious Emission Measurements CDD Primary**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 192 of 265                   |

V 11.0 5/2025

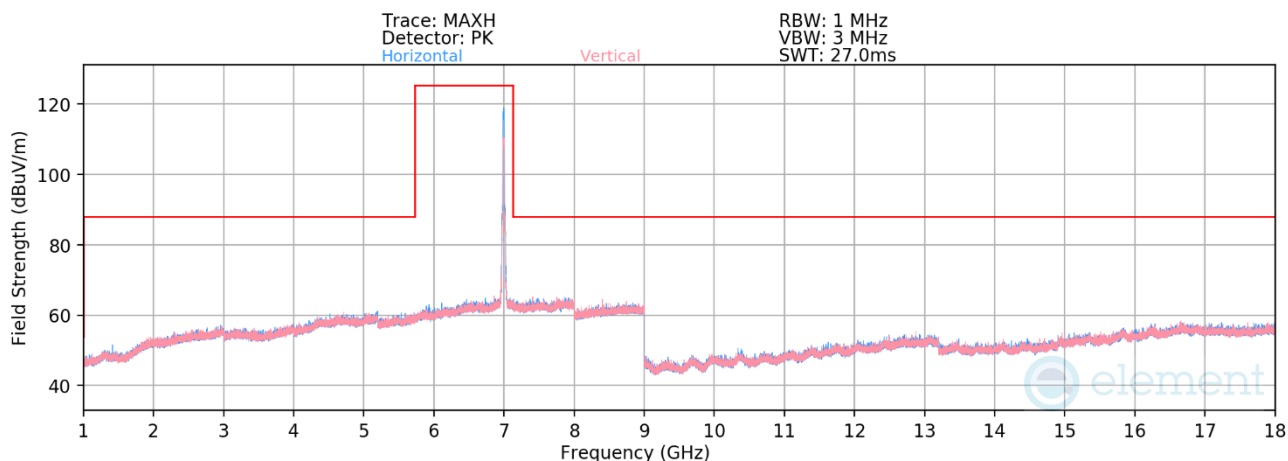

**Plot 7-541. Radiated Spurious Emissions 1-18GHz CDD Primary (802.11be – Ch. 209)**

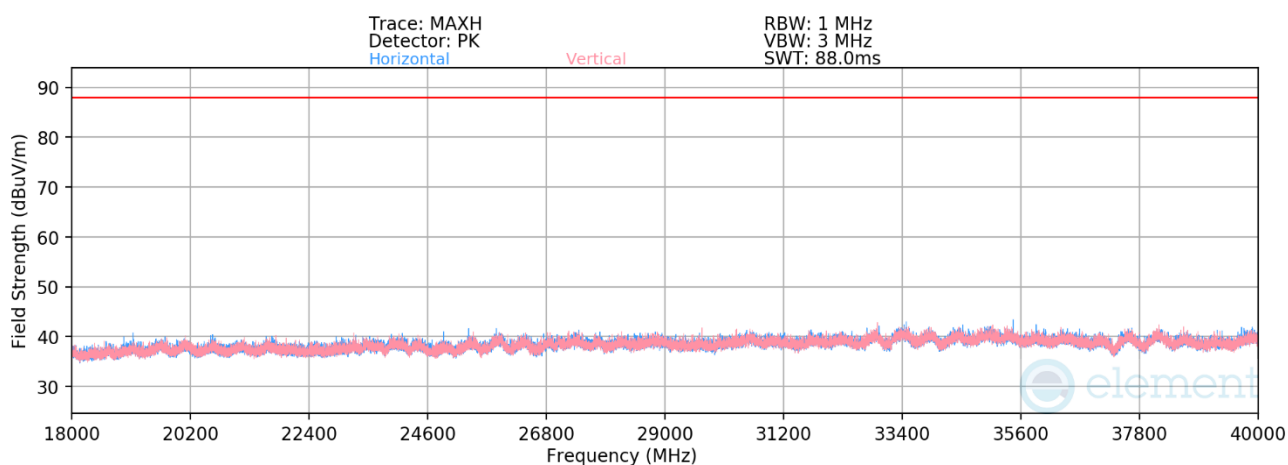

**Plot 7-542. Radiated Spurious Emissions 18-40GHz CDD Primary (802.11be – Ch. 209)**

Mode: 802.11be

Data Rate: MCS0

Distance of Measurements: 3 Meters


Operating Frequency: 6995MHz

Channel: 209

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 13990.00        | Average  | V               | -                   | -                          | -84.53               | 18.45       | 0.00                            | 40.92                   | 68.23          | -27.31      |
| 13990.00        | Peak     | V               | -                   | -                          | -73.06               | 18.45       | 0.00                            | 52.39                   | 88.23          | -35.84      |
| * 20985.00      | Average  | V               | -                   | -                          | -68.91               | -7.58       | -9.54                           | 20.97                   | 53.98          | -33.01      |
| * 20985.00      | Peak     | V               | -                   | -                          | -57.22               | -7.58       | -9.54                           | 32.66                   | 73.98          | -41.32      |
| 27980.00        | Average  | V               | -                   | -                          | -68.37               | -4.26       | -9.54                           | 24.83                   | 68.23          | -43.40      |
| 27980.00        | Peak     | V               | -                   | -                          | -57.05               | -4.26       | -9.54                           | 36.15                   | 88.23          | -52.08      |
| 34975.00        | Average  | V               | -                   | -                          | -65.92               | -4.53       | -9.54                           | 27.01                   | 68.23          | -41.22      |
| 34975.00        | Peak     | V               | -                   | -                          | -54.59               | -4.53       | -9.54                           | 38.34                   | 88.23          | -49.89      |

**Table 7-92. Radiated Spurious Emission Measurements CDD Primary**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 193 of 265                   |

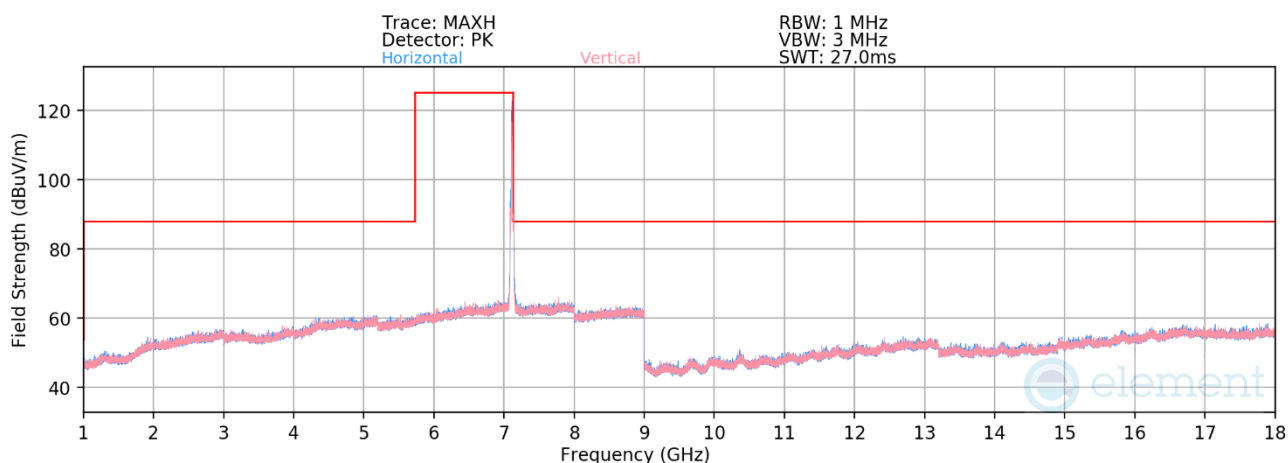

**Plot 7-543. Radiated Spurious Emissions 1-18GHz CDD Primary (802.11be – Ch. 233)**

|                           |          |
|---------------------------|----------|
| Mode:                     | 802.11be |
| Data Rate:                | MCS0     |
| Distance of Measurements: | 3 Meters |
| Operating Frequency:      | 7115MHz  |
| Channel:                  | 233      |


| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 14230.00        | Average  | H               | -                   | -                          | -84.32               | 18.49       | 41.17                   | 68.23          | -27.06      |
| 14230.00        | Peak     | H               | -                   | -                          | -73.38               | 18.49       | 52.12                   | 88.23          | -36.11      |

**Table 7-93. Radiated Spurious Emission Measurements CDD Primary**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 194 of 265                   |

V 11.0 5/2025

## 7.7.2 CDD Diversity Radiated Spurious Emission

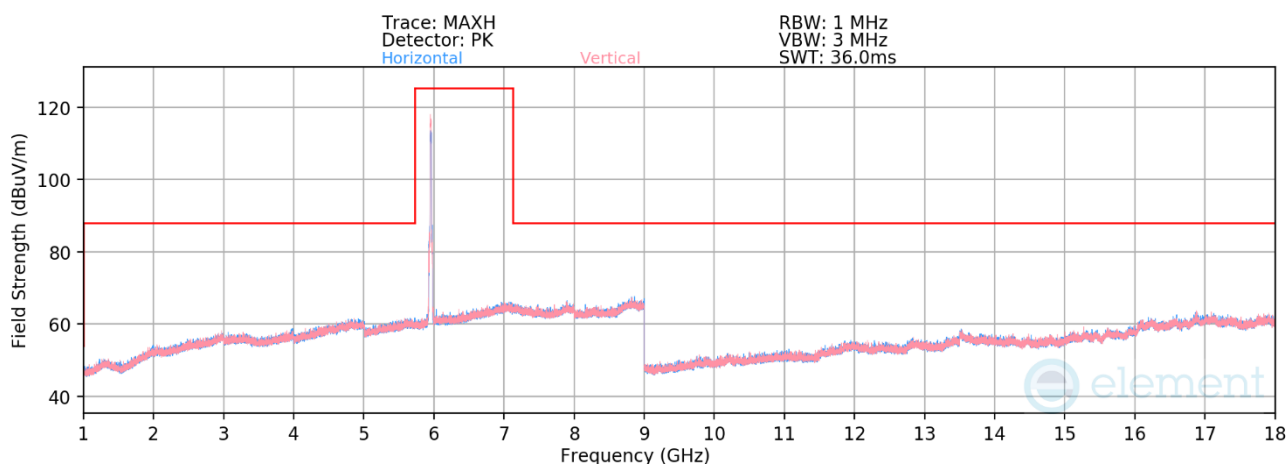

**Plot 7-544. Radiated Spurious Emissions 1-18GHz CDD Diversity (802.11be – Ch. 1)**


Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5955MHz  
Channel: 1

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| * 11910.00      | Average  | H               | -                   | -                          | -83.79               | 20.31       | 43.51                   | 53.98          | -10.47      |
| * 11910.00      | Peak     | H               | -                   | -                          | -73.09               | 20.31       | 54.22                   | 73.98          | -19.76      |
| * 17865.00      | Average  | V               | -                   | -                          | -84.72               | 24.55       | 46.84                   | 53.98          | -7.14       |
| * 17865.00      | Peak     | V               | -                   | -                          | -73.25               | 24.55       | 58.30                   | 73.98          | -15.68      |


**Table 7-94. Radiated Spurious Emission Measurements CDD Diversity**

|                                            |                                                                                     |                                       |  |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|--|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) |  | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            |  | Page 195 of 265                   |

V 11.0 5/2025

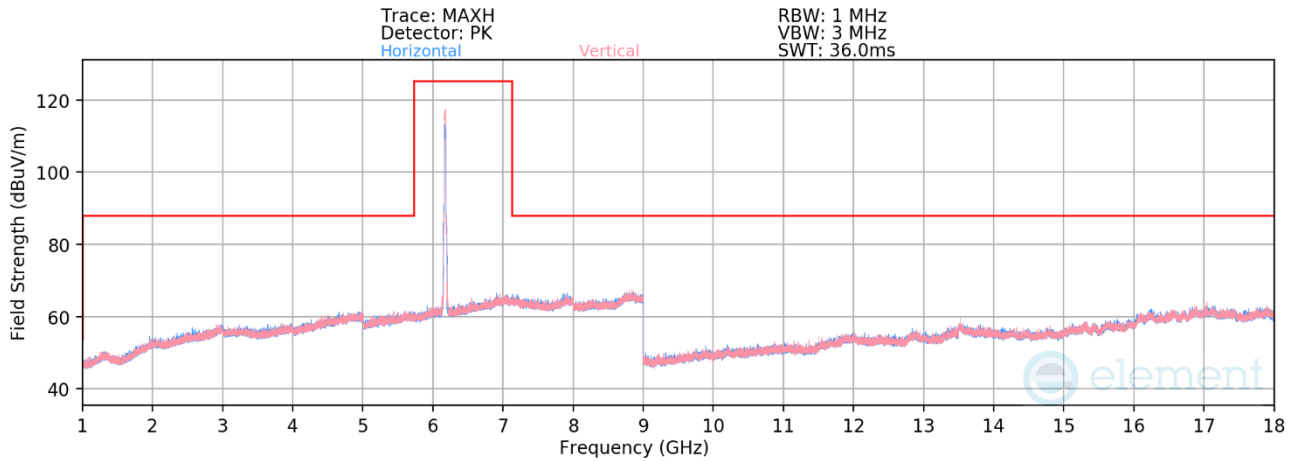

**Plot 7-545. Radiated Spurious Emissions 1-18GHz CDD Diversity (802.11be – Ch. 45)**

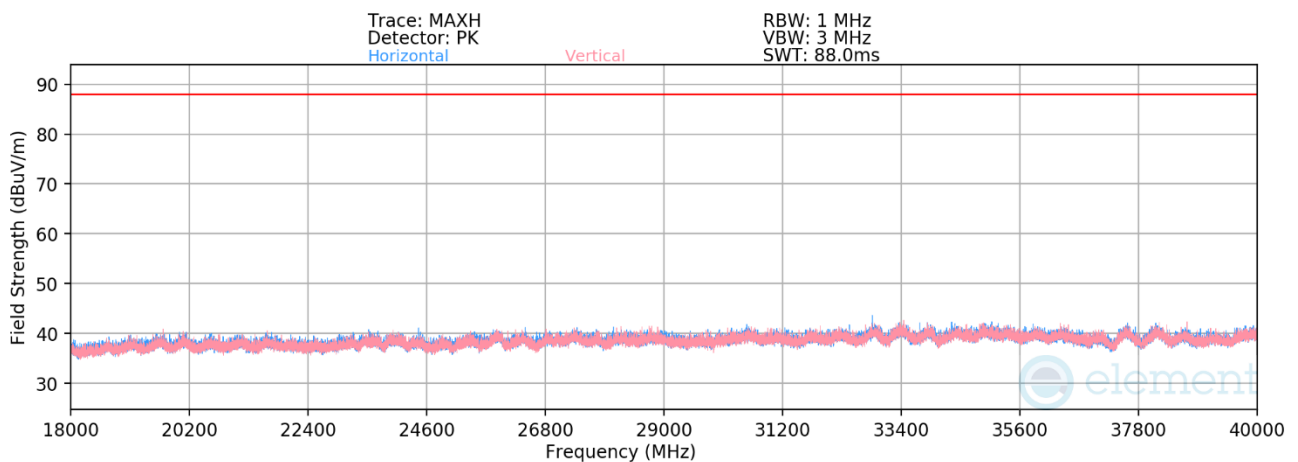


**Plot 7-546. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 45)**

Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 6175MHz  
Channel: 45

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 12350.00      | Average  | H               | -                   | -                          | -84.62               | 20.93       | 0.00                            | 43.31                   | 53.98          | -10.67      |
| * 12350.00      | Peak     | H               | -                   | -                          | -73.15               | 20.93       | 0.00                            | 54.78                   | 73.98          | -19.20      |
| * 18525.00      | Average  | H               | -                   | -                          | -69.24               | -7.31       | -9.54                           | 20.91                   | 53.98          | -33.07      |
| * 18525.00      | Peak     | H               | -                   | -                          | -57.70               | -7.31       | -9.54                           | 32.45                   | 73.98          | -41.53      |
| 24700.00        | Average  | H               | -                   | -                          | -69.31               | -6.56       | -9.54                           | 21.59                   | 68.23          | -46.64      |
| 24700.00        | Peak     | H               | -                   | -                          | -58.02               | -6.56       | -9.54                           | 32.88                   | 88.23          | -55.35      |
| 30875.00        | Average  | H               | -                   | -                          | -67.72               | -3.70       | -9.54                           | 26.04                   | 68.23          | -42.19      |
| 30875.00        | Peak     | H               | -                   | -                          | -56.01               | -3.70       | -9.54                           | 37.75                   | 88.23          | -50.48      |

**Table 7-95. Radiated Spurious Emission Measurements CDD Diversity**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 196 of 265                   |

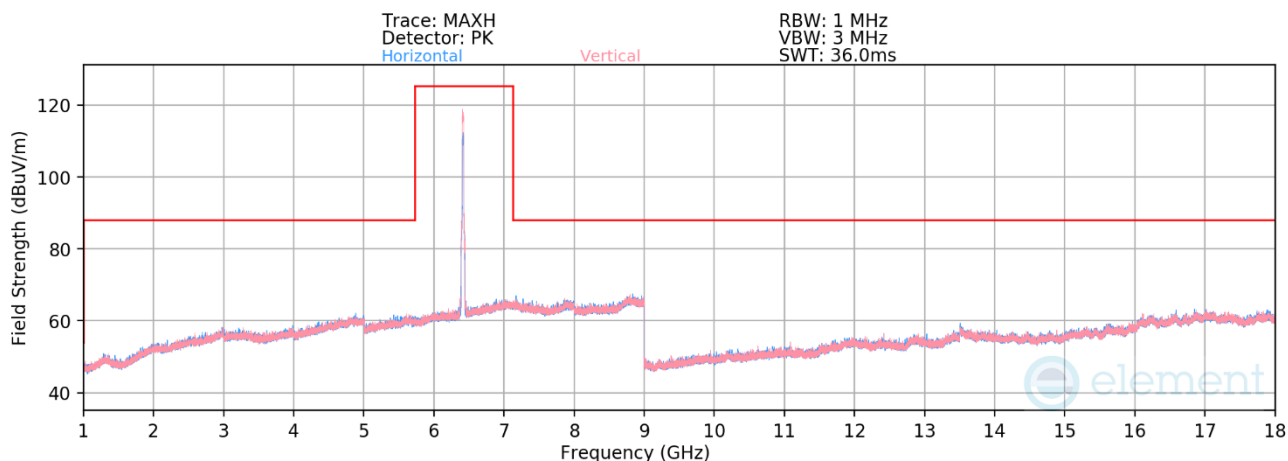

**Plot 7-547. Radiated Spurious Emissions 1-18GHz CDD Diversity (802.11be – Ch. 93)**


Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 6415MHz  
Channel: 93

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 12830.00        | Average  | H               | -                   | -                          | -84.96               | 22.10       | 44.14                   | 68.23          | -24.09      |
| 12830.00        | Peak     | H               | -                   | -                          | -73.31               | 22.10       | 55.79                   | 88.23          | -32.44      |

**Table 7-96. Radiated Spurious Emission Measurements CDD Diversity**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 197 of 265                   |

V 11.0 5/2025

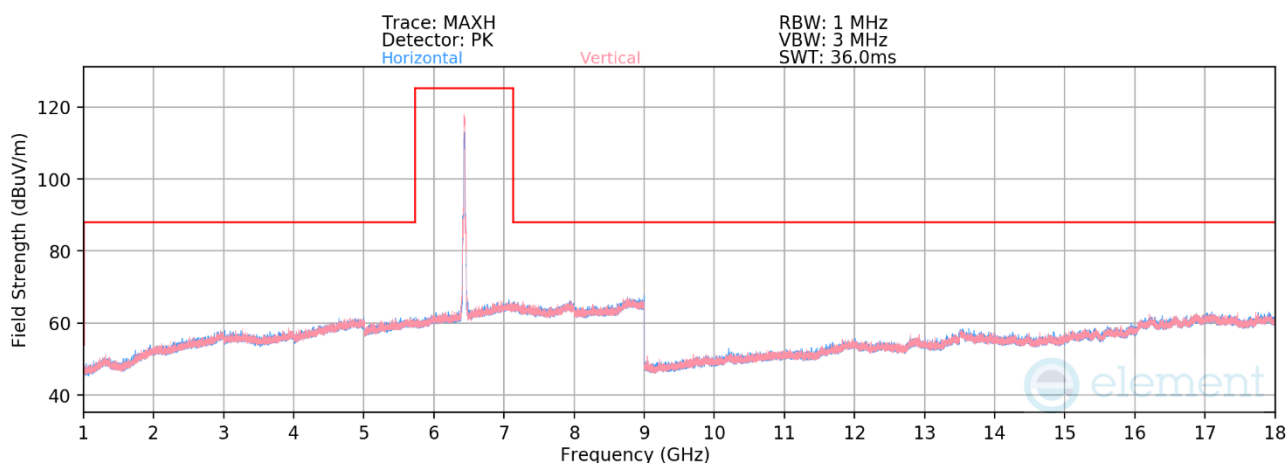

**Plot 7-548. Radiated Spurious Emissions 1-18GHz CDD Diversity (802.11be – Ch. 97)**


Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 6435MHz  
Channel: 97

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 12870.00        | Average  | H               | -                   | -                          | -85.03               | 22.00       | 43.96                   | 68.23          | -24.27      |
| 12870.00        | Peak     | H               | -                   | -                          | -73.10               | 22.00       | 55.90                   | 88.23          | -32.33      |


**Table 7-97. Radiated Spurious Emission Measurements CDD Diversity**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 198 of 265                   |

V 11.0 5/2025

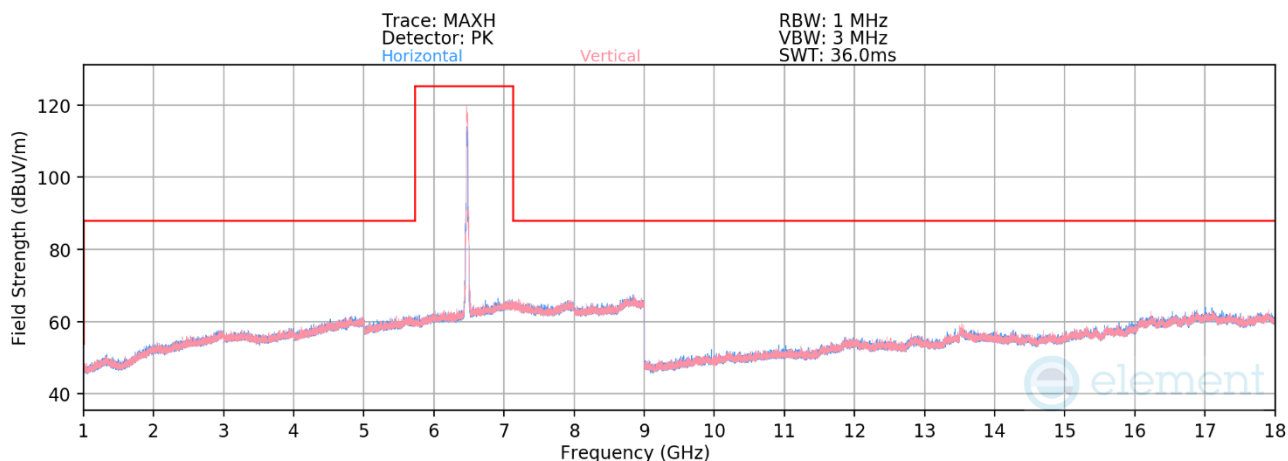

**Plot 7-549. Radiated Spurious Emissions 1-18GHz CDD Diversity (802.11be – Ch. 105)**

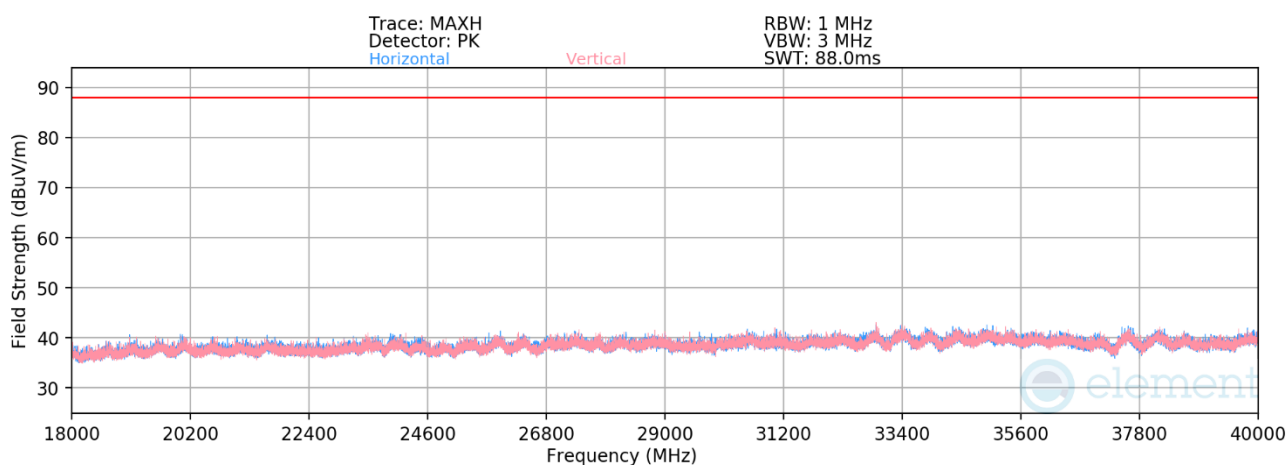

**Plot 7-550. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 105)**

Mode: 802.11be

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6475MHz


Channel: 105

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 12950.00        | Average  | V               | -                   | -                          | -85.10               | 21.89       | 0.00                            | 43.79                   | 68.23          | -24.44      |
| 12950.00        | Peak     | V               | -                   | -                          | -73.67               | 21.89       | 0.00                            | 55.21                   | 88.23          | -33.02      |
| * 19425.00      | Average  | V               | -                   | -                          | -69.35               | -7.74       | -9.54                           | 20.37                   | 53.98          | -33.61      |
| * 19425.00      | Peak     | V               | -                   | -                          | -57.87               | -7.74       | -9.54                           | 31.85                   | 73.98          | -42.13      |
| 25900.00        | Average  | H               | -                   | -                          | -67.13               | -5.72       | -9.54                           | 24.61                   | 68.23          | -43.62      |
| 25900.00        | Peak     | H               | -                   | -                          | -55.67               | -5.72       | -9.54                           | 36.07                   | 88.23          | -52.16      |
| 32375.00        | Average  | H               | -                   | -                          | -66.88               | -3.56       | -9.54                           | 27.02                   | 68.23          | -41.21      |
| 32375.00        | Peak     | H               | -                   | -                          | -55.05               | -3.56       | -9.54                           | 38.85                   | 88.23          | -49.38      |

**Table 7-98. Radiated Spurious Emission Measurements CDD Diversity**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 199 of 265                   |

V 11.0 5/2025

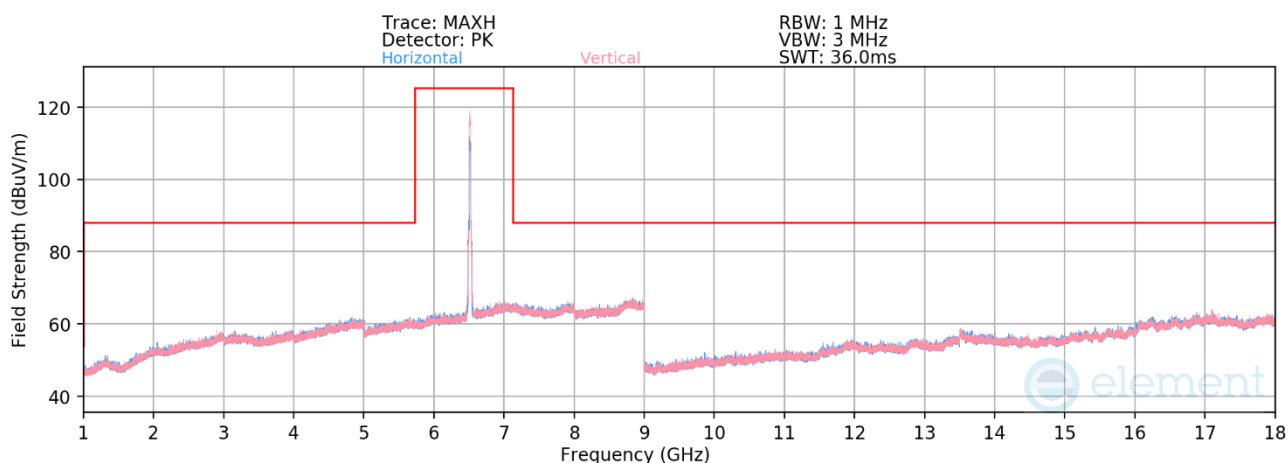

**Plot 7-551. Radiated Spurious Emissions 1-18GHz CDD Diversity (802.11be – Ch. 113)**


Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 6515MHz  
Channel: 113

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13030.00        | Average  | H               | -                   | -                          | -85.24               | 22.02       | 43.78                   | 68.23          | -24.45      |
| 13030.00        | Peak     | H               | -                   | -                          | -73.75               | 22.02       | 55.27                   | 88.23          | -32.96      |

**Table 7-99. Radiated Spurious Emission Measurements CDD Diversity**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 200 of 265                   |

V 11.0 5/2025

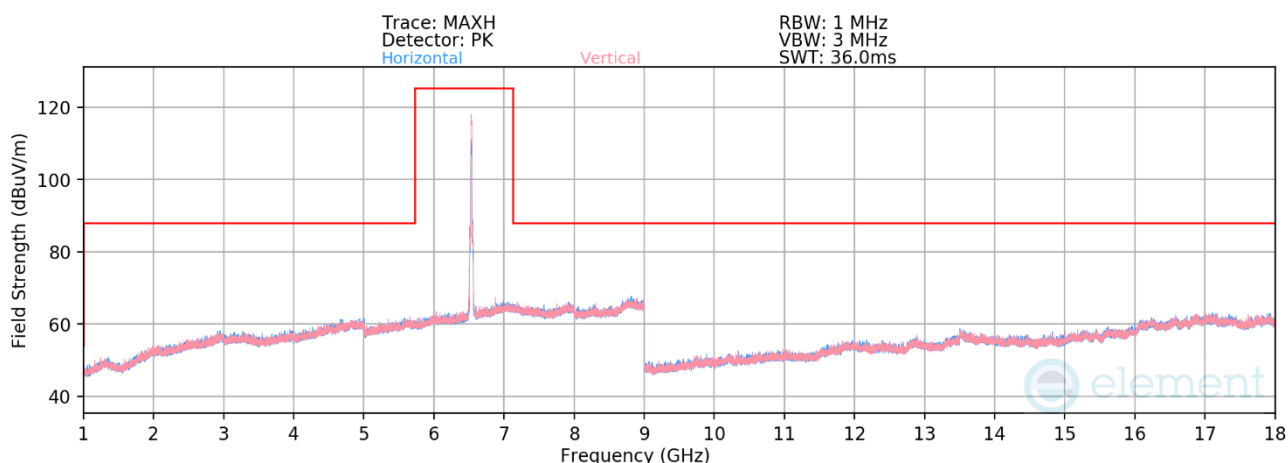

**Plot 7-552. Radiated Spurious Emissions 1-18GHz CDD Diversity (802.11be – Ch. 117)**


Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 6535MHz  
Channel: 117

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13070.00        | Average  | V               | -                   | -                          | -84.98               | 21.85       | 43.87                   | 68.23          | -24.36      |
| 13070.00        | Peak     | V               | -                   | -                          | -73.56               | 21.85       | 55.29                   | 88.23          | -32.94      |


**Table 7-100. Radiated Spurious Emission Measurements CDD Diversity**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 201 of 265                   |

V 11.0 5/2025

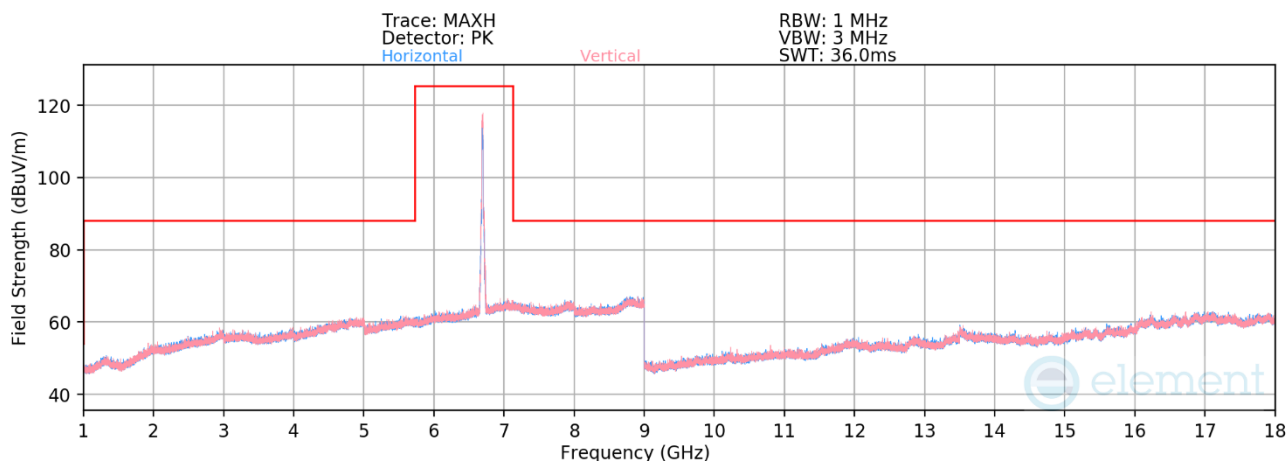

**Plot 7-553. Radiated Spurious Emissions 1-18GHz CDD Diversity (802.11be – Ch. 149)**

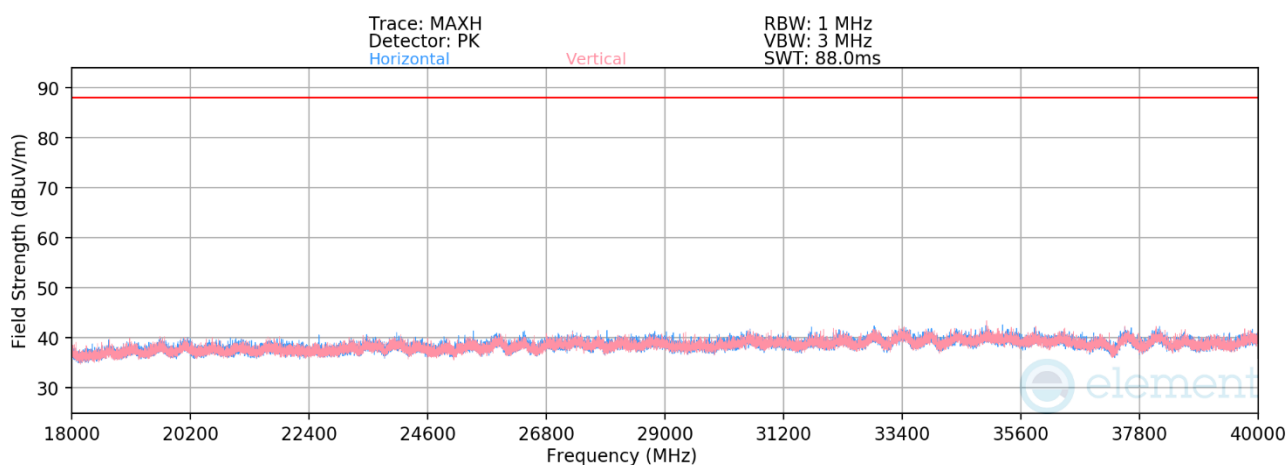


**Plot 7-554. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 149)**

Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 6695MHz  
Channel: 149

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 13390.00      | Average  | H               | -                   | -                          | -85.20               | 22.27       | 0.00                            | 44.07                   | 53.98          | -9.91       |
| * 13390.00      | Peak     | H               | -                   | -                          | -73.49               | 22.27       | 0.00                            | 55.79                   | 73.98          | -18.19      |
| * 20085.00      | Average  | V               | -                   | -                          | -67.78               | -7.97       | -9.54                           | 21.71                   | 53.98          | -32.27      |
| * 20085.00      | Peak     | V               | -                   | -                          | -56.60               | -7.97       | -9.54                           | 32.89                   | 73.98          | -41.09      |
| 26780.00        | Average  | H               | -                   | -                          | -67.66               | -5.23       | -9.54                           | 24.57                   | 68.23          | -43.66      |
| 26780.00        | Peak     | H               | -                   | -                          | -56.58               | -5.23       | -9.54                           | 35.65                   | 88.23          | -52.58      |
| 33475.00        | Average  | V               | -                   | -                          | -65.95               | -4.28       | -9.54                           | 27.23                   | 68.23          | -41.00      |
| 33475.00        | Peak     | V               | -                   | -                          | -54.89               | -4.28       | -9.54                           | 38.29                   | 88.23          | -49.94      |

**Table 7-101. Radiated Spurious Emission Measurements CDD Diversity**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 202 of 265                   |

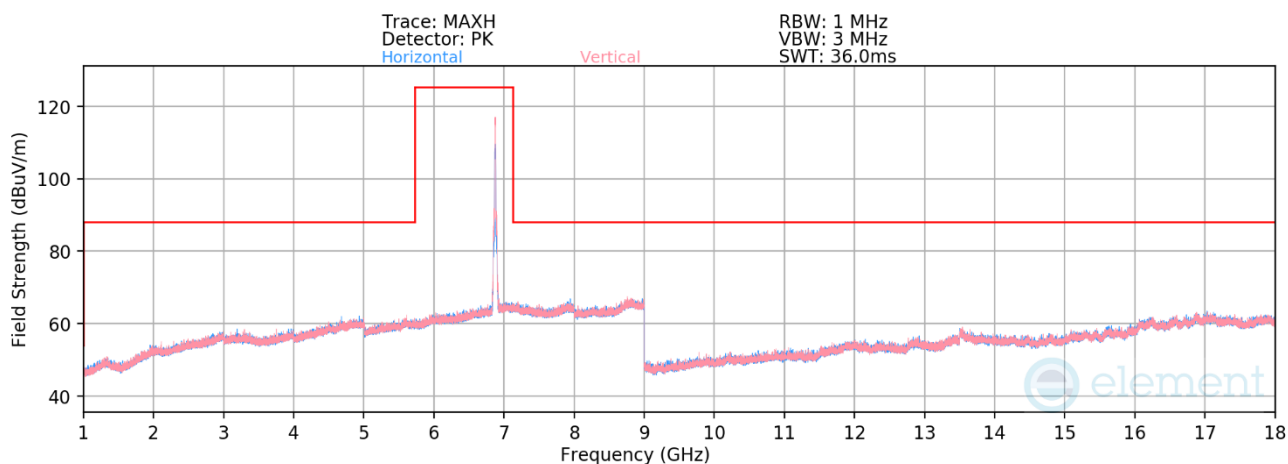

**Plot 7-555. Radiated Spurious Emissions 1-18GHz CDD Diversity (802.11be – Ch. 185)**


Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 6875MHz  
Channel: 185

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13750.00        | Average  | V               | -                   | -                          | -82.97               | 21.79       | 45.82                   | 68.23          | -22.41      |
| 13750.00        | Peak     | V               | -                   | -                          | -71.56               | 21.79       | 57.22                   | 88.23          | -31.01      |

**Table 7-102. Radiated Spurious Emission Measurements CDD Diversity**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 203 of 265                   |

V 11.0 5/2025

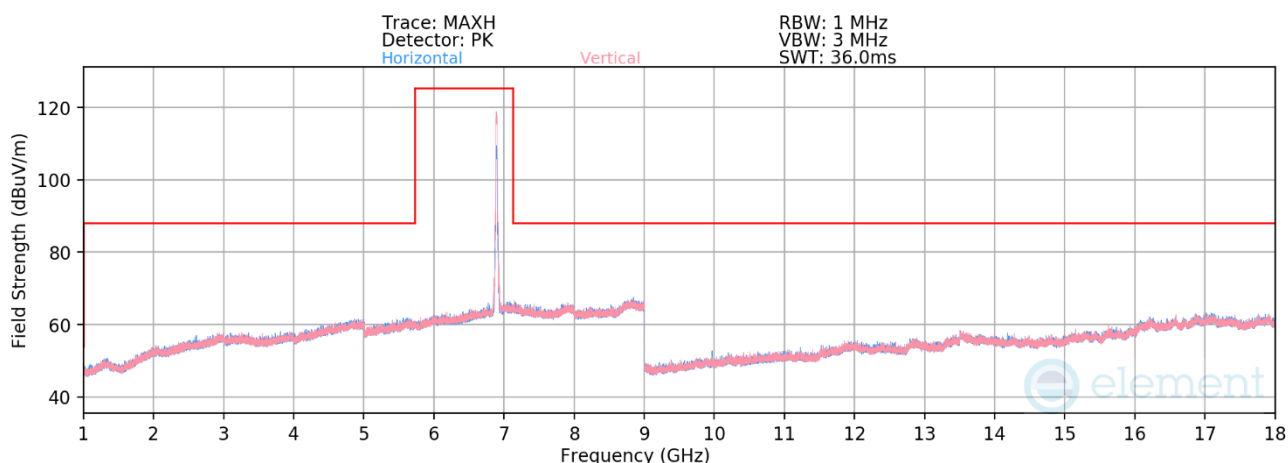

**Plot 7-556. Radiated Spurious Emissions 1-18GHz CDD Diversity (802.11be – Ch. 189)**


Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 6895MHz  
Channel: 189

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 13790.00        | Average  | V               | -                   | -                          | -83.14               | 22.04       | 45.91                   | 68.23          | -22.32      |
| 13790.00        | Peak     | V               | -                   | -                          | -71.73               | 22.04       | 57.31                   | 88.23          | -30.92      |


**Table 7-103. Radiated Spurious Emission Measurements CDD Diversity**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 204 of 265                   |

V 11.0 5/2025

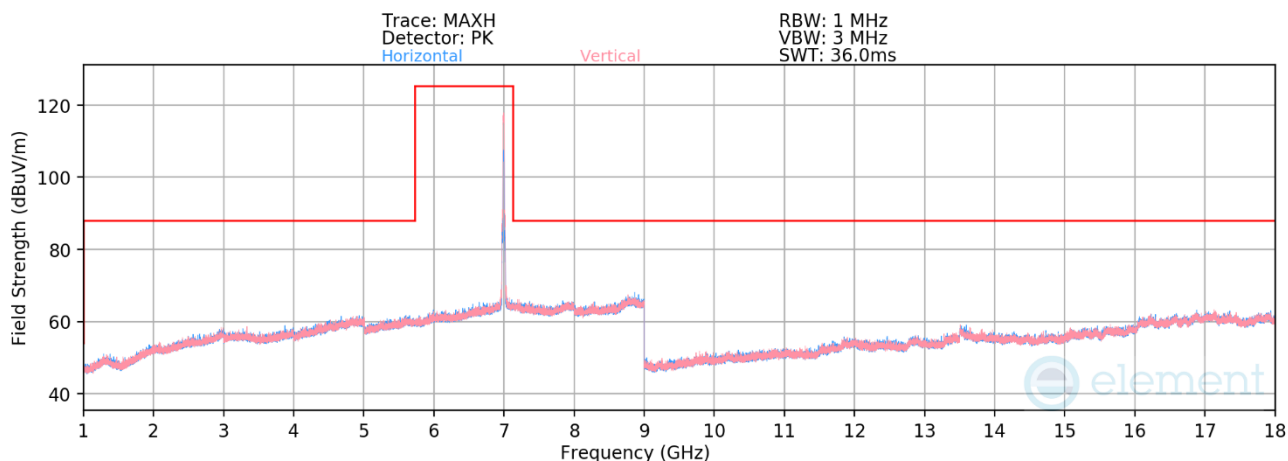

**Plot 7-557. Radiated Spurious Emissions 1-18GHz CDD Diversity (802.11be – Ch. 209)**

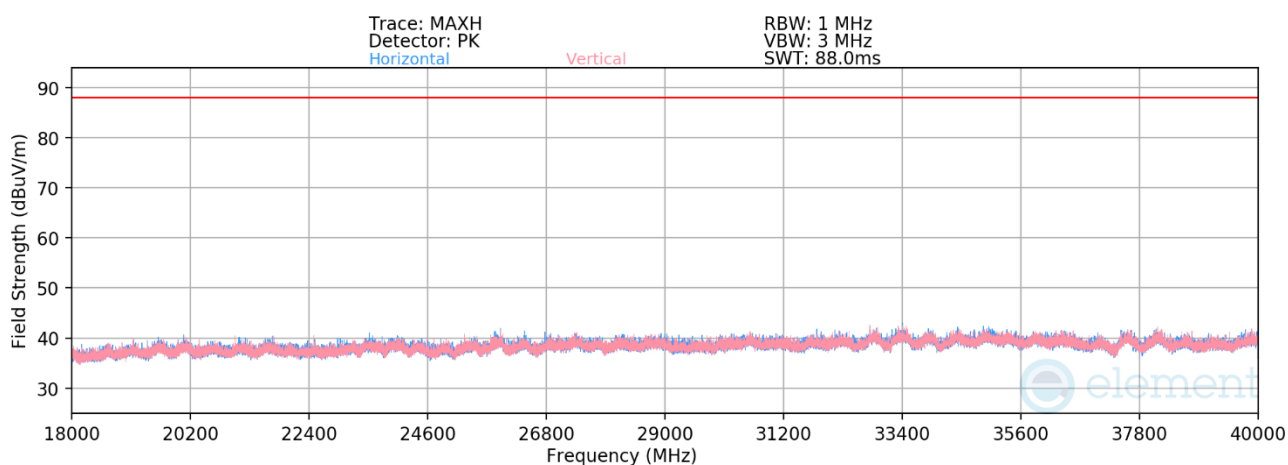

**Plot 7-558. Radiated Spurious Emissions 18-40GHz CDD Diversity (802.11be – Ch. 209)**

Mode: 802.11be

Data Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 6995MHz


Channel: 209

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 13990.00        | Average  | H               | -                   | -                          | -83.53               | 22.02       | 0.00                            | 45.50                   | 68.23          | -22.73      |
| 13990.00        | Peak     | H               | -                   | -                          | -71.94               | 22.02       | 0.00                            | 57.08                   | 88.23          | -31.15      |
| * 20985.00      | Average  | H               | -                   | -                          | -68.94               | -7.45       | -9.54                           | 21.07                   | 53.98          | -32.91      |
| * 20985.00      | Peak     | H               | -                   | -                          | -57.61               | -7.45       | -9.54                           | 32.40                   | 73.98          | -41.58      |
| 27980.00        | Average  | V               | -                   | -                          | -68.20               | -4.29       | -9.54                           | 24.97                   | 68.23          | -43.26      |
| 27980.00        | Peak     | V               | -                   | -                          | -56.59               | -4.29       | -9.54                           | 36.58                   | 88.23          | -51.65      |
| 34975.00        | Average  | V               | -                   | -                          | -66.02               | -4.53       | -9.54                           | 26.91                   | 68.23          | -41.32      |
| 34975.00        | Peak     | V               | -                   | -                          | -53.92               | -4.53       | -9.54                           | 39.01                   | 88.23          | -49.22      |

**Table 7-104. Radiated Spurious Emission Measurements CDD Diversity**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 205 of 265                   |

V 11.0 5/2025

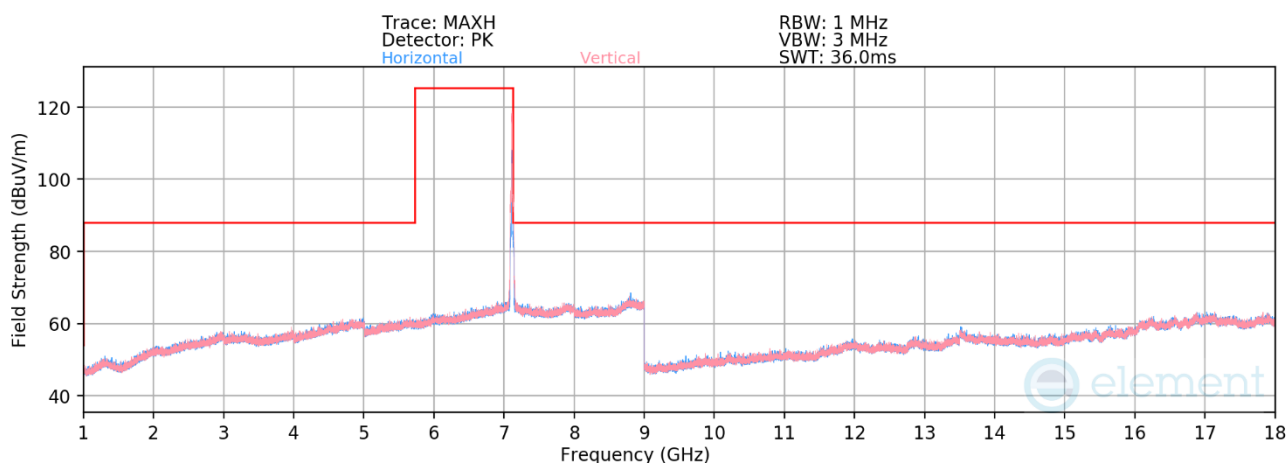

**Plot 7-559. Radiated Spurious Emissions 1-18GHz CDD Diversity (802.11be – Ch. 233)**

Mode: 802.11be  
Data Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 7115MHz  
Channel: 233

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 14230.00        | Average  | V               | -                   | -                          | -84.11               | 22.67       | 45.56                   | 68.23          | -22.67      |
| 14230.00        | Peak     | V               | -                   | -                          | -72.96               | 22.67       | 56.71                   | 88.23          | -31.52      |


**Table 7-105. Radiated Spurious Emission Measurements CDD Diversity**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 206 of 265                   |


V 11.0 5/2025



|                         |          |
|-------------------------|----------|
| Mode                    | 802.11a  |
| Data Rate               | 54Mbps   |
| Distance of Measurement | 3 Meters |
| Operating Frequency     | 7115MHz  |
| Channel                 | 233      |

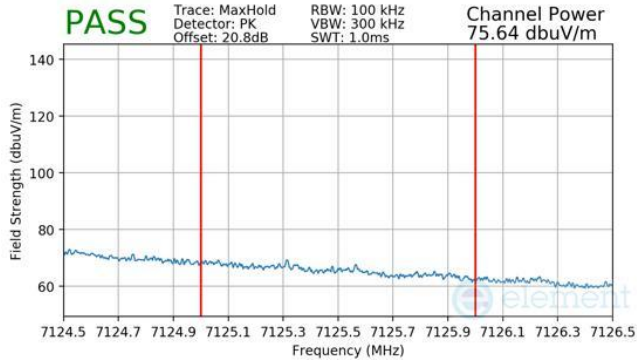


Plot 7-562 Antenna 5T Radiated Integrated Band Edge (Peak – UNII Band 8)

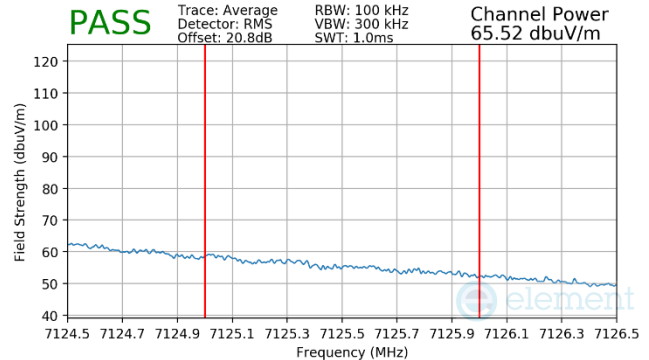

Plot 7-563 Antenna 5T Radiated Integrated Band Edge (Average – UNII Band 8)


|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 5955MHz     |
| Channel                 | 1           |

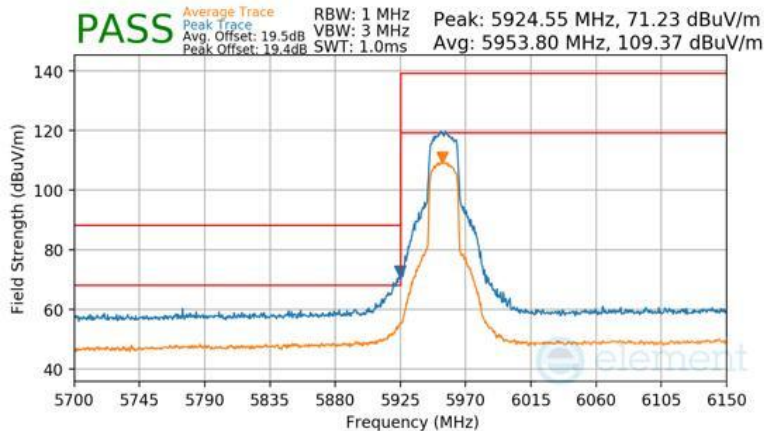

Plot 7-564 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)


|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 208 of 265                   |

|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 5975MHz     |
| Channel                 | 5           |

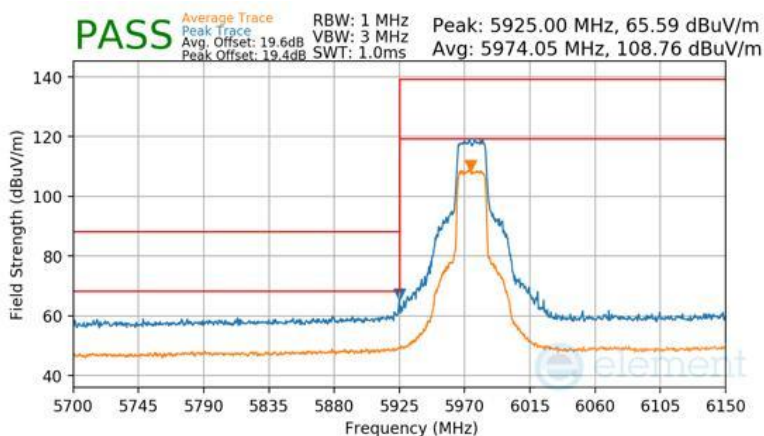

Plot 7-565 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)


|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 7095MHz     |
| Channel                 | 229         |

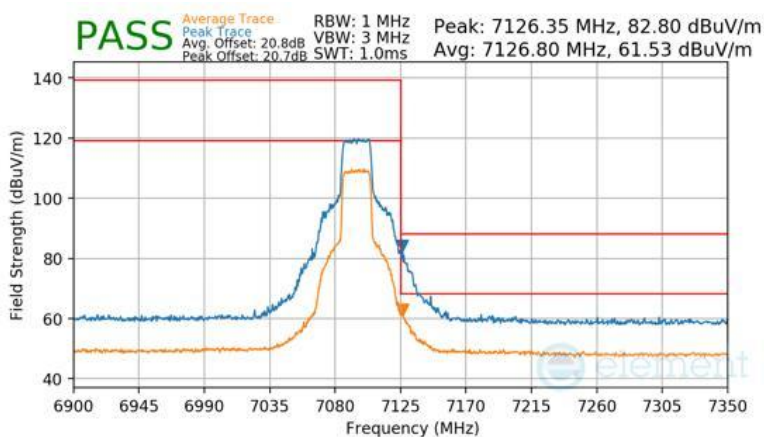


Plot 7-566 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8)

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 209 of 265                   |

|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 7115MHz     |
| Channel                 | 233         |

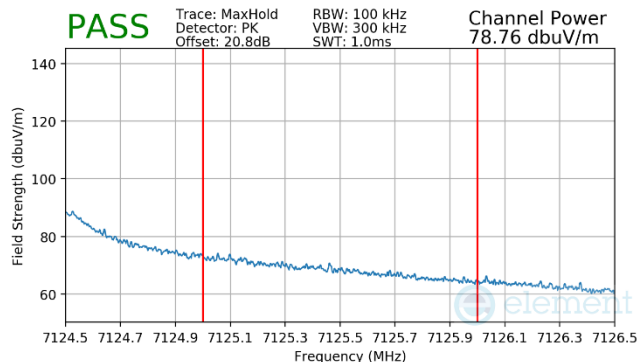

**Plot 7-567 Antenna 5T Radiated Integrated Band Edge (Peak – UNII Band 8)**

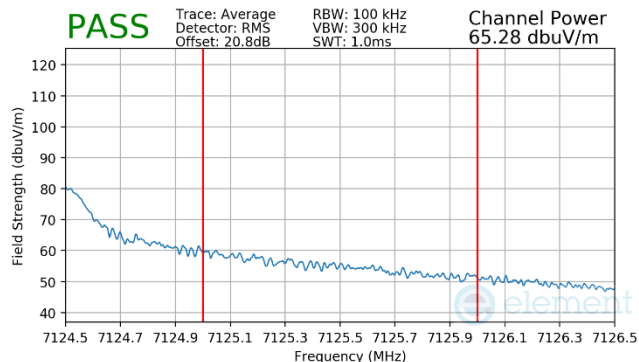


**Plot 7-568 Antenna 5T Radiated Integrated Band Edge (Average – UNII Band 8)**

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 210 of 265                   |

V 11.0 5/2025


## 7.7.4 Antenna 5T Radiated Band Edge Measurements (40MHz BW)

|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 5965MHz     |
| Channel                 | 3           |

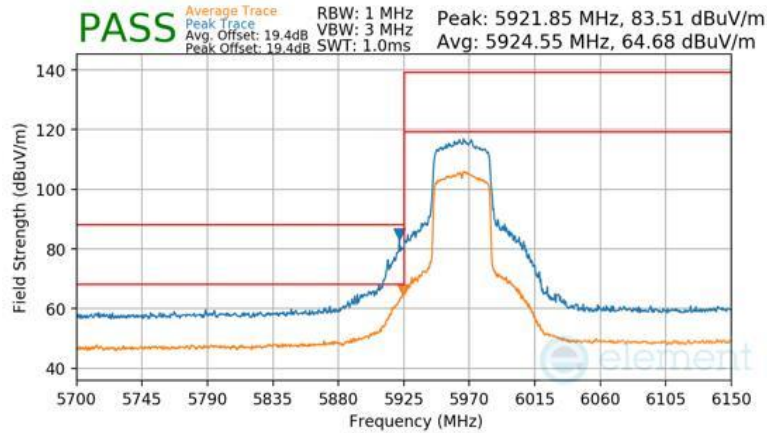

Plot 7-569 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 6005MHz     |
| Channel                 | 11          |

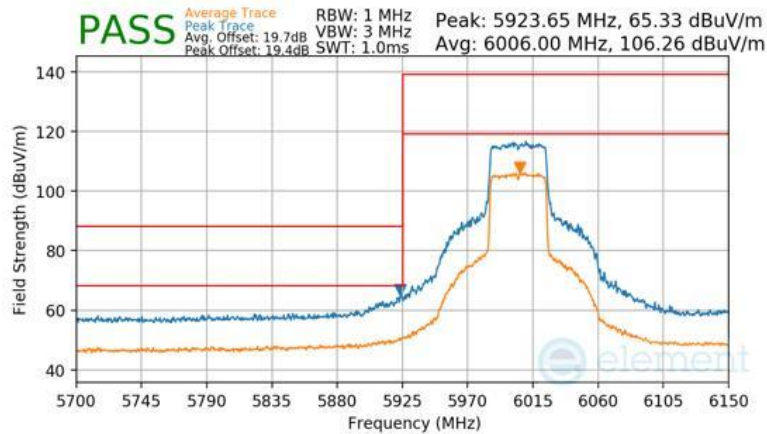


Plot 7-570 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 211 of 265                   |

V 11.0 5/2025

|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 7085MHz     |
| Channel                 | 227         |

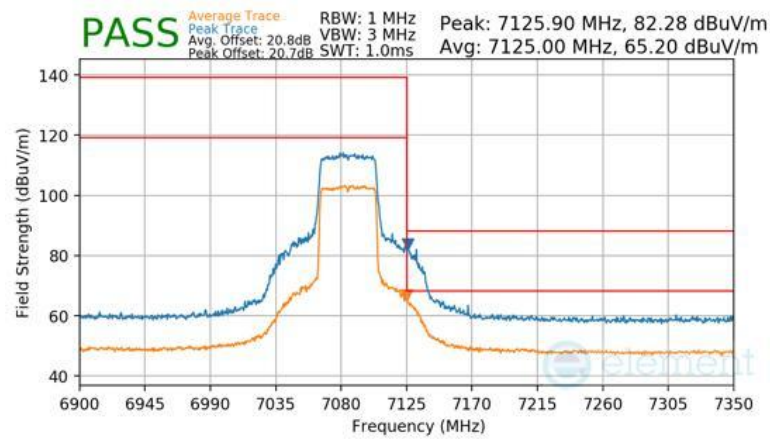


Plot 7-571 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8)

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 212 of 265                   |


## 7.7.5 Antenna 5T Radiated Band Edge Measurements (80MHz BW)

|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 5985MHz     |
| Channel                 | 7           |

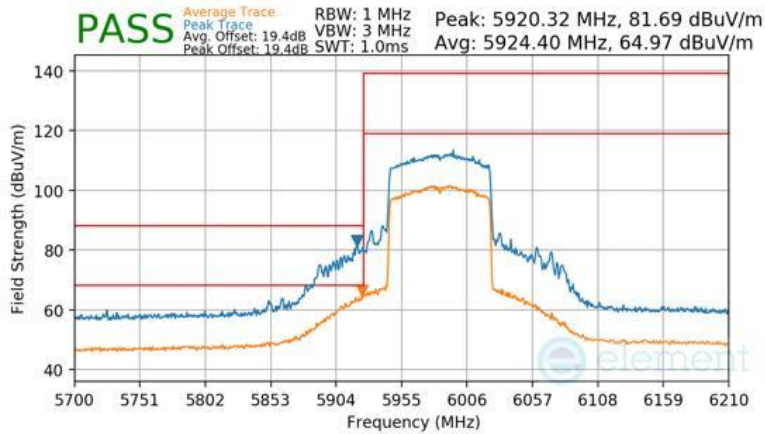

Plot 7-572 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 6065MHz     |
| Channel                 | 23          |

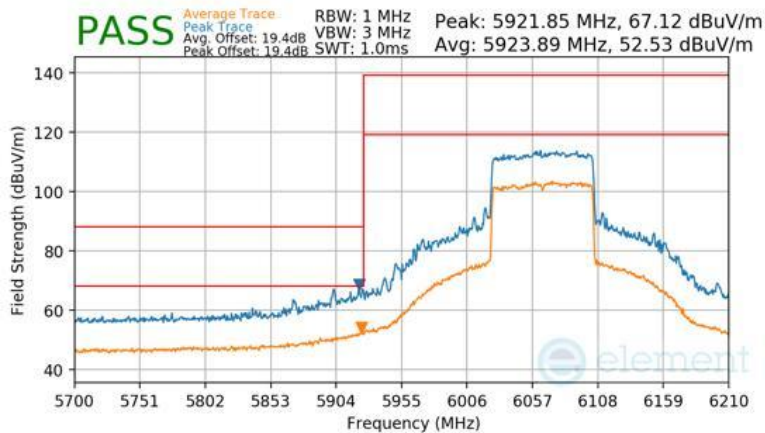


Plot 7-573 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 213 of 265                   |


V 11.0 5/2025

|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 6945MHz     |
| Channel                 | 199         |

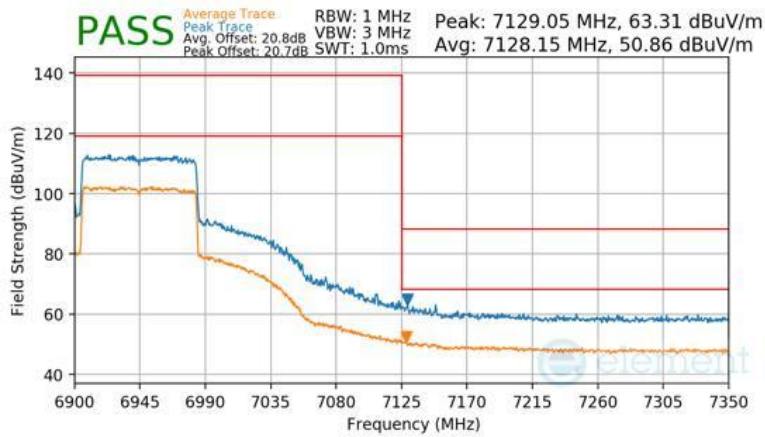

Plot 7-574 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8)

|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 7025MHz     |
| Channel                 | 215         |

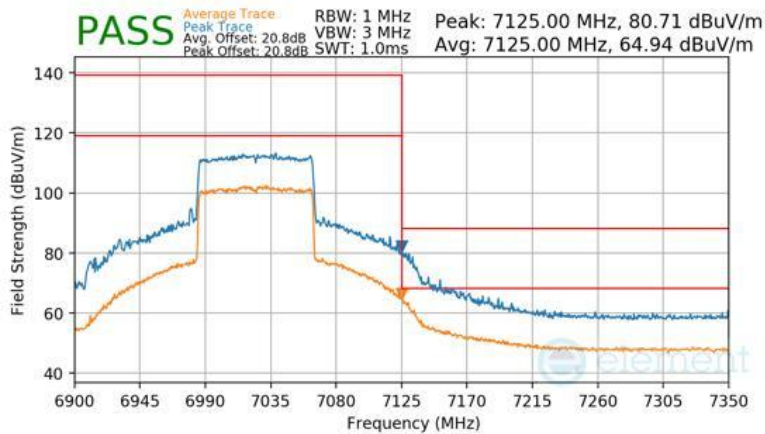


Plot 7-575 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8)

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 214 of 265                   |


## 7.7.6 Antenna 5T Radiated Band Edge Measurements (160MHz BW)

|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 6025MHz     |
| Channel                 | 15          |

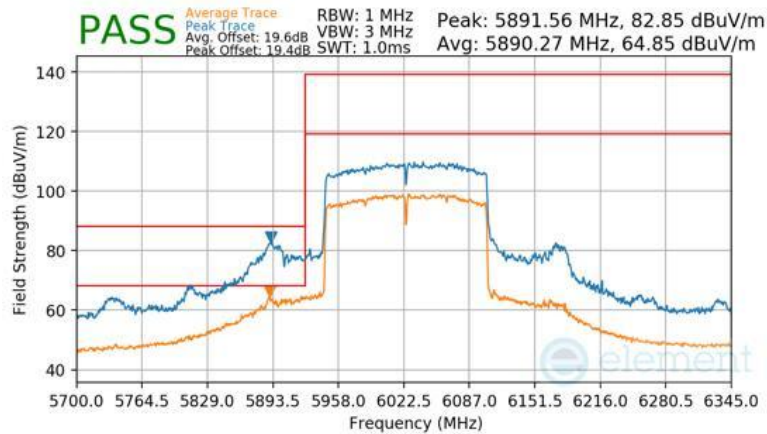

Plot 7-576 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 6185MHz     |
| Channel                 | 47          |

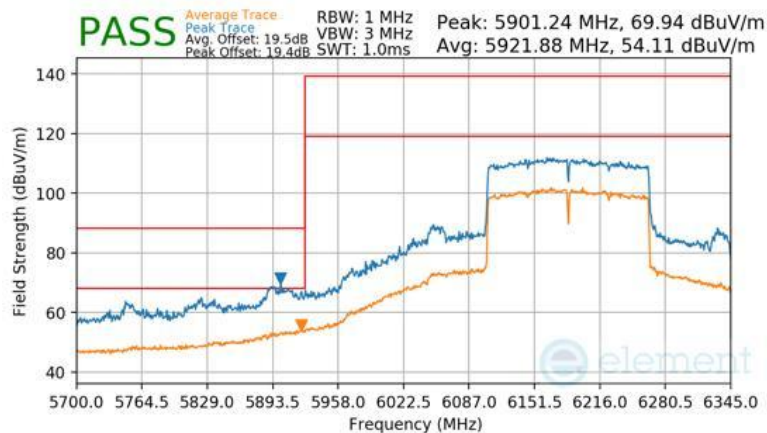


Plot 7-577 Antenna 5T Radiated Lower Band Edge (Peak & Average – UNII Band 5)

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 215 of 265                   |


V 11.0 5/2025

|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 6825MHz     |
| Channel                 | 175         |

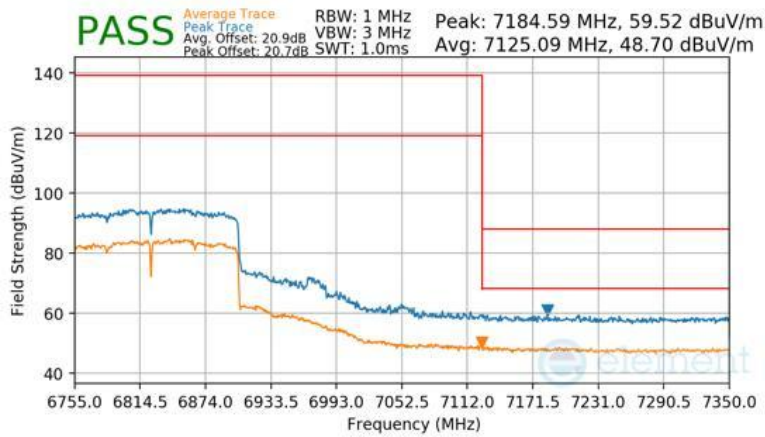

Plot 7-578 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 7)

|                         |             |
|-------------------------|-------------|
| Mode                    | 802.11be-SU |
| Data Rate               | MCS11       |
| Distance of Measurement | 3 Meters    |
| Operating Frequency     | 6985MHz     |
| Channel                 | 207         |

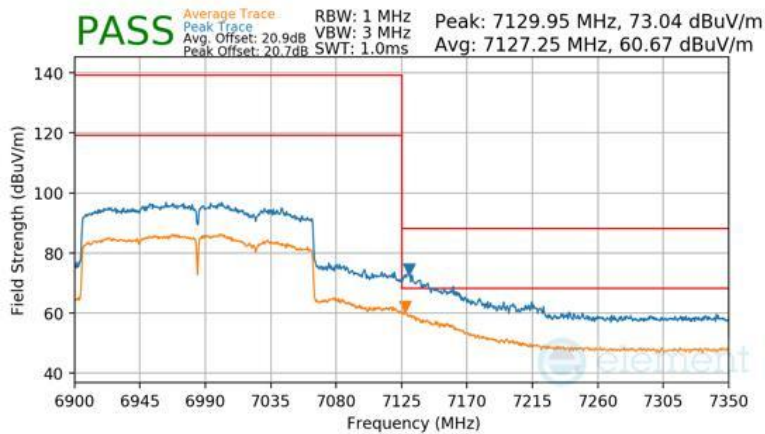


Plot 7-579 Antenna 5T Radiated Upper Band Edge (Peak & Average – UNII Band 8)

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 216 of 265                   |


## 7.7.7 Antenna 3b Radiated Band Edge Measurements (20MHz BW)

|                         |          |
|-------------------------|----------|
| Mode                    | 802.11a  |
| Data Rate               | 54Mbps   |
| Distance of Measurement | 3 Meters |
| Operating Frequency     | 5955MHz  |
| Channel                 | 1        |

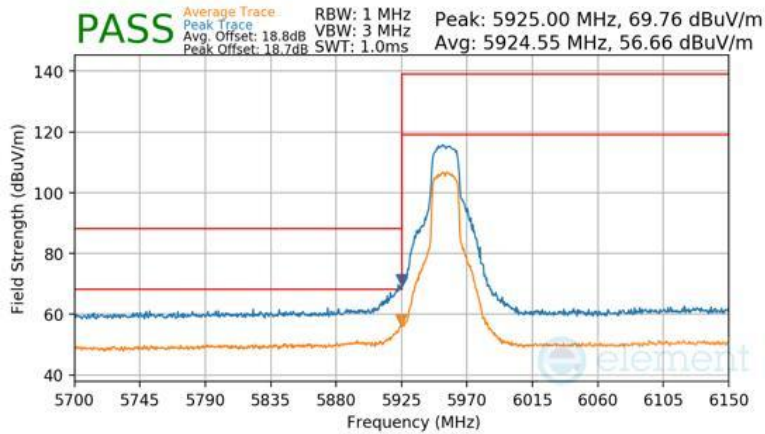

Plot 7-580 Antenna 3b Radiated Lower Band Edge (Peak & Average – UNII Band 5)

|                         |          |
|-------------------------|----------|
| Mode                    | 802.11a  |
| Data Rate               | 54Mbps   |
| Distance of Measurement | 3 Meters |
| Operating Frequency     | 7095MHz  |
| Channel                 | 229      |

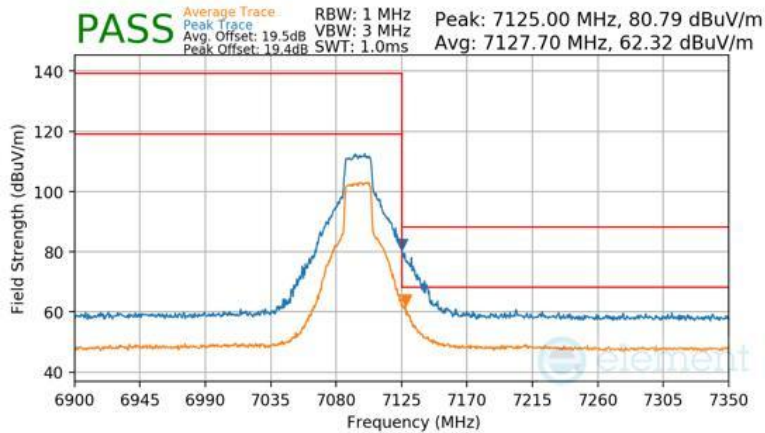

Plot 7-581 Antenna 3b Radiated Upper Band Edge (Peak & Average – UNII Band 8)

|                                            |                                                                                     |                                       |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------|
| FCC ID: BCGA3462<br>IC: 579C-A3462         |  | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2509100082-24-R3.BCG | Test Dates:<br>9/15/2025 - 12/10/2025                                               | EUT Type:<br>Tablet Device            | Page 217 of 265                   |

V 11.0 5/2025