

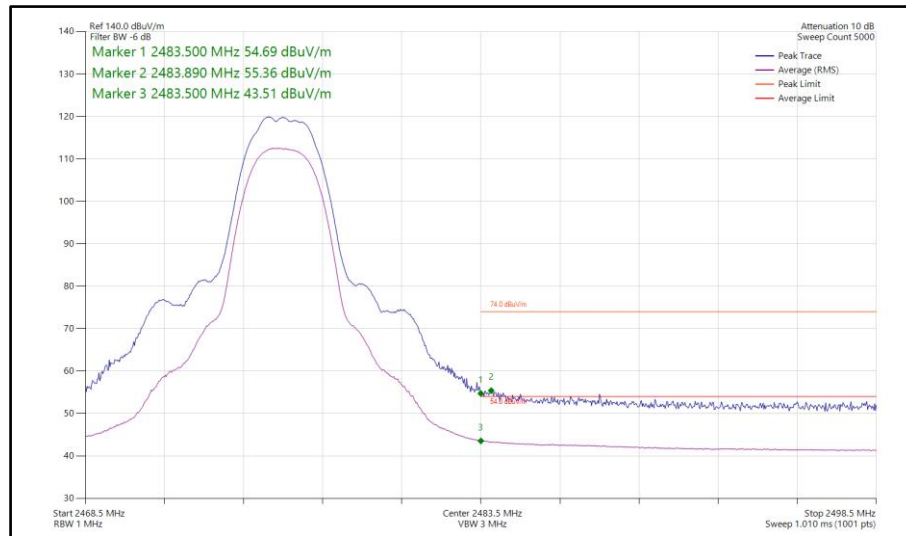


**Figure 163 - Bluetooth HDT6, SISO, Core 1 - 2476 MHz
Band Edge Frequency 2483.5 MHz**

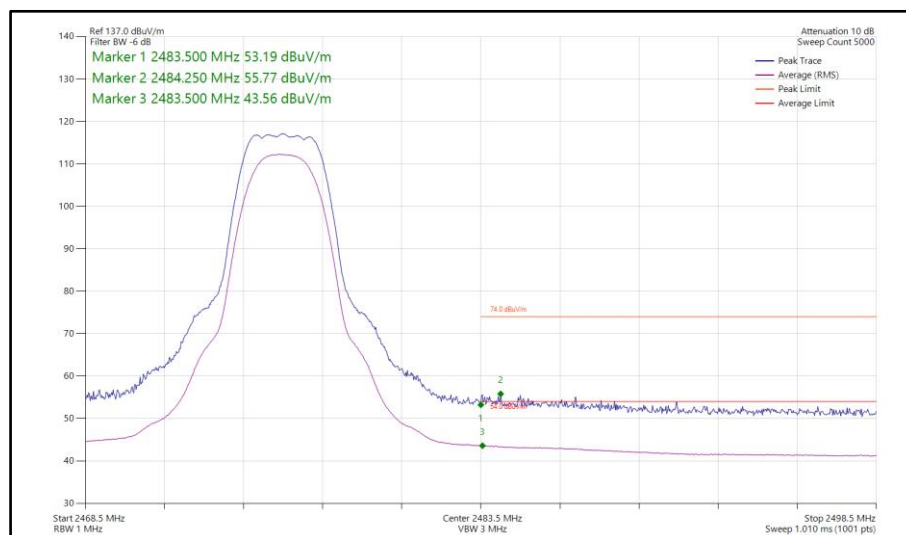


**Figure 164 - Bluetooth HDRPS2, SISO, Core 1 - 2476 MHz
Band Edge Frequency 2483.5 MHz**

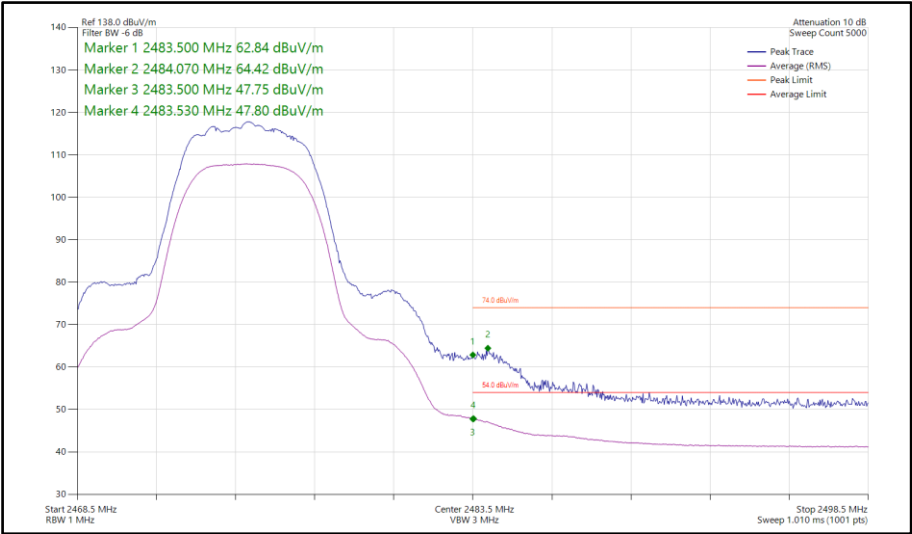


Figure 165 - Bluetooth HDRPM12, SISO, Core 1 - 2475 MHz
Band Edge Frequency 2483.5 MHz

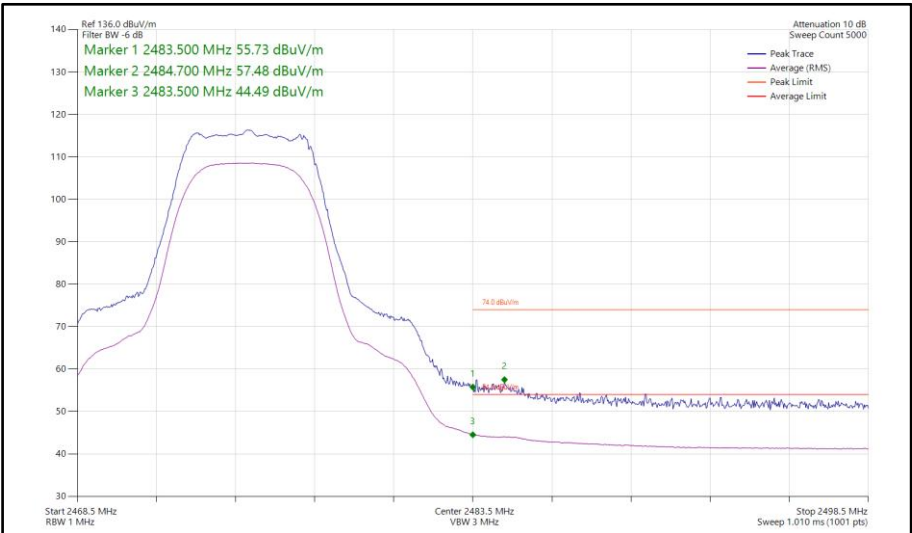


Figure 166 - Bluetooth XHDRPM8, SISO, Core 1 - 2475 MHz
Band Edge Frequency 2483.5 MHz

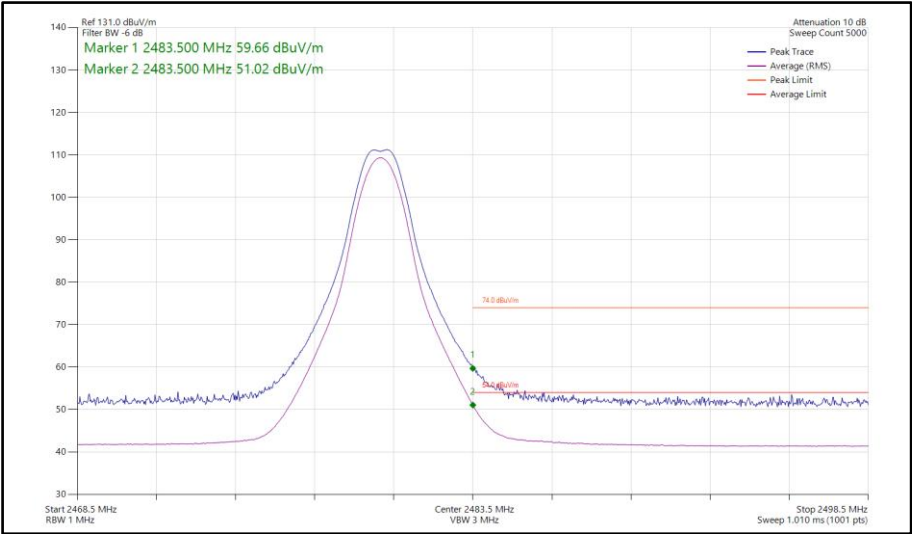


Figure 167 - Bluetooth CS1LE1M, SISO, Core 1 - 2480 MHz
Band Edge Frequency 2483.5 MHz

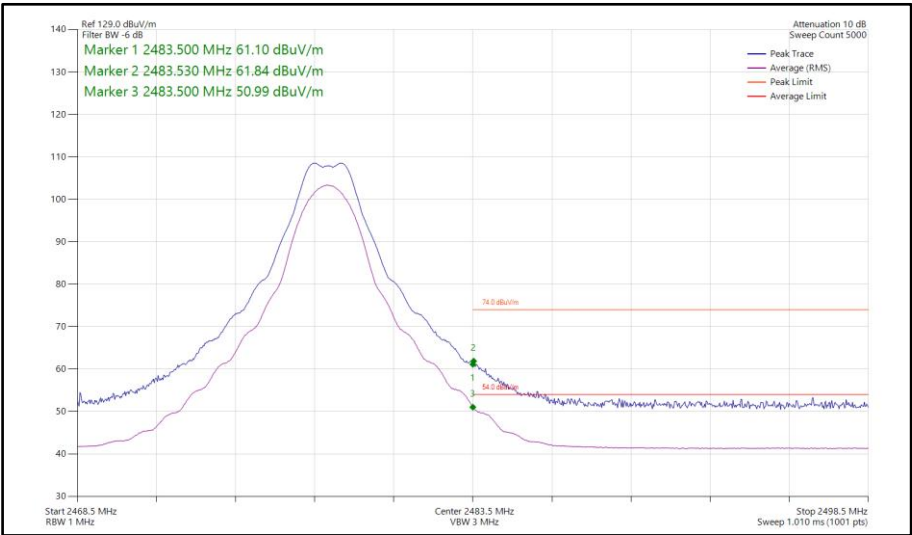


Figure 168 - Bluetooth CS1LE2M, SISO, Core 1 - 2478 MHz
Band Edge Frequency 2483.5 MHz



ePA - Core 0-1 (MIMO)

Mode	Packet Type	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBuV/m)
Static	2DH5	2402	2390	57.81	45.52
Static	3DH5	2402	2390	56.80	44.76
Static	HDR4	2404	2390	56.30	44.77
Static	HDR8	2404	2390	56.22	44.52
Static	LE1M	2402	2390	57.06	45.29
Static	LE2M	2404	2390	56.18	44.43
Static	HDT3	2404	2390	56.79	45.05
Static	HDT4	2404	2390	56.54	44.98
Static	HDT6	2404	2390	59.53	48.17
Static	HDRPS2	2404	2390	57.22	45.10
Static	HDRPM12	2404	2390	56.62	45.00
Static	XHDRPM8	2404	2390	55.62	44.35
Static	CS1LE1M	2402	2390	57.22	45.39
Static	CS1LE2M	2404	2390	57.25	44.50
Static	2DH5	2480	2483.5	60.90	48.70
Static	3DH5	2480	2483.5	61.97	49.12
Static	HDR4	2476	2483.5	57.16	45.27
Static	HDR8	2476	2483.5	59.49	47.02
Static	LE1M	2480	2483.5	59.78	47.92
Static	LE2M	2478	2483.5	57.90	45.61
Static	HDT3	2476	2483.5	57.71	46.15
Static	HDT4	2476	2483.5	58.31	46.75
Static	HDT6	2476	2483.5	59.95	47.11
Static	HDRPS2	2476	2483.5	56.75	45.62
Static	HDRPM12	2475	2483.5	67.20	50.87
Static	XHDRPM8	2475	2483.5	59.05	46.59
Static	CS1LE1M	2480	2483.5	60.29	51.46
Static	CS1LE2M	2478	2483.5	61.41	50.87

Table 13 - MIMO Restricted Band Edge Results

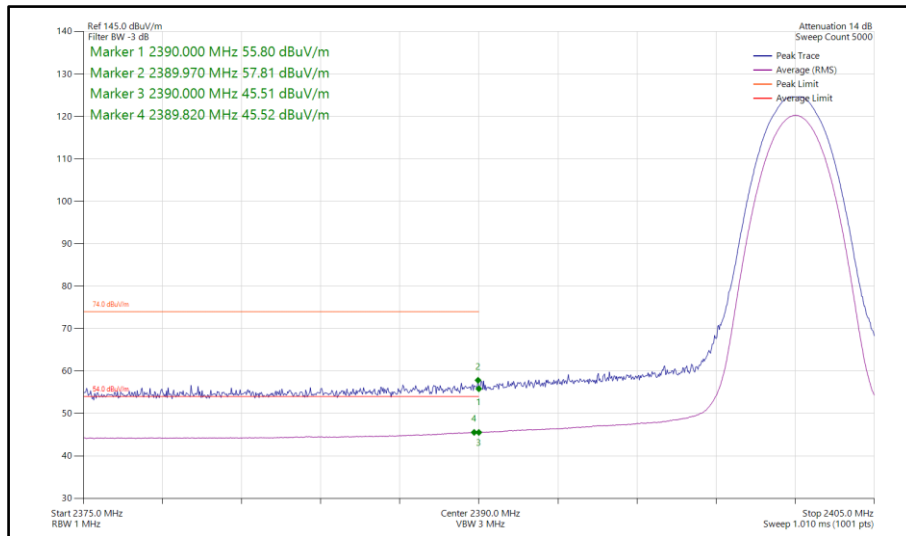


**Figure 169 - Bluetooth 2DH5, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2390 MHz**

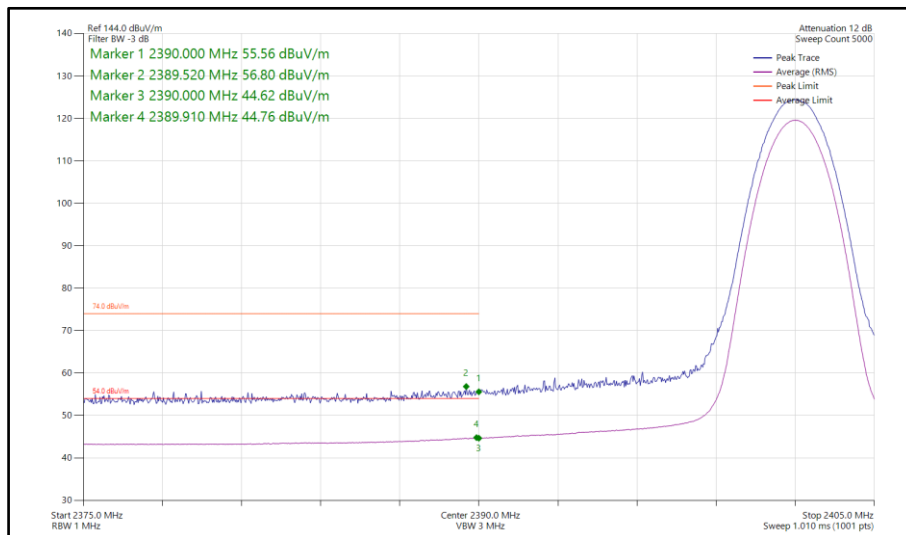


**Figure 170 - Bluetooth 3DH5, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2390 MHz**

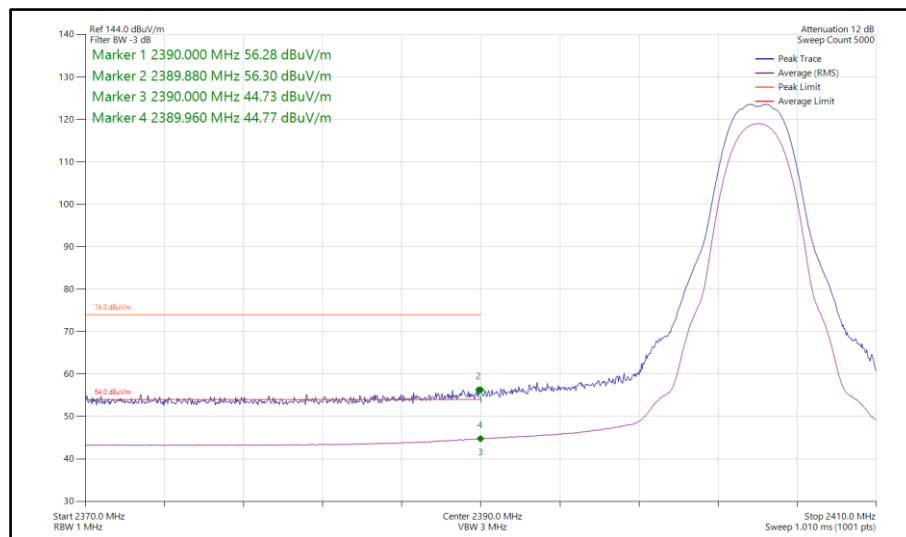


**Figure 171 - Bluetooth HDR4, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

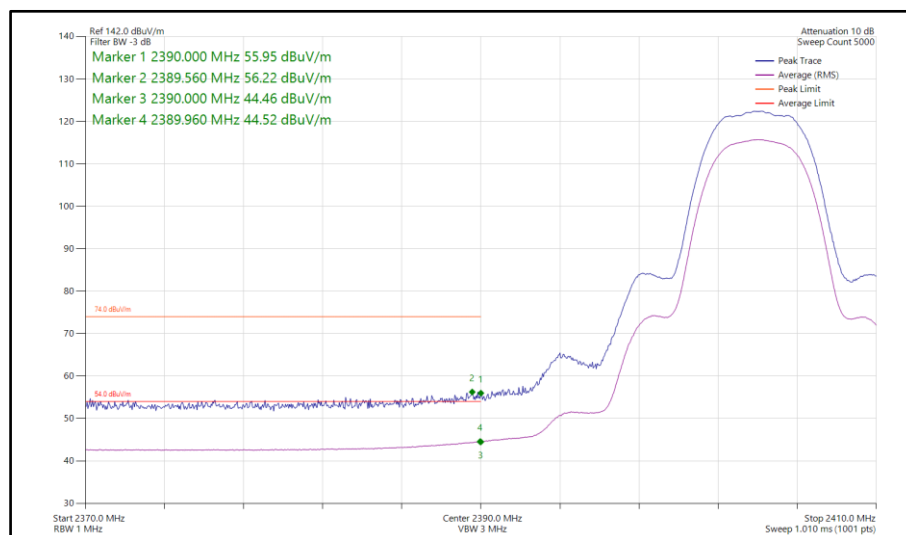


**Figure 172 - Bluetooth HDR8, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

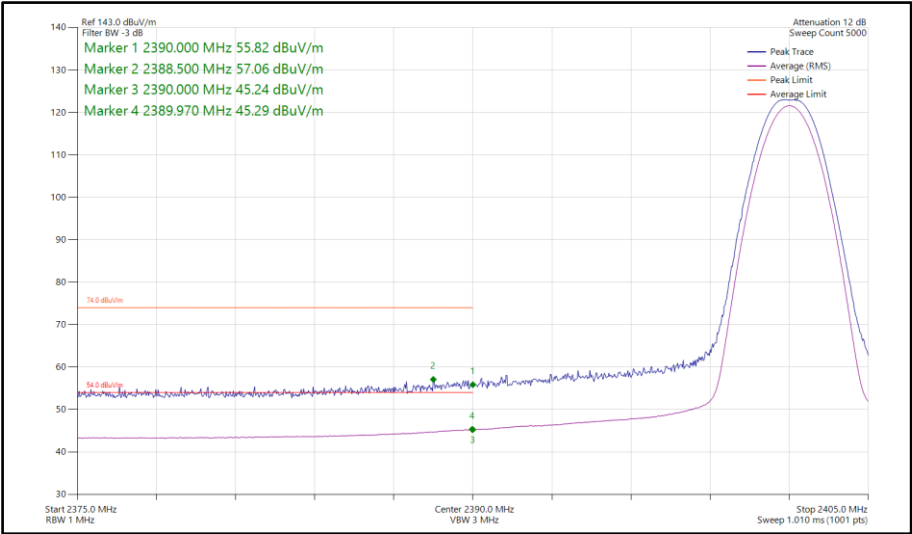


Figure 173 - Bluetooth LE1M, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2390 MHz

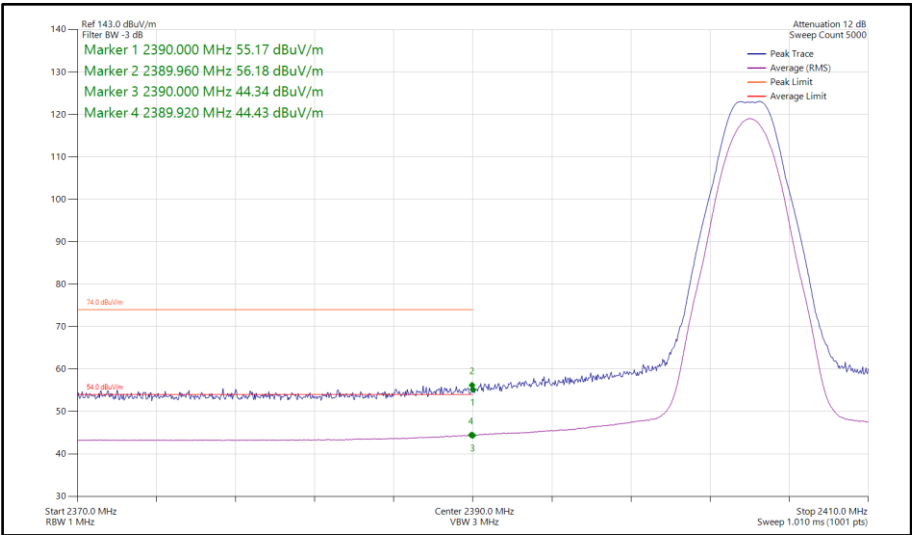


Figure 174 - Bluetooth LE2M, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz

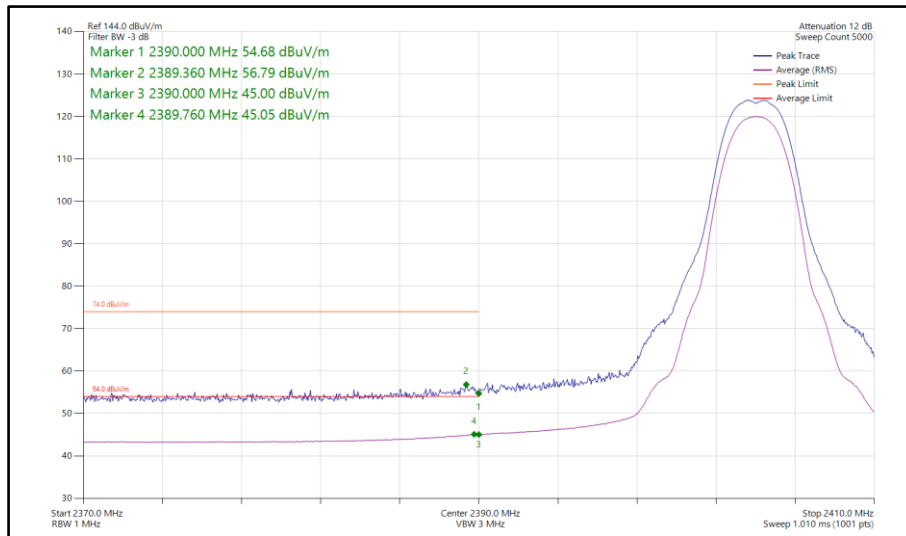


**Figure 175 - Bluetooth HDT3, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

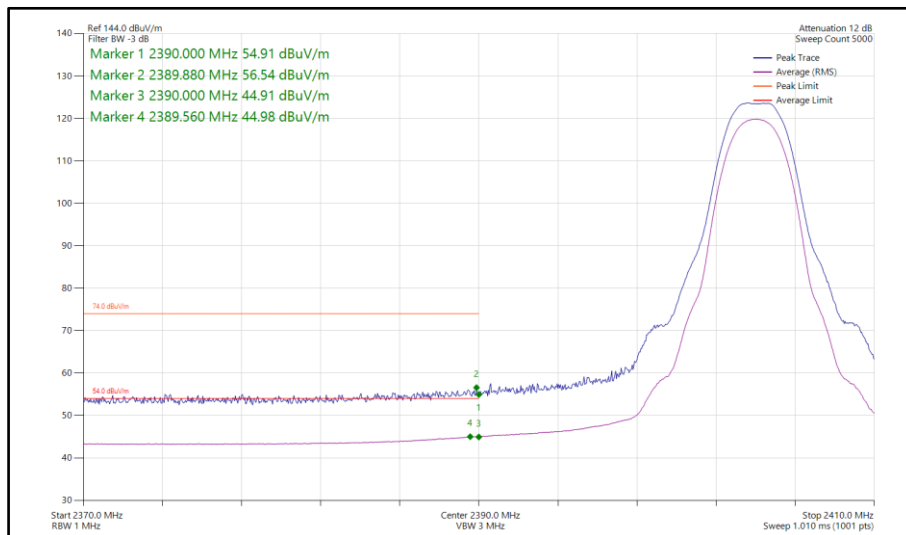


**Figure 176 - Bluetooth HDT4, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

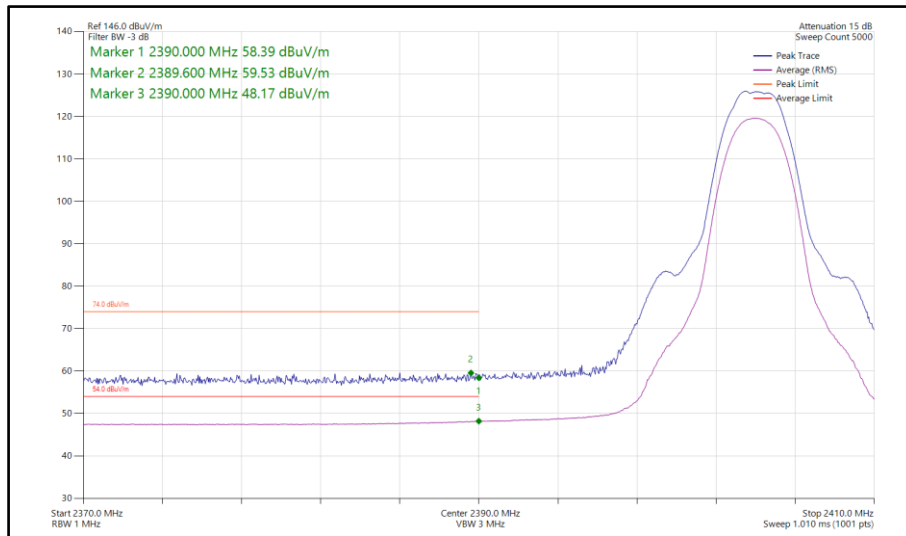


**Figure 177 - Bluetooth HDT6, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

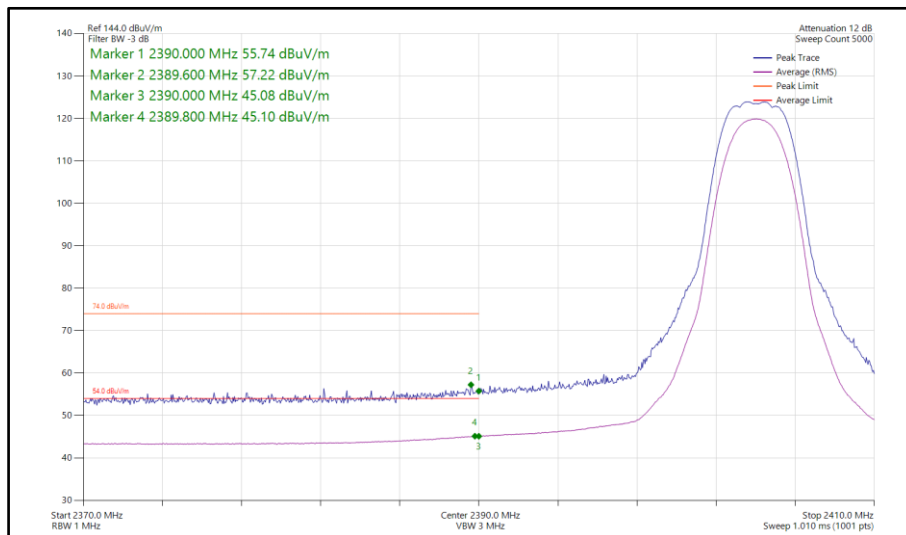


**Figure 178 - Bluetooth HDRPS2, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

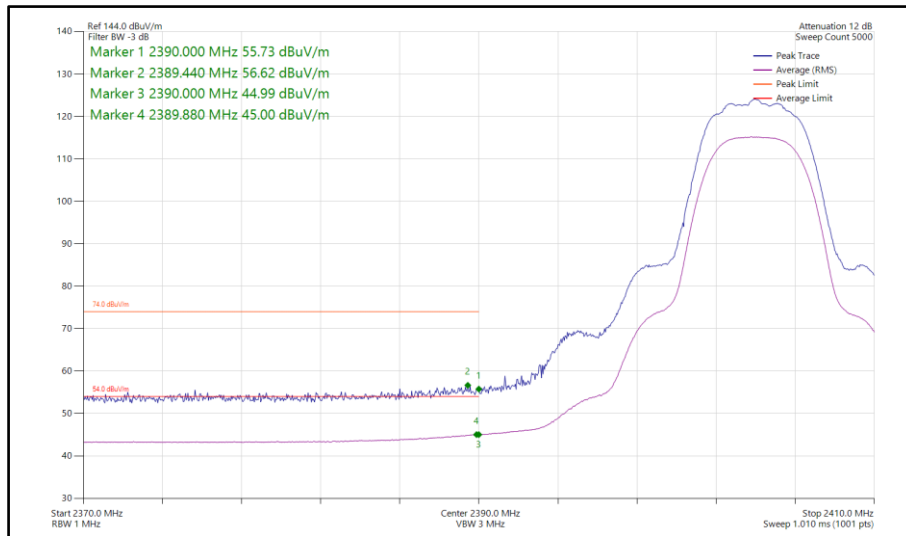


**Figure 179 - Bluetooth HDRPM12, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

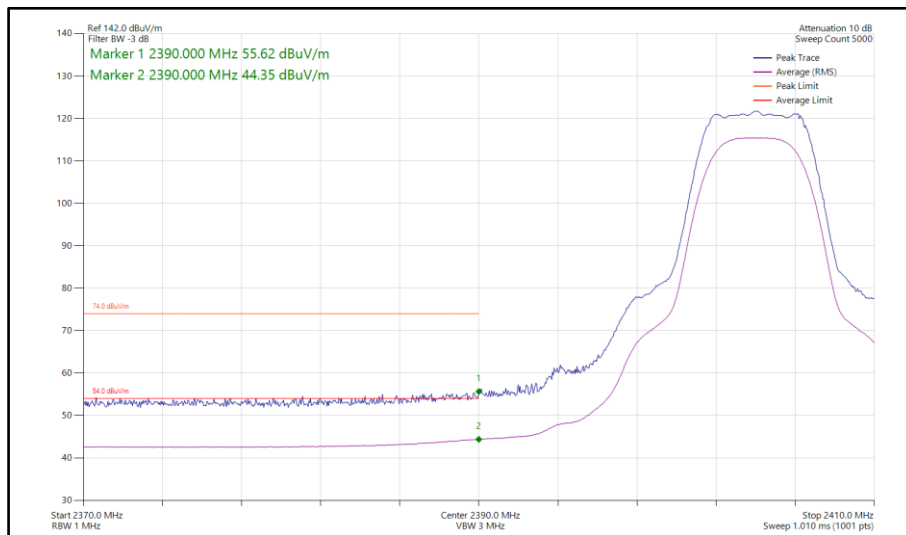


**Figure 180 - Bluetooth XHDRPM8, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz**

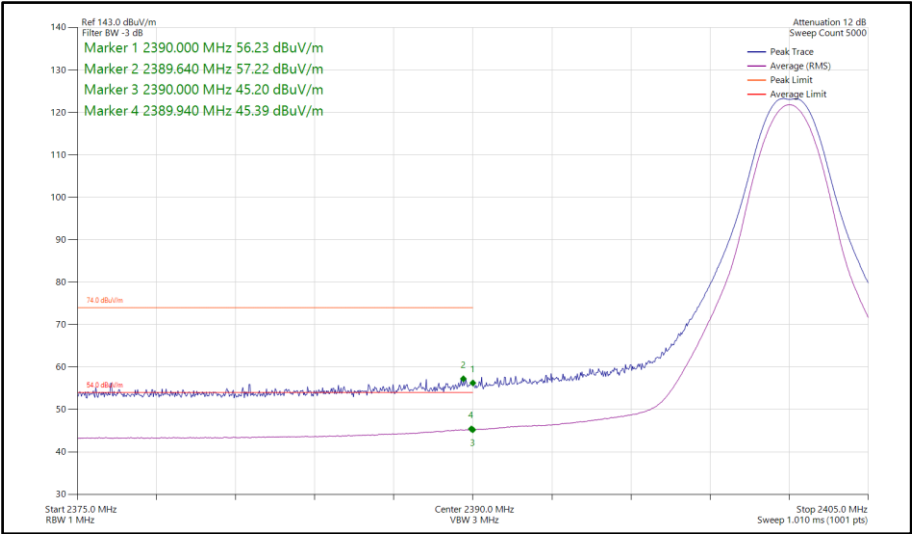


Figure 181 - Bluetooth CS1LE1M, MIMO, Core 0-1 - 2402 MHz
Band Edge Frequency 2390 MHz

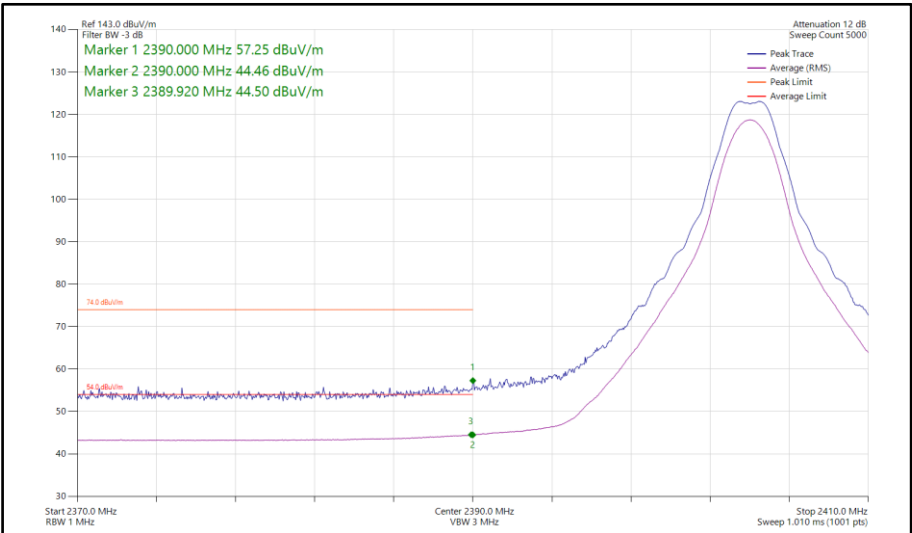


Figure 182 - Bluetooth CS1LE2M, MIMO, Core 0-1 - 2404 MHz
Band Edge Frequency 2390 MHz

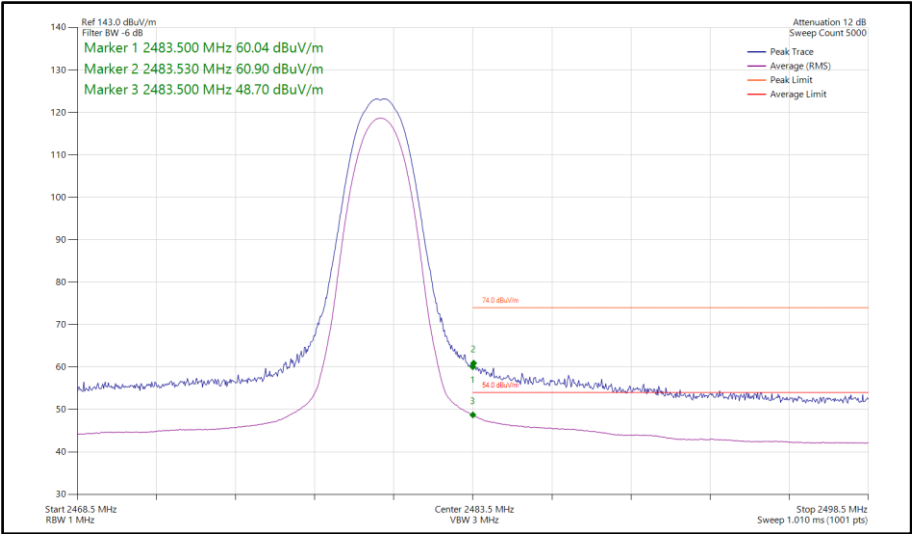


Figure 183 - Bluetooth 2DH5, MIMO, Core 0-1 - 2480 MHz
Band Edge Frequency 2483.5 MHz

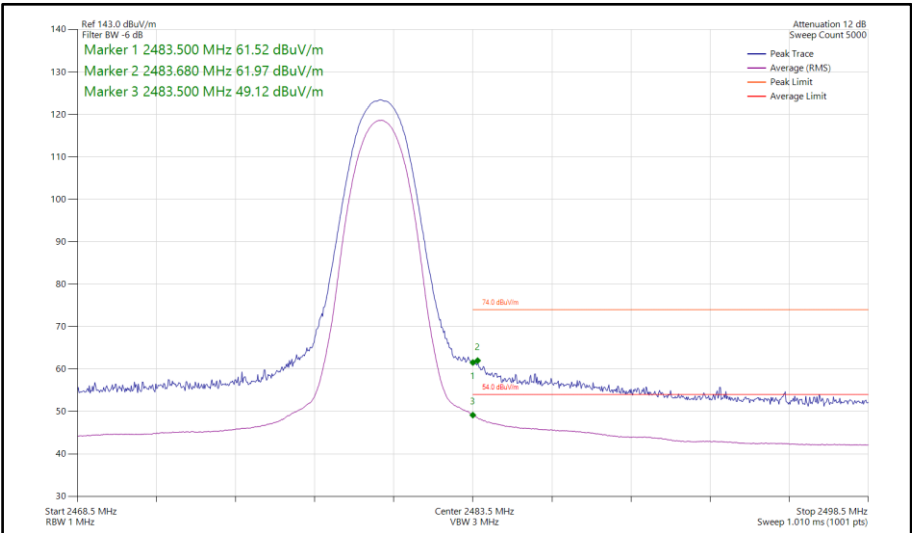


Figure 184 - Bluetooth 3DH5, MIMO, Core 0-1 - 2480 MHz
Band Edge Frequency 2483.5 MHz

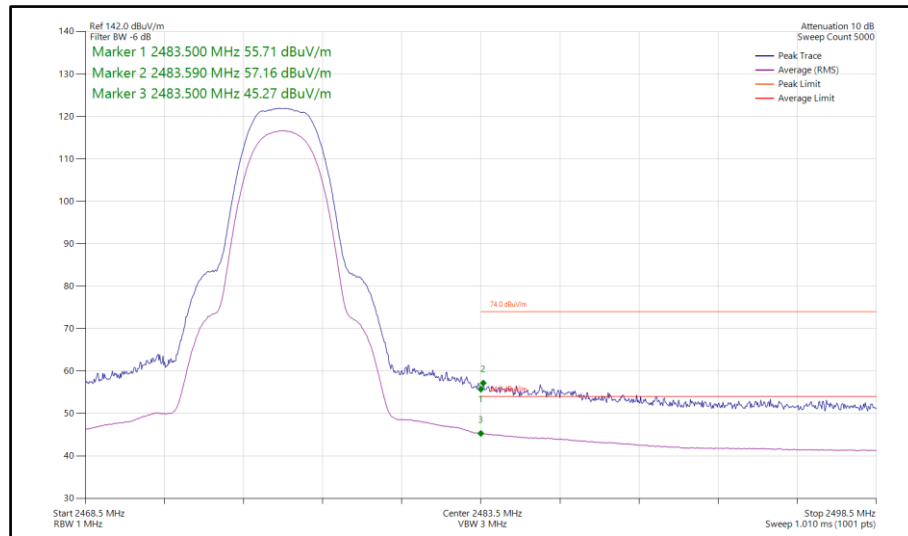


**Figure 185 - Bluetooth HDR4, MIMO, Core 0-1 - 2476 MHz
Band Edge Frequency 2483.5 MHz**

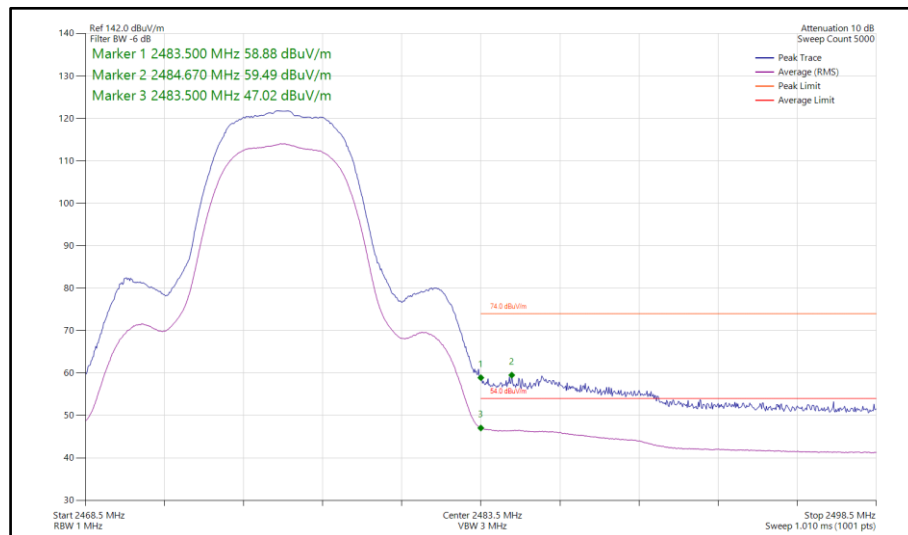


**Figure 186 - Bluetooth HDR8, MIMO, Core 0-1 - 2476 MHz
Band Edge Frequency 2483.5 MHz**

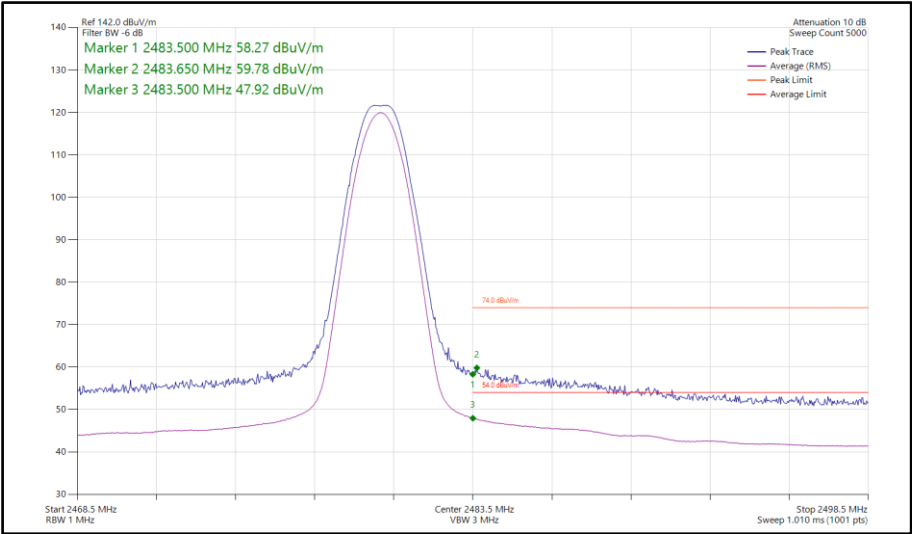


Figure 187 - Bluetooth LE1M, MIMO, Core 0-1 - 2480 MHz
Band Edge Frequency 2483.5 MHz

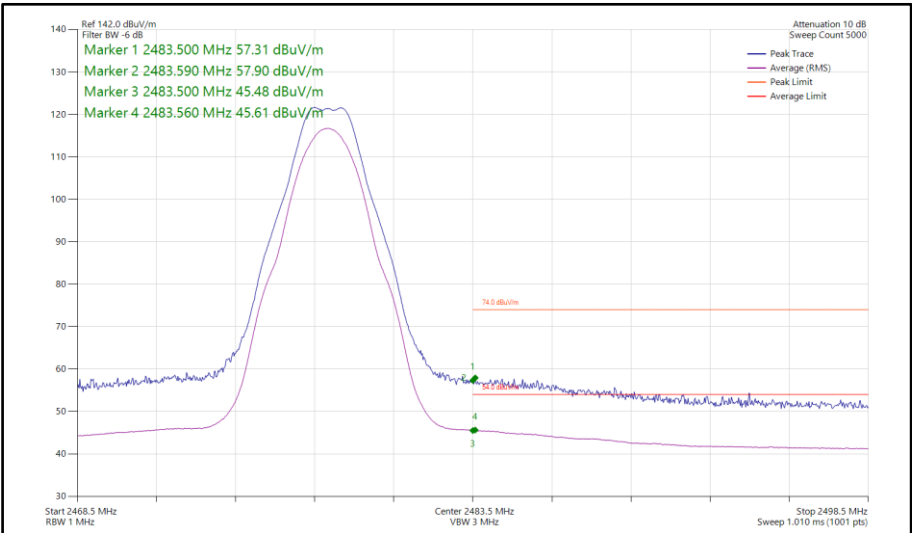


Figure 188 - Bluetooth LE2M, MIMO, Core 0-1 - 2478 MHz
Band Edge Frequency 2483.5 MHz

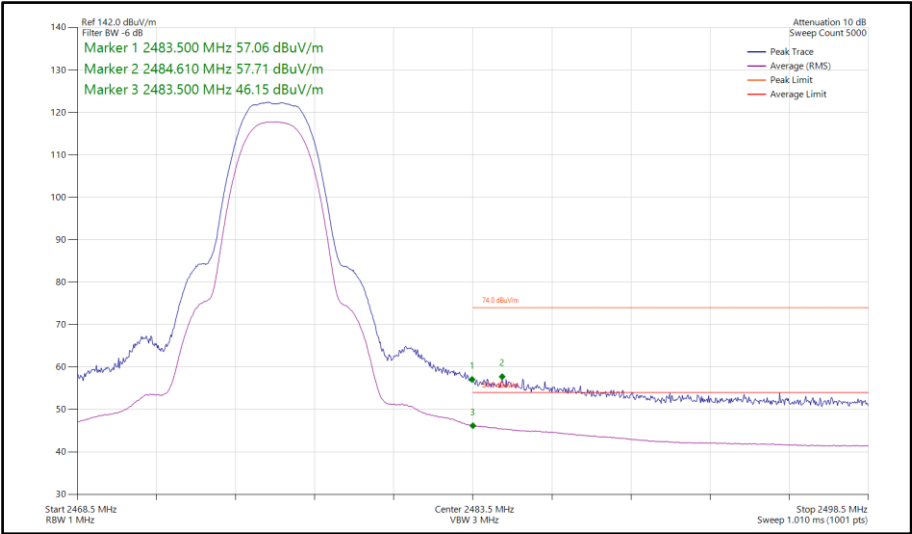


Figure 189 - Bluetooth HDT3, MIMO, Core 0-1 - 2476 MHz
Band Edge Frequency 2483.5 MHz

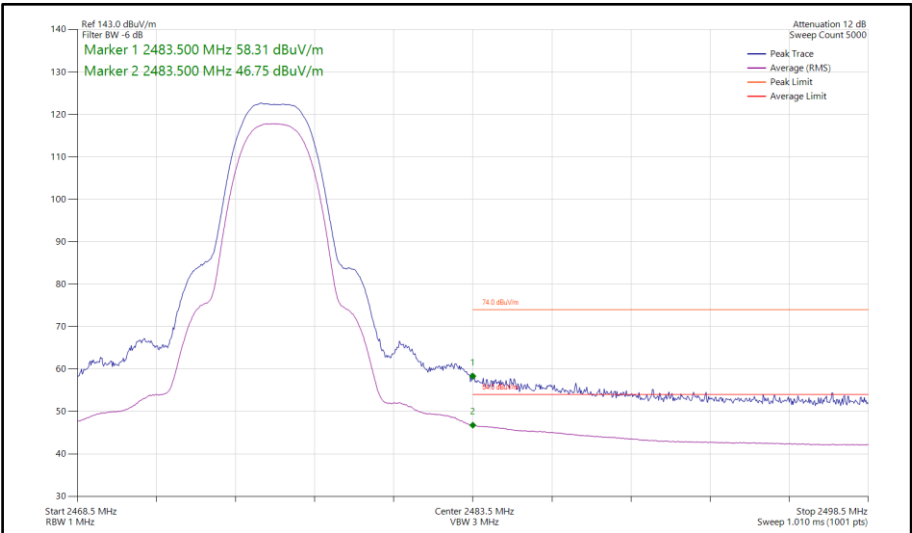


Figure 190 - Bluetooth HDT4, MIMO, Core 0-1 - 2476 MHz
Band Edge Frequency 2483.5 MHz

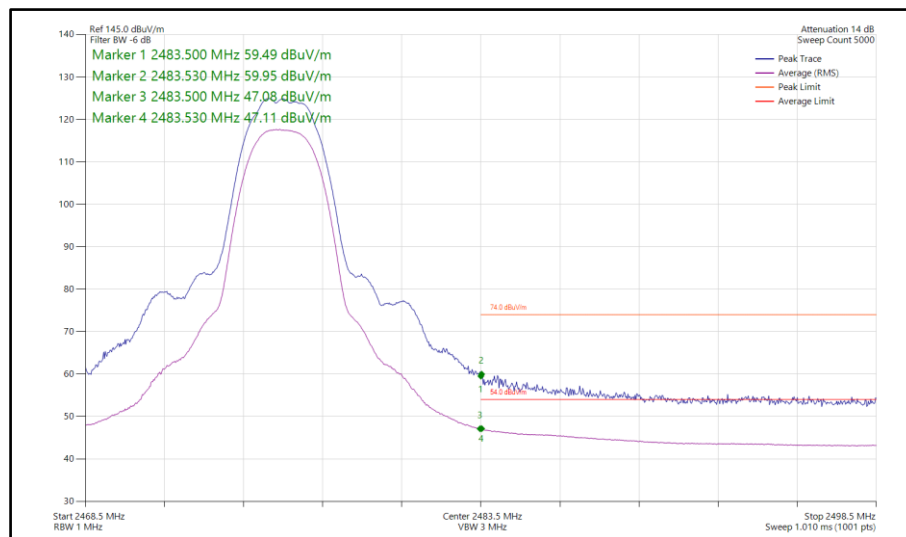


**Figure 191 - Bluetooth HDT6, MIMO, Core 0-1 - 2476 MHz
Band Edge Frequency 2483.5 MHz**

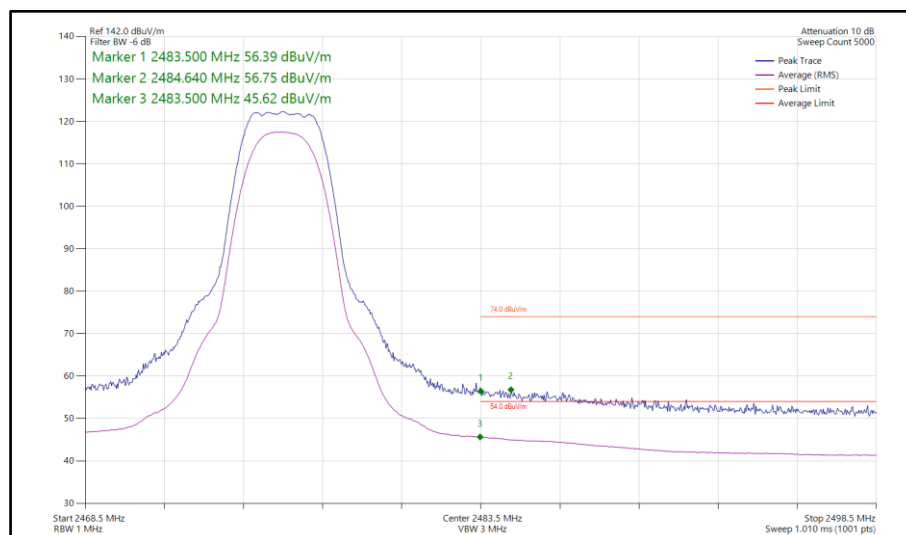


**Figure 192 - Bluetooth HDRPS2, MIMO, Core 0-1 - 2476 MHz
Band Edge Frequency 2483.5 MHz**

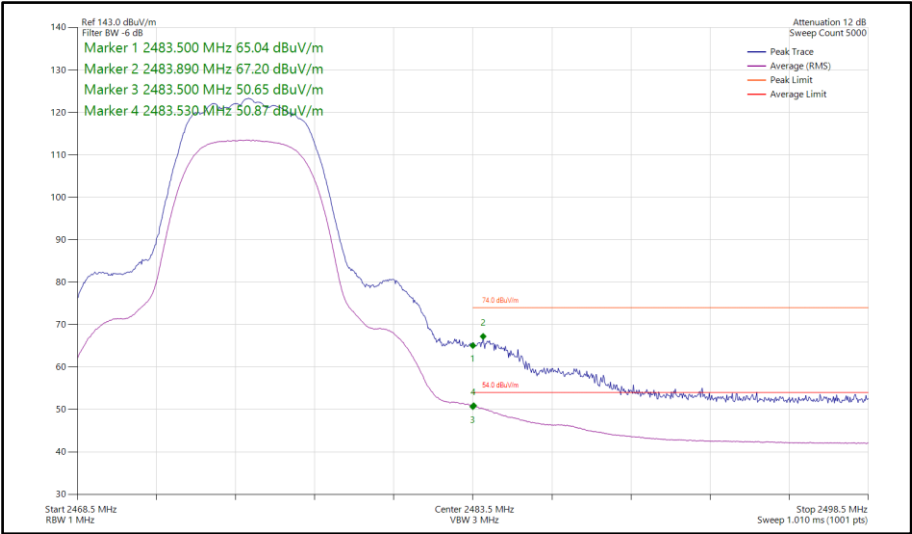


Figure 193 - Bluetooth HDRPM12, MIMO, Core 0-1 - 2475 MHz
Band Edge Frequency 2483.5 MHz

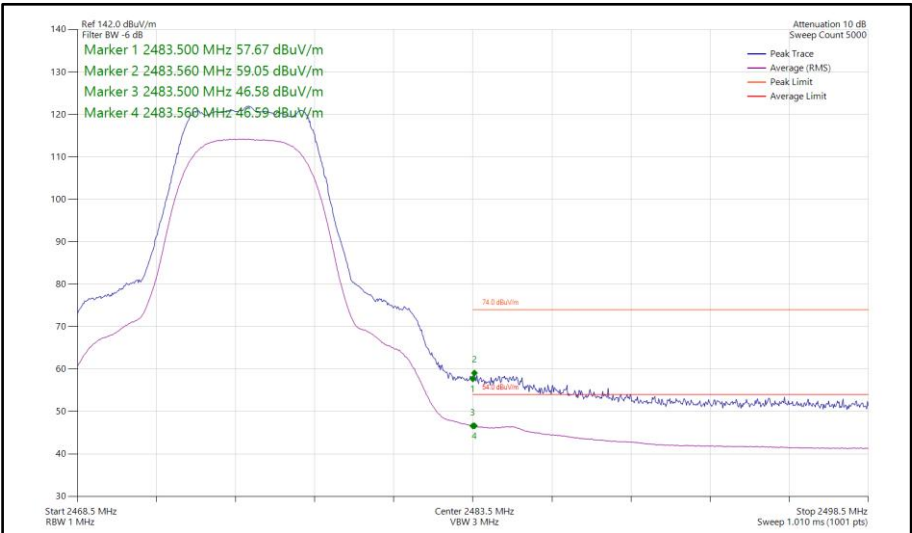


Figure 194 - Bluetooth XHDRPM8, MIMO, Core 0-1 - 2475 MHz
Band Edge Frequency 2483.5 MHz

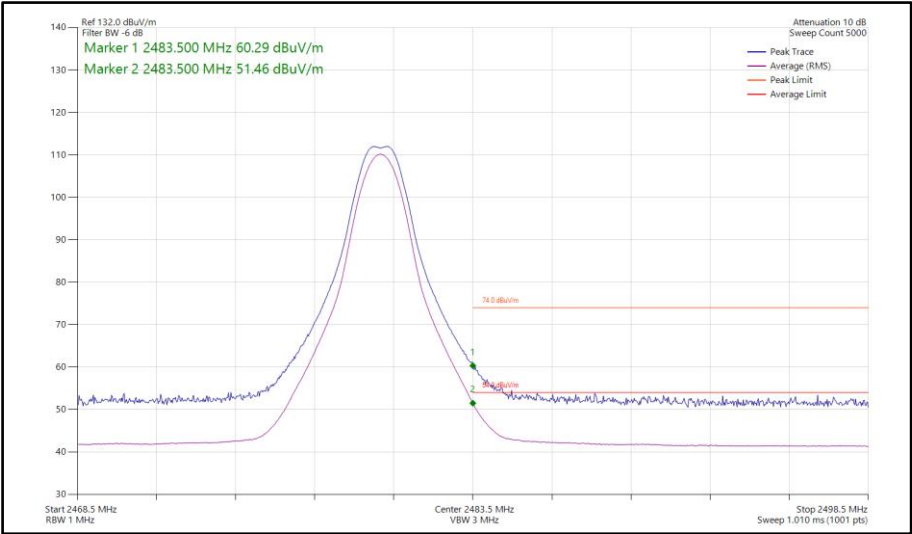


Figure 195 - Bluetooth CS1LE1M, MIMO, Core 0-1 - 2480 MHz
Band Edge Frequency 2483.5 MHz

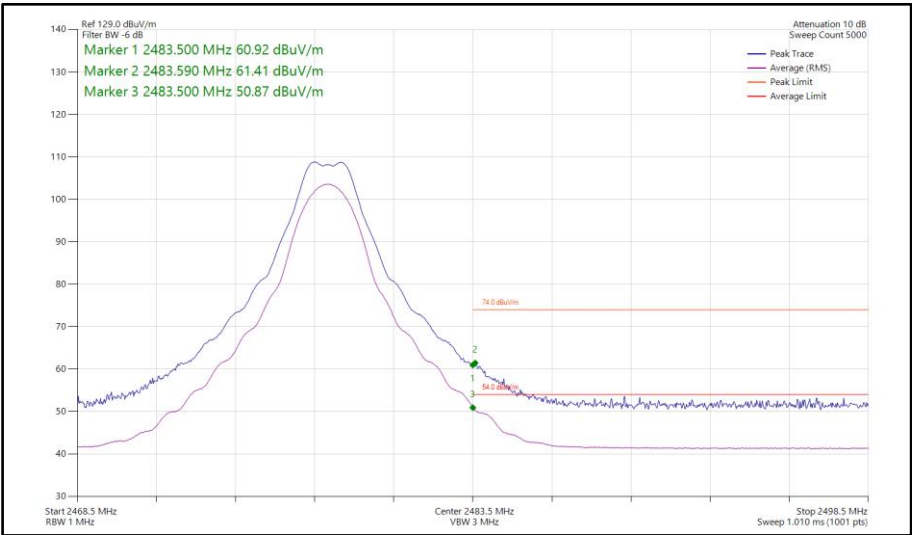


Figure 196 - Bluetooth CS1LE2M, MIMO, Core 0-1 - 2478 MHz
Band Edge Frequency 2483.5 MHz



FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 14

ISED RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960*	500

Table 15

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.



2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 15 and RF Chamber 17.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.6.3 V.	5125	-	O/P Mon
1500W (300V 12A) AC Power Supply	iTech	IT7324	5956	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis), Chamber 15	Albatross Projects	RF Chamber 15	5963	36	23-Apr-2028
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5964	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5966	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5967	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5968	-	TU
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6141	12	12-Sep-2027
SAC Switch Unit	TUV SUD	TUV_SSU_001	6144	12	05-Dec-2026
Digital Multimeter	Fluke	115	6145	12	02-Jun-2027
Digital Multimeter	Fluke	115	6146	12	03-Jun-2027
EMI Test Receiver	Rohde & Schwarz	ESW44	6294	12	23-Mar-2027
Cable (SMA to SMA 1m)	Junkosha	MWX221/B	6305	12	19-May-2027
EMC Test Receiver	Rohde & Schwarz	ESW44	6333	12	08-May-2027
SAC Switch Unit	TUV SUD	TUV_SSU_004 PLC	6349	12	18-May-2027
Horn Antenna (1–10.5 GHz)	Schwarzbeck	BBHA 9120 B	6457	12	12-Sep-2027
AC Power Supply	iTech	IT7324	6657	-	O/P Mon
3m Semi-Anechoic Chamber	Albatross Projects	RF Chamber 17	6658	36	07-May-2028
Mast and Turntable Controller	Maturo Gmbh	FCU3.0	6659	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6660	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6661	-	TU
8M SMA Cable	Junkosha	MWX221-08000AMSAMS/B	6833	12	20-Aug-2027
Handheld Hygrometer	Fluke	971	6838	12	16-Sep-2026
1m SMA-Type Cable	Junkosha	MWX221-01000AMSAMS/B	6840	12	23-Sep-2026
1m SMA-Type Cable	Junkosha	MWX221-01000AMSAMS/B	6845	12	14-Sep-2027
8m SMA-Type Cable	Junkosha	MWX221-08000AMSAMS/B	6851	12	06-Nov-2026
Humidity & Temperature meter	Fluke	971	7103	12	19-Aug-2027

Table 16

TU - Traceability Unscheduled

O/P Mon - Output Monitored using calibrated equipment





2.2 Emission Bandwidth

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(2)
ISED RSS-247, Clause 6.3.1
ISED RSS-GEN, Clause 6.7

2.2.2 Equipment Under Test and Modification State

A3468, S/N: CWN2V4LCN6 - Modification State 0
A3468, S/N: D6669733D2 - Modification State 0

2.2.3 Date of Test

20-September-2026 and 26-September-2026

2.2.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.8.1 for 6 dB BW and 6.9.3 for 99% occupied bandwidth measurements.

2.2.5 Environmental Conditions

Ambient Temperature	21.5 - 21.7 °C
Relative Humidity	44.8 - 54.3 %



2.2.6 Test Results

2.4 GHz Bluetooth - DTS

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 (a)	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	FCC+ISED iPa Core 0 HDT (HDT4)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	2.136	-	-	-	≥500.0
2439	2.136	-	-	-	≥500.0
2474	2.144	-	-	-	≥500.0

Table 17 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	2.360	-	-	-	-
2439	2.360	-	-	-	-
2474	2.352	-	-	-	-

Table 18 - 99% Bandwidth Results

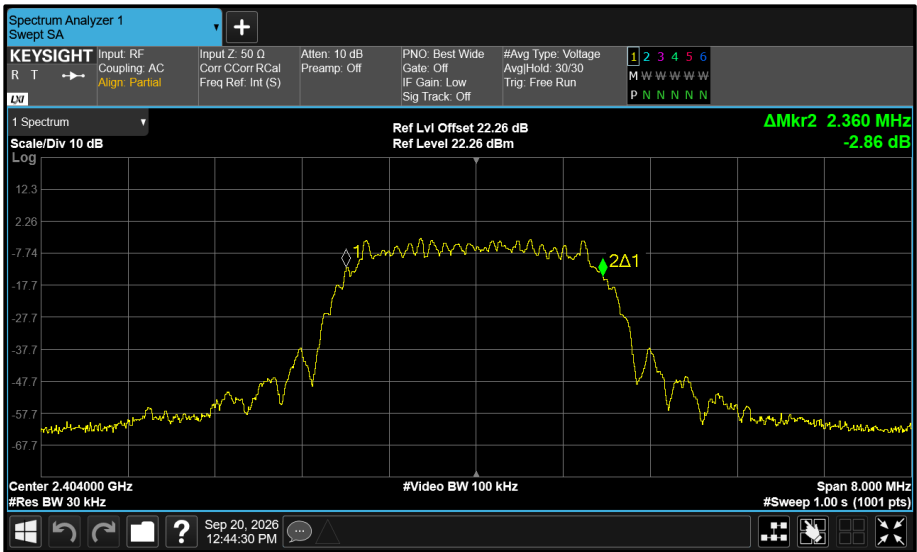


Figure 197 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

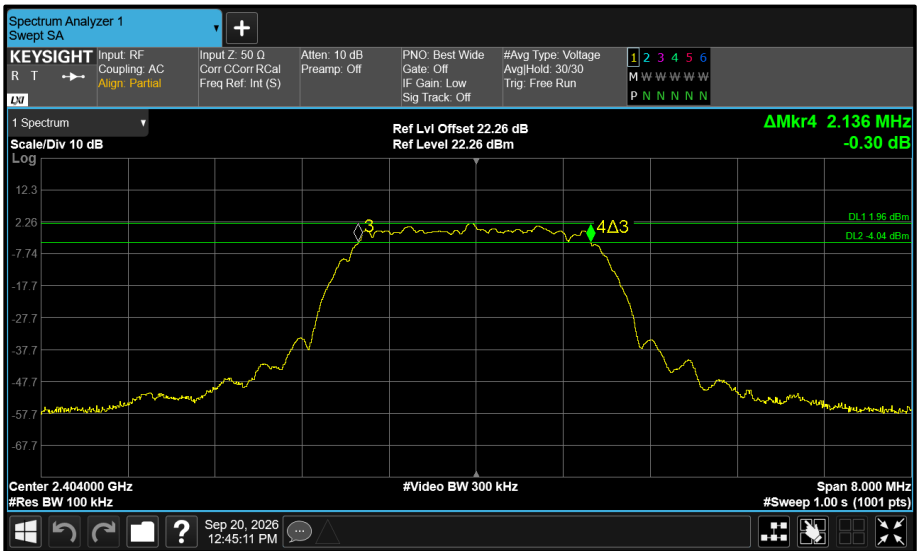


Figure 198 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

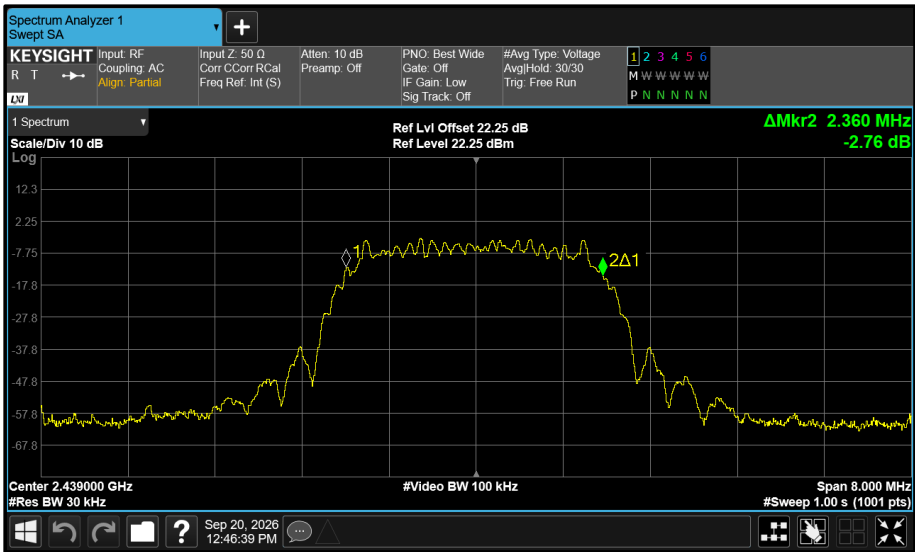


Figure 199 - Core 0 (A) 2439 MHz (CH37) 99% Bandwidth

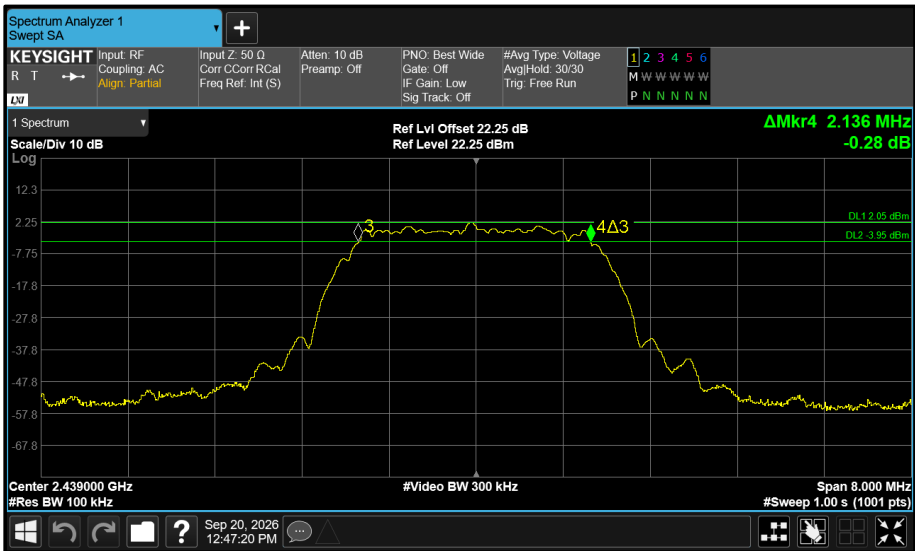


Figure 200 - Core 0 (A) 2439 MHz (CH37) 6 dB Bandwidth

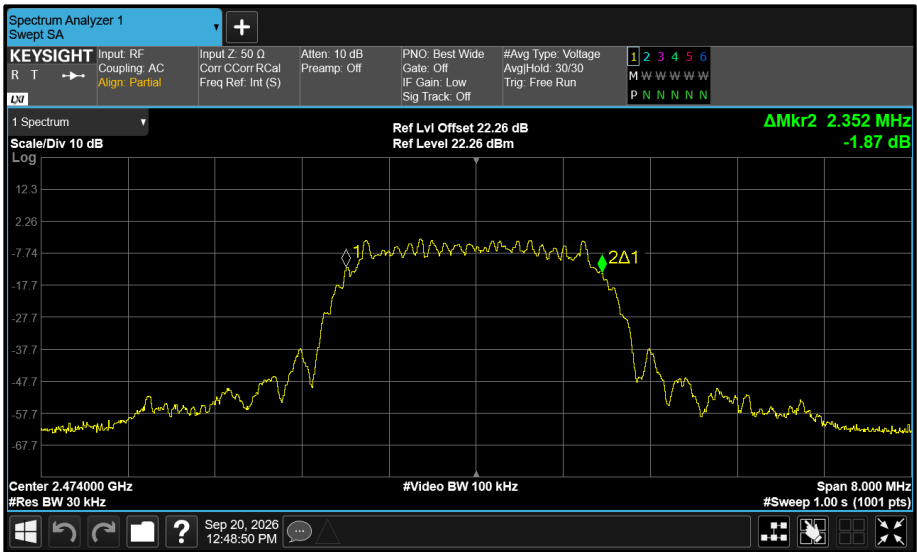


Figure 201 - Core 0 (A) 2474 MHz (CH72) 99% Bandwidth

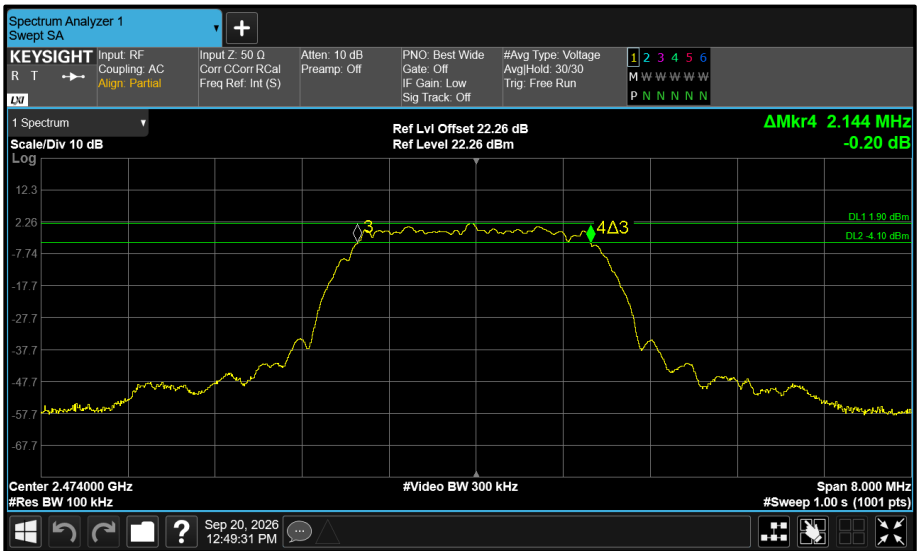


Figure 202 - Core 0 (A) 2474 MHz (CH72) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 (a)	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	FCC+ISED C iPa Core 0 HDR (8-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	0.570	-	-	-	≥500.0
2440	0.585	-	-	-	≥500.0
2476	0.870	-	-	-	≥500.0

Table 19 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	4.680	-	-	-	-
2440	4.665	-	-	-	-
2476	4.680	-	-	-	-

Table 20 - 99% Bandwidth Results

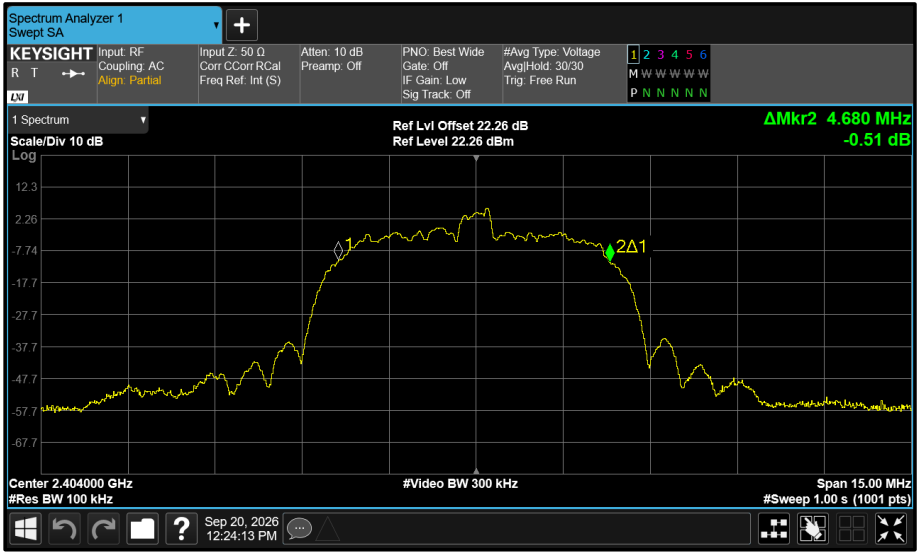


Figure 203 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

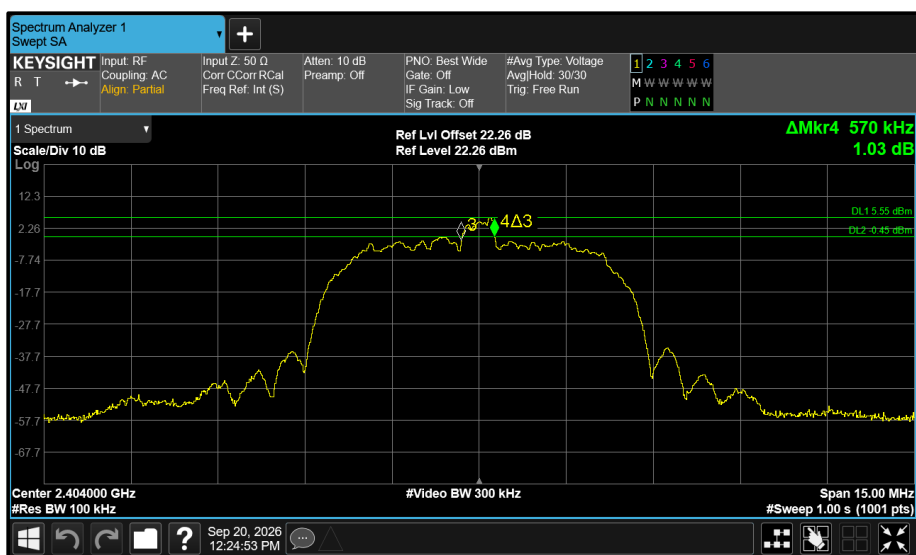


Figure 204 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

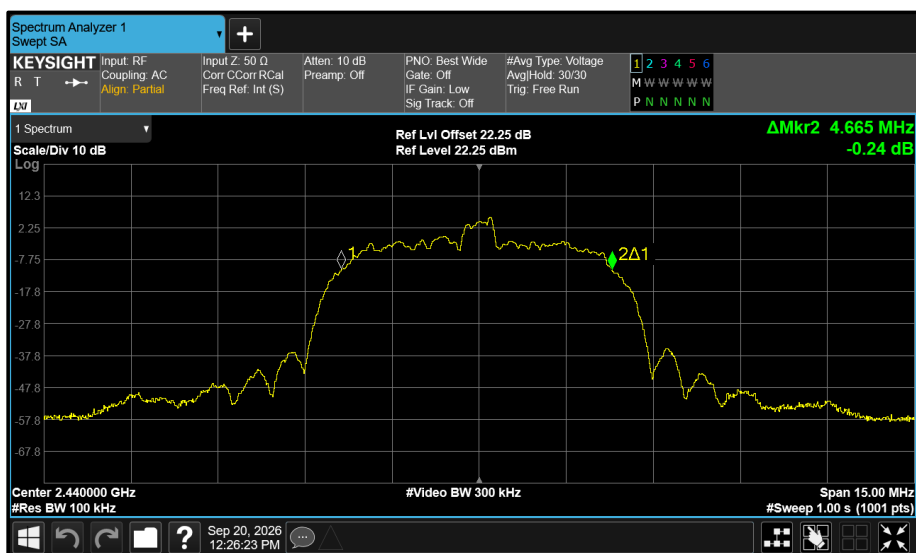


Figure 205 - Core 0 (A) 2440 MHz (CH38) 99% Bandwidth

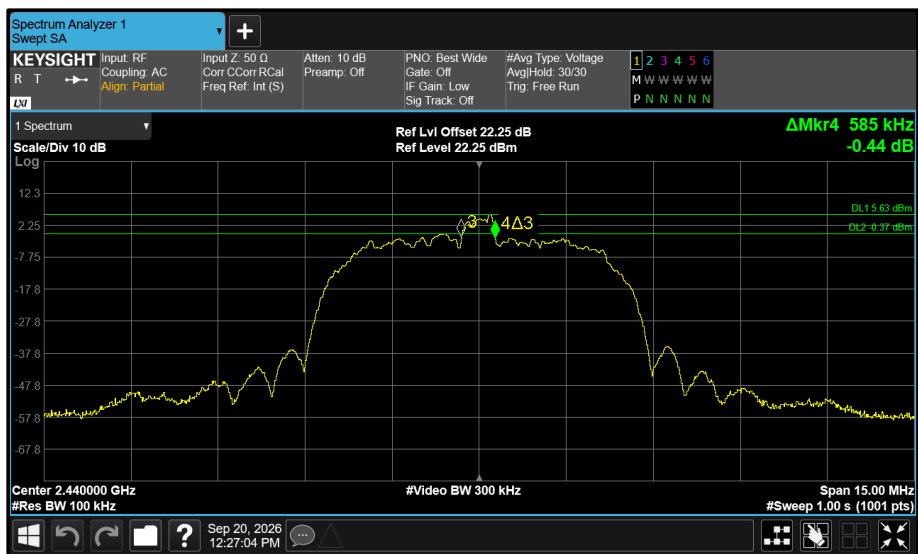


Figure 206 - Core 0 (A) 2440 MHz (CH38) 6 dB Bandwidth

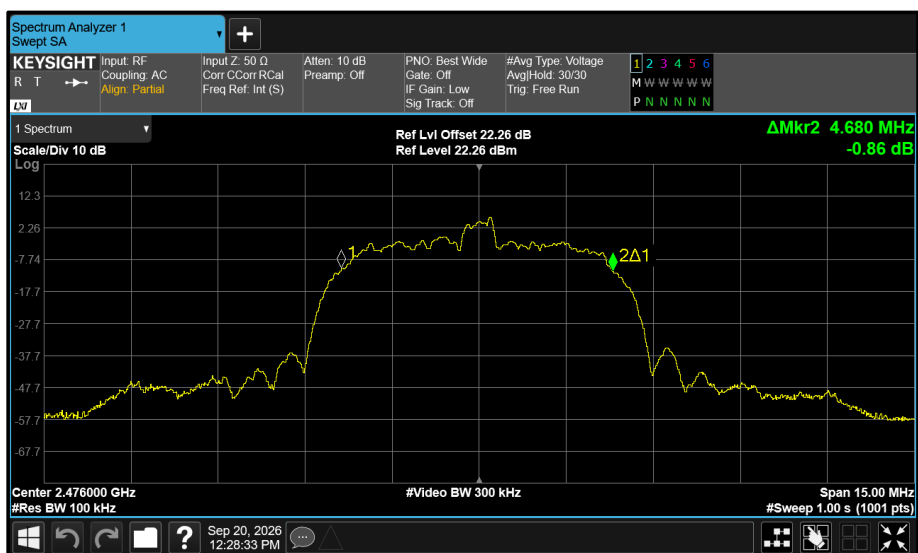


Figure 207 - Core 0 (A) 2476 MHz (CH74) 99% Bandwidth

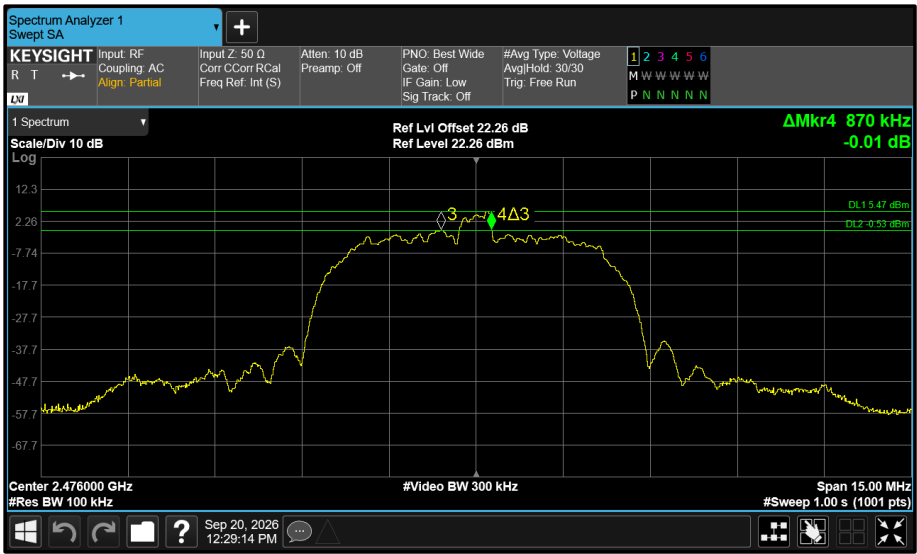


Figure 208 - Core 0 (A) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 (a)	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	FCC+ISED C iPa Core 0 HDRP (HDRPM4)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	4.040	-	-	-	≥500.0
2440	4.060	-	-	-	≥500.0
2475	4.060	-	-	-	≥500.0

Table 21 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	4.760	-	-	-	-
2440	4.760	-	-	-	-
2475	4.780	-	-	-	-

Table 22 - 99% Bandwidth Results

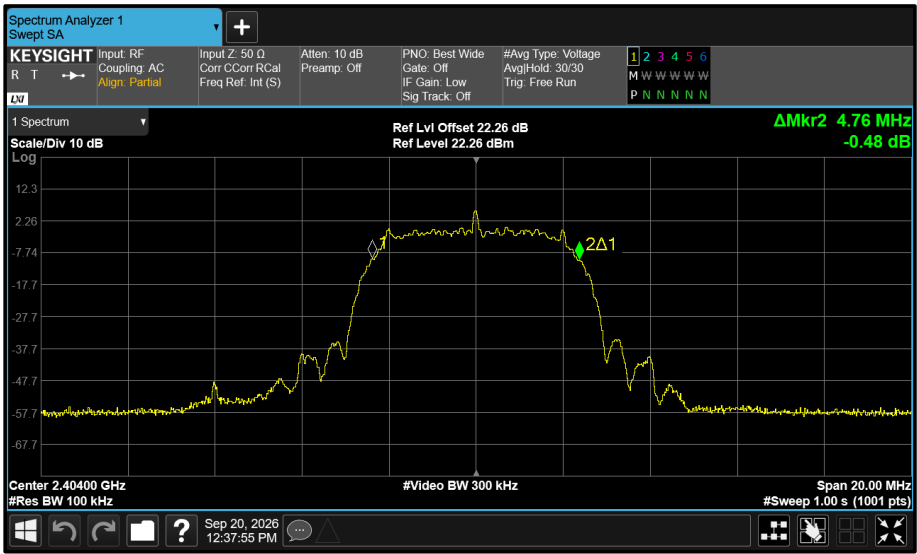


Figure 209 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

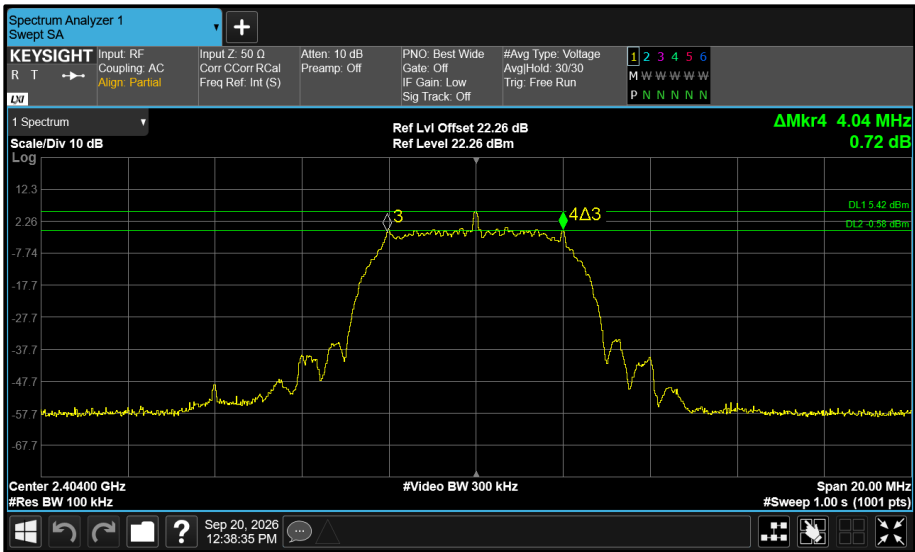


Figure 210 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

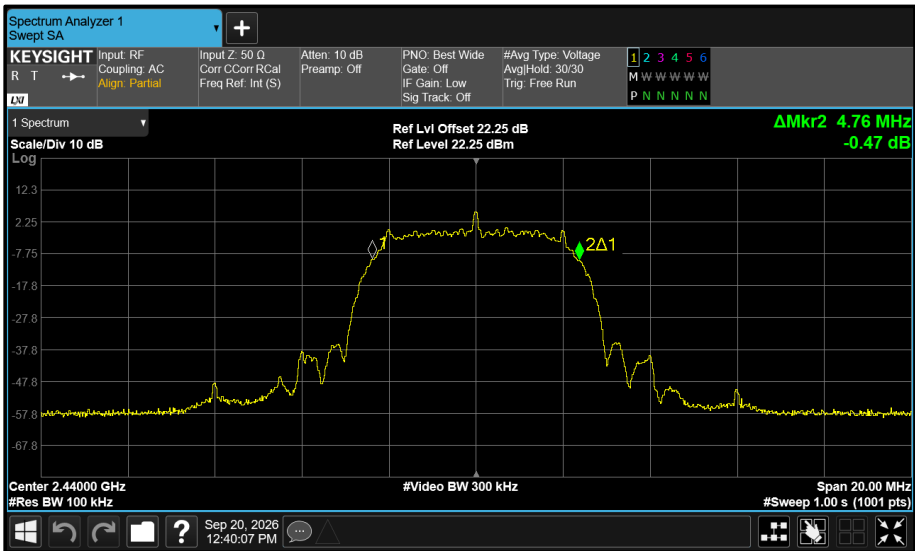


Figure 211 - Core 0 (A) 2440 MHz (CH38) 99% Bandwidth

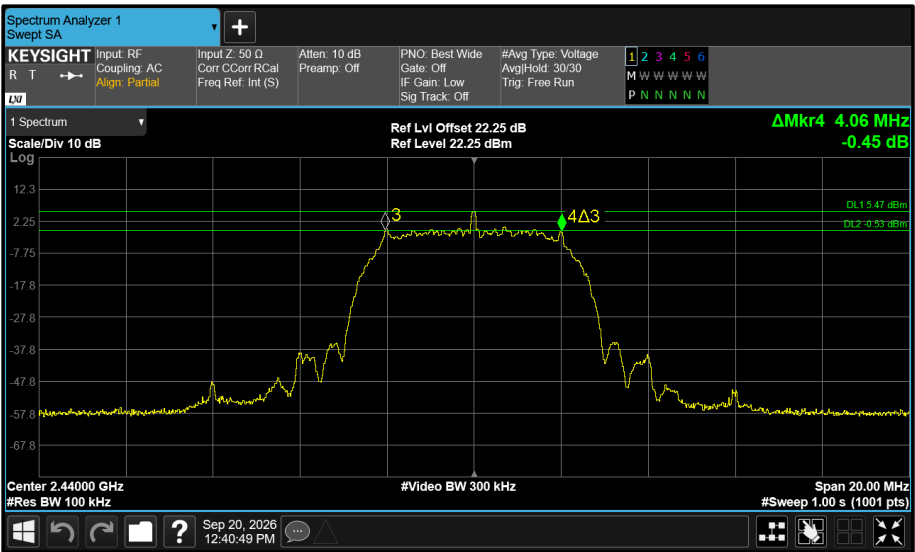


Figure 212 - Core 0 (A) 2440 MHz (CH38) 6 dB Bandwidth

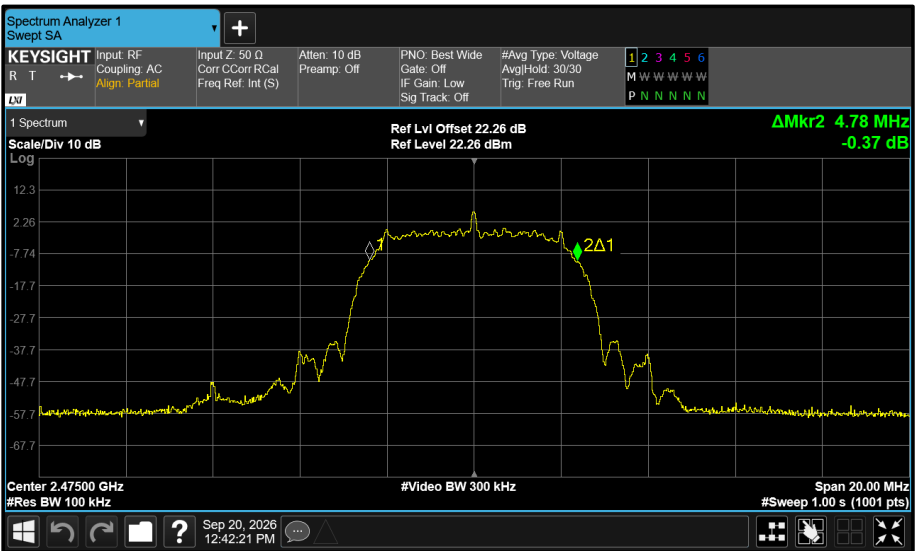


Figure 213 - Core 0 (A) 2475 MHz (CH73) 99% Bandwidth

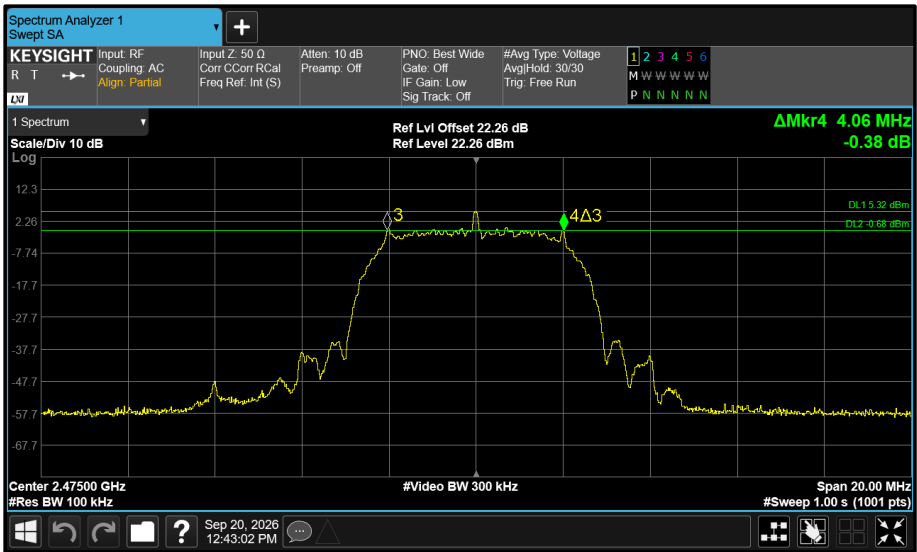


Figure 214 - Core 0 (A) 2475 MHz (CH73) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 (a)	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	FCC+ISED C iPa Core 0 LE (LE 1M)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	0.668	-	-	-	≥500.0
2440	0.668	-	-	-	≥500.0
2480	0.672	-	-	-	≥500.0

Table 23 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	1.016	-	-	-	-
2440	1.012	-	-	-	-
2480	1.016	-	-	-	-

Table 24 - 99% Bandwidth Results

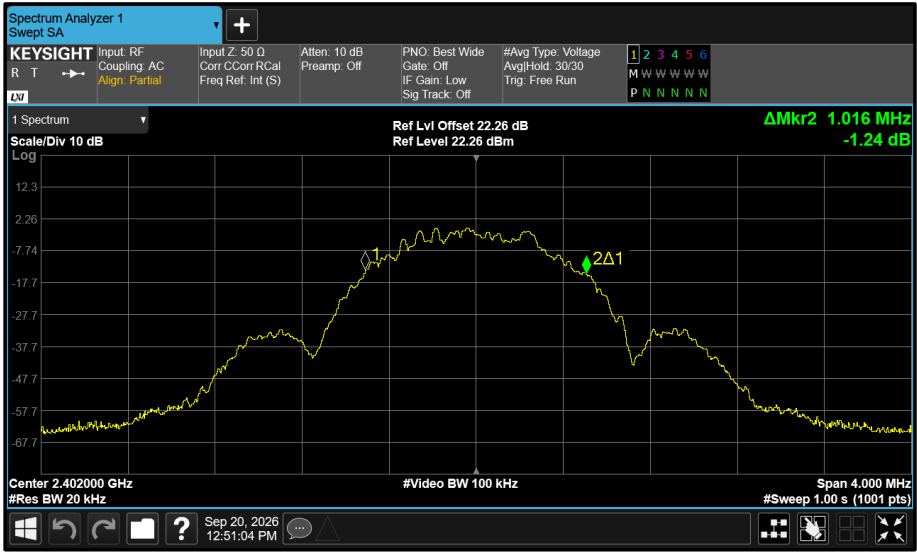


Figure 215 - Core 0 (A) 2402 MHz (CH37) 99% Bandwidth

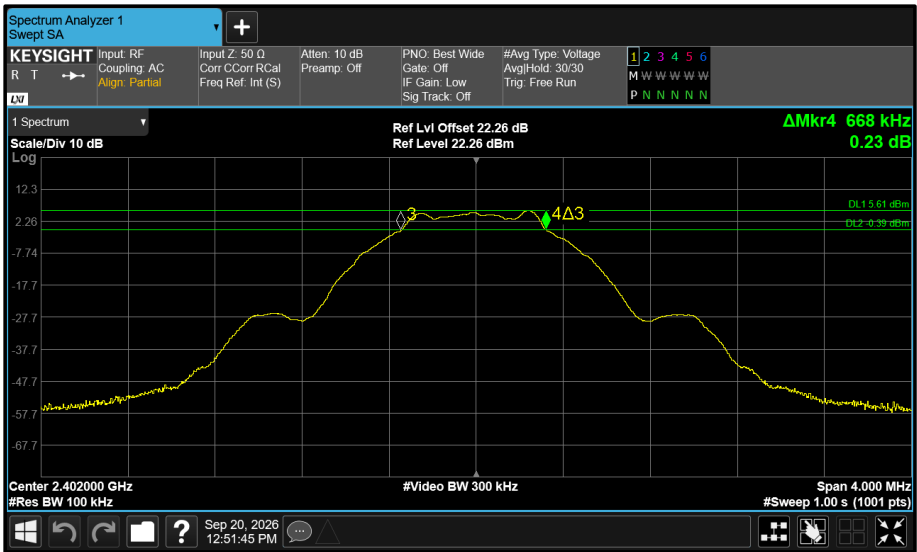


Figure 216 - Core 0 (A) 2402 MHz (CH37) 6 dB Bandwidth

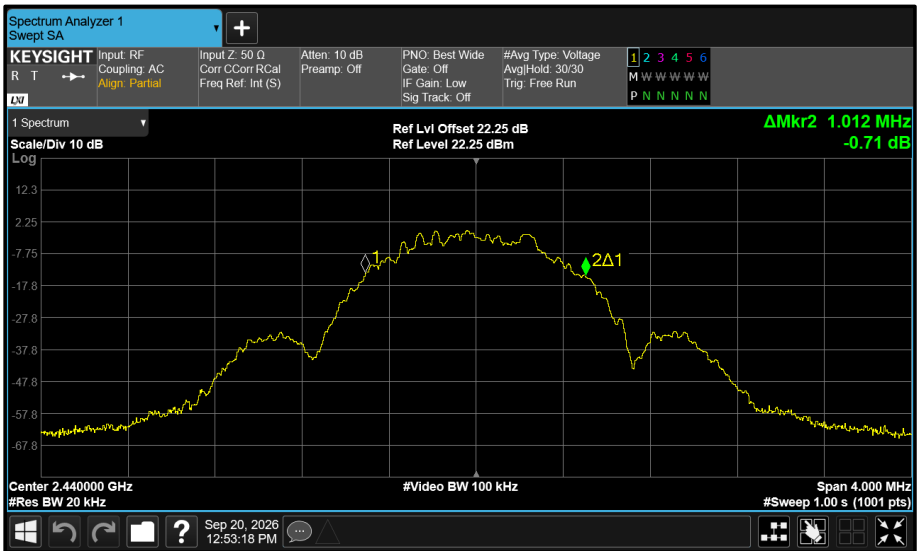


Figure 217 - Core 0 (A) 2440 MHz (CH17) 99% Bandwidth

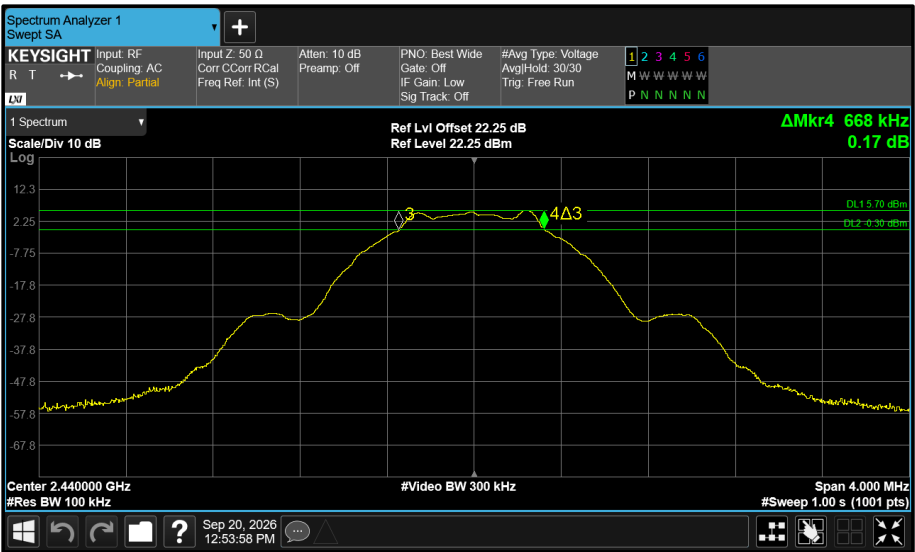


Figure 218 - Core 0 (A) 2440 MHz (CH17) 6 dB Bandwidth

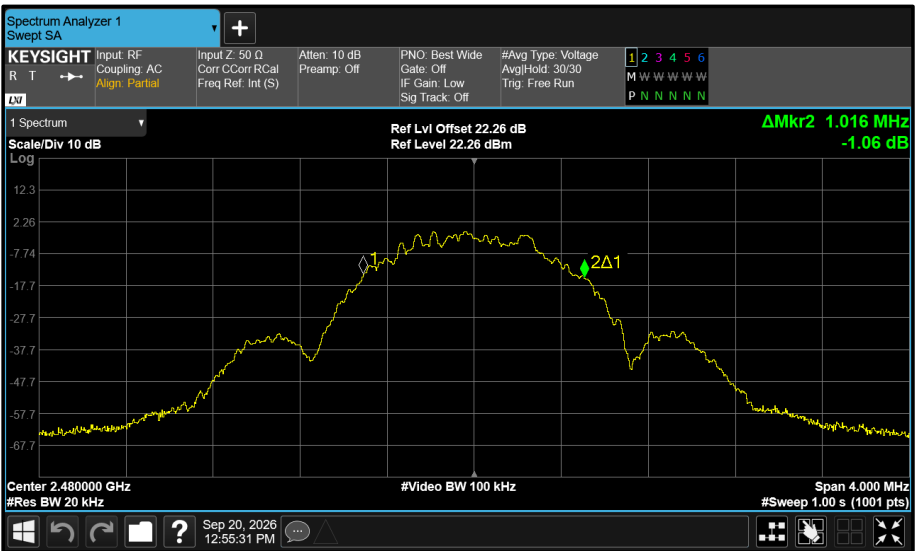


Figure 219 - Core 0 (A) 2480 MHz (CH39) 99% Bandwidth

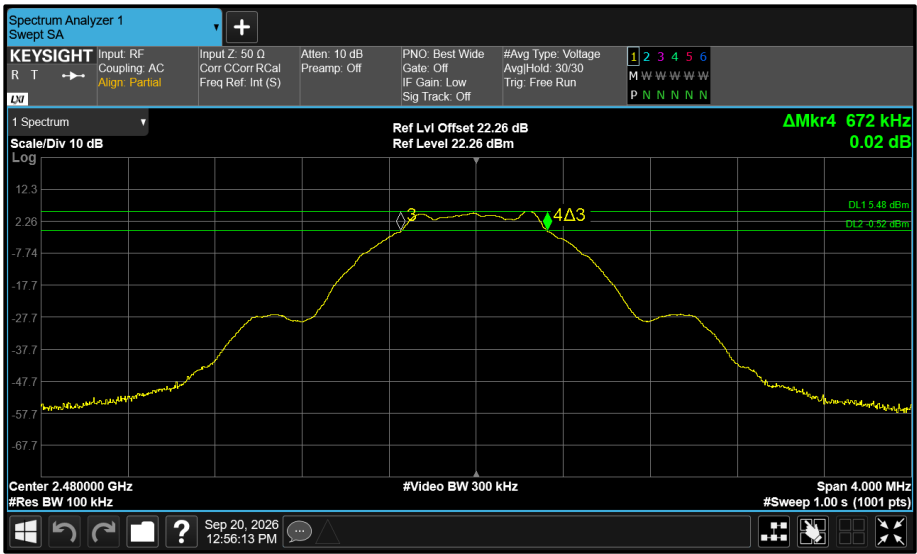


Figure 220 - Core 0 (A) 2480 MHz (CH39) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 (a)	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	FCC+ISED C iPa Core 0 LE (LELR125K)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	0.688	-	-	-	≥500.0
2404	0.684	-	-	-	≥500.0
2480	0.692	-	-	-	≥500.0

Table 25 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	1.044	-	-	-	-
2404	1.044	-	-	-	-
2480	1.044	-	-	-	-

Table 26 - 99% Bandwidth Results

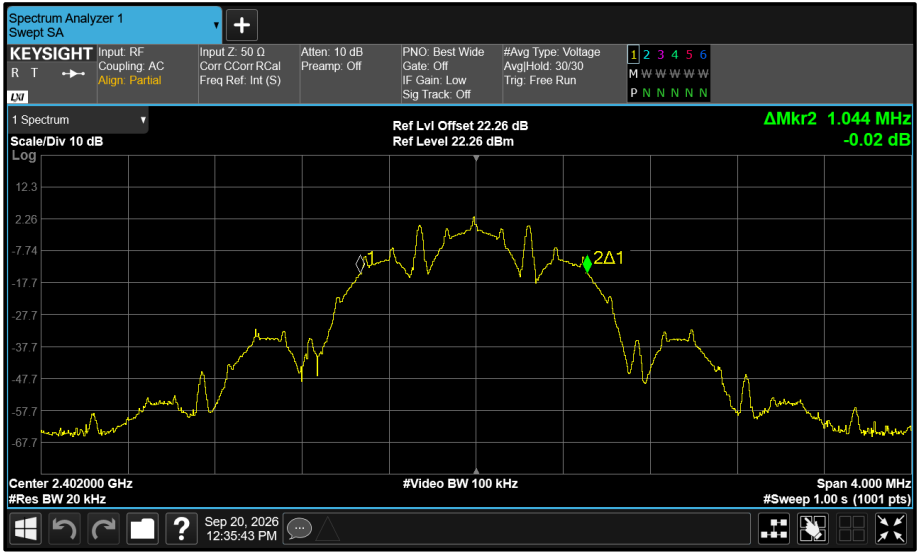


Figure 221 - Core 0 (A) 2402 MHz (CH78) 99% Bandwidth

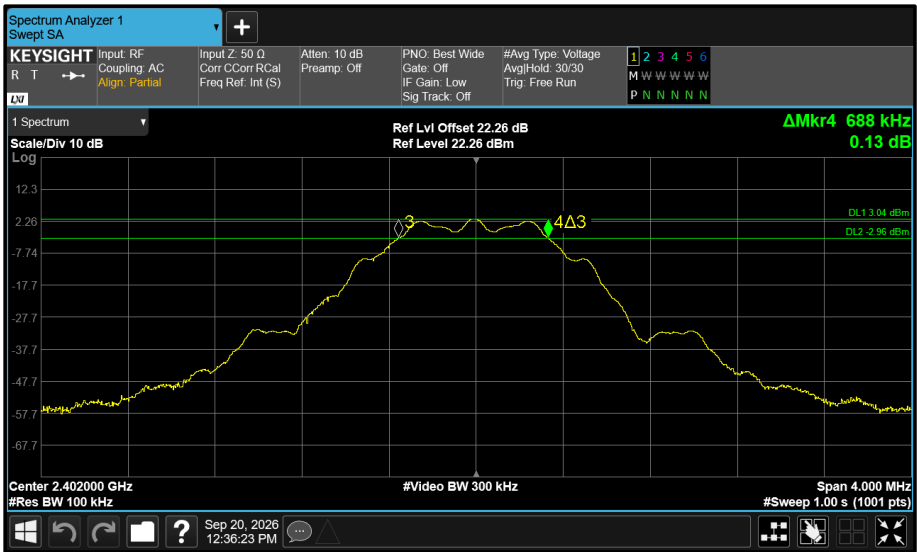


Figure 222 - Core 0 (A) 2402 MHz (CH78) 6 dB Bandwidth

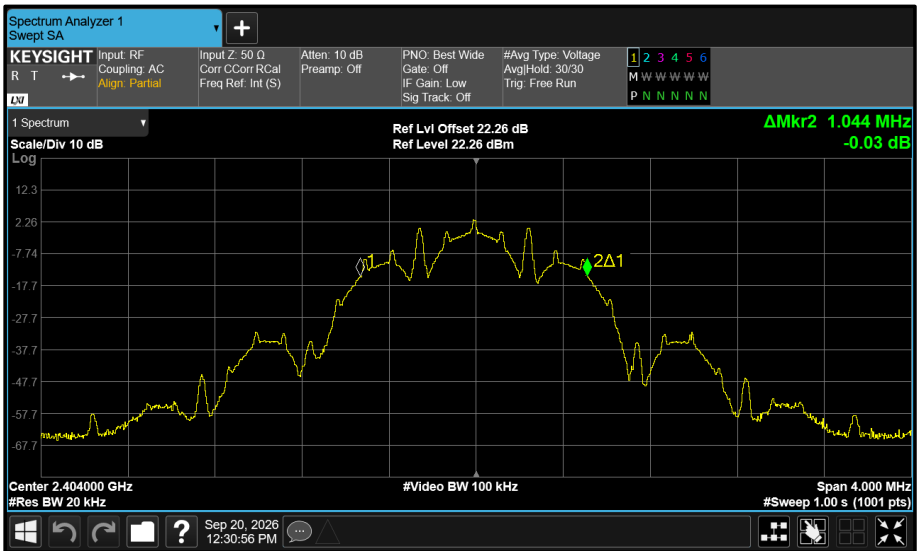


Figure 223 - Core 0 (A) 2404 MHz (CH0) 99% Bandwidth

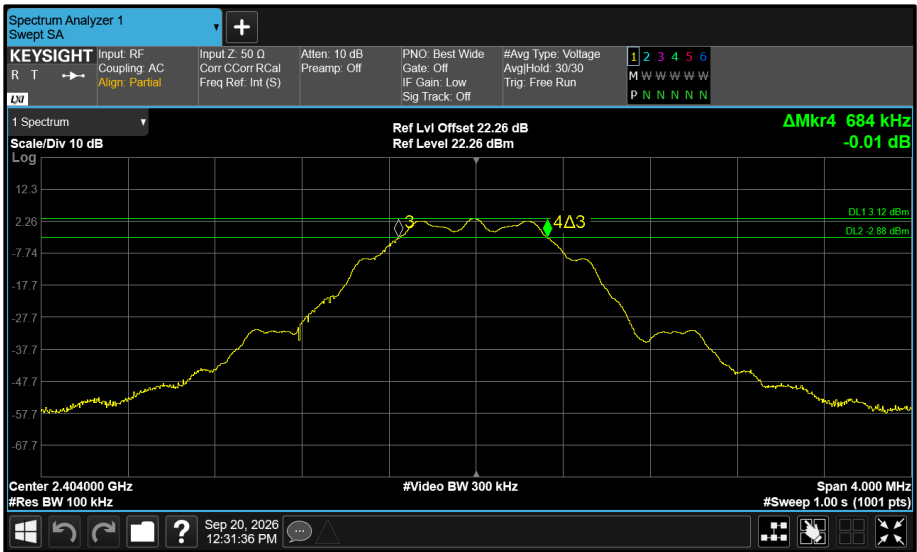


Figure 224 - Core 0 (A) 2404 MHz (CH0) 6 dB Bandwidth

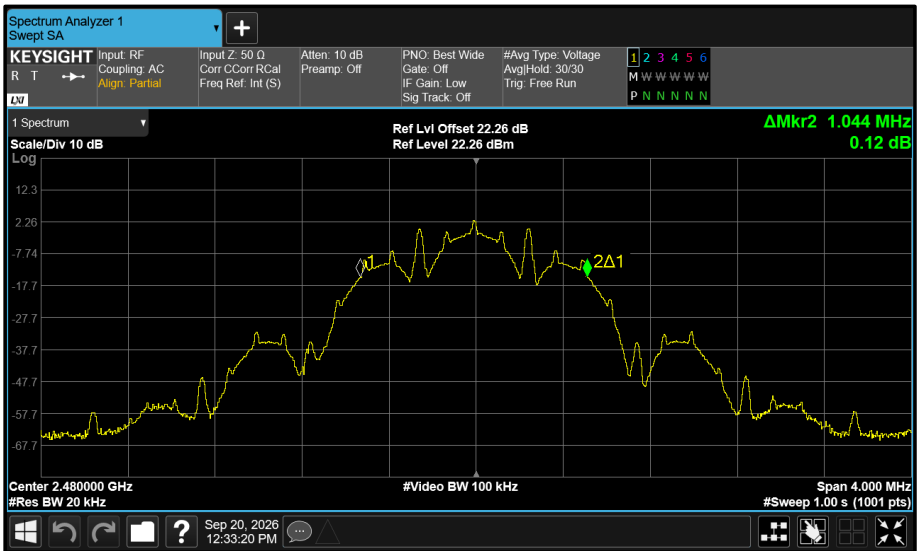


Figure 225 - Core 0 (A) 2480 MHz (CH39) 99% Bandwidth

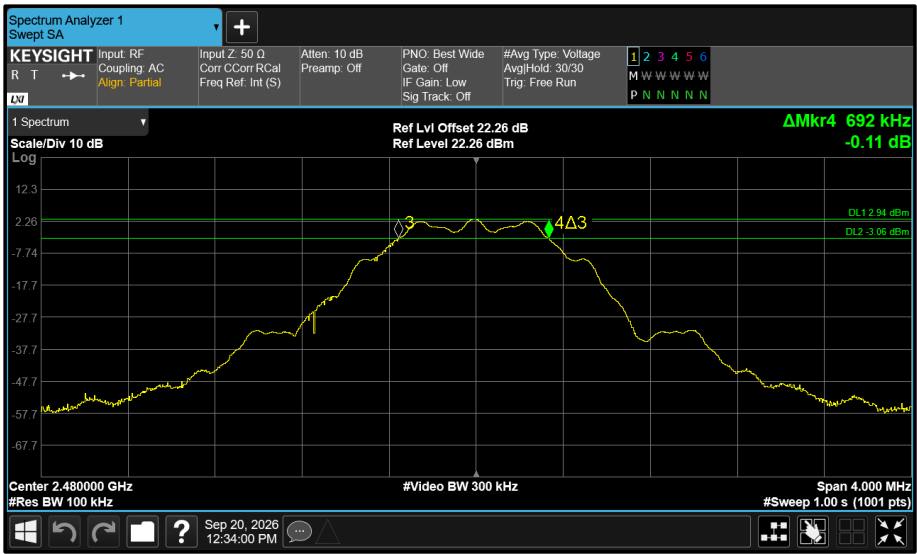


Figure 226 - Core 0 (A) 2480 MHz (CH39) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 (a)	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	FCC+ISED C iPa Core 1 HDT (HDT4)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	2.136	-	-	≥500.0
2439	-	2.136	-	-	≥500.0
2474	-	2.136	-	-	≥500.0

Table 27 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	2.360	-	-	-
2439	-	2.360	-	-	-
2474	-	2.352	-	-	-

Table 28 - 99% Bandwidth Results



Figure 227 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

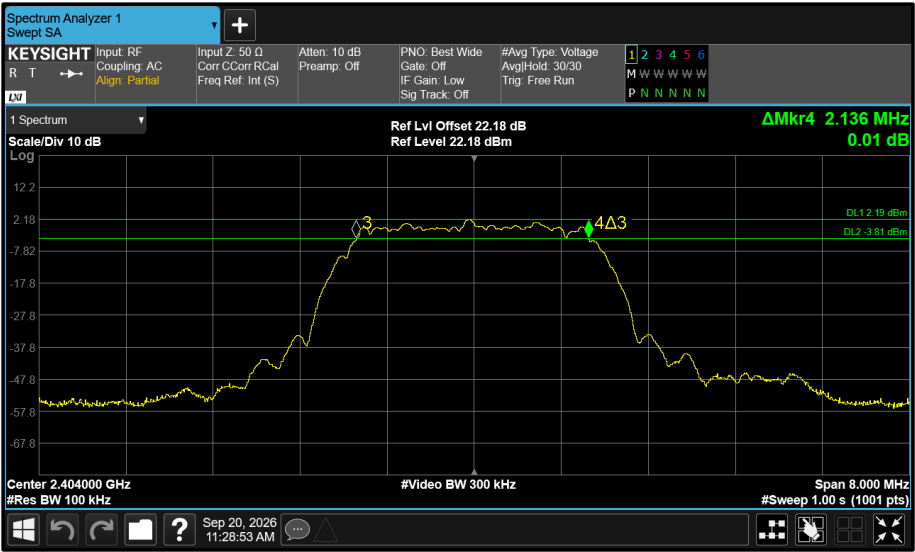


Figure 228 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

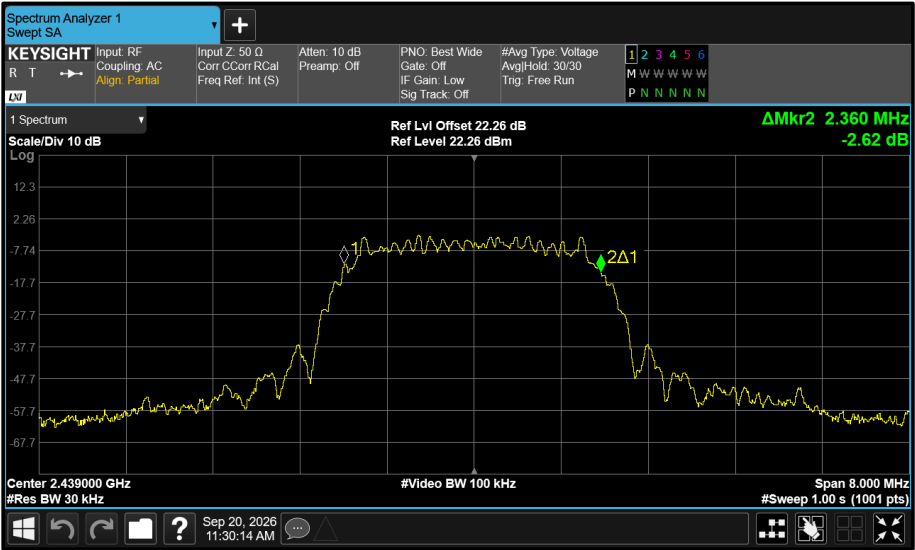


Figure 229 - Core 1 (B) 2439 MHz (CH37) 99% Bandwidth

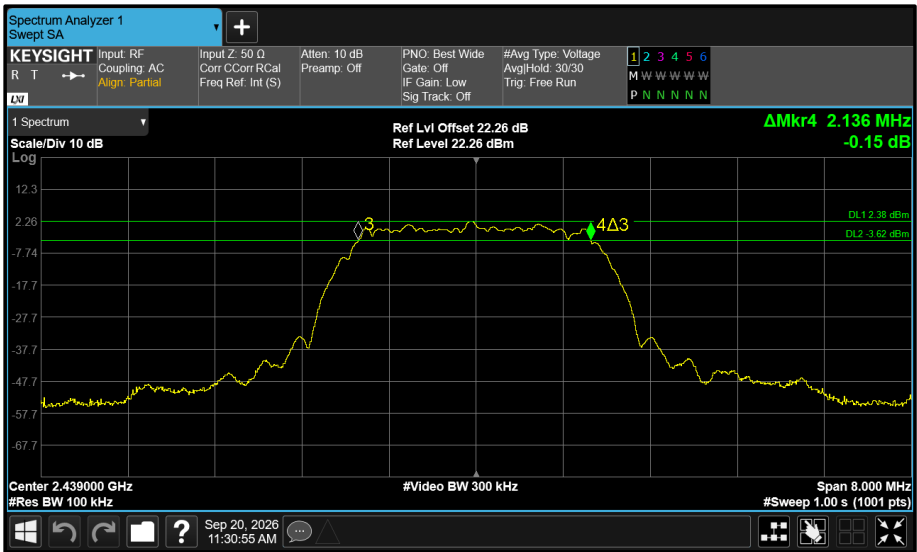


Figure 230 - Core 1 (B) 2439 MHz (CH37) 6 dB Bandwidth

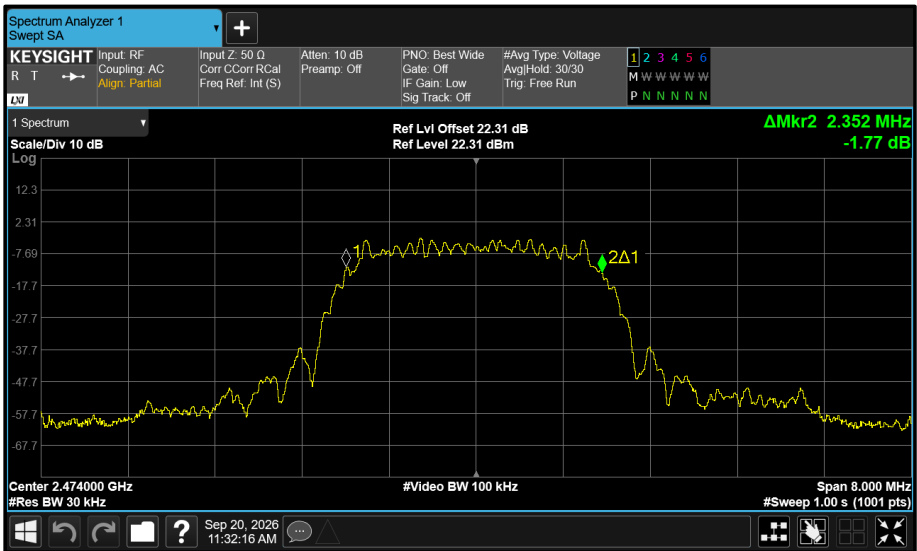


Figure 231 - Core 1 (B) 2474 MHz (CH72) 99% Bandwidth

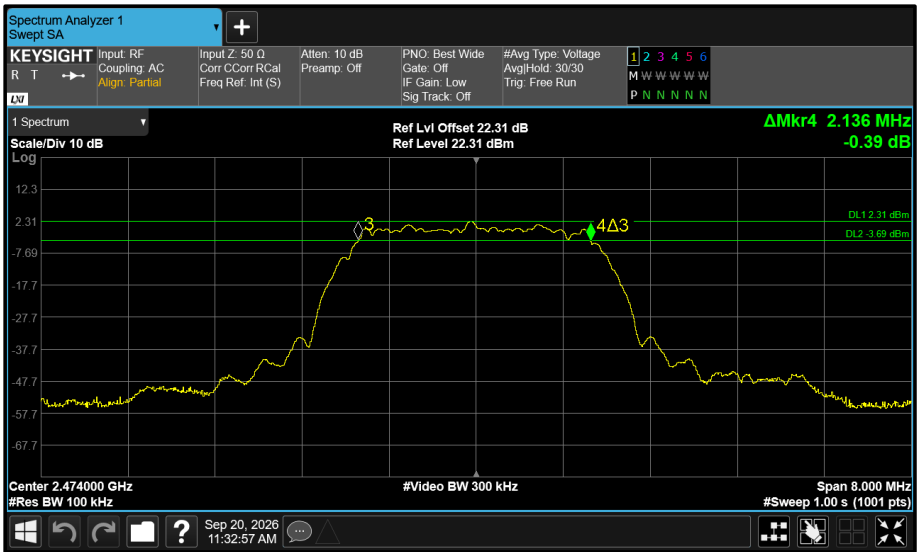


Figure 232 - Core 1 (B) 2474 MHz (CH72) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 (a)	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	FCC+ISED C iPa Core 1 HDR (8-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	0.570	-	-	≥500.0
2440	-	0.570	-	-	≥500.0
2476	-	0.555	-	-	≥500.0

Table 29 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	4.680	-	-	-
2440	-	4.665	-	-	-
2476	-	4.680	-	-	-

Table 30 - 99% Bandwidth Results

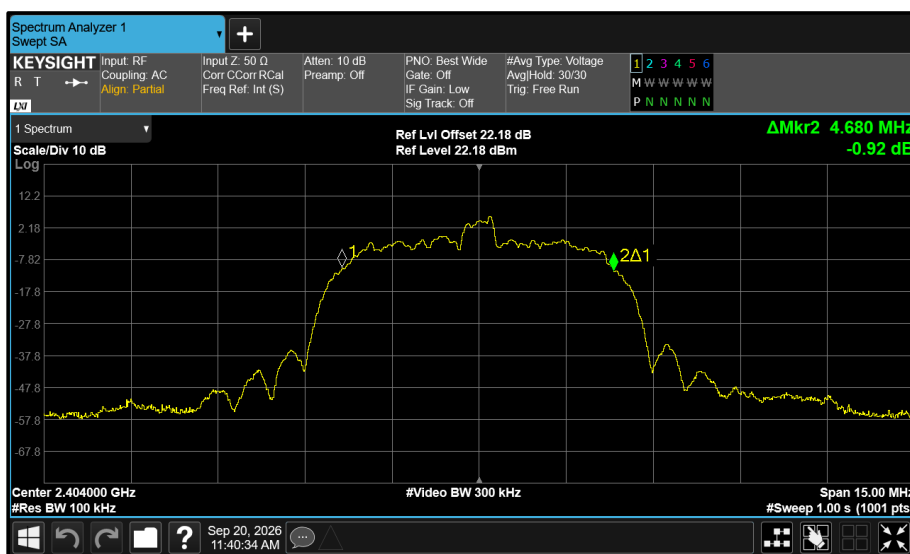


Figure 233 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

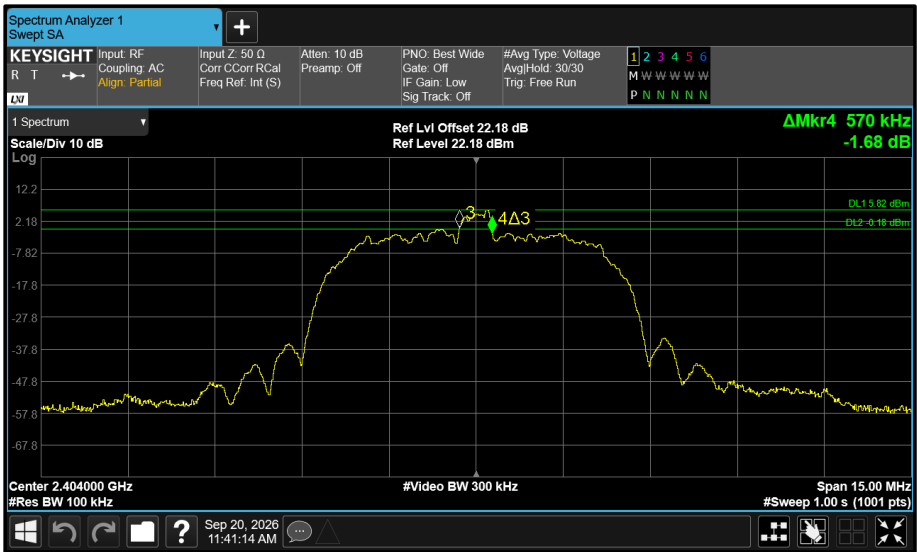


Figure 234 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

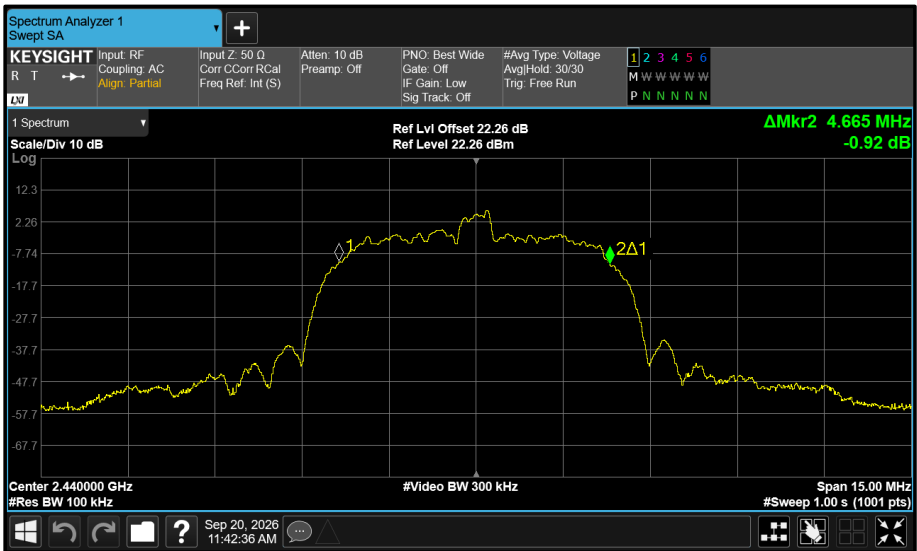


Figure 235 - Core 1 (B) 2440 MHz (CH38) 99% Bandwidth

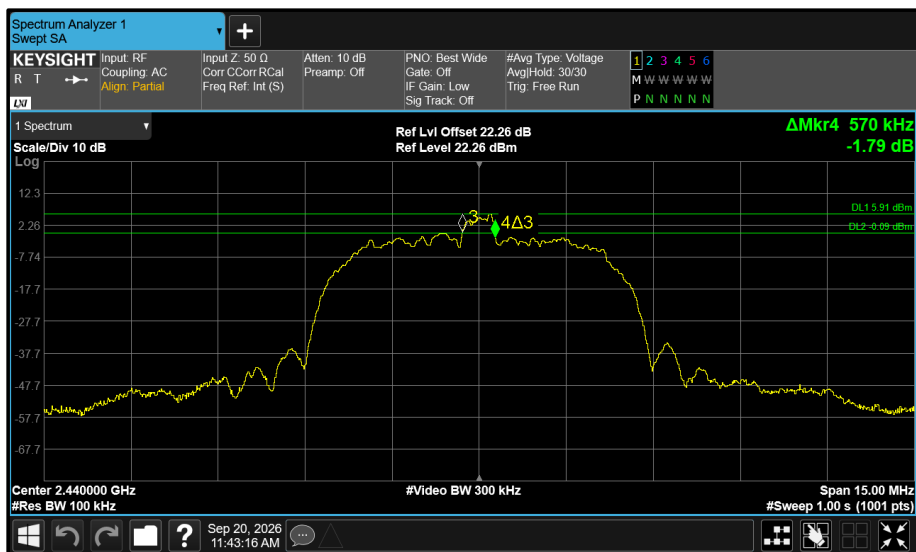


Figure 236 - Core 1 (B) 2440 MHz (CH38) 6 dB Bandwidth

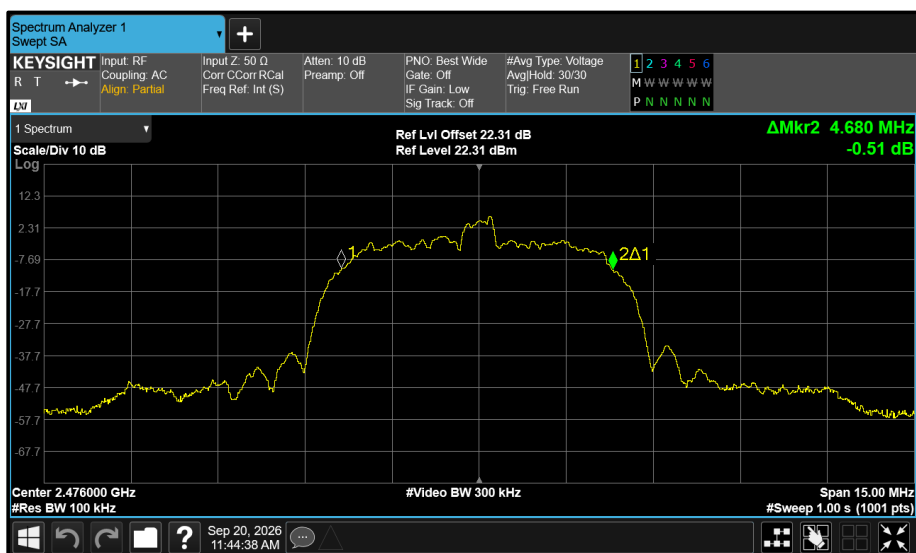


Figure 237 - Core 1 (B) 2476 MHz (CH74) 99% Bandwidth

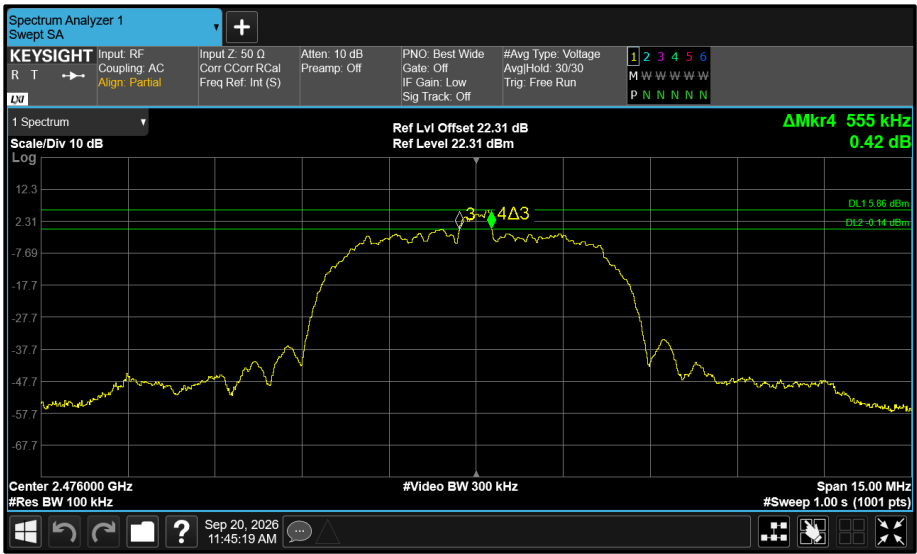


Figure 238 - Core 1 (B) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 (a)	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	FCC+ISED C iPa Core 1 HDRP (HDRPM4)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	4.060	-	-	≥500.0
2440	-	4.060	-	-	≥500.0
2475	-	4.060	-	-	≥500.0

Table 31 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	4.760	-	-	-
2440	-	4.760	-	-	-
2475	-	4.760	-	-	-

Table 32 - 99% Bandwidth Results

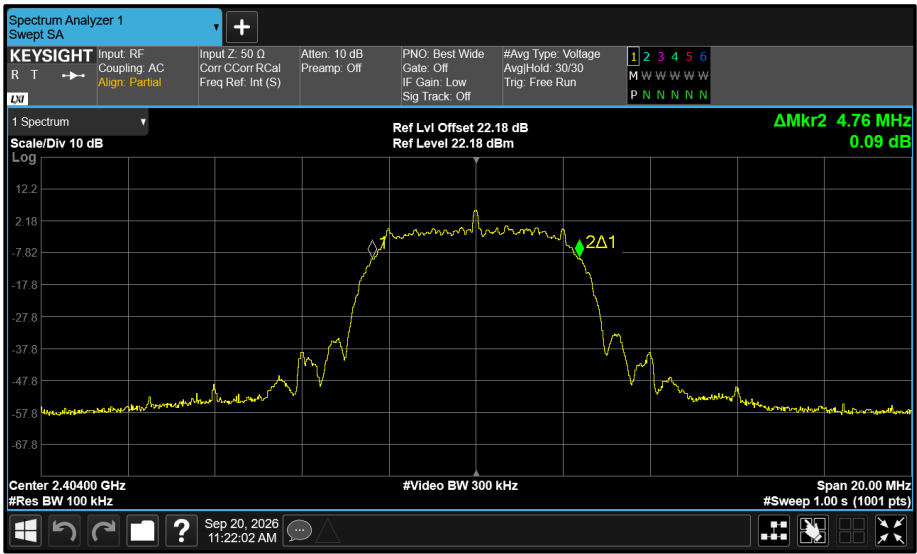


Figure 239 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

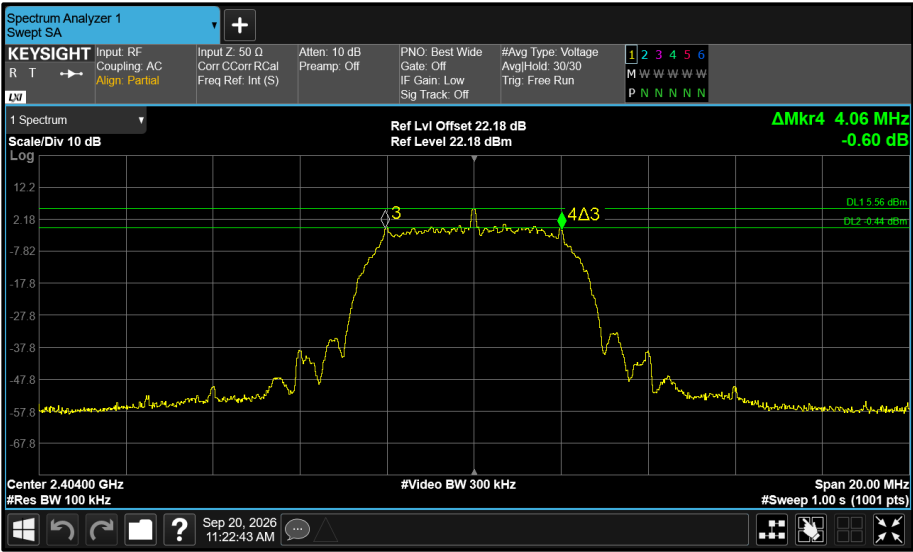


Figure 240 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

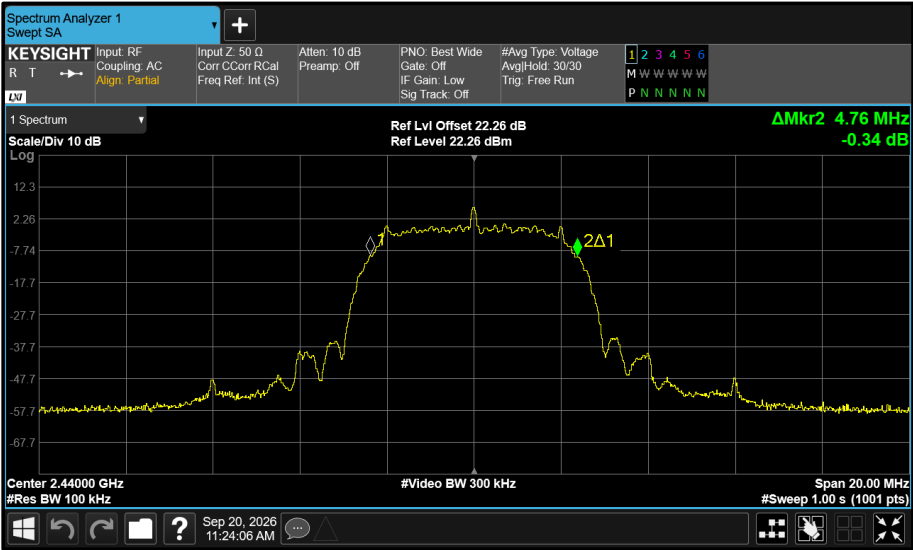


Figure 241 - Core 1 (B) 2440 MHz (CH38) 99% Bandwidth

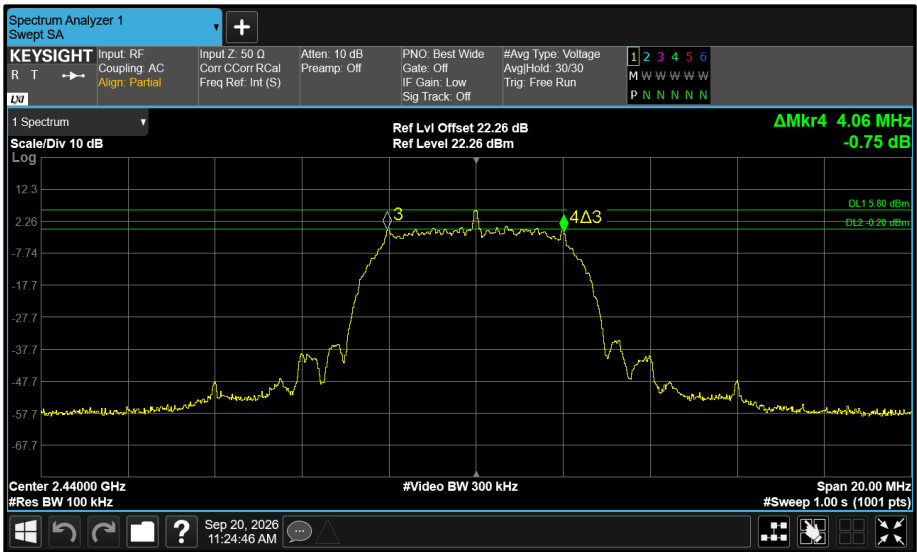


Figure 242 - Core 1 (B) 2440 MHz (CH38) 6 dB Bandwidth

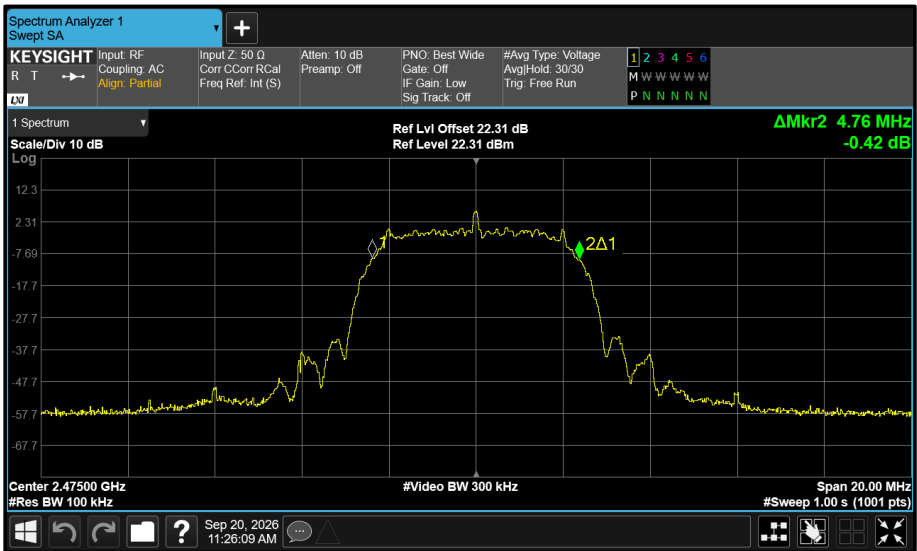


Figure 243 - Core 1 (B) 2475 MHz (CH73) 99% Bandwidth

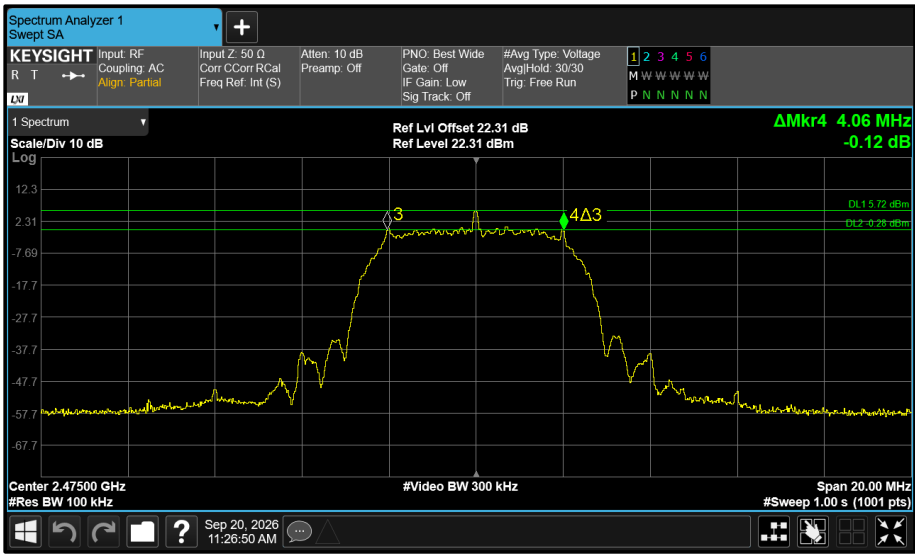


Figure 244 - Core 1 (B) 2475 MHz (CH73) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 (a)	Test Method(s):	C63.10 6.9.3 C63.10 6.9.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	FCC+ISEDG iPa Core 1 LE (LE 1M)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	-	0.668	-	-	≥500.0
2440	-	0.672	-	-	≥500.0
2480	-	0.672	-	-	≥500.0

Table 33 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	-	1.016	-	-	-
2440	-	1.016	-	-	-
2480	-	1.016	-	-	-

Table 34 - 99% Bandwidth Results

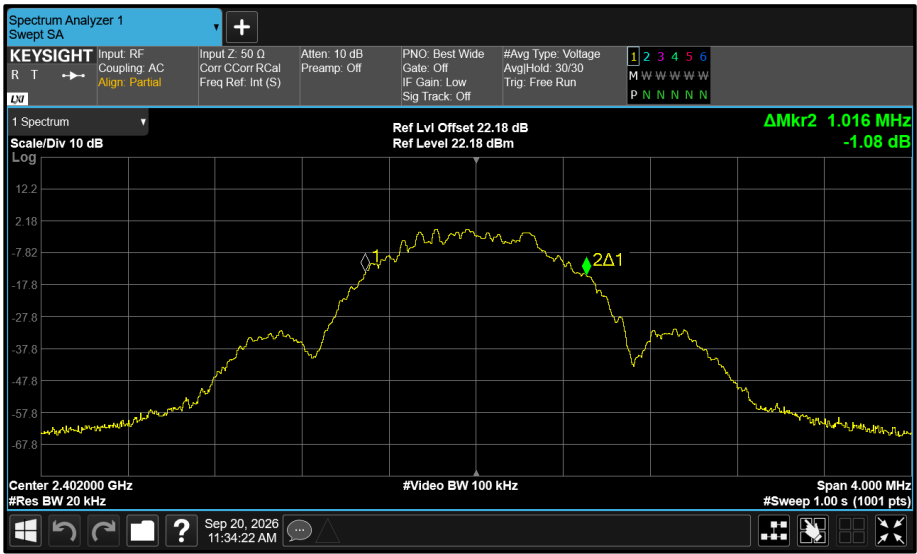


Figure 245 - Core 1 (B) 2402 MHz (CH37) 99% Bandwidth