



Emissions within U-NII-5 (continued)


Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	XHDRPL32 (16QAM)

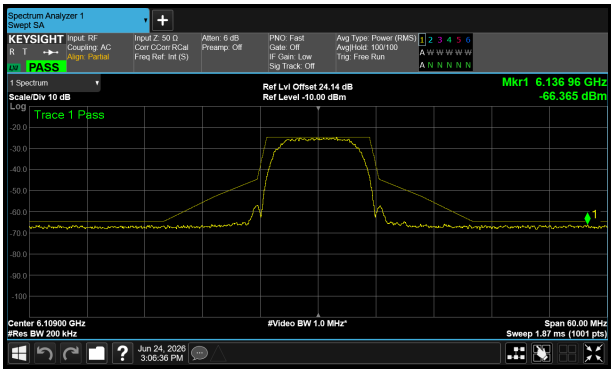


6109 MHz (Core 0)

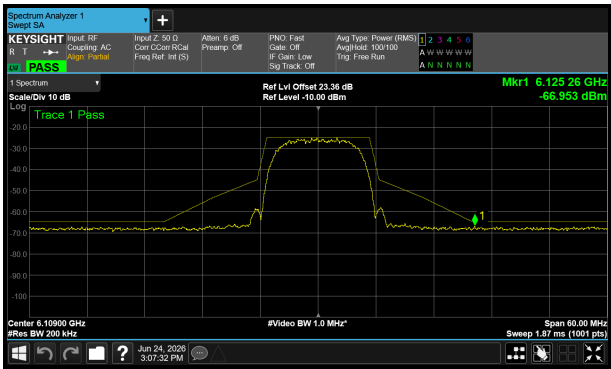


6109 MHz (Core 1)

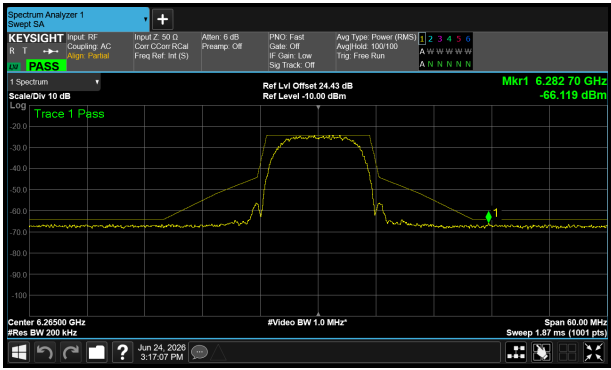


6265 MHz (Core 0)

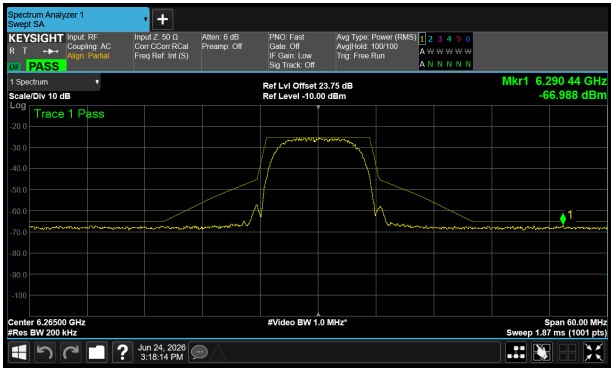

6265 MHz (Core 1)

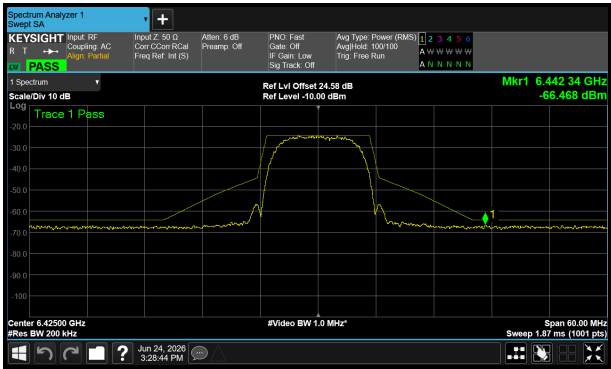


6425 MHz (Core 0)

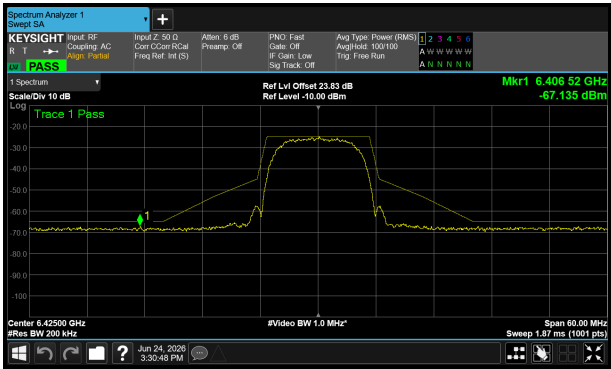


6425 MHz (Core 1)

Emissions within U-NII-5 (continued)


Antenna Configuration:	Beamforming	Mode:	HDT
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	HDT2 ($\pi/4$ -QPSK)

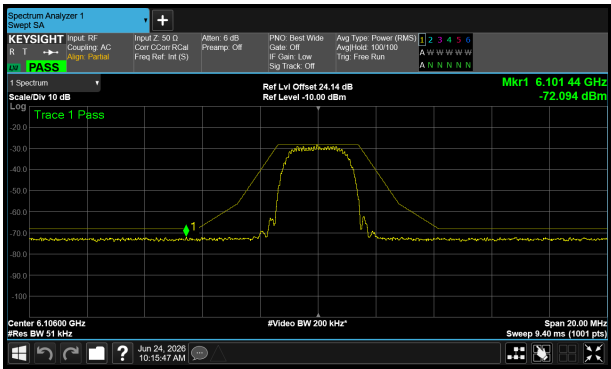


6106 MHz (Core 0)

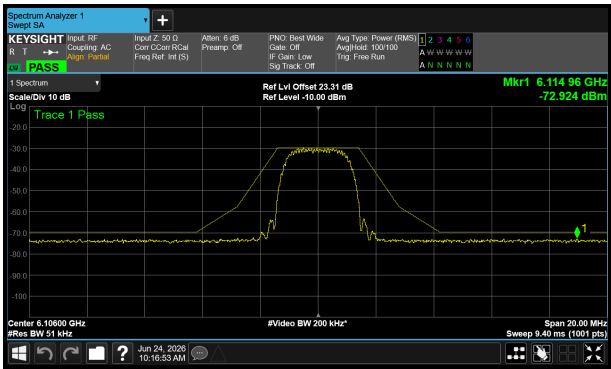


6106 MHz (Core 1)

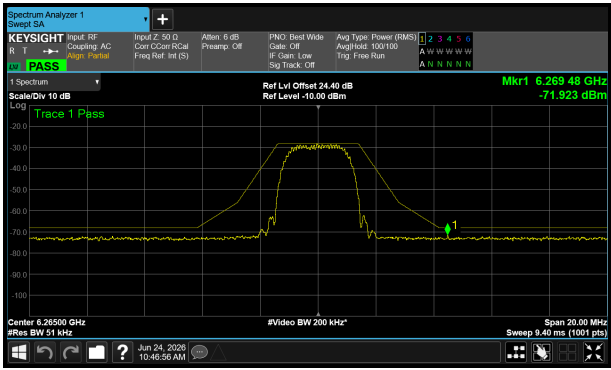


6265 MHz (Core 0)

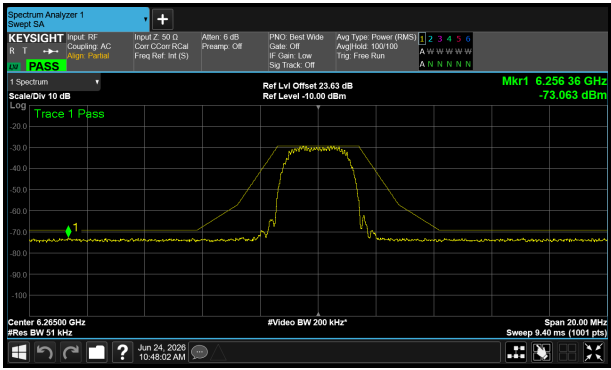

6265 MHz (Core 1)

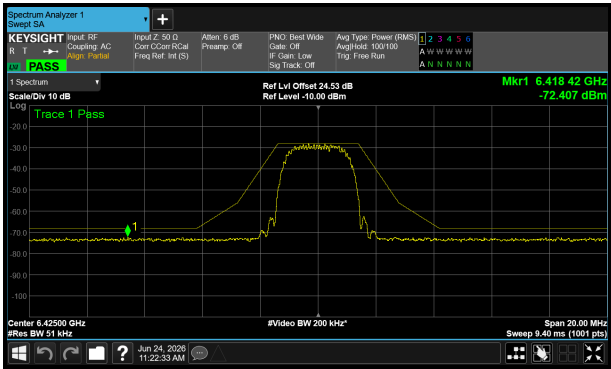


6425 MHz (Core 0)

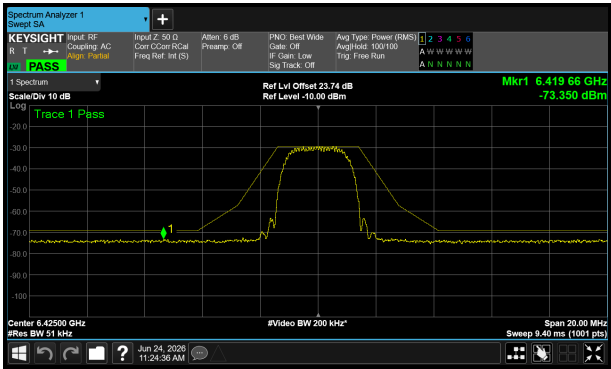


6425 MHz (Core 1)

Emissions within U-NII-5 (continued)


Antenna Configuration:	Beamforming	Mode:	HDT
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	HDT4 (8PSK)

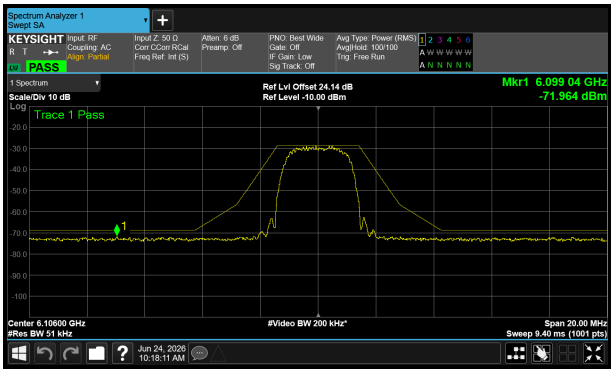


6106 MHz (Core 0)

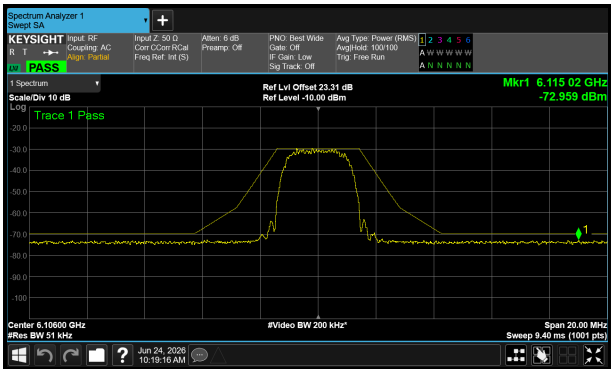


6106 MHz (Core 1)

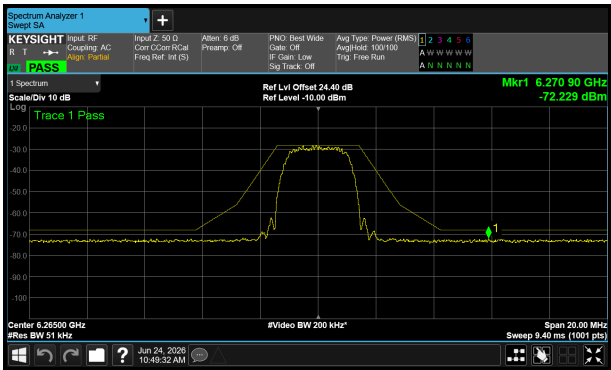


6265 MHz (Core 0)

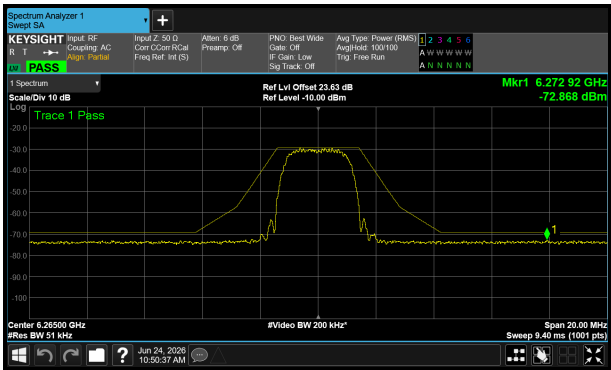

6265 MHz (Core 1)

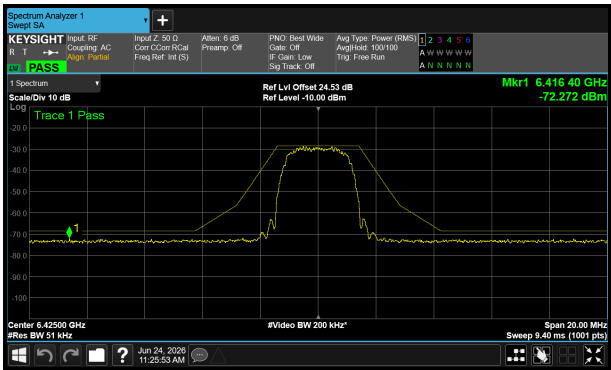


6425 MHz (Core 0)

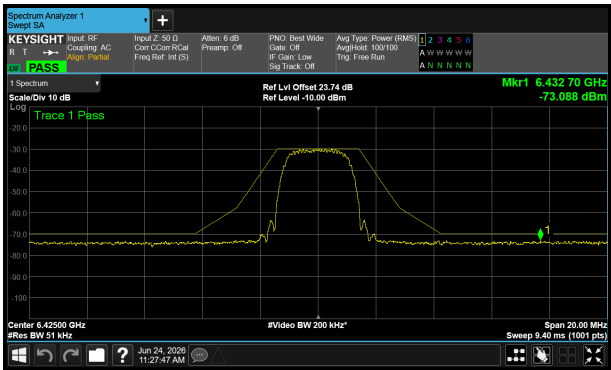


6425 MHz (Core 1)

Emissions within U-NII-5 (continued)


Antenna Configuration:	Beamforming	Mode:	HDT
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	HDT8 (16QAM)

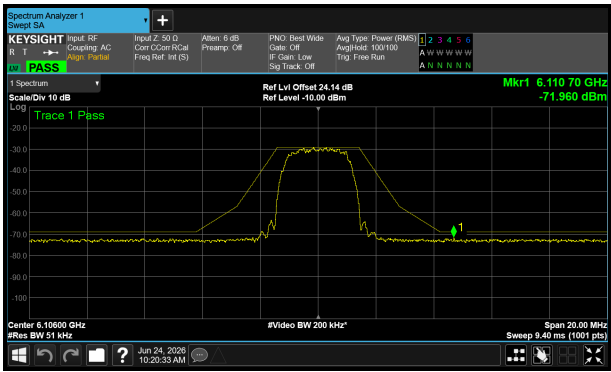


6106 MHz (Core 0)

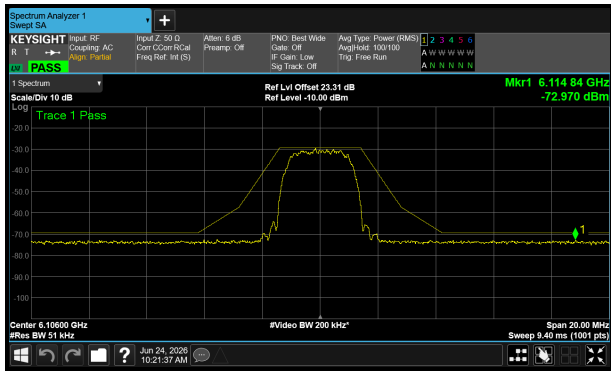


6106 MHz (Core 1)

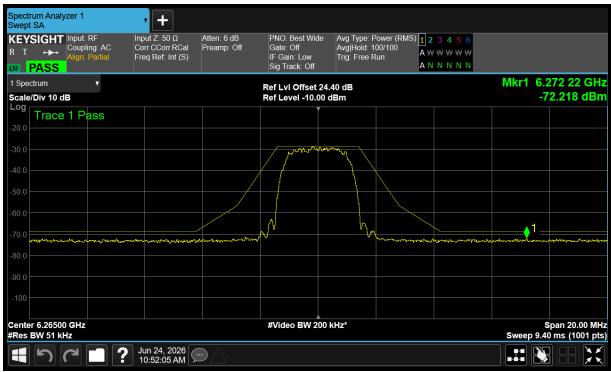


6265 MHz (Core 0)

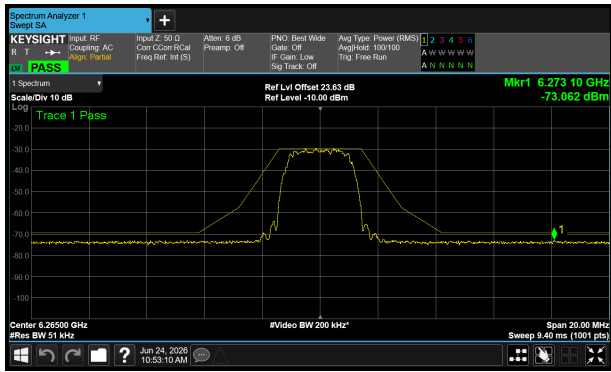

6265 MHz (Core 1)

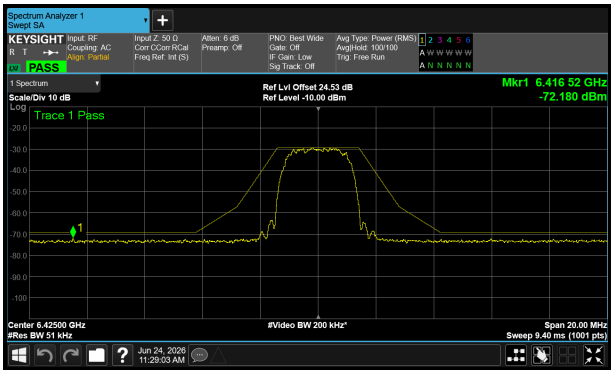

6425 MHz (Core 0)

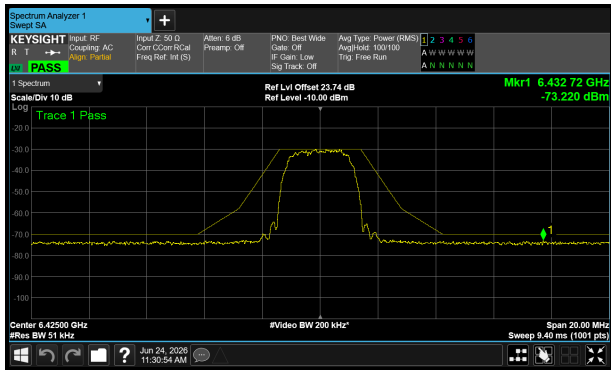

6425 MHz (Core 1)

4.6 Very Low Power Device Transmit Power Control

Test Summary:

Test Engineer:	Raghavendra Katti	Test Date:	22 June 2026
Test Sample Serial Number:	KRF2XD026D		

FCC Clause:	Part 15.407(d)(10)
ISED Canada Clause:	RSS-248 4.5.6 / RSS-Gen 6.12
Test Method Used:	KDB 987594 D02 Section M

Environmental Conditions:


Temperature (°C):	24
Relative Humidity (%):	50

Note(s):

1. The EUT was connected to a companion device via a variable attenuator. A signal analyser was connected to the EUT via a directional coupler. The EUT was associated with the companion, and data transfer was initiated using iPerf. The test channel and data rate was determined by a script provided by the customer.
2. The variable attenuator was decreased to 0 dB to achieve the TPC Low condition declared by the customer, and the raw conducted PSD was measured.
3. The variable attenuator was then increased to 40 dB to achieve the TPC High condition declared by the customer, and the raw conducted PSD was measured.
4. The raw measured TPC High PSD was referenced to the maximum EIRP spectral density measured in section 4.4 of this report.
5. The delta between the raw measured TPC Low PSD and TPC High PSD was subtracted from the TPC High EIRP spectral density to obtain the TPC Low EIRP spectral density.

Very Low Power Device Transmit Power Control (continued)**Results:**

TPC Level	Frequency (MHz)	EIRP SD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
High	Hopping	-6.92	-5.00	1.92
Low	Hopping	-16.29	-11.00	5.29

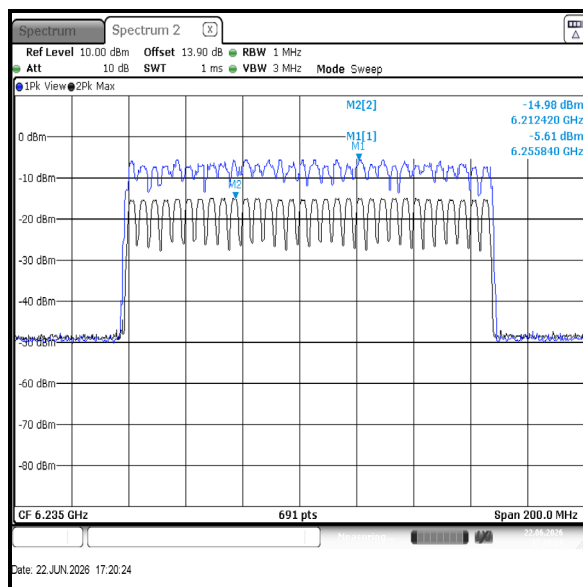

4.7 Contention Based Protocol

Test Summary:

Test Engineer:	Raghavendra Katti	Test Date:	23 June 2026
Test Sample Serial Number:	KRF2XD026D		

FCC Clause:	Part 15.407(d)(6)
ISED Canada Clause:	RSS-248 4.7
Test Method Used:	KDB 987594 D02 Section I, KDB 987594 D04 Section 1


Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	50

Note(s):

1. The EUT was associated with a companion device in a 'real-world' scenario and data transfer was initiated using iPerf. The mode and packet type were set automatically. All modes and packet types satisfy $BW_{EUT} < BW_{INC}$, therefore testing was performed in this mode only with one incumbent frequency.
2. A signal generator was configured to transmit a 10 MHz AWGN signal at the required frequency.
3. The signal analyser was monitored whilst increasing the AWGN signal level. The AWGN level at which the EUT ceased transmission was recorded. The test was repeated a further 9 times to confirm $\geq 90\%$ detection probability.
4. The lowest antenna gain was used in accordance with KDB 987594 D04 Section 1.5.
5. The 'AWGN Power' reported in the tables below includes the U.FL cable loss.
6. The EUT does not support channel puncturing or bandwidth reduction in NB-FHSS mode. The EUT blacklists frequencies where it detects an incumbent signal and temporarily reduces the hop set using its detect and avoid mechanism.

Example Incumbent Signal

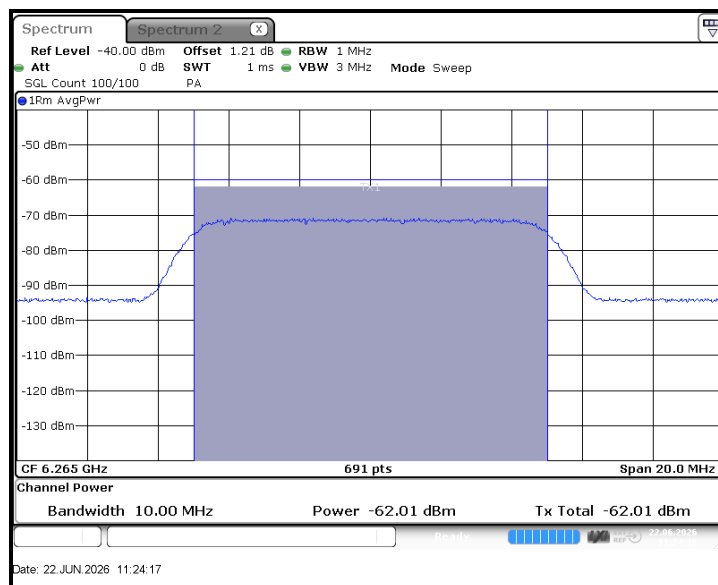


Contention Based Protocol (continued)

Results:

Frequency Range:	6105 MHz to 6425 MHz	Band:	U-NII-5
Limit Clause:	15.407(d)(6)	Test Method:	987594 D02 v03 II.I.
Limit (dBm):	-62	Incumbent Position:	N/A

Channel Frequency (MHz):	6265	Channel Bandwidth (MHz):	≤ 8
Mode:	Auto	99% Occupied Bandwidth (MHz):	< 10
Rate:	Auto	Incumbent Frequency (MHz):	6265
Antenna Gain (dBi):	0.9	Cable Loss (dB):	1.2

AWGN Power (dBm)	Adjusted Power (dBm)	Margin (dB)	EUT Detected Incumbent Signal	Detection Probability (%)
-82.0	-82.9	20.9	No	-
-69.0	-69.9	7.9	Minimum	-
-67.0	-67.9	5.9	Yes	100

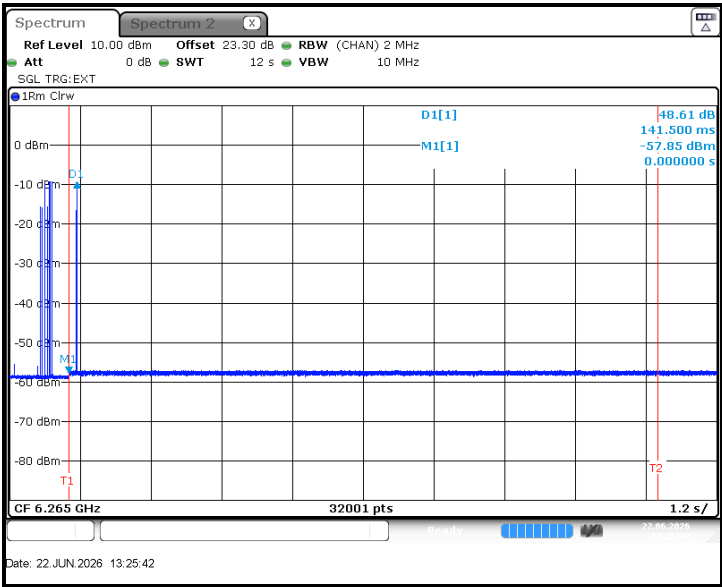

5 Radiated Test Results

5.1 Duty Cycle

Test Summary:

Test Engineers:	Faissal Merzaki, Prassana Reddy & Jose Bayona	Test Dates:	10 April 2026 to 14 April 2026
Test Sample Serial Number:	PK2K7963XX		

FCC Clause:	Part 15.35(c)
ISED Canada Clause:	RSS-Gen 8.2
Test Method Used:	ANSI C63.10 Section 12.2.b)2)

Environmental Conditions:

Temperature (°C):	20
Relative Humidity (%):	38

Note(s):


1. In order to assist with the determination of the average level of spurious emissions field strength, measurements were made of duty cycle to determine the transmission duration and the silent period time of the transmitter.
2. The duty cycle was measured for each mode and channel for ePA, iPA, SISO and beamforming. Section 5.4 reports the measured duty cycle correction factors for each. The maximum duty cycle variation for the same mode across channels and ports is less than 2%, corresponding to a correction factor variation of less than 0.03 dB. Therefore, the table below presents the typical duty cycle for each mode.
3. Example plots of the worst-case, for one configuration, can be seen below to show setting parameters comply with testing method/procedure. All other plots are archived on the UL IT server and available for inspection if required.
4. The equation in section 2.4 was used to calculate the correction factor based on the measured duty cycle.

Duty Cycle (continued)**Results: ePA**

Mode	Width (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)
BDR	2.876	3.755	76.60	1.16
LE1M	2.125	2.506	84.80	0.72
LE2M	1.066	1.874	56.85	2.45
4DH5	2.928	3.755	77.97	1.08
8DH5	2.933	3.755	78.10	1.07
HDRPS2	16.184	17.498	92.49	0.34
HDRPM12	2.336	2.509	93.11	0.31
XHDRPM8	8.074	8.756	92.21	0.35
HDRPL8	3.563	3.755	94.87	0.23
HDRPL24	1.094	1.250	87.54	0.58
XHDRPL24	2.083	2.506	83.14	0.80
HDT3	1.446	1.526	94.76	0.23
HDT4	1.106	1.181	93.65	0.29
HDT6	0.762	0.836	91.14	0.40

Example Plot / Worst Case Mode

Antenna Configuration:	SISO	Mode:	LE2M
Test Port:	Core 1	Rate/Modulation:	LE2M (GFSK)

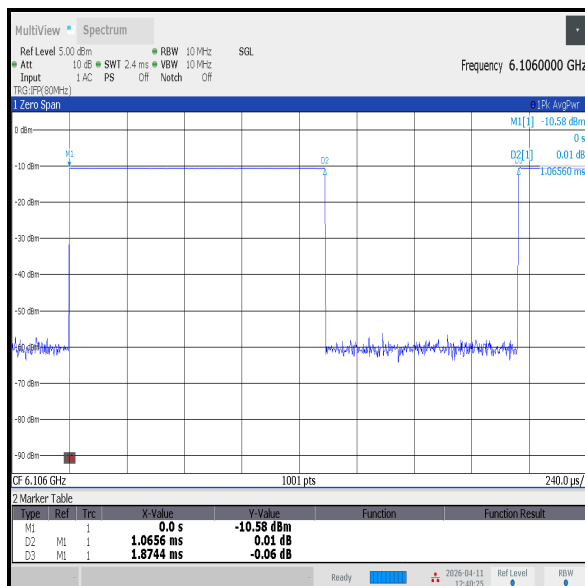

5.2 Out of Band Radiated Emissions <1 GHz

Test Summary:

Test Engineers:	Faissal Merzaki, Atiqul Tanvir & Jose Bayona	Test Dates:	08 May 2026 & 27 May 2026
Test Sample Serial Number:	PK2K7963XX & L5Q6J36Y22		

FCC Clause:	Parts 15.407(b)(6)(9)(10) & 15.209(a)
ISED Canada Clause:	RSS-248 4.6.2 a. / RSS-Gen 6.13 & 8.9
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5 and 12.7
Frequency Range	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	21 to 23
Relative Humidity (%):	38 to 41


Note(s):

1. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
2. After preliminary investigation, BDR / Beamforming / Core 0 + Core 1 / ePA was determined to be worst-case.
3. All other emissions shown on the pre-scans were investigated and found to be ambient, or > 20 dB below the appropriate limit or below the noise floor of the measurement system.
4. Measurements from 30 MHz to 1 GHz were performed in a semi-anechoic chamber (Asset Number K226203) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
5. Final measurements were performed on the marker frequencies and the results recorded in the table below. The test receiver resolution bandwidth was set to 120 kHz, using a CISPR peak detector.

Out of Band Radiated Emissions (continued)

Results: Quasi-Peak / Middle Channel / BDR / Beamforming / ePA

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Polarity
34.495	26.35	40.00	13.65	Vertical

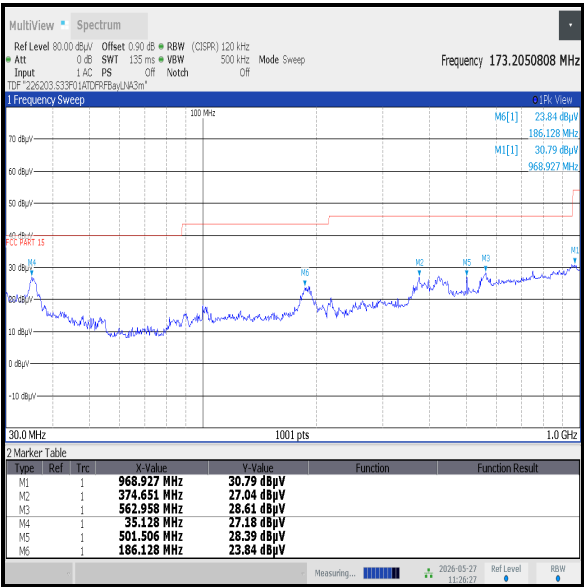

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying table.

5.3 Out of Band Radiated Emissions >1 GHz

Test Summary:

Test Engineers:	Faissal Merzaki, Atiqul Tanvir & Jose Bayona	Test Dates:	21 May 2026 to 23 May 2026
Test Sample Serial Number:	PK2K7963XX		

FCC Clause:	Part 15.407(b)(6),(10) & 15.209(a)
ISED Canada Clause:	RSS-248 4.6.2 a. / RSS-Gen 6.13 & 8.9
Test Method Used:	ANSI C63.10 Sections 6.3, 6.6 & 12.7
Frequency Range	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	20 to 23
Relative Humidity (%):	36 to 40

Note(s):

1. In accordance with KDB 987594 II.G., unwanted emissions are measured using an RMS detector and 15.35(b) (RSS-Gen 8.1) applies where peak emissions must be limited to no more than 20 dB above the average limit. The e.i.r.p. limit lines of -27 dBm/MHz (average) and -7 dBm/MHz (peak) were converted to field strength at 3m using a conversion factor of 95.2.
2. After preliminary investigation, BDR / Beamforming / Core 0 + Core 1 / ePA was determined to be worst-case.
3. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
4. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak and average noise floor readings of the measuring receiver were recorded as shown in the tables below.
5. The emission shown on the 1 GHz to 7.5 GHz plot is the EUT fundamental.
6. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K226202/ K226203) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Out of Band Radiated Emissions (U-NII-5) (continued)





Results: BDR / Beamforming / Core 0 + Core 1 / ePA

Results: Middle Channel / Field Strength / Peak

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarity
7367.760	55.61	74.00	18.39	Horizontal

Results: Middle Channel / Field Strength / Average

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarity
7491.250	46.55	54.00	7.45	Horizontal

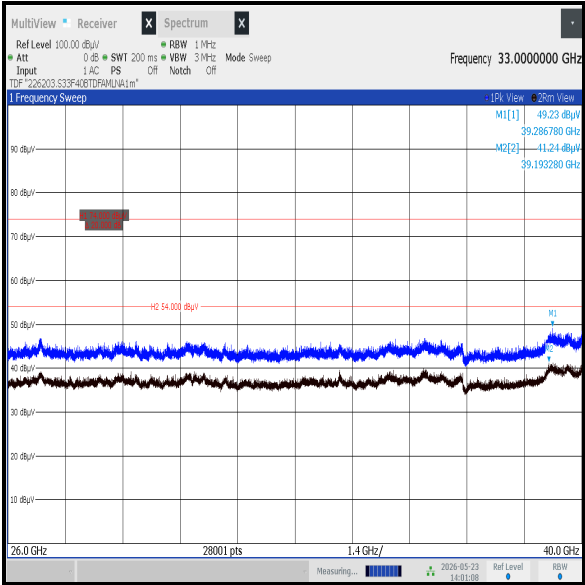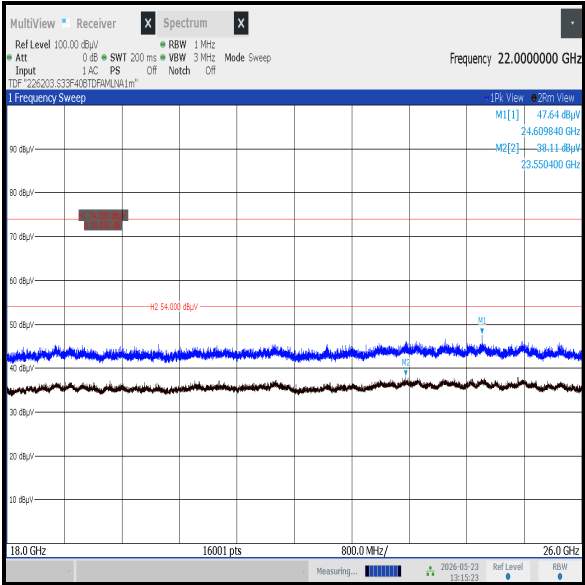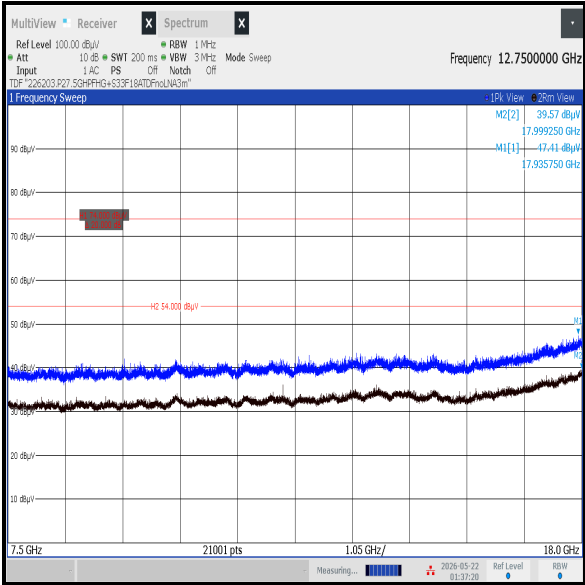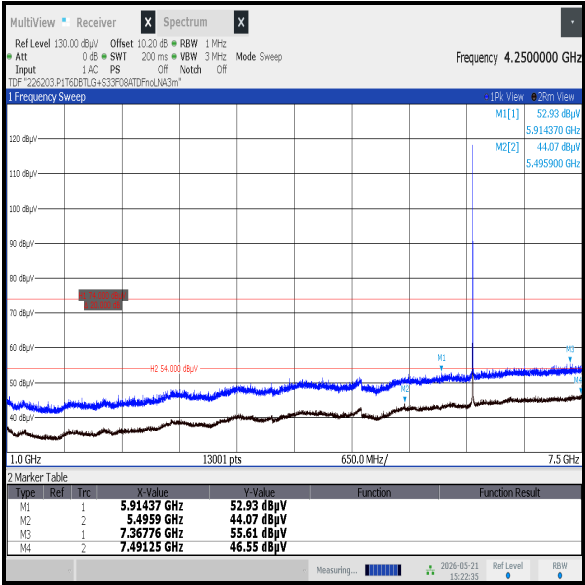

5.4 Band Edge Radiated Emissions

Test Summary:

Test Engineers:	Faissal Merzaki, Prassana Reddy & Jose Bayona	Test Dates:	10 April 2026 to 14 April 2026
Test Sample Serial Number:	PK2K7963XX		

FCC Clause:	Part 15.407(b)(6)
ISED Canada Clause:	RSS-248 4.6.2 a
Test Method Used:	ANSI C63.10 Sections 6.10 & 12.7

Environmental Conditions:

Temperature (°C):	20
Relative Humidity (%):	38

Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. For all average measurements in this section, 7462 sweeps were used. This satisfies the requirement for the minimum number of sweeps, as stated in ANSI C63.10 Section 12.7.7.2 f).
3. In accordance with ANSI C63.10 Section 12.7.7.2.g), for average measurements, modes where the EUT was transmitting < 98% duty cycle, the duty cycle correction factor calculated in section 5.1 was added to the measured result.
4. In accordance with KDB 987594 section G, 15.35(b) / RSS-Gen 8.1 applies where the peak radio frequency emissions limit is 20 dB above the maximum permitted average emission limit.
5. Both Lower and upper band edges have been tested but only Lower Band edge measurements have been presented in the test report. As top channel, is ≥ 700 MHz away from the upper band edge.
6. The worst-case mode (smallest margin) per bandwidth and antenna configuration is reported below. Measurement data for all modes is archived on the UL IT server and available for inspection if required.
7. Example plots of the worst-case configuration, can be seen below to show setting parameters comply with testing method/procedure. All other plots are archived on the UL IT server and available for inspection if required.

Band Edge Radiated Emissions (continued)

Results: Example Plot / HDRPL24 / Beamforming / Core 0 + Core 1 / ePA



Band Edge Radiated Emissions (continued)**Results: BDR / SISO / Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5861.730	59.63	88.20	28.57	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.070	47.24	1.16	48.40	68.20	19.80	Vertical

Results: LE 1M / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5761.090	60.00	88.20	28.20	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.885	47.24	0.72	47.96	68.20	20.24	Vertical

Results: LE 2M / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5781.625	59.11	88.20	29.09	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.700	47.22	2.45	49.67	68.20	18.53	Vertical

Band Edge Radiated Emissions (continued)**Results: 4DH5 / SISO / Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5902.245	59.62	88.20	28.58	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.145	47.27	1.08	48.35	68.20	19.85	Vertical

Results: 8DH5 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5748.140	59.52	88.20	28.68	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.070	47.22	1.07	48.29	68.20	19.91	Vertical

Results: HDRPS2 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5889.295	59.48	88.20	28.72	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.995	47.22	0.34	47.56	68.20	20.64	Vertical

Band Edge Radiated Emissions (continued)**Results: HDRPM12 / SISO / Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5924.445	59.61	88.20	28.59	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.070	47.28	0.31	47.59	68.20	20.61	Vertical

Results: XHDRPM8 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5774.410	59.88	88.20	28.32	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.700	47.26	0.35	47.61	68.20	20.59	Vertical

Results: HDRPL8 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5870.470	59.31	88.20	28.89	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.270	47.22	0.23	47.45	68.20	20.75	Vertical

Band Edge Radiated Emissions (continued)**Results: HDRPL24 / SISO / Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5813.280	59.33	88.20	28.87	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5856.030	47.22	0.58	47.80	68.20	20.40	Vertical

Results: XHDRPL24 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5864.960	59.18	88.20	29.02	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.700	47.21	0.80	48.02	68.20	20.18	Vertical

Results: HDT3 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5912.605	59.84	88.20	28.36	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.070	47.21	0.23	47.44	68.20	20.76	Vertical

Band Edge Radiated Emissions (continued)**Results: HDT4 / SISO / Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5842.490	59.66	88.20	28.54	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.145	47.22	0.29	47.50	68.20	20.70	Vertical

Results: HDT6 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5805.305	59.36	88.20	28.84	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.515	47.24	0.40	47.64	68.20	20.56	Vertical

Band Edge Radiated Emissions (continued)**Results: BDR / SISO / Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5850.630	59.52	88.20	28.68	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.810	47.17	1.16	48.33	68.20	19.87	Vertical

Results: LE 1M / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5920.005	60.39	88.20	27.81	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5853.960	47.24	0.72	47.96	68.20	20.24	Vertical

Results: LE 2M / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5916.120	59.66	88.20	28.54	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.145	47.21	2.46	49.67	68.20	18.53	Vertical

Band Edge Radiated Emissions (continued)**Results: 4DH5 / SISO / Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5845.450	58.42	88.20	29.78	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.700	46.26	1.09	47.35	68.20	20.85	Vertical

Results: 8DH5 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.330	58.33	88.20	29.87	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.995	46.27	1.09	47.36	68.20	20.84	Vertical

Results: HDRPS2 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5890.775	58.34	88.20	29.86	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5853.960	46.29	0.34	46.63	68.20	21.57	Vertical

Band Edge Radiated Emissions (continued)**Results: HDRPM12 / SISO / Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5744.440	58.35	88.20	29.85	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.700	46.28	0.30	46.58	68.20	21.62	Vertical

Results: XHDRPM8 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5900.025	58.38	88.20	29.82	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.700	46.27	0.35	46.62	68.20	21.58	Vertical

Results: HDRPL8 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5843.300	58.49	88.20	29.71	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.700	46.26	0.23	46.49	68.20	21.71	Vertical

Band Edge Radiated Emissions (continued)**Results: HDRPL24 / SISO / Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5810.050	58.05	88.20	30.15	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.840	46.30	0.58	46.88	68.20	21.32	Vertical

Results: XHDRPL24 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5784.210	59.06	88.20	29.14	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5853.750	46.27	0.80	47.07	68.20	21.13	Vertical

Results: HDT3 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5923.890	59.93	88.20	28.27	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.700	47.20	0.23	47.43	68.20	20.77	Vertical

Band Edge Radiated Emissions (continued)**Results: HDT4 / SISO / Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5918.710	59.69	88.20	28.51	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.145	47.22	0.31	47.53	68.20	20.67	Vertical

Results: HDT6 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5742.775	59.95	88.20	28.25	Vertical

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.885	47.22	0.42	47.64	68.20	20.56	Vertical

Results: BDR / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5893.550	59.45	88.20	28.75	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.700	47.35	1.16	48.51	68.20	19.69	Horizontal

Band Edge Radiated Emissions (continued)**Results: LE 1M / Beamforming / Core 0 + Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5852.480	59.65	88.20	28.55	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.070	47.34	0.72	48.06	68.20	20.14	Horizontal

Results: LE 2M / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5763.310	59.88	88.20	28.32	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5856.180	47.28	2.46	49.74	68.20	18.46	Horizontal

Results: 4DH5 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5793.465	59.85	88.20	28.35	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.885	47.36	1.08	48.44	68.20	19.76	Horizontal

Band Edge Radiated Emissions (continued)**Results: 8DH5 / Beamforming / Core 0 + Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5860.620	60.16	88.20	28.04	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.810	47.34	1.07	48.41	68.20	19.79	Horizontal

Results: HDRPS2 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5878.195	59.41	88.20	28.79	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.145	47.36	0.34	47.71	68.20	20.49	Horizontal

Results: HDRPM12 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5836.200	59.52	88.20	28.68	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.440	47.37	0.30	47.67	68.20	20.53	Horizontal

Band Edge Radiated Emissions (continued)**Results: XHDRPM8 / Beamforming / Core 0 + Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5894.105	60.00	88.20	28.20	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.440	47.38	0.35	47.72	68.20	20.48	Horizontal

Results: HDRPL8 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5891.750	60.02	88.20	28.18	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.700	47.36	0.23	47.59	68.20	20.61	Horizontal

Results: HDRPL24 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5760.460	59.71	88.20	28.49	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.460	47.36	0.58	47.93	68.20	20.27	Horizontal

Band Edge Radiated Emissions (continued)**Results: XHDRPL24 / Beamforming / Core 0 + Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5769.200	59.42	88.20	28.78	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.270	47.36	0.80	48.16	68.20	20.04	Horizontal

Results: HDT3 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5778.110	59.68	88.20	28.52	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.440	47.34	0.24	47.58	68.20	20.62	Horizontal

Results: HDT4 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5816.590	59.48	88.20	28.72	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5853.960	47.33	0.30	47.63	68.20	20.57	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDT6 / Beamforming / Core 0 + Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5878.195	59.84	88.20	28.36	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5853.405	47.31	0.42	47.72	68.20	20.48	Horizontal

Results: BDR / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5804.750	59.90	88.20	28.30	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.885	47.25	1.16	48.41	68.20	19.79	Horizontal

Results: LE 1M / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5777.555	59.30	88.20	28.90	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.255	47.22	0.72	47.94	68.20	20.26	Horizontal

Band Edge Radiated Emissions (continued)**Results: LE 2M / Beamforming / Core 0 + Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5866.725	59.09	88.20	29.11	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.070	47.19	2.46	49.65	68.20	18.55	Horizontal

Results: 4DH5 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5753.135	59.40	88.20	28.80	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.515	47.21	1.08	48.29	68.20	19.91	Horizontal

Results: 8DH5 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5751.655	59.32	88.20	28.88	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.885	47.17	1.07	48.24	68.20	19.96	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPS2 / Beamforming / Core 0 + Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5922.965	59.55	88.20	28.65	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.700	47.25	0.35	47.60	68.20	20.60	Horizontal

Results: HDRPM12 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5845.450	59.24	88.20	28.96	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5854.515	47.21	0.31	47.52	68.20	20.68	Horizontal

Results: XHDRPM8 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5798.460	59.74	88.20	28.46	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.995	47.19	0.35	47.54	68.20	20.66	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPL8 / Beamforming / Core 0 + Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.650	59.80	88.20	28.40	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.840	47.22	0.23	47.45	68.20	20.75	Horizontal

Results: HDRPL24 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5822.400	59.18	88.20	29.02	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.460	47.24	0.58	47.82	68.20	20.38	Horizontal

Results: XHDRPL24 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5781.550	59.78	88.20	28.42	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.270	47.21	0.81	48.02	68.20	20.18	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDT3 / Beamforming / Core 0 + Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5862.100	59.57	88.20	28.63	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.810	47.23	0.25	47.48	68.20	20.72	Horizontal

Results: HDT4 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5764.235	59.55	88.20	28.65	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.440	47.25	0.31	47.56	68.20	20.64	Horizontal

Results: HDT6 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.440	59.03	88.20	29.17	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5855.440	47.22	0.42	47.64	68.20	20.56	Horizontal

--- END OF REPORT ---