


26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	58.560	-	-	-	320.0
7025	58.560	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	63.840	-	-	-	320.0
7025	64.000	-	-	-	320.0

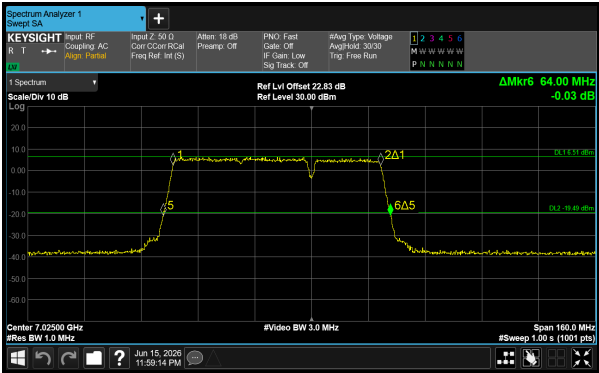


26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	156.400	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	165.600	-	-	-	320.0

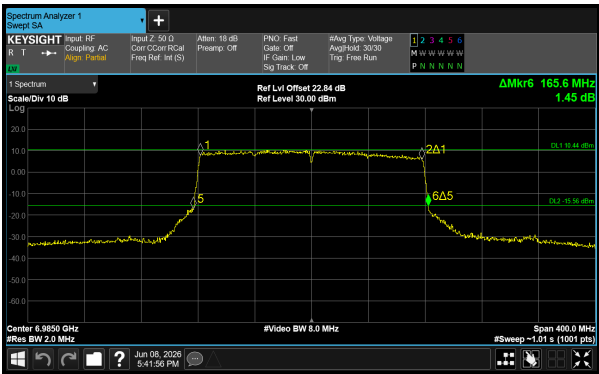


26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	117.300	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	125.700	-	-	-	320.0

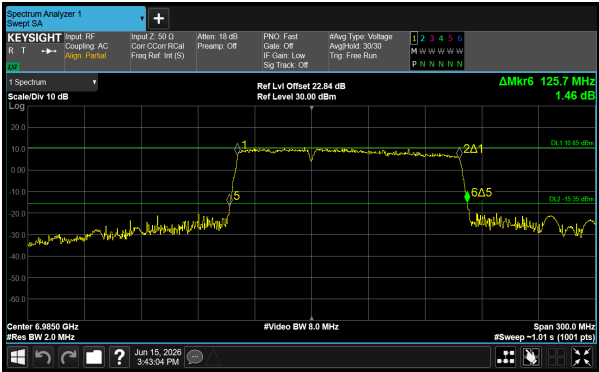


26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	137.880	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	223.560	-	-	-	320.0

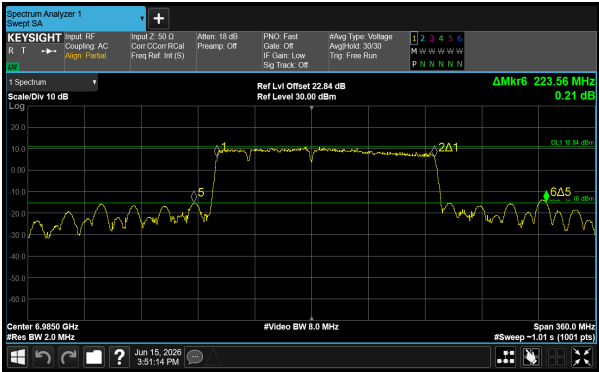

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)**Results: LPI / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	16.800	-	-	320.0
6995	-	16.800	-	-	320.0
7095	-	16.740	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	21.900	-	-	320.0
6995	-	21.840	-	-	320.0
7095	-	22.080	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	-	36.720	-	-	320.0
6965	-	36.720	-	-	320.0
7085	-	36.720	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	-	44.280	-	-	320.0
6965	-	44.520	-	-	320.0
7085	-	44.160	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	-	81.800	-	-	320.0
7025	-	82.400	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	-	116.400	-	-	320.0
7025	-	116.000	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	155.200	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	166.000	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	19.140	-	-	320.0
6995	-	19.140	-	-	320.0
7095	-	19.140	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	23.040	-	-	320.0
6995	-	23.100	-	-	320.0
7095	-	23.400	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	18.660	-	-	320.0
6995	-	16.920	-	-	320.0
7095	-	18.720	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	21.180	-	-	320.0
6995	-	18.360	-	-	320.0
7095	-	20.520	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	18.360	-	-	320.0
6995	-	16.860	-	-	320.0
7095	-	18.360	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	20.760	-	-	320.0
6995	-	18.660	-	-	320.0
7095	-	20.700	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	18.240	-	-	320.0
6995	-	18.240	-	-	320.0
7095	-	18.300	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	21.360	-	-	320.0
6995	-	20.940	-	-	320.0
7095	-	20.880	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	17.040	-	-	320.0
6995	-	16.980	-	-	320.0
7095	-	17.040	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	19.920	-	-	320.0
6995	-	19.380	-	-	320.0
7095	-	19.680	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	18.240	-	-	320.0
6995	-	18.120	-	-	320.0
7095	-	18.120	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	21.720	-	-	320.0
6995	-	21.000	-	-	320.0
7095	-	21.120	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	-	38.040	-	-	320.0
6965	-	38.160	-	-	320.0
7085	-	38.160	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	-	44.520	-	-	320.0
6965	-	45.240	-	-	320.0
7085	-	44.760	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	-	77.400	-	-	320.0
7025	-	77.600	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	-	83.000	-	-	320.0
7025	-	83.200	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	-	58.560	-	-	320.0
7025	-	58.560	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	-	63.840	-	-	320.0
7025	-	63.840	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	156.400	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	166.000	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	117.300	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	125.700	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	137.520	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	146.160	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)**Results: LPI / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	16.800	16.920	-	-	320.0
6995	16.800	16.860	-	-	320.0
7095	16.800	16.920	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	21.840	22.260	-	-	320.0
6995	21.960	22.140	-	-	320.0
7095	21.900	22.380	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	36.600	36.720	-	-	320.0
6965	36.600	36.840	-	-	320.0
7085	36.720	36.840	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	44.040	44.280	-	-	320.0
6965	43.800	44.280	-	-	320.0
7085	44.160	44.040	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	82.000	82.400	-	-	320.0
7025	82.200	82.600	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	116.200	117.600	-	-	320.0
7025	115.800	117.000	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	155.200	155.200	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	165.600	165.200	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	19.140	19.200	-	-	320.0
6995	19.140	19.140	-	-	320.0
7095	19.080	19.200	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	23.040	22.800	-	-	320.0
6995	23.100	23.220	-	-	320.0
7095	23.520	23.160	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.660	18.660	-	-	320.0
6995	16.980	16.920	-	-	320.0
7095	18.660	18.780	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	20.880	20.700	-	-	320.0
6995	18.420	18.360	-	-	320.0
7095	20.400	20.640	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.300	18.240	-	-	320.0
6995	16.920	16.980	-	-	320.0
7095	18.360	18.360	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	20.760	20.460	-	-	320.0
6995	18.780	18.660	-	-	320.0
7095	20.760	20.700	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.240	18.240	-	-	320.0
6995	18.180	18.240	-	-	320.0
7095	18.300	18.240	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	21.180	20.880	-	-	320.0
6995	21.000	20.880	-	-	320.0
7095	21.060	20.820	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	17.040	16.860	-	-	320.0
6995	16.980	16.800	-	-	320.0
7095	17.040	16.920	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	19.800	19.380	-	-	320.0
6995	19.500	18.660	-	-	320.0
7095	19.680	19.320	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.240	18.060	-	-	320.0
6995	18.120	18.060	-	-	320.0
7095	18.120	18.060	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	21.720	21.060	-	-	320.0
6995	21.240	20.580	-	-	320.0
7095	21.180	20.520	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	38.160	38.160	-	-	320.0
6965	38.160	38.040	-	-	320.0
7085	38.160	38.040	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	44.760	44.880	-	-	320.0
6965	44.640	45.000	-	-	320.0
7085	44.760	44.880	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	77.400	77.400	-	-	320.0
7025	77.600	77.400	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	83.200	83.200	-	-	320.0
7025	83.000	83.000	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	58.560	58.720	-	-	320.0
7025	58.560	58.560	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	63.680	63.680	-	-	320.0
7025	63.840	63.680	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	156.000	156.800	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	165.200	165.200	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	117.300	117.300	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	125.700	125.700	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	137.160	137.520	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	146.160	146.160	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)**Results: LPI / MIMO SDM**

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	19.080	19.140	-	-	320.0
6995	19.140	19.140	-	-	320.0
7095	19.200	19.140	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	22.800	22.860	-	-	320.0
6995	22.980	22.860	-	-	320.0
7095	23.040	22.860	-	-	320.0

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.660	18.600	-	-	320.0
6995	16.920	16.920	-	-	320.0
7095	18.720	18.660	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	20.640	20.700	-	-	320.0
6995	18.360	18.360	-	-	320.0
7095	20.580	20.640	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.360	18.300	-	-	320.0
6995	17.040	17.040	-	-	320.0
7095	18.300	18.360	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	20.820	20.760	-	-	320.0
6995	18.720	18.660	-	-	320.0
7095	20.700	20.640	-	-	320.0

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.240	18.180	-	-	320.0
6995	18.300	18.180	-	-	320.0
7095	18.240	18.240	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	21.120	20.880	-	-	320.0
6995	21.120	21.000	-	-	320.0
7095	21.120	21.000	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	17.040	16.860	-	-	320.0
6995	16.980	16.800	-	-	320.0
7095	16.980	16.860	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	19.680	19.320	-	-	320.0
6995	19.320	18.660	-	-	320.0
7095	19.680	19.260	-	-	320.0

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.240	18.060	-	-	320.0
6995	18.120	18.060	-	-	320.0
7095	18.120	18.120	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	21.900	20.880	-	-	320.0
6995	21.180	20.460	-	-	320.0
7095	21.000	20.760	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	38.040	38.160	-	-	320.0
6965	38.160	38.100	-	-	320.0
7085	38.040	38.160	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	44.640	44.760	-	-	320.0
6965	45.240	44.800	-	-	320.0
7085	44.760	44.760	-	-	320.0

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	77.400	77.400	-	-	320.0
7025	77.600	77.400	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	83.000	83.000	-	-	320.0
7025	83.200	82.800	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	58.560	58.560	-	-	320.0
7025	58.560	58.560	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	63.840	63.680	-	-	320.0
7025	63.680	64.000	-	-	320.0

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	156.400	156.400	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	165.200	165.200	-	-	320.0

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	117.000	117.300	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	125.400	126.000	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	137.520	137.520	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	146.520	146.160	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)**Results: LPI / TxBF**

Antenna Configuration:	TxBF	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	19.140	19.140	-	-	320.0
6995	19.200	19.140	-	-	320.0
7095	19.200	19.200	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	23.580	23.520	-	-	320.0
6995	23.400	23.340	-	-	320.0
7095	23.340	23.100	-	-	320.0

Antenna Configuration:	TxBF	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	38.040	38.040	-	-	320.0
6965	38.280	38.040	-	-	320.0
7085	38.280	38.040	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	44.880	44.520	-	-	320.0
6965	45.000	44.880	-	-	320.0
7085	44.880	45.240	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / LPI (continued)

Antenna Configuration:	TxBF	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	77.400	77.400	-	-	320.0
7025	77.600	77.600	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	83.200	83.000	-	-	320.0
7025	83.200	83.200	-	-	320.0

Antenna Configuration:	TxBF	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	156.400	156.800	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	166.000	165.200	-	-	320.0


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Results: VLP / SISO / Core 0

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	16.800	-	-	-	320.0
6995	16.800	-	-	-	320.0
7095	16.800	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	21.720	-	-	-	320.0
6995	22.080	-	-	-	320.0
7095	21.780	-	-	-	320.0

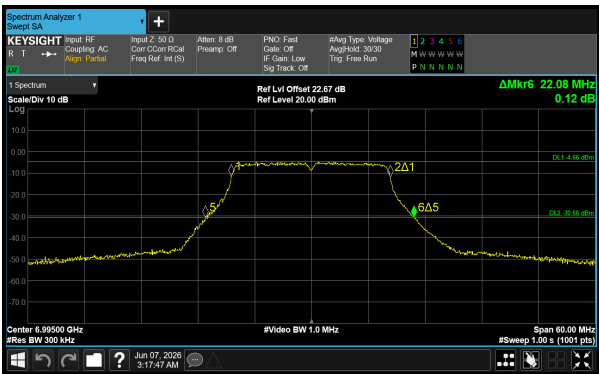


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	36.800	-	-	-	320.0
6965	36.800	-	-	-	320.0
7085	36.700	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	44.100	-	-	-	320.0
6965	44.200	-	-	-	320.0
7085	43.700	-	-	-	320.0

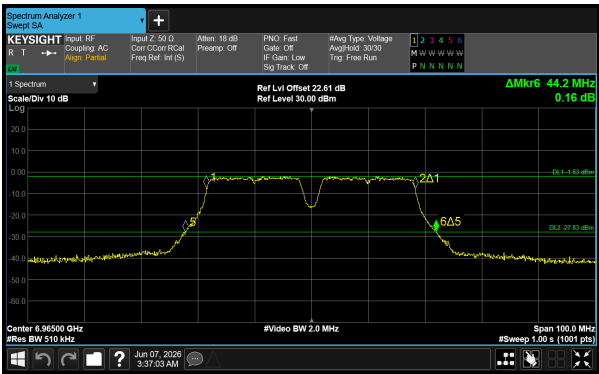


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	82.200	-	-	-	320.0
7025	82.200	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	116.000	-	-	-	320.0
7025	115.800	-	-	-	320.0

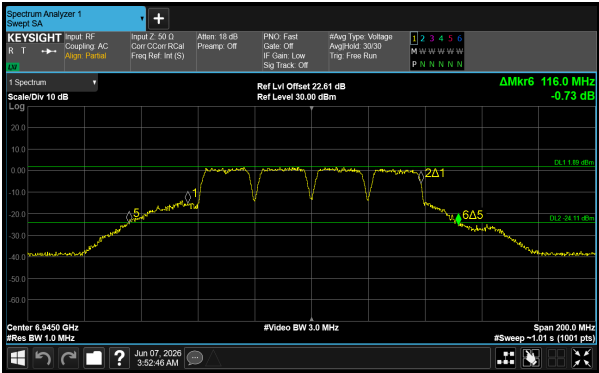


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	155.200	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	165.600	-	-	-	320.0

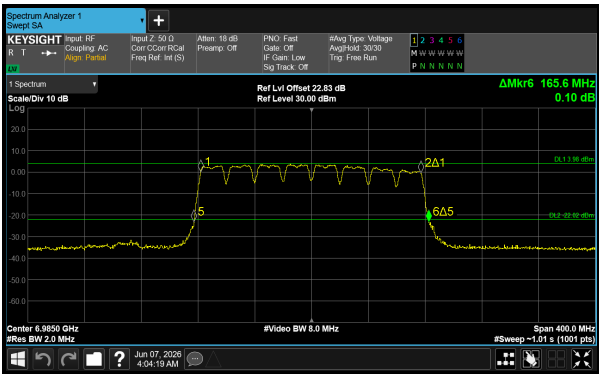


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	19.200	-	-	-	320.0
6995	19.200	-	-	-	320.0
7095	19.140	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	23.160	-	-	-	320.0
6995	23.160	-	-	-	320.0
7095	23.220	-	-	-	320.0

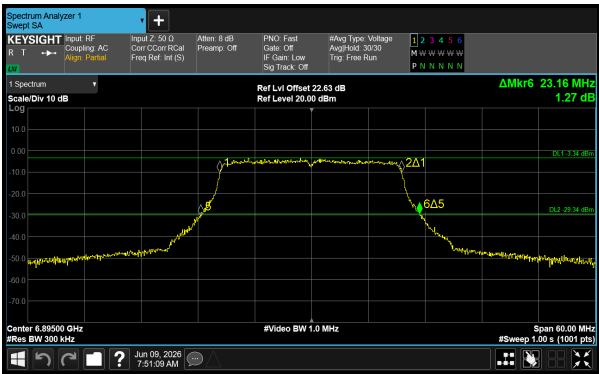


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.720	-	-	-	320.0
6995	16.920	-	-	-	320.0
7095	18.660	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	20.760	-	-	-	320.0
6995	18.480	-	-	-	320.0
7095	20.400	-	-	-	320.0

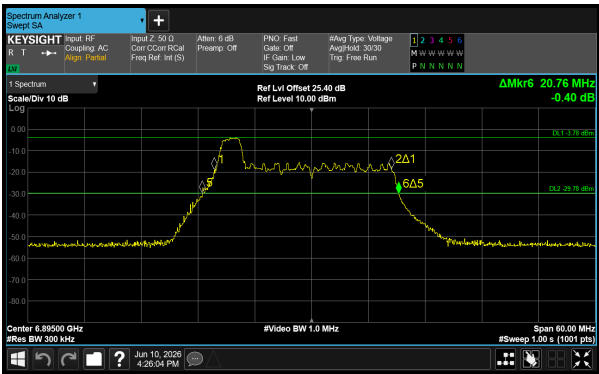


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.300	-	-	-	320.0
6995	17.040	-	-	-	320.0
7095	18.360	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	20.820	-	-	-	320.0
6995	18.780	-	-	-	320.0
7095	20.880	-	-	-	320.0

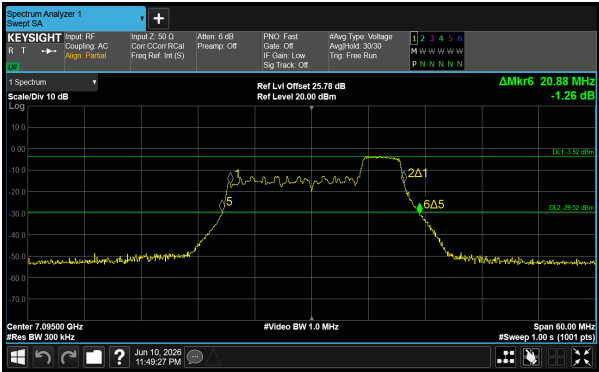


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.180	-	-	-	320.0
6995	18.240	-	-	-	320.0
7095	18.240	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	21.240	-	-	-	320.0
6995	20.880	-	-	-	320.0
7095	20.940	-	-	-	320.0

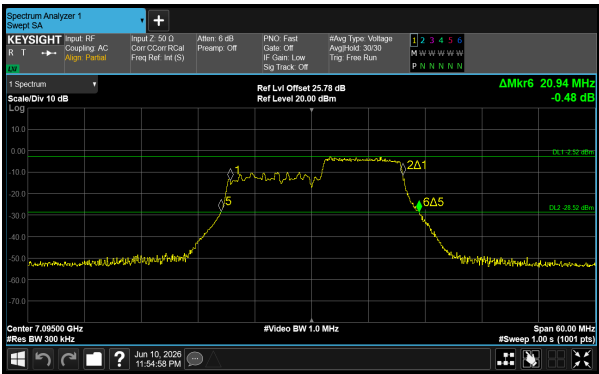


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	17.040	-	-	-	320.0
6995	16.980	-	-	-	320.0
7095	16.980	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	19.800	-	-	-	320.0
6995	19.380	-	-	-	320.0
7095	19.440	-	-	-	320.0

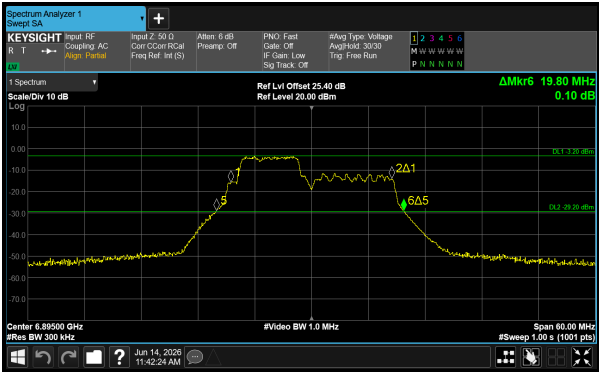


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.240	-	-	-	320.0
6995	18.060	-	-	-	320.0
7095	18.120	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	21.840	-	-	-	320.0
6995	21.180	-	-	-	320.0
7095	21.000	-	-	-	320.0

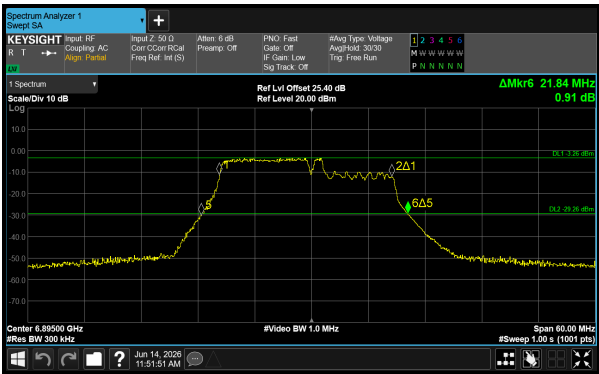


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	38.280	-	-	-	320.0
6965	38.040	-	-	-	320.0
7085	38.160	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	45.000	-	-	-	320.0
6965	45.240	-	-	-	320.0
7085	45.120	-	-	-	320.0

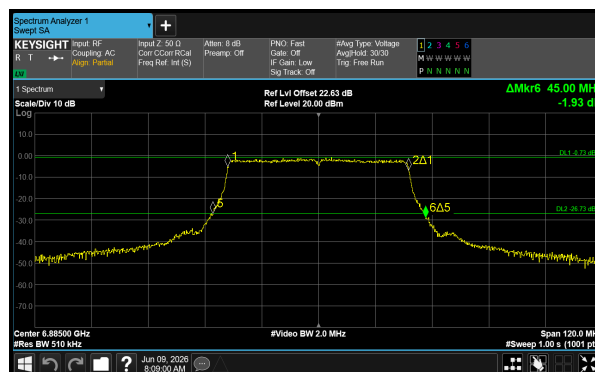


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	77.600	-	-	-	320.0
7025	77.600	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	83.200	-	-	-	320.0
7025	83.400	-	-	-	320.0

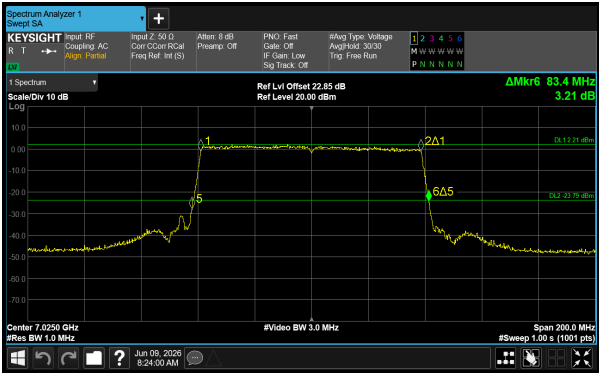


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	58.400	-	-	-	320.0
7025	58.560	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	63.520	-	-	-	320.0
7025	63.840	-	-	-	320.0

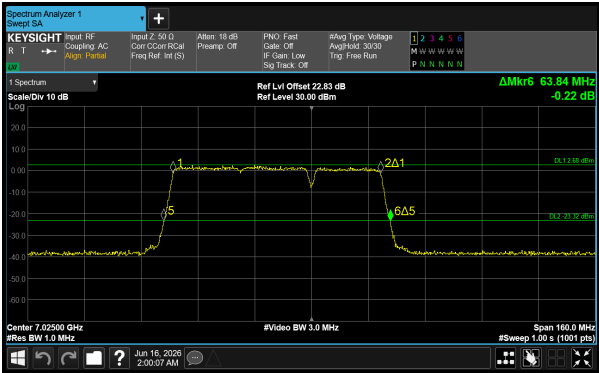


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	156.400	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	165.200	-	-	-	320.0

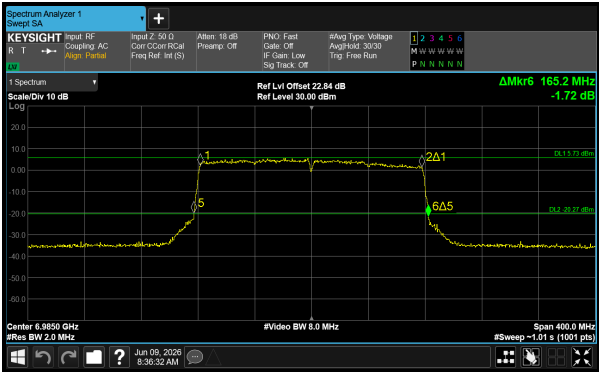


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	117.000	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	125.700	-	-	-	320.0

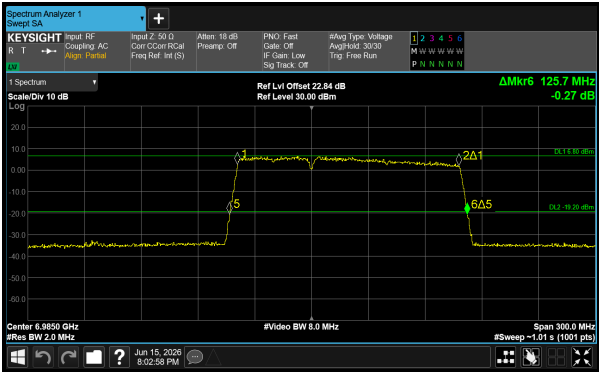


26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	137.160	-	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	146.160	-	-	-	320.0

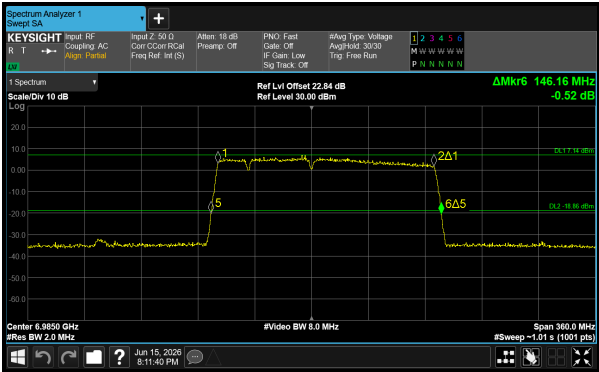

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)**Results: VLP / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	16.800	-	-	320.0
6995	-	16.800	-	-	320.0
7095	-	16.800	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	22.080	-	-	320.0
6995	-	22.020	-	-	320.0
7095	-	22.140	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	-	36.720	-	-	320.0
6965	-	36.800	-	-	320.0
7085	-	36.700	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	-	43.800	-	-	320.0
6965	-	44.100	-	-	320.0
7085	-	44.000	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	-	82.200	-	-	320.0
7025	-	82.400	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	-	117.200	-	-	320.0
7025	-	116.400	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	155.200	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	165.200	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	19.140	-	-	320.0
6995	-	19.200	-	-	320.0
7095	-	19.140	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	23.520	-	-	320.0
6995	-	23.100	-	-	320.0
7095	-	22.920	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	18.660	-	-	320.0
6995	-	16.860	-	-	320.0
7095	-	18.720	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	20.880	-	-	320.0
6995	-	18.360	-	-	320.0
7095	-	20.340	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	18.240	-	-	320.0
6995	-	17.040	-	-	320.0
7095	-	18.360	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	20.460	-	-	320.0
6995	-	18.660	-	-	320.0
7095	-	20.880	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	18.240	-	-	320.0
6995	-	18.240	-	-	320.0
7095	-	18.240	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	21.300	-	-	320.0
6995	-	20.820	-	-	320.0
7095	-	20.760	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	17.040	-	-	320.0
6995	-	16.980	-	-	320.0
7095	-	16.980	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	19.560	-	-	320.0
6995	-	19.380	-	-	320.0
7095	-	19.620	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	18.240	-	-	320.0
6995	-	18.120	-	-	320.0
7095	-	18.120	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	-	21.600	-	-	320.0
6995	-	21.120	-	-	320.0
7095	-	21.120	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	-	38.040	-	-	320.0
6965	-	38.160	-	-	320.0
7085	-	38.040	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	-	45.120	-	-	320.0
6965	-	44.880	-	-	320.0
7085	-	45.000	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	-	77.600	-	-	320.0
7025	-	77.600	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	-	83.000	-	-	320.0
7025	-	83.000	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	-	58.720	-	-	320.0
7025	-	58.560	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	-	63.840	-	-	320.0
7025	-	64.000	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	156.400	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	166.000	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	117.000	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	125.400	-	-	320.0

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	137.520	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	-	146.160	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)**Results: VLP / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	16.800	16.920	-	-	320.0
6995	16.800	16.920	-	-	320.0
7095	16.800	16.920	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	21.960	22.440	-	-	320.0
6995	22.140	22.440	-	-	320.0
7095	22.020	22.620	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	36.720	36.720	-	-	320.0
6965	36.720	36.720	-	-	320.0
7085	36.600	36.720	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	44.280	44.160	-	-	320.0
6965	44.040	44.040	-	-	320.0
7085	44.280	44.400	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	82.000	82.400	-	-	320.0
7025	82.400	82.600	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	116.800	115.800	-	-	320.0
7025	117.000	116.600	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	155.200	155.200	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	164.400	164.800	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	19.140	19.140	-	-	320.0
6995	19.200	19.200	-	-	320.0
7095	19.200	19.200	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	23.400	23.160	-	-	320.0
6995	23.220	22.920	-	-	320.0
7095	23.220	23.280	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.360	18.360	-	-	320.0
6995	17.040	17.040	-	-	320.0
7095	18.360	18.360	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	20.460	20.820	-	-	320.0
6995	18.720	18.660	-	-	320.0
7095	20.760	20.700	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.240	18.240	-	-	320.0
6995	18.300	18.240	-	-	320.0
7095	18.300	18.240	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	21.180	21.120	-	-	320.0
6995	21.060	20.940	-	-	320.0
7095	21.000	20.880	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	17.100	16.980	-	-	320.0
6995	16.980	16.800	-	-	320.0
7095	17.040	16.920	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	19.980	19.560	-	-	320.0
6995	19.380	18.660	-	-	320.0
7095	19.680	19.500	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.240	18.120	-	-	320.0
6995	18.120	18.060	-	-	320.0
7095	18.120	18.120	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	21.540	21.240	-	-	320.0
6995	21.120	20.700	-	-	320.0
7095	21.300	20.820	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	38.280	38.160	-	-	320.0
6965	38.160	38.160	-	-	320.0
7085	38.160	38.160	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	45.240	45.240	-	-	320.0
6965	45.000	44.760	-	-	320.0
7085	44.760	45.120	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	77.400	77.400	-	-	320.0
7025	77.400	77.400	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	83.200	83.200	-	-	320.0
7025	83.000	83.200	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	58.560	58.720	-	-	320.0
7025	58.560	58.560	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	64.000	63.520	-	-	320.0
7025	63.840	63.680	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	156.400	156.400	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	165.200	165.600	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	117.000	117.000	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	125.100	125.400	-	-	320.0

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	137.160	137.520	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	145.800	146.160	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)**Results: VLP / MIMO SDM**

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	19.200	19.080	-	-	320.0
6995	19.080	19.140	-	-	320.0
7095	19.080	19.080	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	23.220	23.280	-	-	320.0
6995	23.220	23.220	-	-	320.0
7095	22.920	23.160	-	-	320.0

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.660	18.720	-	-	320.0
6995	16.980	16.920	-	-	320.0
7095	18.660	18.720	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	20.760	20.700	-	-	320.0
6995	18.360	18.360	-	-	320.0
7095	20.640	20.460	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.360	18.300	-	-	320.0
6995	17.040	16.980	-	-	320.0
7095	18.420	18.360	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	20.760	20.640	-	-	320.0
6995	18.780	18.660	-	-	320.0
7095	20.640	20.640	-	-	320.0

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.240	18.240	-	-	320.0
6995	18.240	18.180	-	-	320.0
7095	18.240	18.240	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	21.360	21.000	-	-	320.0
6995	21.060	20.940	-	-	320.0
7095	21.000	20.760	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	17.040	16.920	-	-	320.0
6995	16.980	16.800	-	-	320.0
7095	17.040	16.920	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	19.860	19.440	-	-	320.0
6995	19.320	18.660	-	-	320.0
7095	19.440	19.080	-	-	320.0

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	18.240	18.060	-	-	320.0
6995	18.120	18.060	-	-	320.0
7095	18.120	18.060	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	21.840	21.120	-	-	320.0
6995	20.880	20.580	-	-	320.0
7095	21.060	20.640	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	38.040	38.040	-	-	320.0
6965	38.040	38.100	-	-	320.0
7085	38.040	38.040	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	45.000	44.760	-	-	320.0
6965	45.120	45.000	-	-	320.0
7085	44.880	44.520	-	-	320.0

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	77.600	77.400	-	-	320.0
7025	77.600	77.400	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	83.200	83.200	-	-	320.0
7025	83.000	83.200	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	58.560	58.560	-	-	320.0
7025	58.560	58.560	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	63.680	63.840	-	-	320.0
7025	63.840	63.520	-	-	320.0

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	156.400	156.400	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	165.600	165.200	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	117.300	117.300	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	126.000	126.000	-	-	320.0

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	137.160	137.520	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	146.520	146.160	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)**Results: VLP / TxBF**

Antenna Configuration:	TxBF	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	19.140	19.200	-	-	320.0
6995	19.200	19.200	-	-	320.0
7095	19.200	19.200	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6895	23.220	23.160	-	-	320.0
6995	23.400	23.520	-	-	320.0
7095	23.460	23.100	-	-	320.0

Antenna Configuration:	TxBF	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	38.280	38.040	-	-	320.0
6965	38.280	38.280	-	-	320.0
7085	38.040	38.160	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6885	45.120	44.880	-	-	320.0
6965	45.360	44.640	-	-	320.0
7085	44.880	45.240	-	-	320.0

26 dB & 99% Bandwidth (U-NII-8) / VLP (continued)

Antenna Configuration:	TxBF	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	77.400	77.600	-	-	320.0
7025	77.600	77.600	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6945	83.200	83.400	-	-	320.0
7025	83.200	83.200	-	-	320.0

Antenna Configuration:	TxBF	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	156.800	156.400	-	-	320.0

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (MHz)
	1	2	3	4	
6985	165.200	165.200	-	-	320.0

4.3 Maximum EIRP

Test Summary:

Test Engineers:	Benyamin KordiBoroujeni & Matthew Botfield	Test Dates:	06 June 2026 to 28 June 2026
Test Sample Serial Numbers:	Y929QLWGKP & NPV92Q1HJC		

FCC Clause:	Part 15.407(a)(8)(ii) [LPI], (8)(i) [SP], (9) [VLP]
ISED Canada Clause:	RSS-248 4.5.3 [LP], 4.5.5 [SP], 4.5.6 [VLP] / RSS-Gen 6.12
Test Method Used:	ANSI C63.10 Section 12.4.3.2

Environmental Conditions:

Temperature (°C):	20 to 26
Relative Humidity (%):	40 to 55

Note(s):

1. For MIMO modes, conducted power was measured on all ports and then combined using the measure-and-sum technique stated in ANSI C63.10 Section 14.5.1.
2. The antenna gain was added to the conducted output power results to determine the EIRPs.
3. Directional antenna gains have been calculated for the results below using the equations in the sample calculation section.

Maximum EIRP (U-NII-5) / LPI (continued)**4.3.1 5.945-6.425 GHz band (U-NII-5)****Results: LPI / SISO / Core 0**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	5.69	-	-	-	-	3.50	9.19	24.00	14.81
6175	6.38	-	-	-	-	2.60	8.98	24.00	15.02
6415	7.78	-	-	-	-	0.90	8.68	24.00	15.32

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	8.49	-	-	-	-	3.50	11.99	24.00	12.01
6165	9.47	-	-	-	-	2.60	12.07	24.00	11.93
6405	11.07	-	-	-	-	0.90	11.97	24.00	12.03

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	11.77	-	-	-	-	3.50	15.27	24.00	8.73
6145	12.53	-	-	-	-	2.60	15.13	24.00	8.87
6385	14.07	-	-	-	-	0.90	14.97	24.00	9.03

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	14.49	-	-	-	-	3.50	17.99	24.00	6.01
6185	15.00	-	-	-	-	2.60	17.60	24.00	6.40
6345	16.73	-	-	-	-	0.90	17.63	24.00	6.37

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	5.75	-	-	-	-	3.50	9.25	24.00	14.75
6175	6.46	-	-	-	-	2.60	9.06	24.00	14.94
6415	8.11	-	-	-	-	0.90	9.01	24.00	14.99

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-3.22	-	-	-	-	3.50	0.28	24.00	23.72
6175	-2.54	-	-	-	-	2.60	0.06	24.00	23.94
6415	-1.36	-	-	-	-	0.90	-0.46	24.00	24.46

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-0.69	-	-	-	-	3.50	2.81	24.00	21.19
6175	0.05	-	-	-	-	2.60	2.65	24.00	21.35
6415	1.40	-	-	-	-	0.90	2.30	24.00	21.70

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	2.51	-	-	-	-	3.50	6.01	24.00	17.99
6175	3.14	-	-	-	-	2.60	5.74	24.00	18.26
6415	4.93	-	-	-	-	0.90	5.83	24.00	18.17

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	1.46	-	-	-	-	3.50	4.96	24.00	19.04
6175	2.06	-	-	-	-	2.60	4.66	24.00	19.34
6415	3.56	-	-	-	-	0.90	4.46	24.00	19.54

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	3.13	-	-	-	-	3.50	6.63	24.00	17.37
6175	3.95	-	-	-	-	2.60	6.55	24.00	17.45
6415	6.14	-	-	-	-	0.90	7.04	24.00	16.96

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	8.52	-	-	-	-	3.50	12.02	24.00	11.98
6165	9.55	-	-	-	-	2.60	12.15	24.00	11.85
6405	11.07	-	-	-	-	0.90	11.97	24.00	12.03

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	11.98	-	-	-	-	3.50	15.48	24.00	8.52
6145	12.42	-	-	-	-	2.60	15.02	24.00	8.98
6385	14.05	-	-	-	-	0.90	14.95	24.00	9.05

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	10.28	-	-	-	-	3.50	13.78	24.00	10.22
6145	11.11	-	-	-	-	2.60	13.71	24.00	10.29
6385	13.02	-	-	-	-	0.90	13.92	24.00	10.08

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	14.48	-	-	-	-	3.50	17.98	24.00	6.02
6185	15.13	-	-	-	-	2.60	17.73	24.00	6.27
6345	16.91	-	-	-	-	0.90	17.81	24.00	6.19

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	12.97	-	-	-	-	3.50	16.47	24.00	7.53
6185	13.57	-	-	-	-	2.60	16.17	24.00	7.83
6345	16.19	-	-	-	-	0.90	17.09	24.00	6.91

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	13.67	-	-	-	-	3.50	17.17	24.00	6.83
6185	14.43	-	-	-	-	2.60	17.03	24.00	6.97
6345	16.80	-	-	-	-	0.90	17.70	24.00	6.30

Maximum EIRP (U-NII-5) / LPI (continued)**Results: LPI / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	5.42	-	-	-	3.30	8.72	24.00	15.28
6175	-	6.06	-	-	-	2.90	8.96	24.00	15.04
6415	-	6.16	-	-	-	2.60	8.76	24.00	15.24

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	-	8.73	-	-	-	3.30	12.03	24.00	11.97
6165	-	9.10	-	-	-	2.90	12.00	24.00	12.00
6405	-	9.40	-	-	-	2.60	12.00	24.00	12.00

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	-	11.75	-	-	-	3.30	15.05	24.00	8.95
6145	-	12.29	-	-	-	2.90	15.19	24.00	8.81
6385	-	12.30	-	-	-	2.60	14.90	24.00	9.10

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	14.55	-	-	-	3.30	17.85	24.00	6.15
6185	-	15.04	-	-	-	2.90	17.94	24.00	6.06
6345	-	15.50	-	-	-	2.60	18.10	24.00	5.90

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	5.96	-	-	-	3.30	9.26	24.00	14.74
6175	-	6.23	-	-	-	2.90	9.13	24.00	14.87
6415	-	6.54	-	-	-	2.60	9.14	24.00	14.86

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	-3.24	-	-	-	3.30	0.06	24.00	23.94
6175	-	-2.93	-	-	-	2.90	-0.03	24.00	24.03
6415	-	-2.85	-	-	-	2.60	-0.25	24.00	24.25

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	-0.33	-	-	-	3.30	2.97	24.00	21.03
6175	-	-0.33	-	-	-	2.90	2.57	24.00	21.43
6415	-	-0.13	-	-	-	2.60	2.47	24.00	21.53

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	2.35	-	-	-	3.30	5.65	24.00	18.35
6175	-	2.58	-	-	-	2.90	5.48	24.00	18.52
6415	-	3.17	-	-	-	2.60	5.77	24.00	18.23

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	1.14	-	-	-	3.30	4.44	24.00	19.56
6175	-	1.83	-	-	-	2.90	4.73	24.00	19.27
6415	-	1.61	-	-	-	2.60	4.21	24.00	19.79

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	3.10	-	-	-	3.30	6.40	24.00	17.60
6175	-	3.86	-	-	-	2.90	6.76	24.00	17.24
6415	-	4.40	-	-	-	2.60	7.00	24.00	17.00

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	-	8.75	-	-	-	3.30	12.05	24.00	11.95
6165	-	9.15	-	-	-	2.90	12.05	24.00	11.95
6405	-	9.48	-	-	-	2.60	12.08	24.00	11.92

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	-	11.76	-	-	-	3.30	15.06	24.00	8.94
6145	-	12.31	-	-	-	2.90	15.21	24.00	8.79
6385	-	12.59	-	-	-	2.60	15.19	24.00	8.81

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	-	10.37	-	-	-	3.30	13.67	24.00	10.33
6145	-	11.00	-	-	-	2.90	13.90	24.00	10.10
6385	-	11.44	-	-	-	2.60	14.04	24.00	9.96

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	14.31	-	-	-	3.30	17.61	24.00	6.39
6185	-	15.09	-	-	-	2.90	17.99	24.00	6.01
6345	-	15.28	-	-	-	2.60	17.88	24.00	6.12

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	12.81	-	-	-	3.30	16.11	24.00	7.89
6185	-	13.98	-	-	-	2.90	16.88	24.00	7.12
6345	-	14.16	-	-	-	2.60	16.76	24.00	7.24

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	13.47	-	-	-	3.30	16.77	24.00	7.23
6185	-	14.49	-	-	-	2.90	17.39	24.00	6.61
6345	-	14.78	-	-	-	2.60	17.38	24.00	6.62

Maximum EIRP (U-NII-5) / LPI (continued)**Results: LPI / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-1.06	-0.69	-	-	2.13	3.50	5.63	24.00	18.37
6175	-0.07	0.08	-	-	3.01	2.90	5.91	24.00	18.09
6415	0.51	0.95	-	-	3.74	2.60	6.34	24.00	17.66

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	2.51	2.06	-	-	5.29	3.50	8.79	24.00	15.21
6165	3.31	2.86	-	-	6.09	2.90	8.99	24.00	15.01
6405	4.14	4.27	-	-	7.20	2.60	9.80	24.00	14.20

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	5.42	5.59	-	-	8.51	3.50	12.01	24.00	11.99
6145	5.89	6.43	-	-	9.17	2.90	12.07	24.00	11.93
6385	6.67	7.10	-	-	9.90	2.60	12.50	24.00	11.50

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	7.95	8.42	-	-	11.18	3.50	14.68	24.00	9.32
6185	8.64	9.18	-	-	11.90	2.90	14.80	24.00	9.20
6345	9.56	10.08	-	-	12.82	2.60	15.42	24.00	8.58

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-1.34	-0.16	-	-	2.30	3.50	5.80	24.00	18.20
6175	-0.48	0.36	-	-	2.97	2.90	5.87	24.00	18.13
6415	0.12	1.13	-	-	3.66	2.60	6.26	24.00	17.74

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6175	-8.78	-9.22	-	-	-5.98	2.90	-3.08	24.00	27.08
6415	-8.27	-8.35	-	-	-5.31	2.60	-2.71	24.00	26.71

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-6.68	-6.73	-	-	-3.69	3.50	-0.19	24.00	24.19
6175	-6.03	-6.28	-	-	-3.14	2.90	-0.24	24.00	24.24
6415	-5.29	-5.47	-	-	-2.37	2.60	0.23	24.00	23.77

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-3.63	-3.72	-	-	-0.67	3.50	2.83	24.00	21.17
6175	-3.19	-3.59	-	-	-0.37	2.90	2.53	24.00	21.47
6415	-2.22	-2.30	-	-	0.75	2.60	3.35	24.00	20.65

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-4.73	-4.96	-	-	-1.84	3.50	1.66	24.00	22.34
6175	-4.16	-4.58	-	-	-1.35	2.90	1.55	24.00	22.45
6415	-3.42	-3.40	-	-	-0.40	2.60	2.20	24.00	21.80

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-3.06	-3.27	-	-	-0.16	3.50	3.34	24.00	20.66
6175	-2.09	-2.34	-	-	0.80	2.90	3.70	24.00	20.30
6415	-1.25	-1.14	-	-	1.82	2.60	4.42	24.00	19.58

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	1.79	2.54	-	-	5.19	3.50	8.69	24.00	15.31
6165	2.54	3.07	-	-	5.82	2.90	8.72	24.00	15.28
6405	3.07	4.23	-	-	6.69	2.60	9.29	24.00	14.71

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	4.92	5.65	-	-	8.29	3.50	11.79	24.00	12.21
6145	5.33	6.48	-	-	8.94	2.90	11.84	24.00	12.16
6385	6.01	7.22	-	-	9.65	2.60	12.25	24.00	11.75

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	4.09	4.38	-	-	7.25	3.50	10.75	24.00	13.25
6145	4.68	5.20	-	-	7.95	2.90	10.85	24.00	13.15
6385	5.68	6.19	-	-	8.94	2.60	11.54	24.00	12.46

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	7.47	8.36	-	-	10.95	3.50	14.45	24.00	9.55
6185	8.06	9.15	-	-	11.64	2.90	14.54	24.00	9.46
6345	8.93	10.07	-	-	12.54	2.60	15.14	24.00	8.86

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	6.26	6.61	-	-	9.44	3.50	12.94	24.00	11.06
6185	7.34	7.72	-	-	10.54	2.90	13.44	24.00	10.56
6345	8.34	8.86	-	-	11.58	2.60	14.18	24.00	9.82

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	7.26	7.45	-	-	10.35	3.50	13.85	24.00	10.15
6185	7.99	8.48	-	-	11.25	2.90	14.15	24.00	9.85
6345	9.24	9.68	-	-	12.48	2.60	15.08	24.00	8.92

Maximum EIRP (U-NII-5) / LPI (continued)**Results: LPI / MIMO SDM**

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	2.15	2.83	-	-	5.51	3.40	8.91	24.00	15.09
6175	1.99	3.02	-	-	5.53	2.75	8.28	24.00	15.72
6415	2.86	4.09	-	-	6.52	1.83	8.35	24.00	15.65

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-6.50	-6.52	-	-	-3.50	3.40	-0.10	24.00	24.10
6175	-5.69	-5.98	-	-	-2.83	2.75	-0.07	24.00	24.07
6415	-5.32	-5.51	-	-	-2.40	1.83	-0.57	24.00	24.57

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-3.64	-3.65	-	-	-0.64	3.40	2.76	24.00	21.24
6175	-3.28	-3.64	-	-	-0.45	2.75	2.30	24.00	21.70
6415	-2.30	-2.49	-	-	0.61	1.83	2.45	24.00	21.55

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-0.75	-0.61	-	-	2.33	3.40	5.73	24.00	18.27
6175	0.04	-0.20	-	-	2.93	2.75	5.68	24.00	18.32
6415	0.68	0.59	-	-	3.64	1.83	5.47	24.00	18.53

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-1.83	-1.97	-	-	1.11	3.40	4.51	24.00	19.49
6175	-1.05	-1.14	-	-	1.91	2.75	4.67	24.00	19.33
6415	-0.40	-0.28	-	-	2.67	1.83	4.50	24.00	19.50

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-0.13	-0.13	-	-	2.88	3.40	6.28	24.00	17.72
6175	0.89	0.78	-	-	3.85	2.75	6.60	24.00	17.40
6415	1.65	1.39	-	-	4.53	1.83	6.36	24.00	17.64

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	4.70	5.52	-	-	8.08	3.40	11.48	24.00	12.52
6165	5.08	6.29	-	-	8.70	2.75	11.45	24.00	12.55
6405	6.10	7.20	-	-	9.69	1.83	11.52	24.00	12.48

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	7.94	8.76	-	-	11.36	3.40	14.76	24.00	9.24
6145	8.34	9.44	-	-	11.93	2.75	14.68	24.00	9.32
6385	8.80	10.05	-	-	12.48	1.83	14.31	24.00	9.69

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	7.01	7.33	-	-	10.16	3.40	13.56	24.00	10.44
6145	7.64	8.10	-	-	10.87	2.75	13.62	24.00	10.38
6385	8.72	9.18	-	-	11.96	1.83	13.80	24.00	10.20

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	10.47	11.38	-	-	13.95	3.40	17.35	24.00	6.65
6185	11.06	12.16	-	-	14.64	2.75	17.39	24.00	6.61
6345	11.55	12.90	-	-	15.28	1.83	17.11	24.00	6.89

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	9.33	9.63	-	-	12.47	3.40	15.87	24.00	8.13
6185	10.23	10.78	-	-	13.52	2.75	16.27	24.00	7.73
6345	11.30	11.78	-	-	14.54	1.83	16.37	24.00	7.63

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	10.13	10.37	-	-	13.25	3.40	16.65	24.00	7.35
6185	10.97	11.55	-	-	14.25	2.75	17.01	24.00	6.99
6345	12.00	12.59	-	-	15.31	1.83	17.14	24.00	6.86

Maximum EIRP (U-NII-5) / LPI (continued)**Results: LPI / TxBF**

Antenna Configuration:	TxBF	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-1.50	-0.30	-	-	2.15	6.41	8.56	24.00	15.44
6175	-0.64	0.14	-	-	2.78	5.76	8.54	24.00	15.46
6415	0.14	1.18	-	-	3.70	4.80	8.51	24.00	15.49

Antenna Configuration:	TxBF	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	1.80	2.54	-	-	5.19	6.41	11.60	24.00	12.40
6165	2.51	3.28	-	-	5.91	5.76	11.67	24.00	12.33
6405	3.11	4.27	-	-	6.73	4.80	11.53	24.00	12.47

Antenna Configuration:	TxBF	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	4.98	5.69	-	-	8.36	6.41	14.77	24.00	9.23
6145	5.18	6.41	-	-	8.84	5.76	14.60	24.00	9.40
6385	6.06	7.26	-	-	9.71	4.80	14.51	24.00	9.49

Maximum EIRP (U-NII-5) / LPI (continued)

Antenna Configuration:	TxBF		Mode:	802.11ax HE160 SU	
Test Port:	1+2 (Core 0+Core1)		Rate/Modulation:	MCS2x1 (QPSK)	

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	7.52	8.43	-	-	11.01	6.41	17.42	24.00	6.58
6185	8.11	9.18	-	-	11.68	5.76	17.45	24.00	6.55
6345	8.96	10.19	-	-	12.62	4.80	17.42	24.00	6.58

Maximum EIRP (U-NII-5) / SP (continued)**Results: SP / SISO / Core 0**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	19.40	-	-	-	-	3.50	22.90	30.00	7.10
6175	19.20	-	-	-	-	2.60	21.80	30.00	8.20
6415	19.46	-	-	-	-	0.90	20.36	30.00	9.64

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	18.39	-	-	-	-	3.50	21.89	30.00	8.11
6165	19.05	-	-	-	-	2.60	21.65	30.00	8.35
6405	19.21	-	-	-	-	0.90	20.11	30.00	9.89

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	19.30	-	-	-	-	3.50	22.80	30.00	7.20
6145	19.14	-	-	-	-	2.60	21.74	30.00	8.26
6385	19.36	-	-	-	-	0.90	20.26	30.00	9.74

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	19.19	-	-	-	-	3.50	22.69	30.00	7.31
6185	19.17	-	-	-	-	2.60	21.77	30.00	8.23
6345	19.12	-	-	-	-	0.90	20.02	30.00	9.98

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	19.46	-	-	-	-	3.50	22.96	30.00	7.04
6175	19.34	-	-	-	-	2.60	21.94	30.00	8.06
6415	19.49	-	-	-	-	0.90	20.39	30.00	9.61

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	12.00	-	-	-	-	3.50	15.50	30.00	14.50
6175	11.95	-	-	-	-	2.60	14.55	30.00	15.45
6415	11.78	-	-	-	-	0.90	12.68	30.00	17.32

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	14.76	-	-	-	-	3.50	18.26	30.00	11.74
6175	14.84	-	-	-	-	2.60	17.44	30.00	12.56
6415	14.94	-	-	-	-	0.90	15.84	30.00	14.16

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	17.77	-	-	-	-	3.50	21.27	30.00	8.73
6175	17.72	-	-	-	-	2.60	20.32	30.00	9.68
6415	17.86	-	-	-	-	0.90	18.76	30.00	11.24

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	16.46	-	-	-	-	3.50	19.96	30.00	10.04
6175	16.31	-	-	-	-	2.60	18.91	30.00	11.09
6415	16.32	-	-	-	-	0.90	17.22	30.00	12.78

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	18.42	-	-	-	-	3.50	21.92	30.00	8.08
6175	18.32	-	-	-	-	2.60	20.92	30.00	9.08
6415	18.45	-	-	-	-	0.90	19.35	30.00	10.65

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	19.10	-	-	-	-	3.50	22.60	30.00	7.40
6165	19.39	-	-	-	-	2.60	21.99	30.00	8.01
6405	19.32	-	-	-	-	0.90	20.22	30.00	9.78

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	19.25	-	-	-	-	3.50	22.75	30.00	7.25
6145	19.39	-	-	-	-	2.60	21.99	30.00	8.01
6385	19.47	-	-	-	-	0.90	20.37	30.00	9.63

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	17.63	-	-	-	-	3.50	21.13	30.00	8.87
6145	19.10	-	-	-	-	2.60	21.70	30.00	8.30
6385	19.42	-	-	-	-	0.90	20.32	30.00	9.68

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	19.23	-	-	-	-	3.50	22.73	30.00	7.27
6185	19.41	-	-	-	-	2.60	22.01	30.00	7.99
6345	19.46	-	-	-	-	0.90	20.36	30.00	9.64

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	18.92	-	-	-	-	3.50	22.42	30.00	7.58
6185	19.08	-	-	-	-	2.60	21.68	30.00	8.32
6345	19.45	-	-	-	-	0.90	20.35	30.00	9.65

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	18.49	-	-	-	-	3.50	21.99	30.00	8.01
6185	19.19	-	-	-	-	2.60	21.79	30.00	8.21
6345	19.27	-	-	-	-	0.90	20.17	30.00	9.83

Maximum EIRP (U-NII-5) / SP (continued)**Results: SP / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	19.26	-	-	-	3.30	22.56	30.00	7.44
6175	-	19.34	-	-	-	2.90	22.24	30.00	7.76
6415	-	19.47	-	-	-	2.60	22.07	30.00	7.93

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	-	18.44	-	-	-	3.30	21.74	30.00	8.26
6165	-	19.41	-	-	-	2.90	22.31	30.00	7.69
6405	-	19.46	-	-	-	2.60	22.06	30.00	7.94

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	-	19.47	-	-	-	3.30	22.77	30.00	7.23
6145	-	19.38	-	-	-	2.90	22.28	30.00	7.72
6385	-	19.45	-	-	-	2.60	22.05	30.00	7.95

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	19.09	-	-	-	3.30	22.39	30.00	7.61
6185	-	19.30	-	-	-	2.90	22.20	30.00	7.80
6345	-	19.28	-	-	-	2.60	21.88	30.00	8.12

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	19.33	-	-	-	3.30	22.63	30.00	7.37
6175	-	19.32	-	-	-	2.90	22.22	30.00	7.78
6415	-	19.30	-	-	-	2.60	21.90	30.00	8.10

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	11.82	-	-	-	3.30	15.12	30.00	14.88
6175	-	11.68	-	-	-	2.90	14.58	30.00	15.42
6415	-	11.77	-	-	-	2.60	14.37	30.00	15.63

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	14.90	-	-	-	3.30	18.20	30.00	11.80
6175	-	14.89	-	-	-	2.90	17.79	30.00	12.21
6415	-	14.78	-	-	-	2.60	17.38	30.00	12.62

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	17.84	-	-	-	3.30	21.14	30.00	8.86
6175	-	17.92	-	-	-	2.90	20.82	30.00	9.18
6415	-	17.81	-	-	-	2.60	20.41	30.00	9.59

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	16.29	-	-	-	3.30	19.59	30.00	10.41
6175	-	16.36	-	-	-	2.90	19.26	30.00	10.74
6415	-	16.44	-	-	-	2.60	19.04	30.00	10.96

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	18.27	-	-	-	3.30	21.57	30.00	8.43
6175	-	18.33	-	-	-	2.90	21.23	30.00	8.77
6415	-	18.50	-	-	-	2.60	21.10	30.00	8.90

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	-	19.33	-	-	-	3.30	22.63	30.00	7.37
6165	-	19.44	-	-	-	2.90	22.34	30.00	7.66
6405	-	19.48	-	-	-	2.60	22.08	30.00	7.92

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	-	19.30	-	-	-	3.30	22.60	30.00	7.40
6145	-	19.26	-	-	-	2.90	22.16	30.00	7.84
6385	-	19.29	-	-	-	2.60	21.89	30.00	8.11

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	-	17.39	-	-	-	3.30	20.69	30.00	9.31
6145	-	19.42	-	-	-	2.90	22.32	30.00	7.68
6385	-	19.30	-	-	-	2.60	21.90	30.00	8.10

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	19.17	-	-	-	3.30	22.47	30.00	7.53
6185	-	19.44	-	-	-	2.90	22.34	30.00	7.66
6345	-	19.40	-	-	-	2.60	22.00	30.00	8.00

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	18.52	-	-	-	3.30	21.82	30.00	8.18
6185	-	19.31	-	-	-	2.90	22.21	30.00	7.79
6345	-	19.45	-	-	-	2.60	22.05	30.00	7.95

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242						
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)						

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	18.30	-	-	-	3.30	21.60	30.00	8.40
6185	-	19.31	-	-	-	2.90	22.21	30.00	7.79
6345	-	19.31	-	-	-	2.60	21.91	30.00	8.09

Maximum EIRP (U-NII-5) / SP (continued)**Results: SP / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	16.27	16.61	-	-	19.44	3.50	22.94	30.00	7.06
6175	17.48	18.13	-	-	20.81	2.90	23.71	30.00	6.29
6415	18.68	18.89	-	-	21.77	2.60	24.37	30.00	5.63

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	17.58	17.89	-	-	20.74	3.50	24.24	30.00	5.76
6165	18.81	19.42	-	-	22.13	2.90	25.03	30.00	4.97
6405	19.02	19.38	-	-	22.20	2.60	24.80	30.00	5.20

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	17.98	18.29	-	-	21.14	3.50	24.64	30.00	5.36
6145	18.85	19.35	-	-	22.12	2.90	25.02	30.00	4.98
6385	19.00	19.34	-	-	22.17	2.60	24.77	30.00	5.23

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	17.45	17.74	-	-	20.58	3.50	24.08	30.00	5.92
6185	18.99	19.38	-	-	22.18	2.90	25.08	30.00	4.92
6345	18.93	19.34	-	-	22.15	2.60	24.75	30.00	5.25

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	16.04	16.91	-	-	19.49	3.50	22.99	30.00	7.01
6175	16.83	18.24	-	-	20.57	2.90	23.47	30.00	6.53
6415	18.17	19.22	-	-	21.71	2.60	24.31	30.00	5.69

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	8.05	8.49	-	-	11.27	3.50	14.77	30.00	15.23
6175	8.43	9.30	-	-	11.89	2.90	14.79	30.00	15.21
6415	10.01	10.18	-	-	13.10	2.60	15.70	30.00	14.30

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	10.98	11.26	-	-	14.13	3.50	17.63	30.00	12.37
6175	11.08	11.88	-	-	14.49	2.90	17.39	30.00	12.61
6415	12.72	12.92	-	-	15.80	2.60	18.40	30.00	11.60

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	14.06	14.39	-	-	17.24	3.50	20.74	30.00	9.26
6175	14.15	14.97	-	-	17.57	2.90	20.47	30.00	9.53
6415	15.81	16.05	-	-	18.92	2.60	21.52	30.00	8.48

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	12.95	13.19	-	-	16.08	3.50	19.58	30.00	10.42
6175	13.05	13.96	-	-	16.51	2.90	19.41	30.00	10.59
6415	14.53	14.82	-	-	17.67	2.60	20.27	30.00	9.73

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	15.04	15.40	-	-	18.17	3.50	21.67	30.00	8.33
6175	15.07	15.93	-	-	18.52	2.90	21.42	30.00	8.58
6415	16.94	17.19	-	-	20.05	2.60	22.65	30.00	7.35

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	18.47	19.34	-	-	21.92	3.50	25.42	30.00	4.58
6165	18.29	19.42	-	-	21.87	2.90	24.77	30.00	5.23
6405	18.44	19.44	-	-	21.97	2.60	24.57	30.00	5.43

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	18.32	19.11	-	-	21.71	3.50	25.21	30.00	4.79
6145	18.09	19.29	-	-	21.73	2.90	24.63	30.00	5.37
6385	18.09	19.26	-	-	21.72	2.60	24.32	30.00	5.68

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	16.85	17.13	-	-	19.98	3.50	23.48	30.00	6.52
6145	18.88	19.35	-	-	22.13	2.90	25.03	30.00	4.97
6385	18.94	19.31	-	-	22.14	2.60	24.74	30.00	5.26

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	18.13	19.04	-	-	21.59	3.50	25.09	30.00	4.91
6185	18.10	19.22	-	-	21.70	2.90	24.60	30.00	5.40
6345	18.19	19.49	-	-	21.88	2.60	24.48	30.00	5.52

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	17.07	17.54	-	-	20.32	3.50	23.82	30.00	6.18
6185	18.83	19.32	-	-	22.09	2.90	24.99	30.00	5.01
6345	18.88	19.47	-	-	22.19	2.60	24.79	30.00	5.21

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	16.66	17.04	-	-	19.86	3.50	23.36	30.00	6.64
6185	18.86	19.36	-	-	22.12	2.90	25.02	30.00	4.98
6345	18.78	19.27	-	-	22.01	2.60	24.61	30.00	5.39

Maximum EIRP (U-NII-5) / SP (continued)**Results: SP / MIMO SDM**

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	18.43	19.29	-	-	21.86	3.40	25.26	30.00	4.74
6175	17.94	19.32	-	-	21.67	2.75	24.42	30.00	5.58
6415	18.28	19.38	-	-	21.86	1.83	23.69	30.00	6.31

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	11.12	11.60	-	-	14.37	3.40	17.77	30.00	12.23
6175	10.94	11.76	-	-	14.37	2.75	17.13	30.00	12.87
6415	11.76	11.87	-	-	14.82	1.83	16.65	30.00	13.35

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	13.77	14.14	-	-	16.95	3.40	20.35	30.00	9.65
6175	14.01	14.91	-	-	17.48	2.75	20.23	30.00	9.77
6415	14.62	14.90	-	-	17.76	1.83	19.59	30.00	10.41

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	16.99	17.33	-	-	20.15	3.40	23.55	30.00	6.45
6175	17.17	17.91	-	-	20.57	2.75	23.32	30.00	6.68
6415	17.73	17.96	-	-	20.84	1.83	22.68	30.00	7.32

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	15.85	16.30	-	-	19.09	3.40	22.49	30.00	7.51
6175	15.47	16.39	-	-	18.94	2.75	21.70	30.00	8.30
6415	16.00	16.34	-	-	19.17	1.83	21.00	30.00	9.00

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	17.87	18.28	-	-	21.06	3.40	24.46	30.00	5.54
6175	17.53	18.34	-	-	20.95	2.75	23.70	30.00	6.30
6415	18.13	18.39	-	-	21.27	1.83	23.10	30.00	6.90

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	18.65	19.47	-	-	22.07	3.40	25.47	30.00	4.53
6165	18.09	19.28	-	-	21.70	2.75	24.46	30.00	5.54
6405	18.30	19.25	-	-	21.80	1.83	23.63	30.00	6.37

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	18.56	19.35	-	-	21.94	3.40	25.35	30.00	4.65
6145	18.25	19.46	-	-	21.88	2.75	24.63	30.00	5.37
6385	18.28	19.46	-	-	21.89	1.83	23.72	30.00	6.28

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	16.81	17.12	-	-	19.97	3.40	23.37	30.00	6.63
6145	18.88	19.40	-	-	22.14	2.75	24.89	30.00	5.11
6385	18.91	19.30	-	-	22.11	1.83	23.94	30.00	6.06

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	18.36	19.33	-	-	21.87	3.40	25.27	30.00	4.73
6185	18.29	19.50	-	-	21.94	2.75	24.70	30.00	5.30
6345	18.12	19.44	-	-	21.83	1.83	23.67	30.00	6.33

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	17.15	17.57	-	-	20.35	3.40	23.75	30.00	6.25
6185	18.82	19.33	-	-	22.08	2.75	24.83	30.00	5.17
6345	18.89	19.46	-	-	22.19	1.83	24.03	30.00	5.97

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	16.68	17.04	-	-	19.85	3.40	23.26	30.00	6.74
6185	18.89	19.32	-	-	22.10	2.75	24.85	30.00	5.15
6345	18.80	19.29	-	-	22.04	1.83	23.87	30.00	6.13

Maximum EIRP (U-NII-5) / SP (continued)**Results: SP / TxBF**

Antenna Configuration:	TxBF	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	16.04	16.96	-	-	19.51	6.41	25.92	30.00	4.08
6175	16.91	18.31	-	-	20.65	5.76	26.41	30.00	3.59
6415	18.30	19.25	-	-	21.76	4.80	26.56	30.00	3.44

Antenna Configuration:	TxBF	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	18.49	19.40	-	-	21.97	6.41	28.38	30.00	1.62
6165	18.04	19.30	-	-	21.71	5.76	27.47	30.00	2.53
6405	18.52	19.45	-	-	22.02	4.80	26.82	30.00	3.18

Antenna Configuration:	TxBF	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	18.41	19.15	-	-	21.76	6.41	28.17	30.00	1.83
6145	18.20	19.37	-	-	21.81	5.76	27.57	30.00	2.43
6385	18.14	19.28	-	-	21.75	4.80	26.55	30.00	3.45

Maximum EIRP (U-NII-5) / SP (continued)

Antenna Configuration:	TxBF		Mode:	802.11ax HE160 SU	
Test Port:	1+2 (Core 0+Core1)		Rate/Modulation:	MCS2x1 (QPSK)	

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	18.18	19.12	-	-	21.67	6.41	28.08	30.00	1.92
6185	18.15	19.31	-	-	21.75	5.76	27.52	30.00	2.48
6345	18.19	19.47	-	-	21.89	4.80	26.69	30.00	3.31

Maximum EIRP (U-NII-5) / VLP (continued)**Results: VLP / SISO / Core 0**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	2.34	-	-	-	-	2.60	4.94	14.00	9.06
6175	2.22	-	-	-	-	2.60	4.82	14.00	9.18
6415	3.94	-	-	-	-	0.90	4.84	14.00	9.16

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	5.56	-	-	-	-	2.60	8.16	14.00	5.84
6285	7.39	-	-	-	-	0.90	8.29	14.00	5.71
6405	7.18	-	-	-	-	0.90	8.08	14.00	5.92

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	8.37	-	-	-	-	2.60	10.97	14.00	3.03
6305	10.30	-	-	-	-	0.90	11.20	14.00	2.80
6385	10.16	-	-	-	-	0.90	11.06	14.00	2.94

Maximum EIRP (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	10.28	-	-	-	-	2.60	12.88	14.00	1.12
6345	11.90	-	-	-	-	0.90	12.80	14.00	1.20

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	2.31	-	-	-	-	2.60	4.91	14.00	9.09
6175	2.05	-	-	-	-	2.60	4.65	14.00	9.35
6415	3.81	-	-	-	-	0.90	4.71	14.00	9.29

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-6.61	-	-	-	-	2.60	-4.01	14.00	18.01
6175	-6.51	-	-	-	-	2.60	-3.91	14.00	17.91
6415	-5.37	-	-	-	-	0.90	-4.47	14.00	18.47

Maximum EIRP (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-3.89	-	-	-	-	2.60	-1.29	14.00	15.29
6175	-3.93	-	-	-	-	2.60	-1.33	14.00	15.33
6415	-2.41	-	-	-	-	0.90	-1.51	14.00	15.51

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-1.11	-	-	-	-	2.60	1.49	14.00	12.51
6175	-0.86	-	-	-	-	2.60	1.74	14.00	12.26
6415	0.75	-	-	-	-	0.90	1.65	14.00	12.35

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-2.16	-	-	-	-	2.60	0.44	14.00	13.56
6175	-2.10	-	-	-	-	2.60	0.50	14.00	13.50
6415	-0.11	-	-	-	-	0.90	0.79	14.00	13.21

Maximum EIRP (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	0.04	-	-	-	-	2.60	2.64	14.00	11.36
6175	-0.04	-	-	-	-	2.60	2.56	14.00	11.44
6415	2.21	-	-	-	-	0.90	3.11	14.00	10.89

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	5.25	-	-	-	-	2.60	7.85	14.00	6.15
6285	6.90	-	-	-	-	0.90	7.80	14.00	6.20
6405	7.04	-	-	-	-	0.90	7.94	14.00	6.06

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	8.26	-	-	-	-	2.60	10.86	14.00	3.14
6305	10.01	-	-	-	-	0.90	10.91	14.00	3.09
6385	9.70	-	-	-	-	0.90	10.60	14.00	3.40