


Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-0.14	-	-	-	-	3.50	3.36	17.00	13.64
6185	1.35	-	-	-	-	2.60	3.95	17.00	13.05
6345	0.80	-	-	-	-	0.90	1.70	17.00	15.30

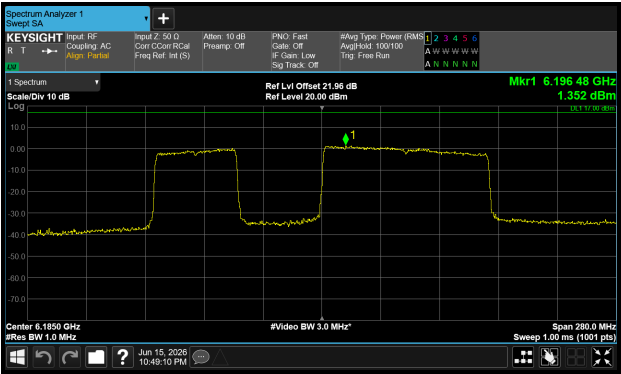

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-0.85	-	-	-	-	3.50	2.65	17.00	14.35
6185	0.92	-	-	-	-	2.60	3.52	17.00	13.48
6345	0.00	-	-	-	-	0.90	0.90	17.00	16.10

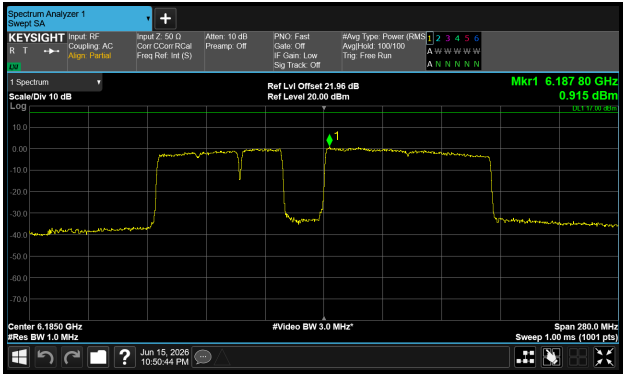

Maximum EIRP SD (U-NII-5) / SP (continued)**Results: SP / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	8.11	-	-	-	3.30	11.41	17.00	5.59
6175	-	8.23	-	-	-	2.90	11.13	17.00	5.87
6415	-	7.50	-	-	-	2.60	10.10	17.00	6.90

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	-	4.30	-	-	-	3.30	7.60	17.00	9.40
6165	-	5.63	-	-	-	2.90	8.53	17.00	8.47
6405	-	4.71	-	-	-	2.60	7.31	17.00	9.69

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	-	2.94	-	-	-	3.30	6.24	17.00	10.76
6145	-	2.24	-	-	-	2.90	5.14	17.00	11.86
6385	-	2.22	-	-	-	2.60	4.82	17.00	12.18

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	-0.68	-	-	-	3.30	2.62	17.00	14.38
6185	-	0.28	-	-	-	2.90	3.18	17.00	13.82
6345	-	0.02	-	-	-	2.60	2.62	17.00	14.38

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	7.92	-	-	-	3.30	11.22	17.00	5.78
6175	-	7.78	-	-	-	2.90	10.68	17.00	6.32
6415	-	7.00	-	-	-	2.60	9.60	17.00	7.40

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	8.40	-	-	-	3.30	11.70	17.00	5.30
6175	-	8.05	-	-	-	2.90	10.95	17.00	6.05
6415	-	8.59	-	-	-	2.60	11.19	17.00	5.81

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	9.43	-	-	-	3.30	12.73	17.00	4.27
6175	-	9.63	-	-	-	2.90	12.53	17.00	4.47
6415	-	8.89	-	-	-	2.60	11.49	17.00	5.51

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	9.60	-	-	-	3.30	12.90	17.00	4.10
6175	-	9.75	-	-	-	2.90	12.65	17.00	4.35
6415	-	8.68	-	-	-	2.60	11.28	17.00	5.72

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	8.98	-	-	-	3.30	12.28	17.00	4.72
6175	-	9.30	-	-	-	2.90	12.20	17.00	4.80
6415	-	8.55	-	-	-	2.60	11.15	17.00	5.85

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	9.12	-	-	-	3.30	12.42	17.00	4.58
6175	-	9.17	-	-	-	2.90	12.07	17.00	4.93
6415	-	8.89	-	-	-	2.60	11.49	17.00	5.51

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	-	5.03	-	-	-	3.30	8.33	17.00	8.67
6165	-	4.89	-	-	-	2.90	7.79	17.00	9.21
6405	-	4.64	-	-	-	2.60	7.24	17.00	9.76

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	-	1.95	-	-	-	3.30	5.25	17.00	11.75
6145	-	1.71	-	-	-	2.90	4.61	17.00	12.39
6385	-	1.39	-	-	-	2.60	3.99	17.00	13.01

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	-	0.92	-	-	-	3.30	4.22	17.00	12.78
6145	-	3.36	-	-	-	2.90	6.26	17.00	10.74
6385	-	2.32	-	-	-	2.60	4.92	17.00	12.08

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	-1.22	-	-	-	3.30	2.08	17.00	14.92
6185	-	-0.05	-	-	-	2.90	2.85	17.00	14.15
6345	-	-0.50	-	-	-	2.60	2.10	17.00	14.90

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	-0.43	-	-	-	3.30	2.87	17.00	14.13
6185	-	1.49	-	-	-	2.90	4.39	17.00	12.61
6345	-	0.67	-	-	-	2.60	3.27	17.00	13.73

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242						
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)						

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	-0.91	-	-	-	3.30	2.39	17.00	14.61
6185	-	0.61	-	-	-	2.90	3.51	17.00	13.49
6345	-	-0.24	-	-	-	2.60	2.36	17.00	14.64

Maximum EIRP SD (U-NII-5) / SP (continued)**Results: SP / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	5.30	5.47	-	-	8.39	6.41	14.80	17.00	2.20
6175	6.48	7.13	-	-	9.83	5.76	15.59	17.00	1.41
6415	6.98	7.21	-	-	10.11	4.80	14.91	17.00	2.09

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	3.55	4.10	-	-	6.84	6.41	13.26	17.00	3.74
6165	4.79	5.31	-	-	8.07	5.76	13.83	17.00	3.17
6405	4.50	4.97	-	-	7.75	4.80	12.55	17.00	4.45

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	1.62	1.45	-	-	4.55	6.41	10.96	17.00	6.04
6145	1.73	2.37	-	-	5.07	5.76	10.83	17.00	6.17
6385	2.37	2.22	-	-	5.31	4.80	10.11	17.00	6.89

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-2.05	-1.33	-	-	1.33	6.41	7.74	17.00	9.26
6185	0.02	0.54	-	-	3.30	5.76	9.06	17.00	7.94
6345	-0.06	0.12	-	-	3.04	4.80	7.84	17.00	9.16

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	4.90	5.28	-	-	8.10	6.41	14.51	17.00	2.49
6175	5.35	6.74	-	-	9.11	5.76	14.87	17.00	2.13
6415	6.00	6.91	-	-	9.49	4.80	14.29	17.00	2.71

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	4.58	5.27	-	-	7.95	6.41	14.36	17.00	2.64
6175	4.98	5.63	-	-	8.33	5.76	14.09	17.00	2.91
6415	6.87	7.07	-	-	9.98	4.80	14.79	17.00	2.21

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	5.48	5.76	-	-	8.63	6.41	15.04	17.00	1.96
6175	5.76	6.55	-	-	9.18	5.76	14.95	17.00	2.05
6415	6.99	7.39	-	-	10.20	4.80	15.00	17.00	2.00

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	5.84	6.01	-	-	8.94	6.41	15.35	17.00	1.65
6175	6.15	6.85	-	-	9.53	5.76	15.29	17.00	1.71
6415	7.12	7.17	-	-	10.16	4.80	14.96	17.00	2.04

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	5.68	5.71	-	-	8.70	6.41	15.11	17.00	1.89
6175	6.12	6.89	-	-	9.53	5.76	15.29	17.00	1.71
6415	6.97	7.22	-	-	10.11	4.80	14.91	17.00	2.09

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	5.75	5.99	-	-	8.88	6.41	15.29	17.00	1.71
6175	6.41	6.80	-	-	9.62	5.76	15.38	17.00	1.62
6415	7.20	7.45	-	-	10.34	4.80	15.14	17.00	1.86

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	4.23	5.06	-	-	7.67	6.41	14.09	17.00	2.91
6165	3.91	4.81	-	-	7.39	5.76	13.15	17.00	3.85
6405	3.66	4.34	-	-	7.02	4.80	11.82	17.00	5.18

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	1.14	2.06	-	-	4.64	6.41	11.05	17.00	5.95
6145	0.31	1.58	-	-	4.00	5.76	9.77	17.00	7.23
6385	0.52	1.31	-	-	3.94	4.80	8.75	17.00	8.25

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	0.58	0.57	-	-	3.59	6.41	10.00	17.00	7.00
6145	2.67	3.15	-	-	5.93	5.76	11.69	17.00	5.31
6385	2.25	2.24	-	-	5.26	4.80	10.06	17.00	6.94

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-2.11	-1.24	-	-	1.36	6.41	7.77	17.00	9.23
6185	-1.45	0.04	-	-	2.37	5.76	8.13	17.00	8.87
6345	-1.28	0.05	-	-	2.45	4.80	7.25	17.00	9.75

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-1.81	-1.06	-	-	1.59	6.41	8.00	17.00	9.00
6185	0.96	1.44	-	-	4.22	5.76	9.98	17.00	7.02
6345	0.05	0.51	-	-	3.30	4.80	8.10	17.00	8.90

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-2.75	-1.91	-	-	0.70	6.41	7.11	17.00	9.89
6185	0.37	0.62	-	-	3.51	5.76	9.27	17.00	7.73
6345	-0.69	-0.26	-	-	2.54	4.80	7.34	17.00	9.66

Maximum EIRP SD (U-NII-5) / SP (continued)**Results: SP / MIMO SDM**

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	7.05	7.76	-	-	10.43	3.40	13.83	17.00	3.17
6175	6.60	7.90	-	-	10.31	2.75	13.06	17.00	3.94
6415	6.28	7.34	-	-	9.86	1.83	11.69	17.00	5.31

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	7.78	8.54	-	-	11.19	3.40	14.59	17.00	2.41
6175	7.68	8.17	-	-	10.95	2.75	13.70	17.00	3.30
6415	8.69	8.88	-	-	11.80	1.83	13.63	17.00	3.37

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	8.15	8.73	-	-	11.46	3.40	14.86	17.00	2.14
6175	8.66	9.61	-	-	12.17	2.75	14.92	17.00	2.08
6415	9.16	9.10	-	-	12.14	1.83	13.97	17.00	3.03

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	8.92	9.03	-	-	11.98	3.40	15.38	17.00	1.62
6175	9.29	9.78	-	-	12.55	2.75	15.31	17.00	1.69
6415	8.79	9.04	-	-	11.92	1.83	13.76	17.00	3.24

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	8.48	8.99	-	-	11.75	3.40	15.15	17.00	1.85
6175	8.73	9.25	-	-	12.01	2.75	14.76	17.00	2.24
6415	8.35	8.38	-	-	11.37	1.83	13.21	17.00	3.79

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	8.91	9.01	-	-	11.97	3.40	15.37	17.00	1.63
6175	8.47	9.48	-	-	12.01	2.75	14.77	17.00	2.23
6415	8.30	8.43	-	-	11.37	1.83	13.21	17.00	3.79

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	4.63	5.18	-	-	7.92	3.40	11.32	17.00	5.68
6165	3.63	4.69	-	-	7.20	2.75	9.95	17.00	7.05
6405	3.54	4.58	-	-	7.11	1.83	8.94	17.00	8.06

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	1.42	2.37	-	-	4.93	3.40	8.33	17.00	8.67
6145	0.47	1.76	-	-	4.17	2.75	6.92	17.00	10.08
6385	0.57	1.64	-	-	4.15	1.83	5.98	17.00	11.02

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	0.22	0.72	-	-	3.48	3.40	6.89	17.00	10.11
6145	2.91	3.39	-	-	6.17	2.75	8.92	17.00	8.08
6385	2.28	2.44	-	-	5.37	1.83	7.20	17.00	9.80

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-1.97	-0.79	-	-	1.67	3.40	5.07	17.00	11.93
6185	-0.92	0.01	-	-	2.58	2.75	5.33	17.00	11.67
6345	-1.29	-0.03	-	-	2.40	1.83	4.23	17.00	12.77

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-1.67	-1.27	-	-	1.55	3.40	4.95	17.00	12.05
6185	1.04	1.74	-	-	4.42	2.75	7.17	17.00	9.83
6345	0.03	0.45	-	-	3.26	1.83	5.09	17.00	11.91

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-2.82	-2.18	-	-	0.52	3.40	3.92	17.00	13.08
6185	0.50	0.80	-	-	3.66	2.75	6.41	17.00	10.59
6345	-0.16	-0.14	-	-	2.86	1.83	4.69	17.00	12.31

Maximum EIRP SD (U-NII-5) / SP (continued)**Results: SP / TxBF**

Antenna Configuration:	TxBF	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	4.66	5.46	-	-	8.09	6.41	14.50	17.00	2.50
6175	5.31	6.56	-	-	8.99	5.76	14.75	17.00	2.25
6415	6.43	7.14	-	-	9.81	4.80	14.61	17.00	2.39

Antenna Configuration:	TxBF	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	4.46	5.03	-	-	7.76	6.41	14.17	17.00	2.83
6165	3.41	4.74	-	-	7.14	5.76	12.90	17.00	4.10
6405	3.63	4.64	-	-	7.17	4.80	11.98	17.00	5.02

Antenna Configuration:	TxBF	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	1.45	2.12	-	-	4.81	6.41	11.22	17.00	5.78
6145	0.64	1.67	-	-	4.19	5.76	9.96	17.00	7.04
6385	0.62	1.42	-	-	4.05	4.80	8.85	17.00	8.15

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	TxBF	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-2.19	-1.21	-	-	1.34	6.41	7.75	17.00	9.25
6185	-1.34	-0.29	-	-	2.23	5.76	7.99	17.00	9.01
6345	-1.28	-0.12	-	-	2.35	4.80	7.15	17.00	9.85

Maximum EIRP SD (U-NII-5) / VLP (continued)

Results: VLP / SISO / Core 0

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-8.73	-	-	-	-	2.60	-6.13	-5.00	1.13
6175	-8.94	-	-	-	-	2.60	-6.34	-5.00	1.34
6415	-7.75	-	-	-	-	0.90	-6.85	-5.00	1.85

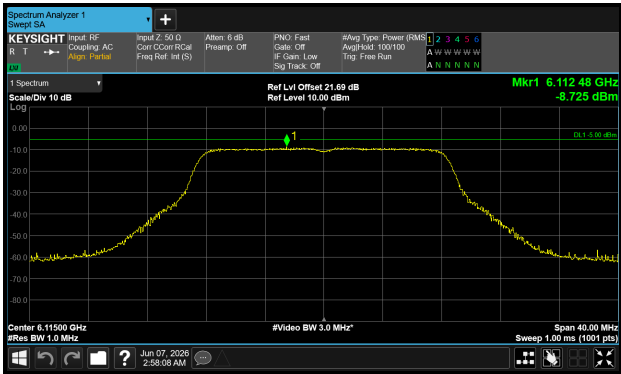

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-8.45	-	-	-	-	2.60	-5.85	-5.00	0.85
6285	-6.56	-	-	-	-	0.90	-5.66	-5.00	0.66
6405	-7.27	-	-	-	-	0.90	-6.37	-5.00	1.37

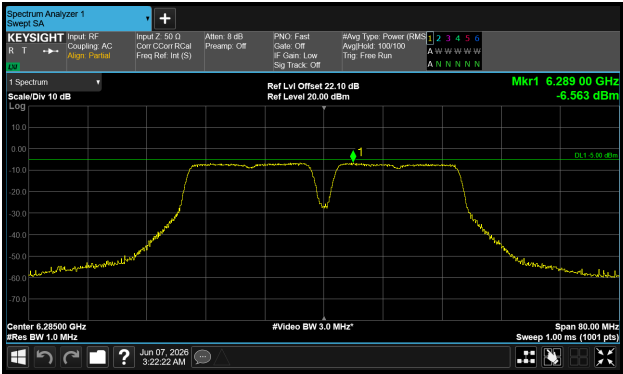

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-8.65	-	-	-	-	2.60	-6.05	-5.00	1.05
6305	-6.59	-	-	-	-	0.90	-5.69	-5.00	0.69
6385	-6.96	-	-	-	-	0.90	-6.06	-5.00	1.06

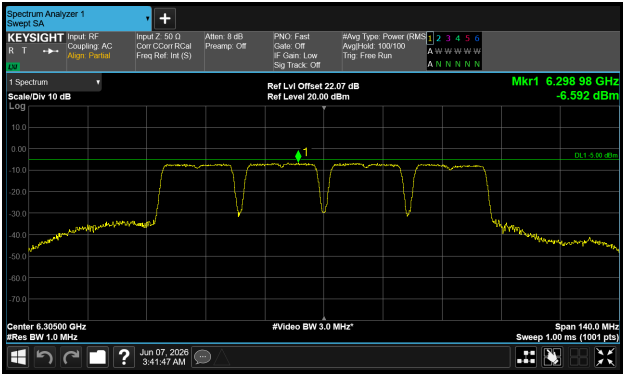

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-9.46	-	-	-	-	2.60	-6.86	-5.00	1.86
6345	-7.56	-	-	-	-	0.90	-6.66	-5.00	1.66

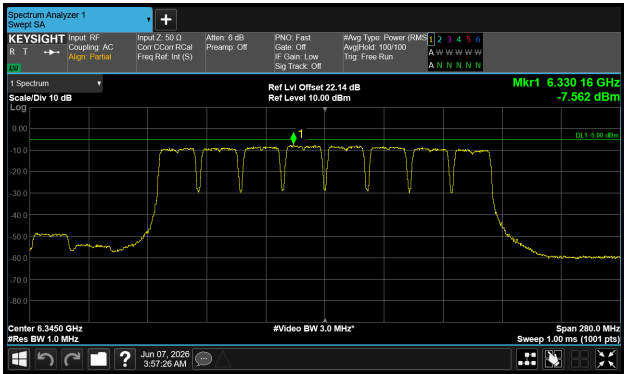

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-9.30	-	-	-	-	2.60	-6.70	-5.00	1.70
6175	-9.17	-	-	-	-	2.60	-6.57	-5.00	1.57
6415	-7.92	-	-	-	-	0.90	-7.02	-5.00	2.02

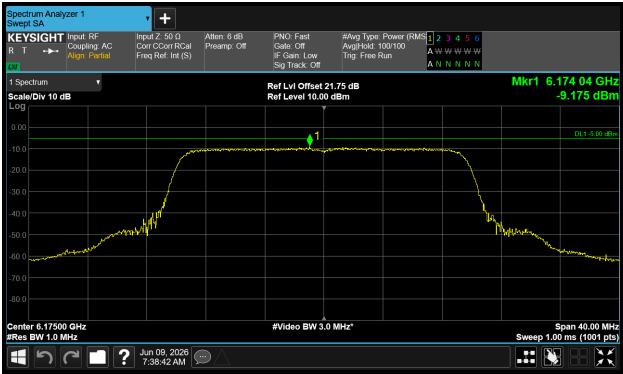

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-9.09	-	-	-	-	2.60	-6.49	-5.00	1.49
6175	-10.19	-	-	-	-	2.60	-7.59	-5.00	2.59
6415	-8.07	-	-	-	-	0.90	-7.17	-5.00	2.17

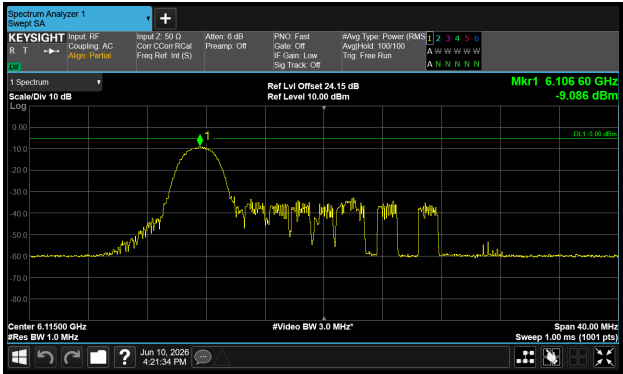

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-9.22	-	-	-	-	2.60	-6.62	-5.00	1.62
6175	-9.22	-	-	-	-	2.60	-6.62	-5.00	1.62
6415	-7.80	-	-	-	-	0.90	-6.90	-5.00	1.90

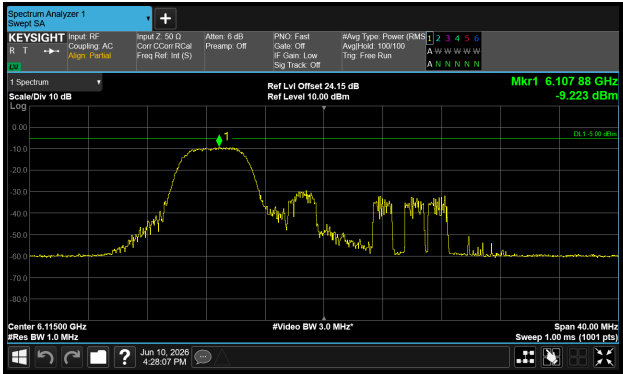

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-9.53	-	-	-	-	2.60	-6.93	-5.00	1.93
6175	-8.88	-	-	-	-	2.60	-6.28	-5.00	1.28
6415	-7.77	-	-	-	-	0.90	-6.87	-5.00	1.87

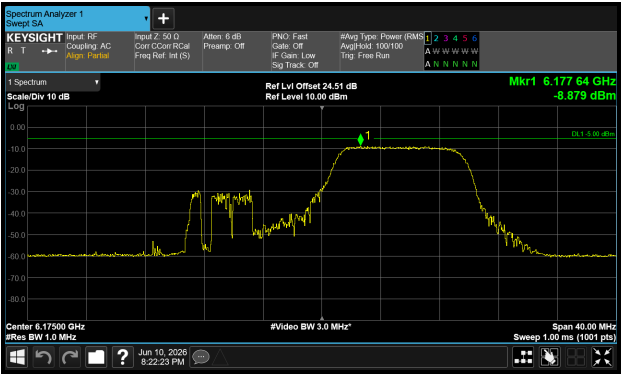

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-9.33	-	-	-	-	2.60	-6.73	-5.00	1.73
6175	-9.14	-	-	-	-	2.60	-6.54	-5.00	1.54
6415	-7.13	-	-	-	-	0.90	-6.23	-5.00	1.23



Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-9.25	-	-	-	-	2.60	-6.65	-5.00	1.65
6175	-8.58	-	-	-	-	2.60	-5.98	-5.00	0.98
6415	-7.01	-	-	-	-	0.90	-6.11	-5.00	1.11

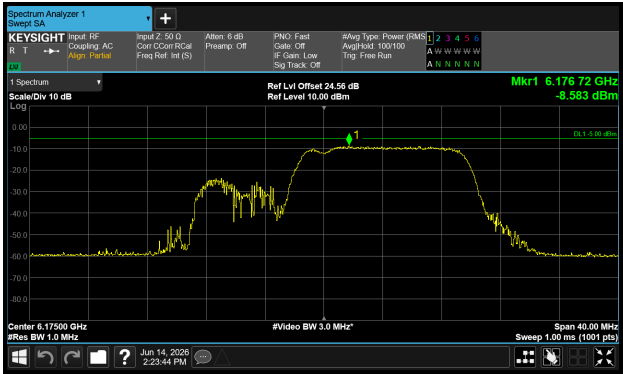

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-9.51	-	-	-	-	2.60	-6.91	-5.00	1.91
6285	-7.65	-	-	-	-	0.90	-6.75	-5.00	1.75
6405	-7.77	-	-	-	-	0.90	-6.87	-5.00	1.87

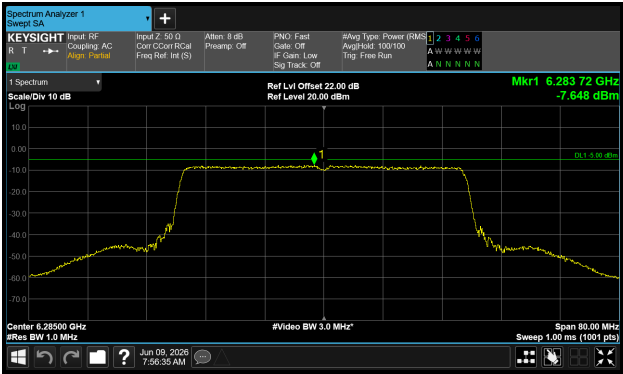

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-9.69	-	-	-	-	2.60	-7.09	-5.00	2.09
6305	-7.76	-	-	-	-	0.90	-6.86	-5.00	1.86
6385	-7.80	-	-	-	-	0.90	-6.90	-5.00	1.90

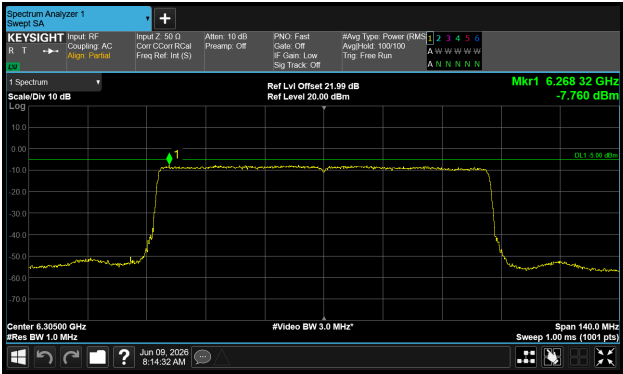

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-8.91	-	-	-	-	2.60	-6.31	-5.00	1.31
6305	-7.29	-	-	-	-	0.90	-6.39	-5.00	1.39
6385	-7.49	-	-	-	-	0.90	-6.59	-5.00	1.59

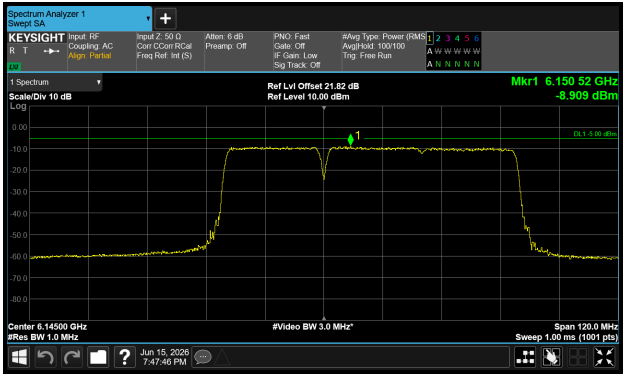

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-9.84	-	-	-	-	2.60	-7.24	-5.00	2.24
6345	-8.20	-	-	-	-	0.90	-7.30	-5.00	2.30

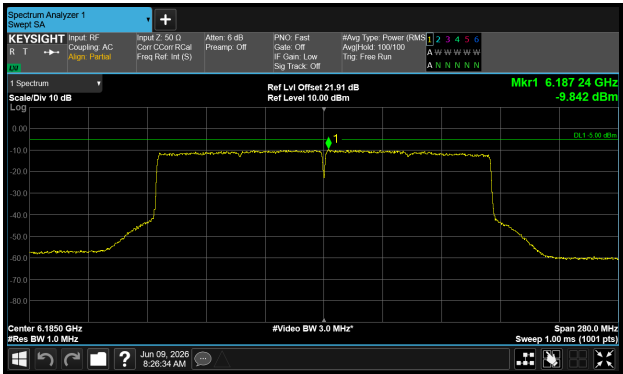

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-9.03	-	-	-	-	2.60	-6.43	-5.00	1.43
6345	-6.58	-	-	-	-	0.90	-5.68	-5.00	0.68

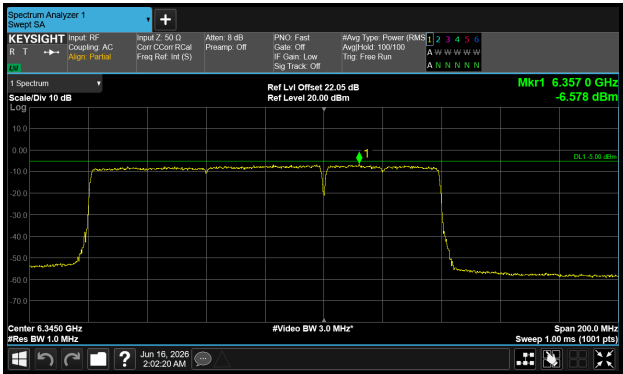

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-9.20	-	-	-	-	2.60	-6.60	-5.00	1.60
6345	-7.80	-	-	-	-	0.90	-6.90	-5.00	1.90

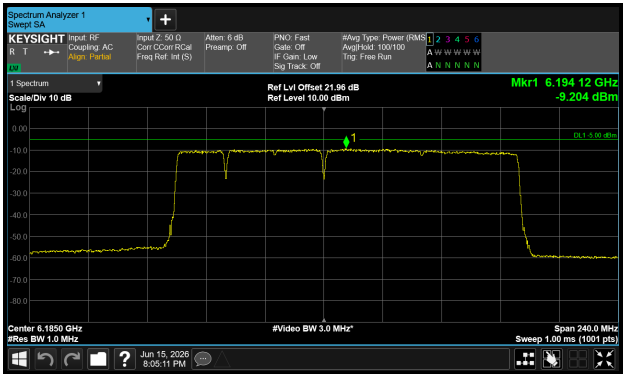

Maximum EIRP SD (U-NII-5) / VLP (continued)**Results: VLP / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-9.60	-	-	-	2.90	-6.70	-5.00	1.70
6175	-	-9.61	-	-	-	2.90	-6.71	-5.00	1.71
6415	-	-9.32	-	-	-	2.60	-6.72	-5.00	1.72

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-	-8.60	-	-	-	2.90	-5.70	-5.00	0.70
6285	-	-8.08	-	-	-	2.60	-5.48	-5.00	0.48
6405	-	-8.46	-	-	-	2.60	-5.86	-5.00	0.86

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-	-8.74	-	-	-	2.90	-5.84	-5.00	0.84
6305	-	-8.45	-	-	-	2.60	-5.85	-5.00	0.85
6385	-	-9.09	-	-	-	2.60	-6.49	-5.00	1.49

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-	-9.54	-	-	-	2.90	-6.64	-5.00	1.64
6345	-	-9.37	-	-	-	2.60	-6.77	-5.00	1.77

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-9.28	-	-	-	2.90	-6.38	-5.00	1.38
6175	-	-9.25	-	-	-	2.90	-6.35	-5.00	1.35
6415	-	-9.31	-	-	-	2.60	-6.71	-5.00	1.71

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-10.08	-	-	-	2.90	-7.18	-5.00	2.18
6175	-	-10.97	-	-	-	2.90	-8.07	-5.00	3.07
6415	-	-10.47	-	-	-	2.60	-7.87	-5.00	2.87

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-10.28	-	-	-	2.90	-7.38	-5.00	2.38
6175	-	-9.88	-	-	-	2.90	-6.98	-5.00	1.98
6415	-	-9.89	-	-	-	2.60	-7.29	-5.00	2.29

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-10.10	-	-	-	2.90	-7.20	-5.00	2.20
6175	-	-9.80	-	-	-	2.90	-6.90	-5.00	1.90
6415	-	-10.04	-	-	-	2.60	-7.44	-5.00	2.44

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-10.29	-	-	-	2.90	-7.39	-5.00	2.39
6175	-	-9.70	-	-	-	2.90	-6.80	-5.00	1.80
6415	-	-9.86	-	-	-	2.60	-7.26	-5.00	2.26

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-9.89	-	-	-	2.90	-6.99	-5.00	1.99
6175	-	-9.80	-	-	-	2.90	-6.90	-5.00	1.90
6415	-	-9.93	-	-	-	2.60	-7.33	-5.00	2.33

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-	-9.42	-	-	-	2.90	-6.52	-5.00	1.52
6285	-	-8.93	-	-	-	2.60	-6.33	-5.00	1.33
6405	-	-9.26	-	-	-	2.60	-6.66	-5.00	1.66

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-	-9.35	-	-	-	2.90	-6.45	-5.00	1.45
6305	-	-9.07	-	-	-	2.60	-6.47	-5.00	1.47
6385	-	-9.55	-	-	-	2.60	-6.95	-5.00	1.95

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-	-9.35	-	-	-	2.90	-6.45	-5.00	1.45
6305	-	-8.94	-	-	-	2.60	-6.34	-5.00	1.34
6385	-	-9.61	-	-	-	2.60	-7.01	-5.00	2.01

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-	-10.08	-	-	-	2.90	-7.18	-5.00	2.18
6345	-	-9.75	-	-	-	2.60	-7.15	-5.00	2.15

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-	-8.93	-	-	-	2.90	-6.03	-5.00	1.03
6345	-	-8.74	-	-	-	2.60	-6.14	-5.00	1.14

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-	-9.38	-	-	-	2.90	-6.48	-5.00	1.48
6345	-	-9.55	-	-	-	2.60	-6.95	-5.00	1.95

Maximum EIRP SD (U-NII-5) / VLP (continued)**Results: VLP / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-15.29	-15.30	-	-	-12.28	5.76	-6.52	-5.00	1.52
6175	-15.10	-14.87	-	-	-11.97	5.76	-6.21	-5.00	1.21
6415	-15.02	-14.94	-	-	-11.97	4.80	-7.17	-5.00	2.17

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-13.82	-14.55	-	-	-11.16	5.76	-5.39	-5.00	0.39
6285	-13.23	-13.73	-	-	-10.46	4.80	-5.66	-5.00	0.66
6405	-13.89	-14.53	-	-	-11.19	4.80	-6.38	-5.00	1.38

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-14.48	-14.55	-	-	-11.50	5.76	-5.74	-5.00	0.74
6305	-13.98	-13.28	-	-	-10.61	4.80	-5.81	-5.00	0.81
6385	-14.47	-14.09	-	-	-11.27	4.80	-6.47	-5.00	1.47

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-14.91	-14.18	-	-	-11.51	5.76	-5.75	-5.00	0.75
6345	-14.35	-13.66	-	-	-10.98	4.80	-6.18	-5.00	1.18

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-16.26	-15.69	-	-	-12.95	5.76	-7.19	-5.00	2.19
6175	-16.05	-15.50	-	-	-12.75	5.76	-6.99	-5.00	1.99
6415	-15.96	-15.11	-	-	-12.51	4.80	-7.70	-5.00	2.70

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6415	-15.18	-16.19	-	-	-12.64	4.80	-7.84	-5.00	2.84

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-15.67	-16.48	-	-	-13.05	5.76	-7.29	-5.00	2.29
6175	-15.20	-15.87	-	-	-12.51	5.76	-6.75	-5.00	1.75
6415	-14.74	-15.36	-	-	-12.03	4.80	-7.22	-5.00	2.22

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-15.57	-16.53	-	-	-13.01	5.76	-7.25	-5.00	2.25
6175	-14.98	-16.31	-	-	-12.58	5.76	-6.82	-5.00	1.82
6415	-14.65	-15.22	-	-	-11.91	4.80	-7.11	-5.00	2.11

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-15.53	-16.27	-	-	-12.88	5.76	-7.11	-5.00	2.11
6175	-15.00	-15.89	-	-	-12.41	5.76	-6.65	-5.00	1.65
6415	-14.33	-15.08	-	-	-11.68	4.80	-6.88	-5.00	1.88

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-16.35	-15.63	-	-	-12.97	5.76	-7.20	-5.00	2.20
6285	-14.87	-14.07	-	-	-11.44	4.80	-6.64	-5.00	1.64
6405	-15.39	-14.80	-	-	-12.07	4.80	-7.27	-5.00	2.27

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-15.36	-14.73	-	-	-12.02	5.76	-6.26	-5.00	1.26
6305	-14.96	-14.12	-	-	-11.51	4.80	-6.71	-5.00	1.71
6385	-14.00	-14.34	-	-	-11.15	4.80	-6.35	-5.00	1.35

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-15.60	-15.29	-	-	-12.43	5.76	-6.67	-5.00	1.67
6305	-14.60	-14.73	-	-	-11.66	4.80	-6.86	-5.00	1.86
6385	-15.47	-15.59	-	-	-12.52	4.80	-7.72	-5.00	2.72

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-15.80	-14.79	-	-	-12.25	5.76	-6.49	-5.00	1.49
6345	-14.76	-13.84	-	-	-11.26	4.80	-6.46	-5.00	1.46

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-15.26	-14.46	-	-	-11.83	5.76	-6.07	-5.00	1.07
6345	-14.58	-14.28	-	-	-11.41	4.80	-6.61	-5.00	1.61

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-15.25	-14.63	-	-	-11.92	5.76	-6.16	-5.00	1.16
6345	-14.62	-14.34	-	-	-11.46	4.80	-6.66	-5.00	1.66

Maximum EIRP SD (U-NII-5) / VLP (continued)**Results: VLP / MIMO SDM**

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-13.16	-12.33	-	-	-9.72	2.75	-6.96	-5.00	1.96
6175	-12.83	-12.23	-	-	-9.51	2.75	-6.76	-5.00	1.76
6415	-13.04	-12.28	-	-	-9.63	1.83	-7.80	-5.00	2.80

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6415	-12.40	-13.11	-	-	-9.73	1.83	-7.90	-5.00	2.90

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-12.58	-13.45	-	-	-9.98	2.75	-7.23	-5.00	2.23
6175	-12.90	-13.64	-	-	-10.24	2.75	-7.49	-5.00	2.49
6415	-12.26	-12.78	-	-	-9.50	1.83	-7.67	-5.00	2.67

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-12.40	-13.27	-	-	-9.81	2.75	-7.05	-5.00	2.05
6175	-11.82	-12.97	-	-	-9.35	2.75	-6.59	-5.00	1.59
6415	-11.40	-12.48	-	-	-8.90	1.83	-7.07	-5.00	2.07

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-12.72	-13.19	-	-	-9.94	2.75	-7.19	-5.00	2.19
6175	-12.70	-12.91	-	-	-9.80	2.75	-7.04	-5.00	2.04
6415	-11.78	-12.27	-	-	-9.01	1.83	-7.17	-5.00	2.17

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-12.31	-13.11	-	-	-9.68	2.75	-6.93	-5.00	1.93
6175	-12.24	-12.87	-	-	-9.53	2.75	-6.78	-5.00	1.78
6415	-11.78	-12.25	-	-	-9.00	1.83	-7.17	-5.00	2.17

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-12.57	-11.78	-	-	-9.15	2.75	-6.40	-5.00	1.40
6285	-11.79	-11.17	-	-	-8.46	1.83	-6.63	-5.00	1.63
6405	-12.22	-11.49	-	-	-8.83	1.83	-7.00	-5.00	2.00

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-13.17	-12.10	-	-	-9.59	2.75	-6.84	-5.00	1.84
6305	-12.33	-11.22	-	-	-8.73	1.83	-6.90	-5.00	1.90
6385	-12.62	-11.70	-	-	-9.12	1.83	-7.29	-5.00	2.29

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-12.63	-11.67	-	-	-9.11	2.75	-6.36	-5.00	1.36
6305	-11.91	-11.34	-	-	-8.60	1.83	-6.77	-5.00	1.77
6385	-12.07	-11.44	-	-	-8.73	1.83	-6.90	-5.00	1.90

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-13.33	-12.41	-	-	-9.84	2.75	-7.08	-5.00	2.08
6345	-12.60	-12.15	-	-	-9.36	1.83	-7.53	-5.00	2.53

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-12.41	-11.73	-	-	-9.05	2.75	-6.29	-5.00	1.29
6345	-11.45	-10.81	-	-	-8.11	1.83	-6.28	-5.00	1.28

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-12.67	-12.27	-	-	-9.46	2.75	-6.70	-5.00	1.70
6345	-11.98	-11.67	-	-	-8.81	1.83	-6.98	-5.00	1.98

Maximum EIRP SD (U-NII-5) / VLP (continued)**Results: VLP / TxBF**

Antenna Configuration:	TxBF	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-16.02	-15.71	-	-	-12.85	5.76	-7.09	-5.00	2.09
6175	-15.49	-15.56	-	-	-12.51	5.76	-6.75	-5.00	1.75
6415	-15.82	-15.15	-	-	-12.46	4.80	-7.66	-5.00	2.66

Antenna Configuration:	TxBF	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-15.94	-15.38	-	-	-12.64	5.76	-6.88	-5.00	1.88
6285	-14.36	-14.31	-	-	-11.32	4.80	-6.52	-5.00	1.52
6405	-15.39	-15.08	-	-	-12.22	4.80	-7.42	-5.00	2.42

Antenna Configuration:	TxBF	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-15.04	-14.53	-	-	-11.77	5.76	-6.01	-5.00	1.01
6305	-14.92	-14.10	-	-	-11.48	4.80	-6.68	-5.00	1.68
6385	-15.07	-14.48	-	-	-11.75	4.80	-6.95	-5.00	1.95

Antenna Configuration:	TxBF	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-16.62	-15.75	-	-	-13.15	5.76	-7.39	-5.00	2.39
6345	-15.70	-15.05	-	-	-12.35	4.80	-7.55	-5.00	2.55

Maximum EIRP SD (U-NII-6) / LPI (continued)**4.4.2 6.425-6.525 GHz band (U-NII-6)****Results: LPI / SISO / Core 0**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-3.32	-	-	-	-	0.60	-2.72	-1.00	1.72
6475	-3.20	-	-	-	-	0.60	-2.60	-1.00	1.60
6515	-2.84	-	-	-	-	0.60	-2.24	-1.00	1.24

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-2.68	-	-	-	-	0.60	-2.08	-1.00	1.08
6485	-2.61	-	-	-	-	0.60	-2.01	-1.00	1.01
6525	-2.81	-	-	-	-	0.60	-2.21	-1.00	1.21

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-2.21	-	-	-	-	0.60	-1.61	-1.00	0.61

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-2.71	-	-	-	-	0.60	-2.11	-1.00	1.11

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-3.73	-	-	-	-	0.60	-3.13	-1.00	2.13
6475	-3.71	-	-	-	-	0.60	-3.11	-1.00	2.11
6515	-2.99	-	-	-	-	0.60	-2.39	-1.00	1.39

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-3.75	-	-	-	-	0.60	-3.15	-1.00	2.15
6475	-4.45	-	-	-	-	0.60	-3.85	-1.00	2.85
6515	-2.81	-	-	-	-	0.60	-2.21	-1.00	1.21

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-3.19	-	-	-	-	0.60	-2.59	-1.00	1.59
6475	-3.04	-	-	-	-	0.60	-2.44	-1.00	1.44
6515	-2.84	-	-	-	-	0.60	-2.24	-1.00	1.24

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-3.02	-	-	-	-	0.60	-2.42	-1.00	1.42
6475	-3.01	-	-	-	-	0.60	-2.41	-1.00	1.41
6515	-2.64	-	-	-	-	0.60	-2.04	-1.00	1.04

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-3.32	-	-	-	-	0.60	-2.72	-1.00	1.72
6475	-2.93	-	-	-	-	0.60	-2.33	-1.00	1.33
6515	-2.27	-	-	-	-	0.60	-1.67	-1.00	0.67

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-3.31	-	-	-	-	0.60	-2.71	-1.00	1.71
6475	-2.94	-	-	-	-	0.60	-2.34	-1.00	1.34
6515	-2.70	-	-	-	-	0.60	-2.10	-1.00	1.10

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-3.26	-	-	-	-	0.60	-2.66	-1.00	1.66
6485	-3.54	-	-	-	-	0.60	-2.94	-1.00	1.94
6525	-3.46	-	-	-	-	0.60	-2.86	-1.00	1.86

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-3.05	-	-	-	-	0.60	-2.45	-1.00	1.45

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-2.92	-	-	-	-	0.60	-2.32	-1.00	1.32

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-3.02	-	-	-	-	0.60	-2.42	-1.00	1.42

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-2.55	-	-	-	-	0.60	-1.95	-1.00	0.95

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-2.53	-	-	-	-	0.60	-1.93	-1.00	0.93

Maximum EIRP SD (U-NII-6) / LPI (continued)**Results: LPI / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-5.35	-	-	-	2.60	-2.75	-1.00	1.75
6475	-	-5.14	-	-	-	2.60	-2.54	-1.00	1.54
6515	-	-5.34	-	-	-	2.60	-2.74	-1.00	1.74

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-	-5.00	-	-	-	2.60	-2.40	-1.00	1.40
6485	-	-4.94	-	-	-	2.60	-2.34	-1.00	1.34
6525	-	-4.72	-	-	-	2.60	-2.12	-1.00	1.12

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	-4.55	-	-	-	2.60	-1.95	-1.00	0.95

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-4.59	-	-	-	2.60	-1.99	-1.00	0.99

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-5.69	-	-	-	2.60	-3.09	-1.00	2.09
6475	-	-5.45	-	-	-	2.60	-2.85	-1.00	1.85
6515	-	-5.39	-	-	-	2.60	-2.79	-1.00	1.79

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-6.46	-	-	-	2.60	-3.86	-1.00	2.86
6475	-	-6.91	-	-	-	2.60	-4.31	-1.00	3.31
6515	-	-5.57	-	-	-	2.60	-2.97	-1.00	1.97

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-5.97	-	-	-	2.60	-3.37	-1.00	2.37
6475	-	-5.41	-	-	-	2.60	-2.81	-1.00	1.81
6515	-	-5.14	-	-	-	2.60	-2.54	-1.00	1.54

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-5.51	-	-	-	2.60	-2.91	-1.00	1.91
6475	-	-5.45	-	-	-	2.60	-2.85	-1.00	1.85
6515	-	-5.06	-	-	-	2.60	-2.46	-1.00	1.46

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-6.23	-	-	-	2.60	-3.63	-1.00	2.63
6475	-	-5.84	-	-	-	2.60	-3.24	-1.00	2.24
6515	-	-5.74	-	-	-	2.60	-3.14	-1.00	2.14

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-5.78	-	-	-	2.60	-3.18	-1.00	2.18
6475	-	-5.74	-	-	-	2.60	-3.14	-1.00	2.14
6515	-	-5.36	-	-	-	2.60	-2.76	-1.00	1.76

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-	-5.54	-	-	-	2.60	-2.94	-1.00	1.94
6485	-	-5.41	-	-	-	2.60	-2.81	-1.00	1.81
6525	-	-5.13	-	-	-	2.60	-2.53	-1.00	1.53

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	-4.99	-	-	-	2.60	-2.39	-1.00	1.39

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	-5.16	-	-	-	2.60	-2.56	-1.00	1.56

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-5.02	-	-	-	2.60	-2.42	-1.00	1.42

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-4.47	-	-	-	2.60	-1.87	-1.00	0.87

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-4.62	-	-	-	2.60	-2.02	-1.00	1.02

Maximum EIRP SD (U-NII-6) / LPI (continued)**Results: LPI / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-11.30	-10.75	-	-	-8.01	4.67	-3.34	-1.00	2.34
6475	-11.25	-10.81	-	-	-8.01	4.67	-3.35	-1.00	2.35
6515	-11.17	-10.48	-	-	-7.80	4.67	-3.14	-1.00	2.14

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-9.32	-10.03	-	-	-6.65	4.67	-1.98	-1.00	0.98
6485	-9.68	-10.04	-	-	-6.85	4.67	-2.18	-1.00	1.18
6525	-8.67	-9.79	-	-	-6.19	4.67	-1.52	-1.00	0.52

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-9.77	-9.42	-	-	-6.58	4.67	-1.92	-1.00	0.92

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-9.54	-9.56	-	-	-6.54	4.67	-1.87	-1.00	0.87

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-11.89	-10.65	-	-	-8.22	4.67	-3.55	-1.00	2.55
6475	-12.19	-11.04	-	-	-8.57	4.67	-3.90	-1.00	2.90
6515	-11.59	-10.71	-	-	-8.11	4.67	-3.45	-1.00	2.45

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-10.55	-11.57	-	-	-8.02	4.67	-3.35	-1.00	2.35
6475	-12.25	-12.53	-	-	-9.38	4.67	-4.71	-1.00	3.71
6515	-10.65	-10.93	-	-	-7.78	4.67	-3.11	-1.00	2.11

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-10.62	-11.42	-	-	-7.99	4.67	-3.33	-1.00	2.33
6475	-10.93	-11.02	-	-	-7.96	4.67	-3.30	-1.00	2.30
6515	-10.60	-10.87	-	-	-7.73	4.67	-3.06	-1.00	2.06

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-10.56	-11.19	-	-	-7.85	4.67	-3.18	-1.00	2.18
6475	-11.17	-10.91	-	-	-8.03	4.67	-3.36	-1.00	2.36
6515	-10.15	-10.45	-	-	-7.29	4.67	-2.62	-1.00	1.62

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-10.85	-11.50	-	-	-8.15	4.67	-3.48	-1.00	2.48
6475	-10.76	-11.26	-	-	-7.99	4.67	-3.32	-1.00	2.32
6515	-10.54	-10.60	-	-	-7.56	4.67	-2.90	-1.00	1.90

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-10.46	-11.02	-	-	-7.72	4.67	-3.05	-1.00	2.05
6475	-10.57	-11.05	-	-	-7.79	4.67	-3.12	-1.00	2.12
6515	-10.52	-10.72	-	-	-7.61	4.67	-2.94	-1.00	1.94

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-11.40	-10.27	-	-	-7.79	4.67	-3.12	-1.00	2.12
6485	-11.60	-10.80	-	-	-8.17	4.67	-3.50	-1.00	2.50
6525	-10.98	-10.08	-	-	-7.49	4.67	-2.83	-1.00	1.83

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-11.02	-10.35	-	-	-7.66	4.67	-2.99	-1.00	1.99

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-10.50	-10.23	-	-	-7.36	4.67	-2.69	-1.00	1.69

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-10.52	-10.16	-	-	-7.33	4.67	-2.66	-1.00	1.66

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-10.00	-9.60	-	-	-6.78	4.67	-2.12	-1.00	1.12

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-9.84	-9.72	-	-	-6.77	4.67	-2.10	-1.00	1.10

Maximum EIRP SD (U-NII-6) / LPI (continued)**Results: LPI / MIMO SDM**

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-8.77	-7.42	-	-	-5.03	1.71	-3.32	-1.00	2.32
6475	-8.67	-7.39	-	-	-4.98	1.71	-3.26	-1.00	2.26
6515	-8.09	-7.55	-	-	-4.80	1.71	-3.09	-1.00	2.09

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.72	-8.32	-	-	-5.00	1.71	-3.28	-1.00	2.28
6475	-9.47	-9.20	-	-	-6.32	1.71	-4.61	-1.00	3.61
6515	-7.92	-7.61	-	-	-4.76	1.71	-3.04	-1.00	2.04

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.54	-8.08	-	-	-4.79	1.71	-3.08	-1.00	2.08
6475	-7.95	-8.23	-	-	-5.08	1.71	-3.36	-1.00	2.36
6515	-7.55	-7.54	-	-	-4.54	1.71	-2.82	-1.00	1.82

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.53	-7.94	-	-	-4.72	1.71	-3.01	-1.00	2.01
6475	-8.00	-7.96	-	-	-4.97	1.71	-3.25	-1.00	2.25
6515	-7.74	-7.72	-	-	-4.72	1.71	-3.00	-1.00	2.00

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.85	-8.34	-	-	-5.08	1.71	-3.36	-1.00	2.36
6475	-8.06	-8.48	-	-	-5.26	1.71	-3.54	-1.00	2.54
6515	-8.00	-7.98	-	-	-4.98	1.71	-3.27	-1.00	2.27

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.25	-7.89	-	-	-4.55	1.71	-2.83	-1.00	1.83
6475	-7.98	-8.19	-	-	-5.07	1.71	-3.36	-1.00	2.36
6515	-7.85	-7.60	-	-	-4.71	1.71	-3.00	-1.00	2.00

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-8.38	-7.44	-	-	-4.88	1.71	-3.16	-1.00	2.16
6485	-8.45	-7.55	-	-	-4.96	1.71	-3.25	-1.00	2.25
6525	-7.85	-7.33	-	-	-4.57	1.71	-2.86	-1.00	1.86

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-7.97	-7.36	-	-	-4.64	1.71	-2.93	-1.00	1.93

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-7.16	-7.42	-	-	-4.28	1.71	-2.56	-1.00	1.56

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-7.91	-6.96	-	-	-4.40	1.71	-2.68	-1.00	1.68

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-6.77	-6.64	-	-	-3.69	1.71	-1.98	-1.00	0.98

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-7.25	-6.99	-	-	-4.11	1.71	-2.39	-1.00	1.39

Maximum EIRP SD (U-NII-6) / LPI (continued)**Results: LPI / TxBF**

Antenna Configuration:	TxBF	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-11.94	-10.88	-	-	-8.37	4.67	-3.70	-1.00	2.70
6475	-12.09	-10.76	-	-	-8.36	4.67	-3.70	-1.00	2.70
6515	-12.08	-10.79	-	-	-8.37	4.67	-3.71	-1.00	2.71

Antenna Configuration:	TxBF	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-11.26	-10.22	-	-	-7.70	4.67	-3.03	-1.00	2.03
6485	-11.45	-10.61	-	-	-8.00	4.67	-3.33	-1.00	2.33
6525	-10.78	-10.31	-	-	-7.53	4.67	-2.86	-1.00	1.86

Antenna Configuration:	TxBF	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-10.98	-10.29	-	-	-7.61	4.67	-2.94	-1.00	1.94

Antenna Configuration:	TxBF	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-10.24	-9.92	-	-	-7.07	4.67	-2.40	-1.00	1.40

Maximum EIRP SD (U-NII-6) / SP (continued)**Results: ISED / SP / SISO / Core 0**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	7.74	-	-	-	-	0.60	8.34	17.00	8.66
6475	7.91	-	-	-	-	0.60	8.51	17.00	8.49
6515	8.03	-	-	-	-	0.60	8.63	17.00	8.37

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	4.91	-	-	-	-	0.60	5.51	17.00	11.49
6485	4.94	-	-	-	-	0.60	5.54	17.00	11.46
6525	4.92	-	-	-	-	0.60	5.52	17.00	11.48

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	2.53	-	-	-	-	0.60	3.13	17.00	13.87

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-0.16	-	-	-	-	0.60	0.44	17.00	16.56

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	7.60	-	-	-	-	0.60	8.20	17.00	8.80
6475	7.18	-	-	-	-	0.60	7.78	17.00	9.22
6515	7.54	-	-	-	-	0.60	8.14	17.00	8.86

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	8.58	-	-	-	-	0.60	9.18	17.00	7.82
6475	7.95	-	-	-	-	0.60	8.55	17.00	8.45
6515	8.77	-	-	-	-	0.60	9.37	17.00	7.63

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	9.21	-	-	-	-	0.60	9.81	17.00	7.19
6475	9.24	-	-	-	-	0.60	9.84	17.00	7.16
6515	9.44	-	-	-	-	0.60	10.04	17.00	6.96

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	9.45	-	-	-	-	0.60	10.05	17.00	6.95
6475	9.19	-	-	-	-	0.60	9.79	17.00	7.21
6515	9.57	-	-	-	-	0.60	10.17	17.00	6.83

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	8.67	-	-	-	-	0.60	9.27	17.00	7.73
6475	8.71	-	-	-	-	0.60	9.31	17.00	7.69
6515	8.93	-	-	-	-	0.60	9.53	17.00	7.47

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	8.76	-	-	-	-	0.60	9.36	17.00	7.64
6475	8.77	-	-	-	-	0.60	9.37	17.00	7.63
6515	8.75	-	-	-	-	0.60	9.35	17.00	7.65

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	4.48	-	-	-	-	0.60	5.08	17.00	11.92
6485	4.29	-	-	-	-	0.60	4.89	17.00	12.11
6525	4.24	-	-	-	-	0.60	4.84	17.00	12.16

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	1.36	-	-	-	-	0.60	1.96	17.00	15.04

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	3.18	-	-	-	-	0.60	3.78	17.00	13.22

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-0.57	-	-	-	-	0.60	0.03	17.00	16.97

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	0.72	-	-	-	-	0.60	1.32	17.00	15.68

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	0.04	-	-	-	-	0.60	0.64	17.00	16.36

Maximum EIRP SD (U-NII-6) / SP (continued)**Results: ISED / SP / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	7.54	-	-	-	2.60	10.14	17.00	6.86
6475	-	7.68	-	-	-	2.60	10.28	17.00	6.72
6515	-	7.74	-	-	-	2.60	10.34	17.00	6.66

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-	4.68	-	-	-	2.60	7.28	17.00	9.72
6485	-	5.00	-	-	-	2.60	7.60	17.00	9.40
6525	-	4.96	-	-	-	2.60	7.56	17.00	9.44

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	2.30	-	-	-	2.60	4.90	17.00	12.10

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-0.29	-	-	-	2.60	2.31	17.00	14.69

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	7.02	-	-	-	2.60	9.62	17.00	7.38
6475	-	7.24	-	-	-	2.60	9.84	17.00	7.16
6515	-	7.44	-	-	-	2.60	10.04	17.00	6.96

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	8.90	-	-	-	2.60	11.50	17.00	5.50
6475	-	7.83	-	-	-	2.60	10.43	17.00	6.57
6515	-	8.87	-	-	-	2.60	11.47	17.00	5.53

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	8.77	-	-	-	2.60	11.37	17.00	5.63
6475	-	9.01	-	-	-	2.60	11.61	17.00	5.39
6515	-	9.38	-	-	-	2.60	11.98	17.00	5.02

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	8.70	-	-	-	2.60	11.30	17.00	5.70
6475	-	9.07	-	-	-	2.60	11.67	17.00	5.33
6515	-	9.06	-	-	-	2.60	11.66	17.00	5.34

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	8.78	-	-	-	2.60	11.38	17.00	5.62
6475	-	8.62	-	-	-	2.60	11.22	17.00	5.78
6515	-	8.60	-	-	-	2.60	11.20	17.00	5.80

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	8.57	-	-	-	2.60	11.17	17.00	5.83
6475	-	8.66	-	-	-	2.60	11.26	17.00	5.74
6515	-	8.86	-	-	-	2.60	11.46	17.00	5.54

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-	4.26	-	-	-	2.60	6.86	17.00	10.14
6485	-	4.31	-	-	-	2.60	6.91	17.00	10.09
6525	-	4.41	-	-	-	2.60	7.01	17.00	9.99

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	1.44	-	-	-	2.60	4.04	17.00	12.96

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	2.97	-	-	-	2.60	5.57	17.00	11.43

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-0.20	-	-	-	2.60	2.40	17.00	14.60

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	0.99	-	-	-	2.60	3.59	17.00	13.41

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	0.19	-	-	-	2.60	2.79	17.00	14.21

Maximum EIRP SD (U-NII-6) / SP (continued)**Results: ISED / SP / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	7.38	7.79	-	-	10.60	4.67	15.27	17.00	1.73
6475	7.55	7.57	-	-	10.57	4.67	15.24	17.00	1.76
6515	7.95	7.50	-	-	10.74	4.67	15.41	17.00	1.59

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	4.79	5.37	-	-	8.10	4.67	12.77	17.00	4.23
6485	4.58	5.23	-	-	7.92	4.67	12.59	17.00	4.41
6525	4.63	4.81	-	-	7.73	4.67	12.40	17.00	4.60

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	2.21	2.43	-	-	5.34	4.67	10.00	17.00	7.00

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-0.47	-0.33	-	-	2.61	4.67	7.28	17.00	9.72

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	6.28	7.37	-	-	9.87	4.67	14.54	17.00	2.46
6475	6.32	7.33	-	-	9.86	4.67	14.53	17.00	2.47
6515	6.77	7.10	-	-	9.95	4.67	14.62	17.00	2.38

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	7.05	7.34	-	-	10.21	4.67	14.88	17.00	2.12
6475	5.97	5.84	-	-	8.92	4.67	13.59	17.00	3.41
6515	7.01	7.23	-	-	10.13	4.67	14.80	17.00	2.20

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	6.72	6.99	-	-	9.87	4.67	14.54	17.00	2.46
6475	6.86	7.09	-	-	9.99	4.67	14.66	17.00	2.34
6515	6.86	7.02	-	-	9.95	4.67	14.62	17.00	2.38

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	6.88	7.40	-	-	10.16	4.67	14.82	17.00	2.18
6475	7.21	7.80	-	-	10.53	4.67	15.19	17.00	1.81
6515	7.29	7.44	-	-	10.38	4.67	15.04	17.00	1.96

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	6.74	7.17	-	-	9.97	4.67	14.64	17.00	2.36
6475	7.05	7.19	-	-	10.13	4.67	14.80	17.00	2.20
6515	7.34	7.29	-	-	10.32	4.67	14.99	17.00	2.01

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	7.01	7.42	-	-	10.23	4.67	14.90	17.00	2.10
6475	7.11	7.36	-	-	10.25	4.67	14.91	17.00	2.09
6515	7.28	7.68	-	-	10.49	4.67	15.16	17.00	1.84

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	3.83	4.75	-	-	7.33	4.67	11.99	17.00	5.01
6485	3.75	4.56	-	-	7.19	4.67	11.85	17.00	5.15
6525	3.90	4.64	-	-	7.29	4.67	11.96	17.00	5.04

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	1.02	1.83	-	-	4.46	4.67	9.12	17.00	7.88

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	2.89	2.89	-	-	5.90	4.67	10.57	17.00	6.43

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-0.90	-0.34	-	-	2.40	4.67	7.07	17.00	9.93

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	0.87	0.77	-	-	3.83	4.67	8.50	17.00	8.50

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	0.24	0.18	-	-	3.22	4.67	7.89	17.00	9.11

Maximum EIRP SD (U-NII-6) / SP (continued)**Results: ISED / SP / MIMO SDM**

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	6.41	7.50	-	-	10.00	1.71	11.72	17.00	5.28
6475	6.38	7.29	-	-	9.87	1.71	11.58	17.00	5.42
6515	6.73	7.15	-	-	9.96	1.71	11.67	17.00	5.33

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	8.67	8.61	-	-	11.65	1.71	13.37	17.00	3.63
6475	7.73	7.72	-	-	10.74	1.71	12.45	17.00	4.55
6515	8.63	8.95	-	-	11.80	1.71	13.52	17.00	3.48

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	8.86	9.20	-	-	12.05	1.71	13.76	17.00	3.24
6475	8.79	9.02	-	-	11.91	1.71	13.63	17.00	3.37
6515	9.00	9.45	-	-	12.24	1.71	13.95	17.00	3.05

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	9.22	9.02	-	-	12.13	1.71	13.84	17.00	3.16
6475	8.84	9.42	-	-	12.15	1.71	13.86	17.00	3.14
6515	8.92	8.99	-	-	11.97	1.71	13.68	17.00	3.32

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	8.32	8.71	-	-	11.53	1.71	13.24	17.00	3.76
6475	8.83	8.68	-	-	11.77	1.71	13.48	17.00	3.52
6515	8.57	8.83	-	-	11.71	1.71	13.43	17.00	3.57

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	8.23	8.59	-	-	11.42	1.71	13.14	17.00	3.86
6475	8.22	8.47	-	-	11.36	1.71	13.07	17.00	3.93
6515	8.69	8.42	-	-	11.57	1.71	13.28	17.00	3.72

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	3.76	4.58	-	-	7.20	1.71	8.91	17.00	8.09
6485	3.97	4.33	-	-	7.16	1.71	8.88	17.00	8.12
6525	3.91	4.30	-	-	7.12	1.71	8.83	17.00	8.17

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	1.24	1.80	-	-	4.54	1.71	6.26	17.00	10.74

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	2.82	2.83	-	-	5.84	1.71	7.55	17.00	9.45

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-0.75	-0.36	-	-	2.46	1.71	4.18	17.00	12.82

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	0.52	0.74	-	-	3.64	1.71	5.36	17.00	11.64

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	0.07	0.26	-	-	3.17	1.71	4.89	17.00	12.11

Maximum EIRP SD (U-NII-6) / SP (continued)**Results: ISED / SP / TxBF**

Antenna Configuration:	TxBF	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	6.52	7.56	-	-	10.08	4.67	14.75	17.00	2.25
6475	6.77	7.39	-	-	10.10	4.67	14.77	17.00	2.23
6515	6.89	7.31	-	-	10.12	4.67	14.79	17.00	2.21

Antenna Configuration:	TxBF	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	3.81	4.47	-	-	7.16	4.67	11.83	17.00	5.17
6485	3.96	4.38	-	-	7.19	4.67	11.86	17.00	5.14
6525	3.97	4.51	-	-	7.26	4.67	11.93	17.00	5.07

Antenna Configuration:	TxBF	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	0.78	1.54	-	-	4.19	4.67	8.86	17.00	8.14

Antenna Configuration:	TxBF	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-0.98	-0.21	-	-	2.43	4.67	7.10	17.00	9.90

Maximum EIRP SD (U-NII-6) / VLP (continued)**Results: VLP / SISO / Core 0**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.29	-	-	-	-	0.60	-6.69	-5.00	1.69
6475	-7.00	-	-	-	-	0.60	-6.40	-5.00	1.40
6515	-6.78	-	-	-	-	0.60	-6.18	-5.00	1.18

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-6.67	-	-	-	-	0.60	-6.07	-5.00	1.07
6485	-6.85	-	-	-	-	0.60	-6.25	-5.00	1.25
6525	-6.68	-	-	-	-	0.60	-6.08	-5.00	1.08

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-6.43	-	-	-	-	0.60	-5.83	-5.00	0.83

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-7.91	-	-	-	-	0.60	-7.31	-5.00	2.31

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.53	-	-	-	-	0.60	-6.93	-5.00	1.93
6475	-7.41	-	-	-	-	0.60	-6.81	-5.00	1.81
6515	-7.23	-	-	-	-	0.60	-6.63	-5.00	1.63

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.83	-	-	-	-	0.60	-7.23	-5.00	2.23
6475	-8.59	-	-	-	-	0.60	-7.99	-5.00	2.99
6515	-7.28	-	-	-	-	0.60	-6.68	-5.00	1.68

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.42	-	-	-	-	0.60	-6.82	-5.00	1.82
6475	-7.30	-	-	-	-	0.60	-6.70	-5.00	1.70
6515	-7.05	-	-	-	-	0.60	-6.45	-5.00	1.45

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.11	-	-	-	-	0.60	-6.51	-5.00	1.51
6475	-7.22	-	-	-	-	0.60	-6.62	-5.00	1.62
6515	-6.58	-	-	-	-	0.60	-5.98	-5.00	0.98

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.88	-	-	-	-	0.60	-7.28	-5.00	2.28
6475	-7.36	-	-	-	-	0.60	-6.76	-5.00	1.76
6515	-6.85	-	-	-	-	0.60	-6.25	-5.00	1.25

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.13	-	-	-	-	0.60	-6.53	-5.00	1.53
6475	-6.91	-	-	-	-	0.60	-6.31	-5.00	1.31
6515	-6.67	-	-	-	-	0.60	-6.07	-5.00	1.07

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-7.41	-	-	-	-	0.60	-6.81	-5.00	1.81
6485	-7.28	-	-	-	-	0.60	-6.68	-5.00	1.68
6525	-7.44	-	-	-	-	0.60	-6.84	-5.00	1.84

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-6.94	-	-	-	-	0.60	-6.34	-5.00	1.34

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-6.84	-	-	-	-	0.60	-6.24	-5.00	1.24

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-8.16	-	-	-	-	0.60	-7.56	-5.00	2.56

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-6.66	-	-	-	-	0.60	-6.06	-5.00	1.06

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-7.11	-	-	-	-	0.60	-6.51	-5.00	1.51

Maximum EIRP SD (U-NII-6) / VLP (continued)**Results: VLP / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-9.54	-	-	-	2.60	-6.94	-5.00	1.94
6475	-	-9.50	-	-	-	2.60	-6.90	-5.00	1.90
6515	-	-9.19	-	-	-	2.60	-6.59	-5.00	1.59

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-	-8.58	-	-	-	2.60	-5.98	-5.00	0.98
6485	-	-8.61	-	-	-	2.60	-6.01	-5.00	1.01
6525	-	-7.98	-	-	-	2.60	-5.38	-5.00	0.38

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	-8.60	-	-	-	2.60	-6.00	-5.00	1.00

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-9.76	-	-	-	2.60	-7.16	-5.00	2.16

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-9.76	-	-	-	2.60	-7.16	-5.00	2.16
6475	-	-9.35	-	-	-	2.60	-6.75	-5.00	1.75
6515	-	-9.15	-	-	-	2.60	-6.55	-5.00	1.55

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-10.18	-	-	-	2.60	-7.58	-5.00	2.58
6475	-	-11.39	-	-	-	2.60	-8.79	-5.00	3.79
6515	-	-9.87	-	-	-	2.60	-7.27	-5.00	2.27

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-9.76	-	-	-	2.60	-7.16	-5.00	2.16
6475	-	-9.67	-	-	-	2.60	-7.07	-5.00	2.07
6515	-	-9.51	-	-	-	2.60	-6.91	-5.00	1.91

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-9.55	-	-	-	2.60	-6.95	-5.00	1.95
6475	-	-9.84	-	-	-	2.60	-7.24	-5.00	2.24
6515	-	-9.27	-	-	-	2.60	-6.67	-5.00	1.67

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-9.87	-	-	-	2.60	-7.27	-5.00	2.27
6475	-	-9.74	-	-	-	2.60	-7.14	-5.00	2.14
6515	-	-9.73	-	-	-	2.60	-7.13	-5.00	2.13

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-9.79	-	-	-	2.60	-7.19	-5.00	2.19
6475	-	-9.85	-	-	-	2.60	-7.25	-5.00	2.25
6515	-	-9.18	-	-	-	2.60	-6.58	-5.00	1.58

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-	-9.32	-	-	-	2.60	-6.72	-5.00	1.72
6485	-	-9.69	-	-	-	2.60	-7.09	-5.00	2.09
6525	-	-9.10	-	-	-	2.60	-6.50	-5.00	1.50

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	-8.98	-	-	-	2.60	-6.38	-5.00	1.38

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	-9.48	-	-	-	2.60	-6.88	-5.00	1.88

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-9.71	-	-	-	2.60	-7.11	-5.00	2.11

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-8.65	-	-	-	2.60	-6.05	-5.00	1.05

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-9.37	-	-	-	2.60	-6.77	-5.00	1.77

Maximum EIRP SD (U-NII-6) / VLP (continued)**Results: VLP / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-15.19	-14.50	-	-	-11.82	4.67	-7.15	-5.00	2.15
6475	-15.22	-14.55	-	-	-11.86	4.67	-7.19	-5.00	2.19
6515	-15.01	-14.45	-	-	-11.71	4.67	-7.04	-5.00	2.04

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-13.48	-14.11	-	-	-10.77	4.67	-6.10	-5.00	1.10
6485	-14.04	-14.07	-	-	-11.05	4.67	-6.38	-5.00	1.38
6525	-13.49	-13.60	-	-	-10.53	4.67	-5.87	-5.00	0.87

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-14.42	-14.08	-	-	-11.24	4.67	-6.57	-5.00	1.57

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-13.92	-13.85	-	-	-10.87	4.67	-6.21	-5.00	1.21

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-15.44	-14.71	-	-	-12.05	4.67	-7.38	-5.00	2.38
6475	-15.86	-14.92	-	-	-12.35	4.67	-7.68	-5.00	2.68
6515	-15.82	-14.96	-	-	-12.36	4.67	-7.69	-5.00	2.69

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-14.81	-15.44	-	-	-12.10	4.67	-7.43	-5.00	2.43
6475	-14.87	-15.08	-	-	-11.97	4.67	-7.30	-5.00	2.30
6515	-14.45	-14.44	-	-	-11.43	4.67	-6.77	-5.00	1.77

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-14.22	-15.08	-	-	-11.62	4.67	-6.95	-5.00	1.95
6475	-15.04	-14.95	-	-	-11.98	4.67	-7.32	-5.00	2.32
6515	-14.29	-14.69	-	-	-11.48	4.67	-6.81	-5.00	1.81

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-14.74	-15.41	-	-	-12.05	4.67	-7.38	-5.00	2.38
6475	-15.02	-15.44	-	-	-12.22	4.67	-7.55	-5.00	2.55
6515	-14.99	-15.16	-	-	-12.06	4.67	-7.40	-5.00	2.40

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-14.56	-15.02	-	-	-11.77	4.67	-7.11	-5.00	2.11
6475	-15.03	-14.97	-	-	-11.99	4.67	-7.32	-5.00	2.32
6515	-14.67	-14.39	-	-	-11.52	4.67	-6.85	-5.00	1.85

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-15.92	-14.82	-	-	-12.33	4.67	-7.66	-5.00	2.66
6485	-15.69	-15.16	-	-	-12.41	4.67	-7.74	-5.00	2.74
6525	-15.69	-14.51	-	-	-12.05	4.67	-7.38	-5.00	2.38

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-15.10	-13.95	-	-	-11.48	4.67	-6.81	-5.00	1.81

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-14.86	-14.64	-	-	-11.74	4.67	-7.07	-5.00	2.07

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-14.58	-13.83	-	-	-11.18	4.67	-6.51	-5.00	1.51

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-13.82	-13.58	-	-	-10.69	4.67	-6.02	-5.00	1.02

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-13.90	-13.82	-	-	-10.85	4.67	-6.18	-5.00	1.18

Maximum EIRP SD (U-NII-6) / VLP (continued)**Results: VLP / MIMO SDM**

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-12.68	-11.77	-	-	-9.19	1.71	-7.48	-5.00	2.48
6475	-13.00	-11.76	-	-	-9.33	1.71	-7.61	-5.00	2.61
6515	-12.99	-11.97	-	-	-9.44	1.71	-7.72	-5.00	2.72

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-11.68	-12.81	-	-	-9.20	1.71	-7.49	-5.00	2.49
6475	-13.01	-13.46	-	-	-10.22	1.71	-8.51	-5.00	3.51
6515	-11.49	-11.60	-	-	-8.53	1.71	-6.82	-5.00	1.82

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-11.48	-12.37	-	-	-8.89	1.71	-7.18	-5.00	2.18
6475	-11.93	-12.12	-	-	-9.01	1.71	-7.30	-5.00	2.30
6515	-11.86	-11.65	-	-	-8.74	1.71	-7.03	-5.00	2.03

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-11.44	-11.91	-	-	-8.66	1.71	-6.95	-5.00	1.95
6475	-11.63	-12.06	-	-	-8.83	1.71	-7.12	-5.00	2.12
6515	-11.56	-11.73	-	-	-8.63	1.71	-6.92	-5.00	1.92

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-11.71	-12.04	-	-	-8.86	1.71	-7.15	-5.00	2.15
6475	-12.34	-12.74	-	-	-9.53	1.71	-7.81	-5.00	2.81
6515	-11.71	-11.93	-	-	-8.81	1.71	-7.10	-5.00	2.10

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-11.62	-12.28	-	-	-8.93	1.71	-7.21	-5.00	2.21
6475	-11.84	-11.84	-	-	-8.83	1.71	-7.12	-5.00	2.12
6515	-11.47	-11.70	-	-	-8.57	1.71	-6.86	-5.00	1.86

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-12.47	-11.78	-	-	-9.10	1.71	-7.39	-5.00	2.39
6485	-12.27	-11.53	-	-	-8.87	1.71	-7.16	-5.00	2.16
6525	-12.26	-11.15	-	-	-8.66	1.71	-6.94	-5.00	1.94

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-11.90	-11.12	-	-	-8.48	1.71	-6.77	-5.00	1.77

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-11.51	-11.33	-	-	-8.41	1.71	-6.70	-5.00	1.70

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-12.69	-11.92	-	-	-9.28	1.71	-7.57	-5.00	2.57

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-10.80	-10.61	-	-	-7.69	1.71	-5.98	-5.00	0.98

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-11.43	-11.05	-	-	-8.23	1.71	-6.52	-5.00	1.52