



TEST REPORT

Test Report No. : UL-RPT-RP16107649JD02G

Applicant* : Apple Inc.

Model No. / HVIN* : A3535

FCC ID* : BCGA3535 **IC*** : 579C-A3535

Technology : *Bluetooth* – non-FHSS

Test Standard(s) : FCC Parts 15.35(c), 15.209(a) & 15.247
Innovation, Science and Economic Development Canada
RSS-247 Issue 4 July 2025,
RSS-Gen Issue 5 February 2021

Test Laboratory : UL International (UK) Ltd, Basingstoke, Hampshire, RG24 8AH,
United Kingdom

1. This test report shall not be reproduced except in full, without the written approval of UL International (UK) Ltd.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. All information marked with (*) was provided by the Customer, Applicant or Authorised representative
6. Version 2.0 supersedes all previous versions.

Date of Issue: 18 August 2026

Checked by:

Sarah Williams
Staff Engineer, Radio Laboratory

Sarah Williams
Digitally signed by Sarah Williams
Date: 2026.08.18 08:36:20 +01'00'

Company Signatory:

Ben Mercer
Lead Test Engineer, Radio Laboratory

Ben Mercer
Digitally signed by Ben Mercer
Date: 2026.08.18 08:36:43 +01'00'



5772

The *Bluetooth*® word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by UL International (UK) Ltd is under licence. Other trademarks and trade names are those of their respective owners.

UL International (UK) LTD

Unit 1-4 Horizon, Kingsland Business Park, Wade Road, Basingstoke, Hampshire, RG24 8AH, UK
Telephone: +44 (0)1256 312000

Applicant Information

Company Name*:	Apple Inc.
Address*:	One Apple Park Way Cupertino, California 95014 U.S.A.
Contact Name*:	Stuart Thomas

Report Revision History

Version Number	Issue Date	Revision Details	Revised By
1.0	09/07/2026	Initial Version	Sarah Williams
2.0	18/08/2026	Address TCB feedback	Sarah Williams

Table of Contents

Applicant Information	2
Report Revision History	2
Table of Contents.....	3
1 Attestation of Test Results.....	4
1.1 Description of EUT	4
1.2 General Information	4
1.3 Summary of Test Results	5
1.4 Deviations from the Test Specification	5
2 Summary of Testing.....	6
2.1 Facilities and Accreditation	6
2.2 Methods and Procedures	6
2.3 Calibration and Uncertainty	7
2.4 Sample Calculation	8
2.5 Test and Measurement Equipment	9
3 Equipment Under Test (EUT)	12
3.1 Identification of Equipment Under Test (EUT)	12
3.2 Modifications Incorporated in the EUT	12
3.3 Additional Information Related to Testing	13
3.4 Description of Available Antennas	14
3.5 Description of Test Setup	14
4 Antenna Port Test Results	19
4.1 Minimum 6 dB & 99% Bandwidth	19
4.2 Maximum Peak Output Power	35
4.3 Power Spectral Density	50
5 Radiated Test Results.....	67
5.1 Duty Cycle	67
5.2 Radiated Emissions <1 GHz	69
5.3 Radiated Emissions >1 GHz	71
5.4 Band Edge Radiated Emissions	73

1 Attestation of Test Results

1.1 Description of EUT

The equipment under test (EUT) was a desktop computer.*

1.2 General Information

Specification Reference:	47CFR15.247
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) – Section 15.247
Specification Reference:	47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) – Section 15.209
Specification Reference:	RSS-247 Issue 4 July 2025
Specification Title:	Digital Transmission Systems, Frequency Hopping Systems and Licence- Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands
Specification Reference:	RSS-Gen Issue 5 February 2021
Specification Title:	General Requirements for Compliance of Radio Apparatus
Site Registration:	FCC: 685609, ISEDC: 20903
FCC Lab. Designation No.:	UK2011
ISEDC CABID:	UK0001
Location of Testing:	Units 3 & 4 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	10 February 2026 to 27 May 2026

1.3 Summary of Test Results

FCC Clause (47CFR)	ISED Clause	Transmitter Measurement	Result
Part 15.35(c)	RSS-Gen 8.2	Duty Cycle	Note 1
N/A	RSS-Gen 6.7	99% Occupied Bandwidth	Note 1
Part 15.247(a)(2)	RSS-247 6.3.1(a) / RSS-Gen 6.7	Minimum 6 dB Bandwidth	Complied
Part 15.247(b)(3)	RSS-247 6.3.2 / RSS-Gen 6.12	Maximum Peak Output Power	Complied
Part 15.247(e)	RSS-247 6.3.1(b)	Power Spectral Density	Complied
Part 15.247(d) & 15.209(a)	RSS-247 6.6 / RSS-Gen 6.13 & 8.9	Radiated Emissions	Complied
Part 15.247(d) & 15.209(a)	RSS-247 6.6 / RSS-Gen 6.13 & 8.10	Band Edge Radiated Emissions	Complied

Note(s):

1. Reporting purposes only.

1.4 Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

2 Summary of Testing

2.1 Facilities and Accreditation

The test site and measurement facilities used to collect data are located at Units 3 & 4 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom. The following table identifies which facilities were utilised for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

Site 1	-
Site 17	-
Site 32	X
Site 33	-

UL International (UK) Ltd is accredited by the United Kingdom Accreditation Service (UKAS). UKAS is one of the signatories to the International Laboratory Accreditation Co-operation (ILAC) Arrangement for the mutual recognition of test reports. The tests reported herein have been performed in accordance with its terms of accreditation.

2.2 Methods and Procedures

Reference:	ANSI C63.10-2020
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	#ANSI C63.10-2020/Cor1-2023
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices – Corrigendum 1
Reference:	#ANSI C63.10-2020+C63.10a-2024
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices – Amendment 1
Reference:	#ANSI C63.10-2020+Errata to C63.10a-2024
Title:	Errata to American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices – Amendment 1

#The use of ANSI C63.10-2020/Cor1-2023 and C63.10a-2024 does not deviate from the testing procedures of ANSI C63.10-2020

2.3 Calibration and Uncertainty

Measuring Instrument Calibration

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

Measurement Uncertainty & Decision Rule

Overview

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

Decision Rule

Measurement system instrumentation shall be used with an accuracy specification meeting the accuracy specification limits according to IEC/IECEE OD-5014.

As applicable, unless specified otherwise in this quotation, the compliance "Decision Rule" is based on Simple Acceptance. If the measured value is on the limit, the result is defined as a pass. For further information regarding risk assessment refer to ILAC G8:09/2019.

Measurement Uncertainty

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Duty Cycle	2.4 GHz to 2.4835 GHz	95%	±1.14 %
99% Occupied Bandwidth	2.4 GHz to 2.4835 GHz	95%	±2.41 %
Minimum 6 dB Bandwidth	2.4 GHz to 2.4835 GHz	95%	±3.27 %
Spectral Power Density	2.4 GHz to 2.4835 GHz	95%	±1.25 dB
Conducted Maximum Peak Output Power	2.4 GHz to 2.4835 GHz	95%	±0.61 dB
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±4.66 dB
Radiated Spurious Emissions	1 GHz to 26 GHz	95%	±5.06 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

2.4 Sample Calculation

Where relevant, the following calculations were used:

Radiated Emissions

- The recorded emission level was calculated from the level indicated by the measuring receiver, adjusted by a transducer factor (TDF in dB), using the formula:

$$\text{TDF (dB)} = C_{\text{Att}} (\text{dB}) + \text{AF (dB/m)} - P_{\text{Gain}} (\text{dB}) + D_{\text{Cor}} (\text{dB})$$

Where:

C_{Att} : conducted path attenuation (cables + attenuators)

AF: antenna factor

P_{Gain} : external preamplifier gain

D_{Cor} : distance correction factor (where applicable)

- The following equation can be used to calculate the duty cycle correction factor in the time domain:

$$10 \log (1 / (\text{On Time} / [\text{Period or } 100 \text{ ms whichever is the lesser}]))$$

Directional Antenna Gain Calculations for Beamforming

For 2Tx Beamforming modes, in accordance with ANSI C63.10 Section 14.6.3.2.4a), directional gain was calculated as:

$$\text{Directional gain} = 10 \log [(10^{G_{1/20}} + 10^{G_{2/20}} + \dots + 10^{G_{20/20}})^2 / N_{\text{ANT}}] = \text{dBi}$$

2.5 Test and Measurement Equipment

Test Equipment Used for Conducted Tests

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2042	Thermohygrometer	Testo	608-H1	45124926	18 Dec 2026	12
M231905	Signal Analyser	Keysight	N9020B	MY63430222	01 Oct 2026	12
A227121	Attenuator	Pasternack	PE7013-10	#2	Calibrated before use	-
A227122	Attenuator	Pasternack	PE7013-10	#3	Calibrated before use	-
A227123	Attenuator	Pasternack	PE7013-10	#4	Calibrated before use	-
M2020	Power Sensor	Boonton	RTP55006	9970	02 Jun 2026	12
M2021	Power Sensor	Boonton	RTP55006	9967	02 Jun 2026	12
M2026	Power Sensor	Boonton	RTP55006	9911	02 Jun 2026	12
A231995	Switching Unit	Mini-Circuits	ZT-400	12211020020	Calibrated before use	-
M241601	Network Analyser	Keysight	P5007B	MY61100200	02 Oct 2026	12

Test Measurement Software/Firmware Used for Conducted Tests

Name	Version	Release Date
Phoenix Core	5.0.17	27 April 2026

Test and Measurement Equipment (continued)**Test Equipment Used for Radiated Emissions Tests**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M226553	Thermohygrometer	Testo	608-H1	83800731	17 Dec 2026	12
K226202	3m RSE Chamber	Albatross Projects	N/A	N/A	07 Jul 2026	12
M227312	Test Receiver	Rohde & Schwarz	ESW44	103203	10 Dec 2026	12
A231566	Pre-Amplifier	RF-Bay	LNA-1070	1	07 Jul 2026	12
A230567	Pre-Amplifier	Atlantic Microwave	A-HPAKX-380143-K5K5	VJ3601001	07 Jul 2026	12
A255976	Signal Conditioning Unit	Link Microtek	AMUNIT-SCB-UL1	16815	07 Apr 2026	12
A225133	Antenna	Teseq	CBL6111D	63217	13 Mar 2026	12
A231043	Antenna	Schwarzbeck	BBHA 9120 B	00834	07 Jul 2026	12
A231046	Antenna	Schwarzbeck	HWRD 750	00065	07 Jul 2026	12
A231050	Antenna	Schwarzbeck	BBHA 9170	01280	07 Jul 2026	12
A3114	Attenuator	AtlanTecRF	AN18-06	219706#4	13 Mar 2026	12
A227143	Low Pass Filter	Micro-Tronics	LPM21016	002	07 Jul 2026	12
C227000	RF Cable	Huber + Suhner	SF126EA/11N/11 N/6000mm	520904	07 Jul 2026	12
C226917	RF Cable	Huber + Suhner	SF126EA/11N/11 N/4000mm	520385	07 Jul 2026	12
C226954	RF Cable	Huber + Suhner	SF126EA/11N/11 N/2000	520364	07 Jul 2026	12
C226940	RF Cable	Huber + Suhner	SF126EA/11N/11 N/800	520362	07 Jul 2026	12
C267019	RF Cable	Huber + Suhner	SF526EA/11N/11 /N/7000mm	3458770004	07 Jul 2026	12
C226956	RF Cable	Huber + Suhner	SF126EA/11N/11 N/2000	520365	07 Jul 2026	12
C256200	RF Cable	Link Microtek	B10-07-07-0.5M-001	#8	07 Jul 2026	12
C223506	RF Cable	Schwarzbeck	AK 9540-2.0	00035	07 Jul 2026	12
C223502	RF Cable	Schwarzbeck	AK 9540-0.6	00029	07 Jul 2026	12

Test and Measurement Equipment (continued)**Test Equipment Used for Band Edge Radiated Emissions Tests**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M226553	Thermohygrometer	Testo	608-H1	83800731	17 Dec 2026	12
K226202	3m RSE Chamber	Albatross Projects	N/A	N/A	07 Jul 2026	12
M227312	Test Receiver	Rohde & Schwarz	ESW44	103203	10 Dec 2026	12
A255976	Signal Conditioning Unit	Link Microtek	AMUNIT-SCB-UL1	16815	07 Apr 2026	12
A231043	Antenna	Schwarzbeck	BBHA 9120 B	00834	07 Jul 2026	12
C267019	RF Cable	Huber + Suhner	SF526EA/11N/11N/7000mm	3458770004	07 Jul 2026	12
C226956	RF Cable	Huber + Suhner	SF126EA/11N/11N/2000	520365	07 Jul 2026	12
C256200	RF Cable	Link Microtek	B10-07-07-0.5M-001	#8	07 Jul 2026	12

Test Measurement Software/Firmware Used for Radiated Tests

Name	Version	Release Date
Phoenix Core	5.0.3	27 January 2026
Phoenix Radiated	5.0.4	03 February 2026

3 Equipment Under Test (EUT)

3.1 Identification of Equipment Under Test (EUT)

Brand Name*:	Apple
Model Name or Number / HVIN*:	A3535
FCC ID*:	BCGA3535
ISED Canada Certification Number*:	579C-A3535

Test Sample Serial Number*:	Hardware Version*:	Software Version*:	Date of Receipt:
QFJ737LTP7 (<i>Conducted</i>)	REV 1.0	26A259	12 March 2026
GX2W350QP7 (<i>Radiated</i>)	REV 1.0	26A259	10 February 2026

3.2 Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.3 Additional Information Related to Testing

Technology Tested:	Bluetooth Low Energy (Digital Transmission System)
Type of Unit:	Transceiver
Channel Spacing:	1 MHz
Power Supply Requirement(s)*:	12 VDC via 120 VAC 60 Hz AC/DC supply
Maximum Conducted Output Power:	19.95 dBm

Mode*	Modulation*	Packet Type (Maximum Payload)*	Data Rate (Mbps)*
High Data Rate	$\pi/4$ -DQPSK	4DH5	4
High Data Rate	$\pi/4$ -DQPSK	8DH5	8
High Data Rate Plus	OQPSK	HDRPS2	2
High Data Rate Plus	OQPSK	HDRPM4	4
High Data Rate Plus	OQPSK	HDRPM6	6
High Data Rate Plus	OQPSK	HDRPM8	8
High Data Rate Plus	16QAM	HDRPM12	12
High Data Rate Plus	16QAM	HDRPM16	16
Extremely High Data Rate Plus	OQPSK	XHDRPS2	2
Extremely High Data Rate Plus	OQPSK	XHDRPM4	4
Extremely High Data Rate Plus	OQPSK	XHDRPM6	6
Extremely High Data Rate Plus	OQPSK	XHDRPM8	8
Extremely High Data Rate Plus	16QAM	XHDRPM12	12
Extremely High Data Rate Plus	16QAM	XHDRPM16	16

Transmit Frequency Range:	2400 MHz to 2483.5 MHz		
Mode*:	HDR & (X)HDRPS2		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	2	2404
	Middle	38	2440
	Top	74	2476
Mode*:	(X)HDRPM4/6/8 & (X)HDRPM12/16		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	2	2404
	Middle	38	2440
	Top	73	2475

3.4 Description of Available Antennas

The radio utilizes three integrated antennas, with the following maximum gains:

Frequency (MHz)	Antenna Port	Antenna Gain (dBi)*	Directional Antenna Gain (dBi)
2402	Core 0	1.3	4.26
2440	Core 0	0.8	3.91
2480	Core 0	1.4	4.36
2402	Core 1	1.2	4.26
2440	Core 1	1.0	3.91
2480	Core 1	1.3	4.36
2402	Core 2	0.2	-
2440	Core 2	-0.4	
2480	Core 2	0.7	

The EUT complies with FCC Part 15.203 requirements by using permanently attached antennas with no option for external connections.

3.5 Description of Test Setup

Support Equipment

The following support equipment was used to exercise the EUT during testing:

Customer Supplied*:

Description	Brand Name	Model Name or Number	Serial Number
Test Laptop	Apple	MacBook Pro	L20H7Q2K6P
USB Diagnostic Cable	Apple	Chimp	439507
Test Laptop	Apple	MacBook Pro	CFQL62C43K
USB Diagnostic Cable	Apple	Chimp	439E2D

Laboratory Supplied:

Description	Brand Name	Model Name or Number	Serial Number
USB-C Docking Station	Lenovo	LDC-G2	ZKW05W5E
Ethernet Cable. Length 5m.	Not marked or stated	Not marked or stated	Not marked or stated
HDMI Cable. Length 5m.	Not marked or stated	Not marked or stated	Not marked or stated
USB-A Cable. Quantity 4. Length 3m.	Not marked or stated	Not marked or stated	Not marked or stated
USB C-A Adapter. Quantity 4.	Not marked or stated	Not marked or stated	Not marked or stated
Personal Hands Free (PHF)	Not marked or stated	Not marked or stated	Not marked or stated

Operating Modes, Configuration and Peripherals

- Continuously transmitting at maximum output power on the packet types shown in section 3.3.
- Controlled in test mode using a set of commands entered into a terminal application on the test laptop supplied by the customer. The commands were used to enable a continuous transmission and to select the test channels & packet types as required.
- The EUT was powered from an AC to DC Power Supply. The input was connected to a 120 VAC 60 Hz single phase mains supply.
- The customer supplied RF test cable connections to the internal EUT antenna ports in order to perform conducted measurements. The respective path losses were added to the measurements along with the automated test system path losses.
- The EUT has three cores. Core 0 & Core 1 operate in both SISO and Beamforming modes for ePA and iPA paths. Core 2 operates in SISO mode only. The cores have unequal gains and power settings; therefore, the output power and PSD were investigated across all modulation schemes on all cores. The worst-case values for the highest power and PSD readings are shown below table.

Worst-case summary			
Mode	Frequency Range (MHz)	Power	PSD
4DH5	2404 to 2476	X	X
8DH5		X	-
HDRPS2		X	-
XHDRPS2		-	-
HDRPM4	2404 to 2475	-	-
HDRPM6		-	-
HDRPM8		-	X
HDRPM12		-	-
HDRPM16		-	-
XHDRPM4		-	-
XHDRPM6		X	-
XHDRPM8		-	-
XHDRPM12		X	-
XHDRPM16		-	-


- Bandwidth plots have been reported based on the worst-case power and PSD modes identified in the table above. As the channel bandwidth is similar across the (X)HDRP modulation packet types, only worst-case bandwidth plots have been reported for the different modulation types.
- Radiated emissions below 1 GHz and above 18 GHz were performed with the EUT set to transmit at the channel with the highest output power as worst-case scenario. Between 1 GHz and 18 GHz, tests were performed with the EUT set to transmit at the highest power & spectral density on bottom, middle and top channels.


Operating Modes, Configuration and Peripherals (continued)

- Radiated emissions tests were performed with the EUT transmitting in the following modes as they were found to transmit the highest power. The EUT was configured for 2Tx Beamforming mode with the power setting equal or higher than SISO modes as a worst-case scenario
 - 8DH5 / Beamforming / Core 0 + Core 1 / ePA
 - 8DH5 / Beamforming / Core 0 + Core 1 / iPA

Sections 5.2 & 5.3 only have 8DH5 / Beamforming / Core 0 + Core 1 / ePA reported. All the other modes are archived on the UL IT server and available for inspection if required.

- Radiated emissions and band edge tests were performed with the EUT in its worst case orientation with respect to emissions.
- Band Edge measurements were performed on the worst-case data rates declared by the customer.
- All active ports were terminated using the appropriate terminations during radiated emissions testing.

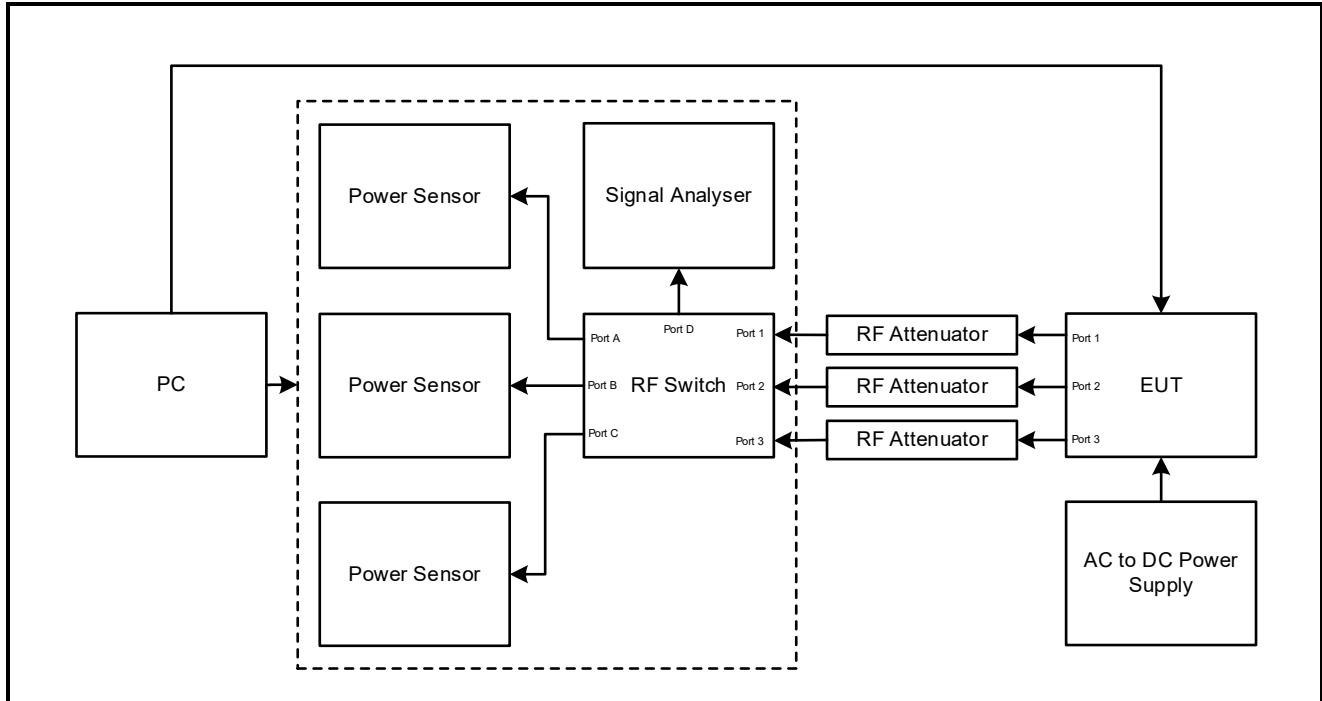Test Setup Diagrams**Conducted Tests:****Test Setup for Conducted Tests**

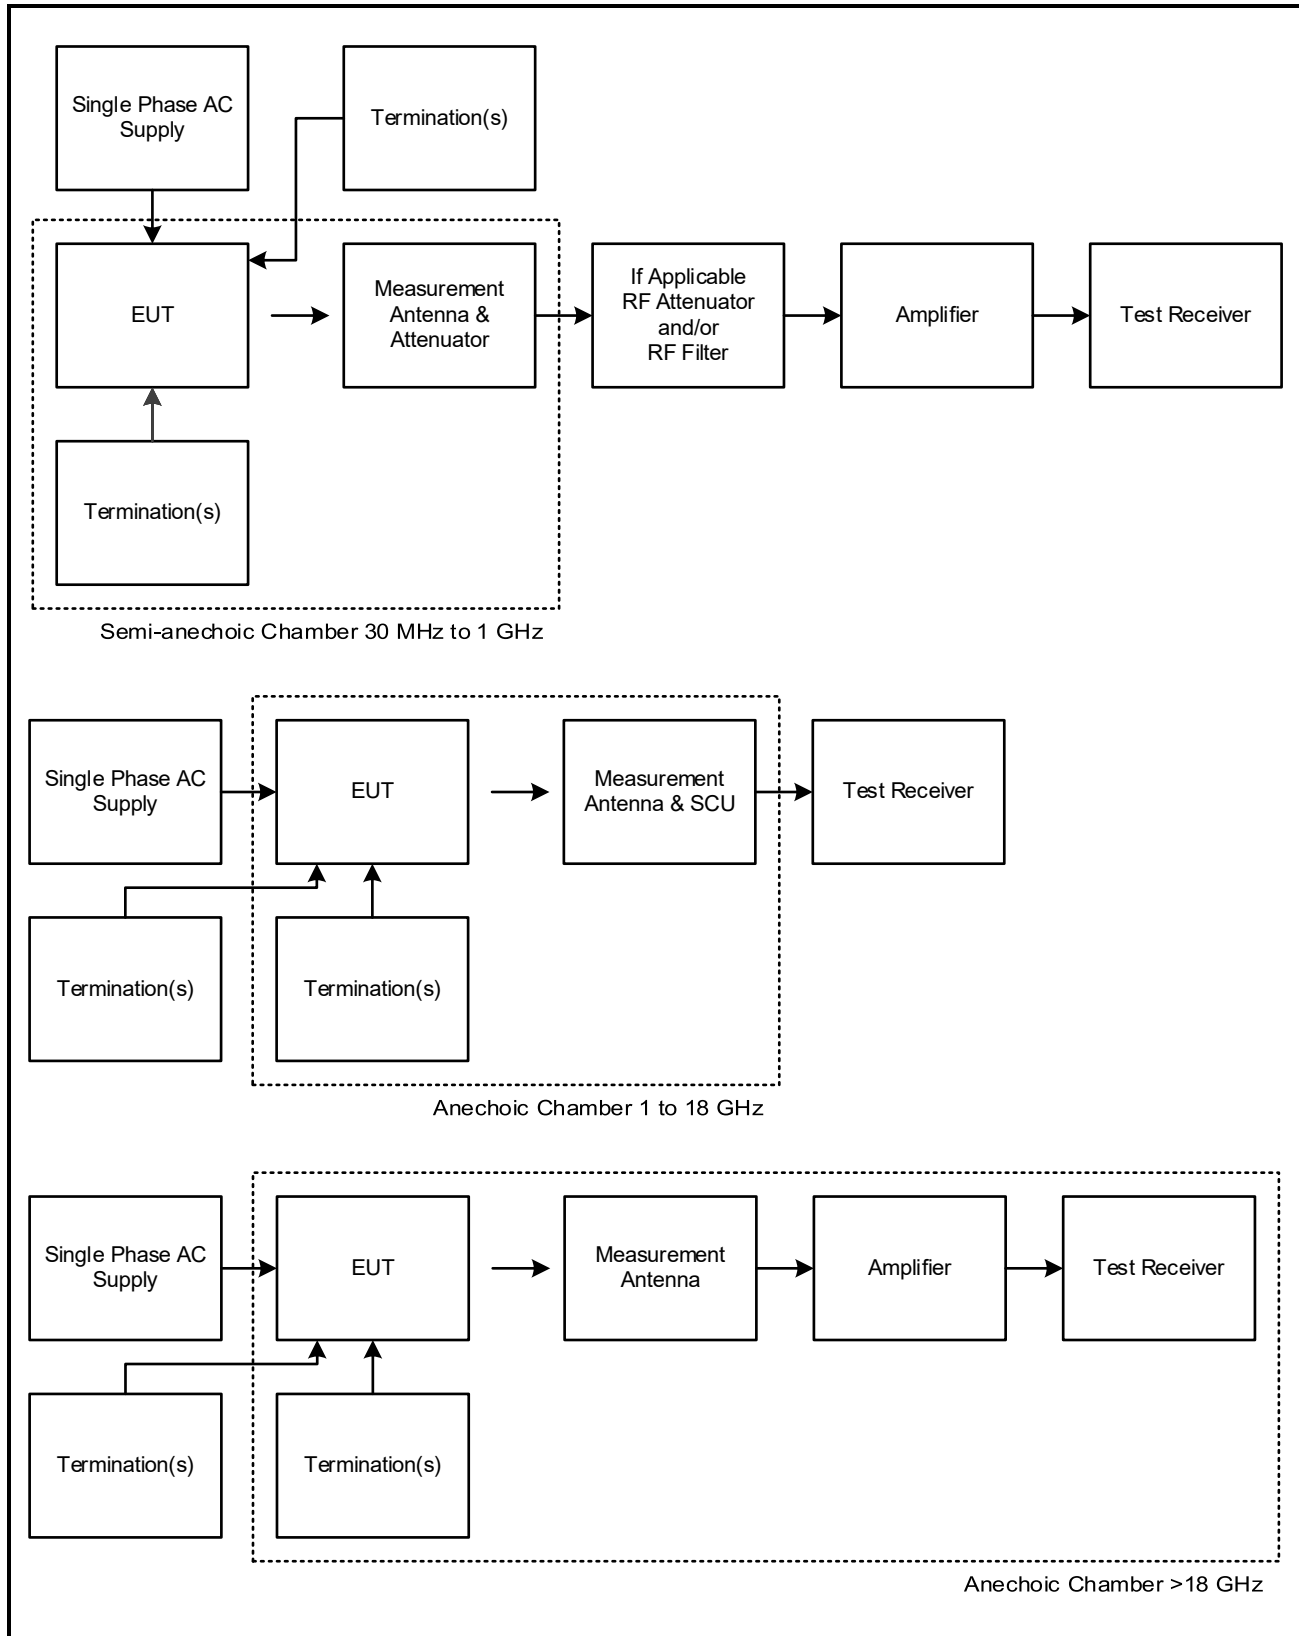Test Setup Diagrams (continued)**Radiated Tests:****Test Setup for Radiated Emissions**

4 Antenna Port Test Results

4.1 Minimum 6 dB & 99% Bandwidth

Test Summary:

Test Engineer:	Jerome Moyo	Test Dates:	29 April 2026 & 27 May 2026
Test Sample Serial Number:	QFJ737LTP7		

99% OBW:

FCC Clause:	N/A
ISED Canada Clause:	RSS-Gen 6.7
Test Method Used:	ANSI C63.10 Section 6.9.3

6 dB BW:

FCC Clause:	15.247 (a)(2)
ISED Canada Clause:	RSS-247 6.3.1(a) / RSS-Gen 6.7
Test Method Used:	ANSI C63.10 Section 11.8.1

Environmental Conditions:

Temperature (°C):	22 to 24
Relative Humidity (%):	31 to 56

Note(s):

1. OBW: The transmitter output is connected to a signal analyser. The RBW is set in the range of 1% to 5% of the 99% OBW. The VBW is set to $\geq 3 \times \text{RBW}$. The sweep time is coupled. The 99% emission bandwidth was calculated by the test system using the raw trace data from the signal analyser.
2. 6 dB BW: The transmitter output is connected to a signal analyser. The RBW was set to 100 kHz and VBW 300 kHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The bandwidth was measured at 6 dB down from the peak of the signal.
3. For modes where there is only 1 plot for both bandwidths, the analyser plot contains both marker sets used for the occupied bandwidth evaluation. Markers 1 & 2 define the 99% Occupied Bandwidth, and markers 3 & 4 define the 6 dB bandwidth. Since the instrument displays only one active marker delta measurement, the value shown on the plot is associated with the 6 dB bandwidth only. The 99% Occupied Bandwidth result is calculated from the raw trace data and subsequently identified between markers 1 & 2 as documented in the test results tables below.
4. Example plots of each modulation on the worst-case channel, for one antenna configuration, can be seen below to show setting parameters comply with testing method/procedure. All other plots are archived on the UL IT server and available for inspection if required.


Minimum 6 dB & 99% Bandwidth (continued)

Results: SISO / ePA


Antenna Configuration:	SISO	Mode:	HDR
Test Port:	2 (Core 0)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	2.328	-	-	-
2440	-	2.328	-	-	-
2476	-	2.328	-	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	1.584	-	-	≥ 500
2440	-	1.584	-	-	≥ 500
2476	-	1.584	-	-	≥ 500

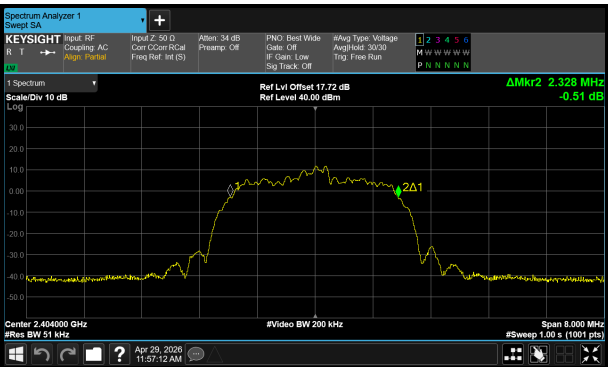

99%

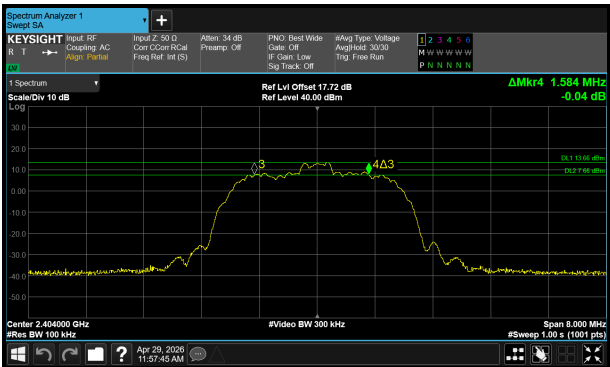


6 dB

Minimum 6 dB & 99% Bandwidth (continued)

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	2 (Core 0)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.665	-	-	-
2440	-	4.650	-	-	-
2476	-	4.650	-	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	0.570	-	-	≥ 500
2440	-	0.555	-	-	≥ 500
2476	-	0.570	-	-	≥ 500

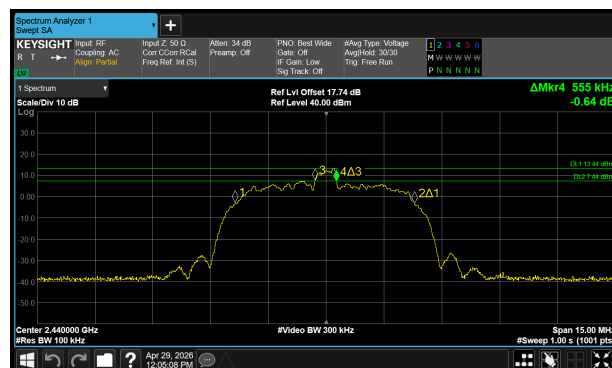


Minimum 6 dB & 99% Bandwidth (continued)


Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	2.376	-	-	-
2440	-	2.376	-	-	-
2476	-	2.376	-	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	2.088	-	-	≥500
2440	-	2.088	-	-	≥500
2476	-	2.104	-	-	≥500

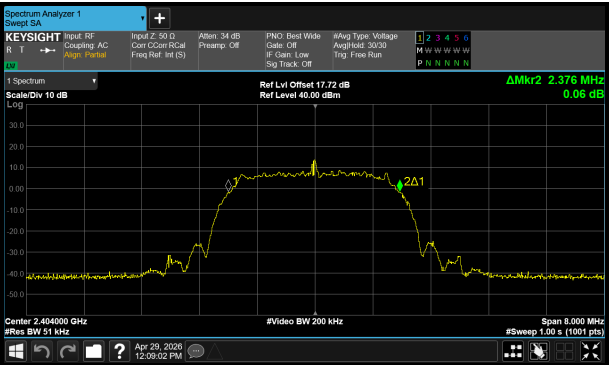

99%

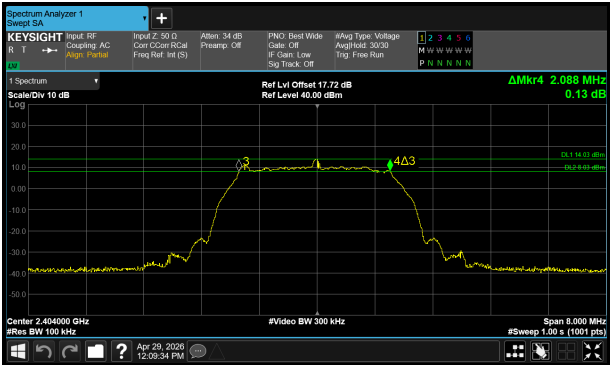


6 dB

Minimum 6 dB & 99% Bandwidth (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.725	-	-	-
2440	-	4.725	-	-	-
2475	-	4.725	-	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	0.615	-	-	≥500
2440	-	0.615	-	-	≥500
2475	-	4.035	-	-	≥500

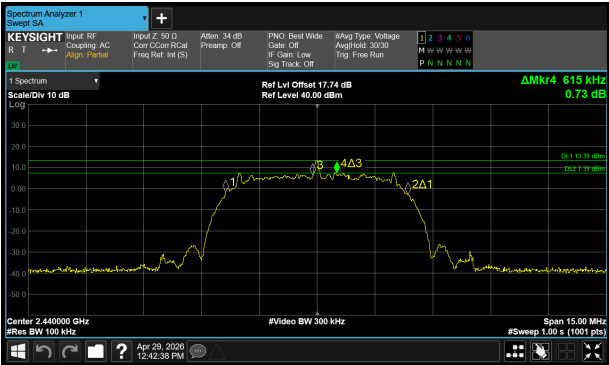


Minimum 6 dB & 99% Bandwidth (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.725	-	-	-
2440	-	4.725	-	-	-
2475	-	4.725	-	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.080	-	-	≥500
2440	-	4.080	-	-	≥500
2475	-	4.080	-	-	≥500

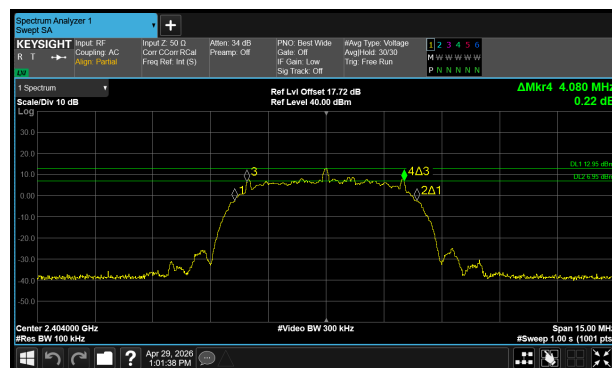


Minimum 6 dB & 99% Bandwidth (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.710	-	-	-
2440	-	4.695	-	-	-
2475	-	4.695	-	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.080	-	-	≥500
2440	-	4.080	-	-	≥500
2475	-	4.080	-	-	≥500

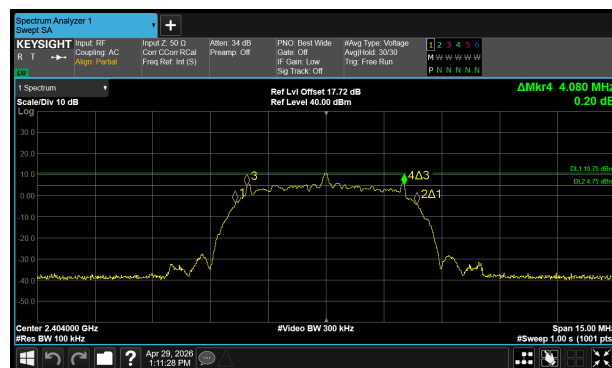

Minimum 6 dB & 99% Bandwidth (continued)**Results: SISO / iPA**

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	2 (Core 0)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	2.336	-	-	-
2440	-	2.344	-	-	-
2476	-	2.344	-	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	1.872	-	-	≥ 500
2440	-	1.872	-	-	≥ 500
2476	-	1.872	-	-	≥ 500

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	2 (Core 0)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.665	-	-	-
2440	-	4.680	-	-	-
2476	-	4.680	-	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	0.570	-	-	≥ 500
2440	-	0.555	-	-	≥ 500
2476	-	0.570	-	-	≥ 500

Minimum 6 dB & 99% Bandwidth (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	2.384	-	-	-
2440	-	2.392	-	-	-
2476	-	2.392	-	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	2.112	-	-	≥500
2440	-	2.112	-	-	≥500
2476	-	2.112	-	-	≥500

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.755	-	-	-
2440	-	4.755	-	-	-
2475	-	4.755	-	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.035	-	-	≥500
2440	-	4.035	-	-	≥500
2475	-	2.550	-	-	≥500

Minimum 6 dB & 99% Bandwidth (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.755	-	-	-
2440	-	4.755	-	-	-
2475	-	4.755	-	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.095	-	-	≥500
2440	-	4.080	-	-	≥500
2475	-	4.080	-	-	≥500

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.725	-	-	-
2440	-	4.725	-	-	-
2475	-	4.725	-	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.095	-	-	≥500
2440	-	4.095	-	-	≥500
2475	-	4.095	-	-	≥500

Minimum 6 dB & 99% Bandwidth (continued)**Results: Beamforming / ePA**

Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	2.328	2.320	-	-
2440	-	2.320	2.328	-	-
2476	-	2.328	2.328	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	1.584	1.584	-	≥ 500
2440	-	1.576	1.576	-	≥ 500
2476	-	1.592	1.672	-	≥ 500

Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.635	4.650	-	-
2440	-	4.650	4.650	-	-
2476	-	4.650	4.650	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	0.570	0.570	-	≥ 500
2440	-	0.570	0.570	-	≥ 500
2476	-	0.570	0.570	-	≥ 500

Minimum 6 dB & 99% Bandwidth (continued)

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	2.376	2.376	-	-
2440	-	2.376	2.376	-	-
2476	-	2.376	2.376	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	2.104	2.112	-	≥500
2440	-	2.096	2.112	-	≥500
2476	-	2.104	2.104	-	≥500

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.725	4.725	-	-
2440	-	4.725	4.725	-	-
2475	-	4.725	4.725	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	2.115	4.050	-	≥500
2440	-	0.615	0.615	-	≥500
2475	-	0.615	0.600	-	≥500

Minimum 6 dB & 99% Bandwidth (continued)

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.710	4.725	-	-
2440	-	4.725	4.725	-	-
2475	-	4.725	4.725	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.080	4.080	-	≥500
2440	-	4.065	4.080	-	≥500
2475	-	4.080	4.080	-	≥500

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.695	4.695	-	-
2440	-	4.695	4.710	-	-
2475	-	4.695	4.695	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.080	4.080	-	≥500
2440	-	4.080	4.080	-	≥500
2475	-	4.080	4.080	-	≥500

Minimum 6 dB & 99% Bandwidth (continued)**Results: Beamforming / iPA**

Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	2.344	2.344	-	-
2440	-	2.336	2.344	-	-
2476	-	2.344	2.336	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	1.880	1.864	-	≥ 500
2440	-	1.864	1.688	-	≥ 500
2476	-	1.880	1.696	-	≥ 500

Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.680	4.665	-	-
2440	-	4.680	4.680	-	-
2476	-	4.680	4.665	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	0.570	0.555	-	≥ 500
2440	-	0.570	0.570	-	≥ 500
2476	-	0.555	0.570	-	≥ 500

Minimum 6 dB & 99% Bandwidth (continued)

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	2.392	2.384	-	-
2440	-	2.384	2.384	-	-
2476	-	2.384	2.384	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	2.104	2.112	-	≥500
2440	-	2.112	2.112	-	≥500
2476	-	2.112	2.104	-	≥500

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.740	4.725	-	-
2440	-	4.755	4.740	-	-
2475	-	4.725	4.725	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.050	2.535	-	≥500
2440	-	4.050	2.550	-	≥500
2475	-	4.050	0.615	-	≥500

Minimum 6 dB & 99% Bandwidth (continued)

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.755	4.755	-	-
2440	-	4.755	4.755	-	-
2475	-	4.755	4.755	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.080	4.080	-	≥500
2440	-	4.080	4.080	-	≥500
2475	-	4.080	4.080	-	≥500

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.725	4.710	-	-
2440	-	4.725	4.725	-	-
2475	-	4.725	4.725	-	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2404	-	4.095	4.080	-	≥500
2440	-	4.095	4.080	-	≥500
2475	-	4.095	4.095	-	≥500

4.2 Maximum Peak Output Power

Test Summary:

Test Engineer:	Jerome Moyo	Test Dates:	29 April 2026 & 27 May 2026
Test Sample Serial Number:	QFJ737LTP7		

FCC Clause:	15.247 (b)(3)
ISED Canada Clause:	RSS-247 6.3.2
Test Method Used:	ANSI C63.10 Section 11.9.1.2

Environmental Conditions:

Temperature (°C):	22 to 24
Relative Humidity (%):	31 to 56

Note(s):

1. The maximum antenna gain is less than or equal to 6 dBi.
2. For beamforming modes, conducted power was measured on Core 0 & Core 1 and then combined using the measure-and-sum technique stated in ANSI C63.10 Section 14.5.1. For EIRP, the directional antenna gain was added to the conducted output power.

Maximum Peak Output Power (continued)**Results: SISO / ePA / Core 0**

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	2 (Core 0)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	16.25	-	-	-	30.00	13.75	1.30	17.55	36.00	18.45
2440	-	16.15	-	-	-	30.00	13.85	0.80	16.95	36.00	19.05
2476	-	16.25	-	-	-	30.00	13.75	1.40	17.65	36.00	18.35

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	2 (Core 0)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	16.23	-	-	-	30.00	13.77	1.30	17.53	36.00	18.47
2440	-	16.15	-	-	-	30.00	13.85	0.80	16.95	36.00	19.05
2476	-	16.25	-	-	-	30.00	13.75	1.40	17.65	36.00	18.35

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	16.78	-	-	-	30.00	13.22	1.30	18.08	36.00	17.92
2440	-	16.78	-	-	-	30.00	13.22	0.80	17.58	36.00	18.42
2476	-	16.85	-	-	-	30.00	13.15	1.40	18.25	36.00	17.75

Maximum Peak Output Power (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	16.66	-	-	-	30.00	13.34	1.30	17.96	36.00	18.04
2440	-	16.59	-	-	-	30.00	13.41	0.80	17.39	36.00	18.61
2475	-	16.72	-	-	-	30.00	13.28	1.40	18.12	36.00	17.88

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	16.87	-	-	-	30.00	13.13	1.30	18.17	36.00	17.83
2440	-	16.71	-	-	-	30.00	13.29	0.80	17.51	36.00	18.49
2475	-	16.85	-	-	-	30.00	13.15	1.40	18.25	36.00	17.75

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	17.00	-	-	-	30.00	13.00	1.30	18.30	36.00	17.70
2440	-	16.92	-	-	-	30.00	13.08	0.80	17.72	36.00	18.28
2475	-	17.07	-	-	-	30.00	12.93	1.40	18.47	36.00	17.53

Maximum Peak Output Power (continued)**Results: SISO / ePA / Core 1**

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	3 (Core 1)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	16.34	-	-	30.00	13.66	1.20	17.54	36.00	18.46
2440	-	-	16.38	-	-	30.00	13.62	1.00	17.38	36.00	18.62
2476	-	-	16.25	-	-	30.00	13.75	1.30	17.55	36.00	18.45

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	3 (Core 1)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	16.30	-	-	30.00	13.70	1.20	17.50	36.00	18.50
2440	-	-	16.41	-	-	30.00	13.59	1.00	17.41	36.00	18.59
2476	-	-	16.26	-	-	30.00	13.74	1.30	17.56	36.00	18.44

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	16.67	-	-	30.00	13.33	1.20	17.87	36.00	18.13
2440	-	-	16.66	-	-	30.00	13.34	1.00	17.66	36.00	18.34
2476	-	-	16.82	-	-	30.00	13.18	1.30	18.12	36.00	17.88

Maximum Peak Output Power (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	16.73	-	-	30.00	13.27	1.20	17.93	36.00	18.07
2440	-	-	16.71	-	-	30.00	13.29	1.00	17.71	36.00	18.29
2475	-	-	16.62	-	-	30.00	13.38	1.30	17.92	36.00	18.08

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	16.71	-	-	30.00	13.29	1.20	17.91	36.00	18.09
2440	-	-	16.75	-	-	30.00	13.25	1.00	17.75	36.00	18.25
2475	-	-	16.83	-	-	30.00	13.17	1.30	18.13	36.00	17.87

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	16.94	-	-	30.00	13.06	1.20	18.14	36.00	17.86
2440	-	-	16.86	-	-	30.00	13.14	1.00	17.86	36.00	18.14
2475	-	-	17.01	-	-	30.00	12.99	1.30	18.31	36.00	17.69

Maximum Peak Output Power (continued)**Results: SISO / iPA / Core 0**

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	2 (Core 0)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	8.91	-	-	-	30.00	21.09	1.30	10.21	36.00	25.79
2440	-	8.88	-	-	-	30.00	21.12	0.80	9.68	36.00	26.32
2476	-	8.88	-	-	-	30.00	21.12	1.40	10.28	36.00	25.72

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	2 (Core 0)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	8.91	-	-	-	30.00	21.09	1.30	10.21	36.00	25.79
2440	-	8.97	-	-	-	30.00	21.03	0.80	9.77	36.00	26.23
2476	-	8.86	-	-	-	30.00	21.14	1.40	10.26	36.00	25.74

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	9.29	-	-	-	30.00	20.71	1.30	10.59	36.00	25.41
2440	-	9.16	-	-	-	30.00	20.84	0.80	9.96	36.00	26.04
2476	-	9.33	-	-	-	30.00	20.67	1.40	10.73	36.00	25.27

Maximum Peak Output Power (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	9.31	-	-	-	30.00	20.69	1.30	10.61	36.00	25.39
2440	-	9.21	-	-	-	30.00	20.79	0.80	10.01	36.00	25.99
2475	-	9.37	-	-	-	30.00	20.63	1.40	10.77	36.00	25.23

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	9.32	-	-	-	30.00	20.68	1.30	10.62	36.00	25.38
2440	-	9.11	-	-	-	30.00	20.89	0.80	9.91	36.00	26.09
2475	-	9.21	-	-	-	30.00	20.79	1.40	10.61	36.00	25.39

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	8.47	-	-	-	30.00	21.53	1.30	9.77	36.00	26.23
2440	-	8.42	-	-	-	30.00	21.58	0.80	9.22	36.00	26.78
2475	-	8.45	-	-	-	30.00	21.55	1.40	9.85	36.00	26.15

Maximum Peak Output Power (continued)**Results: SISO / iPA / Core 1**

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	3 (Core 1)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	8.82	-	-	30.00	21.18	1.20	10.02	36.00	25.98
2440	-	-	8.94	-	-	30.00	21.06	1.00	9.94	36.00	26.06
2476	-	-	8.94	-	-	30.00	21.06	1.30	10.24	36.00	25.76

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	3 (Core 1)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	8.73	-	-	30.00	21.27	1.20	9.93	36.00	26.07
2440	-	-	8.89	-	-	30.00	21.11	1.00	9.89	36.00	26.11
2476	-	-	8.77	-	-	30.00	21.23	1.30	10.07	36.00	25.93

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	9.14	-	-	30.00	20.86	1.20	10.34	36.00	25.66
2440	-	-	9.29	-	-	30.00	20.71	1.00	10.29	36.00	25.71
2476	-	-	9.29	-	-	30.00	20.71	1.30	10.59	36.00	25.41

Maximum Peak Output Power (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	9.18	-	-	30.00	20.82	1.20	10.38	36.00	25.62
2440	-	-	9.28	-	-	30.00	20.72	1.00	10.28	36.00	25.72
2475	-	-	9.23	-	-	30.00	20.77	1.30	10.53	36.00	25.47

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	9.15	-	-	30.00	20.85	1.20	10.35	36.00	25.65
2440	-	-	9.21	-	-	30.00	20.79	1.00	10.21	36.00	25.79
2475	-	-	9.21	-	-	30.00	20.79	1.30	10.51	36.00	25.49

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	8.42	-	-	30.00	21.58	1.20	9.62	36.00	26.38
2440	-	-	8.31	-	-	30.00	21.69	1.00	9.31	36.00	26.69
2475	-	-	8.49	-	-	30.00	21.51	1.30	9.79	36.00	26.21

Maximum Peak Output Power (continued)**Results: SISO / iPA / Core 2**

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	4 (Core 2)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	-	12.63	-	30.00	17.37	0.20	12.83	36.00	23.17
2440	-	-	-	12.75	-	30.00	17.25	-0.40	12.35	36.00	23.65
2476	-	-	-	12.79	-	30.00	17.21	0.70	13.49	36.00	22.51

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	4 (Core 2)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	-	12.59	-	30.00	17.41	0.20	12.79	36.00	23.21
2440	-	-	-	12.74	-	30.00	17.26	-0.40	12.34	36.00	23.66
2476	-	-	-	12.73	-	30.00	17.27	0.70	13.43	36.00	22.57

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	4 (Core 2)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	-	12.99	-	30.00	17.01	0.20	13.19	36.00	22.81
2440	-	-	-	13.14	-	30.00	16.86	-0.40	12.74	36.00	23.26
2476	-	-	-	13.31	-	30.00	16.69	0.70	14.01	36.00	21.99

Maximum Peak Output Power (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	4 (Core 2)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	-	13.18	-	30.00	16.82	0.20	13.38	36.00	22.62
2440	-	-	-	13.32	-	30.00	16.68	-0.40	12.92	36.00	23.08
2475	-	-	-	13.01	-	30.00	16.99	0.70	13.71	36.00	22.29

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	4 (Core 2)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	-	12.96	-	30.00	17.04	0.20	13.16	36.00	22.84
2440	-	-	-	13.16	-	30.00	16.84	-0.40	12.76	36.00	23.24
2475	-	-	-	13.18	-	30.00	16.82	0.70	13.88	36.00	22.12

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	4 (Core 2)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	-	-	12.20	-	30.00	17.80	0.20	12.40	36.00	23.60
2440	-	-	-	12.38	-	30.00	17.62	-0.40	11.98	36.00	24.02
2475	-	-	-	12.43	-	30.00	17.57	0.70	13.13	36.00	22.87

Maximum Peak Output Power (continued)**Results: Beamforming / ePA**

Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	16.25	16.30	-	19.28	30.00	10.72	4.26	23.54	36.00	12.46
2440	-	16.36	16.29	-	19.34	30.00	10.66	3.91	23.25	36.00	12.75
2476	-	16.23	16.22	-	19.23	30.00	10.77	4.36	23.59	36.00	12.41

Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	16.20	16.40	-	19.31	30.00	10.69	4.26	23.57	36.00	12.43
2440	-	16.35	16.34	-	19.36	30.00	10.64	3.91	23.27	36.00	12.73
2476	-	16.25	16.27	-	19.27	30.00	10.73	4.36	23.63	36.00	12.37

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	16.73	16.69	-	19.72	30.00	10.28	4.26	23.98	36.00	12.02
2440	-	16.74	16.67	-	19.71	30.00	10.29	3.91	23.63	36.00	12.37
2476	-	16.81	16.81	-	19.82	30.00	10.18	4.36	24.18	36.00	11.82

Maximum Peak Output Power (continued)

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	16.58	16.72	-	19.67	30.00	10.33	4.26	23.93	36.00	12.07
2440	-	16.72	16.65	-	19.69	30.00	10.31	3.91	23.60	36.00	12.40
2475	-	16.69	16.64	-	19.67	30.00	10.33	4.36	24.03	36.00	11.97

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	16.77	16.77	-	19.78	30.00	10.22	4.26	24.04	36.00	11.96
2440	-	16.69	16.70	-	19.71	30.00	10.29	3.91	23.62	36.00	12.38
2475	-	16.85	16.68	-	19.78	30.00	10.22	4.36	24.14	36.00	11.86

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	16.97	16.89	-	19.94	30.00	10.06	4.26	24.20	36.00	11.80
2440	-	16.89	16.90	-	19.90	30.00	10.10	3.91	23.81	36.00	12.19
2475	-	17.03	16.85	-	19.95	30.00	10.05	4.36	24.31	36.00	11.69

Maximum Peak Output Power (continued)**Results: Beamforming / iPA**

Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	9.01	8.94	-	11.99	30.00	18.01	4.26	16.25	36.00	19.75
2440	-	8.96	8.87	-	11.92	30.00	18.08	3.91	15.83	36.00	20.17
2476	-	8.87	8.87	-	11.88	30.00	18.12	4.36	16.24	36.00	19.76

Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	8.85	8.87	-	11.87	30.00	18.13	4.26	16.13	36.00	19.87
2440	-	8.90	8.83	-	11.88	30.00	18.12	3.91	15.79	36.00	20.21
2476	-	8.81	8.73	-	11.78	30.00	18.22	4.36	16.14	36.00	19.86

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	9.20	9.31	-	12.26	30.00	17.74	4.26	16.52	36.00	19.48
2440	-	9.32	9.22	-	12.28	30.00	17.72	3.91	16.19	36.00	19.81
2476	-	9.23	9.24	-	12.25	30.00	17.75	4.36	16.61	36.00	19.39

Maximum Peak Output Power (continued)

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	9.30	9.34	-	12.33	30.00	17.67	4.26	16.59	36.00	19.41
2440	-	8.88	9.20	-	12.05	30.00	17.95	3.91	15.96	36.00	20.04
2475	-	9.32	9.16	-	12.25	30.00	17.75	4.36	16.61	36.00	19.39

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	9.19	9.30	-	12.26	30.00	17.74	4.26	16.52	36.00	19.48
2440	-	9.31	9.15	-	12.24	30.00	17.76	3.91	16.15	36.00	19.85
2475	-	9.42	9.40	-	12.42	30.00	17.58	4.36	16.78	36.00	19.22

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2404	-	8.43	8.53	-	11.49	30.00	18.51	4.26	15.75	36.00	20.25
2440	-	8.35	8.50	-	11.44	30.00	18.56	3.91	15.35	36.00	20.65
2475	-	8.63	8.40	-	11.53	30.00	18.47	4.36	15.89	36.00	20.11

4.3 Power Spectral Density

Test Summary:

Test Engineer:	Jerome Moyo	Test Dates:	29 April 2026 & 27 May 2026
Test Sample Serial Number:	QFJ737LTP7		

FCC Clause:	15.247 (e)
ISED Canada Clause:	RSS-247 6.3.1(b)
Test Method Used:	ANSI C63.10 Section 11.10.2

Environmental Conditions:

Temperature (°C):	22 to 24
Relative Humidity (%):	31 to 56

Note(s):


1. For beamforming modes, conducted PSD was measured on Core 0 & Core 1 and then combined using the measure and sum the spectra across the outputs technique stated in ANSI C63.10 Section 14.5.2.3.
2. The test system signal analyser resolution bandwidth was set to 3 kHz and video bandwidth 10 kHz. A Peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The span was set to greater than 1.5 times the measured DTS bandwidth. A marker was placed at the peak of the signal and the results recorded in the table below.
3. Example plots of each modulation on the worst-case channel, for one antenna configuration, can be seen below to show setting parameters comply with testing method/procedure. All other plots are archived on the UL IT server and available for inspection if required.

Power Spectral Density (continued)

Results: SISO / ePA / Core 0

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	2 (Core 0)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)


Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-0.69	-	-	-	8.00	8.69
2440	-	-1.26	-	-	-	8.00	9.26
2476	-	-0.85	-	-	-	8.00	8.85

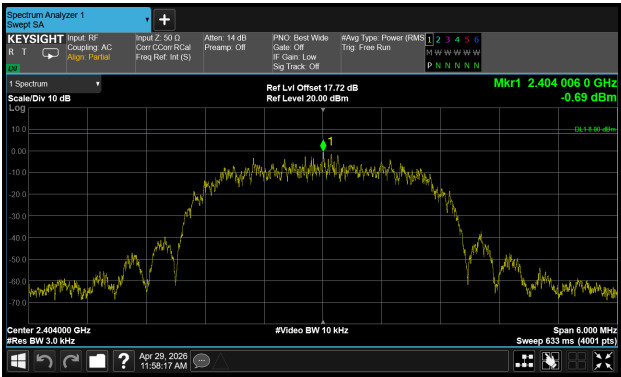

Power Spectral Density (continued)


Antenna Configuration:	SISO	Mode:	HDR
Test Port:	2 (Core 0)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-2.48	-	-	-	8.00	10.48
2440	-	-2.82	-	-	-	8.00	10.82
2476	-	-2.36	-	-	-	8.00	10.36

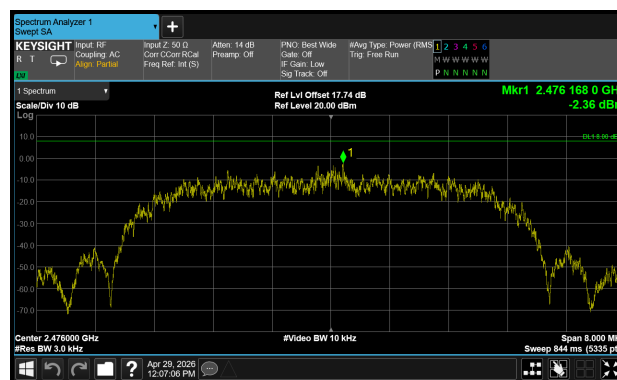

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	HDRPS2 (OQPSK)


Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-3.20	-	-	-	8.00	11.20
2440	-	-3.52	-	-	-	8.00	11.52
2476	-	-2.51	-	-	-	8.00	10.51

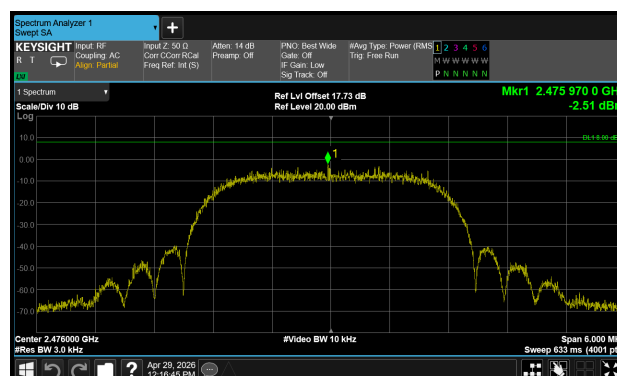

Power Spectral Density (continued)


Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-5.44	-	-	-	8.00	13.44
2440	-	-5.67	-	-	-	8.00	13.67
2475	-	-5.49	-	-	-	8.00	13.49

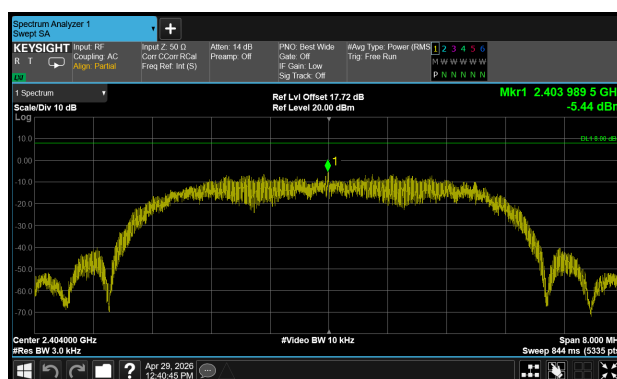

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	XHDRPM6 (OQPSK)


Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-6.87	-	-	-	8.00	14.87
2440	-	-7.11	-	-	-	8.00	15.11
2475	-	-6.85	-	-	-	8.00	14.85

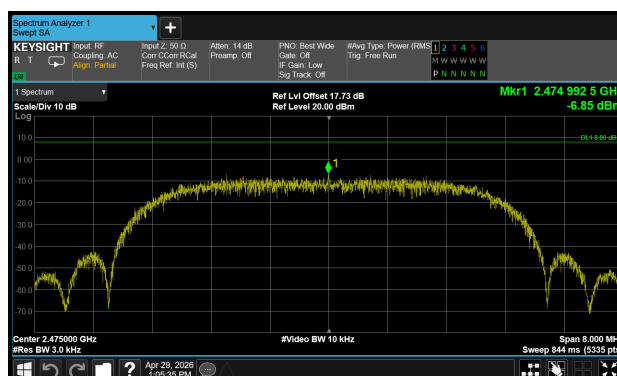

Power Spectral Density (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-9.13	-	-	-	8.00	17.13
2440	-	-9.52	-	-	-	8.00	17.52
2475	-	-9.19	-	-	-	8.00	17.19

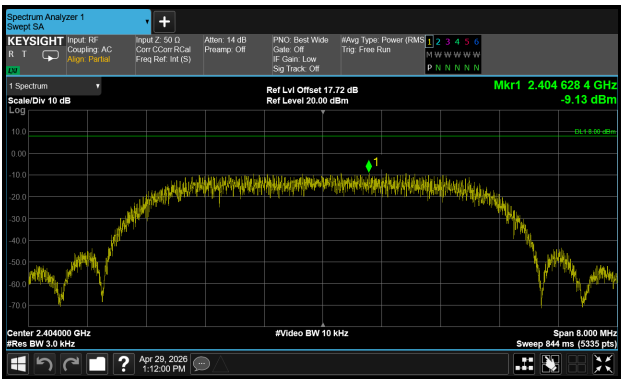

Power Spectral Density (continued)**Results: SISO / ePA / Core 1**

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	3 (Core 1)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-0.71	-	-	8.00	8.71
2440	-	-	-0.83	-	-	8.00	8.83
2476	-	-	-0.71	-	-	8.00	8.71

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	3 (Core 1)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-2.28	-	-	8.00	10.28
2440	-	-	-2.47	-	-	8.00	10.47
2476	-	-	-2.38	-	-	8.00	10.38

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-2.71	-	-	8.00	10.71
2440	-	-	-3.23	-	-	8.00	11.23
2476	-	-	-2.63	-	-	8.00	10.63

Power Spectral Density (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-5.55	-	-	8.00	13.55
2440	-	-	-6.10	-	-	8.00	14.10
2475	-	-	-5.94	-	-	8.00	13.94

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-6.80	-	-	8.00	14.80
2440	-	-	-7.33	-	-	8.00	15.33
2475	-	-	-6.68	-	-	8.00	14.68

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-9.28	-	-	8.00	17.28
2440	-	-	-9.55	-	-	8.00	17.55
2475	-	-	-9.20	-	-	8.00	17.20

Power Spectral Density (continued)**Results: SISO / iPA / Core 0**

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	2 (Core 0)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-8.13	-	-	-	8.00	16.13
2440	-	-8.93	-	-	-	8.00	16.93
2476	-	-8.63	-	-	-	8.00	16.63

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	2 (Core 0)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-9.92	-	-	-	8.00	17.92
2440	-	-10.03	-	-	-	8.00	18.03
2476	-	-10.31	-	-	-	8.00	18.31

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-10.15	-	-	-	8.00	18.15
2440	-	-10.46	-	-	-	8.00	18.46
2476	-	-10.80	-	-	-	8.00	18.80

Power Spectral Density (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-13.25	-	-	-	8.00	21.25
2440	-	-13.63	-	-	-	8.00	21.63
2475	-	-13.37	-	-	-	8.00	21.37

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-14.52	-	-	-	8.00	22.52
2440	-	-14.85	-	-	-	8.00	22.85
2475	-	-14.60	-	-	-	8.00	22.60

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	2 (Core 0)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-17.70	-	-	-	8.00	25.70
2440	-	-17.89	-	-	-	8.00	25.89
2475	-	-17.95	-	-	-	8.00	25.95

Power Spectral Density (continued)**Results: SISO / iPA / Core 1**

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	3 (Core 1)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-8.49	-	-	8.00	16.49
2440	-	-	-8.42	-	-	8.00	16.42
2476	-	-	-8.28	-	-	8.00	16.28

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	3 (Core 1)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-10.02	-	-	8.00	18.02
2440	-	-	-10.03	-	-	8.00	18.03
2476	-	-	-10.19	-	-	8.00	18.19

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-10.46	-	-	8.00	18.46
2440	-	-	-10.42	-	-	8.00	18.42
2476	-	-	-10.19	-	-	8.00	18.19

Power Spectral Density (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-13.92	-	-	8.00	21.92
2440	-	-	-13.32	-	-	8.00	21.32
2475	-	-	-13.15	-	-	8.00	21.15

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-15.18	-	-	8.00	23.18
2440	-	-	-14.73	-	-	8.00	22.73
2475	-	-	-14.74	-	-	8.00	22.74

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	3 (Core 1)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-17.78	-	-	8.00	25.78
2440	-	-	-18.24	-	-	8.00	26.24
2475	-	-	-17.90	-	-	8.00	25.90

Power Spectral Density (continued)**Results: SISO / iPA / Core 2**

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	4 (Core 2)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-	-4.32	-	8.00	12.32
2440	-	-	-	-4.44	-	8.00	12.44
2476	-	-	-	-4.60	-	8.00	12.60

Antenna Configuration:	SISO	Mode:	HDR
Test Port:	4 (Core 2)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-	-5.92	-	8.00	13.92
2440	-	-	-	-6.05	-	8.00	14.05
2476	-	-	-	-6.05	-	8.00	14.05

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	4 (Core 2)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-	-6.45	-	8.00	14.45
2440	-	-	-	-7.05	-	8.00	15.05
2476	-	-	-	-6.75	-	8.00	14.75

Power Spectral Density (continued)

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	4 (Core 2)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-	-9.90	-	8.00	17.90
2440	-	-	-	-9.28	-	8.00	17.28
2475	-	-	-	-9.62	-	8.00	17.62

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	4 (Core 2)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-	-10.52	-	8.00	18.52
2440	-	-	-	-10.71	-	8.00	18.71
2475	-	-	-	-11.53	-	8.00	19.53

Antenna Configuration:	SISO	Mode:	HDRP
Test Port:	4 (Core 2)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-	-	-13.94	-	8.00	21.94
2440	-	-	-	-13.75	-	8.00	21.75
2475	-	-	-	-13.63	-	8.00	21.63

Power Spectral Density (continued)**Results: Beamforming / ePA**

Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-1.29	-0.63	-	2.06	8.00	5.94
2440	-	-0.72	-0.98	-	2.16	8.00	5.84
2476	-	-0.90	-0.70	-	2.21	8.00	5.79

Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-2.25	-2.34	-	0.72	8.00	7.28
2440	-	-2.33	-2.62	-	0.54	8.00	7.46
2476	-	-2.28	-2.38	-	0.68	8.00	7.32

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-2.55	-2.71	-	0.38	8.00	7.62
2440	-	-3.50	-3.68	-	-0.58	8.00	8.58
2476	-	-3.06	-3.46	-	-0.24	8.00	8.24

Power Spectral Density (continued)

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-5.74	-5.96	-	-2.84	8.00	10.84
2440	-	-6.49	-5.86	-	-3.15	8.00	11.15
2475	-	-5.56	-5.91	-	-2.72	8.00	10.72

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-6.66	-6.87	-	-3.75	8.00	11.75
2440	-	-7.15	-7.54	-	-4.33	8.00	12.33
2475	-	-6.85	-7.14	-	-3.98	8.00	11.98

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-9.05	-9.38	-	-6.20	8.00	14.20
2440	-	-9.43	-9.52	-	-6.47	8.00	14.47
2475	-	-9.09	-9.44	-	-6.25	8.00	14.25

Power Spectral Density (continued)**Results: Beamforming / iPA**

Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	4DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-8.11	-8.25	-	-5.17	8.00	13.17
2440	-	-8.29	-8.52	-	-5.39	8.00	13.39
2476	-	-8.45	-8.27	-	-5.35	8.00	13.35

Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-10.00	-10.41	-	-7.19	8.00	15.19
2440	-	-9.98	-10.13	-	-7.05	8.00	15.05
2476	-	-10.04	-10.09	-	-7.06	8.00	15.06

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	HDRPS2 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-10.16	-10.63	-	-7.37	8.00	15.37
2440	-	-10.17	-10.42	-	-7.28	8.00	15.28
2476	-	-10.27	-10.51	-	-7.38	8.00	15.38

Power Spectral Density (continued)

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	HDRPM8 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-13.77	-13.37	-	-10.56	8.00	18.56
2440	-	-13.68	-13.42	-	-10.54	8.00	18.54
2475	-	-13.16	-13.22	-	-10.18	8.00	18.18

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	XHDRPM6 (OQPSK)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-14.55	-14.36	-	-11.44	8.00	19.44
2440	-	-14.45	-14.94	-	-11.67	8.00	19.67
2475	-	-14.97	-14.98	-	-11.97	8.00	19.97

Antenna Configuration:	Beamforming	Mode:	HDRP
Test Port:	2+3 (Core 0 + Core 1)	Rate/Modulation:	XHDRPM12 (16QAM)

Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2404	-	-17.84	-17.67	-	-14.74	8.00	22.74
2440	-	-17.82	-17.88	-	-14.84	8.00	22.84
2475	-	-17.70	-17.85	-	-14.76	8.00	22.76

5 Radiated Test Results

5.1 Duty Cycle

Test Summary:

Test Engineers:	Nick Steele & Robert English	Test Dates:	10 February 2026 to 14 February 2026
Test Sample Serial Number:	GX2W350QP7		

FCC Clause:	Part 15.35(c)
ISED Canada Clause:	RSS-Gen 8.2
Test Method Used:	ANSI C63.10 Section 11.6

Environmental Conditions:

Temperature (°C):	20
Relative Humidity (%):	46 to 48

Note(s):

1. In order to assist with the determination of the average level of spurious emissions field strength, measurements were made of duty cycle to determine the transmission duration and the silent period time of the transmitter.
2. The duty cycle is identical for both SISO and Beamforming modes, ePA and iPA.
3. Example plots of the worst-case, for one configuration, can be seen below to show setting parameters comply with testing method/procedure. All other plots are archived on the UL IT server and available for inspection if required.

Duty Cycle (continued)**Results:**

Antenna Configuration	Test Port:	Mode	Test Frequency (MHz)	Duty Cycle (%)	Period (ms)	Width (ms)	Correction Factor (dB)
SISO / Beamforming	Core 0 / Core 1 / Core 2 / Core 0 + Core 1	4DH5	2404	77.75	3.760	2.923	1.09
SISO / Beamforming	Core 0 / Core 1 / Core 2 / Core 0 + Core 1	8DH5	2404	77.88	3.760	2.928	1.09
SISO / Beamforming	Core 0 / Core 1 / Core 2 / Core 0 + Core 1	HDRPS2	2404	92.38	17.520	16.184	0.34
SISO / Beamforming	Core 0 / Core 1 / Core 2 / Core 0 + Core 1	HDRPM12	2404	93.32	2.504	2.337	0.30
SISO / Beamforming	Core 0 / Core 1 / Core 2 / Core 0 + Core 1	XHDRPM8	2404	92.21	8.756	8.074	0.35

Example Plot / Worst Case Mode

Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	Core 1	Rate/Modulation:	8DH5 ($\pi/4$ DQPSK)



5.2 Radiated Emissions <1 GHz

Test Summary:

Test Engineer:	Nick Steele	Test Date:	18 February 2026
Test Sample Serial Number:	GX2W350QP7		

FCC Clause:	Parts 15.247(d) & 15.209(a)
ISED Canada Clause:	RSS-247 6.6 / RSS-Gen 6.13 & 8.9
Test Method Used:	ANSI C63.10 Sections 6.3 and 6.5
Frequency Range	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	19
Relative Humidity (%):	37

Note(s):

1. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore, final radiated emissions measurements were performed with the EUT set to the middle channel only.
2. All emissions shown on the pre-scans were investigated and found to be ambient, or > 20 dB below the appropriate limit or below the noise floor of the measurement system. Therefore, the highest peak noise floor reading of the measuring receiver was recorded in the table below.
3. Measurements from 30 MHz to 1 GHz were performed in a semi-anechoic chamber (Asset Number K226202) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Radiated Emissions (continued)

Results: Middle Channel / Peak / 8DH5 / Beamforming / Core 0 + Core 1

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Polarity
965.576	30.54	54.00	23.46	Horizontal



5.3 Radiated Emissions >1 GHz

Test Summary:

Test Engineers:	Nick Steele & Robert English	Test Dates:	16 February 2026 to 19 February 2026
Test Sample Serial Number:	GX2W350QP7		

FCC Clause:	Parts 15.247(d) & 15.209(a)
ISED Canada Clause:	RSS-247 6.6 / RSS-Gen 6.13 & 8.9
Test Method Used:	ANSI C63.10 Sections 6.3, 6.6, 11.11 & 11.12
Frequency Range	1 GHz to 26 GHz

Environmental Conditions:

Temperature (°C):	19 to 21
Relative Humidity (%):	37 to 40

Note(s):





1. No spurious emissions were detected above the noise floor of the measuring receiver for all channels tested therefore the highest peak and average noise floor readings of the measuring receiver for the middle channel were recorded as shown in the tables below.
2. The emission shown on the 1 GHz to 3 GHz plot is the EUT fundamental.
3. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K226202) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT.

Radiated Emissions (continued)**Results: 8DH5 / Beamforming / Core 0 + Core 1****Results: Middle Channel / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2987.250	55.73	74.00	18.27	Horizontal

Results: Middle Channel / Average

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2963.760	45.79	54.00	8.21	Horizontal

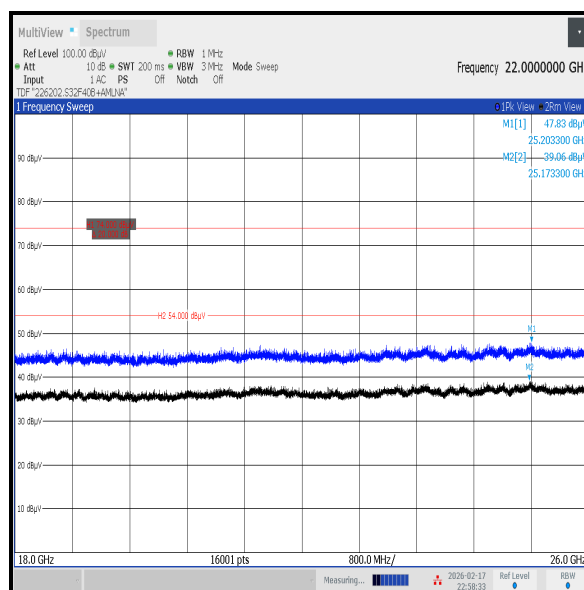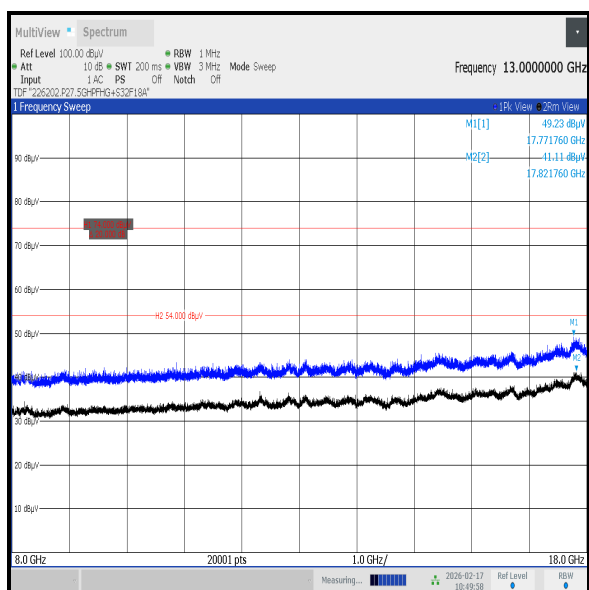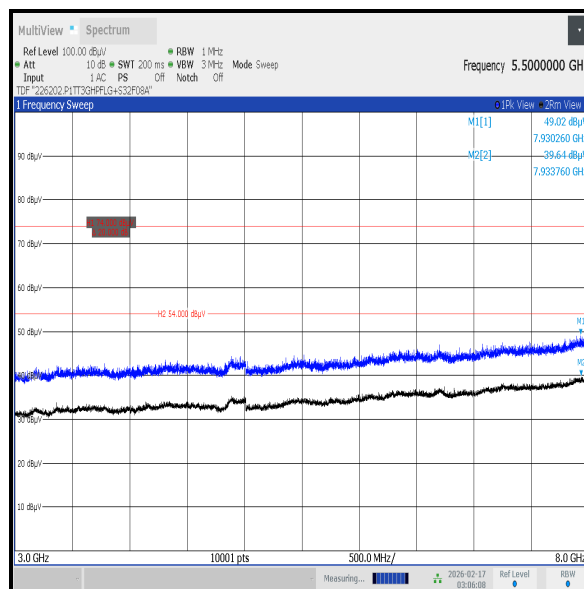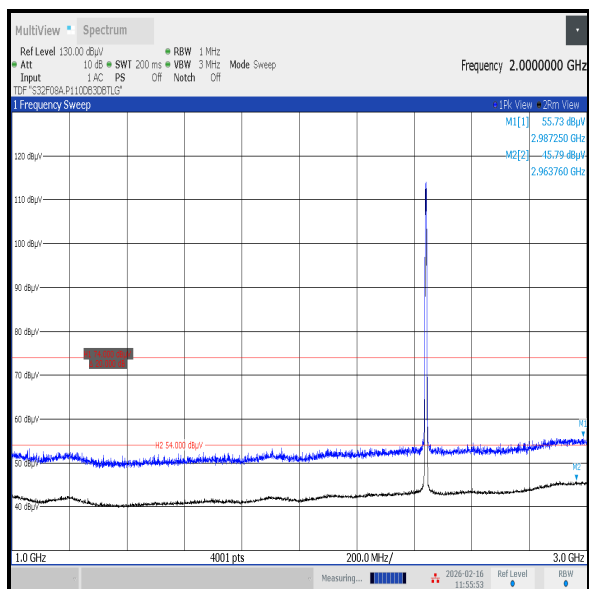

5.4 Band Edge Radiated Emissions

Test Summary:

Test Engineers:	Nick Steele & Robert English	Test Dates:	10 February 2026 to 14 February 2026
Test Sample Serial Number:	GX2W350QP7		

FCC Clause:	Parts 15.247(d) & 15.209(a)
ISED Canada Clause:	RSS-247 6.6 / RSS-Gen 6.13
Test Method Used:	ANSI C63.10 Sections 11.6, 11.11 & 11.12

Environmental Conditions:


Temperature (°C):	20
Relative Humidity (%):	46 to 48

Note(s):


1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. As the EUT had a duty cycle < 98%, the duty cycle correction factor calculated in section 5.1 has been applied to the relevant results below.
3. Example plots of the worst-case, for one configuration, can be seen below to show setting parameters comply with testing method/procedure. All other plots are archived on the UL IT server and available for inspection if required.

Band Edge Radiated Emissions (continued)


Example Plots / 8DH5 / Beamforming / Core 0 + Core 1 / ePA

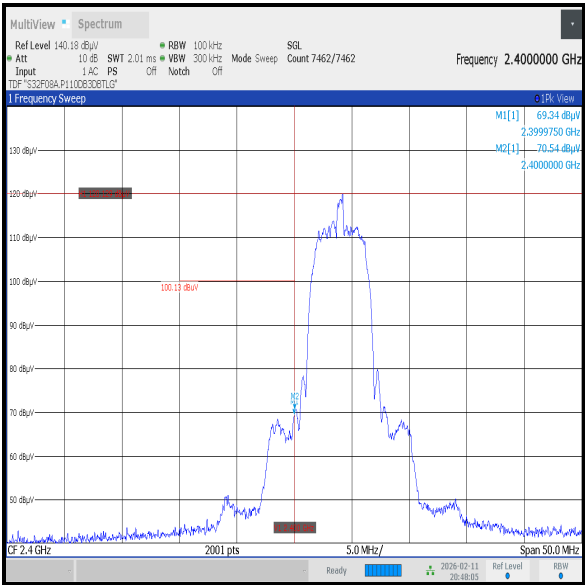

Lower Band Edge – Non Restricted Band

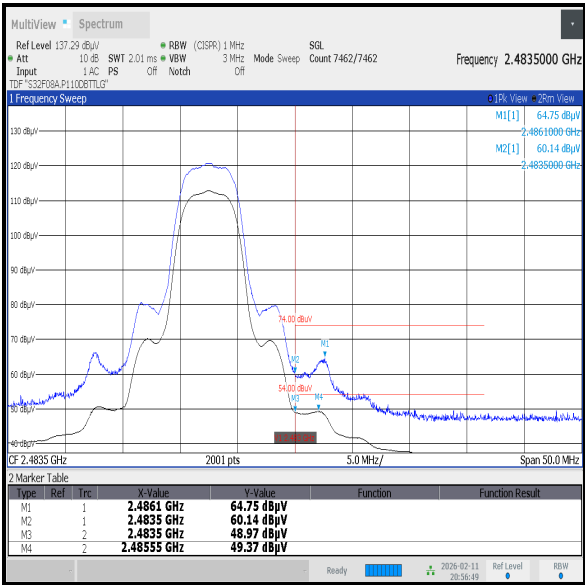

Upper Band Edge – Restricted Band

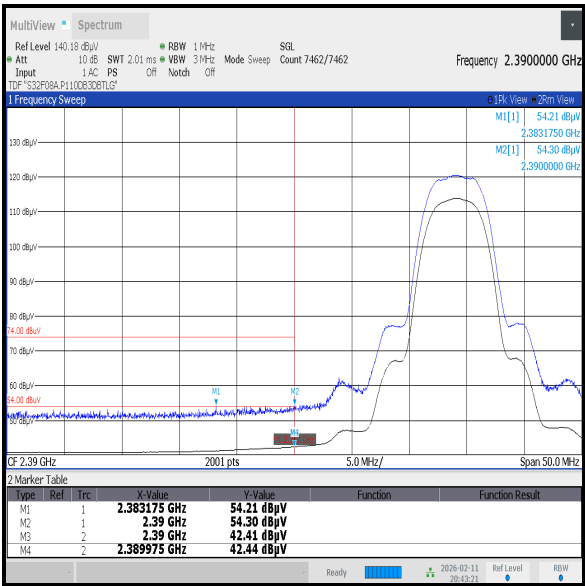

Lower Band Edge – Restricted Band

Band Edge Radiated Emissions (continued)**Results: 4DH5 / SISO / Core 0 / ePA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2398.900	48.17	94.73	46.56	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.475	54.20	74.00	19.80	Horizontal
2483.875	52.98	74.00	21.02	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	42.05	1.09	43.14	54.00	10.86	Horizontal
2483.5	40.92	1.09	42.01	54.00	11.99	Horizontal

Results: 8DH5 / SISO / Core 0 / ePA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2400.0	65.90	95.08	29.18	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2386.825	53.93	74.00	20.07	Horizontal
2486.050	64.47	74.00	9.53	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	42.16	1.09	43.25	54.00	10.75	Horizontal
2485.400	50.00	1.09	51.09	54.00	2.91	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPS2 / SISO / Core 0 / ePA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2400.0	51.86	95.75	43.89	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2386.550	54.69	74.00	19.31	Horizontal
2483.675	52.33	74.00	21.67	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.900	42.16	0.34	42.50	54.00	11.50	Horizontal
2483.5	40.95	0.34	41.29	54.00	12.71	Horizontal

Results: HDRPM12 / SISO / Core 0 / ePA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.975	68.37	95.01	26.64	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.625	54.11	74.00	19.89	Horizontal
2484.000	63.98	74.00	10.02	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.900	42.21	0.30	42.51	54.00	11.49	Horizontal
2483.5	47.42	0.30	47.72	54.00	6.28	Horizontal

Band Edge Radiated Emissions (continued)**Results: XHDRPM8 / SISO / Core 0 / ePA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2400.0	67.26	94.21	26.95	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2382.800	53.95	74.00	20.05	Horizontal
2483.550	60.42	74.00	13.58	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.850	42.34	0.35	42.69	54.00	11.31	Horizontal
2483.5	47.71	0.35	48.06	54.00	5.94	Horizontal

Results: 4DH5 / SISO / Core 1 / ePA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2398.950	48.57	96.05	47.48	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.325	54.50	74.00	19.50	Horizontal
2483.700	53.13	74.00	20.87	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	42.04	1.09	43.13	54.00	10.87	Horizontal
2483.5	41.20	1.09	42.29	54.00	11.71	Horizontal

Band Edge Radiated Emissions (continued)**Results: 8DH5 / SISO / Core 1 / ePA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2400.0	66.74	96.27	29.53	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.425	54.61	74.00	19.39	Horizontal
2486.000	62.57	74.00	11.43	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	42.16	1.09	43.25	54.00	10.75	Horizontal
2485.650	47.73	1.09	48.82	54.00	5.18	Horizontal

Results: HDRPS2 / SISO / Core 1 / ePA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.975	54.01	96.23	42.22	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2385.075	54.03	74.00	19.97	Horizontal
2483.875	53.11	74.00	20.89	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	42.29	0.34	42.63	54.00	11.37	Horizontal
2483.5	41.12	0.34	41.46	54.00	12.54	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPM12 / SISO / Core 1 / ePA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.975	68.26	94.97	26.71	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.775	54.36	74.00	19.64	Horizontal
2484.225	61.31	74.00	12.69	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.875	42.21	0.30	42.51	54.00	11.49	Horizontal
2483.525	45.13	0.30	45.43	54.00	8.57	Horizontal

Results: XHDRPM8 / SISO / Core 1 / ePA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.975	68.34	94.85	26.51	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.375	54.36	74.00	19.64	Horizontal
2483.575	61.60	74.00	12.40	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.650	42.35	0.35	42.70	54.00	11.30	Horizontal
2483.5	48.60	0.35	48.95	54.00	5.05	Horizontal

Band Edge Radiated Emissions (continued)**Results: 4DH5 / SISO / Core 0 / iPA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2398.975	43.62	82.45	38.83	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2385.450	53.96	74.00	20.04	Horizontal
2490.225	49.42	74.00	24.58	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.125	40.88	1.09	41.97	54.00	12.03	Horizontal
2483.600	36.86	1.09	37.95	54.00	16.05	Horizontal

Results: 8DH5 / SISO / Core 0 / iPA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2400.0	50.26	81.88	31.62	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.775	53.52	74.00	20.48	Horizontal
2485.775	53.44	74.00	20.56	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.000	41.16	1.09	42.25	54.00	11.75	Horizontal
2483.5	38.78	1.09	39.87	54.00	14.13	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPS2 / SISO / Core 0 / iPA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.925	44.06	82.13	38.07	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2386.700	53.26	74.00	20.74	Horizontal
2496.050	48.64	74.00	25.36	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2388.600	40.86	0.34	41.20	54.00	12.80	Horizontal
2484.050	36.84	0.34	37.18	54.00	16.82	Horizontal

Results: HDRPM12 / SISO / Core 0 / iPA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.975	52.59	78.72	26.13	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2383.025	53.08	74.00	20.92	Horizontal
2484.550	49.35	74.00	24.65	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.675	40.90	0.30	41.20	54.00	12.80	Horizontal
2483.575	37.48	0.30	37.78	54.00	16.22	Horizontal

Band Edge Radiated Emissions (continued)**Results: XHDRPM8 / SISO / Core 0 / iPA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2400.0	55.28	81.92	26.64	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2366.925	52.95	74.00	21.05	Horizontal
2486.725	49.30	74.00	24.70	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.175	40.90	0.35	41.25	54.00	12.75	Horizontal
2483.5	37.43	0.35	37.78	54.00	16.22	Horizontal

Results: 4DH5 / SISO / Core 1 / iPA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.200	43.12	81.80	38.68	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2387.150	52.90	74.00	21.10	Horizontal
2484.600	48.94	74.00	25.06	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.100	40.85	1.09	41.94	54.00	12.06	Horizontal
2483.5	36.91	1.09	38.00	54.00	16.00	Horizontal

Band Edge Radiated Emissions (continued)**Results: 8DH5 / SISO / Core 1 / iPA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.600	50.92	81.87	30.95	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2379.900	53.07	74.00	20.93	Horizontal
2486.200	50.08	74.00	23.92	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.850	40.98	1.09	42.07	54.00	11.93	Horizontal
2483.5	37.58	1.09	38.67	54.00	15.33	Horizontal

Results: HDRPS2 / SISO / Core 1 / iPA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.375	42.80	83.03	40.23	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2377.625	53.37	74.00	20.63	Horizontal
2496.825	49.22	74.00	24.78	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.975	40.87	0.34	41.21	54.00	12.79	Horizontal
2483.550	36.84	0.34	37.18	54.00	16.82	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPM12 / SISO / Core 1 / iPA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2400.0	53.85	79.76	25.91	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2380.575	52.97	74.00	21.03	Horizontal
2483.825	49.96	74.00	24.04	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	40.87	0.30	41.17	54.00	12.83	Horizontal
2483.600	38.06	0.30	38.36	54.00	15.64	Horizontal

Results: XHDRPM8 / SISO / Core 1 / iPA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.975	56.69	81.82	25.13	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2387.475	52.83	74.00	21.17	Horizontal
2486.325	50.10	74.00	23.90	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	40.86	0.35	41.21	54.00	12.79	Horizontal
2483.5	38.68	0.35	39.03	54.00	14.97	Horizontal

Band Edge Radiated Emissions (continued)**Results: 4DH5 / SISO / Core 2 / iPA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.025	53.43	86.06	32.63	Vertical

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2369.125	53.41	74.00	20.59	Vertical
2483.675	49.44	74.00	24.56	Vertical

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	40.86	1.09	41.95	54.00	12.05	Vertical
2483.5	37.68	1.09	38.77	54.00	15.23	Vertical

Results: 8DH5 / SISO / Core 2 / iPA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2400.0	58.42	86.36	27.94	Vertical

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.900	60.99	74.00	13.01	Vertical
2484.675	54.82	74.00	19.18	Vertical

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.000	44.84	1.09	45.93	54.00	8.07	Vertical
2485.350	43.37	1.09	44.46	54.00	9.54	Vertical

Band Edge Radiated Emissions (continued)**Results: HDRPS2 / SISO / Core 2 / iPA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.475	55.77	86.37	30.60	Vertical

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.375	53.15	74.00	20.85	Vertical
2483.750	49.47	74.00	24.53	Vertical

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.925	40.86	0.34	41.20	54.00	12.80	Vertical
2483.525	37.48	0.34	37.82	54.00	16.18	Vertical

Results: HDRPM12 / SISO / Core 2 / iPA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.975	55.81	82.89	27.08	Vertical

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.650	53.82	74.00	20.18	Vertical
2483.975	55.27	74.00	18.73	Vertical

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	41.10	0.30	41.40	54.00	12.60	Vertical
2483.5	40.92	0.30	41.22	54.00	12.78	Vertical

Band Edge Radiated Emissions (continued)**Results: XHDRPM8 / SISO / Core 2 / iPA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2400.0	59.82	85.67	25.85	Vertical

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.950	54.82	74.00	19.18	Vertical
2483.5	56.24	74.00	17.76	Vertical

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.000	42.26	0.35	42.61	54.00	11.39	Vertical
2483.5	45.02	0.35	45.37	54.00	8.63	Vertical

Results: 4DH5 / Beamforming / Core 0 + Core 1 / ePA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2398.950	53.65	99.77	46.12	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.175	54.49	74.00	19.51	Horizontal
2483.550	56.34	74.00	17.66	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	42.10	1.09	43.19	54.00	10.81	Horizontal
2483.5	43.53	1.09	44.62	54.00	9.38	Horizontal

Band Edge Radiated Emissions (continued)**Results: 8DH5 / Beamforming / Core 0 + Core 1 / ePA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2400.0	70.54	100.13	29.59	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	54.30	74.00	19.70	Horizontal
2486.100	64.75	74.00	9.25	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.975	42.44	1.09	43.53	54.00	10.47	Horizontal
2485.550	49.37	1.09	50.46	54.00	3.54	Horizontal

Results: HDRPS2 / Beamforming / Core 0 + Core 1 / ePA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.975	55.53	99.45	43.92	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.575	54.65	74.00	19.35	Horizontal
2483.625	54.23	74.00	19.77	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	42.20	0.34	42.54	54.00	11.46	Horizontal
2483.5	43.02	0.34	43.36	54.00	10.64	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPM12 / Beamforming / Core 0 + Core 1 / ePA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.975	71.69	98.41	26.72	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.425	55.10	74.00	18.90	Horizontal
2483.700	63.26	74.00	10.74	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	42.60	0.30	42.90	54.00	11.10	Horizontal
2483.5	47.62	0.30	47.92	54.00	6.08	Horizontal

Results: XHDRPM8 / Beamforming / Core 0 + Core 1 / ePA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.475	71.68	99.19	27.51	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2388.100	54.15	74.00	19.85	Horizontal
2483.525	62.87	74.00	11.13	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.800	42.34	0.35	42.69	54.00	11.31	Horizontal
2483.5	50.25	0.35	50.60	54.00	3.40	Horizontal

Band Edge Radiated Emissions (continued)**Results: 4DH5 / Beamforming / Core 0 + Core 1 / iPA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.225	46.44	85.87	39.43	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2372.525	53.14	74.00	20.86	Horizontal
2488.000	49.11	74.00	24.89	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.775	40.88	1.09	41.97	54.00	12.03	Horizontal
2483.5	37.19	1.09	38.28	54.00	15.72	Horizontal

Results: 8DH5 / Beamforming / Core 0 + Core 1 / iPA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2399.625	53.53	85.46	31.93	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.600	53.73	74.00	20.27	Horizontal
2486.125	54.04	74.00	19.96	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.000	41.31	1.09	42.40	54.00	11.60	Horizontal
2483.5	39.57	1.09	40.66	54.00	13.34	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPS2 / Beamforming / Core 0 + Core 1 / iPA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2398.775	44.04	85.59	41.55	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2378.750	53.21	74.00	20.79	Horizontal
2485.650	49.05	74.00	24.95	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	40.85	0.34	41.19	54.00	12.81	Horizontal
2483.5	37.25	0.34	37.59	54.00	16.41	Horizontal

Results: HDRPM12 / Beamforming / Core 0 + Core 1 / iPA**Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2400.0	57.75	83.37	25.62	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2389.525	52.78	74.00	21.22	Horizontal
2483.975	51.25	74.00	22.75	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	40.95	0.30	41.25	54.00	12.75	Horizontal
2483.525	38.99	0.30	39.29	54.00	14.71	Horizontal

Band Edge Radiated Emissions (continued)**Results: XHDRPM8 / Beamforming / Core 0 + Core 1 / iPA****Results: Non-Restricted Band / Peak**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2400.0	60.07	85.34	25.27	Horizontal

Results: Restricted Band / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2371.500	52.77	74.00	21.23	Horizontal
2485.800	52.34	74.00	21.66	Horizontal

Results: Restricted Band / Average

Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
2390.0	40.99	0.35	41.34	54.00	12.66	Horizontal
2483.5	39.55	0.35	39.90	54.00	14.10	Horizontal

--- END OF REPORT ---