



Emissions within U-NII-5 (continued)


Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	HDRPL16 (OQPSK)

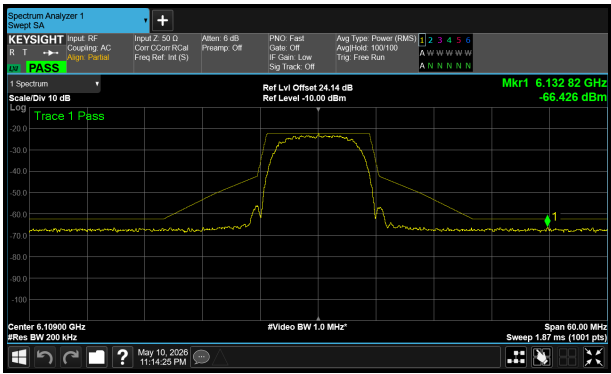


6106 MHz (Core 0)

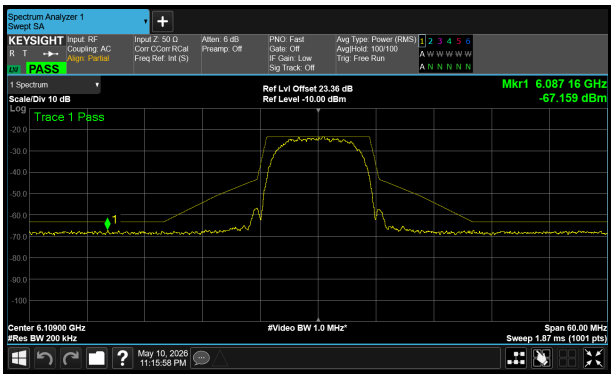


6106 MHz (Core 1)

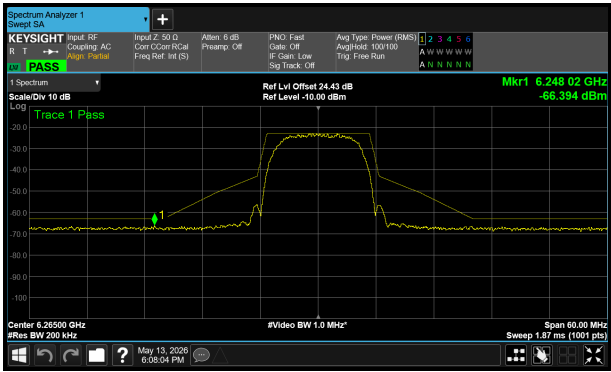


6265 MHz (Core 0)

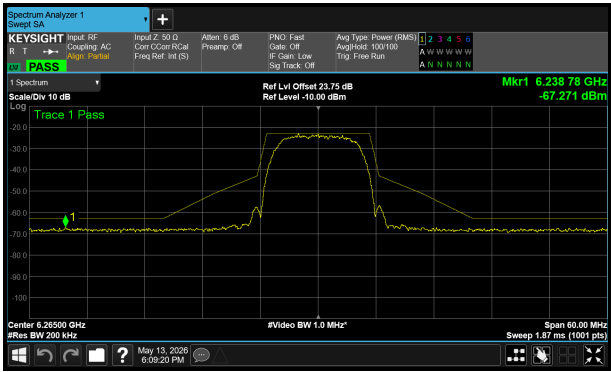

6265 MHz (Core 1)

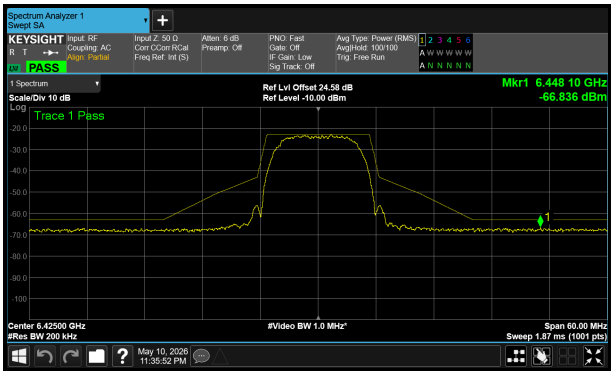


6425 MHz (Core 0)

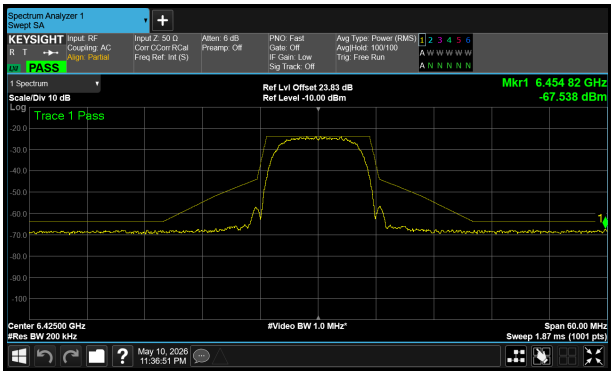


6425 MHz (Core 1)

Emissions within U-NII-5 (continued)


Antenna Configuration:	Beamforming	Mode:	HDR
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	XHDRPL32 (16QAM)

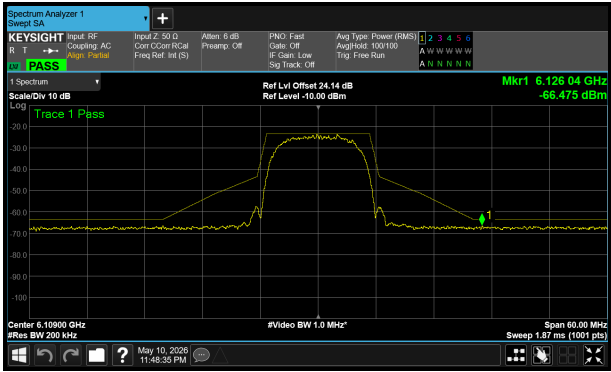


6106 MHz (Core 0)

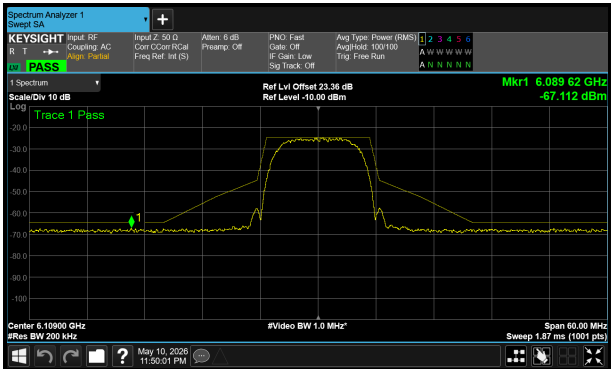


6106 MHz (Core 1)

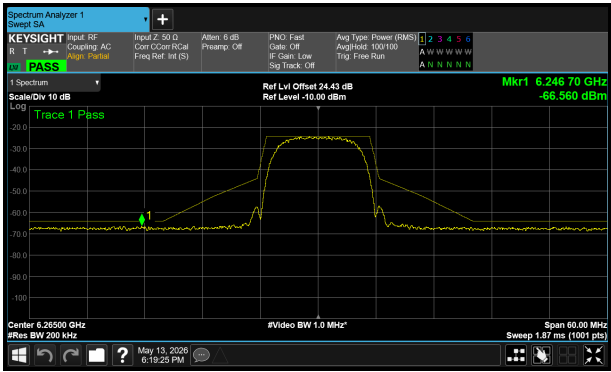


6265 MHz (Core 0)

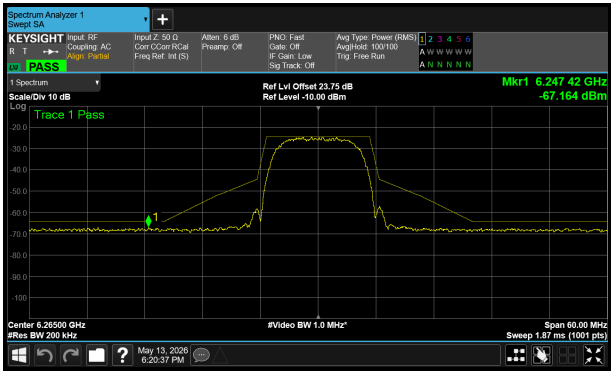

6265 MHz (Core 1)

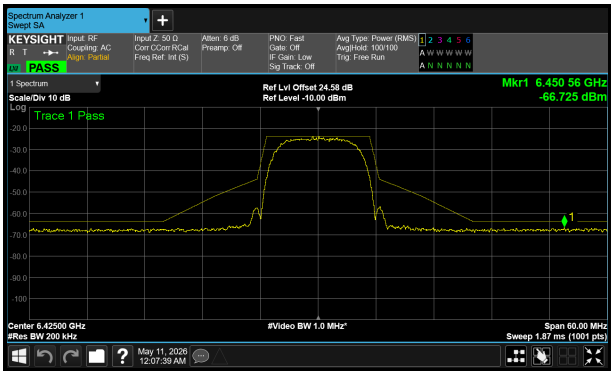







6425 MHz (Core 0)

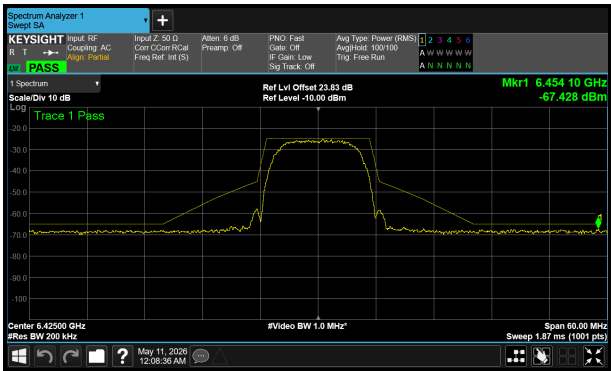

6425 MHz (Core 1)


Emissions within U-NII-5 (continued)

Antenna Configuration:	Beamforming	Mode:	HDT
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	HDT2 ($\pi/4$ -QPSK)

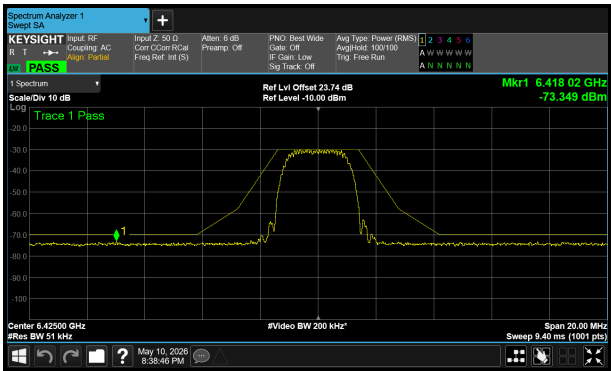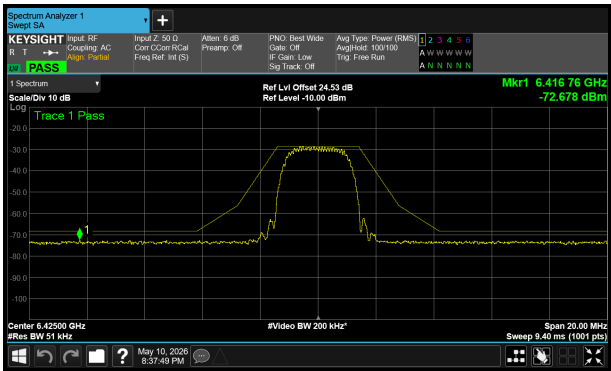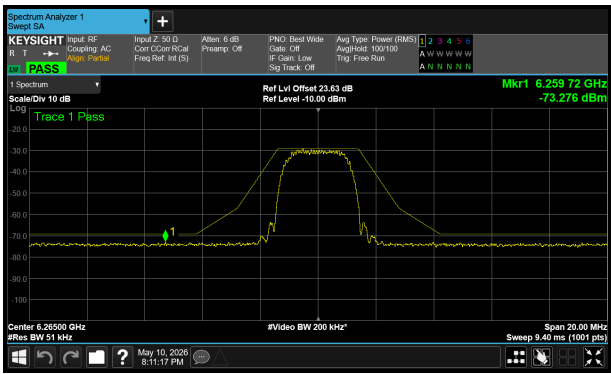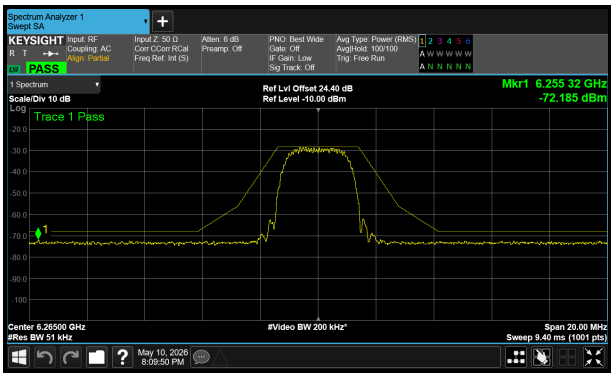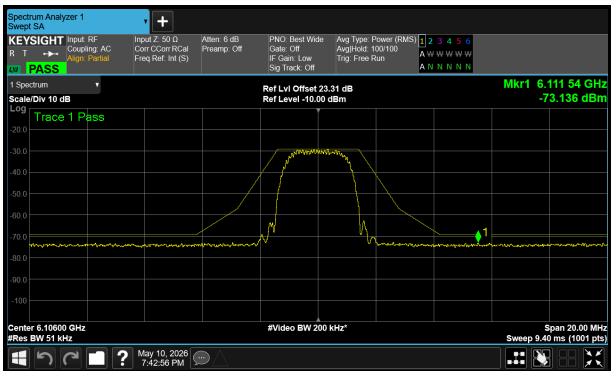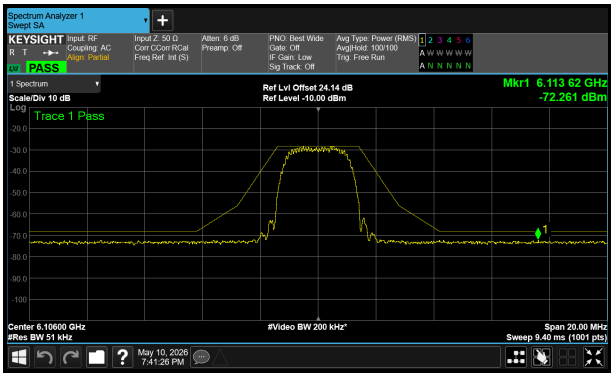


Emissions within U-NII-5 (continued)


Antenna Configuration:	Beamforming	Mode:	HDT
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	HDT4 (8PSK)

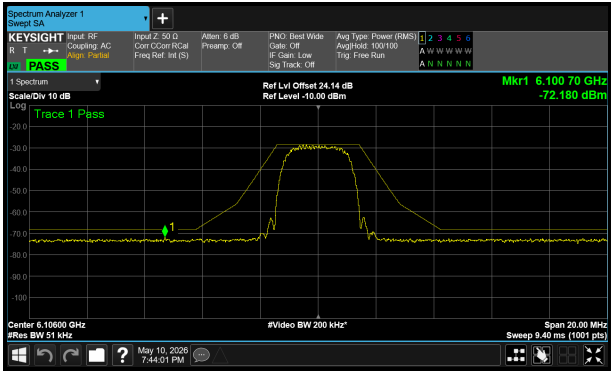


6106 MHz (Core 0)

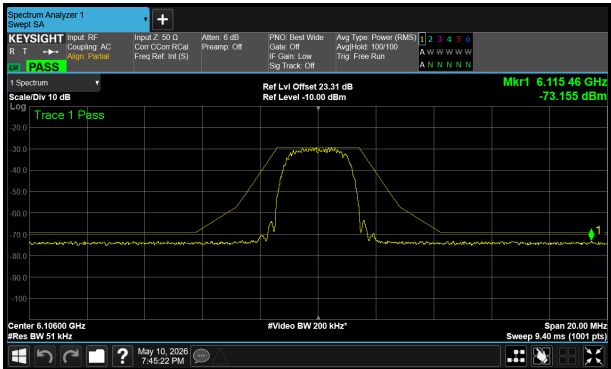


6106 MHz (Core 1)

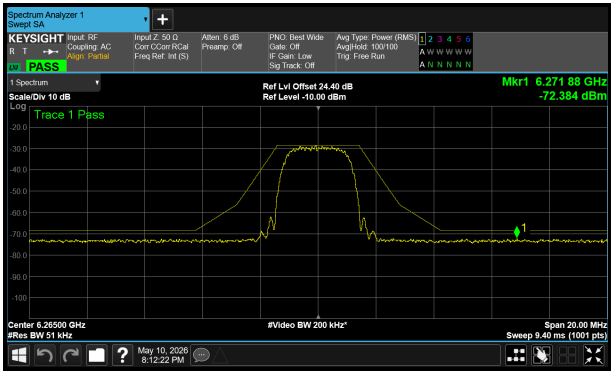


6265 MHz (Core 0)

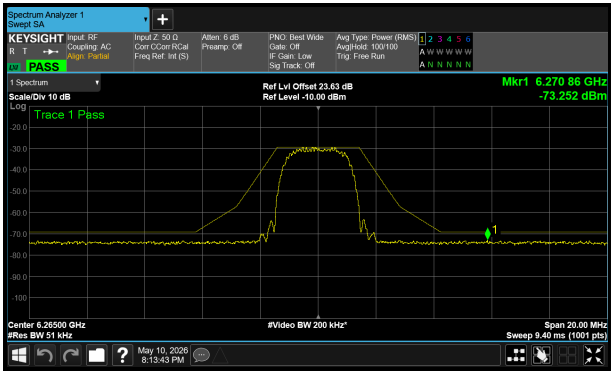

6265 MHz (Core 1)

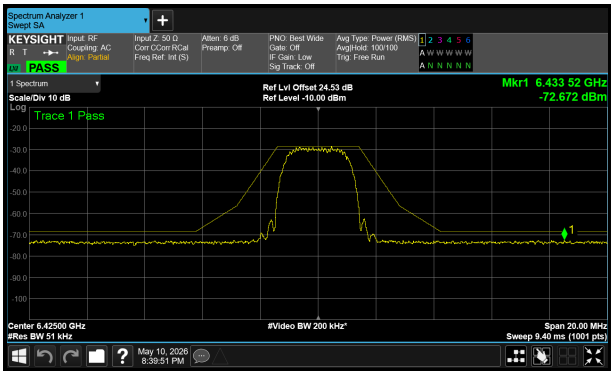


6425 MHz (Core 0)

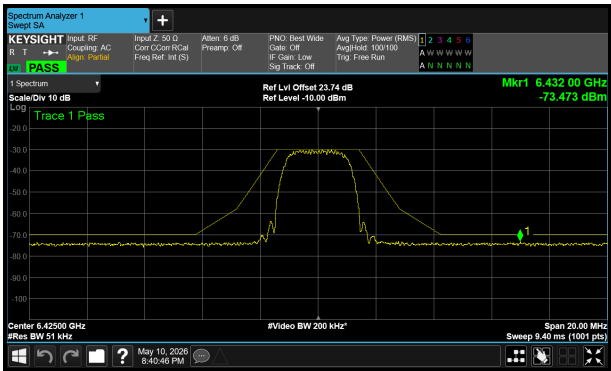


6425 MHz (Core 1)

Emissions within U-NII-5 (continued)


Antenna Configuration:	Beamforming	Mode:	HDT
Test Port:	1+2 (Core 0 + Core 1)	Rate/Modulation:	HDT8 (16QAM)

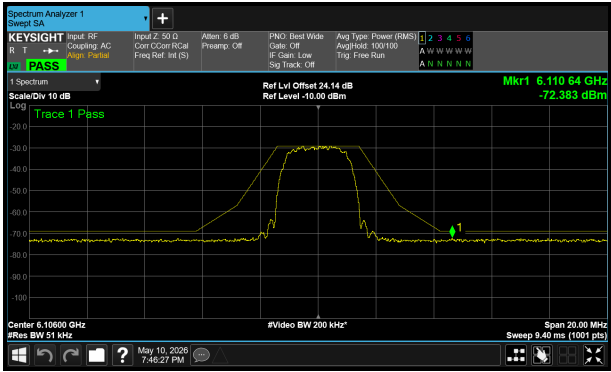


6106 MHz (Core 0)

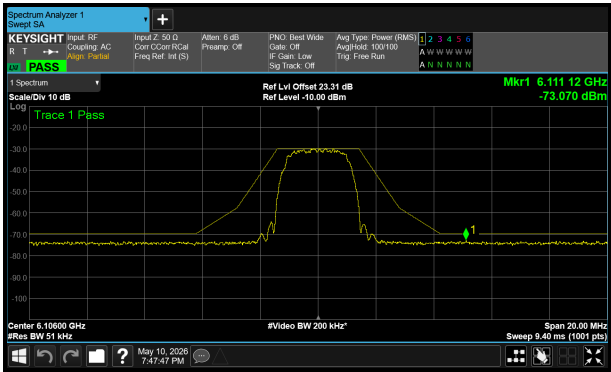


6106 MHz (Core 1)

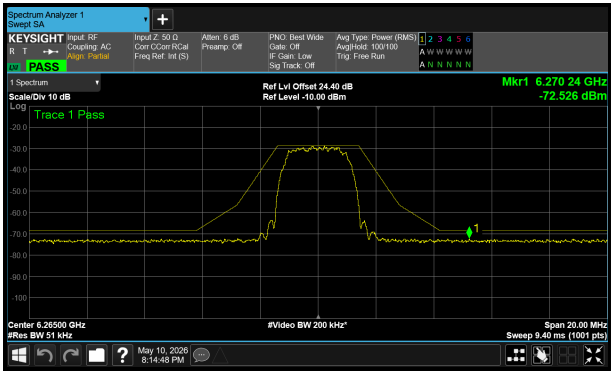


6265 MHz (Core 0)

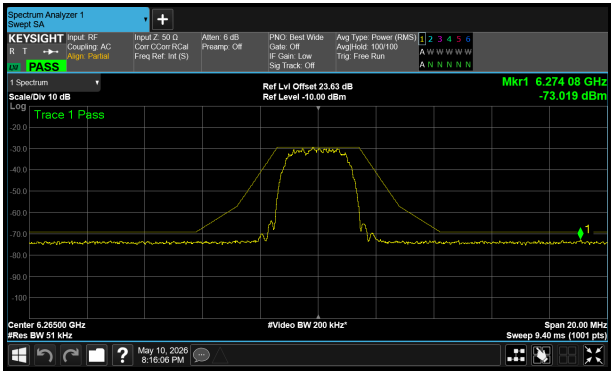

6265 MHz (Core 1)

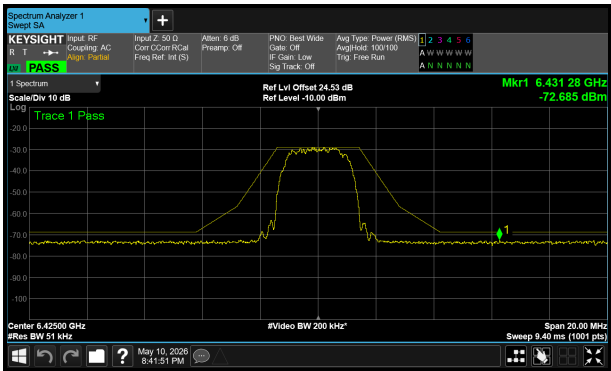

6425 MHz (Core 0)

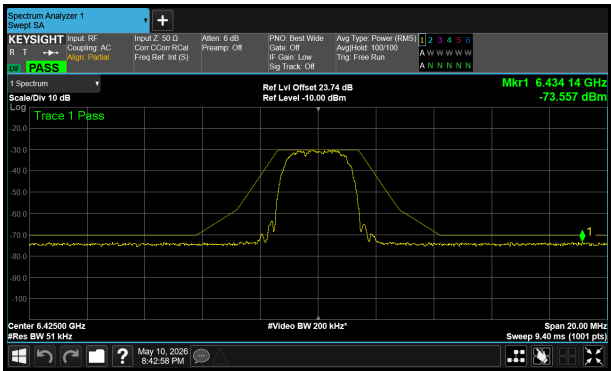

6425 MHz (Core 1)

4.6 Very Low Power Device Transmit Power Control

Test Summary:

Test Engineer:	Raghavendra Katti	Test Date:	22 June 2026
Test Sample Serial Number:	XP74MQW3LF		

FCC Clause:	Part 15.407(d)(10)
ISED Canada Clause:	RSS-248 4.5.6 / RSS-Gen 6.12
Test Method Used:	KDB 987594 D02 Section M

Environmental Conditions:


Temperature (°C):	24
Relative Humidity (%):	50

Note(s):

1. The EUT was connected to a companion device via a variable attenuator. A signal analyser was connected to the EUT via a directional coupler. The EUT was associated with the companion, and data transfer was initiated using iPerf. The test channel and data rate was determined by a script provided by the customer.
2. The variable attenuator was decreased to 0 dB to achieve the TPC Low condition declared by the customer, and the raw conducted PSD was measured.
3. The variable attenuator was then increased to 40 dB to achieve the TPC High condition declared by the customer, and the raw conducted PSD was measured.
4. The raw measured TPC High PSD was referenced to the maximum EIRP spectral density measured in section 4.4 of this report.
5. The delta between the raw measured TPC Low PSD and TPC High PSD was subtracted from the TPC High EIRP spectral density to obtain the TPC Low EIRP spectral density.

Very Low Power Device Transmit Power Control (continued)**Results:**

TPC Level	Frequency (MHz)	EIRP SD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
High	Hopping	-6.95	-5.00	1.95
Low	Hopping	-16.47	-11.00	5.47

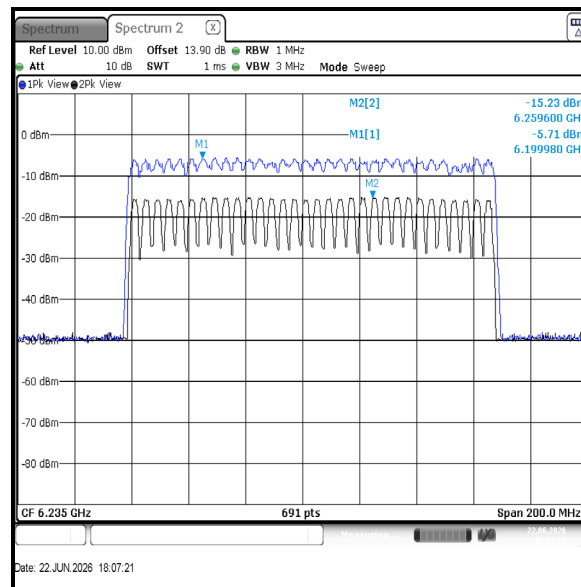

4.7 Contention Based Protocol

Test Summary:

Test Engineer:	Raghavendra Katti	Test Date:	22 June 2026
Test Sample Serial Number:	XP74MQW3LF		

FCC Clause:	Part 15.407(d)(6)
ISED Canada Clause:	RSS-248 4.7
Test Method Used:	KDB 987594 D02 Section I


Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	50

Note(s):

1. The EUT was associated with a companion device in a 'real-world' scenario and data transfer was initiated using iPerf. The mode and packet type were set automatically. All modes and packet types satisfy $BW_{EUT} < BW_{INC}$, therefore testing was performed in this mode only with one incumbent frequency.
2. A signal generator was configured to transmit a 10 MHz AWGN signal at the required frequency.
3. The signal analyser was monitored whilst increasing the AWGN signal level. The AWGN level at which the EUT ceased transmission was recorded. The test was repeated a further 9 times to confirm $\geq 90\%$ detection probability.
4. The lowest antenna gain was used in accordance with KDB 987594 D04 Section 1.5.
5. The 'AWGN Power' reported in the tables below includes the U.FL cable loss.
6. The EUT does not support channel puncturing or bandwidth reduction in NB-FHSS mode. The EUT blacklists frequencies where it detects an incumbent signal and temporarily reduces the hop set using its detect and avoid mechanism.

Example Incumbent Signal

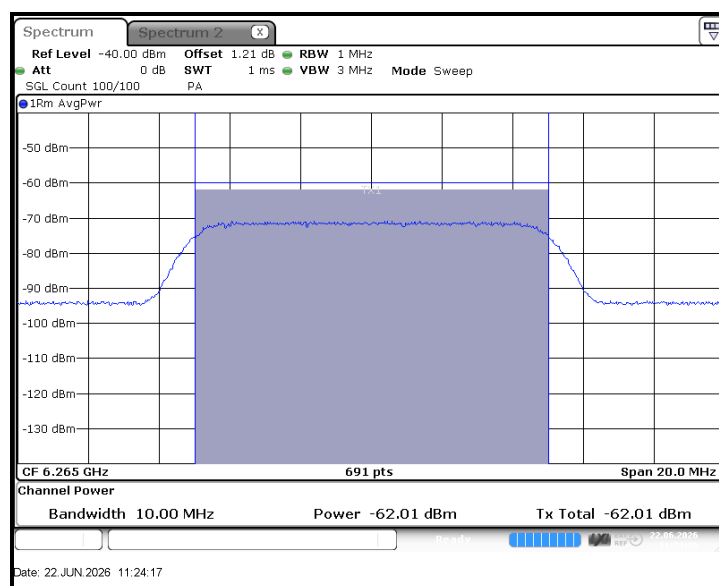


Contention Based Protocol (continued)

Results:

Frequency Range:	6105 MHz to 6425 MHz	Band:	U-NII-5
Limit Clause:	15.407(d)(6)	Test Method:	987594 D02 v03 II.I.
Limit (dBm):	-62	Incumbent Position:	N/A

Channel Frequency (MHz):	6265	Channel Bandwidth (MHz):	≤ 8
Mode:	Auto	99% Occupied Bandwidth (MHz):	< 10
Rate:	Auto	Incumbent Frequency (MHz):	6265
Antenna Gain (dBi):	0.9	Cable Loss (dB):	1.2

AWGN Power (dBm)	Adjusted Power (dBm)	Margin (dB)	EUT Detected Incumbent Signal	Detection Probability (%)
-82.0	-82.9	20.9	No	-
-68.5	-69.4	7.4	Minimum	-
-65.5	-66.4	4.4	Yes	100

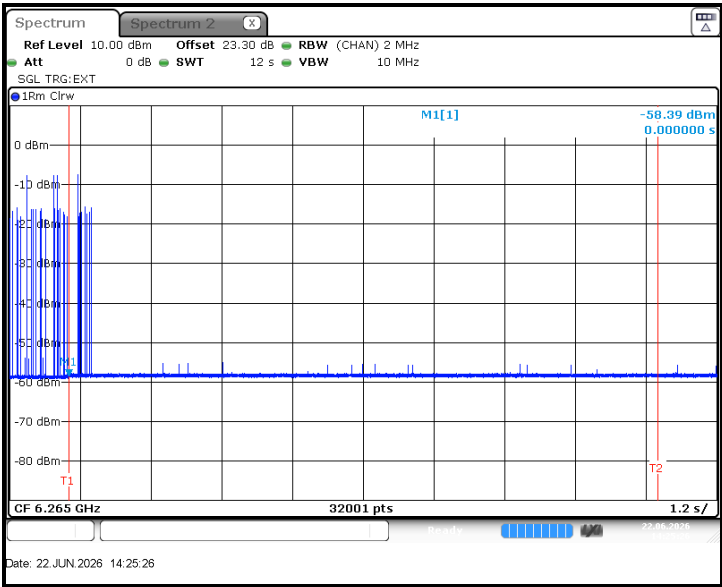

5 Radiated Test Results

5.1 Duty Cycle

Test Summary:

Test Engineers:	Prasanna Reddy, Max Chow, Andrew Harding & Andrew Edwards	Test Dates:	11 February 2026 & 12 February 2026
Test Sample Serial Number:	Y77CTQYGQ0		

FCC Clause:	Part 15.35(c)
ISED Canada Clause:	RSS-Gen 8.2
Test Method Used:	ANSI C63.10 Section 12.2.b)2)

Environmental Conditions:

Temperature (°C):	22
Relative Humidity (%):	41

Note(s):


1. In order to assist with the determination of the average level of fundamental and spurious emissions field strength, measurements were made of duty cycle to determine the transmission duration and the silent period time of the transmitter.
2. The duty cycle is identical for both SISO, Beamforming modes, ePA and iPA.
3. Example plots of the worst-case, for one configuration, can be seen below to show setting parameters comply with testing method/procedure. All other plots are archived on the UL IT server and available for inspection if required

Duty Cycle (continued)**Results:**

Antenna Configuration	Test Port	Mode	Test Frequency (MHz)	Duty Cycle (%)	Period (ms)	Width (ms)	Correction Factor (dB)
Beamforming	Core 0 + Core 1	BDR	6106	76.38	3.76	2.872	1.17
Beamforming	Core 0 + Core 1	LE 1M	6106	84.70	2.509	2.125	0.72
Beamforming	Core 0 + Core 1	LE2M	6106	56.73	1.879	1.066	2.46
Beamforming	Core 0 + Core 1	4-DH5	6106	77.98	3.755	2.928	1.08
Beamforming	Core 0 + Core 1	8-DH5	6106	78.06	3.751	2.928	1.08
Beamforming	Core 0 + Core 1	HDRPS2	6106	92.37	17.52	16.184	0.34
Beamforming	Core 0 + Core 1	HDRPM12	6107	93.34	2.506	2.339	0.30
Beamforming	Core 0 + Core 1	XHDRPM8	6107	92.11	8.778	8.085	0.36
Beamforming	Core 0 + Core 1	HDRPL8	6109	94.89	3.755	3.563	0.23
Beamforming	Core 0 + Core 1	HDRPL24	6109	87.52	1.25	1.094	0.58
Beamforming	Core 0 + Core 1	XHDRPL24	6109	83.12	2.506	2.083	0.80
Beamforming	Core 0 + Core 1	HDT3	6106	94.63	1.528	1.446	0.24
Beamforming	Core 0 + Core 1	HDT4	6106	93.17	1.186	1.105	0.31
Beamforming	Core 0 + Core 1	HDT6	6106	90.92	0.837	0.761	0.41

Example Plot / Worst Case Mode

Antenna Configuration:	Beamforming	Mode:	LE2M
Test Port:	Core 0+ Core 1	Rate/Modulation:	LE2M (GFSK)

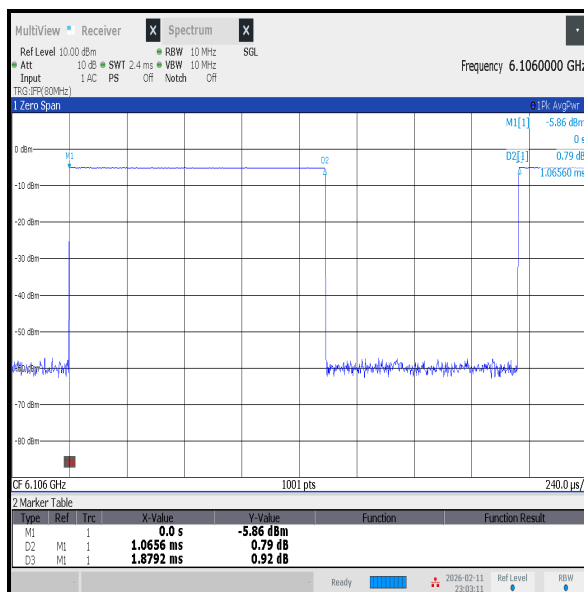

5.2 Out of Band Radiated Emissions <1 GHz

Test Summary:

Test Engineers:	Robert English, Max Passell & Andrew Edwards	Test Dates:	23 February 2026 & 24 February 2026
Test Sample Serial Number:	LWNHJ73FMF		

FCC Clause:	Parts 15.407(b)(6)(9)(10) & 15.209(a)
ISED Canada Clause:	RSS-248 4.6.2 a. / RSS-Gen 6.13 & 8.9
Test Method Used:	ANSI C63.10 Sections 6.3, 6.5 and 12.7
Frequency Range	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	20 to 23
Relative Humidity (%):	35 to 46

Note(s):


1. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
2. All other emissions shown on the pre-scans were investigated and found to be ambient, or > 20 dB below the appropriate limit or below the noise floor of the measurement system.
3. Measurements from 30 MHz to 1 GHz were performed in a semi-anechoic chamber (Asset Number K226203) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
4. Final measurements were performed on the marker frequencies and the results recorded in the table below. The test receiver resolution bandwidth was set to 120 kHz, using a CISPR peak detector.

Out of Band Radiated Emissions (continued)

Results: BDR / Beamforming / ePA

Results: Peak / Middle Channel

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Polarity
447.346	35.21	46.00	10.79	Vertical

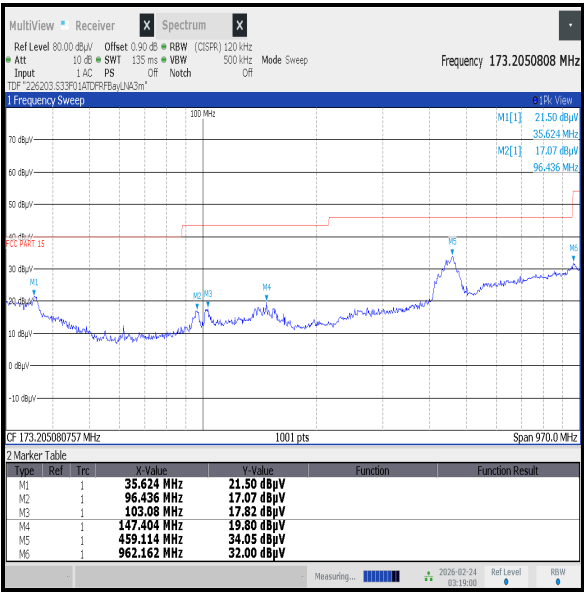

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

5.3 Out of Band Radiated Emissions >1 GHz

Test Summary:

Test Engineers:	Robert English, Max Passell, Atiqul Tanvir & Andrew Edwards	Test Dates:	18 February 2026 to 05 June 2026
Test Sample Serial Number:	LWNHJ73FMF		

FCC Clause:	Part 15.407(b)(6),(10) & 15.209(a)
ISED Canada Clause:	RSS-248 4.6.2 a. / RSS-Gen 6.13 & 8.9
Test Method Used:	KDB 987594 II.G. & ANSI C63.10 Sections 6.3, 6.6 & 12.7
Frequency Range	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	19 to 22
Relative Humidity (%):	38 to 42

Note(s):

1. In accordance with KDB 987594 II.G., unwanted emissions are measured using an RMS detector and 15.35(b) (RSS-Gen 8.1) applies where peak emissions must be limited to no more than 20 dB above the average limit. The e.i.r.p. limit lines of -27 dBm/MHz (average) and -7 dBm/MHz (peak) were converted to field strength at 3m using a conversion factor of 95.2.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak and average noise floor readings of the measuring receiver were recorded as shown in the tables below.
3. The emission shown on the 1 GHz to 7.5 GHz plot is the EUT fundamental.
4. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K226202/ K226203) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Out of Band Radiated Emissions (U-NII-5) (continued)





Results: BDR / Beamforming / Core 0 + Core 1 / ePA

Results: Middle Channel / Field Strength / Peak

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarity
7458.250	56.00	74.00	18.00	Horizontal

Results: Middle Channel / Field Strength / Average

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarity
7442.250	47.18	54.00	6.82	Horizontal

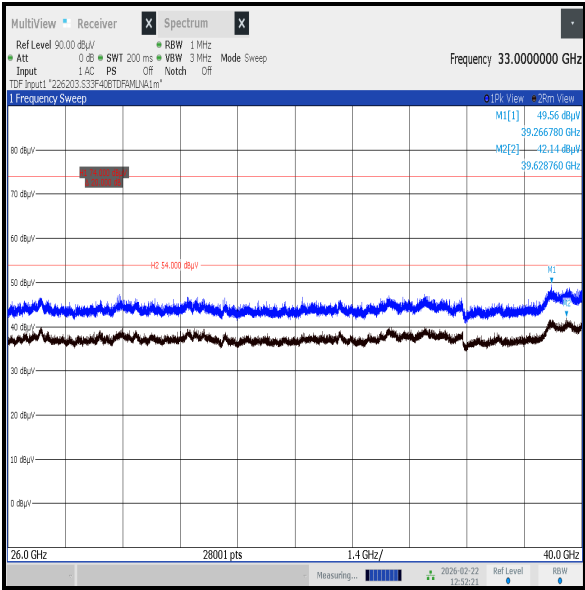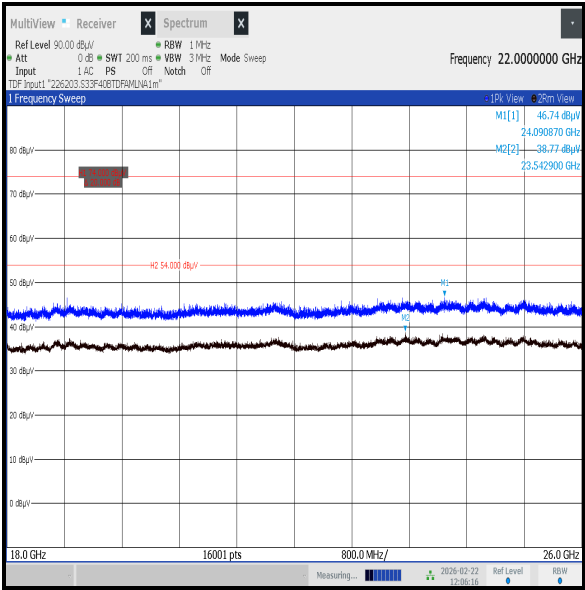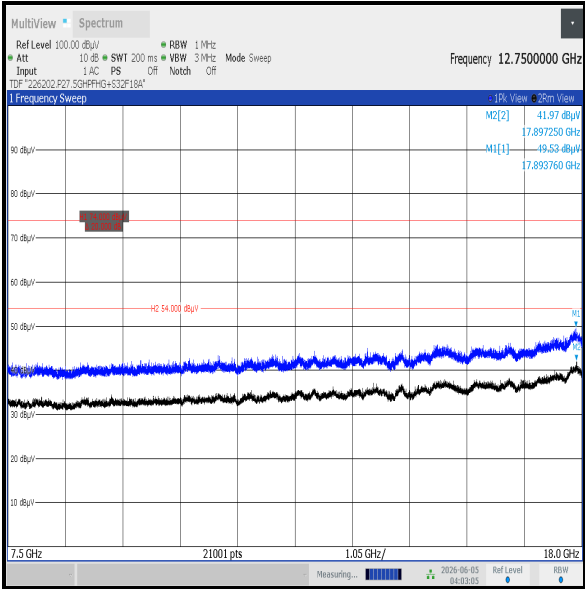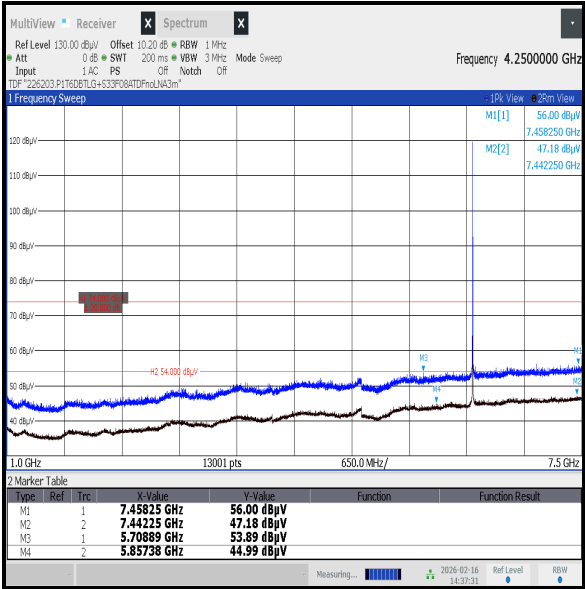

5.4 Band Edge Radiated Emissions

Test Summary:

Test Engineers:	Prasanna Reddy, Max Chow, Andrew Harding & Andrew Edwards	Test Dates:	11 February 2026 & 12 February 2026
Test Sample Serial Number:	Y77CTQYGQ0		

FCC Clause:	Part 15.407(b)(6)
ISED Canada Clause:	RSS-248 4.6.2 a
Test Method Used:	KDB 987594 section G & ANSI C63.10 Sections 6.10 & 12.7

Environmental Conditions:

Temperature (°C):	22
Relative Humidity (%):	41

Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. For all average measurements in this section, 7462 sweeps were used. This satisfies the requirement for the minimum number of sweeps, as stated in ANSI C63.10 Section 12.7.7.2 f).
3. In accordance with ANSI C63.10 Section 12.7.7.2.g), for average measurements, modes where the EUT was transmitting < 98% duty cycle, the duty cycle correction factor calculated in section 5.1 was added to the measured result.
4. In accordance with KDB 987594 section G, 15.35(b) / RSS-Gen 8.1 applies where the peak radio frequency emissions limit is 20 dB above the maximum permitted average emission limit.
5. Only lower band edge results have been reported since top channel is ≥ 700 MHz away from the upper band edge. Upper band edge results are archived on the UL IT server and available for inspection if required.
6. Example plots of the worst-case configuration, can be seen below to show setting parameters comply with testing method/procedure. All other plots are archived on the UL IT server and available for inspection if required.

Band Edge Radiated Emissions (continued)**Example Plot / Worst case Mode / HDRPL24 / Beamforming / Core 0 + Core 1 / ePA****Lower Band Edge****Results: BDR / SISO / Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Polarity
5915.195	59.23	88.20	28.97	Horizontal

Results: Average

Frequency (MHz)	Level (dBμV/m)	Duty Cycle Correction (dB)	Corrected Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Polarity
5776.260	46.82	1.17	47.99	68.20	20.21	Horizontal

Results: LE 1M / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Polarity
5768.305	59.14	88.20	29.06	Horizontal

Results: Average

Frequency (MHz)	Level (dBμV/m)	Duty Cycle Correction (dB)	Corrected Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Polarity
5778.850	46.84	0.72	47.56	68.20	20.64	Horizontal

Band Edge Radiated Emissions (continued)**Results: LE 2M / SISO / Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5805.305	58.84	88.20	29.36	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5777.925	46.79	2.46	49.25	68.20	18.95	Horizontal

Results: 4DH5 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5793.465	59.09	88.20	29.11	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5776.075	46.81	1.08	47.89	68.20	20.31	Horizontal

Results: 8DH5 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5763.865	58.75	88.20	29.45	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5791.106	46.79	1.08	47.87	68.20	20.33	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPS2 / SISO / Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5858.215	58.89	88.20	29.31	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5778.665	46.86	0.34	47.20	68.20	21.00	Horizontal

Results: HDRPM12 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5762.200	58.63	88.20	29.57	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5778.665	46.85	0.30	47.15	68.20	21.05	Horizontal

Results: XHDRPM8 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5802.530	59.15	88.20	29.05	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5779.405	47.23	0.36	47.59	68.20	20.61	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPL8 / SISO / Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5837.600	58.91	88.20	29.29	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5789.340	46.86	0.23	47.09	68.20	21.11	Horizontal

Results: HDRPL24 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5769.770	59.55	88.20	28.65	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5758.750	46.83	0.58	47.41	68.20	20.79	Horizontal

Results: XHDRPL24 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5792.950	58.74	88.20	29.46	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5778.700	46.83	0.80	47.63	68.20	20.57	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDT3 / SISO / Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5764.790	59.21	88.20	28.99	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5788.285	46.82	0.24	47.06	68.20	21.14	Horizontal

Results: HDT4 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5786.065	59.25	88.20	28.95	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5781.810	46.85	0.31	47.16	68.20	21.04	Horizontal

Results: HDT6 / SISO / Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5811.965	58.75	88.20	29.45	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5791.060	46.82	0.41	47.23	68.20	20.97	Horizontal

Band Edge Radiated Emissions (continued)**Results: BDR / SISO / Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5814.555	58.82	88.20	29.38	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5779.405	46.73	1.17	47.90	68.20	20.30	Horizontal

Results: LE 1M / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5851.000	58.52	88.20	29.68	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5775.335	46.73	0.72	47.45	68.20	20.75	Horizontal

Results: LE 2M / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5777.370	59.09	88.20	29.11	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5779.405	46.75	2.46	49.21	68.20	18.99	Horizontal

Band Edge Radiated Emissions (continued)**Results: 4DH5 / SISO / Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5789.950	59.14	88.20	29.06	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5777.740	46.75	1.08	47.83	68.20	20.37	Horizontal

Results: 8DH5 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5766.825	58.94	88.20	29.26	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5779.035	46.75	1.08	47.83	68.20	20.37	Horizontal

Results: HDRPS2 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5760.905	58.92	88.20	29.28	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5761.460	46.74	0.34	47.08	68.20	21.12	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPM12 / SISO / Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5802.160	58.89	88.20	29.31	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5777.925	46.78	0.30	47.08	68.20	21.12	Horizontal

Results: XHDRPM8 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5777.925	58.84	88.20	29.36	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5780.515	46.76	0.36	47.12	68.20	21.08	Horizontal

Results: HDRPL8 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5745.070	58.62	88.20	29.58	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5762.930	46.71	0.23	46.94	68.20	21.26	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPL24 / SISO / Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5757.990	58.80	88.20	29.40	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5763.120	46.72	0.58	47.30	68.20	20.90	Horizontal

Results: XHDRPL24 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5817.460	58.56	88.20	29.64	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5777.560	46.75	0.80	47.55	68.20	20.65	Horizontal

Results: HDT3 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5817.885	59.04	88.20	29.16	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5778.480	46.71	0.24	46.95	68.20	21.25	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDT4 / SISO / Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5887.815	58.80	88.20	29.40	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5778.110	46.73	0.31	47.04	68.20	21.16	Horizontal

Results: HDT6 / SISO / Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5781.625	59.26	88.20	28.94	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5779.035	46.72	0.41	47.13	68.20	21.07	Horizontal

Results: BDR / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5776.075	58.92	88.20	29.28	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5779.775	46.82	1.17	47.99	68.20	20.21	Horizontal

Band Edge Radiated Emissions (continued)**Results: LE 1M / Beamforming / Core 0 + Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5778.480	58.58	88.20	29.62	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5779.775	46.86	0.72	47.58	68.20	20.62	Horizontal

Results: LE 2M / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5831.205	59.05	88.20	29.15	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5775.750	46.78	2.46	49.24	68.20	18.96	Horizontal

Results: 4DH5 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5772.005	58.56	88.20	29.64	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5778.480	46.83	1.08	47.91	68.20	20.29	Horizontal

Band Edge Radiated Emissions (continued)**Results: 8DH5 / Beamforming / Core 0 + Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5850.260	58.99	88.20	29.21	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5779.035	46.85	1.08	47.93	68.20	20.27	Horizontal

Results: HDRPS2 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5811.965	59.60	88.20	28.60	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5925	46.81	0.34	47.15	68.20	21.05	Horizontal

Results: HDRPM12 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5822.510	59.25	88.20	28.95	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5775.150	46.81	0.30	47.11	68.20	21.09	Horizontal

Band Edge Radiated Emissions (continued)**Results: XHDRPM8 / Beamforming / Core 0 + Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5797.350	58.95	88.20	29.25	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5791.060	46.82	0.36	47.18	68.20	21.02	Horizontal

Results: HDRPL8 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5763.500	58.65	88.20	29.55	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5778.700	46.86	0.23	47.09	68.20	21.11	Horizontal

Results: HDRPL24 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5747.920	59.38	88.20	28.82	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5788.770	46.83	0.58	47.41	68.20	20.79	Horizontal

Band Edge Radiated Emissions (continued)**Results: XHDRPL24 / Beamforming / Core 0 + Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5835.700	59.77	88.20	28.43	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5776.420	46.85	0.80	47.65	68.20	20.55	Horizontal

Results: HDT3 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5740.740	59.20	88.20	29.00	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5778.110	46.81	0.24	47.05	68.20	21.15	Horizontal

Results: HDT4 / Beamforming / Core 0 + Core 1 / ePA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5767.935	59.32	88.20	28.88	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5925	59.32	0.31	59.63	68.20	8.57	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDT6 / Beamforming / Core 0 + Core 1 / ePA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5763.865	59.30	88.20	28.90	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5788.655	46.81	0.41	47.22	68.20	20.98	Horizontal

Results: BDR / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5770.525	58.86	88.20	29.34	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5778.295	46.63	1.17	47.80	68.20	20.40	Horizontal

Results: LE 1M / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5772.930	58.86	88.20	29.34	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5779.960	46.60	0.72	47.32	68.20	20.88	Horizontal

Band Edge Radiated Emissions (continued)**Results: LE 2M / Beamforming / Core 0 + Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5813.445	58.34	88.20	29.86	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5764.790	46.61	2.46	49.07	68.20	19.13	Horizontal

Results: 4DH5 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5756.650	58.55	88.20	29.65	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5776.075	46.66	1.08	47.74	68.20	20.46	Horizontal

Results: 8DH5 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5785.695	59.09	88.20	29.11	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5777.000	46.61	1.08	47.69	68.20	20.51	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPS2 / Beamforming / Core 0 + Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5750.175	58.72	88.20	29.48	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5750.175	46.73	0.34	47.07	68.20	21.13	Horizontal

Results: HDRPM12 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5860.250	58.95	88.20	29.25	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5780.700	46.70	0.30	47.00	68.20	21.20	Horizontal

Results: XHDRPM8 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5843.230	58.87	88.20	29.33	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5780.330	46.70	0.36	47.06	68.20	21.14	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDRPL8 / Beamforming / Core 0 + Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5762.550	59.13	88.20	29.07	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5761.600	46.72	0.23	46.95	68.20	21.25	Horizontal

Results: HDRPL24 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5767.870	58.94	88.20	29.26	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5780.790	46.71	0.58	47.29	68.20	20.91	Horizontal

Results: XHDRPL24 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5790.480	58.85	88.20	29.35	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5761.790	46.71	0.80	47.51	68.20	20.69	Horizontal

Band Edge Radiated Emissions (continued)**Results: HDT3 / Beamforming / Core 0 + Core 1 / iPA****Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5811.225	58.96	88.20	29.24	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5776.260	46.72	0.24	46.96	68.20	21.24	Horizontal

Results: HDT4 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5740.740	58.98	88.20	29.22	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5776.630	46.69	0.31	47.00	68.20	21.20	Horizontal

Results: HDT6 / Beamforming / Core 0 + Core 1 / iPA**Results: Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5791.615	59.19	88.20	29.01	Horizontal

Results: Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle Correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Antenna Polarity
5779.405	46.71	0.41	47.12	68.20	21.08	Horizontal

--- END OF REPORT ---