


Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	1.07	-	-	-	-	3.50	4.57	17.00	12.43
6145	3.27	-	-	-	-	2.60	5.87	17.00	11.13
6385	2.38	-	-	-	-	0.90	3.28	17.00	13.72

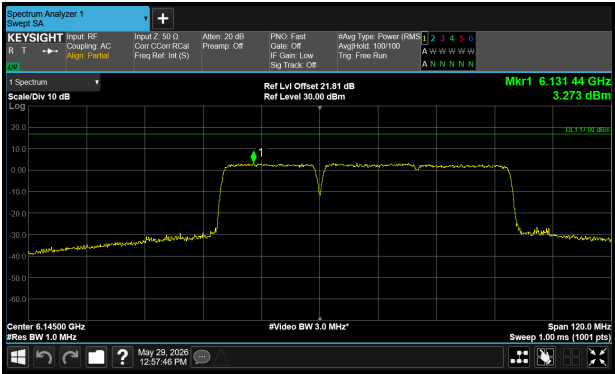

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-0.88	-	-	-	-	3.50	2.62	17.00	14.38
6185	-0.08	-	-	-	-	2.60	2.52	17.00	14.48
6345	-0.48	-	-	-	-	0.90	0.42	17.00	16.58

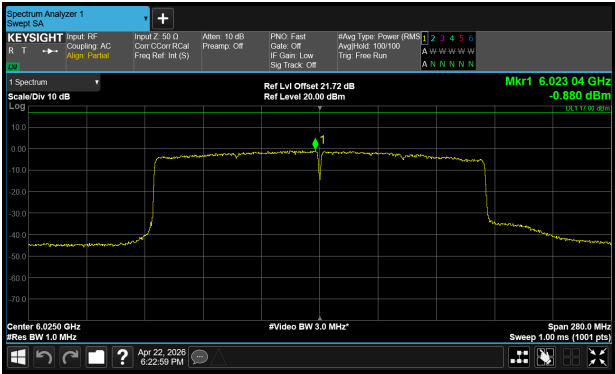

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-0.36	-	-	-	-	3.50	3.14	17.00	13.86
6185	1.43	-	-	-	-	2.60	4.03	17.00	12.97
6345	0.30	-	-	-	-	0.90	1.20	17.00	15.80

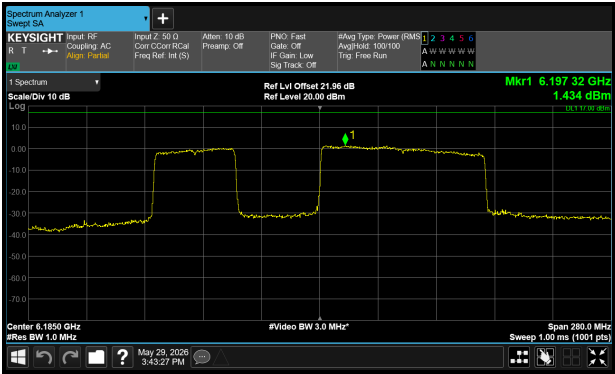

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-0.95	-	-	-	-	3.50	2.55	17.00	14.45
6185	0.45	-	-	-	-	2.60	3.05	17.00	13.95
6345	-0.26	-	-	-	-	0.90	0.64	17.00	16.36

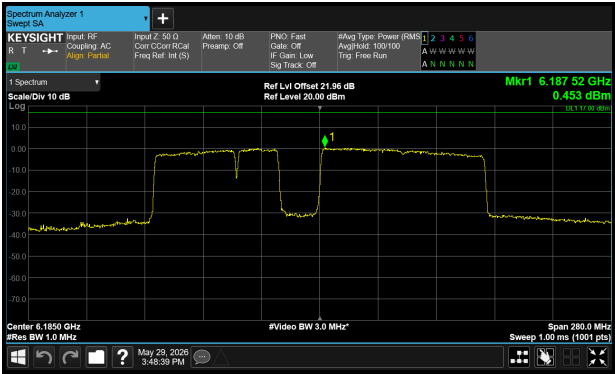

Maximum EIRP SD (U-NII-5) / SP (continued)**Results: SP / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	8.54	-	-	-	3.30	11.84	17.00	5.16
6175	-	8.61	-	-	-	2.90	11.51	17.00	5.49
6415	-	7.83	-	-	-	2.60	10.43	17.00	6.57

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	-	4.71	-	-	-	3.30	8.01	17.00	8.99
6165	-	5.66	-	-	-	2.90	8.56	17.00	8.44
6405	-	4.89	-	-	-	2.60	7.49	17.00	9.51

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	-	2.93	-	-	-	3.30	6.23	17.00	10.77
6145	-	2.72	-	-	-	2.90	5.62	17.00	11.38
6385	-	2.14	-	-	-	2.60	4.74	17.00	12.26

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	-0.40	-	-	-	3.30	2.90	17.00	14.10
6185	-	0.43	-	-	-	2.90	3.33	17.00	13.67
6345	-	-0.13	-	-	-	2.60	2.47	17.00	14.53

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	8.40	-	-	-	3.30	11.70	17.00	5.30
6175	-	7.85	-	-	-	2.90	10.75	17.00	6.25
6415	-	7.75	-	-	-	2.60	10.35	17.00	6.65

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	8.51	-	-	-	3.30	11.81	17.00	5.19
6175	-	8.16	-	-	-	2.90	11.06	17.00	5.94
6415	-	8.71	-	-	-	2.60	11.31	17.00	5.69

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	9.04	-	-	-	3.30	12.34	17.00	4.66
6175	-	9.77	-	-	-	2.90	12.67	17.00	4.33
6415	-	9.15	-	-	-	2.60	11.75	17.00	5.25

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	9.57	-	-	-	3.30	12.87	17.00	4.13
6175	-	9.76	-	-	-	2.90	12.66	17.00	4.34
6415	-	9.43	-	-	-	2.60	12.03	17.00	4.97

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	9.00	-	-	-	3.30	12.74	17.00	4.26
6175	-	9.38	-	-	-	2.90	12.28	17.00	4.72
6415	-	8.50	-	-	-	2.60	11.10	17.00	5.90

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	-	9.44	-	-	-	3.30	12.74	17.00	4.26
6175	-	9.34	-	-	-	2.90	12.24	17.00	4.76
6415	-	8.40	-	-	-	2.60	11.00	17.00	6.00

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	-	4.85	-	-	-	3.30	8.15	17.00	8.85
6165	-	5.05	-	-	-	2.90	7.95	17.00	9.05
6405	-	4.63	-	-	-	2.60	7.23	17.00	9.77

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	-	2.22	-	-	-	3.30	5.52	17.00	11.48
6145	-	1.95	-	-	-	2.90	4.85	17.00	12.15
6385	-	1.76	-	-	-	2.60	4.36	17.00	12.64

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	-	1.03	-	-	-	3.30	4.33	17.00	12.67
6145	-	3.33	-	-	-	2.90	6.23	17.00	10.77
6385	-	2.61	-	-	-	2.60	5.21	17.00	11.79

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	-0.62	-	-	-	3.30	2.68	17.00	14.32
6185	-	-0.30	-	-	-	2.90	2.60	17.00	14.40
6345	-	-0.85	-	-	-	2.60	1.75	17.00	15.25

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	-0.06	-	-	-	3.30	3.24	17.00	13.76
6185	-	1.67	-	-	-	2.90	4.57	17.00	12.43
6345	-	0.14	-	-	-	2.60	2.74	17.00	14.26

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-	-1.00	-	-	-	3.30	2.30	17.00	14.70
6185	-	0.83	-	-	-	2.90	3.73	17.00	13.27
6345	-	-0.31	-	-	-	2.60	2.29	17.00	14.71

Maximum EIRP SD (U-NII-5) / SP (continued)**Results: SP / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	5.78	5.89	-	-	8.85	6.41	15.26	17.00	1.74
6175	6.93	7.13	-	-	10.04	5.76	15.80	17.00	1.20
6415	7.34	7.48	-	-	10.42	4.80	15.22	17.00	1.78

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	3.93	3.97	-	-	6.96	6.41	13.37	17.00	3.63
6165	4.99	5.43	-	-	8.23	5.76	13.99	17.00	3.01
6405	4.69	4.84	-	-	7.78	4.80	12.58	17.00	4.42

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	1.86	1.97	-	-	4.93	6.41	11.34	17.00	5.66
6145	2.11	2.55	-	-	5.35	5.76	11.11	17.00	5.89
6385	1.86	2.24	-	-	5.07	4.80	9.87	17.00	7.13

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-0.71	-0.49	-	-	2.42	6.41	8.83	17.00	8.17
6185	0.91	1.04	-	-	3.99	5.76	9.75	17.00	7.25
6345	0.73	0.78	-	-	3.77	4.80	8.57	17.00	8.43

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	5.72	5.95	-	-	8.85	6.41	15.26	17.00	1.74
6175	6.38	6.99	-	-	9.70	5.76	15.46	17.00	1.54
6415	6.97	7.38	-	-	10.19	4.80	14.99	17.00	2.01

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	4.82	5.02	-	-	7.93	6.41	14.34	17.00	2.66
6175	5.08	5.74	-	-	8.43	5.76	14.19	17.00	2.81
6415	6.23	6.87	-	-	9.57	4.80	14.37	17.00	2.63

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	5.07	5.43	-	-	8.26	6.41	14.67	17.00	2.33
6175	5.22	6.56	-	-	8.95	5.76	14.72	17.00	2.28
6415	6.00	7.37	-	-	9.75	4.80	14.55	17.00	2.45

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	5.68	6.08	-	-	8.90	6.41	15.31	17.00	1.69
6175	5.83	6.77	-	-	9.34	5.76	15.10	17.00	1.90
6415	6.39	7.44	-	-	9.95	4.80	14.76	17.00	2.24

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	4.99	5.86	-	-	8.46	6.41	14.87	17.00	2.13
6175	5.76	7.03	-	-	9.45	5.76	15.21	17.00	1.79
6415	5.83	6.94	-	-	9.43	4.80	14.23	17.00	2.77

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	5.58	6.22	-	-	8.92	6.41	15.33	17.00	1.67
6175	5.27	6.67	-	-	9.03	5.76	14.80	17.00	2.20
6415	6.11	7.31	-	-	9.76	4.80	14.56	17.00	2.44

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	4.94	5.15	-	-	8.06	6.41	14.47	17.00	2.53
6165	4.89	5.06	-	-	7.98	5.76	13.75	17.00	3.25
6405	4.36	4.50	-	-	7.44	4.80	12.24	17.00	4.76

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	1.81	1.72	-	-	4.78	6.41	11.19	17.00	5.81
6145	1.54	1.91	-	-	4.74	5.76	10.50	17.00	6.50
6385	1.26	1.54	-	-	4.41	4.80	9.21	17.00	7.79

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	0.14	0.74	-	-	3.46	6.41	9.87	17.00	7.13
6145	1.92	3.03	-	-	5.52	5.76	11.28	17.00	5.72
6385	1.48	2.79	-	-	5.19	4.80	9.99	17.00	7.01

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-1.03	-1.06	-	-	1.97	6.41	8.38	17.00	8.62
6185	-0.52	-0.18	-	-	2.66	5.76	8.42	17.00	8.58
6345	-1.38	-0.85	-	-	1.90	4.80	6.70	17.00	10.30

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-2.42	-1.12	-	-	1.29	6.41	7.70	17.00	9.30
6185	0.05	1.46	-	-	3.82	5.76	9.58	17.00	7.42
6345	-1.12	0.03	-	-	2.50	4.80	7.30	17.00	9.70

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-3.25	-1.91	-	-	0.48	6.41	6.89	17.00	10.11
6185	-0.47	0.92	-	-	3.29	5.76	9.05	17.00	7.95
6345	-1.33	-0.09	-	-	2.34	4.80	7.15	17.00	9.85

Maximum EIRP SD (U-NII-5) / SP (continued)**Results: SP / MIMO SDM**

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	8.32	8.30	-	-	11.32	3.40	14.72	17.00	2.28
6175	7.62	8.10	-	-	10.87	2.75	13.63	17.00	3.37
6415	7.08	7.67	-	-	10.39	1.83	12.22	17.00	4.78

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	7.85	8.40	-	-	11.14	3.40	14.54	17.00	2.46
6175	7.21	8.46	-	-	10.89	2.75	13.65	17.00	3.35
6415	7.90	9.08	-	-	11.54	1.83	13.37	17.00	3.63

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	8.53	8.85	-	-	11.70	3.40	15.10	17.00	1.90
6175	8.43	9.23	-	-	11.86	2.75	14.61	17.00	2.39
6415	8.22	9.38	-	-	11.85	1.83	13.68	17.00	3.32

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	8.81	9.20	-	-	12.02	3.40	15.42	17.00	1.58
6175	8.52	9.59	-	-	12.10	2.75	14.85	17.00	2.15
6415	8.33	9.29	-	-	11.84	1.83	13.68	17.00	3.32

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	8.07	8.95	-	-	11.55	3.40	14.95	17.00	2.05
6175	7.92	9.25	-	-	11.65	2.75	14.40	17.00	2.60
6415	7.31	8.33	-	-	10.86	1.83	12.69	17.00	4.31

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	8.78	9.20	-	-	12.01	3.40	15.41	17.00	1.59
6175	7.97	9.29	-	-	11.69	2.75	14.44	17.00	2.56
6415	7.25	8.49	-	-	10.93	1.83	12.76	17.00	4.24

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	4.95	5.00	-	-	7.98	3.40	11.38	17.00	5.62
6165	4.52	5.09	-	-	7.83	2.75	10.58	17.00	6.42
6405	4.23	4.46	-	-	7.35	1.83	9.19	17.00	7.81

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	2.40	2.18	-	-	5.30	3.40	8.70	17.00	8.30
6145	1.87	2.08	-	-	4.99	2.75	7.74	17.00	9.26
6385	1.36	1.49	-	-	4.44	1.83	6.27	17.00	10.73

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	0.05	0.75	-	-	3.42	3.40	6.82	17.00	10.18
6145	2.00	3.05	-	-	5.57	2.75	8.32	17.00	8.68
6385	1.23	2.53	-	-	4.94	1.83	6.77	17.00	10.23

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-0.71	-0.60	-	-	2.36	3.40	5.76	17.00	11.24
6185	-0.48	-0.11	-	-	2.72	2.75	5.47	17.00	11.53
6345	-0.57	-0.64	-	-	2.41	1.83	4.24	17.00	12.76

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-2.33	-1.27	-	-	1.24	3.40	4.64	17.00	12.36
6185	0.28	1.31	-	-	3.83	2.75	6.58	17.00	10.42
6345	-0.97	0.17	-	-	2.65	1.83	4.48	17.00	12.52

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-3.23	-2.28	-	-	0.28	3.40	3.68	17.00	13.32
6185	-0.52	0.79	-	-	3.20	2.75	5.95	17.00	11.05
6345	-1.42	-0.01	-	-	2.35	1.83	4.18	17.00	12.82

Maximum EIRP SD (U-NII-5) / SP (continued)**Results: SP / TxBF**

Antenna Configuration:	TxBF	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5955	5.68	5.88	-	-	8.79	6.41	15.20	17.00	1.80
6175	6.27	6.78	-	-	9.54	5.76	15.30	17.00	1.70
6415	7.23	7.35	-	-	10.30	4.80	15.11	17.00	1.89

Antenna Configuration:	TxBF	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5965	5.13	5.21	-	-	8.18	6.41	14.59	17.00	2.41
6165	4.69	5.28	-	-	8.01	5.76	13.77	17.00	3.23
6405	4.38	4.49	-	-	7.44	4.80	12.25	17.00	4.75

Antenna Configuration:	TxBF	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
5985	1.72	1.92	-	-	4.83	6.41	11.24	17.00	5.76
6145	1.90	2.12	-	-	5.02	5.76	10.78	17.00	6.22
6385	1.35	1.46	-	-	4.42	4.80	9.22	17.00	7.78

Maximum EIRP SD (U-NII-5) / SP (continued)

Antenna Configuration:	TxBF	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6025	-0.70	-0.87	-	-	2.23	6.41	8.64	17.00	8.36
6185	-0.13	-0.06	-	-	2.92	5.76	8.68	17.00	8.32
6345	-0.80	-0.69	-	-	2.26	4.80	7.07	17.00	9.93

Maximum EIRP SD (U-NII-5) / VLP (continued)

Results: VLP / SISO / Core 0

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-8.98	-	-	-	-	2.60	-6.38	-5.00	1.38
6175	-8.51	-	-	-	-	2.60	-5.91	-5.00	0.91
6415	-7.38	-	-	-	-	0.90	-6.48	-5.00	1.48

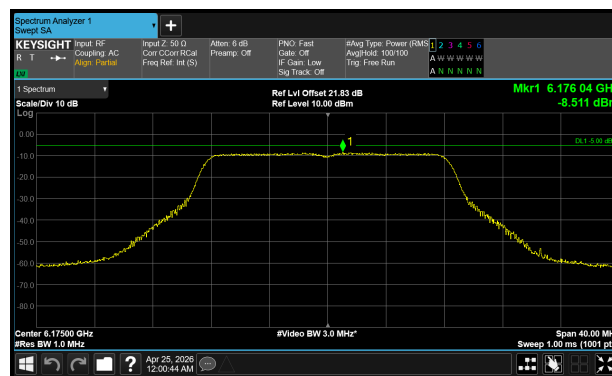

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-8.27	-	-	-	-	2.60	-5.67	-5.00	0.67
6285	-6.86	-	-	-	-	0.90	-5.96	-5.00	0.96
6405	-7.54	-	-	-	-	0.90	-6.64	-5.00	1.64

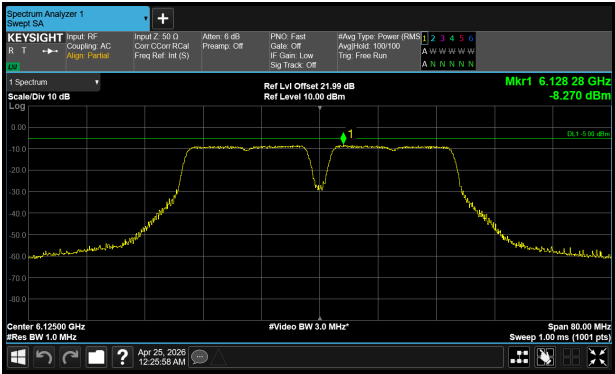

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-8.15	-	-	-	-	2.60	-5.55	-5.00	0.55
6305	-6.52	-	-	-	-	0.90	-5.62	-5.00	0.62
6385	-7.19	-	-	-	-	0.90	-6.29	-5.00	1.29

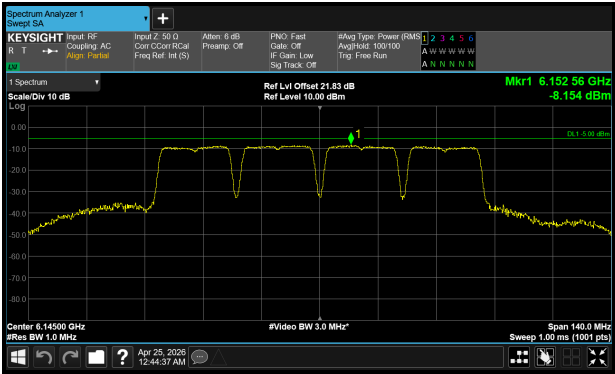

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-9.35	-	-	-	-	2.60	-6.75	-5.00	1.75
6345	-7.99	-	-	-	-	0.90	-7.09	-5.00	2.09

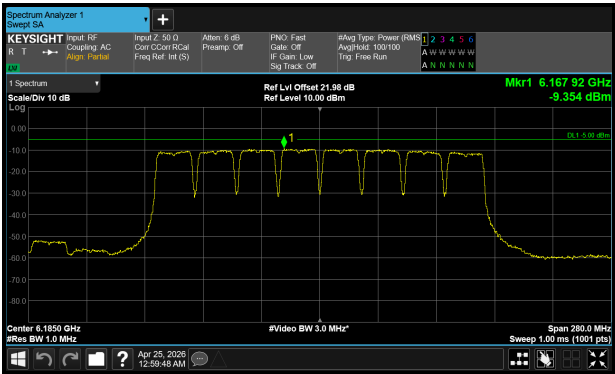

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-9.70	-	-	-	-	2.60	-7.10	-5.00	2.10
6175	-9.27	-	-	-	-	2.60	-6.67	-5.00	1.67
6415	-8.36	-	-	-	-	0.90	-7.46	-5.00	2.46

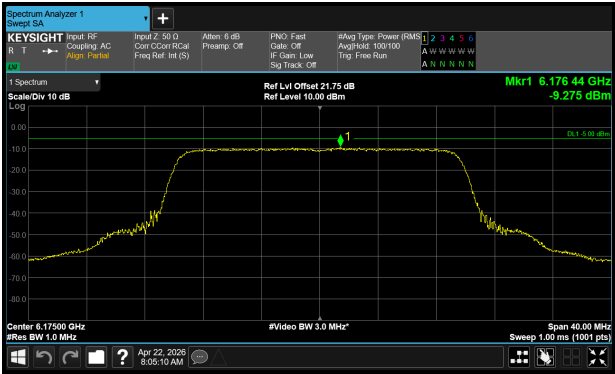

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-9.17	-	-	-	-	2.60	-6.57	-5.00	1.57
6175	-10.32	-	-	-	-	2.60	-7.72	-5.00	2.72
6415	-7.33	-	-	-	-	0.90	-6.43	-5.00	1.43

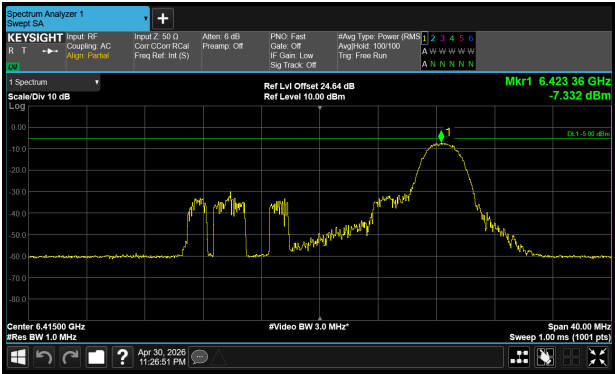

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-8.94	-	-	-	-	2.60	-6.34	-5.00	1.34
6175	-9.54	-	-	-	-	2.60	-6.94	-5.00	1.94
6415	-7.48	-	-	-	-	0.90	-6.58	-5.00	1.58

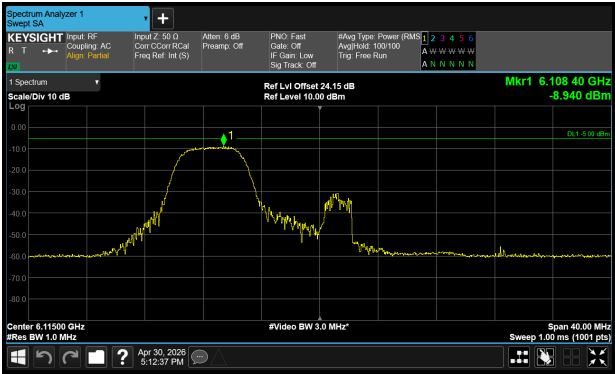

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-8.92	-	-	-	-	2.60	-6.32	-5.00	1.32
6175	-9.06	-	-	-	-	2.60	-6.46	-5.00	1.46
6415	-7.06	-	-	-	-	0.90	-6.16	-5.00	1.16

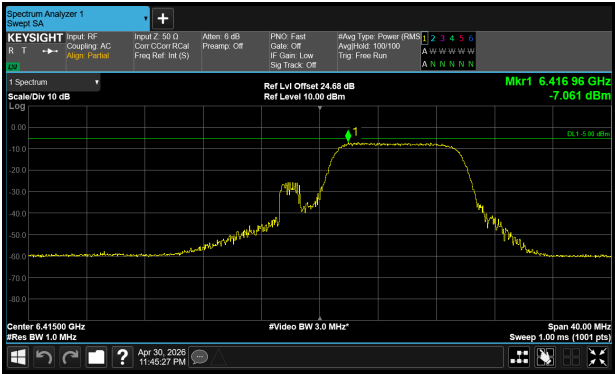

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-9.19	-	-	-	-	2.60	-6.59	-5.00	1.59
6175	-8.72	-	-	-	-	2.60	-6.12	-5.00	1.12
6415	-7.23	-	-	-	-	0.90	-6.33	-5.00	1.33

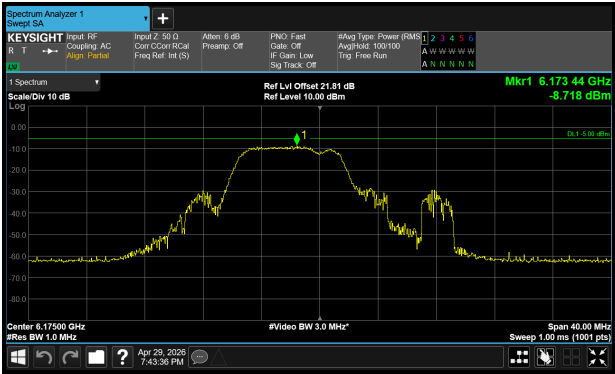

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-9.32	-	-	-	-	2.60	-6.72	-5.00	1.72
6175	-9.04	-	-	-	-	2.60	-6.44	-5.00	1.44
6415	-6.88	-	-	-	-	0.90	-5.98	-5.00	0.98

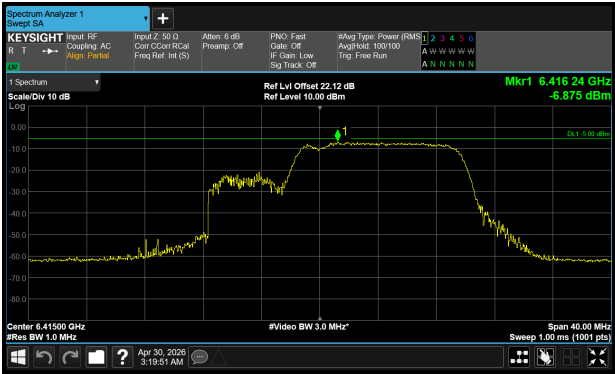

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-9.26	-	-	-	-	2.60	-6.66	-5.00	1.66
6285	-7.73	-	-	-	-	0.90	-6.83	-5.00	1.83
6405	-8.17	-	-	-	-	0.90	-7.27	-5.00	2.27

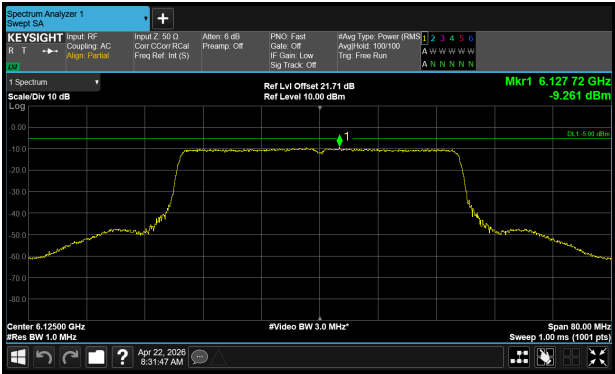

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-9.31	-	-	-	-	2.60	-6.71	-5.00	1.71
6305	-7.87	-	-	-	-	0.90	-6.97	-5.00	1.97
6385	-8.06	-	-	-	-	0.90	-7.16	-5.00	2.16

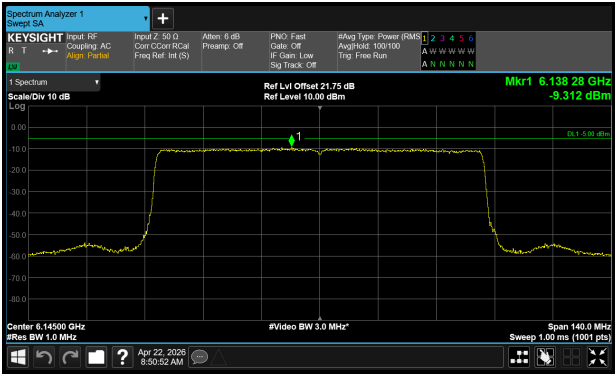

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-9.05	-	-	-	-	2.60	-6.45	-5.00	1.45
6305	-7.26	-	-	-	-	0.90	-6.36	-5.00	1.36
6385	-7.55	-	-	-	-	0.90	-6.65	-5.00	1.65

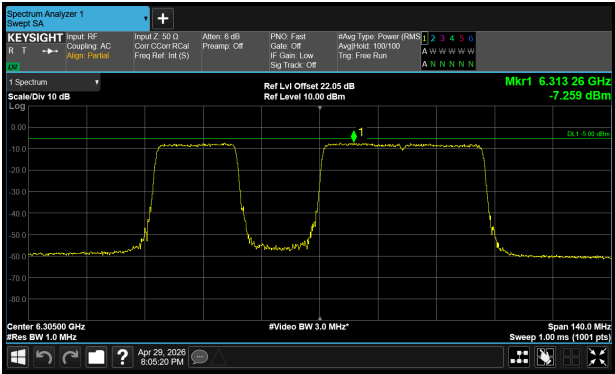

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-10.43	-	-	-	-	2.60	-7.83	-5.00	2.83
6345	-8.04	-	-	-	-	0.90	-7.14	-5.00	2.14

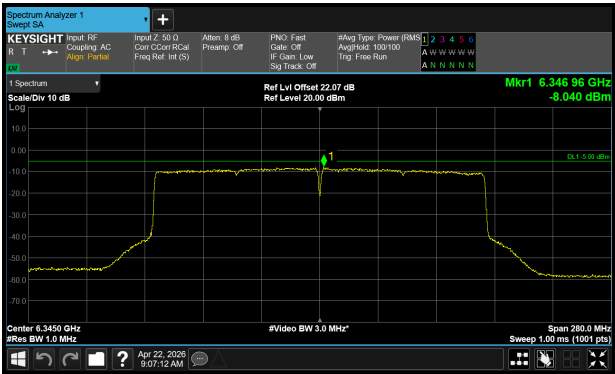

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)


Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-8.70	-	-	-	-	2.60	-6.10	-5.00	1.10
6345	-7.51	-	-	-	-	0.90	-6.61	-5.00	1.61

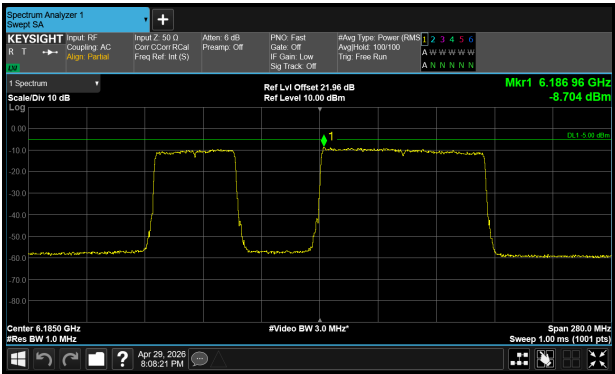

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-9.29	-	-	-	-	2.60	-6.69	-5.00	1.69
6345	-7.53	-	-	-	-	0.90	-6.63	-5.00	1.63

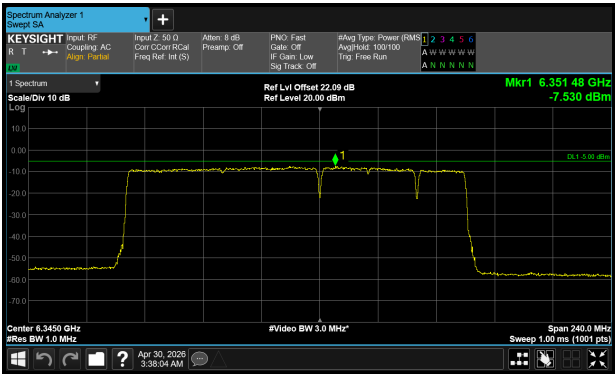

Maximum EIRP SD (U-NII-5) / VLP (continued)**Results: VLP / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-9.14	-	-	-	2.90	-6.24	-5.00	1.24
6175	-	-9.12	-	-	-	2.90	-6.22	-5.00	1.22
6415	-	-9.10	-	-	-	2.60	-6.50	-5.00	1.50

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-	-8.50	-	-	-	2.90	-5.60	-5.00	0.60
6285	-	-8.07	-	-	-	2.60	-5.47	-5.00	0.47
6405	-	-8.65	-	-	-	2.60	-6.05	-5.00	1.05

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-	-8.50	-	-	-	2.90	-5.60	-5.00	0.60
6305	-	-8.21	-	-	-	2.60	-5.61	-5.00	0.61
6385	-	-8.57	-	-	-	2.60	-5.97	-5.00	0.97

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-	-9.21	-	-	-	2.90	-6.31	-5.00	1.31
6345	-	-9.55	-	-	-	2.60	-6.95	-5.00	1.95

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-9.78	-	-	-	2.90	-6.88	-5.00	1.88
6175	-	-9.61	-	-	-	2.90	-6.71	-5.00	1.71
6415	-	-9.76	-	-	-	2.60	-7.16	-5.00	2.16

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-10.26	-	-	-	2.90	-7.36	-5.00	2.36
6175	-	-11.06	-	-	-	2.90	-8.16	-5.00	3.16
6415	-	-9.95	-	-	-	2.60	-7.35	-5.00	2.35

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-10.06	-	-	-	2.90	-7.16	-5.00	2.16
6175	-	-10.37	-	-	-	2.90	-7.47	-5.00	2.47
6415	-	-9.63	-	-	-	2.60	-7.03	-5.00	2.03

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-9.96	-	-	-	2.90	-7.06	-5.00	2.06
6175	-	-9.92	-	-	-	2.90	-7.02	-5.00	2.02
6415	-	-9.39	-	-	-	2.60	-6.79	-5.00	1.79

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-9.46	-	-	-	2.90	-6.56	-5.00	1.56
6175	-	-9.12	-	-	-	2.90	-6.22	-5.00	1.22
6415	-	-9.44	-	-	-	2.60	-6.84	-5.00	1.84

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-	-9.66	-	-	-	2.90	-6.76	-5.00	1.76
6175	-	-9.10	-	-	-	2.90	-6.20	-5.00	1.20
6415	-	-9.28	-	-	-	2.60	-6.68	-5.00	1.68

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-	-9.55	-	-	-	2.90	-6.65	-5.00	1.65
6285	-	-9.13	-	-	-	2.60	-6.53	-5.00	1.53
6405	-	-9.58	-	-	-	2.60	-6.98	-5.00	1.98

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-	-9.63	-	-	-	2.90	-6.73	-5.00	1.73
6305	-	-9.45	-	-	-	2.60	-6.85	-5.00	1.85
6385	-	-9.56	-	-	-	2.60	-6.96	-5.00	1.96

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-	-9.25	-	-	-	2.90	-6.35	-5.00	1.35
6305	-	-8.87	-	-	-	2.60	-6.27	-5.00	1.27
6385	-	-8.91	-	-	-	2.60	-6.31	-5.00	1.31

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-	-10.29	-	-	-	2.90	-7.39	-5.00	2.39
6345	-	-10.29	-	-	-	2.60	-7.69	-5.00	2.69

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-	-8.31	-	-	-	2.90	-5.41	-5.00	0.41
6345	-	-9.12	-	-	-	2.60	-6.52	-5.00	1.52

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-	-9.02	-	-	-	2.90	-6.12	-5.00	1.12
6345	-	-9.30	-	-	-	2.60	-6.70	-5.00	1.70

Maximum EIRP SD (U-NII-5) / VLP (continued)**Results: VLP / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-15.30	-15.41	-	-	-12.34	5.76	-6.58	-5.00	1.58
6175	-14.86	-15.15	-	-	-11.99	5.76	-6.23	-5.00	1.23
6415	-14.47	-14.45	-	-	-11.45	4.80	-6.64	-5.00	1.64

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-14.56	-15.01	-	-	-11.77	5.76	-6.01	-5.00	1.01
6285	-13.50	-14.37	-	-	-10.90	4.80	-6.10	-5.00	1.10
6405	-14.20	-14.80	-	-	-11.48	4.80	-6.68	-5.00	1.68

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-14.61	-14.45	-	-	-11.52	5.76	-5.76	-5.00	0.76
6305	-13.57	-13.44	-	-	-10.50	4.80	-5.69	-5.00	0.69
6385	-14.45	-14.51	-	-	-11.47	4.80	-6.67	-5.00	1.67

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-14.62	-14.21	-	-	-11.40	5.76	-5.64	-5.00	0.64
6345	-14.13	-13.77	-	-	-10.94	4.80	-6.14	-5.00	1.14

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-15.77	-15.63	-	-	-12.69	5.76	-6.93	-5.00	1.93
6175	-15.86	-16.00	-	-	-12.92	5.76	-7.15	-5.00	2.15
6415	-15.47	-15.52	-	-	-12.48	4.80	-7.68	-5.00	2.68

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6415	-14.69	-15.38	-	-	-12.01	4.80	-7.21	-5.00	2.21

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-15.09	-15.84	-	-	-12.44	5.76	-6.68	-5.00	1.68
6175	-15.06	-15.91	-	-	-12.45	5.76	-6.69	-5.00	1.69
6415	-13.89	-14.62	-	-	-11.23	4.80	-6.43	-5.00	1.43

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-14.91	-15.73	-	-	-12.29	5.76	-6.53	-5.00	1.53
6175	-14.56	-15.54	-	-	-12.01	5.76	-6.25	-5.00	1.25
6415	-14.19	-14.71	-	-	-11.43	4.80	-6.63	-5.00	1.63

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-15.59	-16.19	-	-	-12.87	5.76	-7.11	-5.00	2.11
6175	-14.86	-15.57	-	-	-12.19	5.76	-6.43	-5.00	1.43
6415	-14.01	-14.13	-	-	-11.06	4.80	-6.26	-5.00	1.26

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-15.76	-15.48	-	-	-12.61	5.76	-6.84	-5.00	1.84
6285	-14.48	-14.76	-	-	-11.61	4.80	-6.81	-5.00	1.81
6405	-15.54	-15.62	-	-	-12.57	4.80	-7.77	-5.00	2.77

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-15.22	-15.34	-	-	-12.27	5.76	-6.51	-5.00	1.51
6305	-14.39	-13.92	-	-	-11.14	4.80	-6.33	-5.00	1.33
6385	-15.60	-14.97	-	-	-12.26	4.80	-7.46	-5.00	2.46

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-14.26	-15.28	-	-	-11.73	5.76	-5.97	-5.00	0.97
6305	-13.47	-14.41	-	-	-10.91	4.80	-6.10	-5.00	1.10
6385	-13.60	-14.25	-	-	-10.90	4.80	-6.10	-5.00	1.10

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-15.55	-15.03	-	-	-12.27	5.76	-6.51	-5.00	1.51
6345	-15.00	-14.52	-	-	-11.74	4.80	-6.94	-5.00	1.94

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-15.21	-14.31	-	-	-11.73	5.76	-5.97	-5.00	0.97
6345	-15.31	-14.30	-	-	-11.76	4.80	-6.96	-5.00	1.96

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-14.24	-14.11	-	-	-11.16	5.76	-5.40	-5.00	0.40
6345	-13.69	-13.67	-	-	-10.67	4.80	-5.87	-5.00	0.87

Maximum EIRP SD (U-NII-5) / VLP (continued)**Results: VLP / MIMO SDM**

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-12.83	-12.67	-	-	-9.74	2.75	-6.99	-5.00	1.99
6175	-12.44	-12.65	-	-	-9.53	2.75	-6.78	-5.00	1.78
6415	-12.58	-12.52	-	-	-9.54	1.83	-7.71	-5.00	2.71

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6415	-11.81	-12.45	-	-	-9.11	1.83	-7.28	-5.00	2.28

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-12.20	-13.16	-	-	-9.64	2.75	-6.89	-5.00	1.89
6175	-12.36	-12.98	-	-	-9.65	2.75	-6.90	-5.00	1.90
6415	-11.48	-12.03	-	-	-8.73	1.83	-6.90	-5.00	1.90

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-12.33	-13.11	-	-	-9.69	2.75	-6.94	-5.00	1.94
6175	-11.79	-12.67	-	-	-9.20	2.75	-6.45	-5.00	1.45
6415	-11.04	-11.79	-	-	-8.39	1.83	-6.55	-5.00	1.55

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-12.40	-12.71	-	-	-9.54	2.75	-6.79	-5.00	1.79
6175	-11.70	-12.38	-	-	-9.02	2.75	-6.26	-5.00	1.26
6415	-10.62	-11.67	-	-	-8.10	1.83	-6.27	-5.00	1.27

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-12.10	-12.98	-	-	-9.51	2.75	-6.75	-5.00	1.75
6175	-11.65	-12.39	-	-	-9.00	2.75	-6.25	-5.00	1.25
6415	-11.09	-11.77	-	-	-8.41	1.83	-6.58	-5.00	1.58

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-12.56	-12.68	-	-	-9.61	2.75	-6.86	-5.00	1.86
6285	-11.29	-11.35	-	-	-8.31	1.83	-6.47	-5.00	1.47
6405	-12.36	-11.87	-	-	-9.10	1.83	-7.26	-5.00	2.26

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-12.78	-12.25	-	-	-9.49	2.75	-6.74	-5.00	1.74
6305	-12.14	-11.60	-	-	-8.85	1.83	-7.02	-5.00	2.02
6385	-12.41	-12.20	-	-	-9.29	1.83	-7.46	-5.00	2.46

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-11.66	-11.87	-	-	-8.75	2.75	-6.00	-5.00	1.00
6305	-10.89	-11.11	-	-	-7.99	1.83	-6.15	-5.00	1.15
6385	-11.24	-11.19	-	-	-8.20	1.83	-6.37	-5.00	1.37

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-13.49	-12.94	-	-	-10.20	2.75	-7.44	-5.00	2.44
6345	-13.08	-12.62	-	-	-9.83	1.83	-8.00	-5.00	3.00

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-11.14	-11.32	-	-	-8.22	2.75	-5.47	-5.00	0.47
6345	-12.42	-11.65	-	-	-9.01	1.83	-7.18	-5.00	2.18

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-11.66	-11.64	-	-	-8.64	2.75	-5.88	-5.00	0.88
6345	-11.26	-11.55	-	-	-8.39	1.83	-6.56	-5.00	1.56

Maximum EIRP SD (U-NII-5) / VLP (continued)**Results: VLP / TxBF**

Antenna Configuration:	TxBF	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6115	-15.59	-15.61	-	-	-12.59	5.76	-6.83	-5.00	1.83
6175	-15.34	-15.73	-	-	-12.52	5.76	-6.76	-5.00	1.76
6415	-15.02	-14.94	-	-	-11.97	4.80	-7.17	-5.00	2.17

Antenna Configuration:	TxBF	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6125	-15.70	-15.70	-	-	-12.69	5.76	-6.93	-5.00	1.93
6285	-14.60	-14.71	-	-	-11.64	4.80	-6.84	-5.00	1.84
6405	-15.03	-15.15	-	-	-12.08	4.80	-7.28	-5.00	2.28

Antenna Configuration:	TxBF	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6145	-15.25	-15.44	-	-	-12.34	5.76	-6.58	-5.00	1.58
6305	-14.44	-13.99	-	-	-11.20	4.80	-6.39	-5.00	1.39
6385	-15.24	-14.63	-	-	-11.91	4.80	-7.11	-5.00	2.11

Maximum EIRP SD (U-NII-5) / VLP (continued)

Antenna Configuration:	TxBF	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6185	-16.71	-16.13	-	-	-13.40	5.76	-7.64	-5.00	2.64
6345	-15.92	-15.52	-	-	-12.71	4.80	-7.91	-5.00	2.91

Maximum EIRP SD (U-NII-6) / LPI (continued)**4.4.2 6.425-6.525 GHz band (U-NII-6)****Results: LPI / SISO / Core 0**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-3.04	-	-	-	-	0.60	-2.44	-1.00	1.44
6475	-3.61	-	-	-	-	0.60	-3.01	-1.00	2.01
6515	-2.94	-	-	-	-	0.60	-2.34	-1.00	1.34

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-2.87	-	-	-	-	0.60	-2.27	-1.00	1.27
6485	-2.71	-	-	-	-	0.60	-2.11	-1.00	1.11
6525	-2.56	-	-	-	-	0.60	-1.96	-1.00	0.96

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-2.30	-	-	-	-	0.60	-1.70	-1.00	0.70

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-2.64	-	-	-	-	0.60	-2.04	-1.00	1.04

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-3.54	-	-	-	-	0.60	-2.94	-1.00	1.94
6475	-3.66	-	-	-	-	0.60	-3.06	-1.00	2.06
6515	-3.51	-	-	-	-	0.60	-2.91	-1.00	1.91

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-3.35	-	-	-	-	0.60	-2.75	-1.00	1.75
6475	-4.72	-	-	-	-	0.60	-4.12	-1.00	3.12
6515	-3.80	-	-	-	-	0.60	-3.20	-1.00	2.20

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-3.14	-	-	-	-	0.60	-2.54	-1.00	1.54
6475	-3.97	-	-	-	-	0.60	-3.37	-1.00	2.37
6515	-3.59	-	-	-	-	0.60	-2.99	-1.00	1.99

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-3.29	-	-	-	-	0.60	-2.69	-1.00	1.69
6475	-3.43	-	-	-	-	0.60	-2.83	-1.00	1.83
6515	-3.61	-	-	-	-	0.60	-3.01	-1.00	2.01

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-3.30	-	-	-	-	0.60	-2.70	-1.00	1.70
6475	-4.30	-	-	-	-	0.60	-3.70	-1.00	2.70
6515	-3.72	-	-	-	-	0.60	-3.12	-1.00	2.12

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-2.77	-	-	-	-	0.60	-2.17	-1.00	1.17
6475	-3.65	-	-	-	-	0.60	-3.05	-1.00	2.05
6515	-3.69	-	-	-	-	0.60	-3.09	-1.00	2.09

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-3.39	-	-	-	-	0.60	-2.79	-1.00	1.79
6485	-3.50	-	-	-	-	0.60	-2.90	-1.00	1.90
6525	-3.63	-	-	-	-	0.60	-3.03	-1.00	2.03

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-3.11	-	-	-	-	0.60	-2.51	-1.00	1.51

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-3.31	-	-	-	-	0.60	-2.71	-1.00	1.71

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-2.99	-	-	-	-	0.60	-2.39	-1.00	1.39

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-2.53	-	-	-	-	0.60	-1.93	-1.00	0.93

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-2.56	-	-	-	-	0.60	-1.96	-1.00	0.96

Maximum EIRP SD (U-NII-6) / LPI (continued)**Results: LPI / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-5.16	-	-	-	2.60	-2.56	-1.00	1.56
6475	-	-5.26	-	-	-	2.60	-2.66	-1.00	1.66
6515	-	-4.93	-	-	-	2.60	-2.33	-1.00	1.33

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-	-4.98	-	-	-	2.60	-2.38	-1.00	1.38
6485	-	-4.86	-	-	-	2.60	-2.26	-1.00	1.26
6525	-	-4.59	-	-	-	2.60	-1.99	-1.00	0.99

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	-4.42	-	-	-	2.60	-1.82	-1.00	0.82

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-4.60	-	-	-	2.60	-2.00	-1.00	1.00

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-5.82	-	-	-	2.60	-3.22	-1.00	2.22
6475	-	-5.64	-	-	-	2.60	-3.04	-1.00	2.04
6515	-	-5.53	-	-	-	2.60	-2.93	-1.00	1.93

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-5.56	-	-	-	2.60	-2.96	-1.00	1.96
6475	-	-7.11	-	-	-	2.60	-4.51	-1.00	3.51
6515	-	-5.95	-	-	-	2.60	-3.35	-1.00	2.35

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-5.39	-	-	-	2.60	-2.79	-1.00	1.79
6475	-	-5.96	-	-	-	2.60	-3.36	-1.00	2.36
6515	-	-5.84	-	-	-	2.60	-3.24	-1.00	2.24

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-5.22	-	-	-	2.60	-2.62	-1.00	1.62
6475	-	-5.52	-	-	-	2.60	-2.92	-1.00	1.92
6515	-	-5.49	-	-	-	2.60	-2.89	-1.00	1.89

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-5.61	-	-	-	2.60	-3.01	-1.00	2.01
6475	-	-6.34	-	-	-	2.60	-3.74	-1.00	2.74
6515	-	-5.72	-	-	-	2.60	-3.12	-1.00	2.12

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-5.11	-	-	-	2.60	-2.51	-1.00	1.51
6475	-	-5.70	-	-	-	2.60	-3.10	-1.00	2.10
6515	-	-5.43	-	-	-	2.60	-2.83	-1.00	1.83

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-	-5.75	-	-	-	2.60	-3.15	-1.00	2.15
6485	-	-5.89	-	-	-	2.60	-3.29	-1.00	2.29
6525	-	-5.49	-	-	-	2.60	-2.89	-1.00	1.89

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	-5.48	-	-	-	2.60	-2.88	-1.00	1.88

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	-5.16	-	-	-	2.60	-2.56	-1.00	1.56

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-5.63	-	-	-	2.60	-3.03	-1.00	2.03

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-4.60	-	-	-	2.60	-2.00	-1.00	1.00

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-4.72	-	-	-	2.60	-2.12	-1.00	1.12

Maximum EIRP SD (U-NII-6) / LPI (continued)**Results: LPI / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-11.01	-10.80	-	-	-7.90	4.67	-3.23	-1.00	2.23
6475	-11.14	-10.59	-	-	-7.85	4.67	-3.18	-1.00	2.18
6515	-10.65	-10.31	-	-	-7.47	4.67	-2.80	-1.00	1.80

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-10.49	-10.79	-	-	-7.63	4.67	-2.96	-1.00	1.96
6485	-10.30	-10.40	-	-	-7.34	4.67	-2.67	-1.00	1.67
6525	-9.48	-9.97	-	-	-6.71	4.67	-2.04	-1.00	1.04

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-9.91	-9.60	-	-	-6.74	4.67	-2.07	-1.00	1.07

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-9.92	-9.51	-	-	-6.70	4.67	-2.03	-1.00	1.03

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-11.20	-11.29	-	-	-8.24	4.67	-3.57	-1.00	2.57
6475	-11.46	-11.29	-	-	-8.36	4.67	-3.70	-1.00	2.70
6515	-11.36	-11.07	-	-	-8.20	4.67	-3.53	-1.00	2.53

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-10.44	-11.55	-	-	-7.95	4.67	-3.28	-1.00	2.28
6475	-12.59	-12.75	-	-	-9.66	4.67	-4.99	-1.00	3.99
6515	-10.94	-10.92	-	-	-7.92	4.67	-3.25	-1.00	2.25

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-10.36	-11.22	-	-	-7.76	4.67	-3.09	-1.00	2.09
6475	-11.16	-11.64	-	-	-8.38	4.67	-3.71	-1.00	2.71
6515	-10.71	-10.92	-	-	-7.81	4.67	-3.14	-1.00	2.14

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-10.33	-10.60	-	-	-7.45	4.67	-2.78	-1.00	1.78
6475	-11.07	-11.22	-	-	-8.13	4.67	-3.47	-1.00	2.47
6515	-10.54	-10.81	-	-	-7.66	4.67	-2.99	-1.00	1.99

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-11.03	-11.28	-	-	-8.14	4.67	-3.48	-1.00	2.48
6475	-11.20	-11.47	-	-	-8.32	4.67	-3.66	-1.00	2.66
6515	-10.88	-11.24	-	-	-8.05	4.67	-3.38	-1.00	2.38

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-10.71	-11.08	-	-	-7.88	4.67	-3.21	-1.00	2.21
6475	-11.00	-11.19	-	-	-8.08	4.67	-3.42	-1.00	2.42
6515	-10.90	-10.87	-	-	-7.88	4.67	-3.21	-1.00	2.21

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-11.38	-10.69	-	-	-8.01	4.67	-3.34	-1.00	2.34
6485	-11.40	-10.82	-	-	-8.09	4.67	-3.42	-1.00	2.42
6525	-11.42	-10.47	-	-	-7.91	4.67	-3.24	-1.00	2.24

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-10.82	-10.28	-	-	-7.53	4.67	-2.86	-1.00	1.86

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-9.72	-10.37	-	-	-7.03	4.67	-2.36	-1.00	1.36

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-10.69	-10.30	-	-	-7.48	4.67	-2.81	-1.00	1.81

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-9.28	-9.69	-	-	-6.47	4.67	-1.80	-1.00	0.80

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-9.15	-9.62	-	-	-6.37	4.67	-1.70	-1.00	0.70

Maximum EIRP SD (U-NII-6) / LPI (continued)**Results: LPI / MIMO SDM**

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-8.33	-7.60	-	-	-4.94	1.71	-3.22	-1.00	2.22
6475	-8.08	-7.84	-	-	-4.95	1.71	-3.23	-1.00	2.23
6515	-8.18	-7.65	-	-	-4.90	1.71	-3.18	-1.00	2.18

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.29	-7.85	-	-	-4.55	1.71	-2.84	-1.00	1.84
6475	-9.60	-10.10	-	-	-6.83	1.71	-5.12	-1.00	4.12
6515	-7.49	-7.76	-	-	-4.61	1.71	-2.90	-1.00	1.90

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.43	-8.16	-	-	-4.77	1.71	-3.05	-1.00	2.05
6475	-8.07	-8.56	-	-	-5.30	1.71	-3.58	-1.00	2.58
6515	-7.59	-7.63	-	-	-4.60	1.71	-2.88	-1.00	1.88

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.39	-8.00	-	-	-4.67	1.71	-2.96	-1.00	1.96
6475	-8.12	-8.39	-	-	-5.24	1.71	-3.53	-1.00	2.53
6515	-7.15	-7.34	-	-	-4.24	1.71	-2.52	-1.00	1.52

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-8.07	-7.86	-	-	-4.95	1.71	-3.24	-1.00	2.24
6475	-8.85	-8.73	-	-	-5.78	1.71	-4.07	-1.00	3.07
6515	-8.27	-7.70	-	-	-4.97	1.71	-3.25	-1.00	2.25

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.87	-7.83	-	-	-4.84	1.71	-3.13	-1.00	2.13
6475	-8.23	-8.17	-	-	-5.19	1.71	-3.48	-1.00	2.48
6515	-8.37	-7.86	-	-	-5.10	1.71	-3.38	-1.00	2.38

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-8.02	-7.47	-	-	-4.73	1.71	-3.01	-1.00	2.01
6485	-8.09	-7.97	-	-	-5.02	1.71	-3.31	-1.00	2.31
6525	-8.05	-7.58	-	-	-4.80	1.71	-3.08	-1.00	2.08

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-7.51	-7.27	-	-	-4.38	1.71	-2.66	-1.00	1.66

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-7.83	-7.77	-	-	-4.79	1.71	-3.08	-1.00	2.08

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-7.60	-7.09	-	-	-4.32	1.71	-2.61	-1.00	1.61

Maximum EIRP SD (U-NII-6) / LPI (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-6.85	-6.67	-	-	-3.75	1.71	-2.03	-1.00	1.03

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-7.18	-7.04	-	-	-4.10	1.71	-2.38	-1.00	1.38

Maximum EIRP SD (U-NII-6) / LPI (continued)**Results: LPI / TxBF**

Antenna Configuration:	TxBF	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-11.11	-11.22	-	-	-8.16	4.67	-3.49	-1.00	2.49
6475	-11.22	-11.18	-	-	-8.19	4.67	-3.52	-1.00	2.52
6515	-11.37	-11.05	-	-	-8.19	4.67	-3.53	-1.00	2.53

Antenna Configuration:	TxBF	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-11.30	-10.54	-	-	-7.89	4.67	-3.23	-1.00	2.23
6485	-10.96	-10.89	-	-	-7.91	4.67	-3.25	-1.00	2.25
6525	-10.84	-10.43	-	-	-7.62	4.67	-2.95	-1.00	1.95

Antenna Configuration:	TxBF	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-10.89	-10.51	-	-	-7.68	4.67	-3.02	-1.00	2.02

Antenna Configuration:	TxBF	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-10.75	-10.52	-	-	-7.62	4.67	-2.96	-1.00	1.96

Maximum EIRP SD (U-NII-6) / SP (continued)**Results: ISED / SP / SISO / Core 0**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	7.89	-	-	-	-	0.60	8.49	17.00	8.51
6475	7.64	-	-	-	-	0.60	8.24	17.00	8.76
6515	7.98	-	-	-	-	0.60	8.58	17.00	8.42

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	4.55	-	-	-	-	0.60	5.15	17.00	11.85
6485	5.10	-	-	-	-	0.60	5.70	17.00	11.30
6525	5.01	-	-	-	-	0.60	5.61	17.00	11.39

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	2.47	-	-	-	-	0.60	3.07	17.00	13.93

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-0.33	-	-	-	-	0.60	0.27	17.00	16.73

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	7.48	-	-	-	-	0.60	8.08	17.00	8.92
6475	7.11	-	-	-	-	0.60	7.71	17.00	9.29
6515	7.46	-	-	-	-	0.60	8.06	17.00	8.94

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	9.19	-	-	-	-	0.60	9.79	17.00	7.21
6475	7.86	-	-	-	-	0.60	8.46	17.00	8.54
6515	9.03	-	-	-	-	0.60	9.63	17.00	7.37

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	9.20	-	-	-	-	0.60	9.80	17.00	7.20
6475	9.06	-	-	-	-	0.60	9.66	17.00	7.34
6515	9.34	-	-	-	-	0.60	9.94	17.00	7.06

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	9.25	-	-	-	-	0.60	9.85	17.00	7.15
6475	9.34	-	-	-	-	0.60	9.94	17.00	7.06
6515	9.51	-	-	-	-	0.60	10.11	17.00	6.89

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	8.55	-	-	-	-	0.60	9.15	17.00	7.85
6475	8.90	-	-	-	-	0.60	9.50	17.00	7.50
6515	8.82	-	-	-	-	0.60	9.42	17.00	7.58

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	8.60	-	-	-	-	0.60	9.20	17.00	7.80
6475	8.74	-	-	-	-	0.60	9.34	17.00	7.66
6515	9.02	-	-	-	-	0.60	9.62	17.00	7.38

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	4.29	-	-	-	-	0.60	4.89	17.00	12.11
6485	4.38	-	-	-	-	0.60	4.98	17.00	12.02
6525	4.73	-	-	-	-	0.60	5.33	17.00	11.67

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	1.67	-	-	-	-	0.60	2.27	17.00	14.73

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	3.03	-	-	-	-	0.60	3.63	17.00	13.37

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-0.81	-	-	-	-	0.60	-0.21	17.00	17.21

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	0.75	-	-	-	-	0.60	1.35	17.00	15.65

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	0.30	-	-	-	-	17.00	16.10	0.60	0.90

Maximum EIRP SD (U-NII-6) / SP (continued)**Results: ISED / SP / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	7.59	-	-	-	2.60	10.19	17.00	6.81
6475	-	7.80	-	-	-	2.60	10.40	17.00	6.60
6515	-	8.01	-	-	-	2.60	10.61	17.00	6.39

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-	5.02	-	-	-	2.60	7.62	17.00	9.38
6485	-	4.77	-	-	-	2.60	7.37	17.00	9.63
6525	-	4.93	-	-	-	2.60	7.53	17.00	9.47

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	2.42	-	-	-	2.60	5.02	17.00	11.98

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	0.04	-	-	-	2.60	2.64	17.00	14.36

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	7.34	-	-	-	2.60	9.94	17.00	7.06
6475	-	6.98	-	-	-	2.60	9.58	17.00	7.42
6515	-	7.13	-	-	-	2.60	9.73	17.00	7.27

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	9.00	-	-	-	2.60	11.60	17.00	5.40
6475	-	7.75	-	-	-	2.60	10.35	17.00	6.65
6515	-	8.74	-	-	-	2.60	11.34	17.00	5.66

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	9.20	-	-	-	2.60	11.80	17.00	5.20
6475	-	9.26	-	-	-	2.60	11.86	17.00	5.14
6515	-	9.23	-	-	-	2.60	11.83	17.00	5.17

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	9.49	-	-	-	2.60	12.09	17.00	4.91
6475	-	9.53	-	-	-	2.60	12.13	17.00	4.87
6515	-	9.27	-	-	-	2.60	11.87	17.00	5.13

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	8.78	-	-	-	2.60	11.38	17.00	5.62
6475	-	8.62	-	-	-	2.60	11.22	17.00	5.78
6515	-	8.93	-	-	-	2.60	11.53	17.00	5.47

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	8.57	-	-	-	2.60	11.17	17.00	5.83
6475	-	8.71	-	-	-	2.60	11.31	17.00	5.69
6515	-	8.74	-	-	-	2.60	11.34	17.00	5.66

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-	4.06	-	-	-	2.60	6.66	17.00	10.34
6485	-	4.52	-	-	-	2.60	7.12	17.00	9.88
6525	-	4.58	-	-	-	2.60	7.18	17.00	9.82

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	1.58	-	-	-	2.60	4.18	17.00	12.82

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	2.99	-	-	-	2.60	5.59	17.00	11.41

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-0.89	-	-	-	2.60	1.71	17.00	15.29

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	0.32	-	-	-	2.60	2.92	17.00	14.08

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	0.16	-	-	-	2.60	2.76	17.00	14.24

Maximum EIRP SD (U-NII-6) / SP (continued)**Results: ISED / SP / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	7.63	7.91	-	-	10.78	4.67	15.45	17.00	1.55
6475	7.46	8.39	-	-	10.96	4.67	15.63	17.00	1.37
6515	7.83	8.11	-	-	10.99	4.67	15.65	17.00	1.35

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	4.42	4.82	-	-	7.64	4.67	12.30	17.00	4.70
6485	4.85	5.21	-	-	8.04	4.67	12.71	17.00	4.29
6525	4.74	4.99	-	-	7.88	4.67	12.54	17.00	4.46

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	1.94	2.37	-	-	5.17	4.67	9.84	17.00	7.16

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	0.69	0.87	-	-	3.79	4.67	8.46	17.00	8.54

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	6.94	7.33	-	-	10.15	4.67	14.82	17.00	2.18
6475	6.59	7.18	-	-	9.91	4.67	14.57	17.00	2.43
6515	7.35	7.27	-	-	10.32	4.67	14.99	17.00	2.01

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	6.25	7.53	-	-	9.95	4.67	14.61	17.00	2.39
6475	4.89	5.87	-	-	8.42	4.67	13.08	17.00	3.92
6515	5.52	6.83	-	-	9.24	4.67	13.90	17.00	3.10

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	6.06	7.14	-	-	9.64	4.67	14.31	17.00	2.69
6475	5.99	7.01	-	-	9.54	4.67	14.21	17.00	2.79
6515	5.54	6.89	-	-	9.27	4.67	13.94	17.00	3.06

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	6.73	7.71	-	-	10.26	4.67	14.92	17.00	2.08
6475	6.40	7.86	-	-	10.20	4.67	14.87	17.00	2.13
6515	6.26	7.69	-	-	10.05	4.67	14.72	17.00	2.28

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	5.34	6.99	-	-	9.25	4.67	13.92	17.00	3.08
6475	5.57	7.38	-	-	9.58	4.67	14.25	17.00	2.75
6515	5.74	7.17	-	-	9.53	4.67	14.19	17.00	2.81

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	5.88	7.50	-	-	9.78	4.67	14.44	17.00	2.56
6475	6.53	7.66	-	-	10.14	4.67	14.81	17.00	2.19
6515	5.92	7.35	-	-	9.71	4.67	14.37	17.00	2.63

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	4.13	4.22	-	-	7.19	4.67	11.86	17.00	5.14
6485	4.21	4.37	-	-	7.30	4.67	11.97	17.00	5.03
6525	4.25	4.54	-	-	7.41	4.67	12.07	17.00	4.93

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	1.73	1.92	-	-	4.84	4.67	9.50	17.00	7.50

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	1.78	3.41	-	-	5.68	4.67	10.35	17.00	6.65

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-1.20	-0.76	-	-	2.04	4.67	6.70	17.00	10.30

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-1.10	0.77	-	-	2.94	4.67	7.61	17.00	9.39

Antenna Configuration:	MIMO CDD	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-1.64	-0.02	-	-	2.26	4.67	6.92	17.00	10.08

Maximum EIRP SD (U-NII-6) / SP (continued)**Results: ISED / SP / MIMO SDM**

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	6.96	7.09	-	-	10.04	1.71	11.75	17.00	5.25
6475	6.85	7.26	-	-	10.07	1.71	11.79	17.00	5.21
6515	7.07	7.39	-	-	10.24	1.71	11.96	17.00	5.04

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	8.12	9.21	-	-	11.71	1.71	13.42	17.00	3.58
6475	6.56	7.84	-	-	10.26	1.71	11.97	17.00	5.03
6515	7.34	8.49	-	-	10.96	1.71	12.68	17.00	4.32

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	8.45	9.60	-	-	12.07	1.71	13.79	17.00	3.21
6475	8.05	9.18	-	-	11.66	1.71	13.38	17.00	3.62
6515	7.83	9.16	-	-	11.56	1.71	13.27	17.00	3.73

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x2 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	8.56	9.54	-	-	12.09	1.71	13.80	17.00	3.20
6475	7.96	9.56	-	-	11.84	1.71	13.56	17.00	3.44
6515	8.04	9.47	-	-	11.82	1.71	13.54	17.00	3.46

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	7.36	8.78	-	-	11.14	1.71	12.85	17.00	4.15
6475	7.59	9.14	-	-	11.44	1.71	13.16	17.00	3.84
6515	7.20	8.98	-	-	11.19	1.71	12.91	17.00	4.09

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	6.87	8.66	-	-	10.86	1.71	12.58	17.00	4.42
6475	7.35	8.78	-	-	11.13	1.71	12.85	17.00	4.15
6515	7.36	8.93	-	-	11.23	1.71	12.94	17.00	4.06

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	3.93	4.24	-	-	7.10	1.71	8.82	17.00	8.18
6485	4.43	4.55	-	-	7.50	1.71	9.22	17.00	7.78
6525	4.33	4.55	-	-	7.46	1.71	9.17	17.00	7.83

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	1.56	1.83	-	-	4.71	1.71	6.42	17.00	10.58

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	1.85	3.22	-	-	5.60	1.71	7.31	17.00	9.69

Antenna Configuration:	MIMO SDM	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x2 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-0.78	-0.53	-	-	2.35	1.71	4.07	17.00	12.93

Maximum EIRP SD (U-NII-6) / SP (continued)

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-1.04	0.67	-	-	2.91	1.71	4.62	17.00	12.38

Antenna Configuration:	MIMO SDM	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS9x2 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-1.67	0.09	-	-	2.31	1.71	4.02	17.00	12.98

Maximum EIRP SD (U-NII-6) / SP (continued)**Results: ISED / SP / TxBF**

Antenna Configuration:	TxBF	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	7.17	7.34	-	-	10.27	4.67	14.93	17.00	2.07
6475	6.82	7.18	-	-	10.01	4.67	14.68	17.00	2.32
6515	7.32	7.34	-	-	10.34	4.67	15.01	17.00	1.99

Antenna Configuration:	TxBF	Mode:	802.11ax HE40 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	4.07	4.23	-	-	7.16	4.67	11.83	17.00	5.17
6485	4.54	4.80	-	-	7.68	4.67	12.35	17.00	4.65
6525	4.62	4.62	-	-	7.63	4.67	12.30	17.00	4.70

Antenna Configuration:	TxBF	Mode:	802.11ax HE80 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	1.53	1.76	-	-	4.66	4.67	9.32	17.00	7.68

Antenna Configuration:	TxBF	Mode:	802.11ax HE160 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-0.70	-0.48	-	-	2.42	4.67	7.09	17.00	9.91

Maximum EIRP SD (U-NII-6) / VLP (continued)**Results: VLP / SISO / Core 0**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.20	-	-	-	-	0.60	-6.60	-5.00	1.60
6475	-7.18	-	-	-	-	0.60	-6.58	-5.00	1.58
6515	-6.87	-	-	-	-	0.60	-6.27	-5.00	1.27

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-6.78	-	-	-	-	0.60	-6.18	-5.00	1.18
6485	-6.74	-	-	-	-	0.60	-6.14	-5.00	1.14
6525	-6.54	-	-	-	-	0.60	-5.94	-5.00	0.94

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-6.30	-	-	-	-	0.60	-5.70	-5.00	0.70

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	1 (Core 0)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-7.71	-	-	-	-	0.60	-7.11	-5.00	2.11

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.48	-	-	-	-	0.60	-6.88	-5.00	1.88
6475	-7.66	-	-	-	-	0.60	-7.06	-5.00	2.06
6515	-7.64	-	-	-	-	0.60	-7.04	-5.00	2.04

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.17	-	-	-	-	0.60	-6.57	-5.00	1.57
6475	-8.71	-	-	-	-	0.60	-8.11	-5.00	3.11
6515	-7.05	-	-	-	-	0.60	-6.45	-5.00	1.45

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-6.81	-	-	-	-	0.60	-6.21	-5.00	1.21
6475	-7.53	-	-	-	-	0.60	-6.93	-5.00	1.93
6515	-6.81	-	-	-	-	0.60	-6.21	-5.00	1.21

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	1 (Core 0)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-6.76	-	-	-	-	0.60	-6.16	-5.00	1.16
6475	-7.26	-	-	-	-	0.60	-6.66	-5.00	1.66
6515	-6.73	-	-	-	-	0.60	-6.13	-5.00	1.13

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-7.41	-	-	-	-	0.60	-6.81	-5.00	1.81
6475	-8.04	-	-	-	-	0.60	-7.44	-5.00	2.44
6515	-7.51	-	-	-	-	0.60	-6.91	-5.00	1.91

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-6.83	-	-	-	-	0.60	-6.23	-5.00	1.23
6475	-7.85	-	-	-	-	0.60	-7.25	-5.00	2.25
6515	-7.57	-	-	-	-	0.60	-6.97	-5.00	1.97

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-7.51	-	-	-	-	0.60	-6.91	-5.00	1.91
6485	-7.67	-	-	-	-	0.60	-7.07	-5.00	2.07
6525	-7.60	-	-	-	-	0.60	-7.00	-5.00	2.00

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-7.02	-	-	-	-	0.60	-6.42	-5.00	1.42

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-7.31	-	-	-	-	0.60	-6.71	-5.00	1.71

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	1 (Core 0)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-8.39	-	-	-	-	0.60	-7.79	-5.00	2.79

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-6.72	-	-	-	-	0.60	-6.12	-5.00	1.12

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	1 (Core 0)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-7.40	-	-	-	-	0.60	-6.80	-5.00	1.80

Maximum EIRP SD (U-NII-6) / VLP (continued)**Results: VLP / SISO / Core 1**

Antenna Configuration:	SISO	Mode:	802.11a20
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-9.04	-	-	-	2.60	-6.44	-5.00	1.44
6475	-	-9.49	-	-	-	2.60	-6.89	-5.00	1.89
6515	-	-8.86	-	-	-	2.60	-6.26	-5.00	1.26

Antenna Configuration:	SISO	Mode:	802.11a40
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-	-8.54	-	-	-	2.60	-5.94	-5.00	0.94
6485	-	-8.19	-	-	-	2.60	-5.59	-5.00	0.59
6525	-	-8.24	-	-	-	2.60	-5.64	-5.00	0.64

Antenna Configuration:	SISO	Mode:	802.11a80
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	-8.29	-	-	-	2.60	-5.69	-5.00	0.69

Antenna Configuration:	SISO	Mode:	802.11a160
Test Port:	2 (Core 1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-9.81	-	-	-	2.60	-7.21	-5.00	2.21

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-9.73	-	-	-	2.60	-7.13	-5.00	2.13
6475	-	-9.84	-	-	-	2.60	-7.24	-5.00	2.24
6515	-	-9.57	-	-	-	2.60	-6.97	-5.00	1.97

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-9.75	-	-	-	2.60	-7.15	-5.00	2.15
6475	-	-11.68	-	-	-	2.60	-9.08	-5.00	4.08
6515	-	-9.40	-	-	-	2.60	-6.80	-5.00	1.80

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU52
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-9.56	-	-	-	2.60	-6.96	-5.00	1.96
6475	-	-10.23	-	-	-	2.60	-7.63	-5.00	2.63
6515	-	-9.40	-	-	-	2.60	-6.80	-5.00	1.80

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE20 RU106
Test Port:	2 (Core 1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-9.62	-	-	-	2.60	-7.02	-5.00	2.02
6475	-	-10.10	-	-	-	2.60	-7.50	-5.00	2.50
6515	-	-9.20	-	-	-	2.60	-6.60	-5.00	1.60

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 52+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-9.35	-	-	-	2.60	-6.75	-5.00	1.75
6475	-	-10.08	-	-	-	2.60	-7.48	-5.00	2.48
6515	-	-9.74	-	-	-	2.60	-7.14	-5.00	2.14

Antenna Configuration:	SISO	Mode:	802.11be EHT20 MRU 106+26
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-	-9.32	-	-	-	2.60	-6.72	-5.00	1.72
6475	-	-9.82	-	-	-	2.60	-7.22	-5.00	2.22
6515	-	-9.49	-	-	-	2.60	-6.89	-5.00	1.89

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11ax HE40 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-	-9.49	-	-	-	2.60	-6.89	-5.00	1.89
6485	-	-10.00	-	-	-	2.60	-7.40	-5.00	2.40
6525	-	-9.41	-	-	-	2.60	-6.81	-5.00	1.81

Antenna Configuration:	SISO	Mode:	802.11ax HE80 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	-9.45	-	-	-	2.60	-6.85	-5.00	1.85

Antenna Configuration:	SISO	Mode:	802.11be EHT80 MRU 484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-	-9.63	-	-	-	2.60	-7.03	-5.00	2.03

Antenna Configuration:	SISO	Mode:	802.11ax HE160 SU
Test Port:	2 (Core 1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-10.23	-	-	-	2.60	-7.63	-5.00	2.63

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-8.44	-	-	-	2.60	-5.84	-5.00	0.84

Antenna Configuration:	SISO	Mode:	802.11be EHT160 MRU 996+484+242
Test Port:	2 (Core 1)	Rate/Modulation:	MCS9x1 (256QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-	-9.07	-	-	-	2.60	-6.47	-5.00	1.47

Maximum EIRP SD (U-NII-6) / VLP (continued)**Results: VLP / MIMO CDD**

Antenna Configuration:	MIMO CDD	Mode:	802.11a20
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-14.95	-14.82	-	-	-11.87	4.67	-7.21	-5.00	2.21
6475	-14.74	-14.50	-	-	-11.61	4.67	-6.94	-5.00	1.94
6515	-14.82	-14.36	-	-	-11.57	4.67	-6.91	-5.00	1.91

Antenna Configuration:	MIMO CDD	Mode:	802.11a40
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6445	-14.20	-14.87	-	-	-11.51	4.67	-6.85	-5.00	1.85
6485	-14.35	-14.78	-	-	-11.55	4.67	-6.88	-5.00	1.88
6525	-13.65	-14.16	-	-	-10.89	4.67	-6.22	-5.00	1.22

Antenna Configuration:	MIMO CDD	Mode:	802.11a80
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6465	-14.11	-13.38	-	-	-10.72	4.67	-6.05	-5.00	1.05

Antenna Configuration:	MIMO CDD	Mode:	802.11a160
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	12 Mbps (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6505	-13.84	-13.49	-	-	-10.65	4.67	-5.98	-5.00	0.98

Maximum EIRP SD (U-NII-6) / VLP (continued)

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 SU
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS2x1 (QPSK)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-15.21	-15.02	-	-	-12.10	4.67	-7.43	-5.00	2.43
6475	-15.43	-15.06	-	-	-12.23	4.67	-7.56	-5.00	2.56
6515	-14.96	-14.90	-	-	-11.92	4.67	-7.25	-5.00	2.25

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU52
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-14.50	-15.18	-	-	-11.82	4.67	-7.15	-5.00	2.15
6475	-15.17	-15.49	-	-	-12.32	4.67	-7.65	-5.00	2.65
6515	-14.84	-15.08	-	-	-11.95	4.67	-7.28	-5.00	2.28

Antenna Configuration:	MIMO CDD	Mode:	802.11ax HE20 RU106
Test Port:	1+2 (Core 0+Core1)	Rate/Modulation:	MCS11x1 (1024QAM)

Test Frequency (MHz)	PSD (dBm / MHz)					Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ				
6435	-14.53	-15.07	-	-	-11.78	4.67	-7.11	-5.00	2.11
6475	-15.30	-15.48	-	-	-12.38	4.67	-7.71	-5.00	2.71
6515	-14.47	-14.77	-	-	-11.61	4.67	-6.94	-5.00	1.94