



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU LPI	-14.38	6039.450
802.11ax HE40 SU LPI	-8.44	6169.898
802.11ax HE80 SU LPI	-8.03	6264.000
802.11ax HE160 SU LPI	-7.20	6745.000
802.11ax HE20 RU106 LPI	-13.22	6866.400
802.11ax HE20 RU26 LPI	-12.24	7106.100
802.11ax HE20 RU52 LPI	-10.91	7106.100
802.11be EHT20 RU Size 106 + RU Size 26 LPI	-12.99	6463.350
802.11be EHT20 RU Size 52 + RU Size 26 LPI	-14.13	6525.500
802.11be EHT80 RU Size 484 + RU Size 242 LPI	-8.68	6188.000
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 LPI (Secondary)	-7.74	6196.000
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 LPI (Primary)	-7.84	6197.000
802.11be EHT160 RU Size 996 + RU Size 484 LPI (Secondary)	-7.52	6425.000
802.11be EHT160 RU Size 996 + RU Size 484 LPI (Primary)	-8.09	6205.000

Table 927 - Unwanted Emissions Within the RLAN Band Summary Results – MIMO SDM

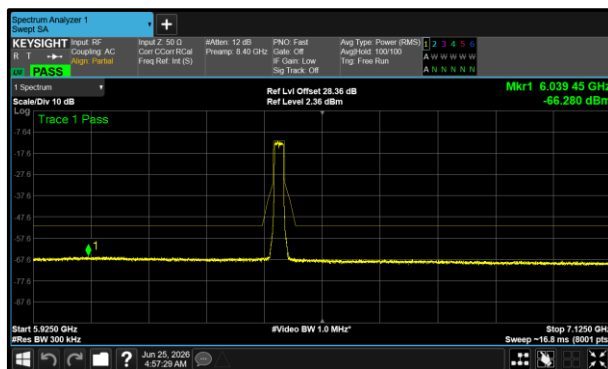


Figure 735 - B(Core 1) 802.11ax HE20 SU LPI
6435 MHz (CH97)

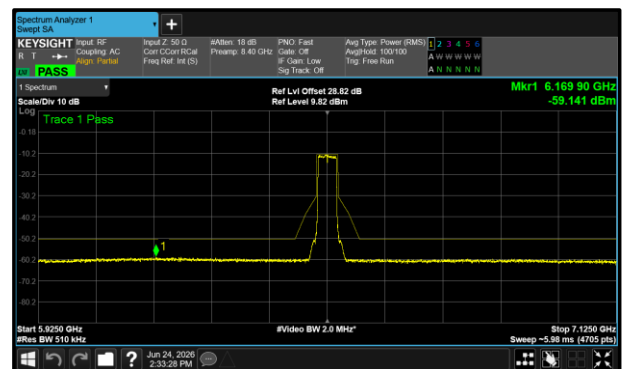


Figure 736 - A(Core 0) 802.11ax HE40 SU LPI
6525 MHz (CH115)

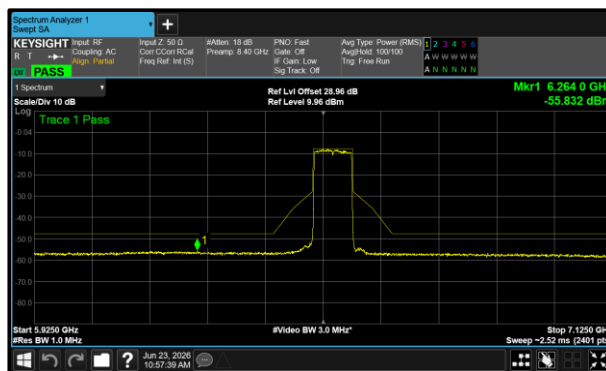


Figure 737 - A(Core 0) 802.11ax HE80 SU LPI
6545 MHz (CH119)

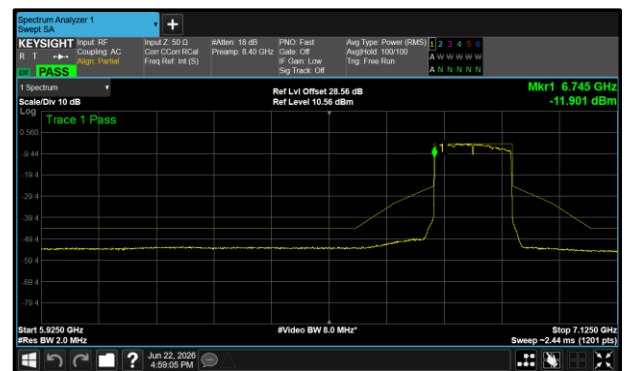


Figure 738 - B(Core 1) 802.11ax HE160 SU LPI
6825 MHz (CH175)

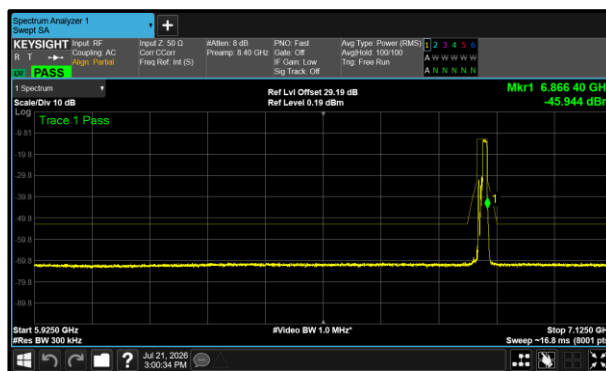


Figure 739 - A(Core 0) 802.11ax HE20 RU106 LPI
6855 MHz (CH181)

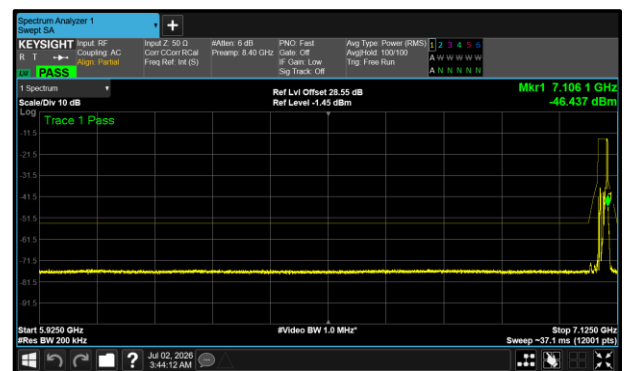


Figure 740 - B(Core 1) 802.11ax HE20 RU26 LPI
7095 MHz (CH229)

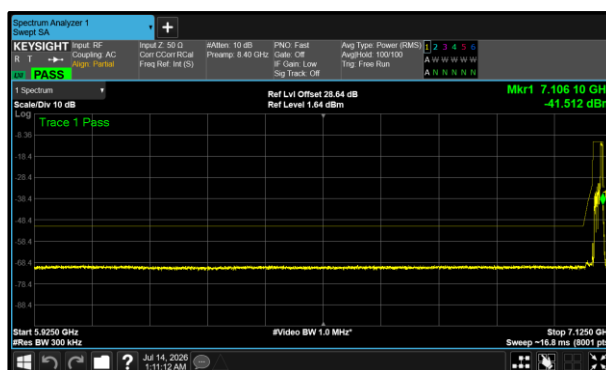


Figure 741 - B(Core 1) 802.11ax HE20 RU52 LPI
7095 MHz (CH229)

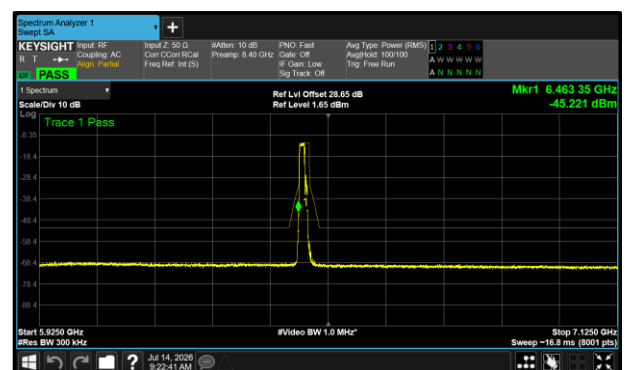


Figure 742 - B(Core 1) 802.11be EHT20 RU Size
106 + RU Size 26 LPI 6475 MHz (CH105)

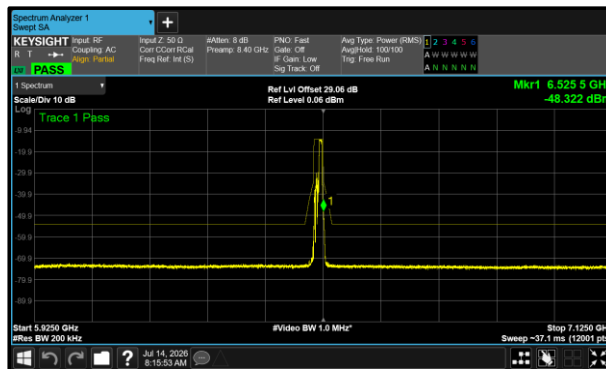


**Figure 743 - A(Core 0) 802.11be EHT20 RU Size
52 + RU Size 26 LPI 6515 MHz (CH113)**

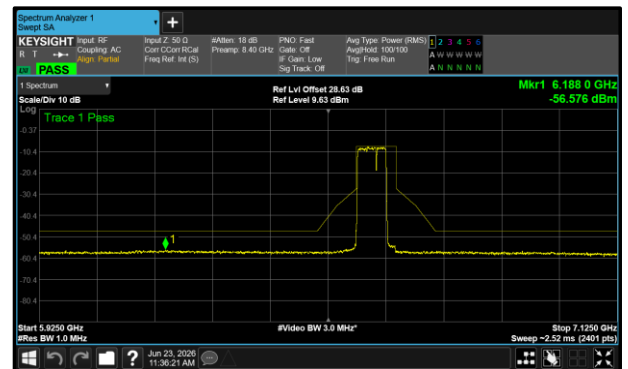


**Figure 744 - A(Core 0) 802.11be EHT80 RU Size
484 + RU Size 242 LPI 6625 MHz (CH135)**

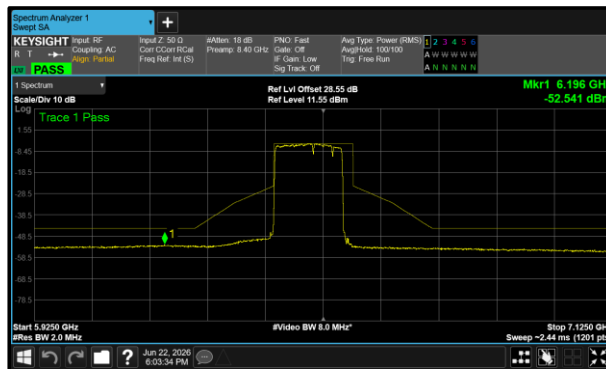


**Figure 745 - B(Core 1) 802.11be EHT160 RU Size
996 + RU Size 484 + RU Size 242 LPI (Secondary)
6505 MHz (CH111)**

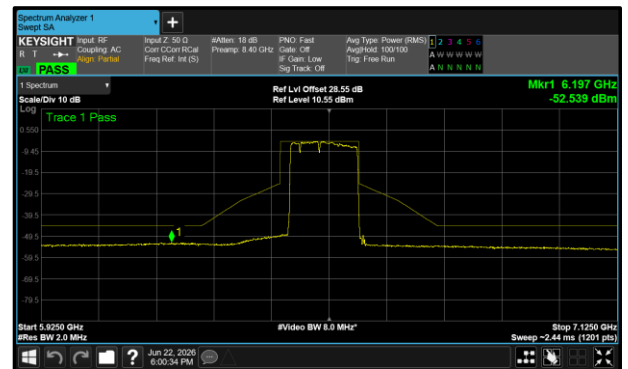


**Figure 746 - B(Core 1) 802.11be EHT160 RU Size
996 + RU Size 484 + RU Size 242 LPI (Primary)
6505 MHz (CH111)**

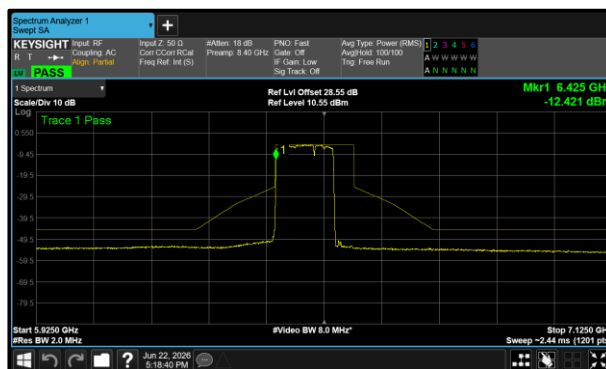


**Figure 747 - B(Core 1) 802.11be EHT160 RU Size
996 + RU Size 484 LPI (Secondary) 6505 MHz
(CH111)**

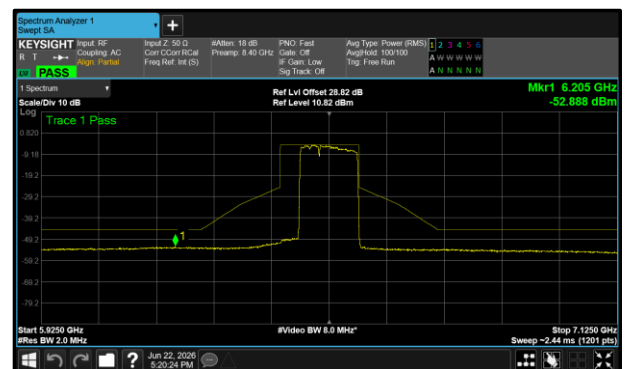


**Figure 748 - A(Core 0) 802.11be EHT160 RU Size
996 + RU Size 484 LPI (Primary) 6505 MHz
(CH111)**



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU SP	-15.09	6380.700
802.11ax HE40 SU SP	-8.90	6213.520
802.11ax HE80 SU SP	-7.93	6259.500
802.11ax HE160 SU SP	-7.46	6098.000
802.11ax HE20 RU106 SP	-12.98	6163.500
802.11ax HE20 RU26 SP	-12.74	6866.100
802.11ax HE20 RU52 SP	-12.84	6163.500
802.11be EHT20 RU Size 106 + RU Size 26 SP	-12.31	6526.350
802.11be EHT20 RU Size 52 + RU Size 26 SP	-15.02	6525.600
802.11be EHT80 RU Size 484 + RU Size 242 SP	-8.25	6828.500
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary)	-7.78	6253.000
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary)	-7.73	5938.000
802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary)	-7.80	5931.000
802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary)	-7.61	5938.000

Table 928 - Unwanted Emissions Within the RLAN Band Summary Results – MIMO SDM

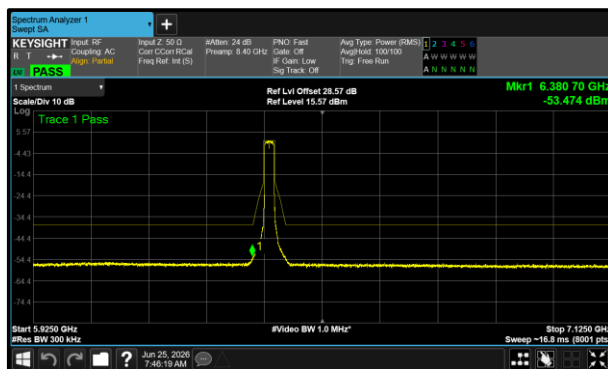


**Figure 749 - A(Core 0) 802.11ax HE20 SU SP
6415 MHz (CH93)**

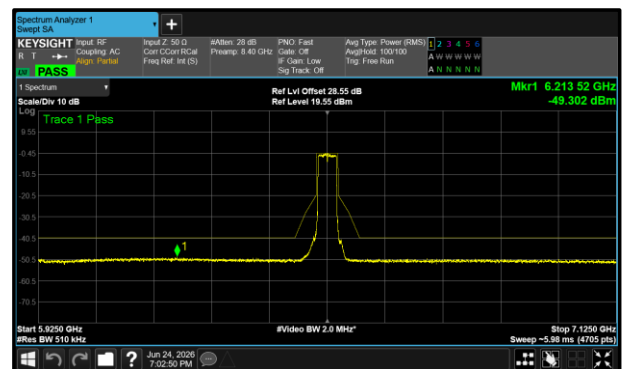


**Figure 750 - B(Core 1) 802.11ax HE40 SU SP
6525 MHz (CH115)**

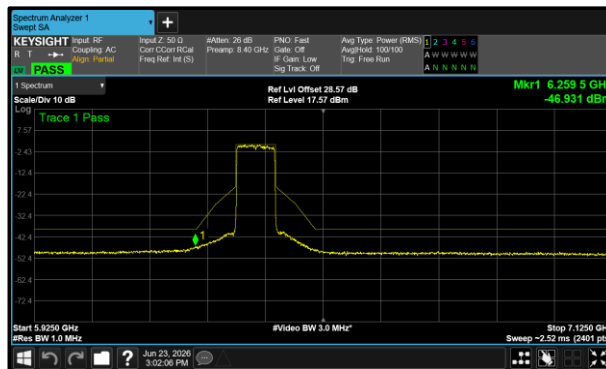


Figure 751 - A(Core 0) 802.11ax HE80 SU SP
6385 MHz (CH87)

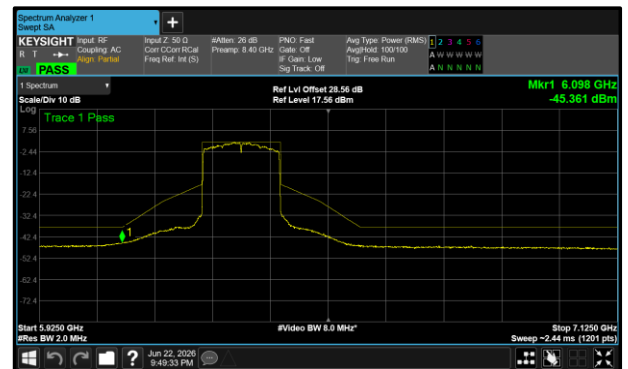


Figure 752 - A(Core 0) 802.11ax HE160 SU SP
6345 MHz (CH79)

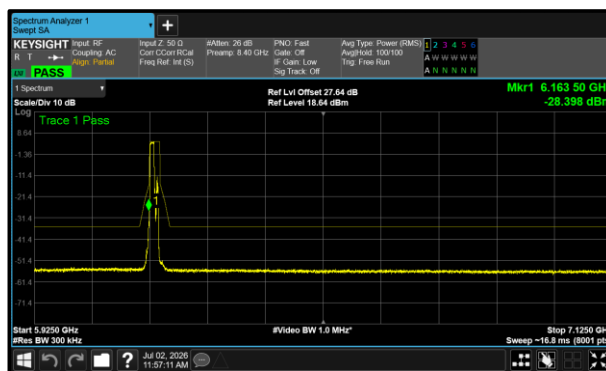


Figure 753 - B(Core 1) 802.11ax HE20 RU106 SP
6175 MHz (CH45)

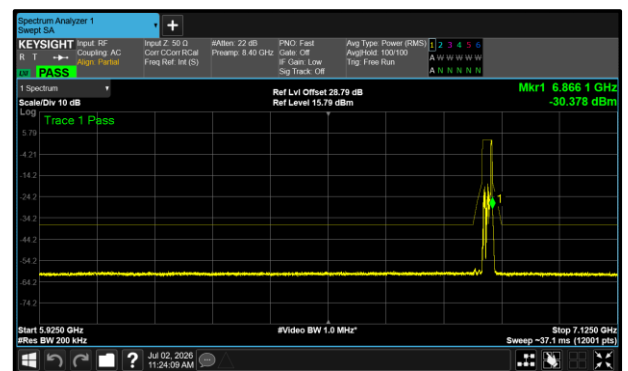


Figure 754 - A(Core 0) 802.11ax HE20 RU26 SP
6855 MHz (CH181)

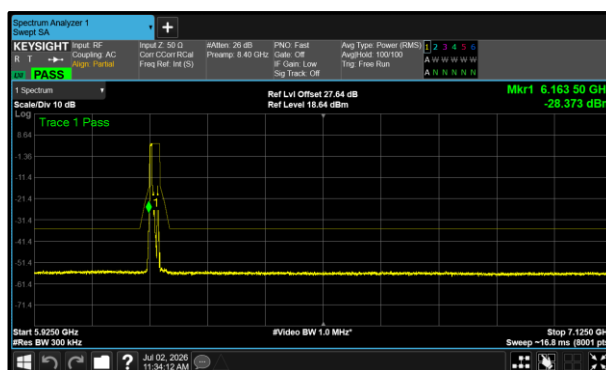


Figure 755 - B(Core 1) 802.11ax HE20 RU52 SP
6175 MHz (CH45)

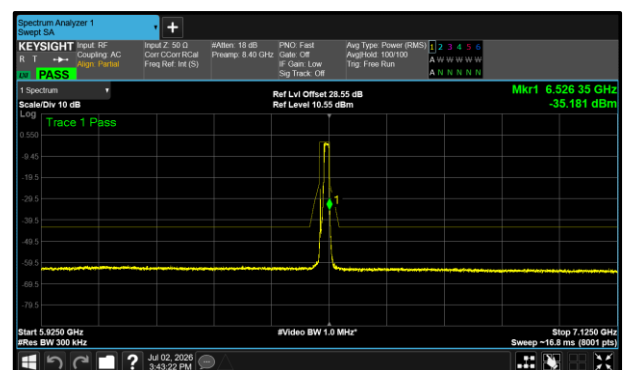


Figure 756 - B(Core 1) 802.11be EHT20 RU Size
106 + RU Size 26 SP 6515 MHz (CH113)

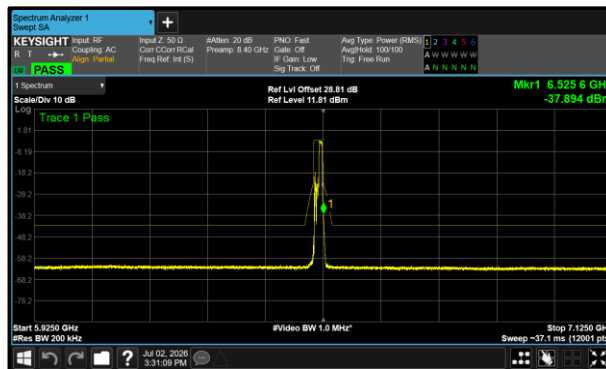


Figure 757 - A(Core 0) 802.11be EHT20 RU Size 52 + RU Size 26 SP 6515 MHz (CH113)

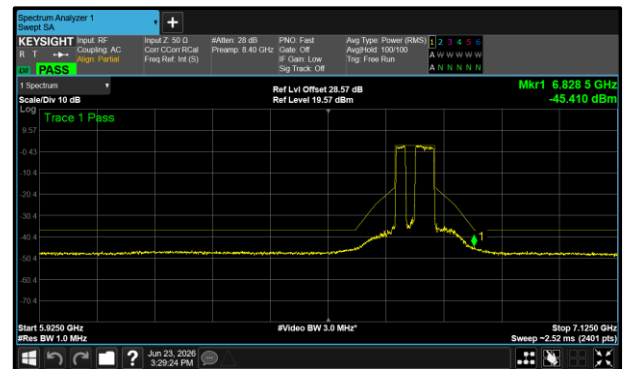


Figure 758 - A(Core 0) 802.11be EHT80 RU Size 484 + RU Size 242 SP 6705 MHz (CH151)

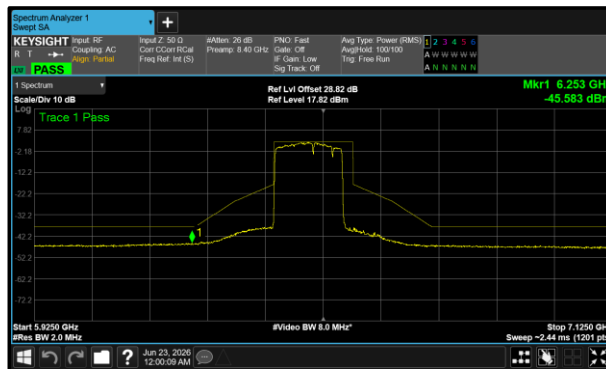


Figure 759 - A(Core 0) 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary) 6505 MHz (CH111)

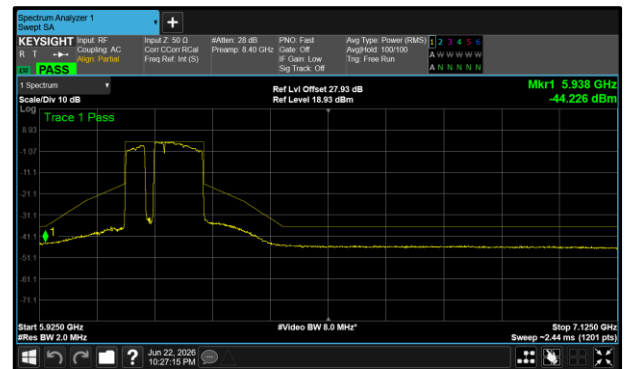


Figure 760 - B(Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary) 6185 MHz (CH47)

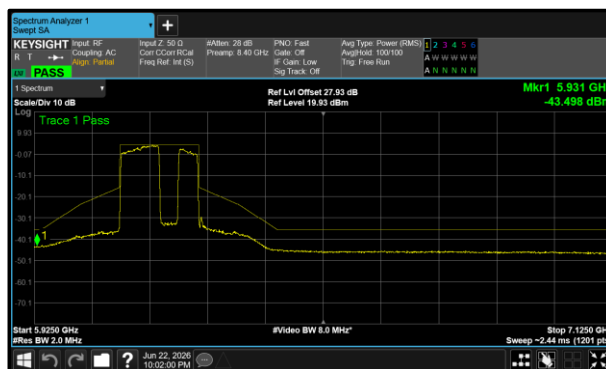


Figure 761 - B(Core 1) 802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary) 6185 MHz (CH47)

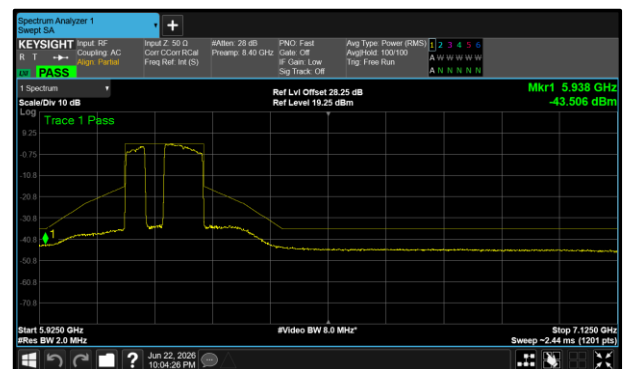


Figure 762 - A(Core 0) 802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary) 6185 MHz (CH47)



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU VLP	-15.37	7019.700
802.11ax HE40 SU VLP	-8.67	6110.969
802.11ax HE80 SU VLP	-7.96	6221.500
802.11ax HE160 SU VLP	-6.99	6193.000
802.11ax HE20 RU106 VLP	-12.80	6383.550
802.11ax HE20 RU26 VLP	-11.45	6684.200
802.11ax HE20 RU52 VLP	-11.99	6423.750
802.11be EHT20 RU Size 106 + RU Size 26 VLP	-12.83	6866.400
802.11be EHT20 RU Size 52 + RU Size 26 VLP	-13.72	6885.400
802.11be EHT80 RU Size 484 + RU Size 242 VLP	-7.19	6181.000
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Primary)	-7.48	6199.000
802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Secondary)	-7.48	6214.000
802.11be EHT160 RU Size 996 + RU Size 484 VLP (Primary)	-7.28	6204.000
802.11be EHT160 RU Size 996 + RU Size 484 VLP (Secondary)	-7.42	6182.000

Table 929 - Unwanted Emissions Within the RLAN Band Summary Results – MIMO SDM

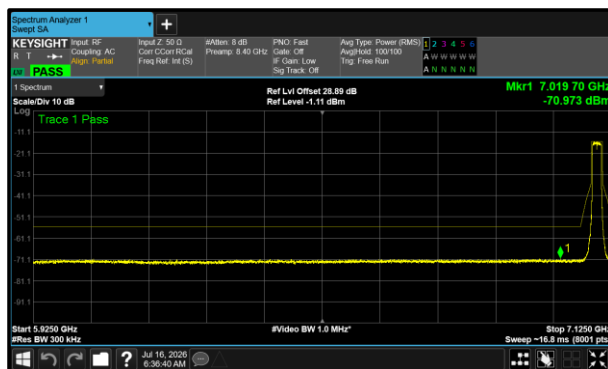


**Figure 763 - A(Core 0) 802.11ax HE20 SU VLP
7095 MHz (CH229)**

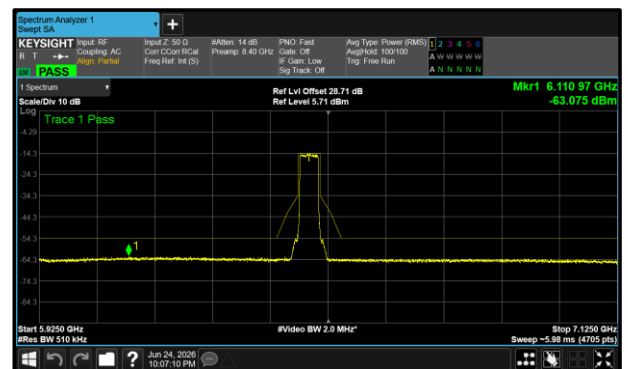


**Figure 764 - A(Core 0) 802.11ax HE40 SU VLP
6485 MHz (CH107)**

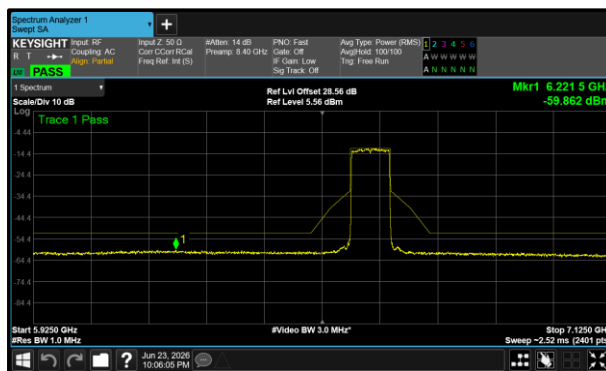


Figure 765 - B(Core 1) 802.11ax HE80 SU VLP
6625 MHz (CH135)

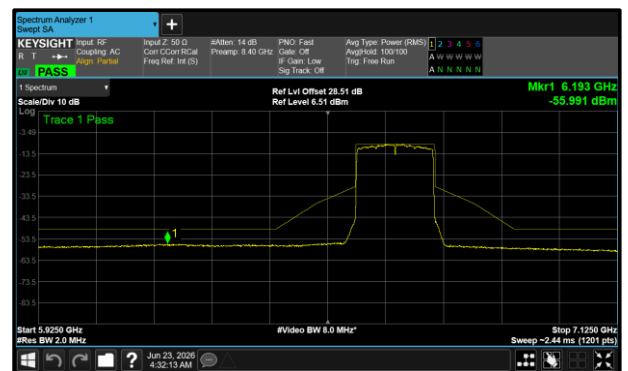


Figure 766 - B(Core 1) 802.11ax HE160 SU VLP
6665 MHz (CH143)

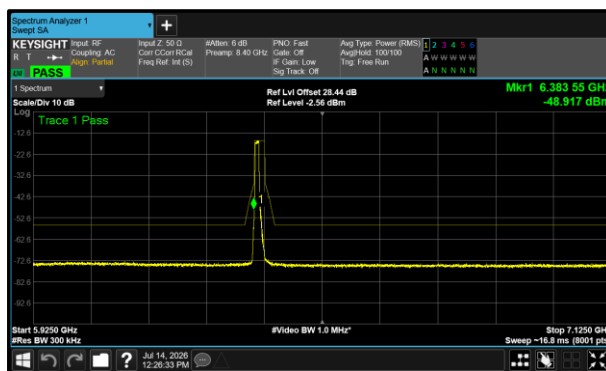


Figure 767 - B(Core 1) 802.11ax HE20 RU106
VLP 6395 MHz (CH89)

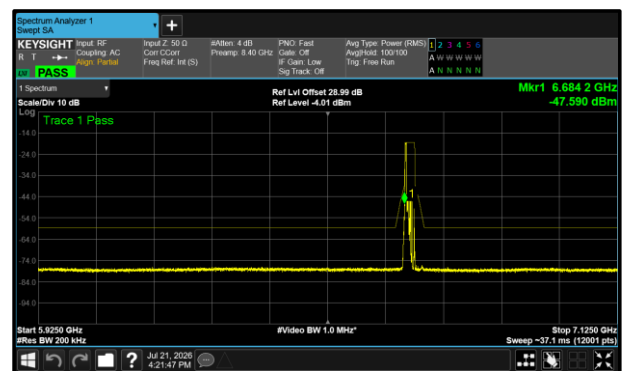


Figure 768 - A(Core 0) 802.11ax HE20 RU26 VLP
6695 MHz (CH149)

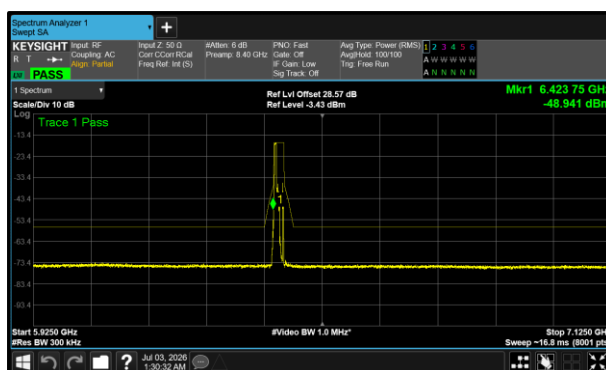


Figure 769 - A(Core 0) 802.11ax HE20 RU52 VLP
6435 MHz (CH97)

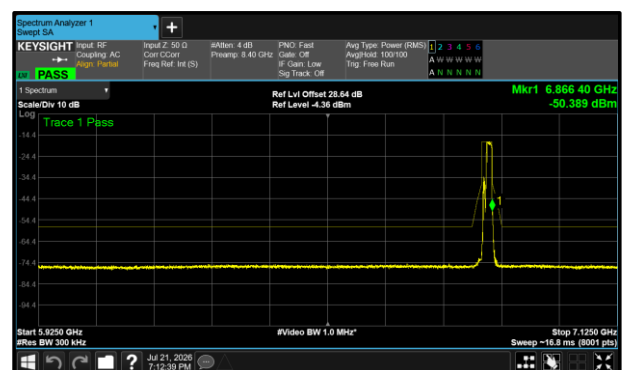


Figure 770 - B(Core 1) 802.11be EHT20 RU Size
106 + RU Size 26 VLP 6855 MHz (CH181)

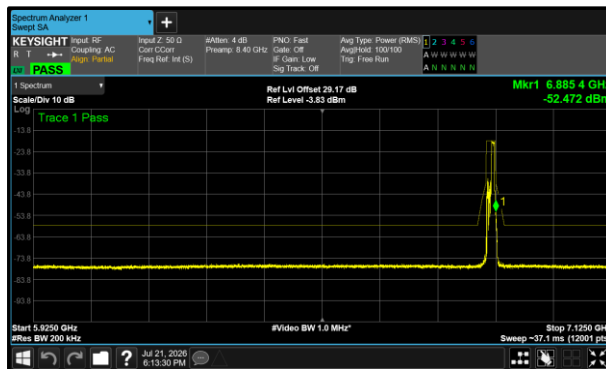


**Figure 771 - A(Core 0) 802.11be EHT20 RU Size
52 + RU Size 26 VLP 6875 MHz (CH185)**

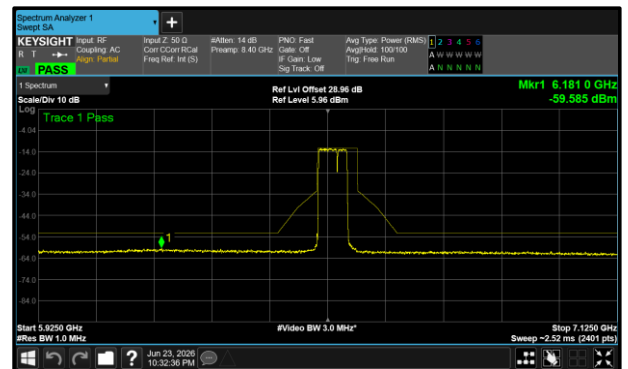


**Figure 772 - A(Core 0) 802.11be EHT80 RU Size
484 + RU Size 242 VLP 6545 MHz (CH119)**

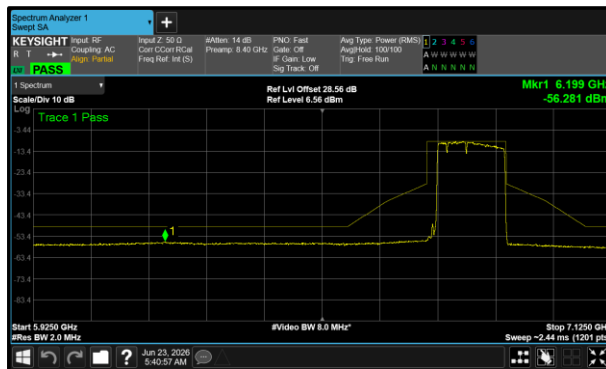


**Figure 773 - B(Core 1) 802.11be EHT160 RU Size
996 + RU Size 484 + RU Size 242 VLP (Primary)
6825 MHz (CH175)**

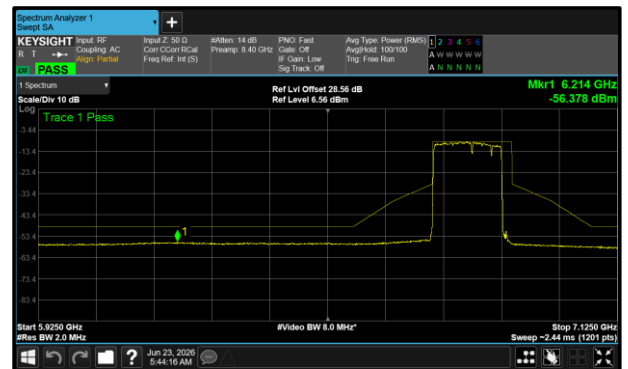


**Figure 774 - B(Core 1) 802.11be EHT160 RU Size
996 + RU Size 484 + RU Size 242 VLP
(Secondary) 6825 MHz (CH175)**

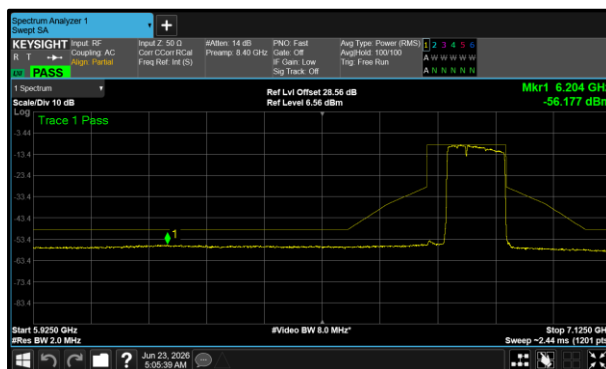


**Figure 775 - B(Core 1) 802.11be EHT160 RU Size
996 + RU Size 484 VLP (Primary) 6825 MHz
(CH175)**

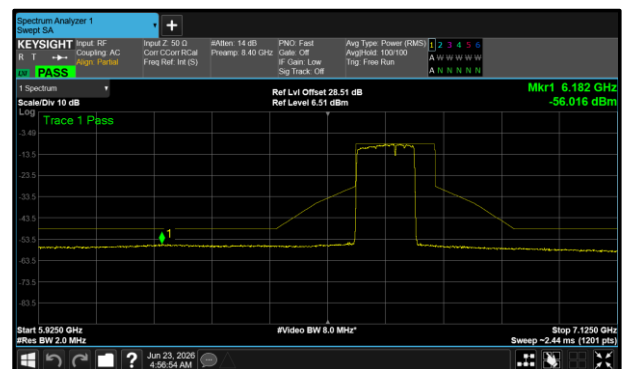


**Figure 776 - B(Core 1) 802.11be EHT160 RU Size
996 + RU Size 484 VLP (Secondary) 6665 MHz
(CH143)**

Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU LPI	-14.55	6048.750
802.11ax HE40 SU LPI	-8.55	6161.480
802.11ax HE80 SU LPI	-7.64	6217.500
802.11ax HE160 SU LPI	-7.32	6745.000

Table 930 - Unwanted Emissions Within the RLAN Band Summary Results - TxBF

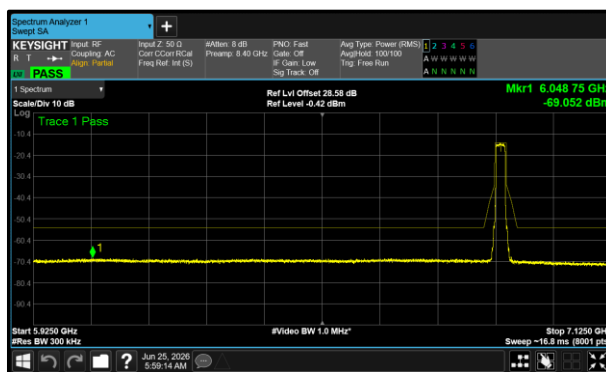


**Figure 777 - B(Core 1) 802.11ax HE20 SU LPI
6895 MHz (CH189)**

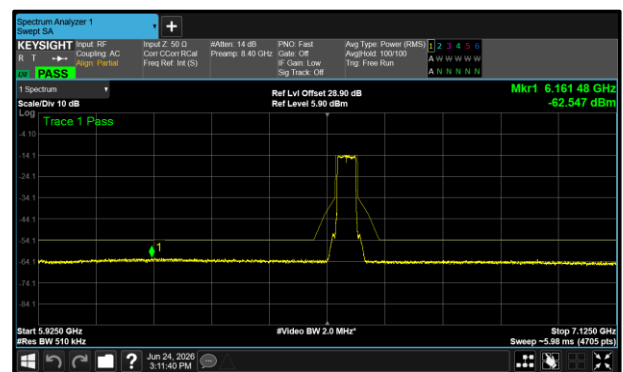


**Figure 778 - A(Core 0) 802.11ax HE40 SU LPI
6565 MHz (CH123)**

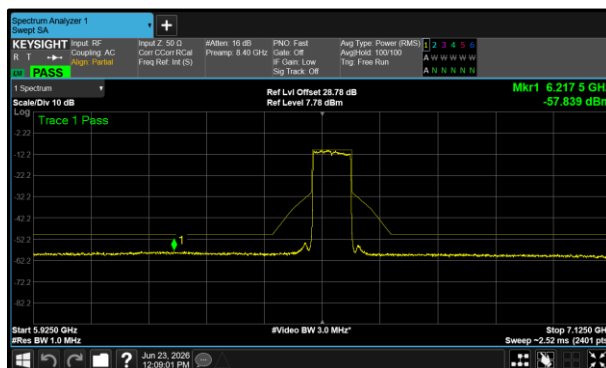


**Figure 779 - B(Core 1) 802.11ax HE80 SU LPI
6545 MHz (CH119)**

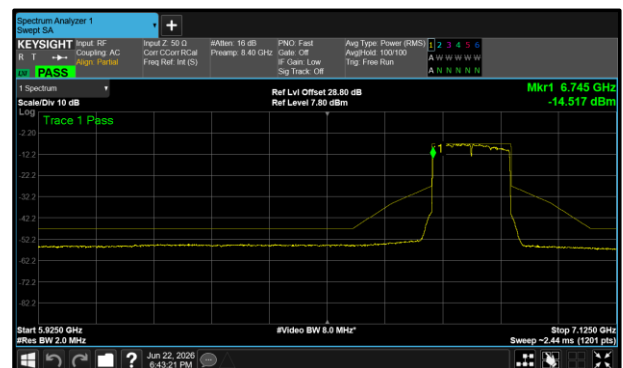


**Figure 780 - A(Core 0) 802.11ax HE160 SU LPI
6825 MHz (CH175)**



Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU SP	-16.19	6064.050
802.11ax HE40 SU SP	-8.91	6146.173
802.11ax HE80 SU SP	-8.53	6175.000
802.11ax HE160 SU SP	-7.50	6096.000

Table 931 - Unwanted Emissions Within the RLAN Band Summary Results - TxBF

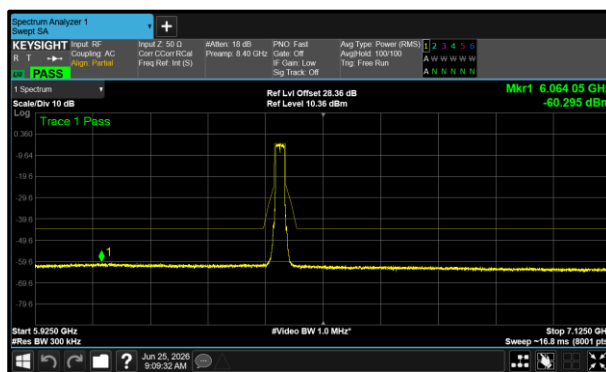


**Figure 781 - B(Core 1) 802.11ax HE20 SU SP
6435 MHz (CH97)**

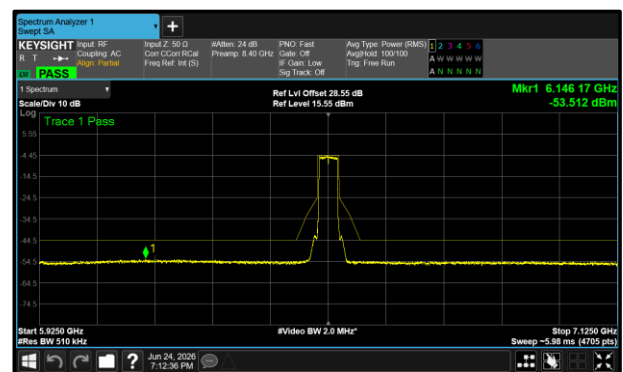


**Figure 782 - B(Core 1) 802.11ax HE40 SU SP
6525 MHz (CH115)**

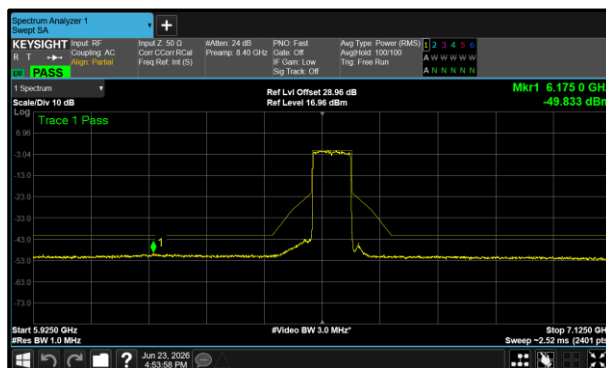


**Figure 783 - A(Core 0) 802.11ax HE80 SU SP
6545 MHz (CH119)**

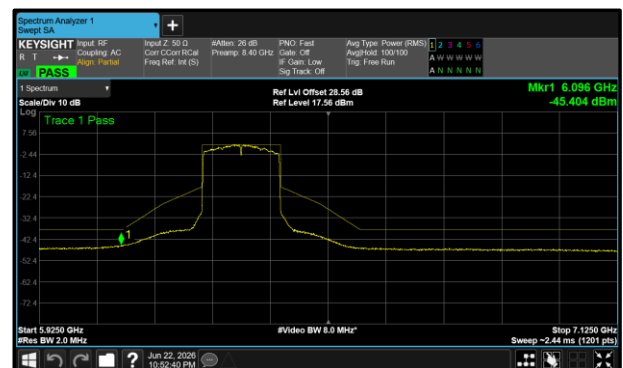


**Figure 784 - A(Core 0) 802.11ax HE160 SU SP
6345 MHz (CH79)**

Protocol	Unwanted Emissions Within the RLAN Band	
	Margin (dB)	Frequency (MHz)
802.11ax HE20 SU VLP	-14.03	6375.000
802.11ax HE40 SU VLP	-9.31	6191.071
802.11ax HE80 SU VLP	-7.28	6200.500
802.11ax HE160 SU VLP	-6.21	6220.000

Table 932 - Unwanted Emissions Within the RLAN Band Summary Results - TxBF

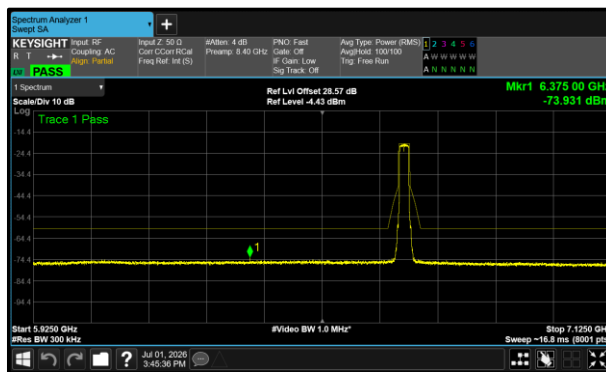


**Figure 785 - A(Core 0) 802.11ax HE20 SU VLP
6695 MHz (CH149)**

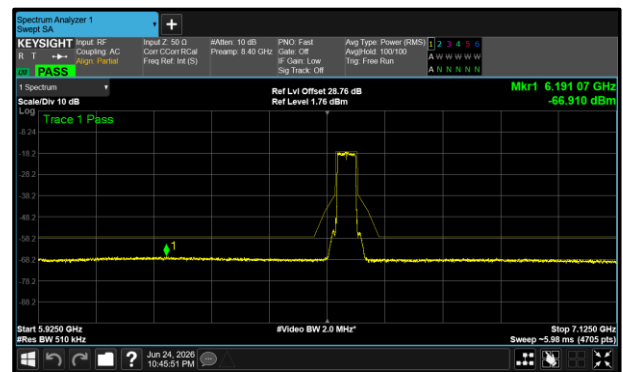


**Figure 786 - B(Core 1) 802.11ax HE40 SU VLP
6565 MHz (CH123)**

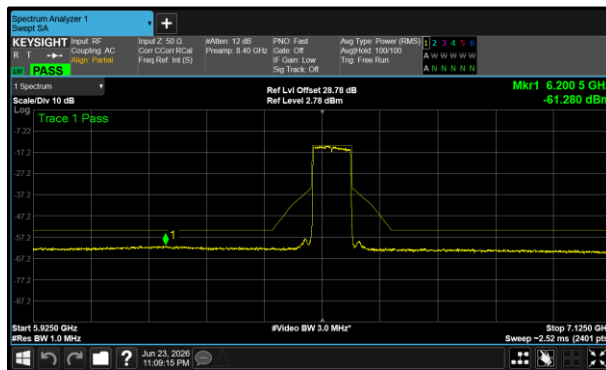


**Figure 787 - B(Core 1) 802.11ax HE80 SU VLP
6545 MHz (CH119)**

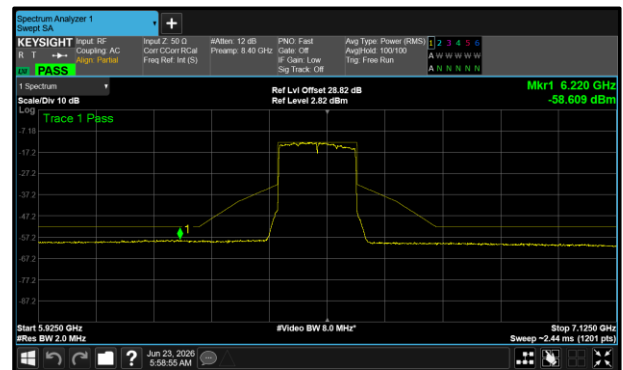


**Figure 788 - A(Core 0) 802.11ax HE160 SU VLP
6505 MHz (CH111)**



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a20 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	-14.44	-	-	-
5975	-15.30	-	-	-
6175	-15.32	-	-	-
6415	-14.83	-	-	-
6435	-14.41	-	-	-
6475	-15.07	-	-	-
6515	-13.86	-	-	-
6535	-15.53	-	-	-
6695	-15.51	-	-	-
6855	-15.76	-	-	-
6875	-14.73	-	-	-
6895	-14.49	-	-	-
6995	-14.92	-	-	-
7095	-13.68	-	-	-
7115	-13.77	-	-	-

Table 933 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a40 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	-10.81	-	-	-
6165	-9.66	-	-	-
6405	-10.38	-	-	-
6445	-9.97	-	-	-
6485	-10.45	-	-	-
6525	-9.95	-	-	-
6565	-9.42	-	-	-
6725	-11.28	-	-	-
6845	-11.79	-	-	-
6885	-11.53	-	-	-
6925	-11.42	-	-	-
7005	-11.86	-	-	-
7085	-11.82	-	-	-

Table 934 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a80 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6065	-10.29	-	-	-
6145	-10.40	-	-	-
6385	-8.10	-	-	-
6465	-7.98	-	-	-
6545	-9.38	-	-	-
6625	-10.63	-	-	-
6705	-9.78	-	-	-
6785	-10.00	-	-	-
6865	-11.24	-	-	-
6945	-9.95	-	-	-
7025	-10.12	-	-	-

Table 935 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a80 LPI	Duty Cycle (%):	-
Data Rate:	24 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	-9.74	-	-	-

Table 936 - Unwanted Emissions Within the Band Results

Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a160 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185	-9.80	-	-	-
6345	-8.78	-	-	-
6505	-9.13	-	-	-
6665	-9.72	-	-	-
6825	-9.18	-	-	-
6985	-8.38	-	-	-

Table 937 - Unwanted Emissions Within the Band Results



Test Configuration				
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5	
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j	

DUT Configuration				
Mode:	802.11a160 LPI	Duty Cycle (%):	-	
Data Rate:	24 Mbps	DCCF (dB):	-	
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-	
Active Port(s):	A (Core 0)	Active Chain Id(s):	0	

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	-10.29	-	-	-

Table 938 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	-17.93	-	-	-
6175	-16.06	-	-	-
6415	-16.55	-	-	-
6435	-16.73	-	-	-
6475	-16.97	-	-	-
6515	-15.56	-	-	-
6535	-17.54	-	-	-
6695	-16.83	-	-	-
6855	-16.50	-	-	-
6875	-16.48	-	-	-
6895	-17.04	-	-	-
6995	-16.73	-	-	-
7095	-15.22	-	-	-
7115	-15.90	-	-	-

Table 939 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	-11.11	-	-	-
6165	-9.42	-	-	-
6405	-9.83	-	-	-
6445	-9.61	-	-	-
6485	-9.81	-	-	-
6525	-9.70	-	-	-
6565	-9.30	-	-	-
6725	-11.84	-	-	-
6845	-11.51	-	-	-
6885	-11.76	-	-	-
6925	-11.38	-	-	-
7005	-12.01	-	-	-
7085	-11.52	-	-	-

Table 940 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	-9.36	-	-	-
6145	-10.09	-	-	-
6385	-8.79	-	-	-
6465	-9.61	-	-	-
6545	-9.34	-	-	-
6625	-10.61	-	-	-
6705	-9.41	-	-	-
6785	-8.08	-	-	-
6865	-10.91	-	-	-
6945	-10.95	-	-	-
7025	-10.08	-	-	-

Table 941 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	-8.47	-	-	-
6185	-8.39	-	-	-
6345	-7.33	-	-	-
6505	-8.01	-	-	-
6665	-8.00	-	-	-
6825	-7.86	-	-	-
6985	-7.48	-	-	-

Table 942 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU26 LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU26.0)	-13.99	-	-	-
6175 (RU26.0)	-14.09	-	-	-
6415 (RU26.8)	-13.20	-	-	-
6435 (RU26.0)	-15.36	-	-	-
6475 (RU26.0)	-12.74	-	-	-
6515 (RU26.8)	-13.06	-	-	-
6535 (RU26.0)	-16.52	-	-	-
6695 (RU26.0)	-14.39	-	-	-
6855 (RU26.8)	-11.86	-	-	-
6875 (RU26.3)	-21.42	-	-	-
6875 (RU26.5)	-21.39	-	-	-
6895 (RU26.0)	-13.53	-	-	-
6995 (RU26.0)	-10.57	-	-	-
7095 (RU26.8)	-12.98	-	-	-

Table 943 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU52 LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU52.37)	-11.63	-	-	-
6175 (RU52.37)	-14.97	-	-	-
6415 (RU52.40)	-13.80	-	-	-
6435 (RU52.37)	-13.30	-	-	-
6475 (RU52.37)	-16.41	-	-	-
6515 (RU52.40)	-14.73	-	-	-
6535 (RU52.37)	-14.83	-	-	-
6695 (RU52.37)	-16.00	-	-	-
6855 (RU52.40)	-14.90	-	-	-
6875 (RU52.38)	-19.27	-	-	-
6875 (RU52.39)	-19.77	-	-	-
6895 (RU52.37)	-14.34	-	-	-
6995 (RU52.37)	-14.28	-	-	-
7095 (RU52.40)	-13.09	-	-	-

Table 944 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU106 LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU106.53)	-16.88	-	-	-
6175 (RU106.53)	-15.16	-	-	-
6415 (RU106.54)	-14.32	-	-	-
6435 (RU106.53)	-15.10	-	-	-
6475 (RU106.53)	-15.17	-	-	-
6515 (RU106.54)	-15.14	-	-	-
6535 (RU106.53)	-14.55	-	-	-
6695 (RU106.53)	-14.75	-	-	-
6855 (RU106.54)	-14.78	-	-	-
6875 (RU106.53)	-15.27	-	-	-
6875 (RU106.54)	-14.73	-	-	-
6895 (RU106.53)	-16.61	-	-	-
6995 (RU106.53)	-16.89	-	-	-
7095 (RU106.54)	-15.43	-	-	-

Table 945 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26 LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU Size 52 + RU Size 26.70)	-18.57	-	-	-
6175 (RU Size 52 + RU Size 26.70)	-16.72	-	-	-
6415 (RU Size 52 + RU Size 26.72)	-15.68	-	-	-
6435 (RU Size 52 + RU Size 26.70)	-18.00	-	-	-
6475 (RU Size 52 + RU Size 26.70)	-16.84	-	-	-
6515 (RU Size 52 + RU Size 26.72)	-15.46	-	-	-
6535 (RU Size 52 + RU Size 26.70)	-17.00	-	-	-
6695 (RU Size 52 + RU Size 26.70)	-16.53	-	-	-
6855 (RU Size 52 + RU Size 26.72)	-15.58	-	-	-
6875 (RU Size 52 + RU Size 26.70)	-17.11	-	-	-
6875 (RU Size 52 + RU Size 26.72)	-16.76	-	-	-
6895 (RU Size 52 + RU Size 26.70)	-16.10	-	-	-
6995 (RU Size 52 + RU Size 26.70)	-17.64	-	-	-
7095 (RU Size 52 + RU Size 26.72)	-15.30	-	-	-

Table 946 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26 LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU Size 106 + RU Size 26.82)	-16.80	-	-	-
6175 (RU Size 106 + RU Size 26.82)	-17.18	-	-	-
6415 (RU Size 106 + RU Size 26.83)	-15.36	-	-	-
6435 (RU Size 106 + RU Size 26.82)	-17.07	-	-	-
6475 (RU Size 106 + RU Size 26.82)	-15.71	-	-	-
6515 (RU Size 106 + RU Size 26.83)	-14.51	-	-	-
6535 (RU Size 106 + RU Size 26.82)	-16.96	-	-	-
6695 (RU Size 106 + RU Size 26.82)	-16.05	-	-	-
6855 (RU Size 106 + RU Size 26.83)	-15.15	-	-	-
6875 (RU Size 106 + RU Size 26.82)	-17.63	-	-	-
6875 (RU Size 106 + RU Size 26.83)	-13.31	-	-	-
6895 (RU Size 106 + RU Size 26.82)	-15.80	-	-	-
6995 (RU Size 106 + RU Size 26.82)	-15.52	-	-	-
7095 (RU Size 106 + RU Size 26.83)	-15.26	-	-	-

Table 947 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242 LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985 (RU Size 484 + RU Size 242.93)	-7.28	-	-	-
6065 (RU Size 484 + RU Size 242.90)	-8.66	-	-	-
6145 (RU Size 484 + RU Size 242.92)	-10.06	-	-	-
6385 (RU Size 484 + RU Size 242.90)	-9.49	-	-	-
6465 (RU Size 484 + RU Size 242.93)	-9.29	-	-	-
6545 (RU Size 484 + RU Size 242.90)	-9.48	-	-	-
6545 (RU Size 484 + RU Size 242.93)	-9.42	-	-	-
6625 (RU Size 484 + RU Size 242.93)	-10.68	-	-	-
6705 (RU Size 484 + RU Size 242.91)	-9.44	-	-	-
6785 (RU Size 484 + RU Size 242.90)	-11.02	-	-	-
6865 (RU Size 484 + RU Size 242.90)	-10.66	-	-	-
6865 (RU Size 484 + RU Size 242.93)	-9.25	-	-	-
6945 (RU Size 484 + RU Size 242.93)	-10.46	-	-	-
7025 (RU Size 484 + RU Size 242.90)	-10.92	-	-	-

Table 948 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 LPI (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484.95)	-8.58	-	-	-
6345 (RU Size 996 + RU Size 484.94)	-8.42	-	-	-
6505 (RU Size 996 + RU Size 484.94)	-8.79	-	-	-
6665 (RU Size 996 + RU Size 484.94)	-9.30	-	-	-
6825 (RU Size 996 + RU Size 484.94)	-9.57	-	-	-
6985 (RU Size 996 + RU Size 484.94)	-9.59	-	-	-

Table 949 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 LPI (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025 (RU Size 996 + RU Size 484.95)	-8.14	-	-	-
6185 (RU Size 996 + RU Size 484.94)	-8.28	-	-	-
6505 (RU Size 996 + RU Size 484.95)	-8.25	-	-	-
6665 (RU Size 996 + RU Size 484.95)	-8.73	-	-	-
6825 (RU Size 996 + RU Size 484.95)	-7.60	-	-	-
6985 (RU Size 996 + RU Size 484.95)	-8.73	-	-	-

Table 950 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 LPI (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484 + RU Size 242.97)	-8.60	-	-	-
6185 (RU Size 996 + RU Size 484 + RU Size 242.98)	-8.61	-	-	-
6185 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.31	-	-	-
6345 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.64	-	-	-
6505 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.85	-	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.93	-	-	-
6825 (RU Size 996 + RU Size 484 + RU Size 242.96)	-9.21	-	-	-
6985 (RU Size 996 + RU Size 484 + RU Size 242.96)	-9.64	-	-	-

Table 951 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 LPI (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.34	-	-	-
6505 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.41	-	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.66	-	-	-
6825 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.97	-	-	-
6985 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.32	-	-	-

Table 952 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a20 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	-14.57	-	-	-
6175	-15.02	-	-	-
6415	-14.49	-	-	-
6435	-14.95	-	-	-
6475	-14.30	-	-	-
6515	-13.76	-	-	-
6535	-14.98	-	-	-
6695	-15.21	-	-	-
6855	-14.46	-	-	-

Table 953 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a40 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	-11.84	-	-	-
6165	-12.47	-	-	-
6405	-11.51	-	-	-
6445	-11.31	-	-	-
6485	-11.42	-	-	-
6525	-9.33	-	-	-
6565	-11.22	-	-	-
6685	-11.62	-	-	-
6845	-11.54	-	-	-

Table 954 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a80 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	-11.96	-	-	-
6145	-10.24	-	-	-
6385	-10.33	-	-	-
6465	-10.33	-	-	-
6545	-10.24	-	-	-
6625	-9.96	-	-	-
6705	-10.69	-	-	-
6785	-10.61	-	-	-

Table 955 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a160 SP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	-6.27	-	-	-
6185	-5.76	-	-	-
6345	-8.76	-	-	-
6505	-5.17	-	-	-
6665	-4.33	-	-	-

Table 956 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	-18.65	-	-	-
6175	-17.57	-	-	-
6415	-16.59	-	-	-
6435	-17.19	-	-	-
6475	-17.59	-	-	-
6515	-16.98	-	-	-
6535	-17.06	-	-	-
6695	-17.92	-	-	-
6855	-17.74	-	-	-

Table 957 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	-10.25	-	-	-
6165	-12.16	-	-	-
6405	-11.13	-	-	-
6445	-10.69	-	-	-
6485	-9.12	-	-	-
6525	-10.93	-	-	-
6565	-10.74	-	-	-
6685	-11.03	-	-	-
6845	-12.59	-	-	-

Table 958 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	-11.27	-	-	-
6145	-10.42	-	-	-
6385	-8.82	-	-	-
6465	-9.71	-	-	-
6545	-9.63	-	-	-
6625	-9.43	-	-	-
6705	-9.49	-	-	-
6785	-9.39	-	-	-

Table 959 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	-10.10	-	-	-
6185	-8.70	-	-	-
6345	-7.41	-	-	-
6505	-8.96	-	-	-
6665	-8.88	-	-	-

Table 960 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU26.0)	-14.42	-	-	-
6175 (RU26.0)	-14.39	-	-	-
6415 (RU26.8)	-11.95	-	-	-
6435 (RU26.0)	-14.85	-	-	-
6475 (RU26.0)	-13.72	-	-	-
6515 (RU26.8)	-14.93	-	-	-
6535 (RU26.0)	-14.57	-	-	-
6695 (RU26.0)	-15.27	-	-	-
6855 (RU26.8)	-12.28	-	-	-

Table 961 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU52.37)	-14.67	-	-	-
6175 (RU52.37)	-14.51	-	-	-
6415 (RU52.40)	-13.07	-	-	-
6435 (RU52.37)	-14.44	-	-	-
6475 (RU52.37)	-14.91	-	-	-
6515 (RU52.40)	-14.14	-	-	-
6535 (RU52.37)	-13.37	-	-	-
6695 (RU52.37)	-14.78	-	-	-
6855 (RU52.40)	-14.47	-	-	-

Table 962 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU106.53)	-16.70	-	-	-
6175 (RU106.53)	-16.55	-	-	-
6415 (RU106.54)	-12.73	-	-	-
6435 (RU106.53)	-16.10	-	-	-
6475 (RU106.53)	-16.31	-	-	-
6515 (RU106.54)	-13.75	-	-	-
6535 (RU106.53)	-15.22	-	-	-
6695 (RU106.53)	-14.67	-	-	-
6855 (RU106.54)	-12.99	-	-	-

Table 963 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU Size 52 + RU Size 26.70)	-16.95	-	-	-
6175 (RU Size 52 + RU Size 26.70)	-17.38	-	-	-
6415 (RU Size 52 + RU Size 26.72)	-15.67	-	-	-
6435 (RU Size 52 + RU Size 26.70)	-15.84	-	-	-
6475 (RU Size 52 + RU Size 26.70)	-15.03	-	-	-
6515 (RU Size 52 + RU Size 26.72)	-15.19	-	-	-
6535 (RU Size 52 + RU Size 26.70)	-17.44	-	-	-
6695 (RU Size 52 + RU Size 26.70)	-15.79	-	-	-
6855 (RU Size 52 + RU Size 26.72)	-15.75	-	-	-

Table 964 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU Size 106 + RU Size 26.82)	-15.10	-	-	-
6175 (RU Size 106 + RU Size 26.82)	-15.65	-	-	-
6415 (RU Size 106 + RU Size 26.83)	-14.17	-	-	-
6435 (RU Size 106 + RU Size 26.82)	-15.65	-	-	-
6475 (RU Size 106 + RU Size 26.82)	-16.78	-	-	-
6515 (RU Size 106 + RU Size 26.83)	-13.99	-	-	-
6535 (RU Size 106 + RU Size 26.82)	-16.76	-	-	-
6695 (RU Size 106 + RU Size 26.82)	-16.35	-	-	-
6855 (RU Size 106 + RU Size 26.83)	-14.41	-	-	-

Table 965 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242 SP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985 (RU Size 484 + RU Size 242.93)	-9.96	-	-	-
6145 (RU Size 484 + RU Size 242.92)	-9.23	-	-	-
6385 (RU Size 484 + RU Size 242.90)	-9.95	-	-	-
6465 (RU Size 484 + RU Size 242.93)	-8.70	-	-	-
6545 (RU Size 484 + RU Size 242.90)	-8.87	-	-	-
6625 (RU Size 484 + RU Size 242.93)	-9.39	-	-	-
6705 (RU Size 484 + RU Size 242.91)	-9.59	-	-	-
6785 (RU Size 484 + RU Size 242.90)	-11.51	-	-	-

Table 966 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 SP (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484.95)	-9.30	-	-	-
6345 (RU Size 996 + RU Size 484.94)	-9.33	-	-	-
6505 (RU Size 996 + RU Size 484.94)	-8.13	-	-	-
6665 (RU Size 996 + RU Size 484.94)	-8.83	-	-	-

Table 967 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 SP (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025 (RU Size 996 + RU Size 484.95)	-10.29	-	-	-
6185 (RU Size 996 + RU Size 484.94)	-7.61	-	-	-
6505 (RU Size 996 + RU Size 484.95)	-8.30	-	-	-
6665 (RU Size 996 + RU Size 484.95)	-8.31	-	-	-

Table 968 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484 + RU Size 242.97)	-9.33	-	-	-
6185 (RU Size 996 + RU Size 484 + RU Size 242.98)	-8.77	-	-	-
6185 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.44	-	-	-
6345 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.46	-	-	-
6505 (RU Size 996 + RU Size 484 + RU Size 242.96)	-9.70	-	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.30	-	-	-

Table 969 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 SP (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025 (RU Size 996 + RU Size 484 + RU Size 242.99)	-9.78	-	-	-
6505 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.63	-	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.99)	-9.48	-	-	-

Table 970 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a20 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115	-13.83	-	-	-
6175	-15.23	-	-	-
6255	-15.40	-	-	-
6415	-14.82	-	-	-
6435	-14.45	-	-	-
6475	-15.01	-	-	-
6515	-14.83	-	-	-
6535	-14.66	-	-	-
6695	-15.80	-	-	-
6855	-14.89	-	-	-
6875	-15.03	-	-	-
6895	-14.89	-	-	-
6995	-13.68	-	-	-
7095	-14.32	-	-	-
7115	-15.48	-	-	-

Table 971 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a40 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6125	-11.42	-	-	-
6245	-8.89	-	-	-
6405	-9.89	-	-	-
6445	-9.53	-	-	-
6485	-9.85	-	-	-
6525	-9.49	-	-	-
6565	-8.95	-	-	-
6725	-9.81	-	-	-
6845	-11.04	-	-	-
6885	-11.41	-	-	-
6925	-11.58	-	-	-
7005	-11.71	-	-	-
7085	-10.01	-	-	-

Table 972 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a80 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6145	-10.07	-	-	-
6225	-9.10	-	-	-
6385	-9.48	-	-	-
6465	-9.38	-	-	-
6545	-9.62	-	-	-
6625	-10.69	-	-	-
6705	-9.55	-	-	-
6785	-9.95	-	-	-
6865	-9.64	-	-	-
6945	-9.68	-	-	-
7025	-9.73	-	-	-

Table 973 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a160 VLP	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185	-9.65	-	-	-
6345	-9.44	-	-	-
6505	-8.87	-	-	-
6665	-9.32	-	-	-
6825	-8.85	-	-	-
6985	-9.20	-	-	-

Table 974 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115	-17.45	-	-	-
6175	-17.01	-	-	-
6255	-14.82	-	-	-
6415	-14.16	-	-	-
6435	-14.57	-	-	-
6475	-16.02	-	-	-
6515	-14.79	-	-	-
6535	-17.15	-	-	-
6695	-15.87	-	-	-
6855	-17.29	-	-	-
6875	-17.06	-	-	-
6895	-15.32	-	-	-
6995	-15.78	-	-	-
7095	-15.54	-	-	-
7115	-15.33	-	-	-

Table 975 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6125	-11.31	-	-	-
6245	-10.57	-	-	-
6405	-9.91	-	-	-
6445	-11.01	-	-	-
6485	-9.65	-	-	-
6525	-9.61	-	-	-
6565	-9.09	-	-	-
6725	-10.20	-	-	-
6845	-10.99	-	-	-
6885	-11.44	-	-	-
6925	-11.61	-	-	-
7005	-11.23	-	-	-
7085	-10.15	-	-	-

Table 976 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6145	-9.51	-	-	-
6225	-10.40	-	-	-
6385	-9.17	-	-	-
6465	-8.97	-	-	-
6545	-9.06	-	-	-
6625	-8.67	-	-	-
6705	-9.30	-	-	-
6785	-8.85	-	-	-
6865	-10.15	-	-	-
6945	-10.54	-	-	-
7025	-9.27	-	-	-

Table 977 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185	-8.51	-	-	-
6345	-8.05	-	-	-
6505	-8.03	-	-	-
6665	-7.82	-	-	-
6825	-7.78	-	-	-
6985	-7.97	-	-	-

Table 978 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU26 VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115 (RU26.0)	-13.55	-	-	-
6255 (RU26.0)	-12.57	-	-	-
6415 (RU26.8)	-15.42	-	-	-
6435 (RU26.0)	-14.09	-	-	-
6475 (RU26.0)	-16.38	-	-	-
6515 (RU26.8)	-13.48	-	-	-
6875 (RU26.3)	-21.49	-	-	-
6875 (RU26.5)	-21.48	-	-	-
6895 (RU26.0)	-15.05	-	-	-
6995 (RU26.0)	-12.67	-	-	-
7095 (RU26.8)	-15.14	-	-	-

Table 979 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU52 VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115 (RU52.37)	-13.22	-	-	-
6255 (RU52.37)	-12.86	-	-	-
6415 (RU52.40)	-13.66	-	-	-
6435 (RU52.37)	-14.51	-	-	-
6475 (RU52.37)	-13.73	-	-	-
6515 (RU52.40)	-12.56	-	-	-
6535 (RU52.37)	-15.56	-	-	-
6695 (RU52.37)	-13.82	-	-	-
6855 (RU52.40)	-11.59	-	-	-
6875 (RU52.38)	-19.35	-	-	-
6875 (RU52.39)	-20.48	-	-	-
6895 (RU52.37)	-14.31	-	-	-
6995 (RU52.37)	-13.65	-	-	-
7095 (RU52.40)	-12.66	-	-	-

Table 980 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU106 VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115 (RU106.53)	-15.87	-	-	-
6255 (RU106.53)	-14.41	-	-	-
6395 (RU106.53)	-16.38	-	-	-
6415 (RU106.54)	-15.49	-	-	-
6435 (RU106.53)	-16.02	-	-	-
6475 (RU106.53)	-14.70	-	-	-
6515 (RU106.54)	-14.34	-	-	-
6535 (RU106.53)	-16.04	-	-	-
6695 (RU106.53)	-14.94	-	-	-
6855 (RU106.54)	-16.24	-	-	-
6875 (RU106.53)	-17.02	-	-	-
6875 (RU106.54)	-14.18	-	-	-
6895 (RU106.53)	-15.04	-	-	-
6995 (RU106.53)	-15.83	-	-	-
7095 (RU106.54)	-15.25	-	-	-

Table 981 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 52 + RU Size 26 VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115 (RU Size 52 + RU Size 26.70)	-15.41	-	-	-
6255 (RU Size 52 + RU Size 26.70)	-16.00	-	-	-
6415 (RU Size 52 + RU Size 26.72)	-15.14	-	-	-
6435 (RU Size 52 + RU Size 26.70)	-17.08	-	-	-
6475 (RU Size 52 + RU Size 26.70)	-16.02	-	-	-
6515 (RU Size 52 + RU Size 26.72)	-15.20	-	-	-
6535 (RU Size 52 + RU Size 26.70)	-16.88	-	-	-
6695 (RU Size 52 + RU Size 26.70)	-16.00	-	-	-
6855 (RU Size 52 + RU Size 26.72)	-17.02	-	-	-
6875 (RU Size 52 + RU Size 26.70)	-17.98	-	-	-
6875 (RU Size 52 + RU Size 26.72)	-16.36	-	-	-
6895 (RU Size 52 + RU Size 26.70)	-17.48	-	-	-
6995 (RU Size 52 + RU Size 26.70)	-15.95	-	-	-
7095 (RU Size 52 + RU Size 26.72)	-17.01	-	-	-

Table 982 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT20 RU Size 106 + RU Size 26 VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6115 (RU Size 106 + RU Size 26.82)	-16.66	-	-	-
6255 (RU Size 106 + RU Size 26.82)	-17.68	-	-	-
6415 (RU Size 106 + RU Size 26.83)	-14.78	-	-	-
6435 (RU Size 106 + RU Size 26.82)	-16.09	-	-	-
6475 (RU Size 106 + RU Size 26.82)	-17.83	-	-	-
6515 (RU Size 106 + RU Size 26.83)	-13.65	-	-	-
6535 (RU Size 106 + RU Size 26.82)	-16.49	-	-	-
6695 (RU Size 106 + RU Size 26.82)	-15.73	-	-	-
6855 (RU Size 106 + RU Size 26.83)	-14.68	-	-	-
6875 (RU Size 106 + RU Size 26.82)	-15.36	-	-	-
6875 (RU Size 106 + RU Size 26.83)	-15.52	-	-	-
6895 (RU Size 106 + RU Size 26.82)	-17.18	-	-	-
6995 (RU Size 106 + RU Size 26.82)	-16.99	-	-	-
7095 (RU Size 106 + RU Size 26.83)	-14.62	-	-	-

Table 983 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT80 RU Size 484 + RU Size 242 VLP	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6145 (RU Size 484 + RU Size 242.93)	-11.45	-	-	-
6225 (RU Size 484 + RU Size 242.92)	-9.02	-	-	-
6385 (RU Size 484 + RU Size 242.90)	-9.72	-	-	-
6465 (RU Size 484 + RU Size 242.90)	-9.35	-	-	-
6465 (RU Size 484 + RU Size 242.93)	-9.03	-	-	-
6545 (RU Size 484 + RU Size 242.90)	-9.26	-	-	-
6545 (RU Size 484 + RU Size 242.93)	-8.99	-	-	-
6625 (RU Size 484 + RU Size 242.93)	-8.76	-	-	-
6705 (RU Size 484 + RU Size 242.91)	-9.55	-	-	-
6785 (RU Size 484 + RU Size 242.90)	-11.05	-	-	-
6865 (RU Size 484 + RU Size 242.90)	-11.03	-	-	-
6865 (RU Size 484 + RU Size 242.93)	-10.77	-	-	-
6945 (RU Size 484 + RU Size 242.93)	-8.82	-	-	-
7025 (RU Size 484 + RU Size 242.90)	-11.05	-	-	-

Table 984 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 VLP (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484.95)	-8.30	-	-	-
6345 (RU Size 996 + RU Size 484.94)	-9.64	-	-	-
6505 (RU Size 996 + RU Size 484.94)	-7.39	-	-	-
6665 (RU Size 996 + RU Size 484.94)	-8.87	-	-	-
6825 (RU Size 996 + RU Size 484.94)	-9.27	-	-	-
6985 (RU Size 996 + RU Size 484.94)	-7.48	-	-	-

Table 985 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 VLP (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484.94)	-8.53	-	-	-
6505 (RU Size 996 + RU Size 484.95)	-8.07	-	-	-
6665 (RU Size 996 + RU Size 484.95)	-7.75	-	-	-
6825 (RU Size 996 + RU Size 484.95)	-8.25	-	-	-
6985 (RU Size 996 + RU Size 484.95)	-7.96	-	-	-

Table 986 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Primary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6185 (RU Size 996 + RU Size 484 + RU Size 242.97)	-8.55	-	-	-
6185 (RU Size 996 + RU Size 484 + RU Size 242.98)	-8.43	-	-	-
6185 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.27	-	-	-
6345 (RU Size 996 + RU Size 484 + RU Size 242.96)	-9.45	-	-	-
6505 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.79	-	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.96)	-9.24	-	-	-
6825 (RU Size 996 + RU Size 484 + RU Size 242.96)	-8.90	-	-	-
6985 (RU Size 996 + RU Size 484 + RU Size 242.96)	-7.77	-	-	-

Table 987 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11be EHT160 RU Size 996 + RU Size 484 + RU Size 242 VLP (Secondary)	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain Id(s):	0

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6505 (RU Size 996 + RU Size 484 + RU Size 242.99)	-7.30	-	-	-
6665 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.56	-	-	-
6825 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.20	-	-	-
6985 (RU Size 996 + RU Size 484 + RU Size 242.99)	-8.66	-	-	-

Table 988 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a20 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	-	-15.47	-	-
6175	-	-14.41	-	-
6395	-	-14.50	-	-
6415	-	-15.39	-	-
6435	-	-14.79	-	-
6475	-	-14.79	-	-
6515	-	-15.40	-	-
6535	-	-15.53	-	-
6695	-	-14.78	-	-
6855	-	-14.05	-	-
6875	-	-14.90	-	-
6895	-	-14.24	-	-
6995	-	-14.51	-	-
7095	-	-16.30	-	-
7115	-	-16.79	-	-

Table 989 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a40 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	-	-9.02	-	-
6165	-	-9.06	-	-
6365	-	-9.99	-	-
6405	-	-9.65	-	-
6445	-	-9.36	-	-
6485	-	-10.81	-	-
6525	-	-9.52	-	-
6885	-	-10.84	-	-
6925	-	-12.34	-	-
7005	-	-11.77	-	-
7085	-	-10.95	-	-

Table 990 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	6.525-6.875 GHz	Band:	U-NII-7
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a40 LPI	Duty Cycle (%):	-
Data Rate:	24 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6565	-	-11.50	-	-
6725	-	-11.10	-	-
6845	-	-10.90	-	-

Table 991 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a80 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	-	-11.02	-	-
6145	-	-11.34	-	-
6305	-	-9.97	-	-
6385	-	-9.36	-	-
6465	-	-10.10	-	-
6545	-	-8.61	-	-
6625	-	-10.04	-	-
6705	-	-10.65	-	-
6785	-	-10.82	-	-
6865	-	-10.73	-	-
6945	-	-10.50	-	-

Table 992 - Unwanted Emissions Within the Band Results



Test Configuration				
Frequency Range:	6.875-7.125 GHz	Band:	U-NII-8	
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j	

DUT Configuration				
Mode:	802.11a80 LPI	Duty Cycle (%):	-	
Data Rate:	24 Mbps	DCCF (dB):	-	
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-	
Active Port(s):	B (Core 1)	Active Chain Id(s):	1	

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
7025	-	-10.51	-	-

Table 993 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11a160 LPI	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	-	-10.83	-	-
6185	-	-10.22	-	-
6345	-	-8.71	-	-
6505	-	-7.97	-	-
6665	-	-8.24	-	-
6825	-	-8.39	-	-
6985	-	-4.44	-	-

Table 994 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955	-	-17.64	-	-
6175	-	-16.50	-	-
6415	-	-17.57	-	-
6435	-	-16.98	-	-
6475	-	-17.49	-	-
6515	-	-15.97	-	-
6535	-	-16.78	-	-
6695	-	-17.00	-	-
6855	-	-16.98	-	-
6875	-	-15.31	-	-
6895	-	-16.76	-	-
6995	-	-16.37	-	-
7095	-	-16.82	-	-
7115	-	-15.27	-	-

Table 995 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5965	-	-11.04	-	-
6165	-	-10.71	-	-
6405	-	-9.43	-	-
6445	-	-9.40	-	-
6485	-	-10.50	-	-
6525	-	-10.21	-	-
6565	-	-10.03	-	-
6725	-	-10.94	-	-
6845	-	-10.54	-	-
6885	-	-10.74	-	-
6925	-	-12.54	-	-
7005	-	-11.90	-	-
7085	-	-11.57	-	-

Table 996 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5985	-	-10.16	-	-
6145	-	-10.44	-	-
6385	-	-8.90	-	-
6465	-	-8.48	-	-
6545	-	-8.45	-	-
6625	-	-9.78	-	-
6705	-	-10.45	-	-
6785	-	-10.65	-	-
6865	-	-9.95	-	-
6945	-	-10.19	-	-
7025	-	-9.84	-	-

Table 997 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
6025	-	-8.08	-	-
6185	-	-8.11	-	-
6345	-	-8.19	-	-
6505	-	-6.96	-	-
6665	-	-8.32	-	-
6825	-	-8.00	-	-
6985	-	-8.38	-	-

Table 998 - Unwanted Emissions Within the Band Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(b) RSS-248 4.6.2	Test Method(s):	KDB 987594 clause j

DUT Configuration			
Mode:	802.11ax HE20 RU26 LPI	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain Id(s):	1

Test Frequency (MHz)	Unwanted Emissions Within the RLAN Band Margin (dB)			
	A	B	C	D
5955 (RU26.0)	-	-11.97	-	-
6175 (RU26.0)	-	-15.64	-	-
6415 (RU26.8)	-	-12.99	-	-
6435 (RU26.0)	-	-15.33	-	-
6475 (RU26.0)	-	-12.76	-	-
6515 (RU26.8)	-	-13.95	-	-
6535 (RU26.0)	-	-15.02	-	-
6695 (RU26.0)	-	-13.20	-	-
6855 (RU26.8)	-	-13.27	-	-
6875 (RU26.3)	-	-22.45	-	-
6875 (RU26.5)	-	-20.79	-	-
6895 (RU26.0)	-	-15.12	-	-
6995 (RU26.0)	-	-15.02	-	-
7095 (RU26.8)	-	-13.83	-	-

Table 999 - Unwanted Emissions Within the Band Results